



| <b>FCC TEST REPORT</b><br><b>FCC 47 CFR Part 15C</b><br><b>Industry Canada RSS-210</b><br><b>Operation within the 13.110 – 14.010 MHz band</b> |  |
|--|--|
| <b>Report Reference No.</b> .....  | G0M-1504-4714-TFC225RI-V01   |
| <b>Testing Laboratory</b> .....  | Eurofins Product Service GmbH  |
| Address .....  | Storkower Str. 38c<br>15526 Reichenwalde<br>Germany  |
| Accreditation .....  | <div style="display: flex; justify-content: center; align-items: center;">   </div> <p style="text-align: center; font-size: small;">                     A2LA Accredited Testing Laboratory, Certificate No.: 1983.01<br/>                     FCC Filed Test Laboratory, Reg.-No.: 96970<br/>                     IC OATS Filing assigned code: 3470A                 </p> |
| <b>Applicant's name</b> .....  | Dräger Safety AG & Co. KGaA  |
| Address .....  | Revalstraße 1<br>23560 Lübeck<br>GERMANY   |
| <b>Test specification:</b>   |  |
| Standard.....  | 47 CFR Part 15C<br>RSS-210, Issue 8, 2010-12<br>RSS-Gen, Issue 4, 2014-11<br>ANSI C63.4:2014   |
| Test scope.....  | complete Radio compliance test   |
| <b>Equipment under test (EUT):</b>   |  |
| Product description  | Powered Air Purifying Respirator   |
| Model No.  | R59500   |
| Additional Model(s)  | None   |
| Brand Name(s)  | Dräger X-plore 8500 (IP)   |
| Hardware version   | V05.00   |
| Firmware / Software version  | V00.26   |
|  | FCC-ID: X6O-XPLORE8500    IC: 5895F-XPLORE8500   |
| <b>Test result</b>   | <b>Passed</b>  |

**Possible test case verdicts:**

- neither assessed nor tested ..... : N/N
- required by standard but not appl. to test object ..... : N/A
- required by standard but not tested ..... : N/T
- not required by standard for the test object ..... : N/R
- test object does meet the requirement ..... : P (Pass)
- test object does not meet the requirement ..... : F (Fail)

**Testing:**

Test Lab Temperature ..... : 20 – 23 °C

Test Lab Humidity ..... : 32 – 38 %

Date of receipt of test item ..... : 2015-05-07

Date (s) of performance of tests ..... : 2015-08-20 – 2015-08-21

Compiled by ..... : Matthias Handrik

Tested by (+ signature) ..... : Matthias Handrik  
(Responsible for Test)



Approved by (+ signature) ..... : Toralf Jahn  
(Deputy Head of Lab)



Date of issue ..... : 2015-10-02

Total number of pages ..... : 27

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

## Version History

| Version | Issue Date | Remarks         | Revised by |
|---------|------------|-----------------|------------|
| 01      | 2015-10-02 | Initial Release |            |

---

**REPORT INDEX**

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>EQUIPMENT (TEST ITEM) DESCRIPTION:</b>   | <b>5</b>  |
| 1.1      | Photos – Equipment External   | 6         |
| 1.2      | Photos – Equipment internal   | 8         |
| 1.3      | Photos – Test setup   | 10        |
| 1.4      | Supporting Equipment Used During Testing  | 11        |
| 1.5      | Test Modes  | 12        |
| 1.6      | Test Equipment Used During Testing  | 13        |
| 1.7      | Sample emission level calculation   | 14        |
| <b>2</b> | <b>RESULT SUMMARY</b>   | <b>15</b> |
| <b>3</b> | <b>TEST CONDITIONS AND RESULTS</b>  | <b>16</b> |
| 3.1      | Test Conditions and Results – Occupied Bandwidth                                      | 16        |
| 3.2      | Test Conditions and Results – Fundamental in-band field strength emissions            | 17        |
| 3.3      | Test Conditions and Results – Emissions radiated outside the specified frequency band | 19        |
| 3.4      | Test Conditions and Results – Frequency stability                                     | 21        |
| ANNEX A  | Transmitter in-band emissions   | 23        |
| ANNEX B  | Transmitter radiated spurious emissions   | 24        |

**1 Equipment (Test item) Description:**

|                                    |   |                    |
|------------------------------------|---|--------------------|
| <b>Description</b>                 | Powered Air Purifying Respirator  |                    |
| <b>Model</b>                       | R59500  |                    |
| <b>Additional Model(s)</b>         | None  |                    |
| <b>Brand Name(s)</b>               | Dräger X-plore 8500 (IP)  |                    |
| <b>Serial number</b>               | None  |                    |
| <b>Hardware version</b>            | V05.00  |                    |
| <b>Software / Firmware version</b> | V00.26  |                    |
| <b>FCC-ID</b>                      | X6O-XPLORE8500  |                    |
| <b>IC</b>                          | 5895F-XPLORE8500  |                    |
| <b>Equipment type</b>              | End product   |                    |
| <b>Radio type</b>                  | Transceiver   |                    |
| <b>Radio technology</b>            | 13.56 MHz RFID  |                    |
| <b>Operating frequency range</b>   | 13.56 MHz   |                    |
| <b>Assigned frequency band</b>     | 13.110 - 14.010 MHz   |                    |
| <b>Frequency range</b>             | $F_{MID}$   | 13.56 MHz          |
| <b>Spreading</b>                   | None  |                    |
| <b>Modulations</b>                 | ASK   |                    |
| <b>Number of channels</b>          | 1   |                    |
| <b>Channel spacing</b>             | None  |                    |
| <b>Number of antennas</b>          | 1   |                    |
| <b>Antenna</b>                     | Type  | external dedicated |
|                                    | Model   | loop antenna       |
|                                    | Manufacturer  | custom             |
| <b>Manufacturer</b>                | MSC Technologies Systems GmbH<br>Munzingerstr. 3<br>79111 Freiburg<br>Germany |                    |
| <b>Power supply</b>                | $V_{NOM}$   | 12 VDC             |
|                                    | $V_{MIN}$   | 9 VDC              |
|                                    | $V_{MAX}$   | 12.6 VDC           |
| <b>Temperatures</b>                | $T_{NOM}$   | 20°C               |
|                                    | $T_{MIN}$   | -10°C              |
|                                    | $T_{MAX}$   | 60°C               |
| <b>AC/DC-Adaptor</b>               | Model   | N/A                |
|                                    | Vendor  | N/A                |
|                                    | Input   | N/A                |
|                                    | Output  | N/A                |

**1.4 Supporting Equipment Used During Testing**

| Product Type*  | Device | Manufacturer | Model No. | Comments |
|--|--------|--------------|-----------|----------|
| None   |        |              |           |          |
| <p><b>*Note:</b> Use the following abbreviations:</p> <ul style="list-style-type: none"> <li>AE : Auxiliary/Associated Equipment, or</li> <li>SIM : Simulator (Not Subjected to Test)</li> <li>CABL : Connecting cables</li> </ul> |        |              |           |          |

## 1.5 Test Modes

| Mode # | Description         |   |
|--------|---------------------|---|
| Single | General conditions: | EUT powered by battery  |
|        | Radio conditions:   | Mode = standalone transmit<br>Modulation = ASK<br>Power level = Maximum |

**1.6 Test Equipment Used During Testing**

| <b>Measurement Software</b> |                  |            |           |
|-----------------------------|------------------|------------|-----------|
| Description                 | Manufacturer     | Name       | Version   |
| EMC Test Software           | Dare Instruments | Radimation | 2014.1.15 |

| <b>Occupied Bandwidth</b> |              |        |            |           |          |
|---------------------------|--------------|--------|------------|-----------|----------|
| Description               | Manufacturer | Model  | Identifier | Cal. Date | Cal. Due |
| Spectrum Analyzer         | R&S          | FSU 26 | EF01003    | 2015-04   | 2016-04  |

| <b>Field strength emissions</b> |              |         |            |           |          |
|---------------------------------|--------------|---------|------------|-----------|----------|
| Description                     | Manufacturer | Model   | Identifier | Cal. Date | Cal. Due |
| Semi-anechoic chamber           | Frankonia    | AC 1    | EF00062    | -         | -        |
| Spectrum Analyzer               | R&S          | FSIQ26  | EF00242    | 2015-04   | 2016-04  |
| Loop Antenna                    | R&S          | HFH2-Z2 | EF00184    | 2014-11   | 2016-11  |
| Biconical Antenna               | R&S          | HK 116  | EF00012    | 2013-02   | 2016-02  |
| LPD Antenna                     | R&S          | HL 223  | EF00187    | 2014-03   | 2017-03  |
| LPD Antenna                     | R&S          | HL 025  | EF00327    | 2013-02   | 2016-02  |



## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:


$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

## 2 Result Summary


| FCC 47 CFR Part 15C, IC RSS-210                   |  |                  |        |   |
|---|--|------------------|--------|---|
| Product Specific Standard Section                 | Requirement – Test                                     | Reference Method | Result | Remarks   |
| RSS-Gen 6.6                                       | Occupied Bandwidth                                     | RSS-Gen 6.6      | N/R    | Informational only                                  |
| FCC 15.225(a-c)<br>IC RSS-210 A2.6(a-c)           | Fundamental in-band field strength emissions           | ANSI C63.4       | PASS   |   |
| FCC 15.225(d)<br>FCC 15.209<br>IC RSS-210 A2.6(d) | Emission radiated outside the specified frequency band | ANSI C63.4       | PASS   |   |
| FCC 15.225(e)<br>IC RSS-210 A2.6                  | Frequency stability                                    | ANSI C63.4       | PASS   |   |
| IC RSS-Gen 4.10<br>IC RSS-Gen 7.1                 | Receiver radiated spurious emissions                   | ANSI C 63.4      | N/A    |   |
| 47 CFR 15.207<br>RSS-Gen 8.8                      | AC power line conducted emissions                      | ANSI C63.4       | N/A    | EUT not powered directly or indirectly via AC-Mains |
| <b>Remarks:</b>                                   |  |                  |        |   |

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Occupied Bandwidth
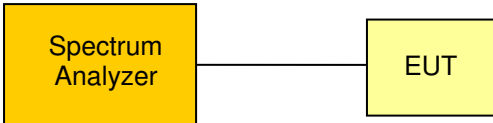
| Occupied Bandwidth acc. to IC RSS-Gen  |                    | Verdict: PASS            |
|--|--------------------|--------------------------|
| Test according to measurement reference  | Reference Method   |                          |
|  | RSS-Gen 6.6        |                          |
| Test frequency range   | Tested frequencies |                          |
|  | F <sub>MID</sub>   |                          |
| EUT test mode  | Single             |                          |
| <b>Limits</b>  |                    |                          |
| None (Informational only)  |                    |                          |
| <b>Test setup</b>  |                    |                          |
|  <pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]             </pre>   |                    |                          |
| <b>Test procedure</b>  |                    |                          |
| <ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set to at least twice the emission spectrum</li> <li>3. Resolution bandwidth set to 1 % of span</li> <li>4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function</li> </ol> |                    |                          |
| <b>Test results</b>  |                    |                          |
| Channel  | Frequency [MHz]    | Occupied Bandwidth [kHz] |
| F <sub>MID</sub>   | 13.56              | 222.756                  |
| Comments: Measurement is applicable to all variants  |                    |                          |


### 3.2 Test Conditions and Results – Fundamental in-band field strength emissions
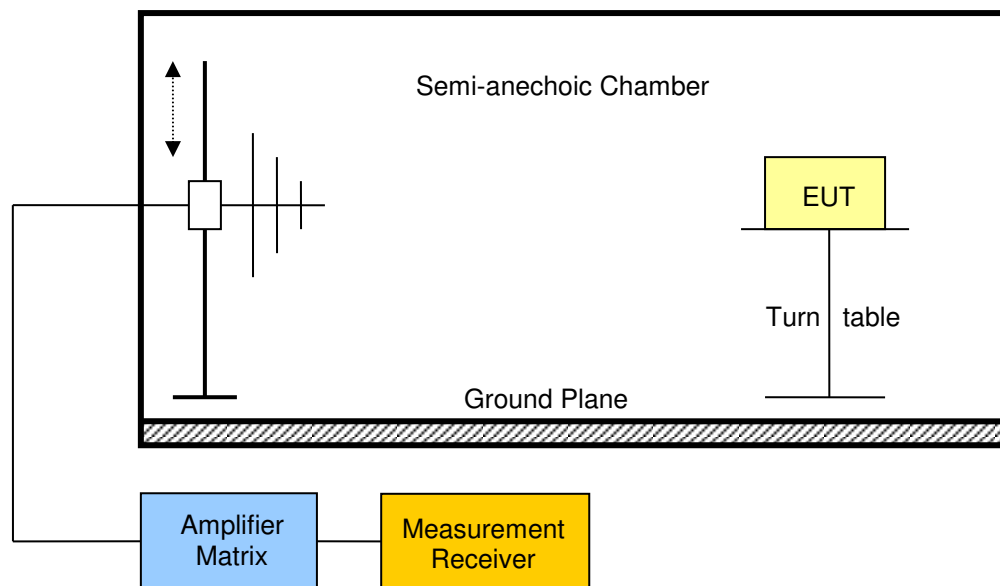
| Field strength emissions acc. to FCC 47 CFR 15.225 / IC RSS-210   |  | Verdict: PASS  |                    |
|---|--|----------------|--------------------|
| Test according referenced standards   | Reference Method                       |                |                    |
|   | FCC 15.225(a-c) / IC RSS-210 A2.6(a-c) |                |                    |
| Test according to measurement reference   | Reference Method                       |                |                    |
|   | ANSI C63.4                             |                |                    |
| Test frequency range  | Tested frequencies                     |                |                    |
|   | F <sub>MID</sub>                       |                |                    |
| EUT test mode   | Single                                 |                |                    |
| Limits  |  |                |                    |
| Frequency range [MHz]   | Limit [µV/m]                           | Limit [dBµV/m] | Limit Distance [m] |
| 13.553 – 13.567   | 15848                                  | 84             | 30                 |
| 13.410 – 13.553<br>13.567 – 13.710  | 334                                    | 50.5           | 30                 |
| 13.110 – 13.410<br>13.710 – 14.010  | 106                                    | 40.5           | 30                 |
| Test setup  |  |                |                    |
|   |  |                |                    |
| Test procedure  |  |                |                    |
| <ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. Span it set according to measurement range</li> <li>3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector</li> <li>4. Below 30MHz and extrapolation factor of 40dB/decade is used and at 30MHz and above an extrapolation factor of 20dB/decade is used (47 CRF 15.31(f)).</li> </ol> |  |                |                    |


| Test results   |                 |                |                            |      |      |                            |                           |             |
|--|-----------------|----------------|----------------------------|------|------|----------------------------|---------------------------|-------------|
| Channel  | Frequency [MHz] | Emission [MHz] | Level @ 30m [db $\mu$ V/m] | Det. | Pol. | Limit @ 30m [db $\mu$ V/m] | Measurement distance [m]* | Margin [dB] |
| F <sub>MID</sub>   | 13.56           | 13.56          | 35.3                       | pk   | -    | 84                         | 3m                        | -48.70      |
| Comments: * Physical distance between EUT and measurement antenna. See Annex |                 |                |                            |      |      |                            |                           |             |

**3.3 Test Conditions and Results – Emissions radiated outside the specified frequency band**

| Radiated out-of-band emissions acc. to<br>FCC 47 CFR 15.225 / IC RSS-210   |            |                                    |                      | Verdict: PASS      |
|--|------------|------------------------------------|----------------------|--------------------|
| Test according referenced standards  |            | Reference Method                   |                      |                    |
|  |            | FCC 15.225(d) / IC RSS-210 A2.6(d) |                      |                    |
| Test according to measurement reference  |            | Reference Method                   |                      |                    |
|  |            | ANSI C63.4                         |                      |                    |
| Test frequency range   |            | Tested frequencies                 |                      |                    |
|  |            | 9 kHz – 216 MHz                    |                      |                    |
| EUT test mode  |            | Single                             |                      |                    |
| Limits   |            |                                    |                      |                    |
| Frequency range [MHz]  | Detector   | Limit [ $\mu$ V/m]                 | Limit [dB $\mu$ V/m] | Limit Distance [m] |
| 0.009 – 0.490  | Quasi-Peak | 2400/F[kHz]                        | 48.5 – 13.8          | 300                |
| 0.490 – 1.705  | Quasi-Peak | 2400/F[kHz]                        | 13.8 – 2.97          | 30                 |
| 1.705 – 30   | Quasi-Peak | 30                                 | 29.5                 | 30                 |
| 30 – 88  | Quasi-Peak | 100                                | 40                   | 3                  |
| 88 – 216   | Quasi-Peak | 150                                | 43.5                 | 3                  |
| The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. |            |                                    |                      |                    |

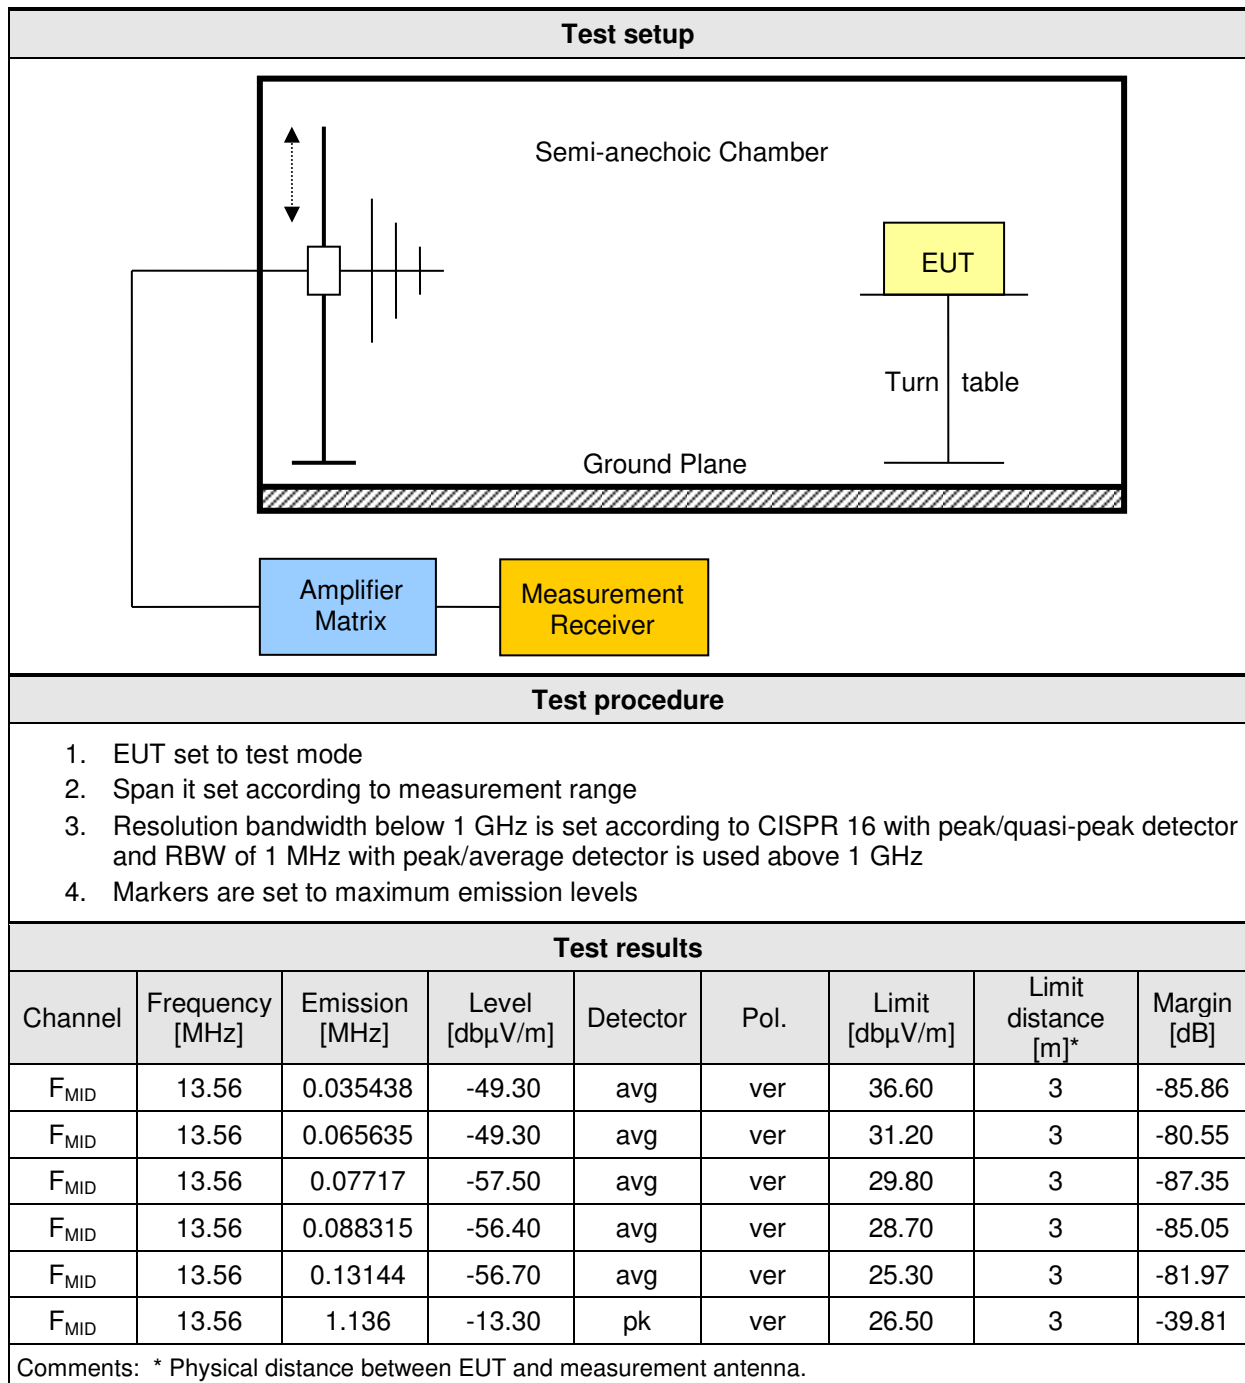

**3.4 Test Conditions and Results – Frequency stability**
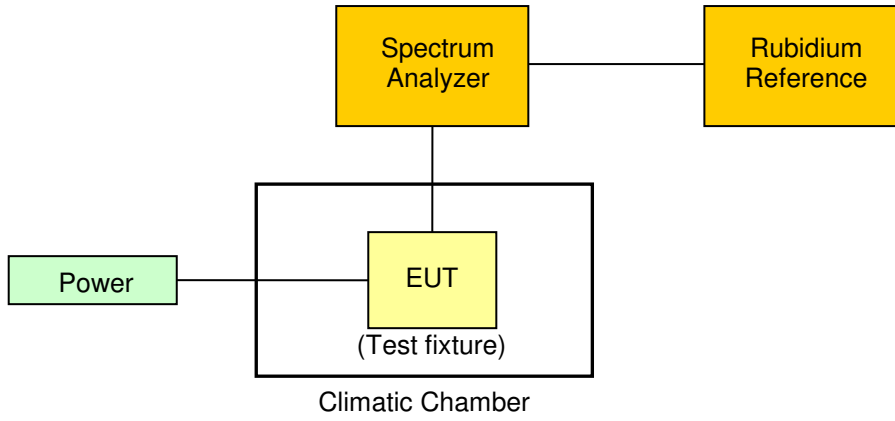
| <b>Occupied Bandwidth acc. to FCC 15.225 / IC RSS-210</b>   |                                 | <b>Verdict: PASS</b> |
|---|---------------------------------|----------------------|
| Test according referenced standards   | Reference Method                |                      |
|   | FCC 15.225(e) / IC RSS-210 A2.6 |                      |
| Test according to measurement reference   | Reference Method                |                      |
|   | ANSI C63.4                      |                      |
| Test frequency range  | Tested frequencies              |                      |
|   | $F_{MID}$                       |                      |
| EUT test mode   | Single                          |                      |
| <b>Limits</b>   |                                 |                      |
| Frequency error limit   |                                 |                      |
| $\pm 0.01\%$ ( $\pm 100\text{ppm}$ )  |                                 |                      |
| <b>Test setup</b>   |                                 |                      |
|  <pre> graph TD     Power[Power] --- EUT[EUT<br/>(Test fixture)]     subgraph Climatic Chamber         EUT     end     EUT --- SA[Spectrum Analyzer]     SA --- RR[Rubidium Reference]     </pre>                                    |                                 |                      |
| <b>Test procedure</b>   |                                 |                      |
| <ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. The ambient temperature and supply voltage is set according to measurement conditions</li> <li>3. Span is set to capture fundamental emission</li> <li>4. Frequency error is measured with frequency counter measurement function</li> </ol> |                                 |                      |



| Test results     |                 |                          |                             |                          |             |
|------------------|-----------------|--------------------------|-----------------------------|--------------------------|-------------|
| Channel          | Frequency [MHz] | Temp.                    | Voltage                     | Measured Frequency [MHz] | Error [ppm] |
| F <sub>MID</sub> | 13.56           | T <sub>nom</sub> = 20°C  | V <sub>nom</sub> = 12 VDC   | 13.5601033               | 07.62       |
| F <sub>MID</sub> | 13.56           | T <sub>nom</sub> = 20°C  | V <sub>min</sub> = 9 VDC    | 13.5601031               | 07.60       |
| F <sub>MID</sub> | 13.56           | T <sub>nom</sub> = 20°C  | V <sub>max</sub> = 12.6 VDC | 13.5601031               | 07.60       |
| F <sub>MID</sub> | 13.56           | T <sub>min</sub> = -10°C | V <sub>nom</sub> = 12 VDC   | 13.5601506               | 11.11       |
| F <sub>MID</sub> | 13.56           | T <sub>max</sub> = 60°C  | V <sub>nom</sub> = 12 VDC   | 13.5600217               | 01.60       |
| Comments:        |                 |                          |                             |                          |             |


## ANNEX A Transmitter in-band emissions

### Spurious emissions according to FCC 15.225

Project number: G0M-1504-4714

Applicant:  
 EUT Name: Powered Air Purifying Respirator  
 Model: R59500  
 Test Site: Eurofins Product Service GmbH  
 Operator: Handrik  
 Test Conditions: Tnom: 24°C, Vnom: 12VDC  
 Antenna: Rohde & Schwarz HFH 2-Z2  
 Measurement distance: 3 m converted to 30 m  
 Mode: TX; 13.56 MHz with tube  
 Test Date: 2015-08-20  
 Note: EUT vertical

Index 49

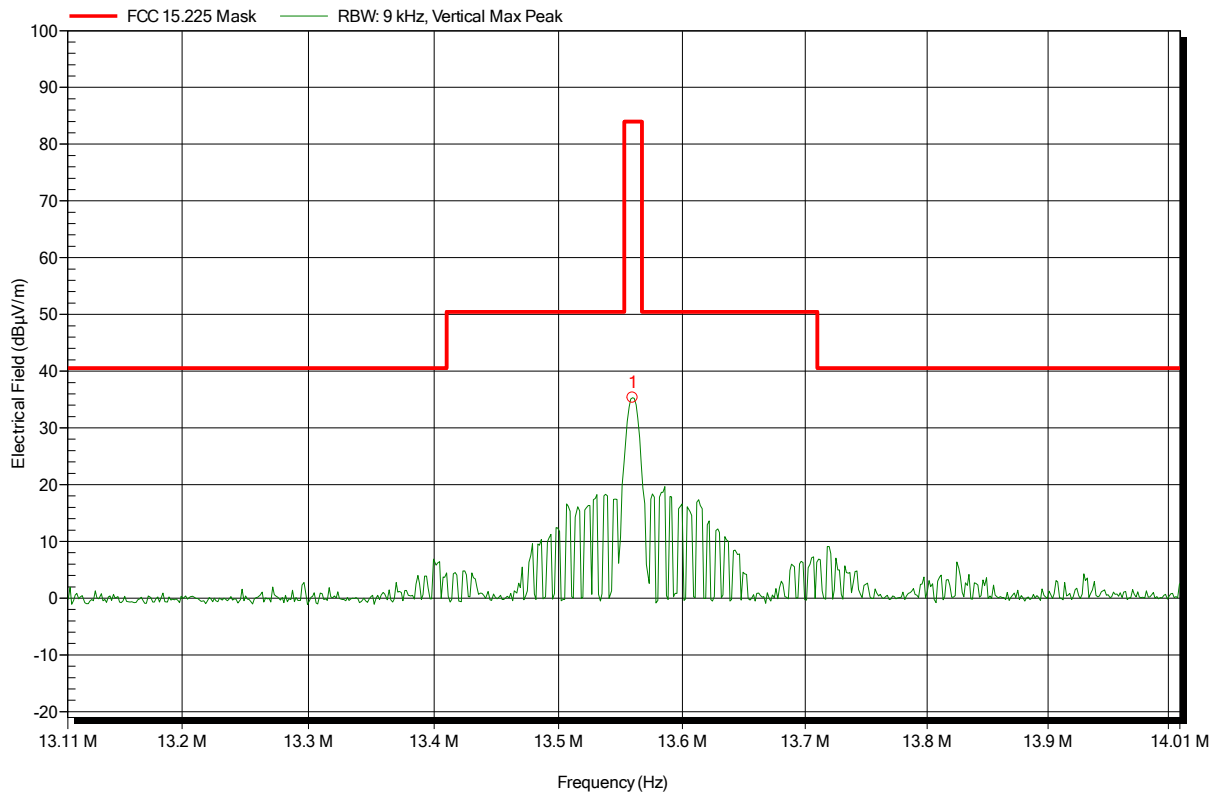

Frequency  
13.56 MHz

Peak  
35.3 dBµV/m


## ANNEX B Transmitter radiated spurious emissions

### Spurious emissions according to FCC 15.225

Project number: G0M-1504-4714

Applicant:  
 EUT Name: Powered Air Purifying Respirator  
 Model: R59500  
 Test Site: Eurofins Product Service GmbH  
 Operator: Handrik  
 Test Conditions: Tnom: 24°C, Vnom: 12VDC  
 Antenna: Rohde & Schwarz HFH 2-Z2  
 Measurement distance: 3 m converted to 300 m  
 Mode: TX; 13.56 MHz with tube  
 Test Date: 2015-08-20  
 Note: EUT vertical

Index 46

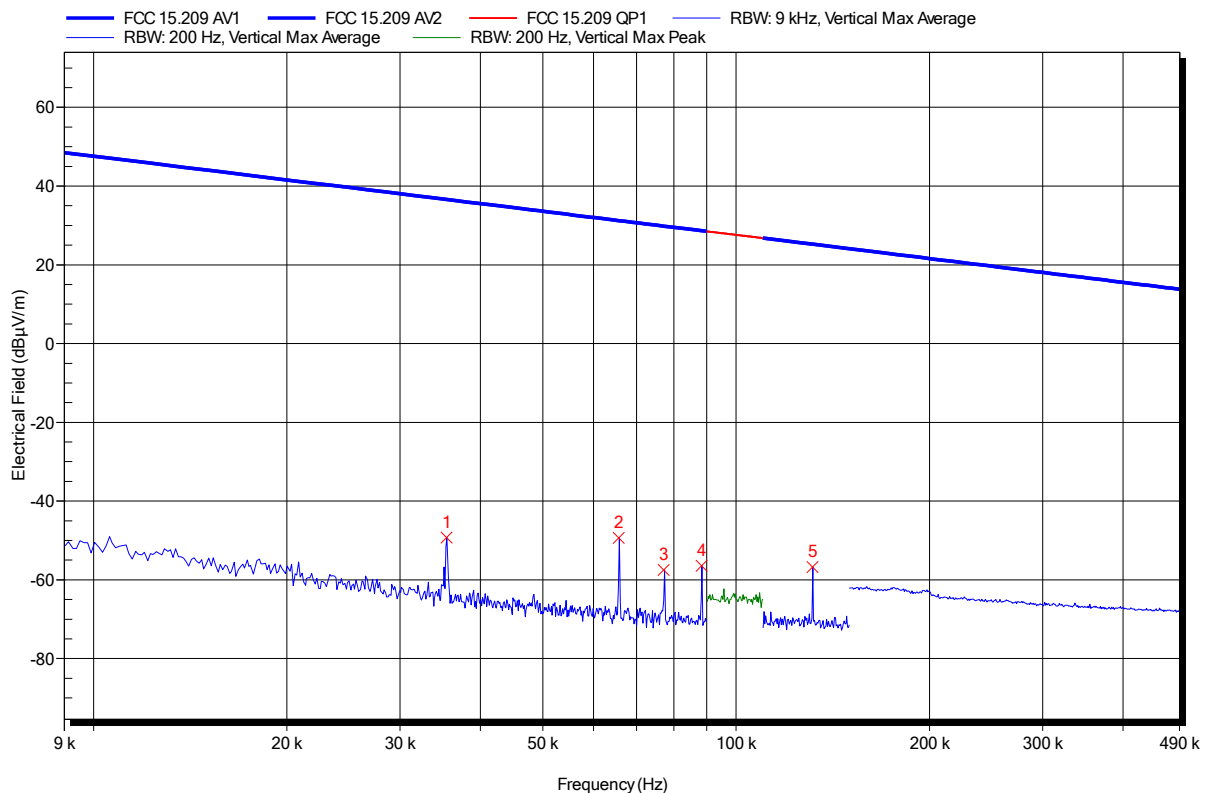


| Frequency  | Average      | Average Limit | Average Difference | Average Status |
|------------|--------------|---------------|--------------------|----------------|
| 35.438 kHz | -49.3 dBµV/m | 36.6 dBµV/m   | -85.86 dB          | Pass           |
| 65.635 kHz | -49.3 dBµV/m | 31.2 dBµV/m   | -80.55 dB          | Pass           |
| 77.17 kHz  | -57.5 dBµV/m | 29.8 dBµV/m   | -87.35 dB          | Pass           |
| 88.315 kHz | -56.4 dBµV/m | 28.7 dBµV/m   | -85.05 dB          | Pass           |
| 131.44 kHz | -56.7 dBµV/m | 25.3 dBµV/m   | -81.97 dB          | Pass           |

**Spurious emissions according to FCC 15.225**

Project number: G0M-1504-4714

Applicant:  
 EUT Name: Powered Air Purifying Respirator  
 Model: R59500  
 Test Site: Eurofins Product Service GmbH  
 Operator: Handrik  
 Test Conditions: Tnom: 24°C, Vnom: 12VDC  
 Antenna: Rohde & Schwarz HFH 2-Z2  
 Measurement distance: 3 m converted to 30 m  
 Mode: TX; 13.56 MHz with tube  
 Test Date: 2015-08-20  
 Note: EUT vertical

Index 47

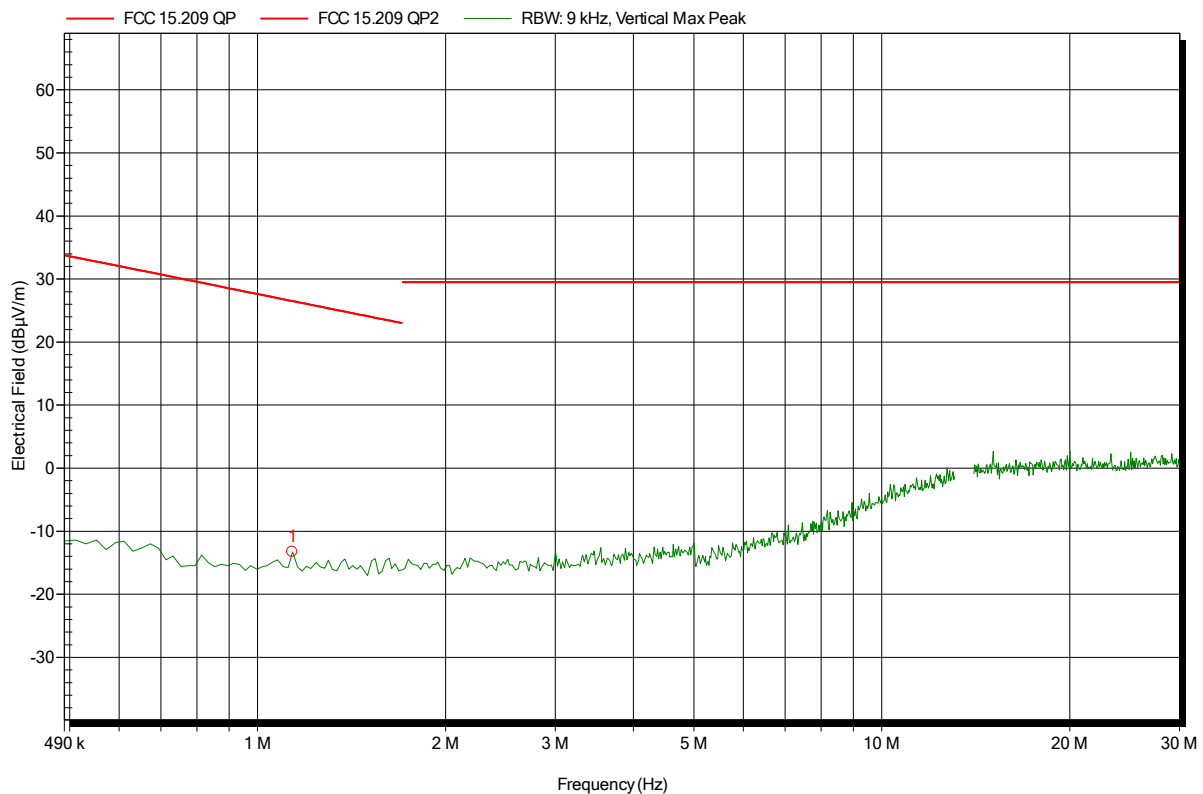


| Frequency | Peak         | Peak Limit  | Peak Difference | Peak Status |
|-----------|--------------|-------------|-----------------|-------------|
| 1.136 MHz | -13.3 dBµV/m | 26.5 dBµV/m | -39.81 dB       | Pass        |

**Spurious emissions according to FCC 15.225**

Project number: G0M-1504-4714

Applicant:  
 EUT Name: Powered Air Purifying Respirator  
 Model: R59500  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Handrik  
 Test Conditions: Tnom: 24°C, Vnom: 12VDC  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3 m  
 Mode: TX; 13.56 MHz with tube  
 Test Date: 2015-08-20  
 Note: EUT vertical

Index 51

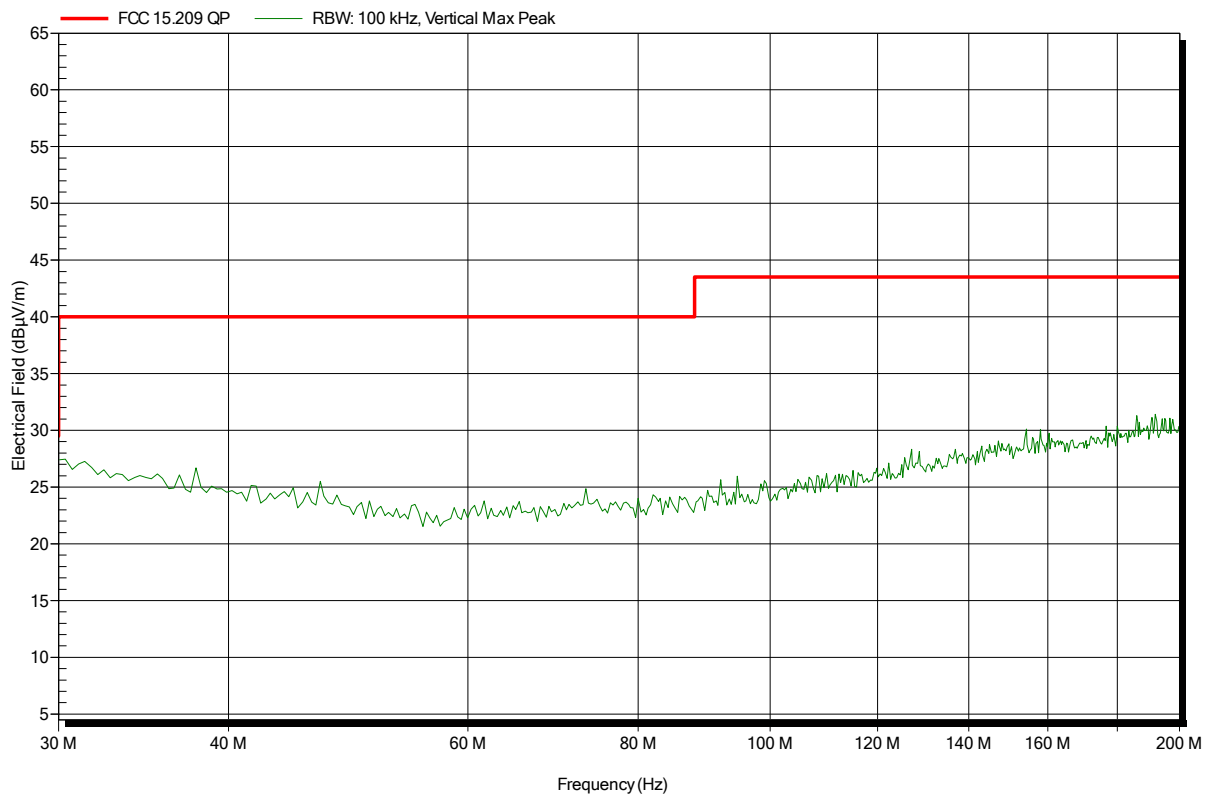

**Spurious emissions according to FCC 15.225**

Project number: G0M-1504-4714

Applicant:  
 EUT Name: Powered Air Purifying Respirator  
 Model: R59500  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Handrik  
 Test Conditions: Tnom: 24°C, Vnom: 12VDC  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; 13.56 MHz with tube  
 Test Date: 2015-08-20  
 Note: EUT vertical

Index 52

