

BUF2400

2.4 GHz Captive mount
antenna

Features

- ◆ Groundplane Independent
- ◆ Covers 2.4 GHz band
- ◆ Captive Mount
- ◆ U.FL connector and flying lead

Specifications

Radiating element	1/2 Wave Dipole
Frequency range	2.4 GHz
Peak gain	2.0 dBi
Polarisation	Linear
Return loss	-20 dB
Power rating	10W
Cable / Connector	150mm cable and U.FL
Dimensions	119 x 12mm

Popular Ordering Options

FBUF35120-UF-15	BUF2400 with 150mm cable and U.FL connector
-----------------	---

www.ead-ltd.com

Specifications subject to change without notice.


5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 825044
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com


EAD
embedded antenna design ltd

BUF2400 | 2.4 GHz Captive Antenna

Return Loss

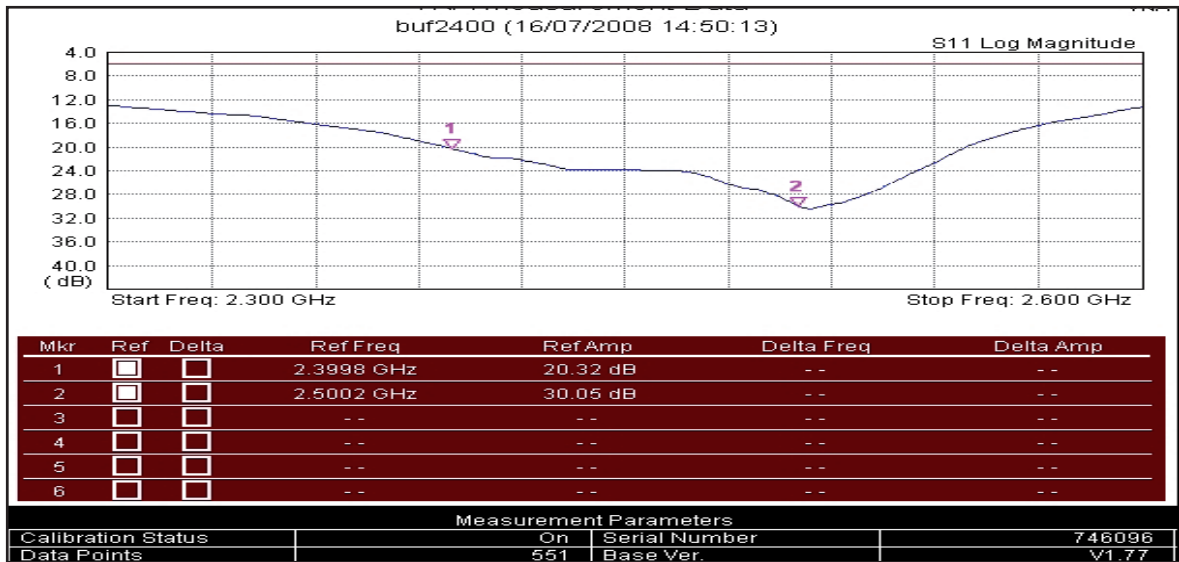

Outline Drawing

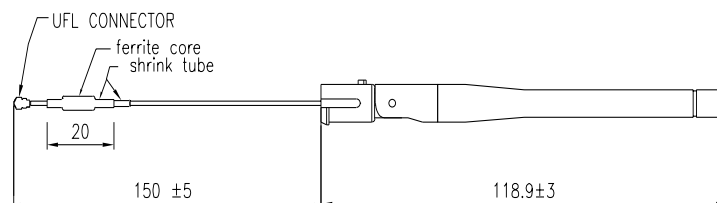

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

EAD
embedded antenna design ltd