



# FCC PART 15.407 TEST REPORT

For

## ZIONCOM ELECTRONICS (SHENZHEN) LTD.

Building A1-A2, Lantian Science and Technology Park, Xinyu Road, Xinqiao Henggang Block,  
Shajing Street, Baoan District, Shenzhen, China

**FCC ID: X7DIP04325**

<b>Report Type:</b> Original Report	<b>Product Name:</b> AC1200 Wireless Dual Band Gigabit Router
<b>Report Number:</b>	<u>RDG171206018-00C</u>
<b>Report Date:</b>	<u>2018-06-26</u>
<b>Reviewed By:</b>	Jerry Zhang EMC Manager
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*\*”.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE.....	6
EQUIPMENT MODIFICATIONS.....	10
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	10
SUPPORT CABLE LIST AND DETAILS.....	10
BLOCK DIAGRAM OF TEST SETUP.....	10
<b>SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>FCC §15.407 (f) &amp; §1.1310 &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>12</b>
APPLICABLE STANDARD.....	12
<b>FCC §15.203 – ANTENNA REQUIREMENT.....</b>	<b>14</b>
APPLICABLE STANDARD.....	14
ANTENNA CONNECTOR CONSTRUCTION.....	14
<b>FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS.....</b>	<b>15</b>
APPLICABLE STANDARD.....	15
EUT SETUP.....	15
EMI TEST RECEIVER SETUP.....	15
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST PROCEDURE.....	16
TEST DATA.....	17
<b>FCC §15.209, §15.205 &amp; §15.407(b) –UNWANTED EMISSION.....</b>	<b>19</b>
APPLICABLE STANDARD.....	19
EUT SETUP.....	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	21
TEST PROCEDURE.....	21
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	22
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA.....	23
<b>FCC §15.407(b)–OUT- OF-BAND EMISSIONS.....</b>	<b>36</b>
APPLICABLE STANDARD.....	36
TEST PROCEDURE.....	36
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA.....	37
<b>FCC §15.407(a)(e) –EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....</b>	<b>53</b>
APPLICABLE STANDARD.....	53
TEST EQUIPMENT LIST AND DETAILS.....	53

TEST PROCEDURE .....53  
TEST DATA .....53

**FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER.....73**

APPLICABLE STANDARD .....73  
TEST EQUIPMENT LIST AND DETAILS.....74  
TEST PROCEDURE .....74  
TEST DATA .....74

**FCC §15.407(a) - POWER SPECTRAL DENSITY .....76**

APPLICABLE STANDARD .....76  
TEST PROCEDURE .....77  
TEST EQUIPMENT LIST AND DETAILS.....77  
TEST DATA .....77

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>		AC1200 Wireless Dual Band Gigabit Router
<b>EUT Model:</b>		A3000RU
<b>Multiple Models:</b>		IP04325
<b>FCC ID:</b>		X7DIP04325
<b>Rated Input Voltage:</b>		DC 12V from adapter
<b>Adapter Information</b>	<b>Model:</b>	DCP007B122000U
	<b>Input:</b>	100-240Vac ~ 50/60Hz ,0.6A
	<b>Output:</b>	DC12V, 2A
<b>External Dimension:</b>		20.5cm(L)*16cm(W)*6.6cm(H)
<b>Serial Number:</b>		171206018
<b>EUT Received Date:</b>		2017.12.06

*Note: The series product, models IP04325 are electrically identical with the model A3000RU, we selected A3000RU for fully testing .The difference between them was explained in the attached declaration letter.*

### Objective

This type approval report is prepared on behalf of **ZIONCOM ELECTRONICS (SHENZHEN) LTD.** in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: X7DIP04325.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

**Measurement Uncertainty**

<b>Parameter</b>	<b>Measurement Uncertainty</b>
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~40GHz: 5.23 dB
Unwanted Emissions,conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the vh20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.

For 5150~5250 MHz band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

802.11a, 802.11n ht20 were tested with Channel 36, 40 and 48,  
802.11n ht40 were tested with Channel 38 and 46.  
802.11ac80 mode was tested with channel 42

For 5725~5850MHz band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

802.11a, 802.11n ht20 were tested with Channel 149, 157 and 165,  
802.11n ht40 were tested with Channel 151 and 159.  
802.11ac80 mode was tested with channel 155.

The device supports SISO and MIMO at 802.11n ht20/n ht40/AC80 mode, per pre-test, MIMO mode was the worst and reported.

### EUT Exercise Software


The software “MP\_TEST” was used for testing, which was provided by manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations. The maximum power was configured as below table, that provided by the manufacturer:

Software and version				MP TEST		
UNII Band	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Power Level	
					Chain 0	Chain 1
5150-5250MHz	802.11a	Low	5180	6	33	30
		Middle	5200	6	33	32
		High	5240	6	33	33
	802.11n ht20	Low	5180	MCS0	32	31
		Middle	5200	MCS0	34	33
		High	5240	MCS0	34	35
	802.11n ht40	Low	5190	MCS0	32	29
		High	5230	MCS0	35	31
	802.11 ac80	Middle	5210	MCS0	31	29
	5725-5850MHz	802.11a	Low	5745	6	34
Middle			5785	6	34	30
High			5825	6	33	28
802.11n ht20		Low	5745	MCS0	36	31
		Middle	5785	MCS0	36	30
		High	5825	MCS0	36	29
802.11n ht40		Low	5755	MCS0	35	31
		High	5795	MCS0	35	30
802.11 ac80		Middle	5775	MCS0	34	32

The duty cycle as below:


Mode	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	Duty Cycle (%)
802.11 a	100	100	100
802.11n ht20	100	100	100
802.11n ht40	100	100	100
802.11ac80	100	100	100

### 802.11a

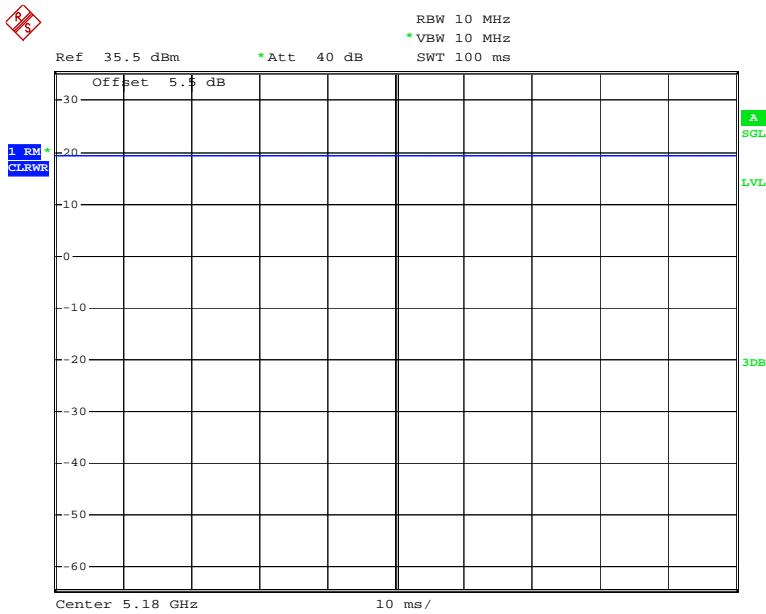

Date: 7.DEC.2017 16:36:17


### 802.11n ht20

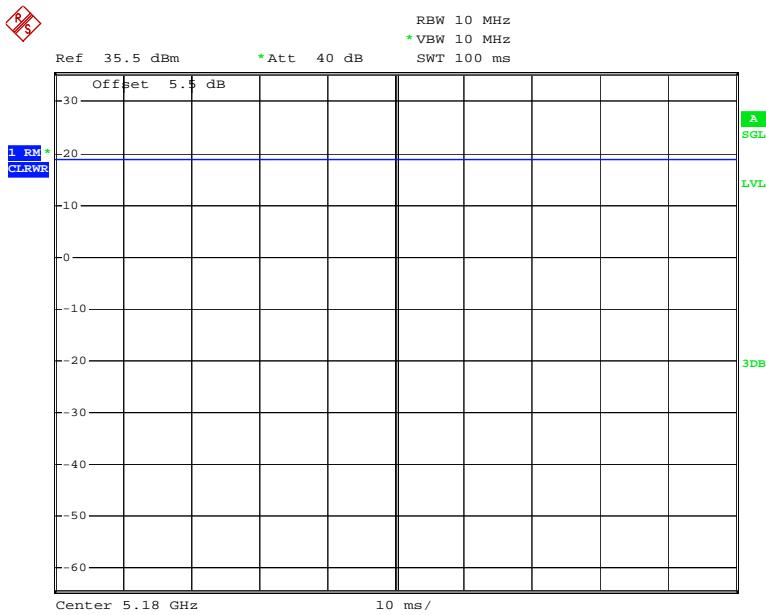

Date: 7.DEC.2017 16:37:00




### 802.11n ht40

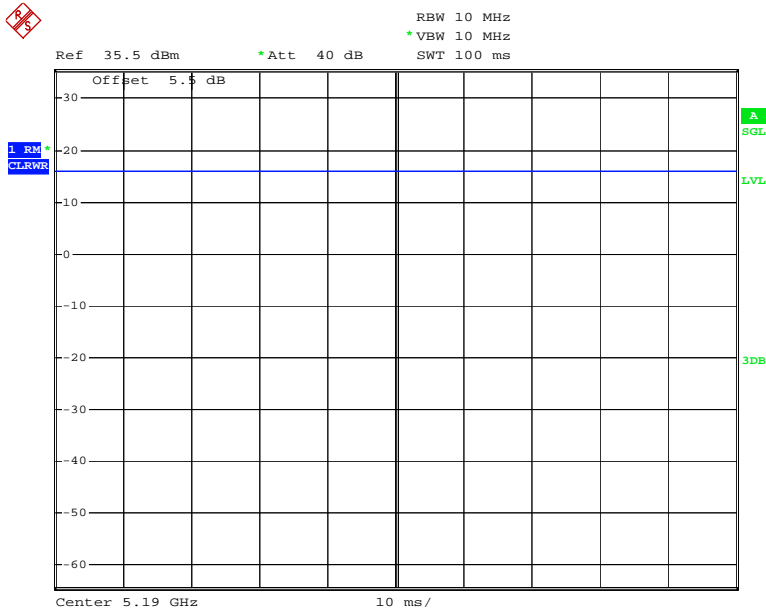

Date: 7.DEC.2017 16:37:36

### 802.11 ac80

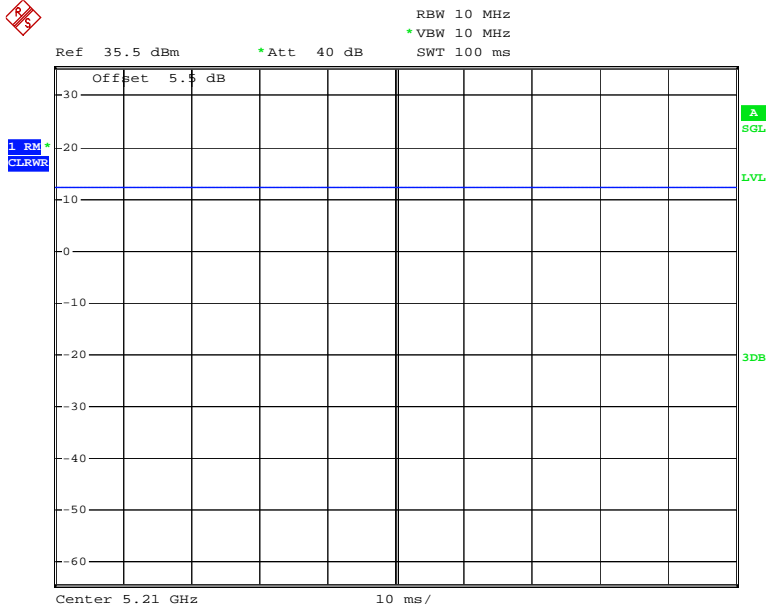

Date: 7.DEC.2017 16:38:00

### Equipment Modifications

No modification was made to the EUT.


### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
Kinston	USB Flash Disk	4G	/

### Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	yes	No	10	RJ45 Port of Laptop	EUT
RJ45 Cable*4	yes	No	10	EUT	Load
Adapter Cable	No	No	1.36	Adapter	EUT

### Block Diagram of Test Setup

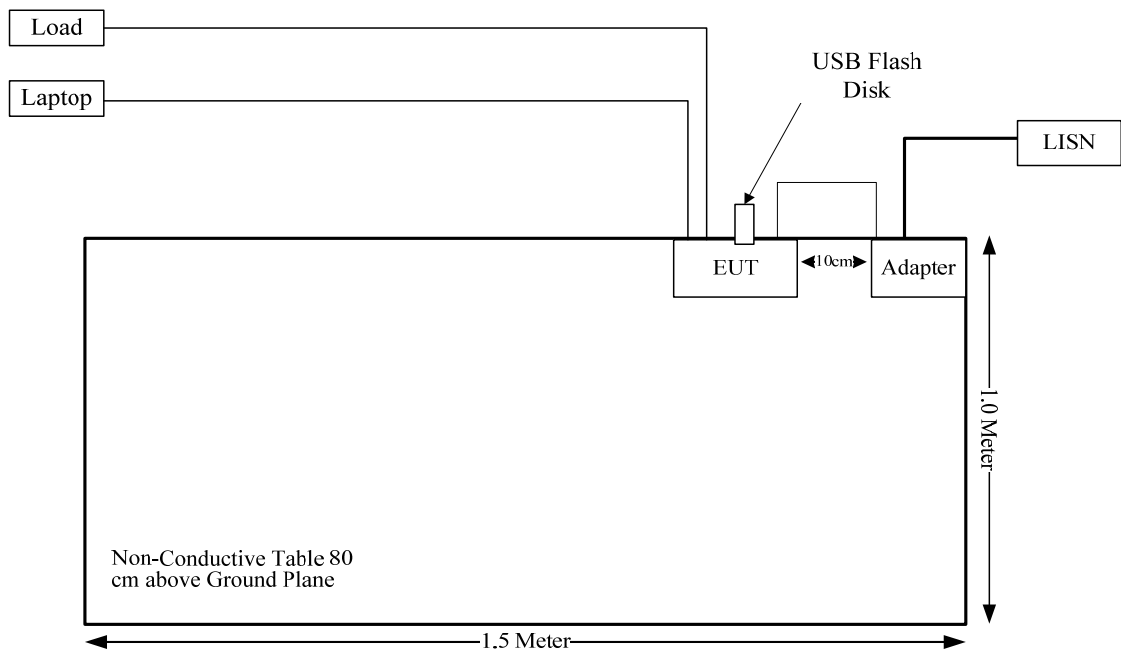

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
FCC §15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliance
§15.407(b)	Out Of Band Emissions	Compliance
§15.407(a) (e)	Emission Bandwidth	Compliance
§15.407(g)	Frequency Stability	Compliance
§15.407(a)	Conducted Transmitter Output Power	Compliance
§15.407 (a)	Power Spectral Density	Compliance

**FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

**Applicable Standard**

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
<b>Frequency Range (MHz)</b>	<b>Electric Field Strength (V/m)</b>	<b>Magnetic Field Strength (A/m)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>Averaging Time (minutes)</b>
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

**Calculation formula:**

Prediction of power density at the distance of the applicable MPE limit

S = PG/4πR<sup>2</sup> = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

**Calculated Data:**

Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	5	3.16	28	630.96	20.00	0.40	1.0
5150-5250 & 5725-5850	5	3.16	20	100.00	20.00	0.06	1.0

The 2.4GHz band and 5GHz band can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$=S_{2.4}/S_{limit-2.4} + S_5/S_{limit-5}$$

$$=0.40/1+0.06/1$$

$$=0.46$$

$$< 1.0$$

**Result:** The device meet FCC MPE at 20 cm distance

---

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.407 (a)(1), if transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT have 2 external antennas for 5G Band, which was permanently attached to the Unit, both antenna gains are 5dBi. Please refer to the EUT photo.


**Result:** Compliance.

**FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS**

**Applicable Standard**

FCC §15.207(a), §15.407(b) (6).

**EUT Setup**

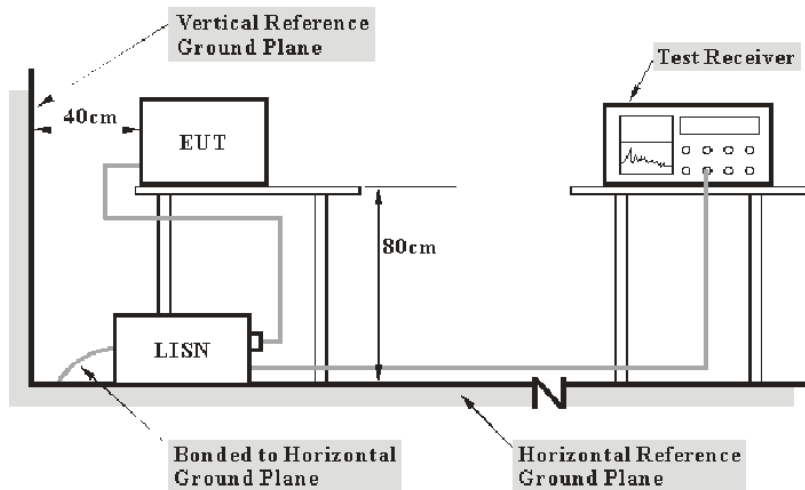

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2016-12-08	2017-12-08
R&S	L.I.S.N	ESH2-Z5	892107/021	2017-09-01	2018-09-01
R&S	Two-line V-network	ENV 216	3560.6550.12	2016-12-08	2017-12-08
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
Unknown	Coaxial Cable	2m	C0200/01	2017-09-05	2018-09-05

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Procedure

During the conducted emission test, the EUT was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.



**Test Data**


**Environmental Conditions**

<b>Temperature:</b>	24.8 °C
<b>Relative Humidity:</b>	40 %
<b>ATM Pressure:</b>	101.2 kPa

The testing was performed by Alex You on 2017-12-07.

Test Mode: Transmitting


AC120 V, 60 Hz, Line:

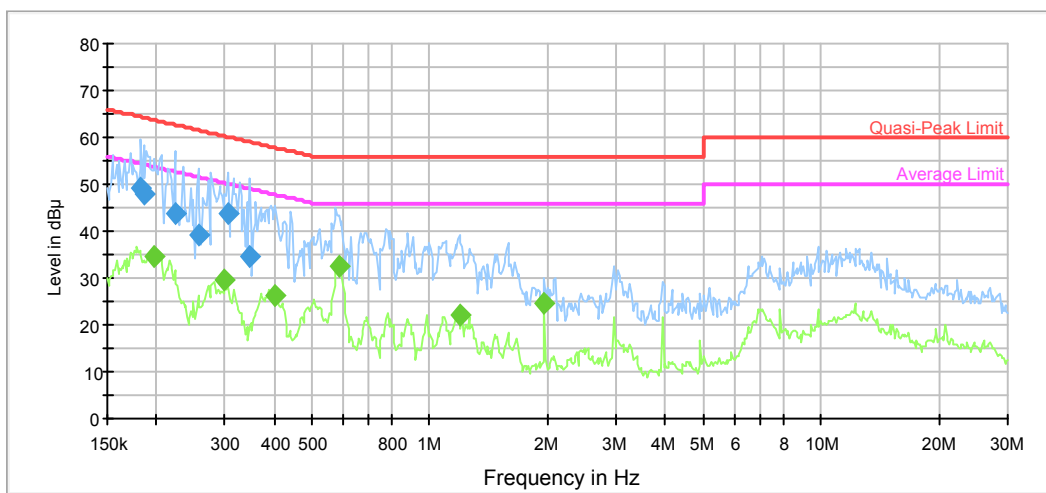

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.183065	49.2	9.000	L1	10.8	15.1	64.3	Compliance
0.186006	47.9	9.000	L1	10.8	16.3	64.2	Compliance
0.223418	43.8	9.000	L1	10.5	18.9	62.7	Compliance
0.255827	39.1	9.000	L1	10.3	22.5	61.6	Compliance
0.304845	43.5	9.000	L1	10.1	16.6	60.1	Compliance
0.346296	34.6	9.000	L1	10.0	24.5	59.1	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.196675	34.4	9.000	L1	10.7	19.3	53.7	Compliance
0.300025	29.4	9.000	L1	10.1	20.8	50.2	Compliance
0.402900	26.2	9.000	L1	10.0	21.6	47.8	Compliance
0.585926	32.6	9.000	L1	9.8	13.4	46.0	Compliance
1.190776	21.9	9.000	L1	9.8	24.1	46.0	Compliance
1.967177	24.4	9.000	L1	9.7	21.6	46.0	Compliance

**AC120 V, 60 Hz, Neutral:**

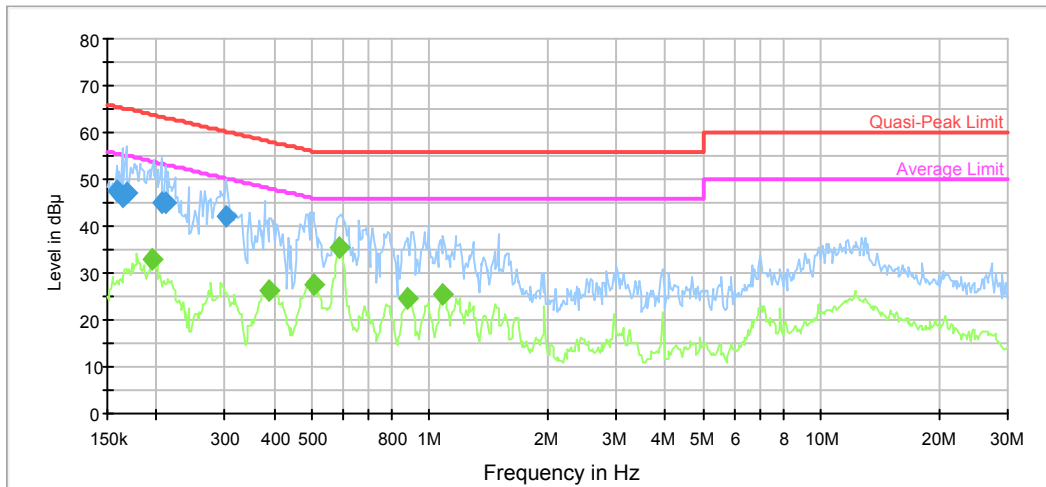

frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.158604	47.4	9.000	N	11.1	18.1	65.5	Compliance
0.163741	46.4	9.000	N	11.0	18.9	65.3	Compliance
0.167702	47.1	9.000	N	10.9	18.0	65.1	Compliance
0.206306	44.9	9.000	N	10.6	18.5	63.4	Compliance
0.211298	45.0	9.000	N	10.5	18.2	63.2	Compliance
0.302425	42.1	9.000	N	10.1	18.1	60.2	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.195114	32.9	9.000	N	10.7	20.9	53.8	Compliance
0.390261	26.2	9.000	N	10.0	21.9	48.1	Compliance
0.503608	27.3	9.000	N	9.9	18.7	46.0	Compliance
0.585926	35.5	9.000	N	9.8	10.5	46.0	Compliance
0.872708	24.6	9.000	N	9.8	21.4	46.0	Compliance
1.082190	25.3	9.000	N	9.8	20.7	46.0	Compliance

---

**FCC §15.209, §15.205 & §15.407(b) –UNWANTED EMISSION**

---

**Applicable Standard**

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.


(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


(7) The provisions of §15.205 apply to intentional radiators operating under this section.

### EUT Setup


Below 1 GHz:

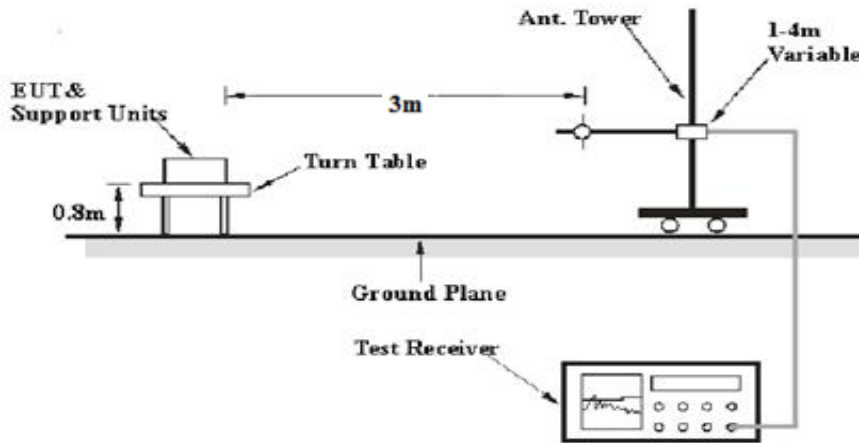

1-26.5 GHz:

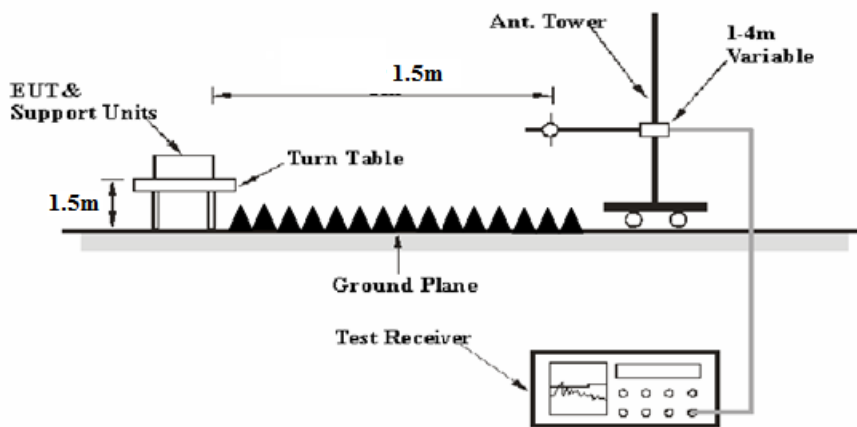

26.5-40 GHz:

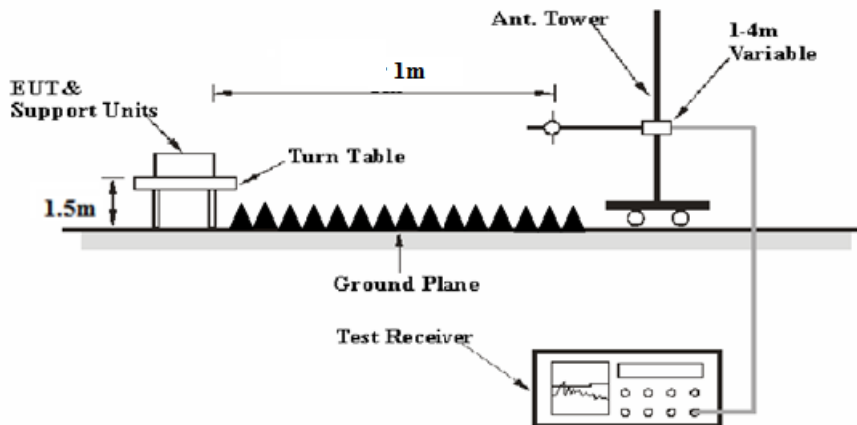

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

### Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as:  $E [dB\mu V/m] = EIRP[dBm] + 95.2$ , for  $d = 3$  meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$  dB= 6.02 dB

or

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1m]})$  dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

### Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

$$\begin{aligned} &\text{Corrected Amplitude} \\ &= \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2017-09-05	2018-09-05
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2017-01-04	2018-01-04
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
TDK RF	Horn Antenna	HRN-0118	130 084	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2017-06-27	2018-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2017-09-05	2018-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2017-06-27	2018-06-27
Sinoscite	Bandstop Filters	BSF5150-5850MN- 0899-003	0899003	2017-05-06	2018-05-06
Mini Circuits	High Pass Filter	VHF-6010+	31118	2017-06-16	2018-06-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Data

### Environmental Conditions


<b>Temperature:</b>	22.7~27.1 °C
<b>Relative Humidity:</b>	34~36 %
<b>ATM Pressure:</b>	101.3~101 kPa

\* The testing was performed by Suny Cen on 2017-12-11 and 2018-01-30.

Test Mode: Transmitting

1) Below 1GHz(802.11 a 5785 MHz was the worst):


Horizontal

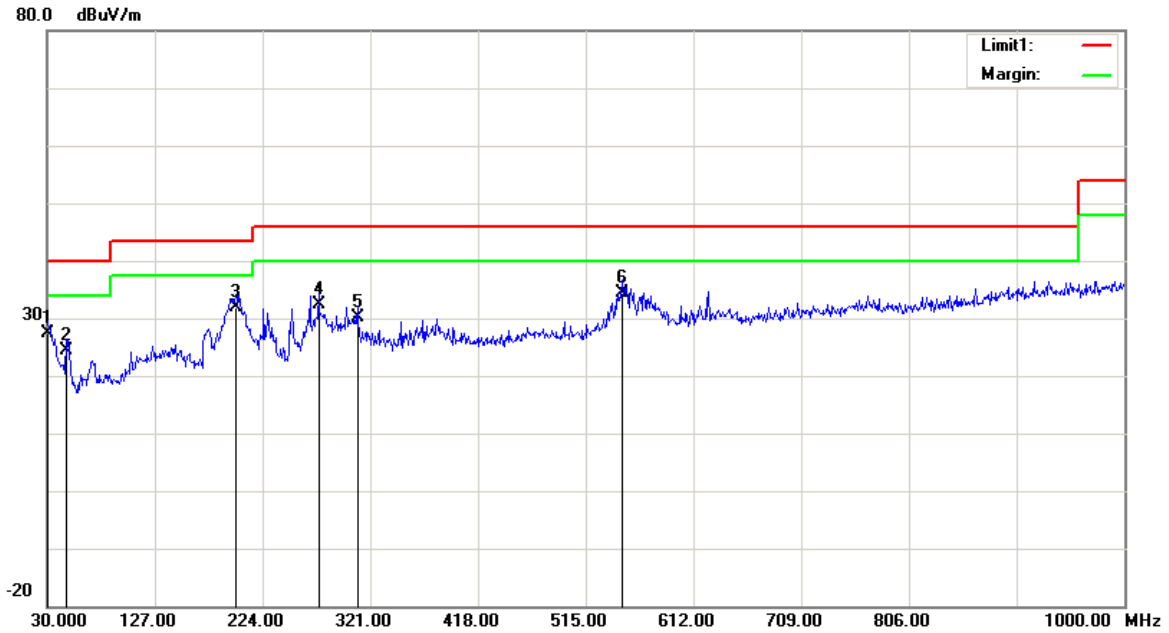

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	26.42	QP	1.08	27.50	40.00	12.50
47.4600	35.00	QP	-10.70	24.30	40.00	15.70
199.7500	38.27	QP	-6.27	32.00	43.50	11.50
274.4400	36.18	QP	-3.78	32.40	46.00	13.60
309.3600	34.77	QP	-4.57	30.20	46.00	15.80
547.9800	34.72	QP	-0.42	34.30	46.00	11.70



**Vertical**

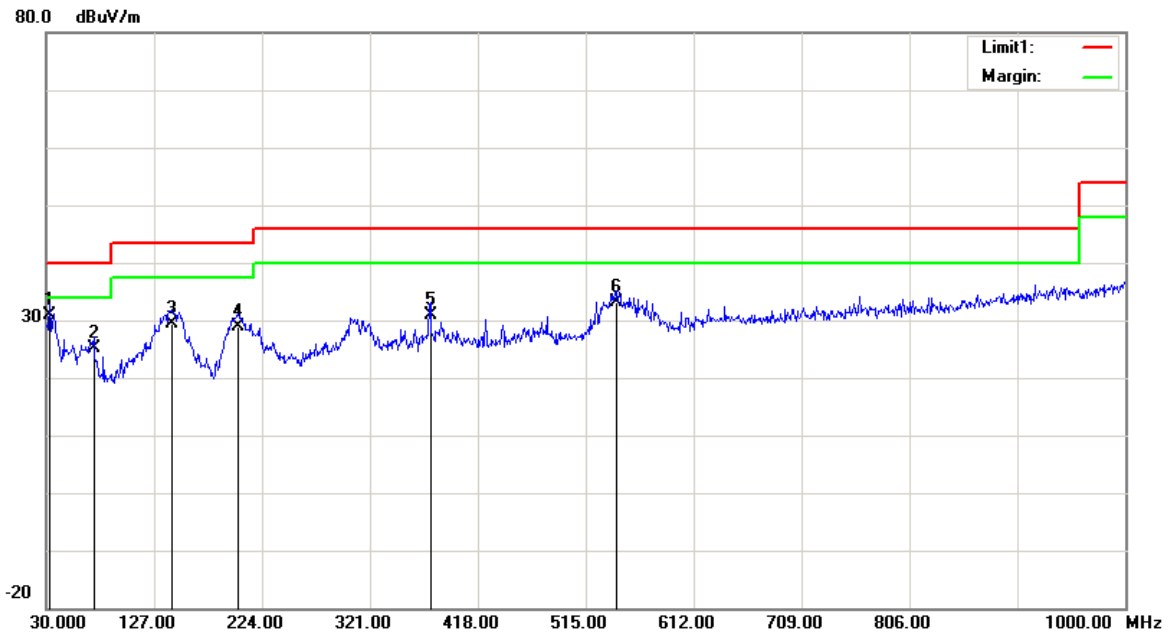

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
32.9100	32.00	QP	-1.10	30.90	40.00	9.10
72.6800	36.38	QP	-11.18	25.20	40.00	14.80
143.4900	35.76	QP	-6.36	29.40	43.50	14.10
202.6600	35.28	QP	-6.28	29.00	43.50	14.50
375.3200	33.77	QP	-2.77	31.00	46.00	15.00
542.1600	33.55	QP	-0.35	33.20	46.00	12.80

**2) 1GHz-40GHz:  
5150-5250MHz**

**802.11a(Chain 1 was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 5180 MHz									
5180.00	76.59	PK	H	33.59	3.58	0.00	107.74	N/A	N/A
5180.00	66.84	AV	H	33.59	3.58	0.00	97.99	N/A	N/A
5180.00	83.28	PK	V	33.59	3.58	0.00	114.43	N/A	N/A
5180.00	72.41	AV	V	33.59	3.58	0.00	103.56	N/A	N/A
5150.00	32.47	PK	V	33.54	3.56	0.00	63.55	74.00	10.45
5150.00	17.86	AV	V	33.54	3.56	0.00	48.94	54.00	5.06
10360.00	61.69	PK	V	38.17	6.29	36.85	63.28	74.00	10.72
10360.00	43.14	AV	V	38.17	6.29	36.85	44.73	54.00	9.27
15540.00	47.61	PK	V	38.06	8.85	39.04	49.46	74.00	24.54
15540.00	38.86	AV	V	38.06	8.85	39.04	40.71	54.00	13.29
Middle Channel: 5200 MHz									
5200.00	78.69	PK	H	33.62	3.60	0.00	109.89	N/A	N/A
5200.00	68.43	AV	H	33.62	3.60	0.00	99.63	N/A	N/A
5200.00	85.26	PK	V	33.62	3.60	0.00	116.46	N/A	N/A
5200.00	75.34	AV	V	33.62	3.60	0.00	106.54	N/A	N/A
10400.00	65.40	PK	V	38.18	6.32	36.86	67.02	74.00	6.98
10400.00	47.33	AV	V	38.18	6.32	36.86	48.95	54.00	5.05
15600.00	49.27	PK	V	38.00	8.83	39.09	50.99	74.00	23.01
15600.00	39.03	AV	V	38.00	8.83	39.09	40.75	54.00	13.25
High Channel: 5240 MHz									
5240.00	74.55	PK	H	33.68	3.52	0.00	105.73	N/A	N/A
5240.00	64.38	AV	H	33.68	3.52	0.00	95.56	N/A	N/A
5240.00	84.57	PK	V	33.68	3.52	0.00	115.75	N/A	N/A
5240.00	74.39	AV	V	33.68	3.52	0.00	105.57	N/A	N/A
5350.00	32.87	PK	V	33.86	3.52	0.00	64.23	74.00	9.77
5350.00	16.22	AV	V	33.86	3.52	0.00	47.58	54.00	6.42
10480.00	67.48	PK	V	38.20	6.37	36.88	69.15	74.00	4.85
10480.00	49.21	AV	V	38.20	6.37	36.88	50.88	54.00	3.12
15720.00	46.95	PK	V	37.88	8.79	39.18	48.42	74.00	25.58
15720.00	38.51	AV	V	37.88	8.79	39.18	39.98	54.00	14.02

**802.11n ht20(2Tx was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 5180 MHz									
5180.00	79.63	PK	H	33.59	3.58	0.00	110.78	N/A	N/A
5180.00	67.85	AV	H	33.59	3.58	0.00	99.00	N/A	N/A
5180.00	86.67	PK	V	33.59	3.58	0.00	117.82	N/A	N/A
5180.00	74.38	AV	V	33.59	3.58	0.00	105.53	N/A	N/A
5150.00	31.28	PK	V	33.54	3.56	0.00	62.36	74.00	11.64
5150.00	16.74	AV	V	33.54	3.56	0.00	47.82	54.00	6.18
10360.00	55.94	PK	V	38.17	6.29	36.85	57.53	74.00	16.47
10360.00	36.90	AV	V	38.17	6.29	36.85	38.49	54.00	15.51
15540.00	46.47	PK	V	38.06	8.85	39.04	48.32	74.00	25.68
15540.00	37.45	AV	V	38.06	8.85	39.04	39.30	54.00	14.70
Middle Channel: 5200 MHz									
5200.00	80.37	PK	H	33.62	3.60	0.00	111.57	N/A	N/A
5200.00	68.47	AV	H	33.62	3.60	0.00	99.67	N/A	N/A
5200.00	87.17	PK	V	33.62	3.60	0.00	118.37	N/A	N/A
5200.00	75.98	AV	V	33.62	3.60	0.00	107.18	N/A	N/A
10400.00	63.23	PK	V	38.18	6.32	36.86	64.85	74.00	9.15
10400.00	45.33	AV	V	38.18	6.32	36.86	46.95	54.00	7.05
15600.00	47.63	PK	V	38.00	8.83	39.09	49.35	74.00	24.65
15600.00	38.77	AV	V	38.00	8.83	39.09	40.49	54.00	13.51
High Channel: 5240 MHz									
5240.00	81.34	PK	H	33.68	3.52	0.00	112.52	N/A	N/A
5240.00	69.68	AV	H	33.68	3.52	0.00	100.86	N/A	N/A
5240.00	88.62	PK	V	33.68	3.52	0.00	119.80	N/A	N/A
5240.00	76.38	AV	V	33.68	3.52	0.00	107.56	N/A	N/A
5350.00	31.58	PK	V	33.86	3.52	0.00	62.94	74.00	11.06
5350.00	17.11	AV	V	33.86	3.52	0.00	48.47	54.00	5.53
10480.00	68.23	PK	V	38.20	6.37	36.88	69.90	74.00	4.10
10480.00	49.19	AV	V	38.20	6.37	36.88	50.86	54.00	3.14
15720.00	48.70	PK	V	37.88	8.79	39.18	50.17	74.00	23.83
15720.00	38.96	AV	V	37.88	8.79	39.18	40.43	54.00	13.57

**802.11n ht40(2Tx was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 5190 MHz									
5190.00	77.64	PK	H	33.60	3.59	0.00	108.81	N/A	N/A
5190.00	62.55	AV	H	33.60	3.59	0.00	93.72	N/A	N/A
5190.00	84.03	PK	V	33.60	3.59	0.00	115.20	N/A	N/A
5190.00	72.39	AV	V	33.60	3.59	0.00	103.56	N/A	N/A
5150.00	39.73	PK	V	33.54	3.56	0.00	70.81	74.00	3.19
5150.00	17.44	AV	V	33.54	3.56	0.00	48.52	54.00	5.48
10380.00	54.60	PK	V	38.18	6.31	36.85	56.22	74.00	17.78
10380.00	39.09	AV	V	38.18	6.31	36.85	40.71	54.00	13.29
15570.00	48.94	PK	V	38.03	8.84	39.06	50.73	74.00	23.27
15570.00	37.11	AV	V	38.03	8.84	39.06	38.90	54.00	15.10
High Channel: 5230 MHz									
5230.00	77.64	PK	H	33.67	3.54	0.00	108.83	N/A	N/A
5230.00	62.36	AV	H	33.67	3.54	0.00	93.55	N/A	N/A
5230.00	84.86	PK	V	33.67	3.54	0.00	116.05	N/A	N/A
5230.00	72.33	AV	V	33.67	3.54	0.00	103.52	N/A	N/A
5350.00	38.09	PK	V	33.86	3.52	0.00	69.45	74.00	4.55
5350.00	17.68	AV	V	33.86	3.52	0.00	49.04	54.00	4.96
10460.00	61.64	PK	V	38.19	6.36	36.87	63.30	74.00	10.70
10460.00	42.77	AV	V	38.19	6.36	36.87	44.43	54.00	9.57
15690.00	48.90	PK	V	37.91	8.80	39.15	50.44	74.00	23.56
15690.00	36.65	AV	V	37.91	8.80	39.15	38.19	54.00	15.81

**802.11 ac80(2Tx was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Middle Channel: 5210 MHz									
5210.00	73.69	PK	H	33.64	3.58	0.00	104.89	N/A	N/A
5210.00	61.48	AV	H	33.64	3.58	0.00	92.68	N/A	N/A
5210.00	80.35	PK	V	33.64	3.58	0.00	111.55	N/A	N/A
5210.00	68.44	AV	V	33.64	3.58	0.00	99.64	N/A	N/A
5150.00	38.97	PK	V	33.54	3.56	0.00	70.05	74.00	3.95
5150.00	17.34	AV	V	33.54	3.56	0.00	48.42	54.00	5.58
5350.00	38.80	PK	V	33.86	3.52	0.00	70.16	74.00	3.84
5350.00	17.31	AV	V	33.86	3.52	0.00	48.67	54.00	5.33
10420.00	51.56	PK	V	38.18	6.33	36.86	53.19	74.00	20.81
10420.00	37.36	AV	V	38.18	6.33	36.86	38.99	54.00	15.01
15630.00	46.86	PK	V	37.97	8.82	39.11	48.52	74.00	25.48
15630.00	36.46	AV	V	37.97	8.82	39.11	38.12	54.00	15.88

**5725-5850MHz**

**802.11a(Chain 1 was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 5745MHz									
5745.00	78.69	PK	H	34.20	3.69	0.00	110.56	N/A	N/A
5745.00	68.47	AV	H	34.20	3.69	0.00	100.34	N/A	N/A
5745.00	85.41	PK	V	34.20	3.69	0.00	117.28	N/A	N/A
5745.00	75.43	AV	V	34.20	3.69	0.00	107.30	N/A	N/A
5725.00	51.47	PK	V	34.19	3.69	0.00	83.33	122.20	38.87
5720.00	48.75	PK	V	34.19	3.69	0.00	80.61	110.80	30.19
5700.00	43.26	PK	V	34.18	3.68	0.00	75.10	105.20	30.10
5650.00	29.44	PK	V	34.16	3.63	0.00	61.21	68.20	6.99
11490.00	65.84	PK	V	38.99	6.59	37.35	68.05	74.00	5.95
11490.00	44.38	AV	V	38.99	6.59	37.35	46.59	54.00	7.41
17235.00	50.51	PK	V	41.56	8.78	38.61	56.22	74.00	17.78
17235.00	39.89	AV	V	41.56	8.78	38.61	45.60	54.00	8.40
Middle Channel: 5785 MHz									
5785.00	77.94	PK	H	34.21	3.71	0.00	109.84	N/A	N/A
5785.00	67.58	AV	H	34.21	3.71	0.00	99.48	N/A	N/A
5785.00	84.43	PK	V	34.21	3.71	0.00	116.33	N/A	N/A
5785.00	74.62	AV	V	34.21	3.71	0.00	106.52	N/A	N/A
11570.00	66.74	PK	V	39.00	6.61	37.44	68.89	74.00	5.11
11570.00	45.39	AV	V	39.00	6.61	37.44	47.54	54.00	6.46
17355.00	50.13	PK	V	42.26	8.81	38.52	56.66	74.00	17.34
17355.00	40.23	AV	V	42.26	8.81	38.52	46.76	54.00	7.24
High Channel: 5825 MHz									
5825.00	76.84	PK	H	34.23	3.73	0.00	108.78	N/A	N/A
5825.00	66.34	AV	H	34.23	3.73	0.00	98.28	N/A	N/A
5825.00	83.43	PK	V	34.23	3.73	0.00	115.37	N/A	N/A
5825.00	73.94	AV	V	34.23	3.73	0.00	105.88	N/A	N/A
5850.00	41.81	PK	V	34.24	3.75	0.00	73.78	122.20	48.42
5855.00	39.46	PK	V	34.24	3.75	0.00	71.43	110.80	39.37
5875.00	34.52	PK	V	34.25	3.77	0.00	66.52	105.20	38.68
5925.00	29.78	PK	V	34.27	3.80	0.00	61.83	68.20	6.37
11650.00	65.74	PK	V	39.00	6.64	37.53	67.83	74.00	6.17
11650.00	44.33	AV	V	39.00	6.64	37.53	46.42	54.00	7.58
17475.00	50.15	PK	V	42.96	8.84	38.44	57.49	74.00	16.51
17475.00	38.71	AV	V	42.96	8.84	38.44	46.05	54.00	7.95

**802.11n ht20(2Tx was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 5745MHz									
5745.00	80.11	PK	H	34.20	3.69	0.00	111.98	N/A	N/A
5745.00	68.64	AV	H	34.20	3.69	0.00	100.51	N/A	N/A
5745.00	87.24	PK	V	34.20	3.69	0.00	119.11	N/A	N/A
5745.00	75.34	AV	V	34.20	3.69	0.00	107.21	N/A	N/A
5725.00	51.46	PK	V	34.19	3.69	0.00	83.32	122.20	38.88
5720.00	48.74	PK	V	34.19	3.69	0.00	80.60	110.80	30.20
5700.00	42.84	PK	V	34.18	3.68	0.00	74.68	105.20	30.52
5650.00	31.21	PK	V	34.16	3.63	0.00	62.98	68.20	5.22
11490.00	65.74	PK	V	38.99	6.59	37.35	67.95	74.00	6.05
11490.00	45.74	AV	V	38.99	6.59	37.35	47.95	54.00	6.05
17235.00	50.67	PK	V	41.56	8.78	38.61	56.38	74.00	17.62
17235.00	40.32	AV	V	41.56	8.78	38.61	46.03	54.00	7.97
Middle Channel: 5785 MHz									
5785.00	80.24	PK	H	34.21	3.71	0.00	112.14	N/A	N/A
5785.00	68.47	AV	H	34.21	3.71	0.00	100.37	N/A	N/A
5785.00	87.35	PK	V	34.21	3.71	0.00	119.25	N/A	N/A
5785.00	75.34	AV	V	34.21	3.71	0.00	107.24	N/A	N/A
11570.00	67.36	PK	V	39.00	6.61	37.44	69.51	74.00	4.49
11570.00	43.98	AV	V	39.00	6.61	37.44	46.13	54.00	7.87
17355.00	49.24	PK	V	42.26	8.81	38.52	55.77	74.00	18.23
17355.00	38.66	AV	V	42.26	8.81	38.52	45.19	54.00	8.81
High Channel: 5825 MHz									
5825.00	80.34	PK	H	34.23	3.73	0.00	112.28	N/A	N/A
5825.00	68.74	AV	H	34.23	3.73	0.00	100.68	N/A	N/A
5825.00	87.33	PK	V	34.23	3.73	0.00	119.27	N/A	N/A
5825.00	75.48	AV	V	34.23	3.73	0.00	107.42	N/A	N/A
5850.00	44.13	PK	V	34.24	3.75	0.00	76.10	122.20	46.10
5855.00	41.26	PK	V	34.24	3.75	0.00	73.23	110.80	37.57
5875.00	36.78	PK	V	34.25	3.77	0.00	68.78	105.20	36.42
5925.00	30.11	PK	V	34.27	3.80	0.00	62.16	68.20	6.04
11650.00	69.82	PK	V	39.00	6.64	37.53	71.91	74.00	2.09
11650.00	49.73	AV	V	39.00	6.64	37.53	51.82	54.00	2.18
17475.00	48.86	PK	V	42.96	8.84	38.44	56.20	74.00	17.80
17475.00	40.35	AV	V	42.96	8.84	38.44	47.69	54.00	6.31

**802.11n ht40(2Tx was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 5755MHz									
5755.00	79.48	PK	H	34.20	3.70	0.00	111.36	N/A	N/A
5755.00	67.15	AV	H	34.20	3.70	0.00	99.03	N/A	N/A
5755.00	86.90	PK	V	34.20	3.70	0.00	118.78	N/A	N/A
5755.00	74.64	AV	V	34.20	3.70	0.00	106.52	N/A	N/A
5725.00	37.05	PK	V	34.19	3.69	0.00	68.91	122.20	53.29
5720.00	34.26	PK	V	34.19	3.69	0.00	66.12	110.80	44.68
5700.00	32.44	PK	V	34.18	3.68	0.00	64.28	105.20	40.92
5650.00	29.48	PK	V	34.16	3.63	0.00	61.25	68.20	6.95
11510.00	67.51	PK	V	39.00	6.59	37.37	69.71	74.00	4.29
11510.00	44.84	AV	V	39.00	6.59	37.37	47.04	54.00	6.96
17265.00	48.87	PK	V	41.74	8.79	38.58	54.80	74.00	19.20
17265.00	38.73	AV	V	41.74	8.79	38.58	44.66	54.00	9.34
High Channel: 5795 MHz									
5795.00	81.67	PK	H	34.22	3.71	0.00	113.58	N/A	N/A
5795.00	68.67	AV	H	34.22	3.71	0.00	100.58	N/A	N/A
5795.00	88.11	PK	V	34.22	3.71	0.00	120.02	N/A	N/A
5795.00	76.42	AV	V	34.22	3.71	0.00	108.33	N/A	N/A
5850.00	33.67	PK	V	34.24	3.75	0.00	65.64	122.20	56.56
5855.00	31.47	PK	V	34.24	3.75	0.00	63.44	110.80	47.36
5875.00	29.47	PK	V	34.25	3.77	0.00	61.47	105.20	43.73
5925.00	28.76	PK	V	34.27	3.80	0.00	60.81	68.20	7.39
11590.00	65.47	PK	V	39.00	6.62	37.46	67.61	74.00	6.39
11590.00	45.87	AV	V	39.00	6.62	37.46	48.01	54.00	5.99
17385.00	49.81	PK	V	42.43	8.82	38.50	56.54	74.00	17.46
17385.00	39.68	AV	V	42.43	8.82	38.50	46.41	54.00	7.59

**802.11 ac80(2Tx was the worst)**




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Middle Channel: 5775 MHz									
5775.00	75.57	PK	H	34.21	3.70	0.00	107.46	N/A	N/A
5775.00	63.76	AV	H	34.21	3.70	0.00	95.65	N/A	N/A
5775.00	82.05	PK	V	34.21	3.70	0.00	113.94	N/A	N/A
5775.00	70.77	AV	V	34.21	3.70	0.00	102.66	N/A	N/A
5850.00	47.80	PK	V	34.24	3.75	0.00	79.77	122.20	42.43
5855.00	42.54	PK	V	34.24	3.75	0.00	74.51	110.80	36.29
5875.00	36.70	PK	V	34.25	3.77	0.00	68.70	105.20	36.50
5925.00	28.49	PK	V	34.27	3.80	0.00	60.54	68.20	7.66
11550.00	58.79	PK	V	39.00	6.61	37.42	60.96	74.00	13.04
11550.00	43.04	AV	V	39.00	6.61	37.42	45.21	54.00	8.79
17325.00	49.23	PK	V	42.09	8.80	38.54	55.56	74.00	18.44
17325.00	38.10	AV	V	42.09	8.80	38.54	44.43	54.00	9.57




Test Plots(For worst mode 802.11n ht20 2Tx 5785MHz)

Horizontal



Fundamental  
Test with Band  
Rejection Filter

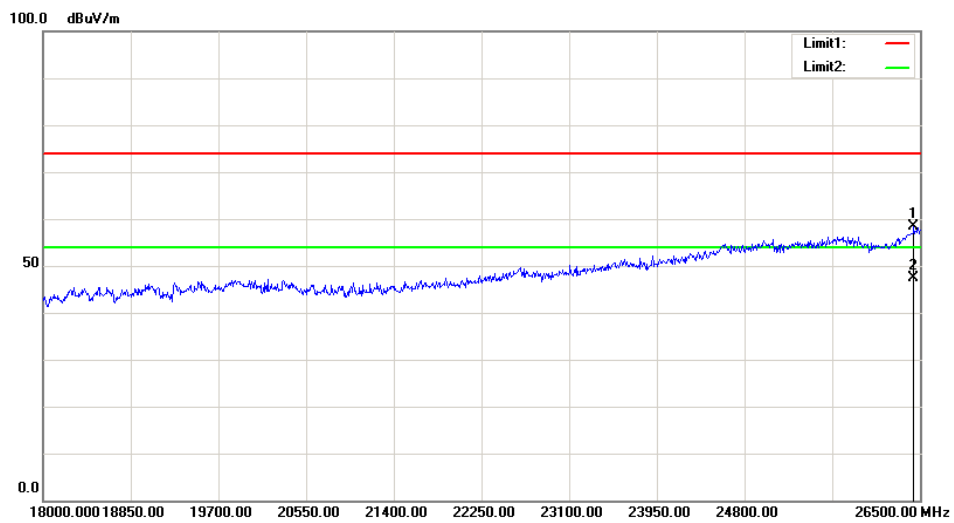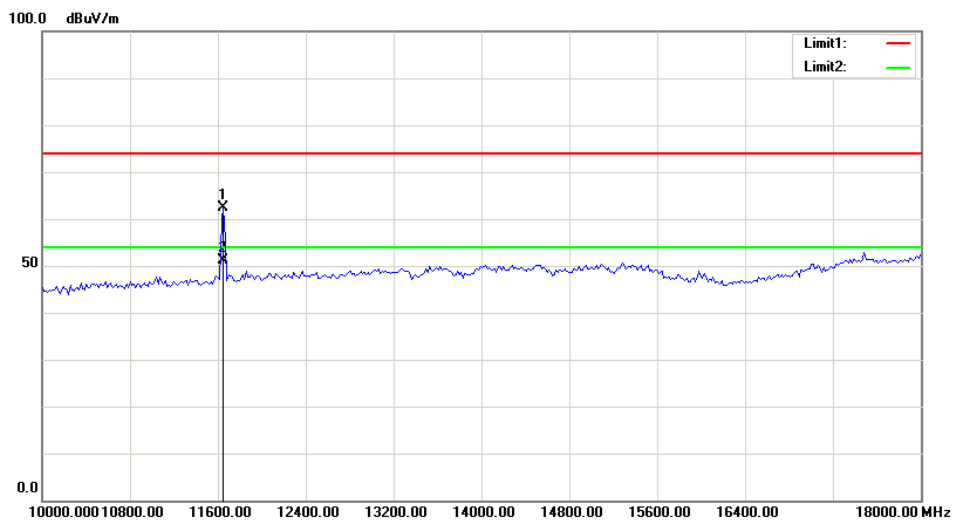
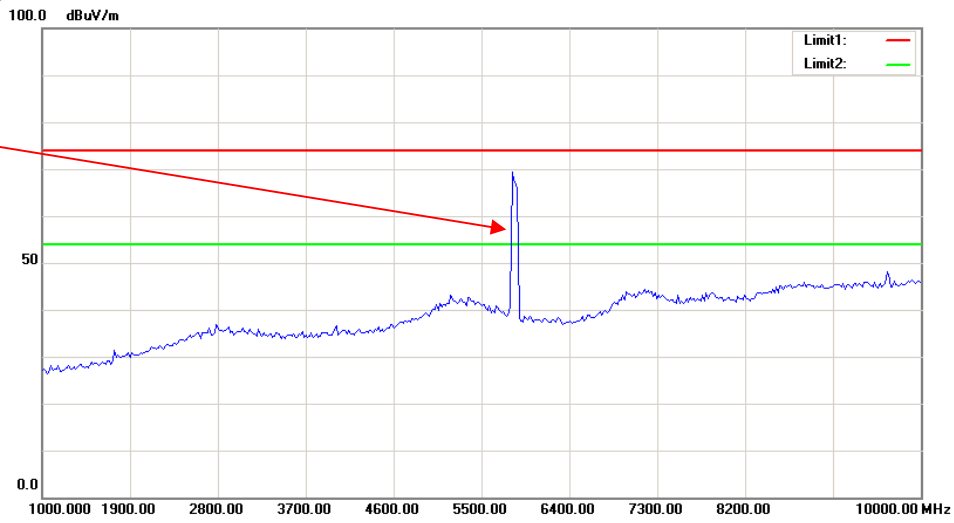


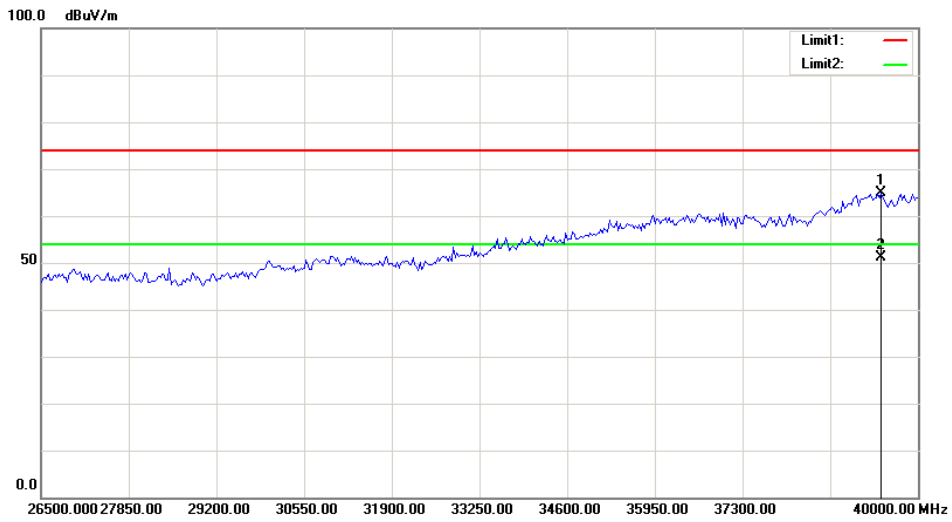

**Vertical**

Fundamental Test with Band Rejection Filter

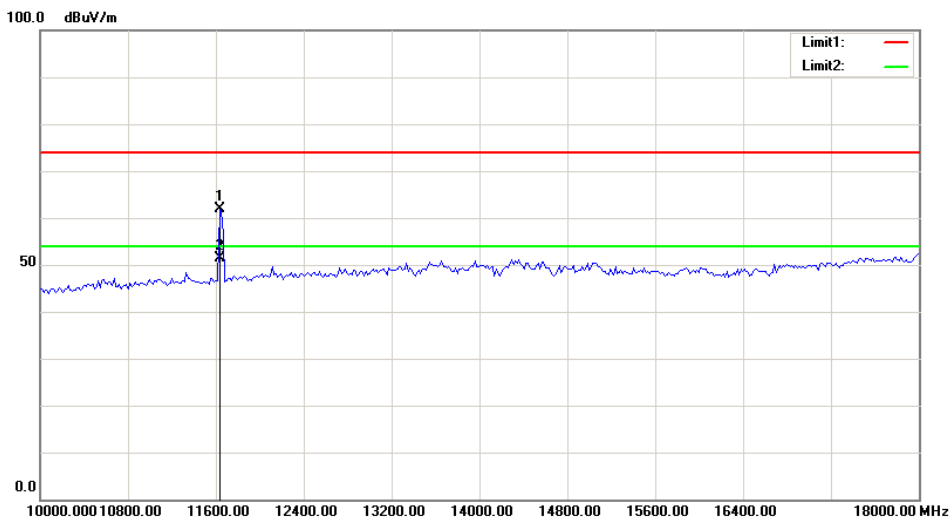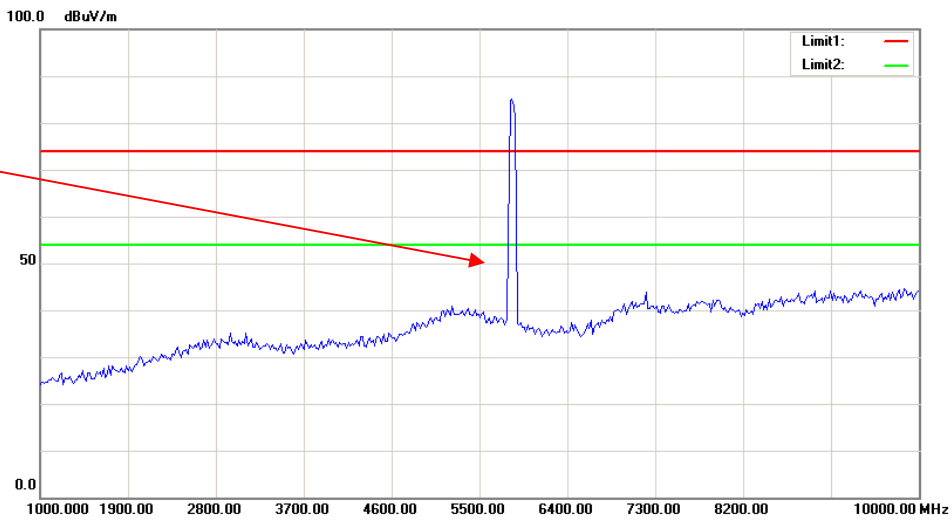

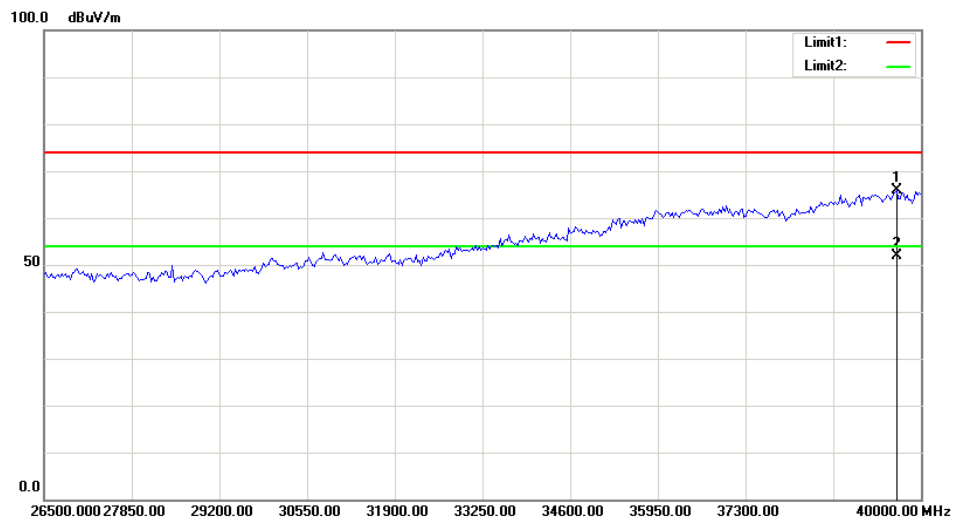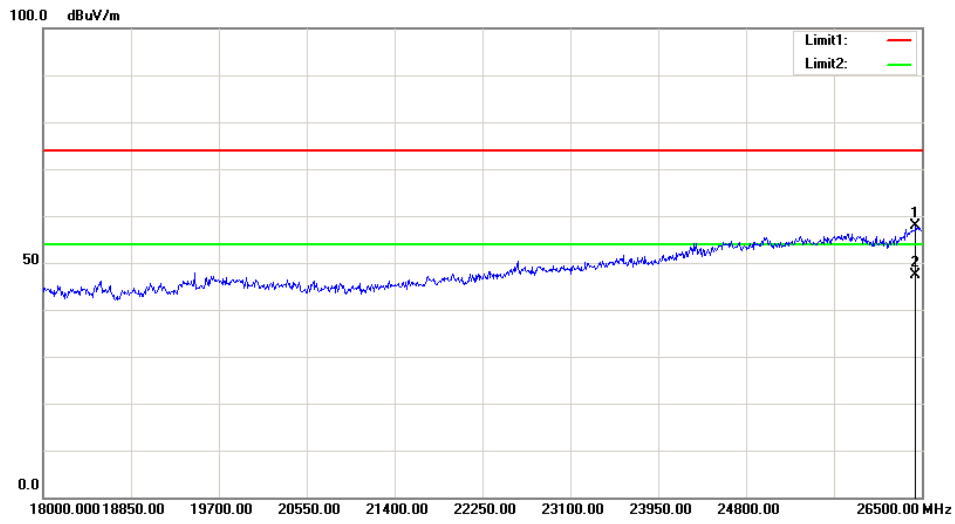

---

**FCC §15.407(b)–OUT- OF-BAND EMISSIONS**

---

**Applicable Standard**

FCC §15.407

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

**Test Procedure**

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-12-08	2017-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25.1°C
<b>Relative Humidity:</b>	41 %
<b>ATM Pressure:</b>	101.2 kPa


*The testing was performed by Harry Yang on 2017-12-07.*

**Test Result:** Pass.

Please refer to the following plots.


5150-5250MHz(the antenna gain was offset in the display, all emission under limit more than 3dBc for 802.11n and ac modes, so 2TX mode also compliance the requirement)  
Chain 0:

### 802.11a Low Channel

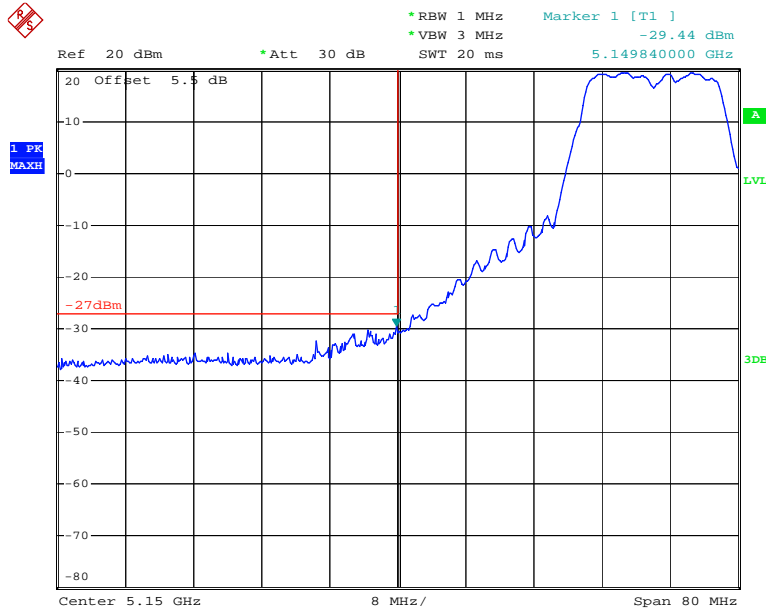


Date: 7.DEC.2017 12:02:45

### 802.11a High Channel

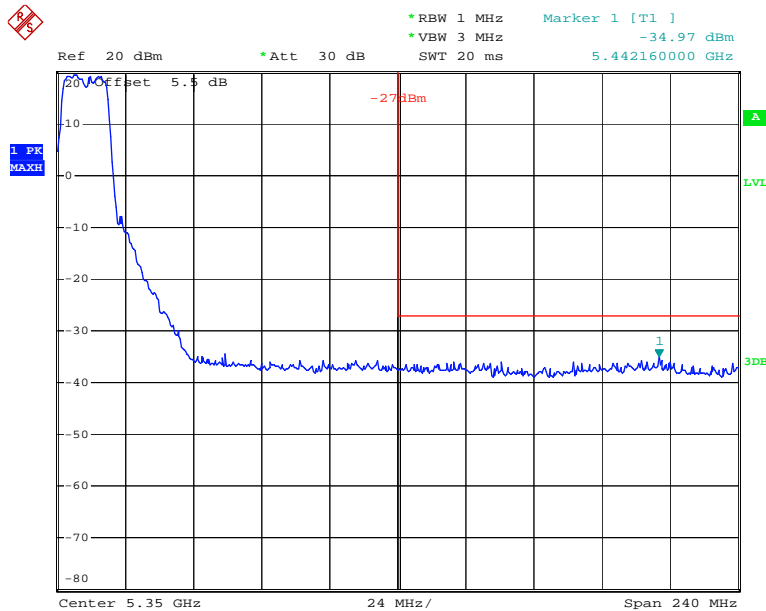


Date: 7.DEC.2017 11:58:33

### 802.11n ht20 Low Channel

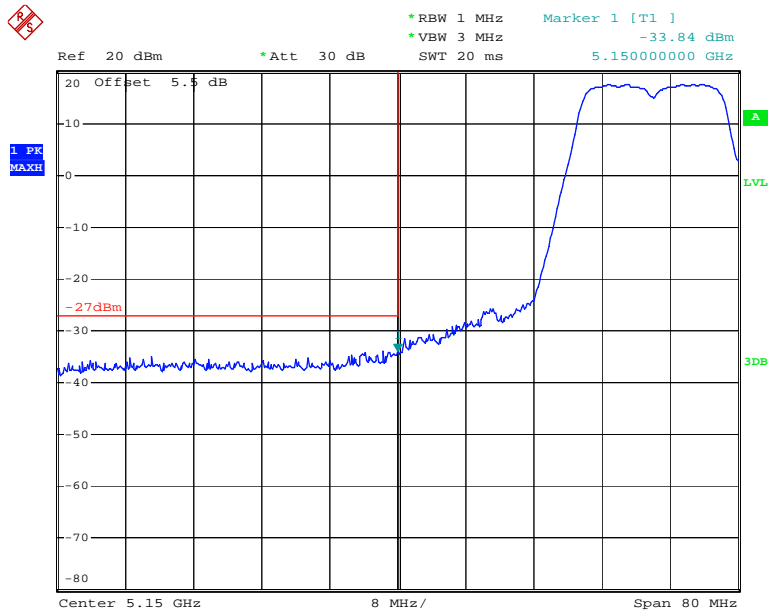


Date: 7.DEC.2017 13:04:52

### 802.11n ht20 High Channel

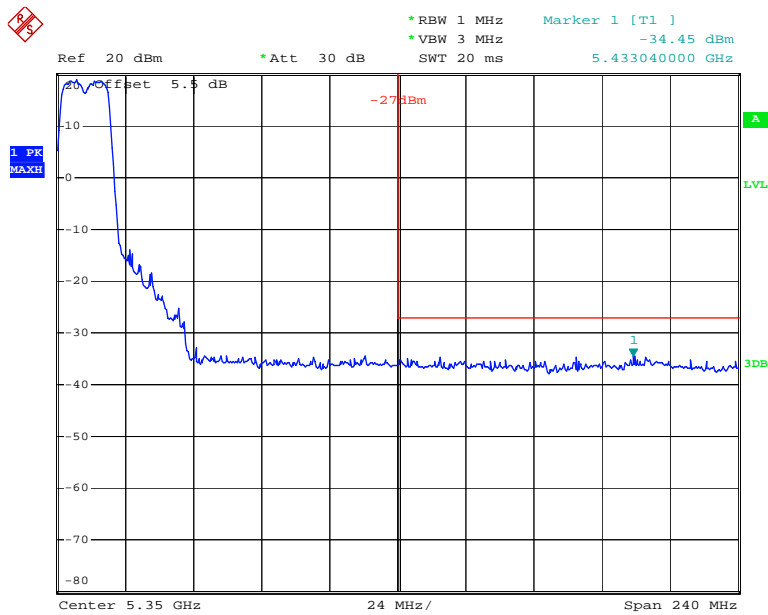


Date: 7.DEC.2017 13:11:08

### 802.11n ht40 Low Channel

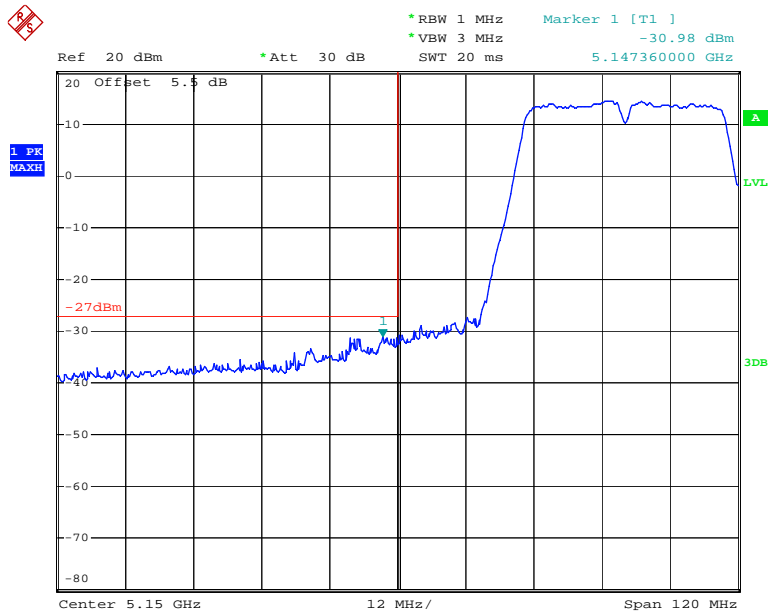

Date: 7.DEC.2017 14:22:17


### 802.11n ht40 High Channel

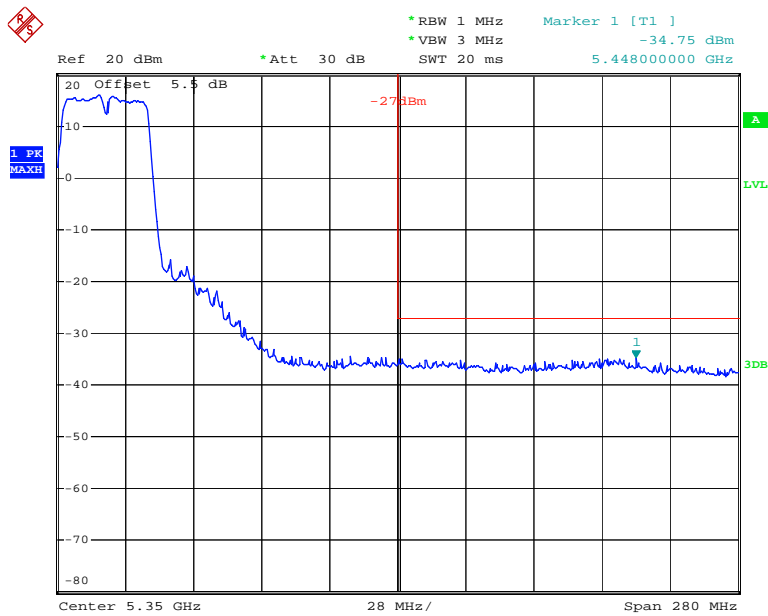

Date: 7.DEC.2017 14:06:41




### 802.11n ac80 Middle Channel

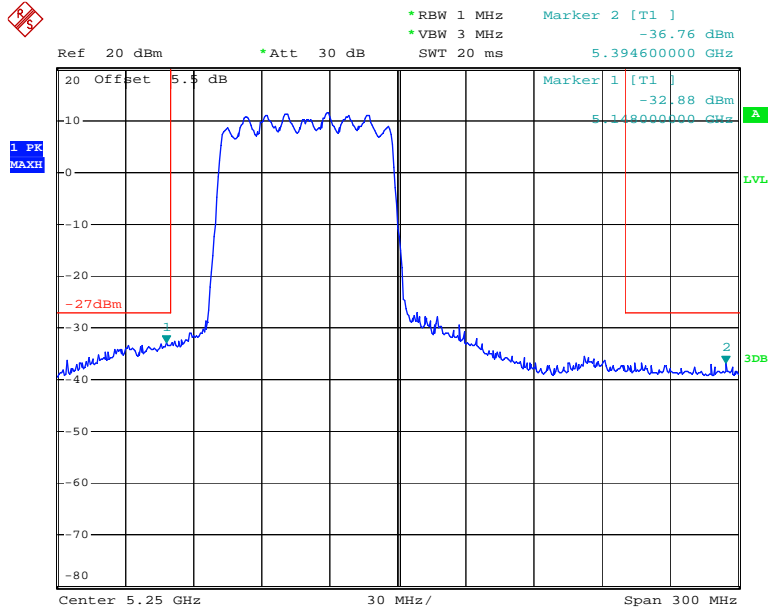

Date: 7.DEC.2017 14:26:54


Chain 1:

### 802.11a Low Channel

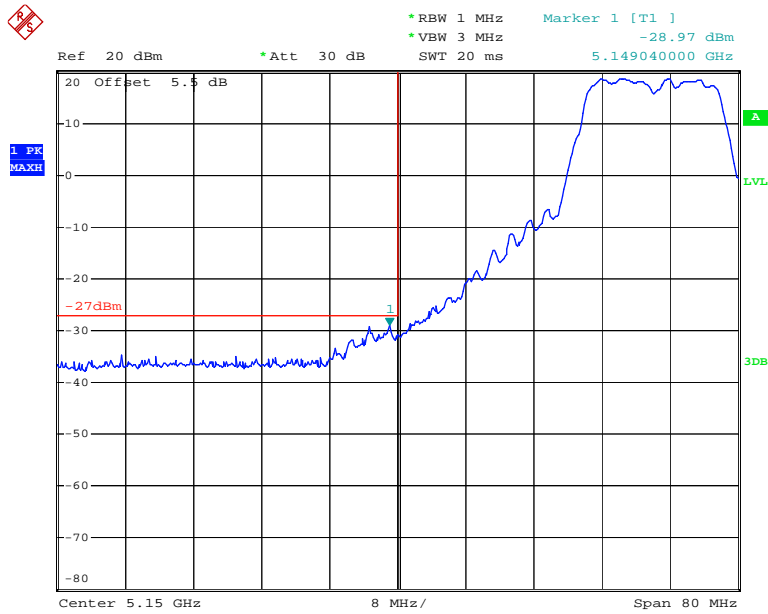


Date: 7.DEC.2017 11:13:37

### 802.11a High Channel

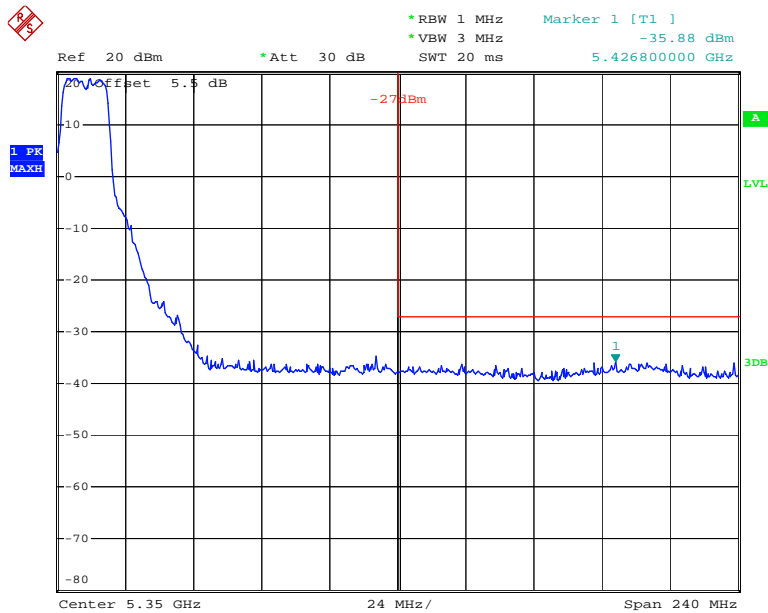


Date: 7.DEC.2017 11:22:32

### 802.11n ht20 Low Channel

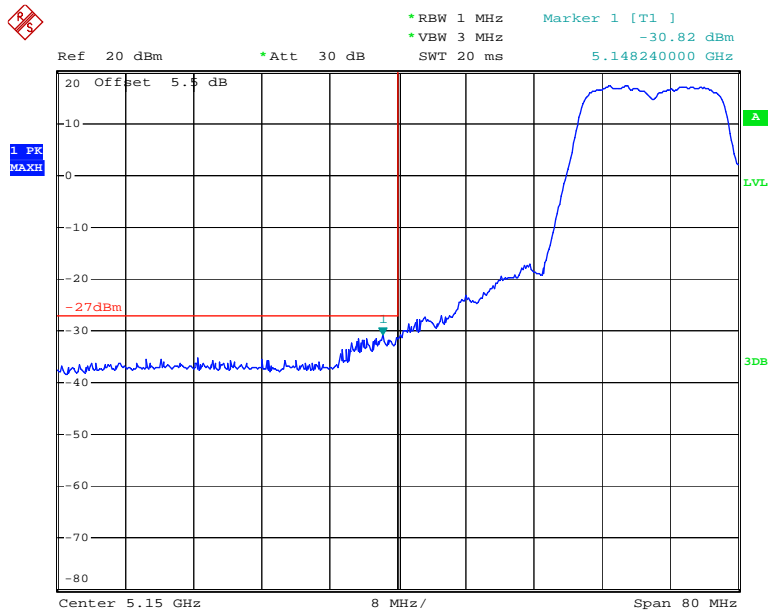


Date: 7.DEC.2017 13:35:21

### 802.11n ht20 High Channel

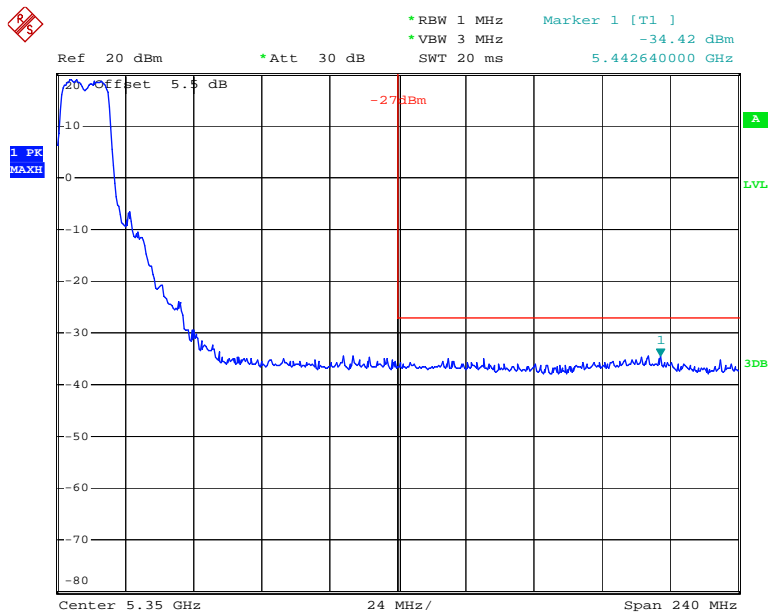


Date: 7.DEC.2017 13:30:21

### 802.11n ht40 Low Channel

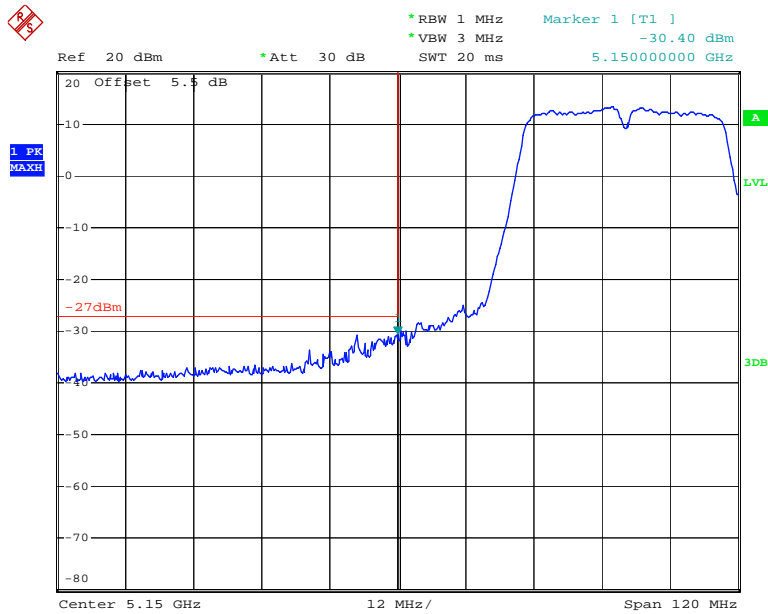


Date: 7.DEC.2017 13:39:43

### 802.11n ht40 High Channel

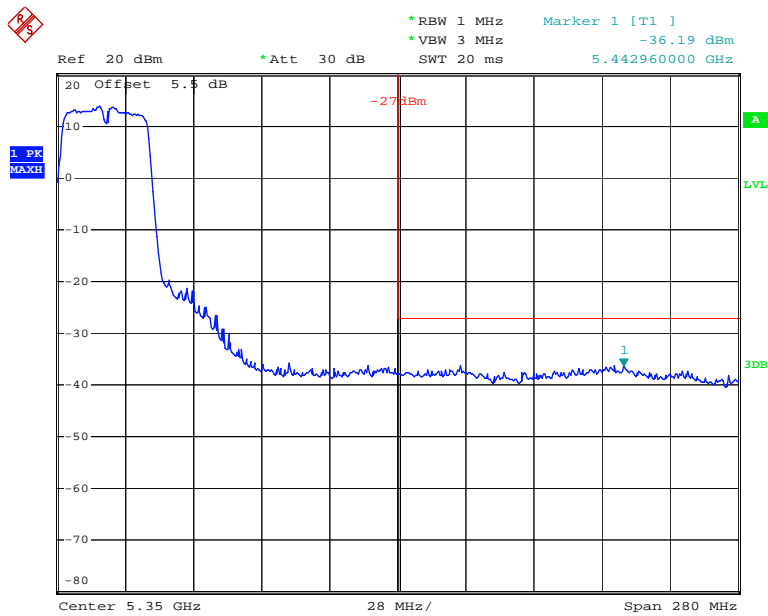

Date: 7.DEC.2017 13:43:34


### 802.11n ac80 Middle Channel

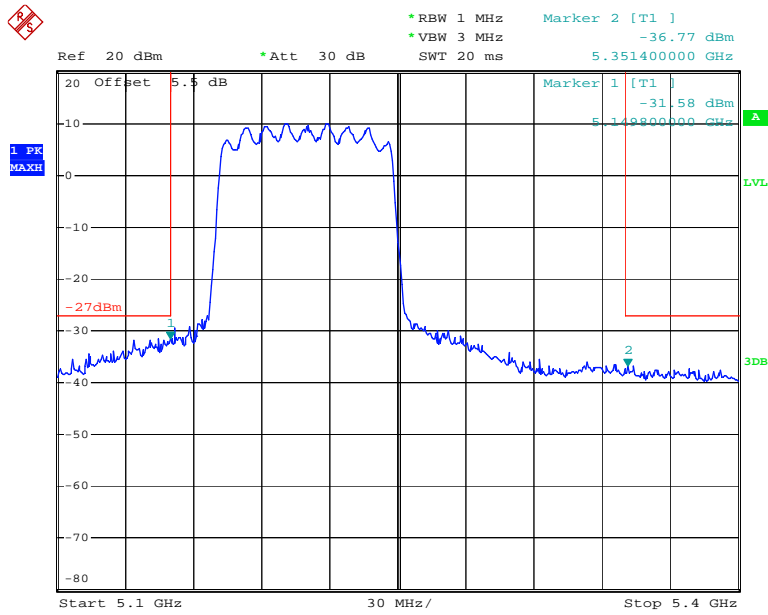

Date: 7.DEC.2017 15:26:52


5725-5850MHz(the antenna gain was offset in the display, all emission under limit more than 3dBc for 80.11n and ac modes, so 2TX mode also compliance the requirement)  
Chain 0:

### 802.11a Low Channel

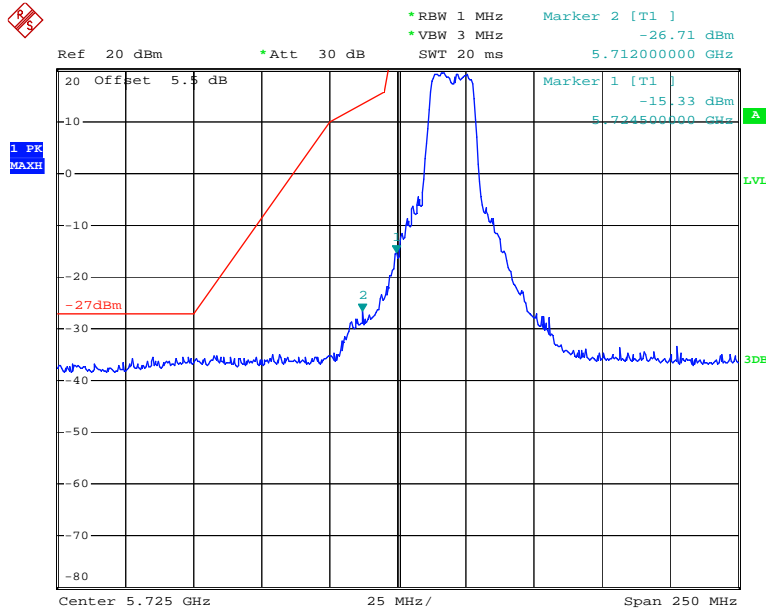


Date: 7.DEC.2017 11:47:37

### 802.11a High Channel

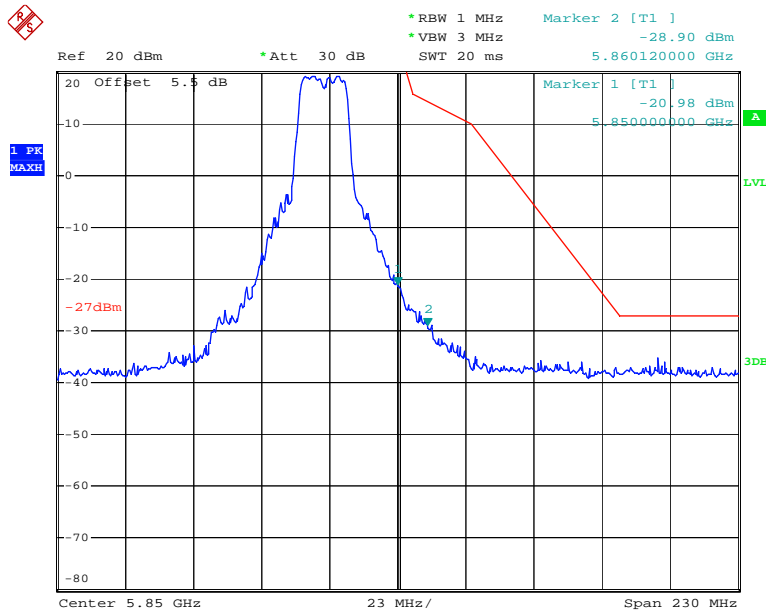


Date: 7.DEC.2017 11:54:02

### 802.11n ht20 Low Channel

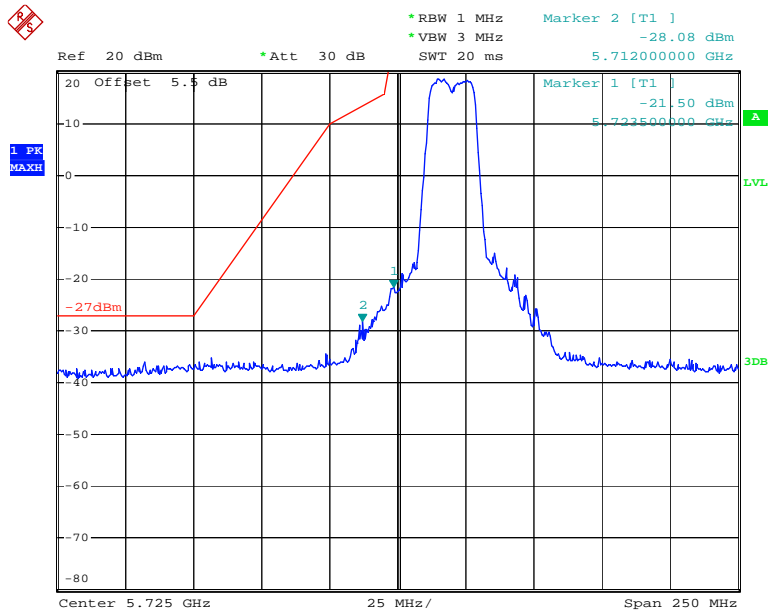


Date: 7.DEC.2017 13:14:07

### 802.11n ht20 High Channel

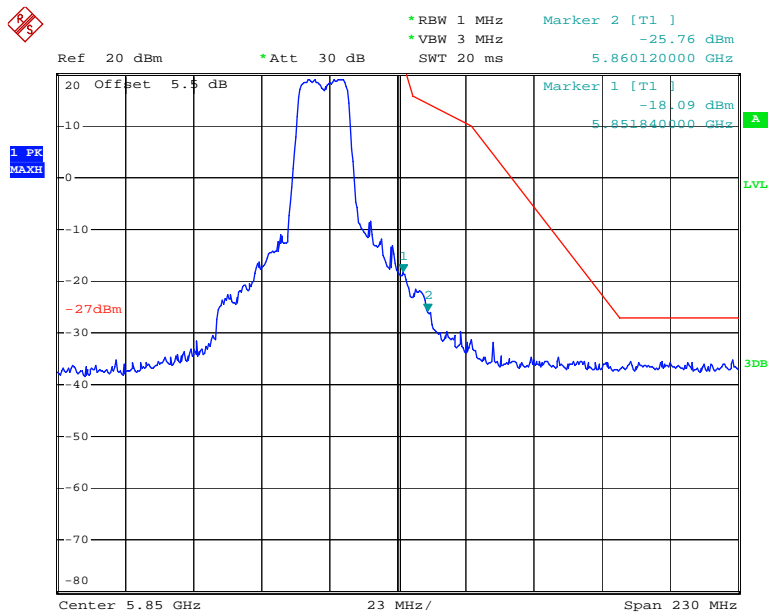


Date: 7.DEC.2017 13:19:15

### 802.11n ht40 Low Channel

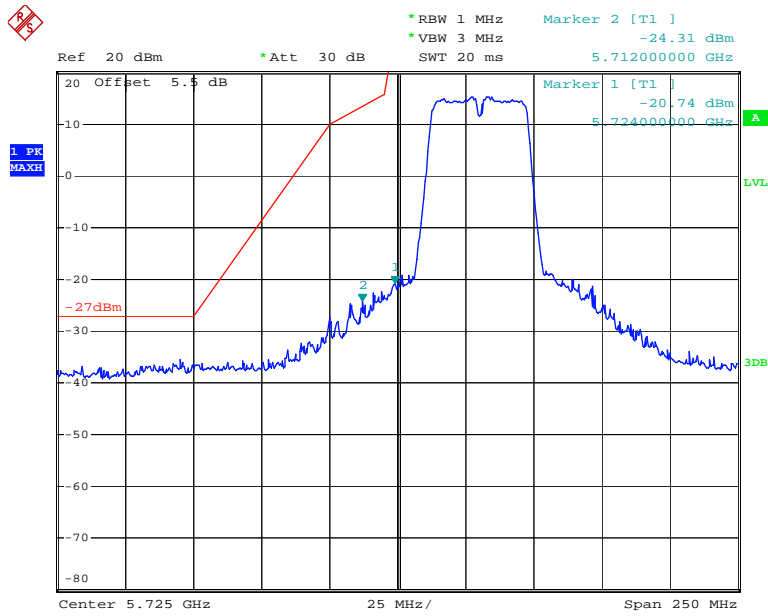

Date: 7.DEC.2017 14:00:26


### 802.11n ht40 High Channel

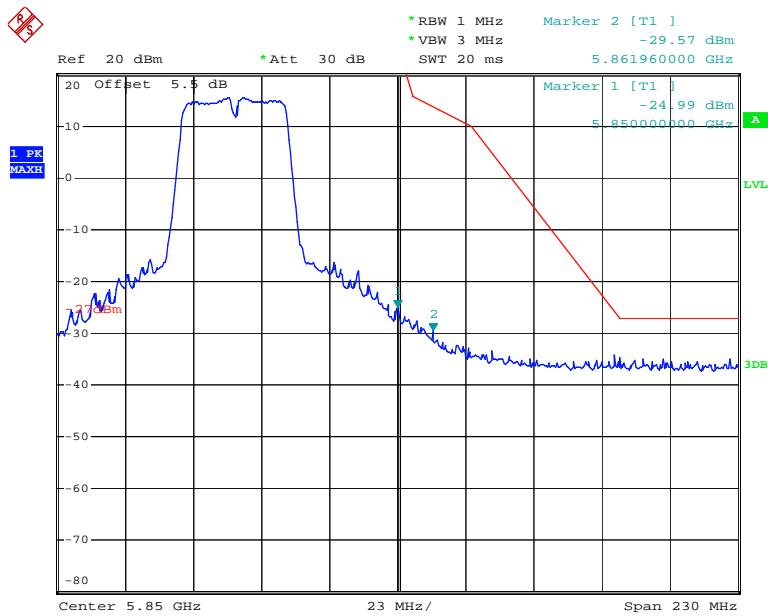

Date: 7.DEC.2017 13:57:30




### 802.11n ac80 Middle Channel

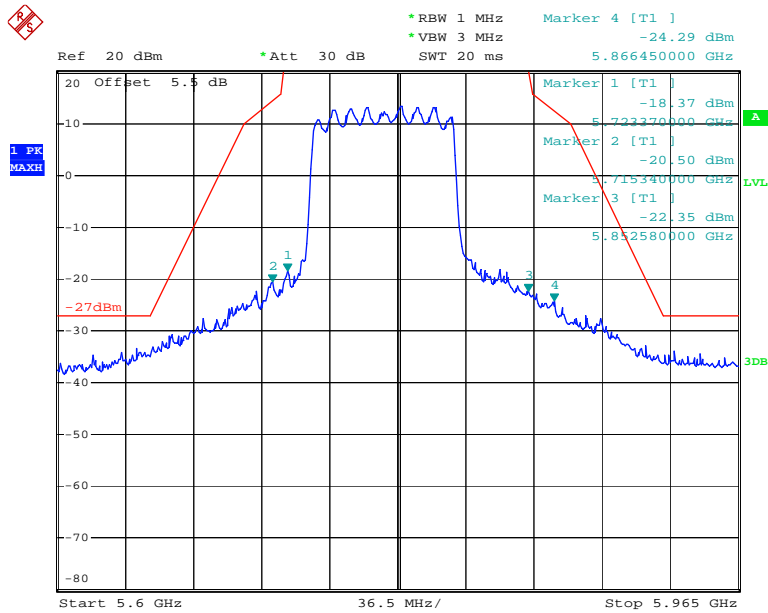

Date: 7.DEC.2017 16:21:45


Chain 1:

### 802.11a Low Channel

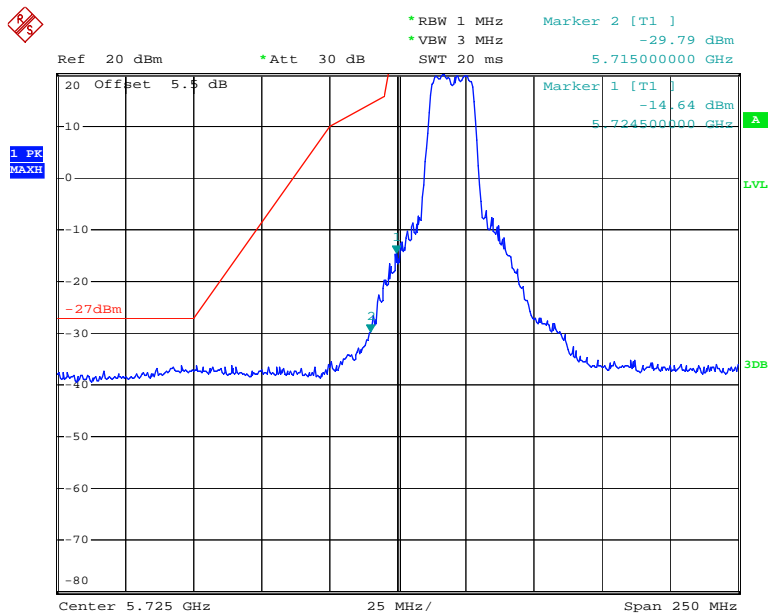


Date: 7.DEC.2017 11:26:03

### 802.11a High Channel

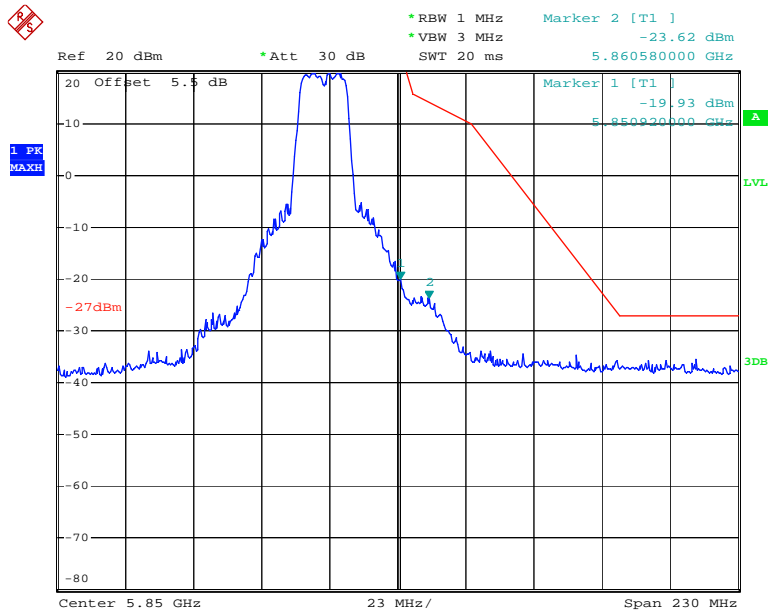


Date: 7.DEC.2017 11:35:24

### 802.11n ht20 Low Channel

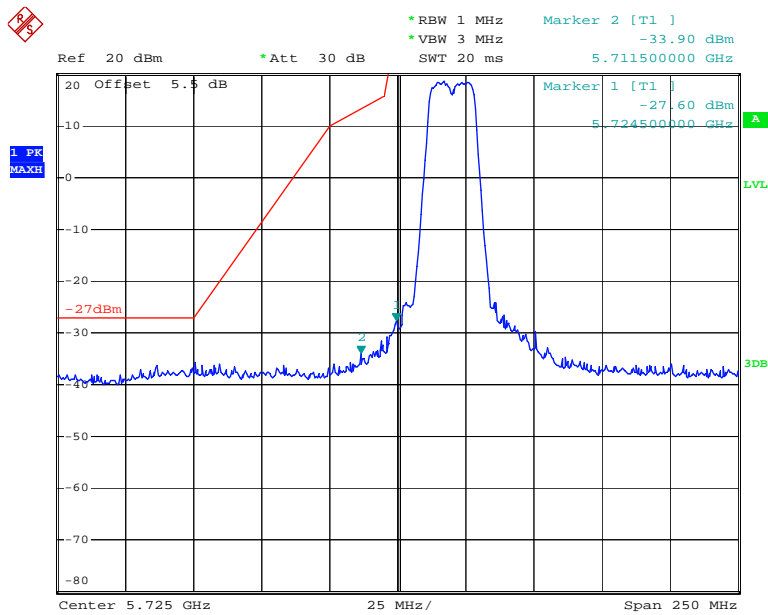


Date: 7.DEC.2017 13:27:29

### 802.11n ht20 High Channel

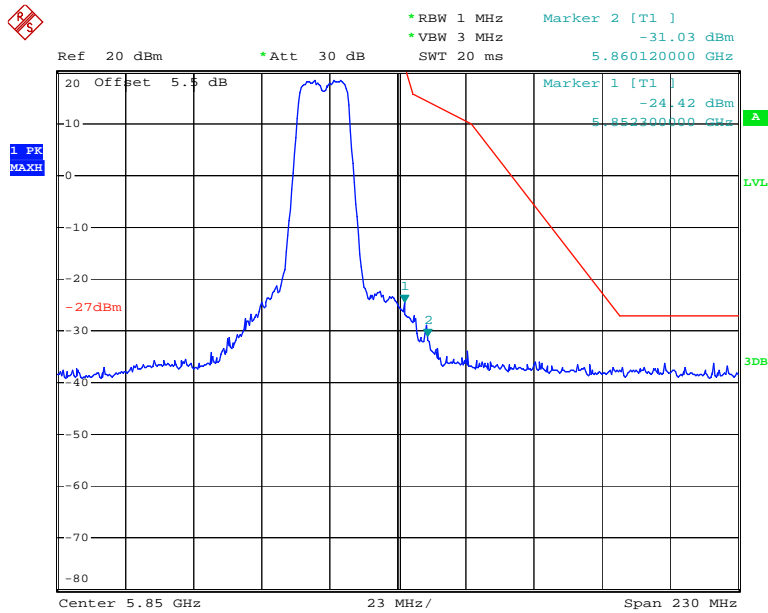


Date: 7.DEC.2017 13:22:46

### 802.11n ht40 Low Channel

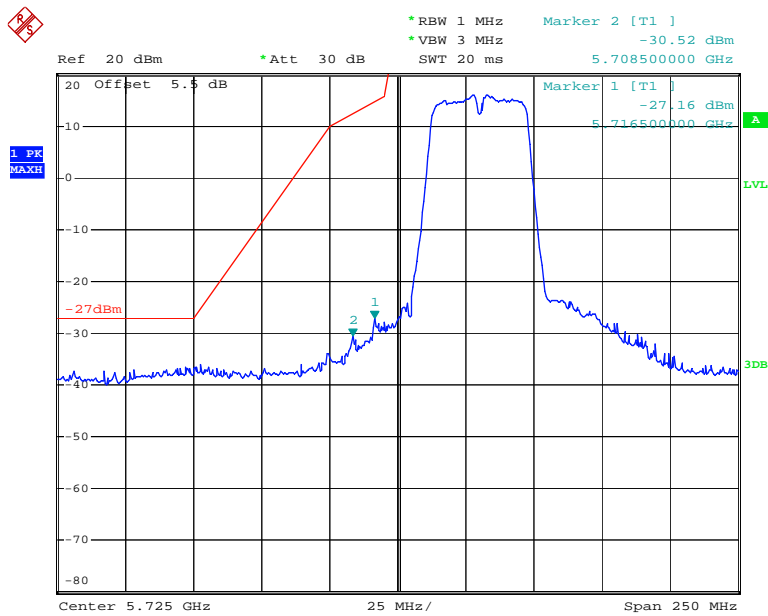


Date: 7.DEC.2017 13:46:58

### 802.11n ht40 High Channel

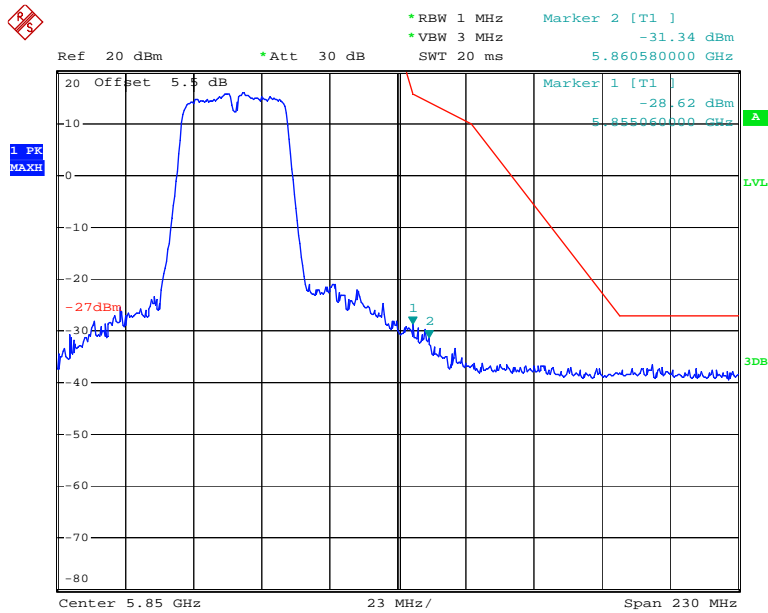

Date: 7.DEC.2017 13:51:08

### 802.11n ac80 Middle Channel

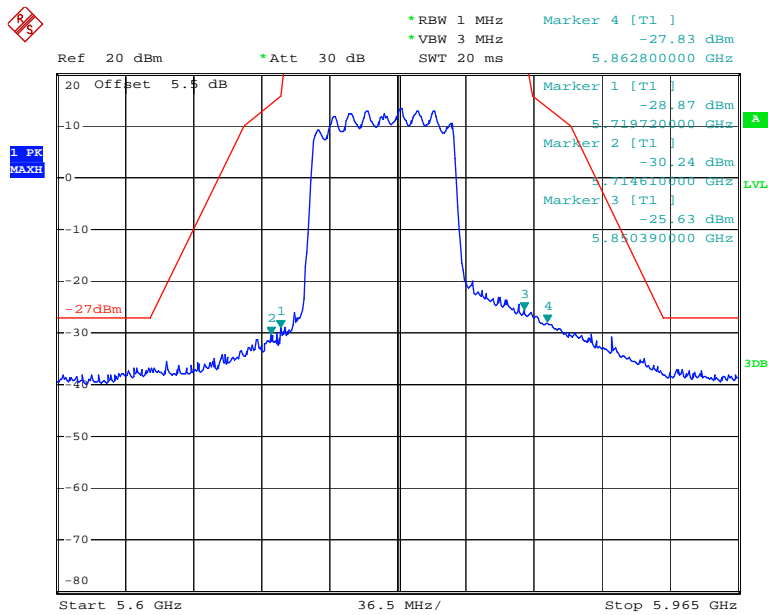

Date: 7.DEC.2017 15:23:09

## FCC §15.407(a)(e) –EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH

### Applicable Standard

15.407(a) (e)

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-12-08	2017-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25.1°C
<b>Relative Humidity:</b>	41 %
<b>ATM Pressure:</b>	101.2 kPa

*The testing was performed by Harry Yang on 2017-12-07.*

**Test Result:** Pass.

Please refer to the following tables and plots.

Test mode: Transmitting(Test performed at chain 0)

**5150-5250MHz:**

Mode	Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	Low	5180	20.32	16.72
	Middle	5200	20.32	16.72
	High	5240	20.8	16.72
802.11n ht20	Low	5180	21.2	17.68
	Middle	5200	21.12	17.68
	High	5240	21.2	17.76
802.11n ht40	Low	5190	41.28	36.64
	High	5230	41.12	36.64
802.11ac80	Middle	5210	82.56	75.52

Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.


**5725-5850MHz:**

Mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	6 dB Emission Bandwidth Limits (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	Low	5745	16.56	≥0.5	16.72
	Middle	5785	16.56	≥0.5	16.8
	High	5825	16.56	≥0.5	16.88
802.11n ht20	Low	5745	17.6	≥0.5	17.76
	Middle	5785	17.68	≥0.5	17.76
	High	5825	17.68	≥0.5	17.68
802.11n ht40	Low	5755	36.48	≥0.5	36.64
	High	5795	36.64	≥0.5	36.64
802.11ac80	Middle	5775	76.48	≥0.5	75.84

Note: For 5725-5850MHz band, the 99% Occupied Bandwidth have not fall into the band 5470-5725MHz.


**5150-5250MHz: 26dB Emission Bandwidth:  
Chain0**

**802.11a Low Channel**

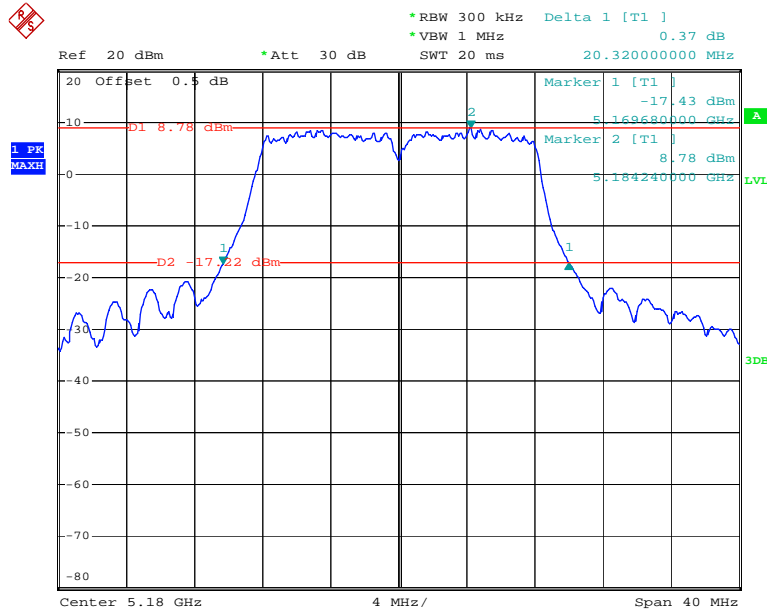


Date: 7.DEC.2017 12:01:41

**802.11a Middle Channel**

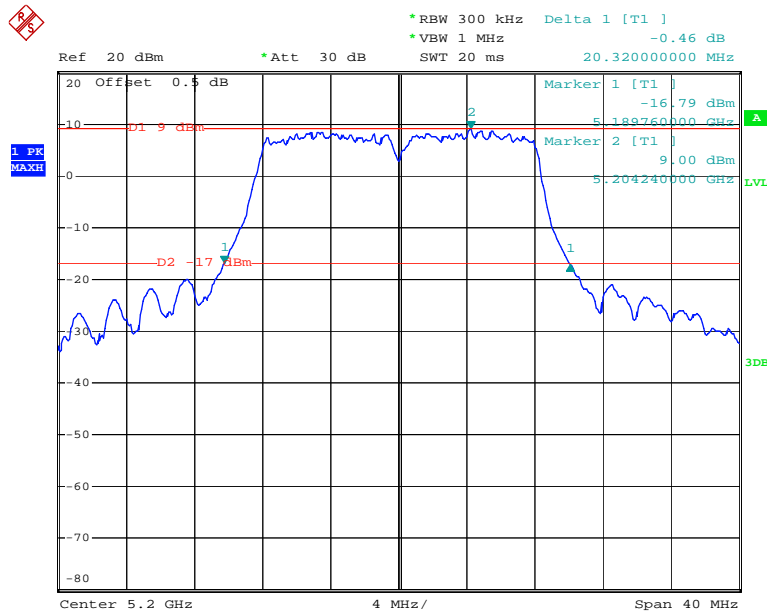


Date: 7.DEC.2017 11:59:53

### 802.11a High Channel

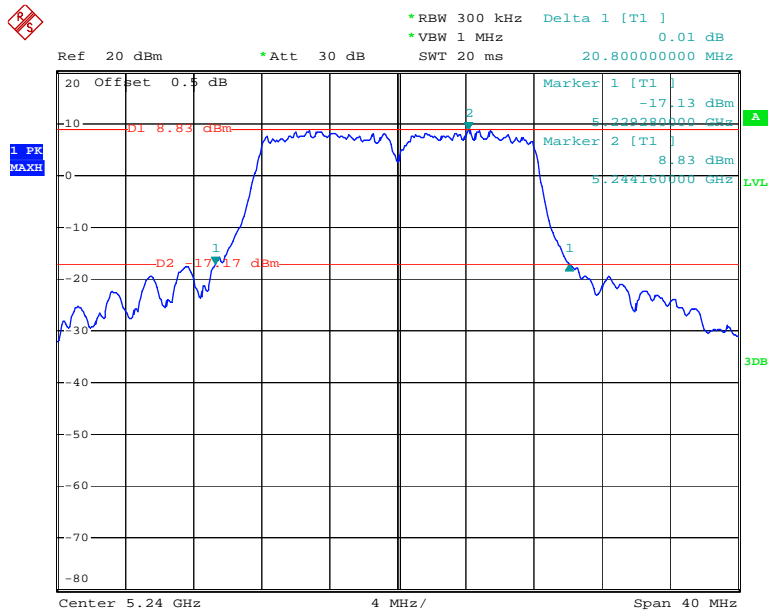

Date: 7.DEC.2017 11:57:39


### 802.11n ht20 Low Channel

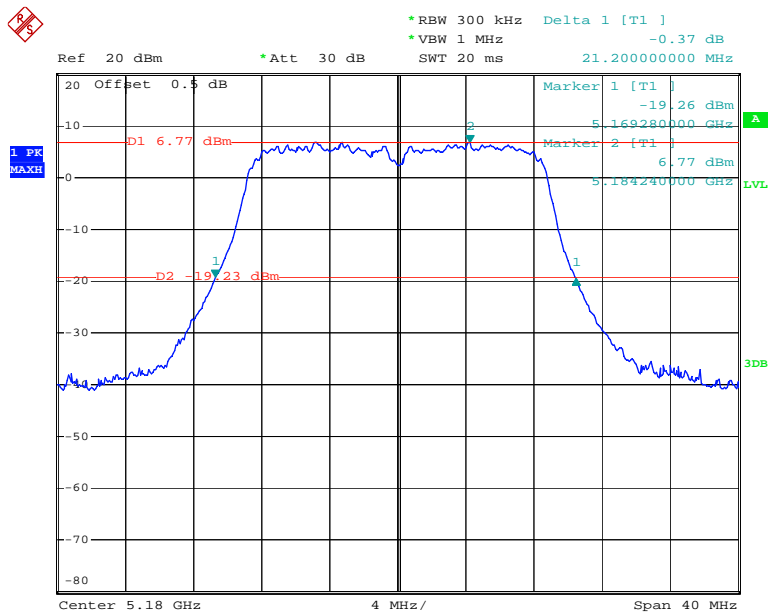

Date: 7.DEC.2017 13:03:59




### 802.11n ht20 Middle Channel

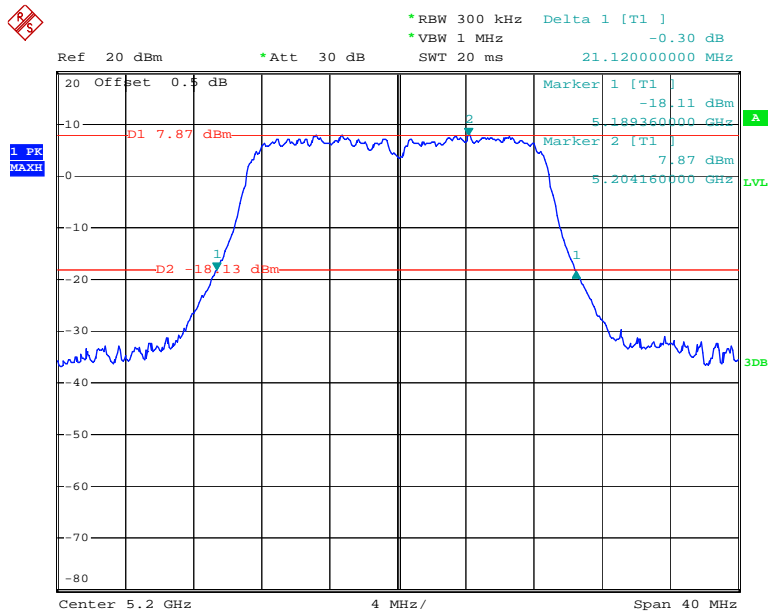


Date: 7.DEC.2017 13:08:56

### 802.11n ht20 High Channel

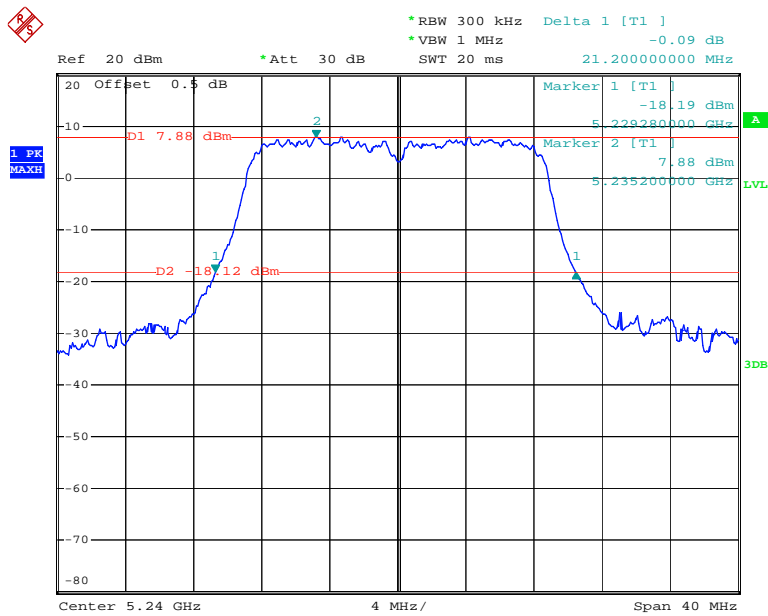


Date: 7.DEC.2017 13:10:17

### 802.11n ht40 Low Channel

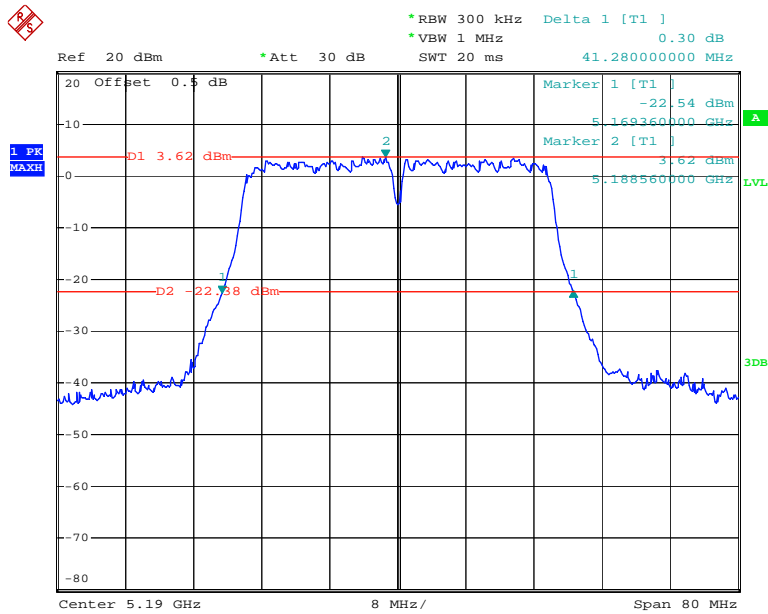


Date: 7.DEC.2017 14:22:50

### 802.11n ht40 High Channel

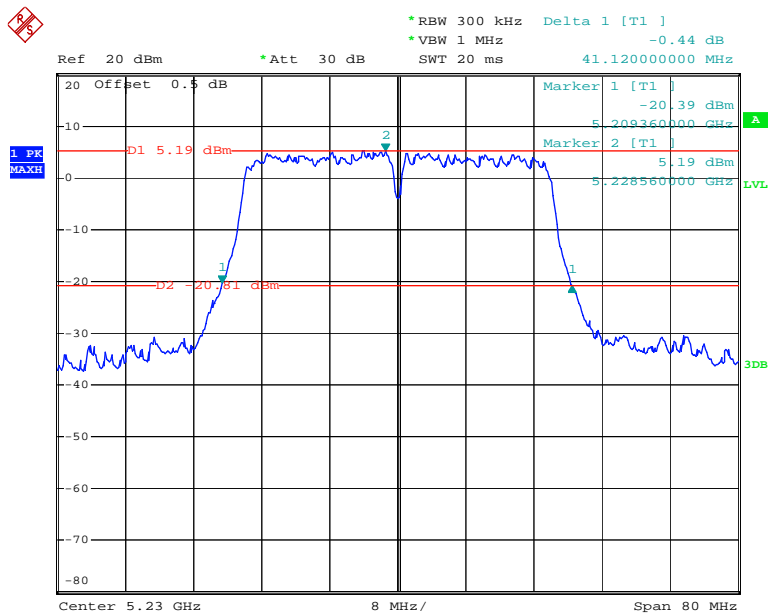

Date: 7.DEC.2017 14:05:41


### 802.11ac80 Middle Channel

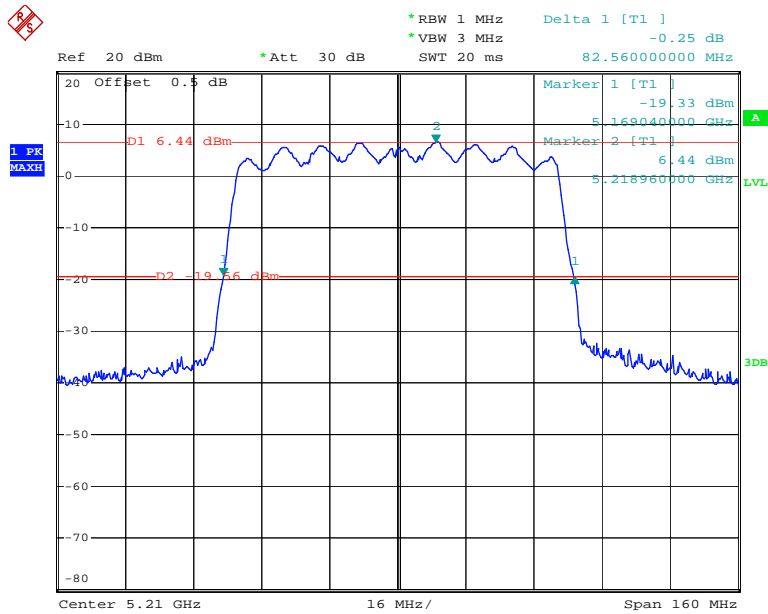

Date: 7.DEC.2017 16:20:53


### 99% Occupied Bandwidth:

### 802.11a Low Channel

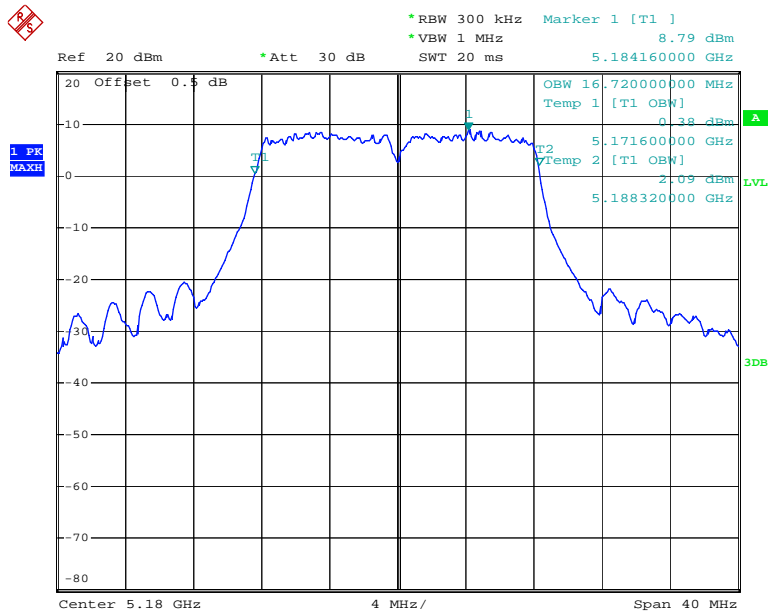


Date: 7.DEC.2017 12:01:55

### 802.11a Middle Channel

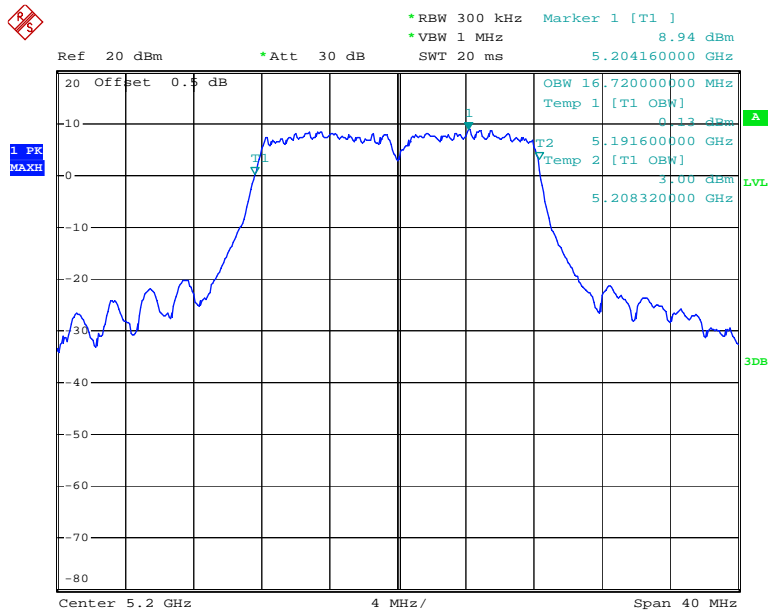


Date: 7.DEC.2017 12:00:06

### 802.11a High Channel

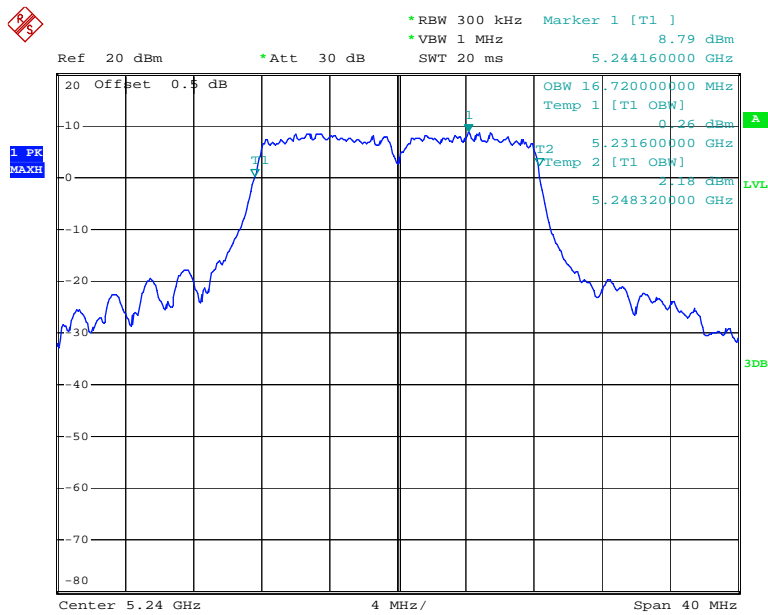


Date: 7.DEC.2017 11:57:52

### 802.11n ht20 Low Channel

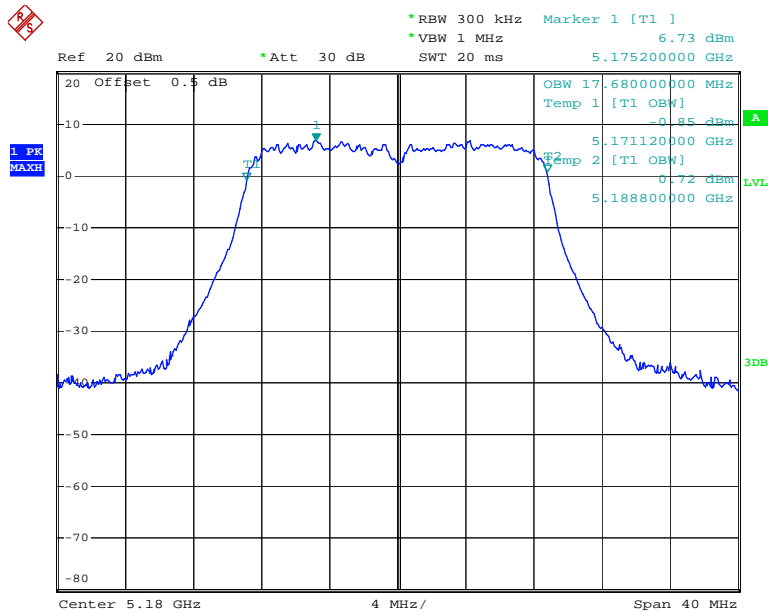


Date: 7.DEC.2017 13:04:12

### 802.11n ht20 Middle Channel

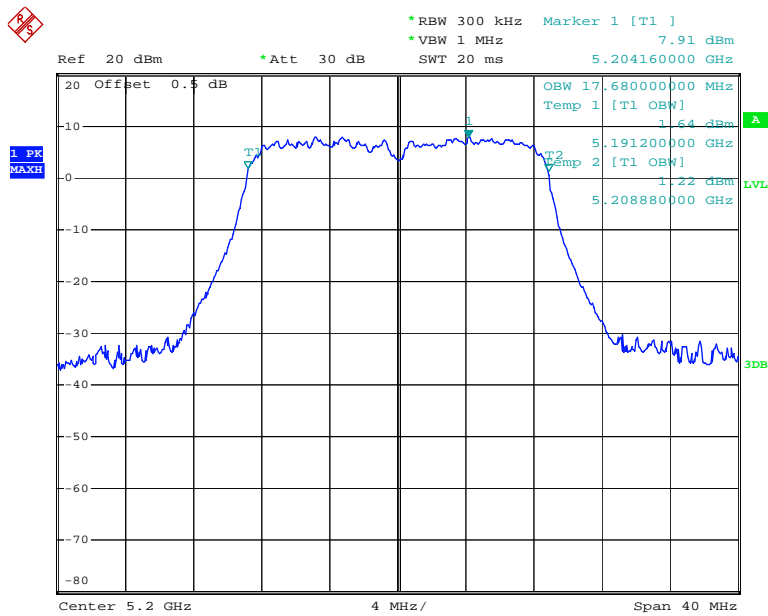


Date: 7.DEC.2017 13:08:10

### 802.11n ht20 High Channel

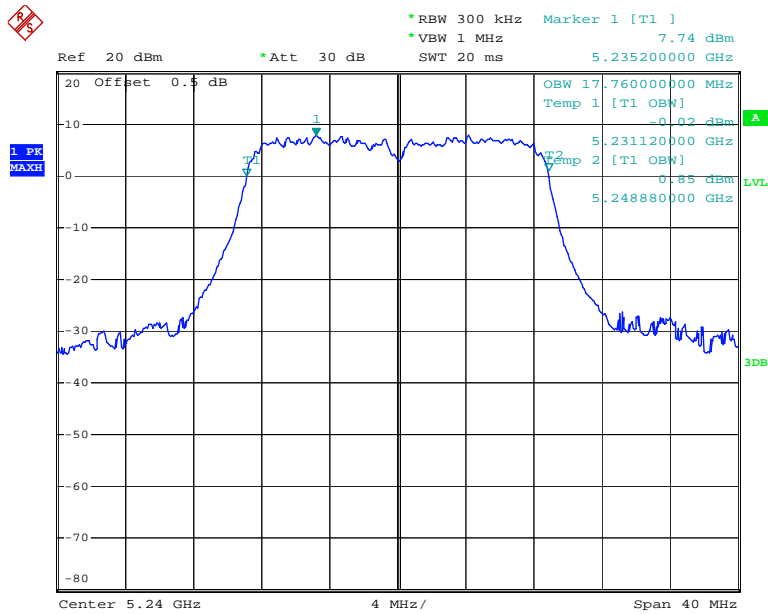


Date: 7.DEC.2017 13:10:30

### 802.11n ht40 Low Channel

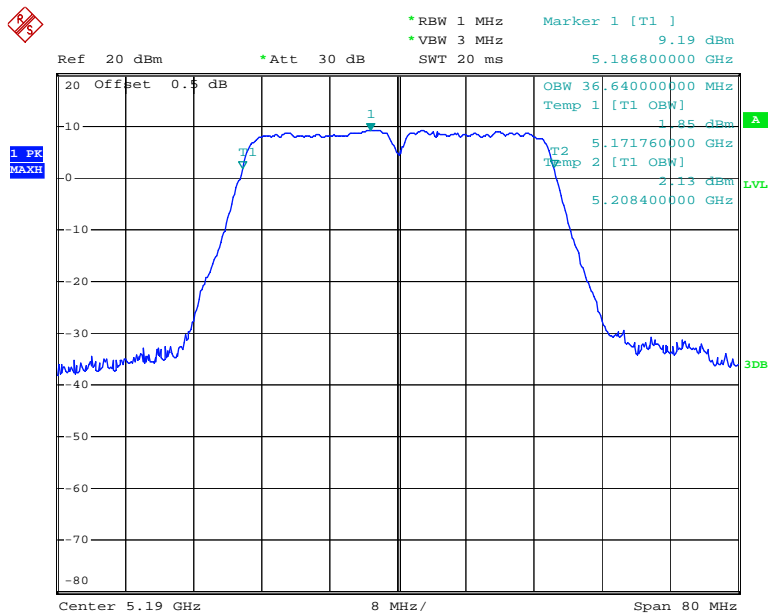


Date: 7.DEC.2017 14:23:02

### 802.11n ht40 High Channel

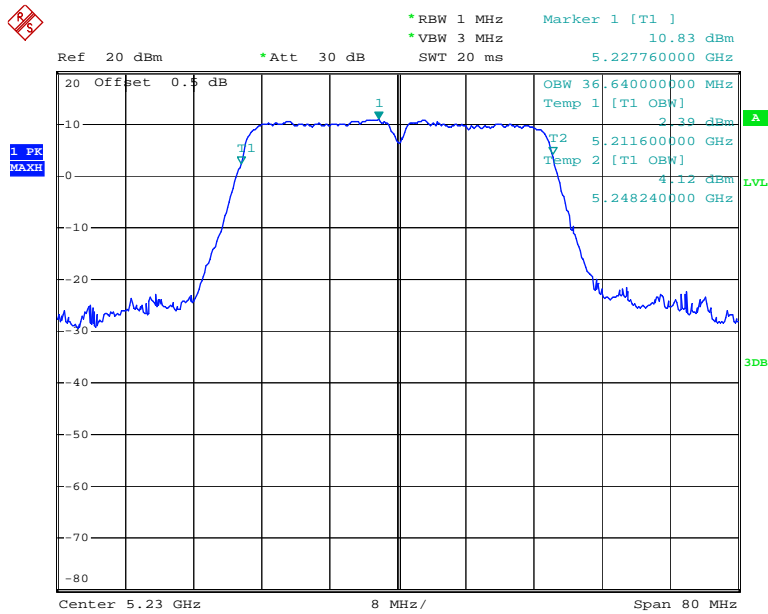

Date: 7.DEC.2017 14:05:54


### 802.11ac80 Middle Channel

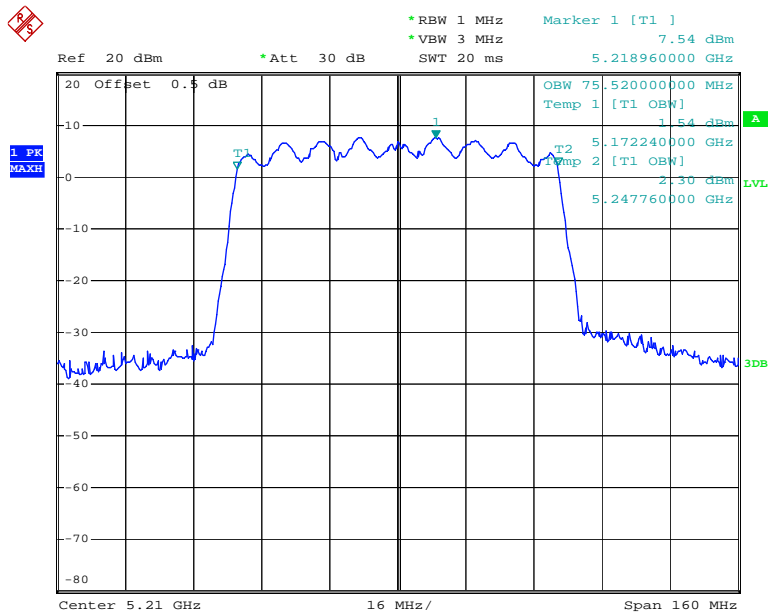

Date: 7.DEC.2017 14:47:08


**5725-5850MHz(Chain0):  
6dB Bandwidth:**

**802.11a Low Channel**

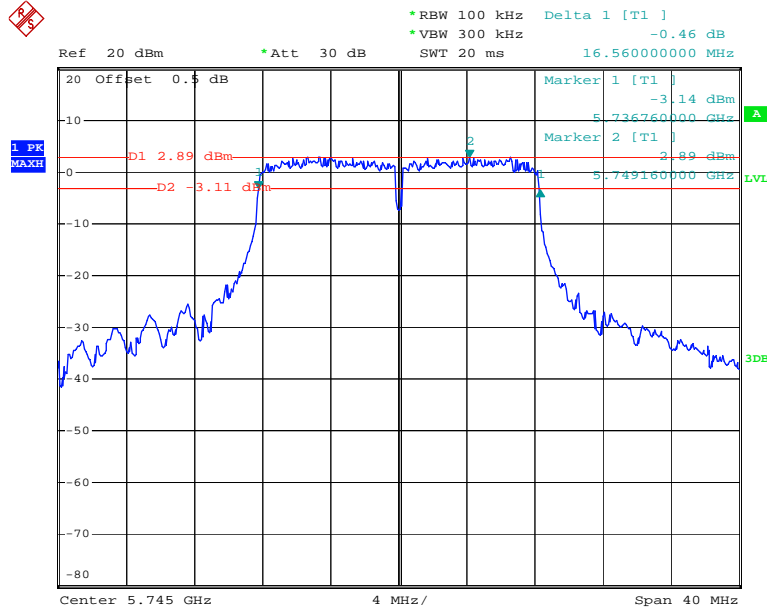

Date: 7.DEC.2017 11:46:40


**802.11a Middle Channel**

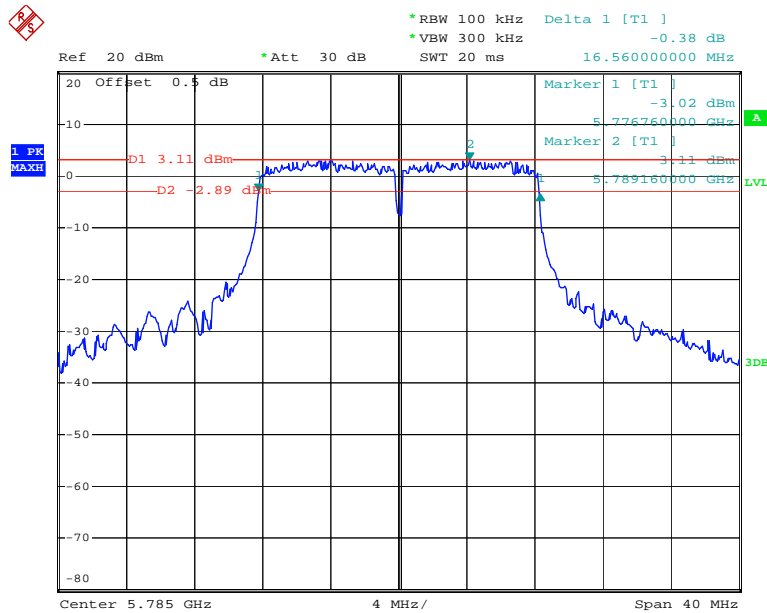

Date: 7.DEC.2017 11:49:36




### 802.11a High Channel

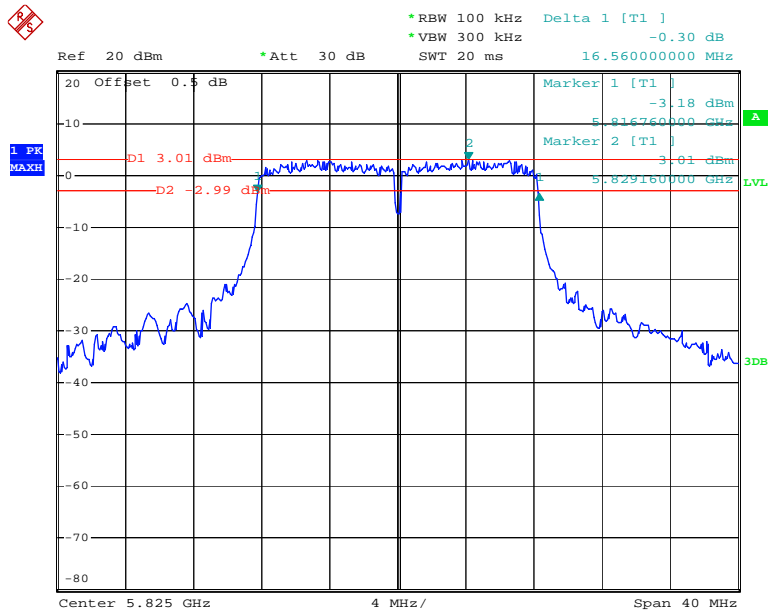


Date: 7.DEC.2017 11:53:10

### 802.11ht20 Low Channel

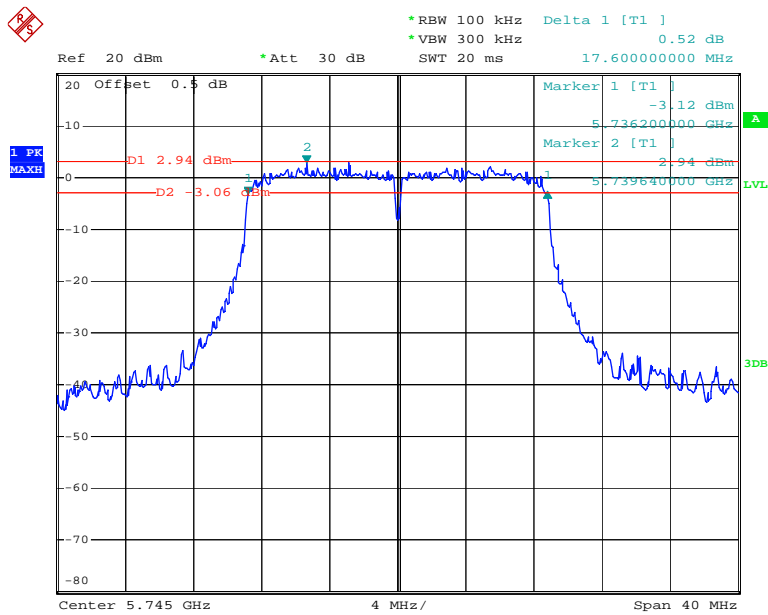


Date: 7.DEC.2017 13:13:14

### 802.11ht20 Middle Channel

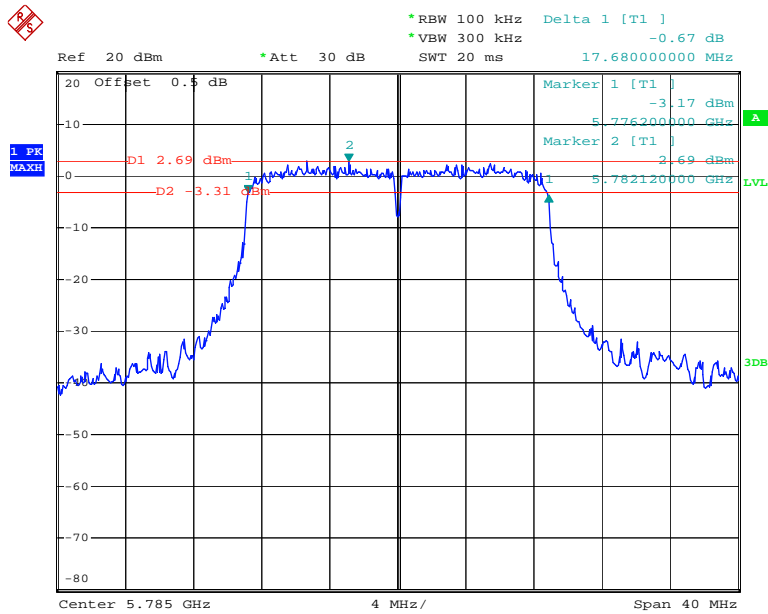


Date: 7.DEC.2017 13:16:22

### 802.11ht20 High Channel

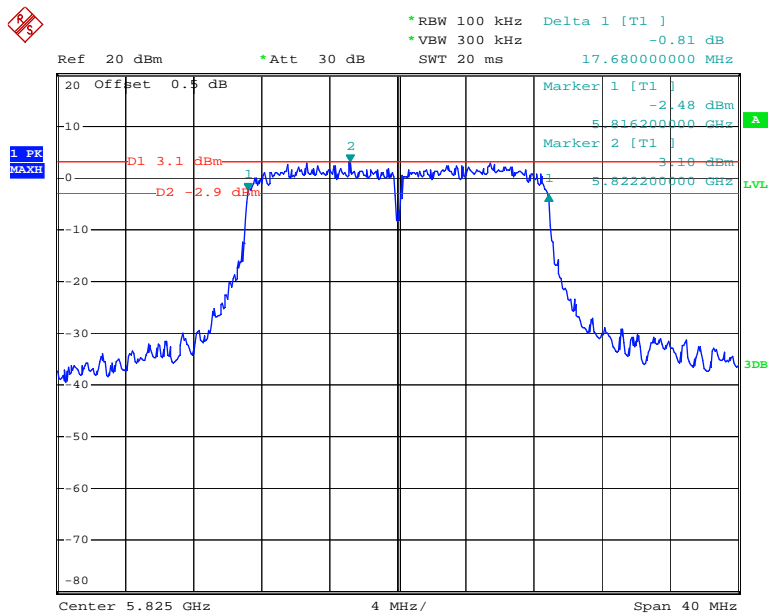


Date: 7.DEC.2017 13:18:24

### 802.11ht40 Low Channel

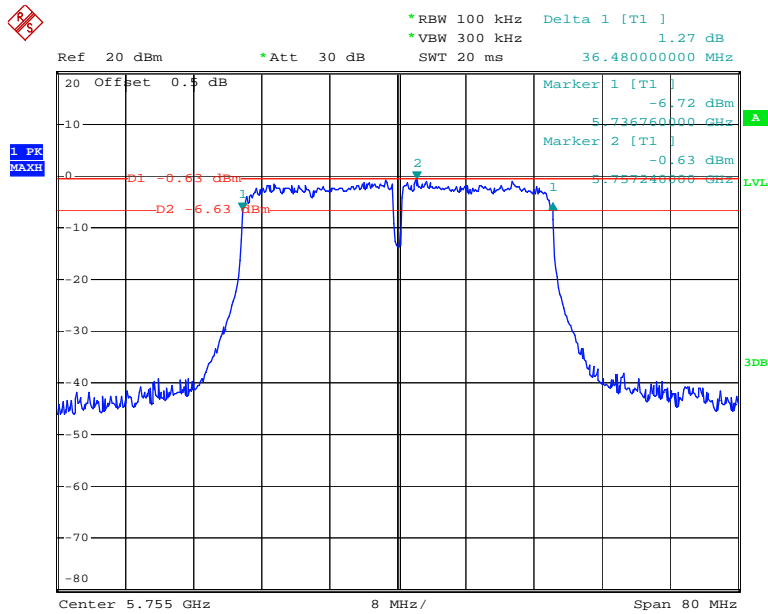


Date: 7.DEC.2017 13:59:34

### 802.11ht40 High Channel

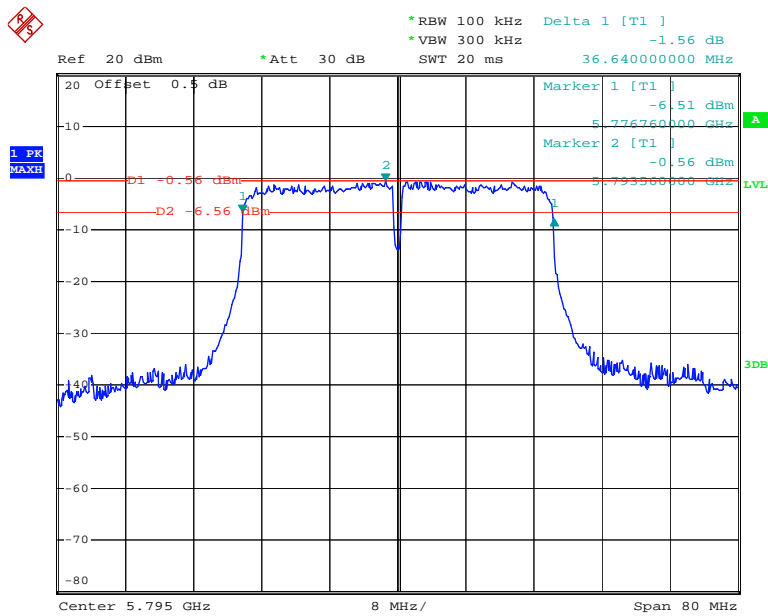

Date: 7.DEC.2017 13:56:07


### 802.11ac80 Middle Channel

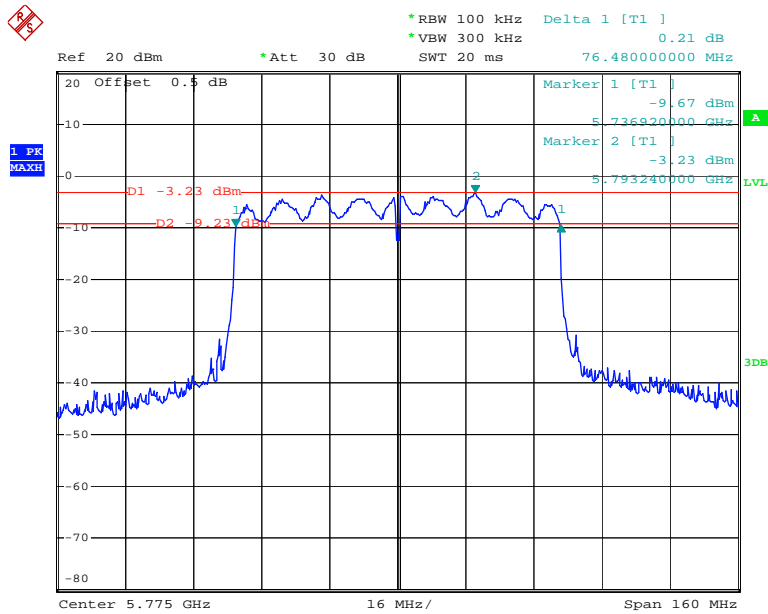

Date: 7.DEC.2017 15:07:37


### 99% Occupied Bandwidth:

### 802.11a Low Channel

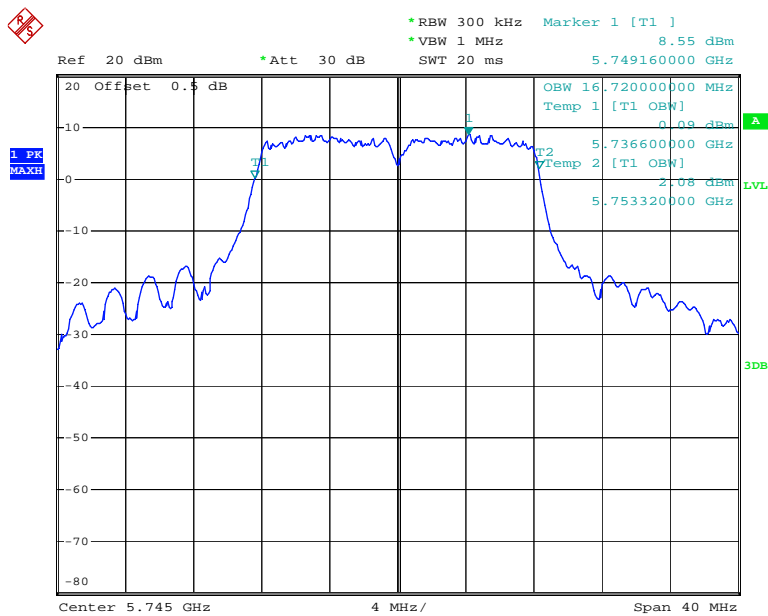


Date: 7.DEC.2017 11:46:52

### 802.11a Middle Channel

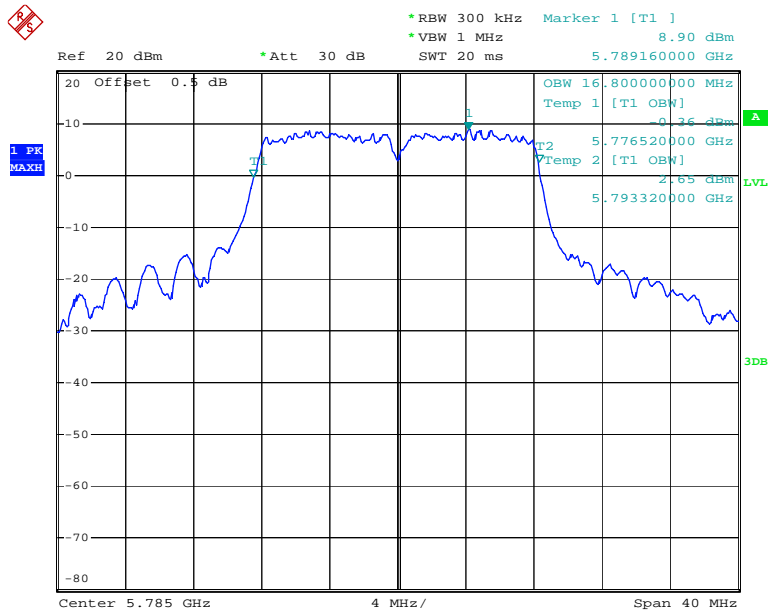


Date: 7.DEC.2017 11:49:49

### 802.11a High Channel

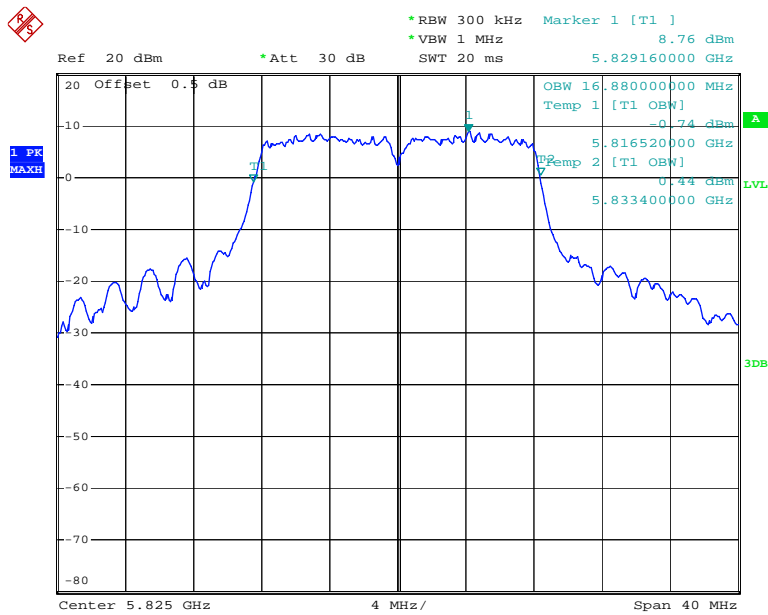


Date: 7.DEC.2017 11:53:23

### 802.11ht20 Low Channel

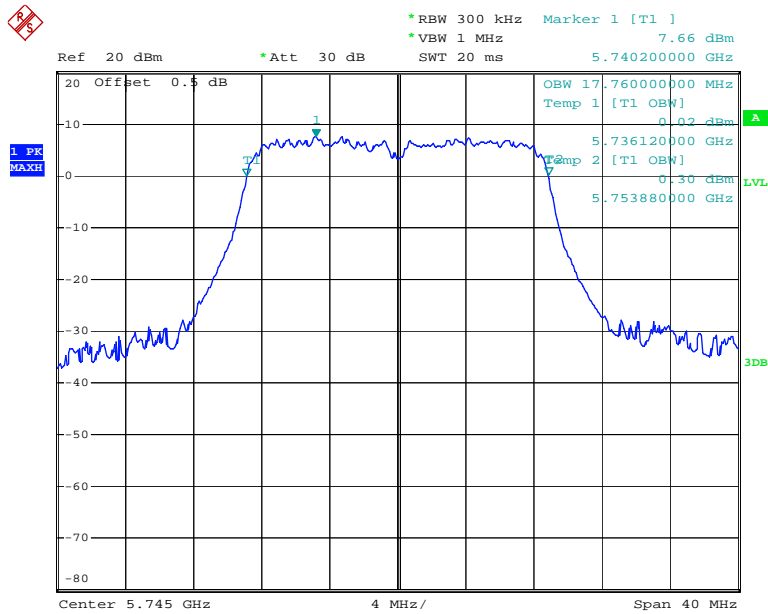


Date: 7.DEC.2017 13:13:26

### 802.11ht20 Middle Channel

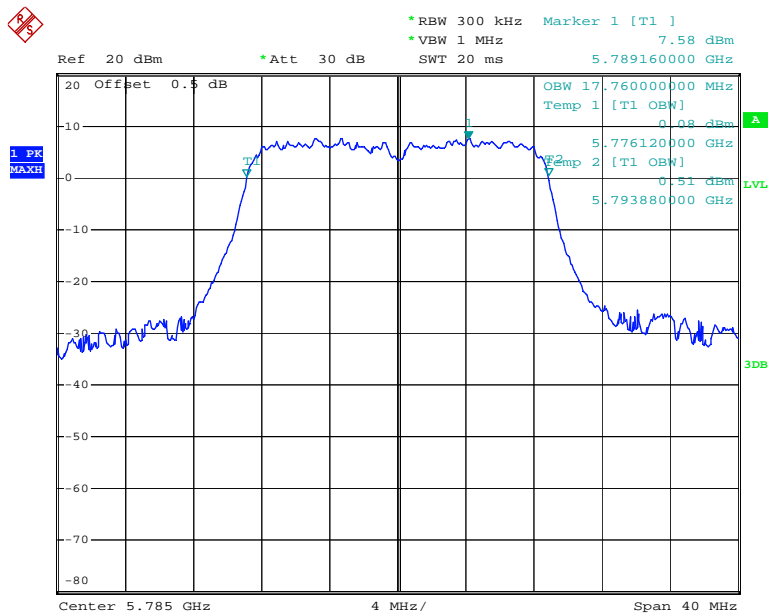


Date: 7.DEC.2017 13:16:35

### 802.11ht20 High Channel

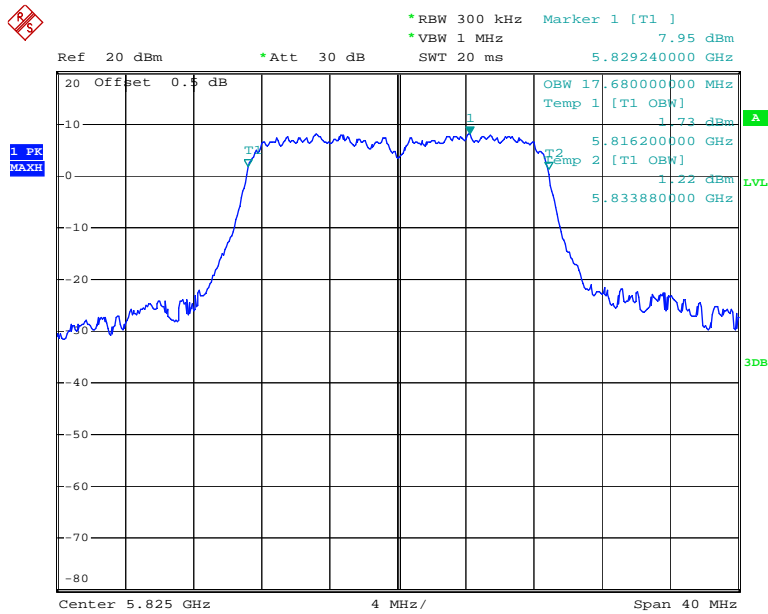


Date: 7.DEC.2017 13:18:36

### 802.11ht40 Low Channel

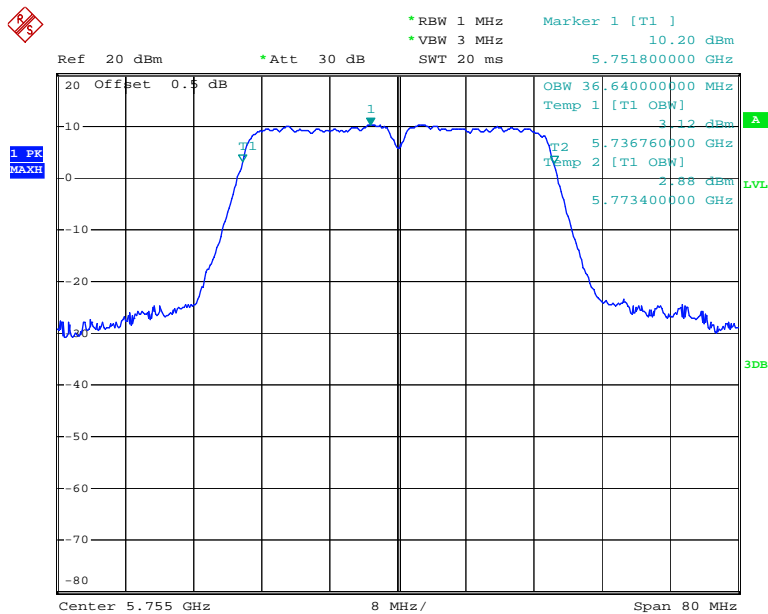


Date: 7.DEC.2017 13:59:47

### 802.11ht40 High Channel

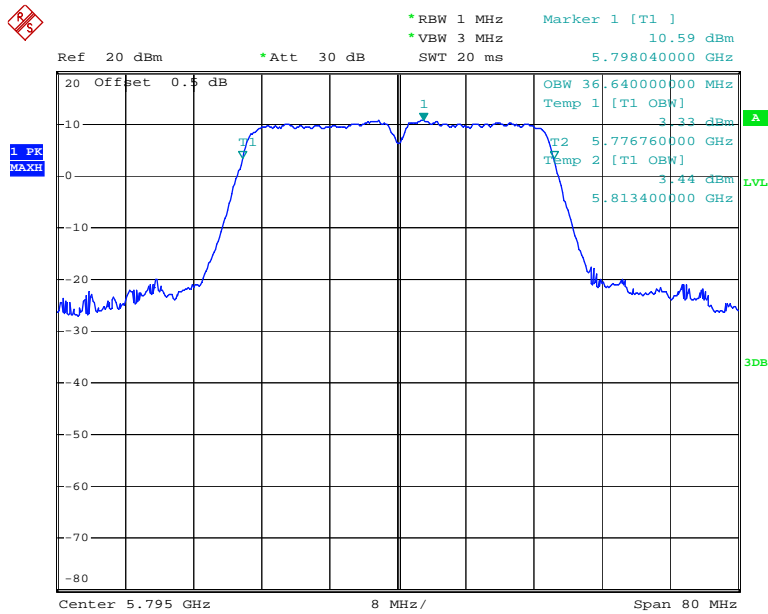

Date: 7.DEC.2017 13:56:21

### 802.11ac80 Middle Channel

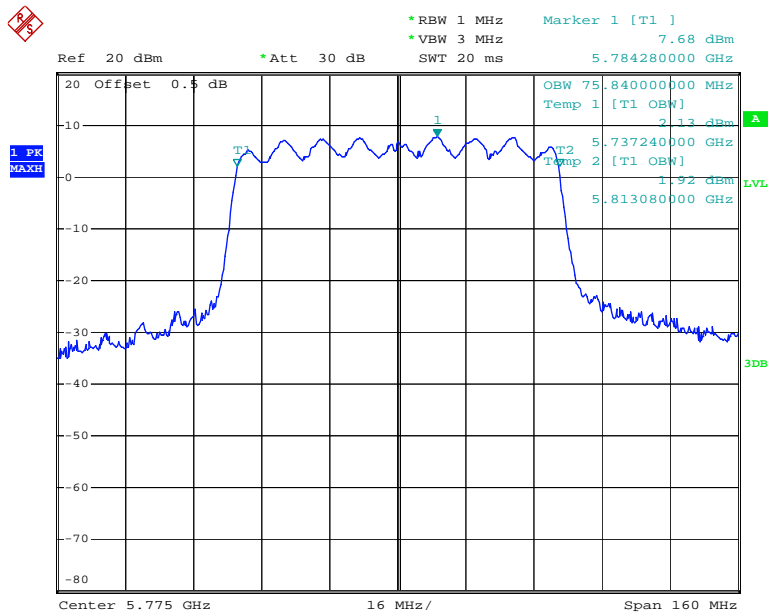

Date: 7.DEC.2017 15:07:49



---

**FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER**

---

**Applicable Standard**

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2016-12-11	2017-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25.1°C
<b>Relative Humidity:</b>	41 %
<b>ATM Pressure:</b>	101.2 kPa

*The testing was performed by Harry Yang on 2017-12-07.*

Test Mode: Transmitting

UNII Band	Mode	Frequency (MHz)	Conducted Average Output Power (dBm)			Limit (dBm)	Result
			Chain 0	Chain 1	Total		
5150-5250 MHz	802.11 a	5180	16.9	16.04	/	30	PASS
		5200	16.94	17.11	/	30	PASS
		5240	16.96	16.61	/	30	PASS
	802.11ht20	5180	15.06	14.59	17.84	30	PASS
		5200	16.29	15.69	19.01	30	PASS
		5240	16.15	16.51	19.34	30	PASS
	802.11ht40	5190	14.87	13.5	17.25	30	PASS
		5230	16.46	14.21	18.49	30	PASS
	802.11 ac80	5210	12.8	11.09	15.04	30	PASS
	5725-5850 MHz	802.11 a	5745	16.69	17.19	/	30
5785			16.89	17.45	/	30	PASS
5825			16.72	17.18	/	30	PASS
802.11ht20		5745	15.9	15.92	18.92	30	PASS
		5785	15.97	16.11	19.05	30	PASS
		5825	16.47	15.8	19.16	30	PASS
802.11ht40		5755	15.92	16.37	19.16	30	PASS
		5795	16.22	16.3	19.27	30	PASS
802.11 ac80		5775	15.26	15.5	18.39	30	PASS

Note: The maximum antenna gain is 5dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

So:

Directional gain =  $G_{ANT} + \text{Array Gain} = 5\text{dBi} < 6\text{dBi}$

## **FCC §15.407(a) - POWER SPECTRAL DENSITY**

---

### **Applicable Standard**

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-12-08	2017-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25.1°C
<b>Relative Humidity:</b>	41 %
<b>ATM Pressure:</b>	101.2 kPa

*The testing was performed by Harry Yang on 2017-12-07.*

*Test Mode: Transmitting*

*Test Result: Compliance. Please refer to the following table and plot.*

**5150-5250MHz**

Mode	Frequency (MHz)	Power Spectral Density (dBm/MHz)			
		Chain 0	Chain 1	Total	Limits
802.11 a	5180	6.31	5.58	/	17
	5200	6.5	6.67	/	17
	5240	6.32	6.09	/	17
802.11 ht20	5180	4.5	4.14	7.33	17
	5200	5.84	5.31	8.59	17
	5240	5.49	5.91	8.72	17
802.11 ht40	5190	1.17	-0.09	3.6	17
	5230	2.9	0.83	5	17
802.11 ac80	5210	-1.91	-3.49	0.38	17

**5725-5850MHz**

Mode	Frequency (MHz)	Reading (dBm/300kHz)		Power Spectral Density (dBm/500kHz)			
		Chain 0	Chain 1	Chain 0	Chain 1	Total	Limit
802.11 a	5745	2.11	2.53	4.33	4.75	/	30
	5785	2.38	2.83	4.6	5.05	/	30
	5825	1.82	2.42	4.04	4.64	/	30
802.11 ht20	5745	1.17	1.13	3.39	3.35	6.38	30
	5785	1.22	1.25	3.44	3.47	6.47	30
	5825	1.58	0.89	3.8	3.11	6.48	30
802.11 ht40	5755	-1.98	-1.38	0.24	0.84	3.56	30
	5795	-1.63	-1.18	0.59	1.04	3.83	30
802.11 ac80	5775	-4.63	-3.95	-2.41	-1.73	0.95	30

Note 1: The maximum antenna gain is 5dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$


So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 5.0\text{dBi} + 10 * \log(2/2) = 5\text{dBi}$$

Note 2: For 5.8GHz band, If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.


5150-5250MHz  
Chain 0:

802.11a Low Channel

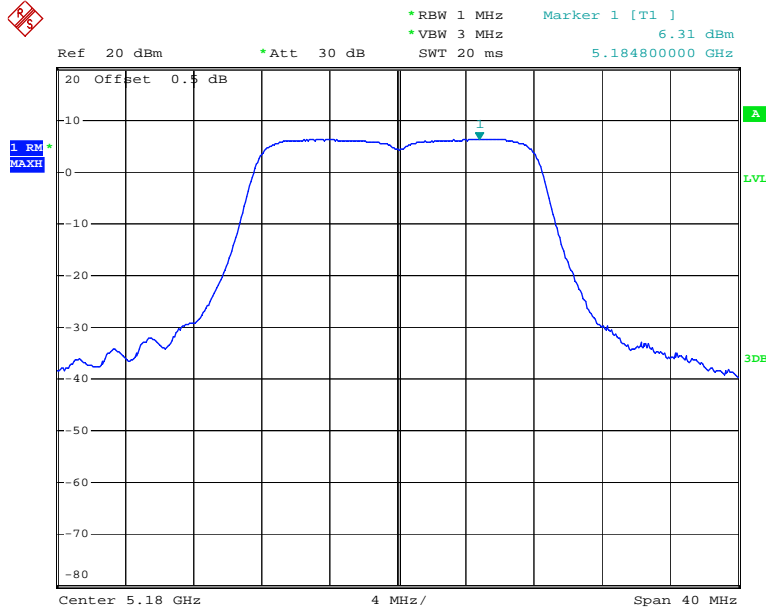


Date: 7.DEC.2017 12:02:16

802.11a Middle Channel

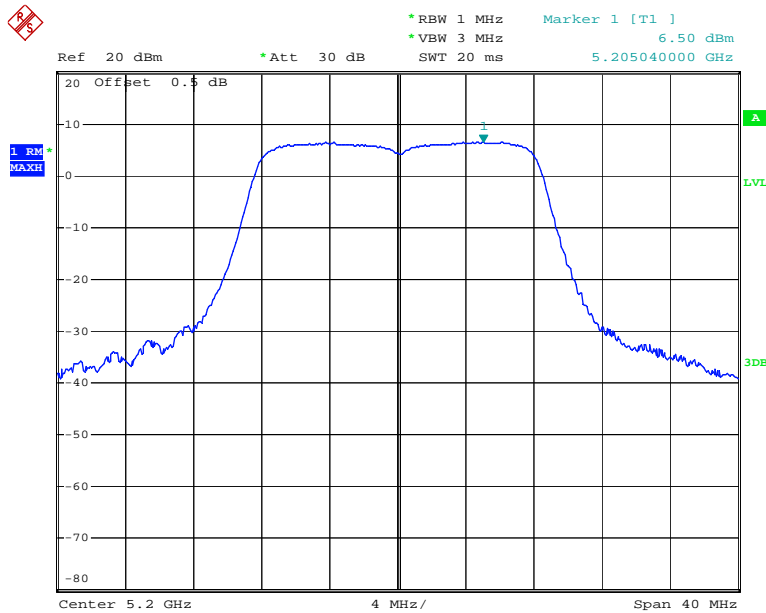


Date: 7.DEC.2017 12:00:28

### 802.11a High Channel

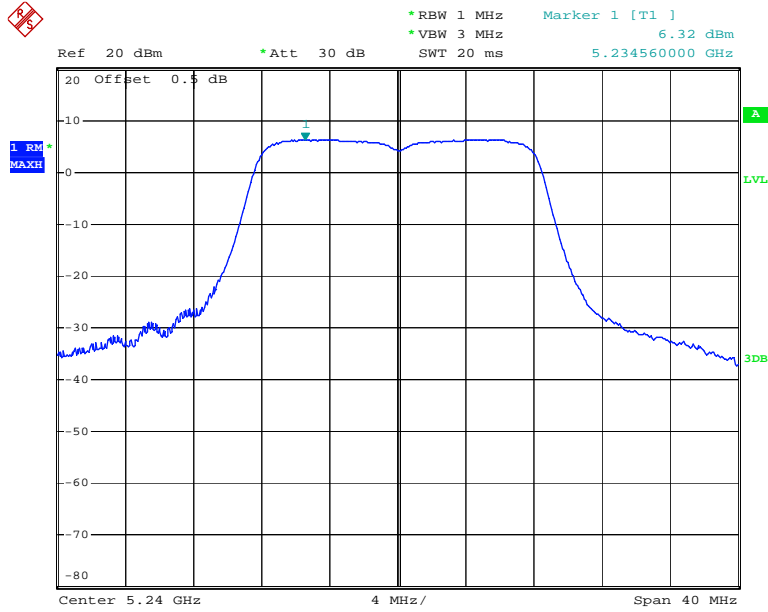

Date: 7.DEC.2017 11:58:14


### 802.11n ht20 Low Channel

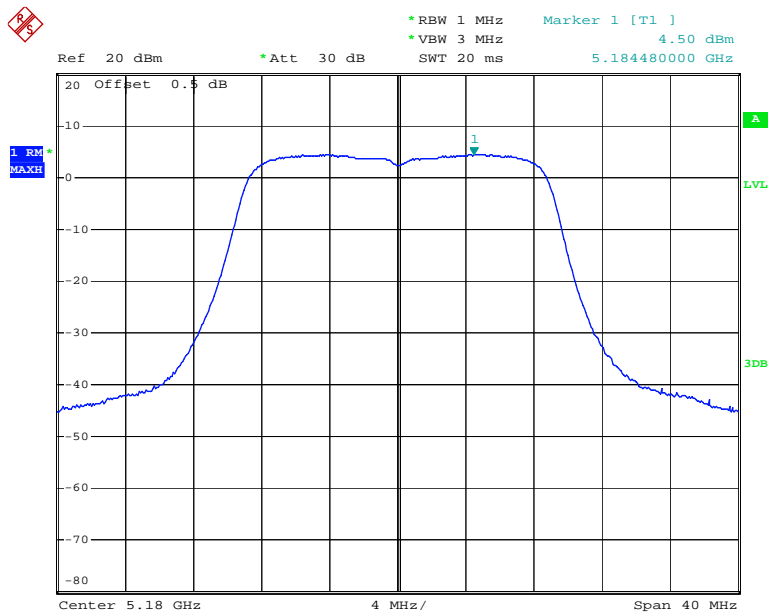

Date: 7.DEC.2017 13:04:33




### 802.11n ht20 Middle Channel

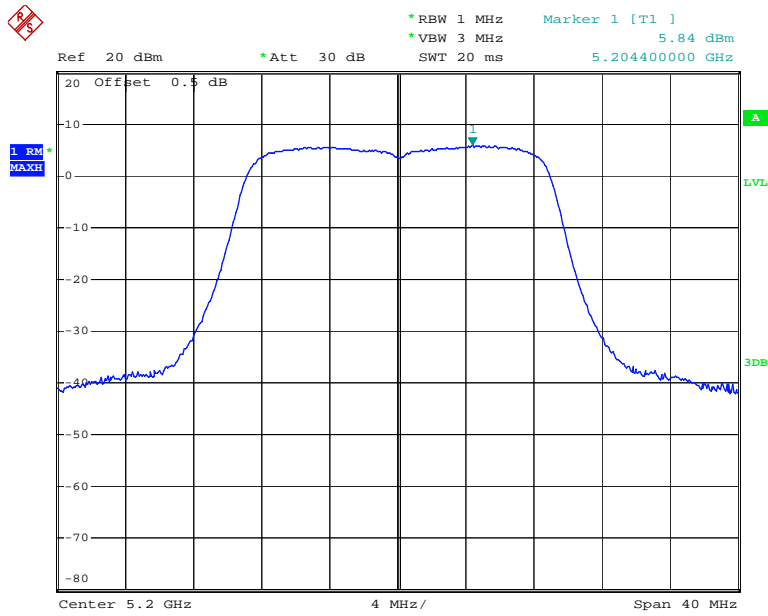


Date: 7.DEC.2017 13:08:31

### 802.11n ht20 High Channel

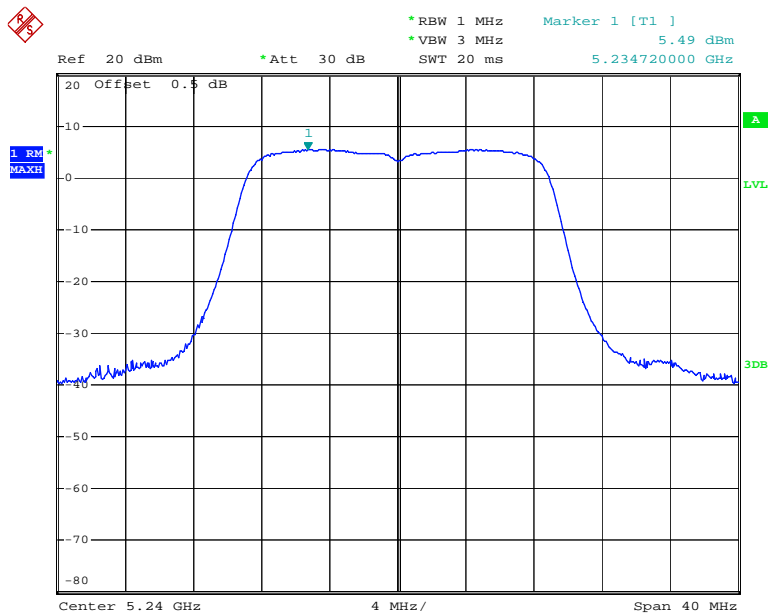


Date: 7.DEC.2017 13:10:51

### 802.11n ht40 Low Channel

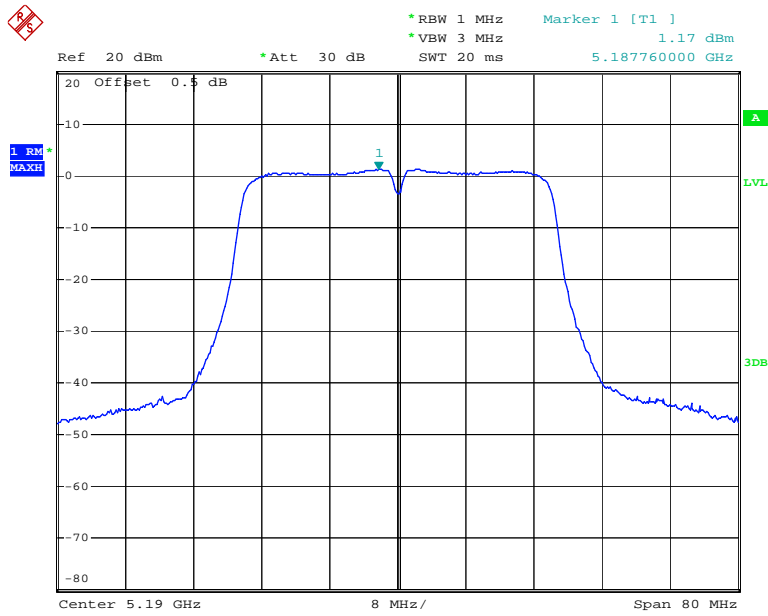


Date: 7.DEC.2017 14:23:24

### 802.11n ht40 High Channel

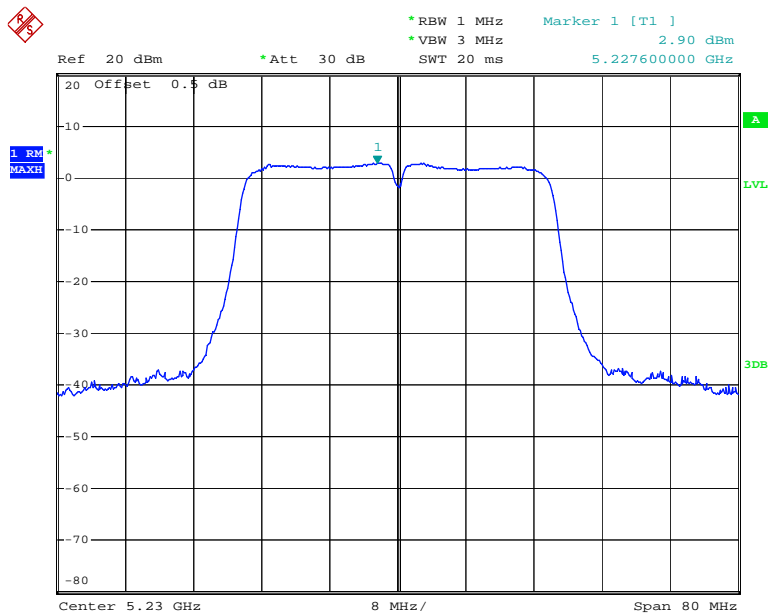

Date: 7.DEC.2017 14:06:15


### 802.11ac80 Middle Channel

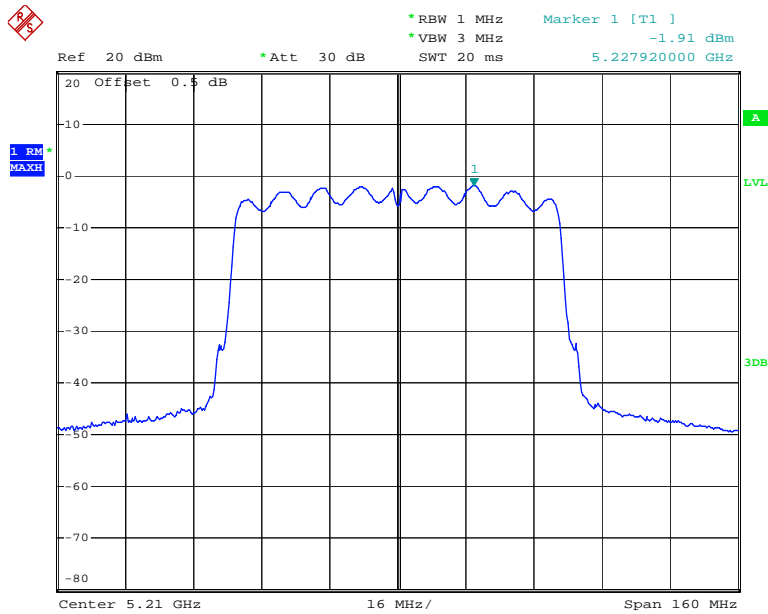

Date: 7.DEC.2017 15:03:46


### Chain 1:

### 802.11a Low Channel

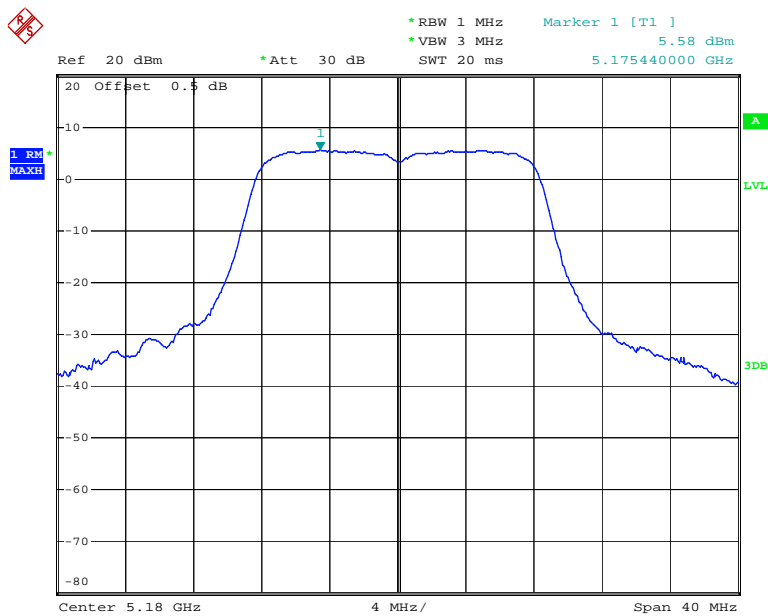


Date: 7.DEC.2017 11:14:12

### 802.11a Middle Channel

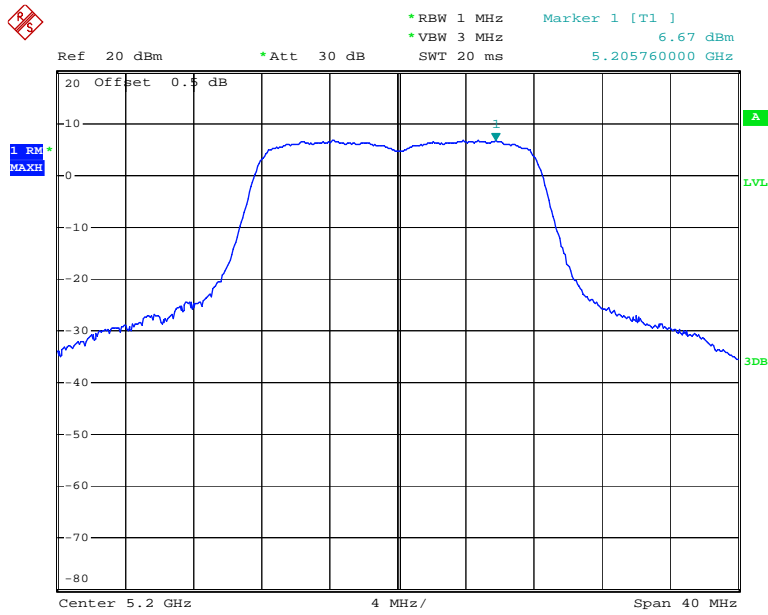


Date: 7.DEC.2017 11:17:09

### 802.11a High Channel

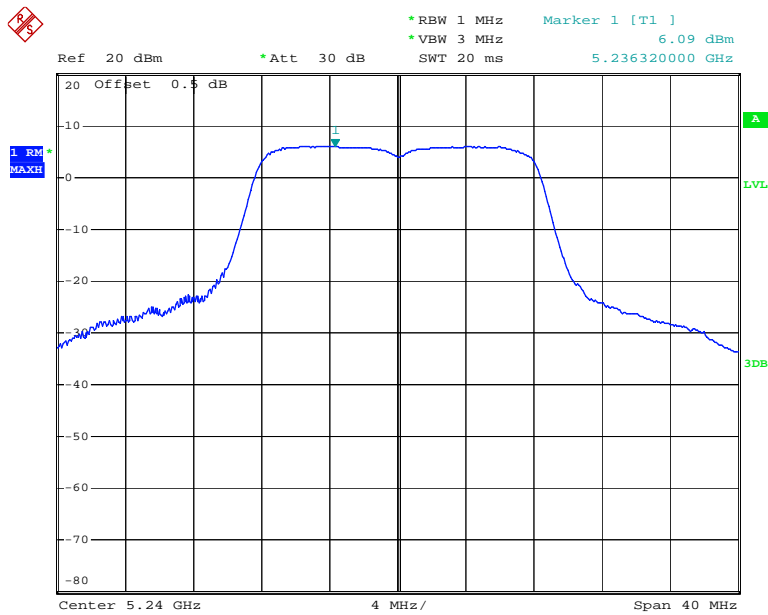


Date: 7.DEC.2017 11:22:14

### 802.11n ht20 Low Channel

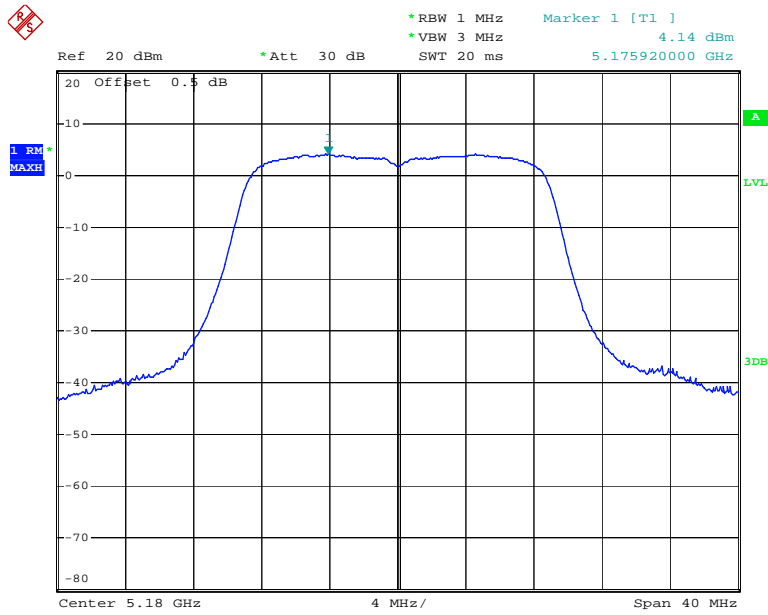


Date: 7.DEC.2017 13:35:02

### 802.11n ht20 Middle Channel

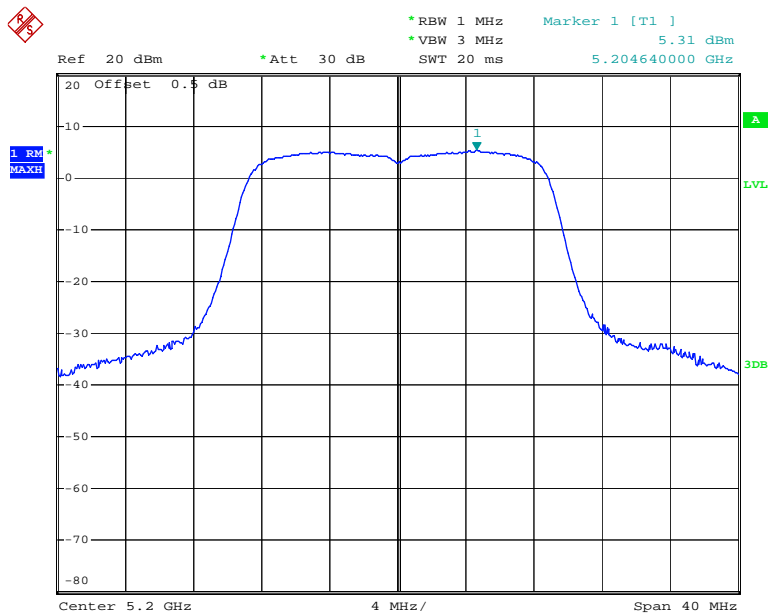


Date: 7.DEC.2017 13:32:24

### 802.11n ht20 High Channel

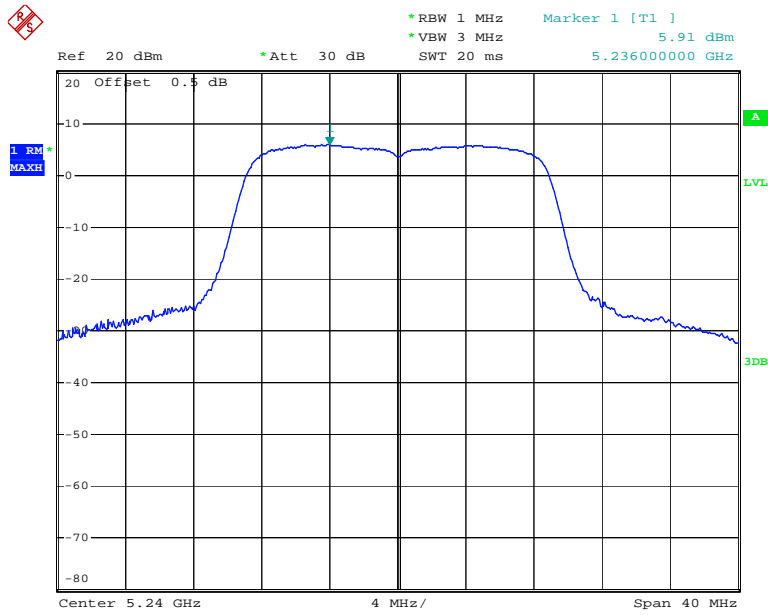


Date: 7.DEC.2017 13:29:56

### 802.11n ht40 Low Channel

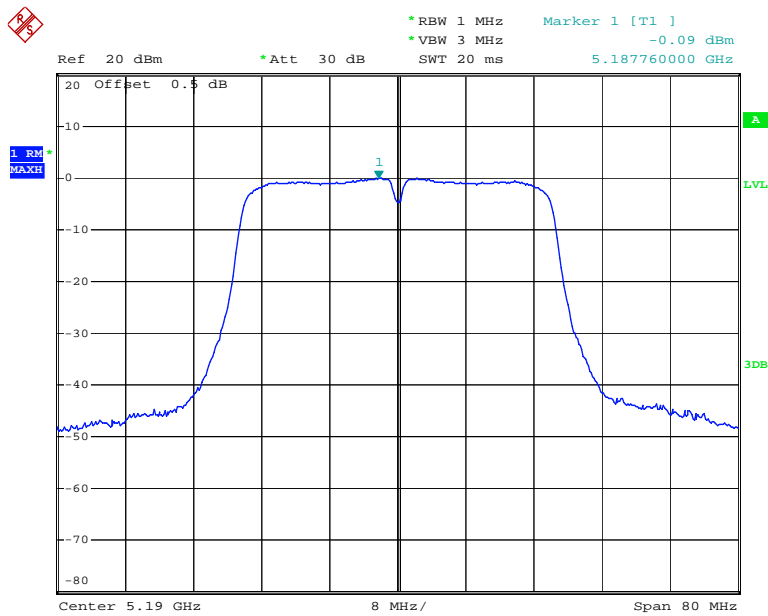


Date: 7.DEC.2017 13:40:20

### 802.11n ht40 High Channel

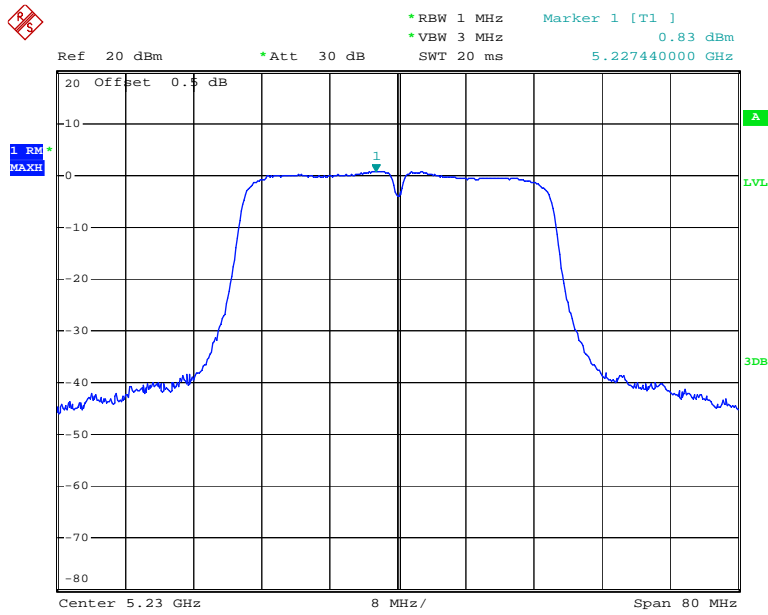

Date: 7.DEC.2017 13:43:11


### 802.11ac80 Middle Channel

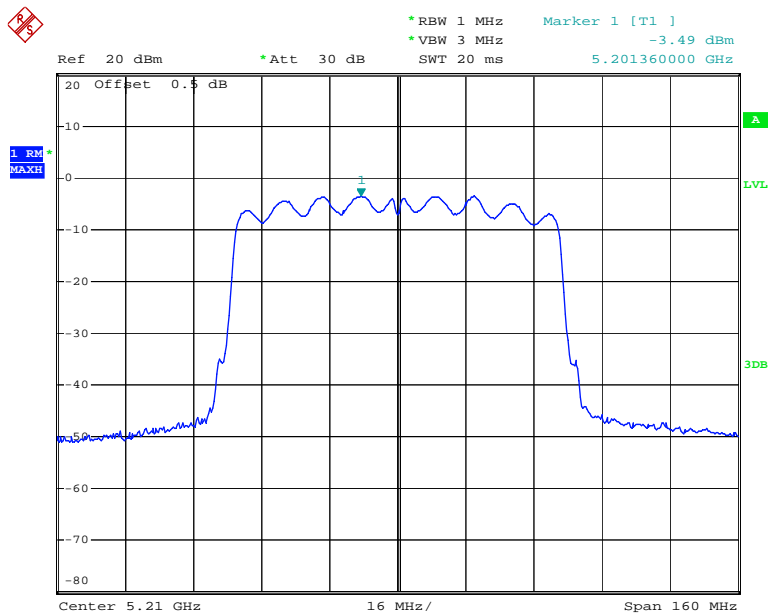

Date: 7.DEC.2017 15:27:44


5725-5850MHz  
Chain 0:

### 802.11a Low Channel

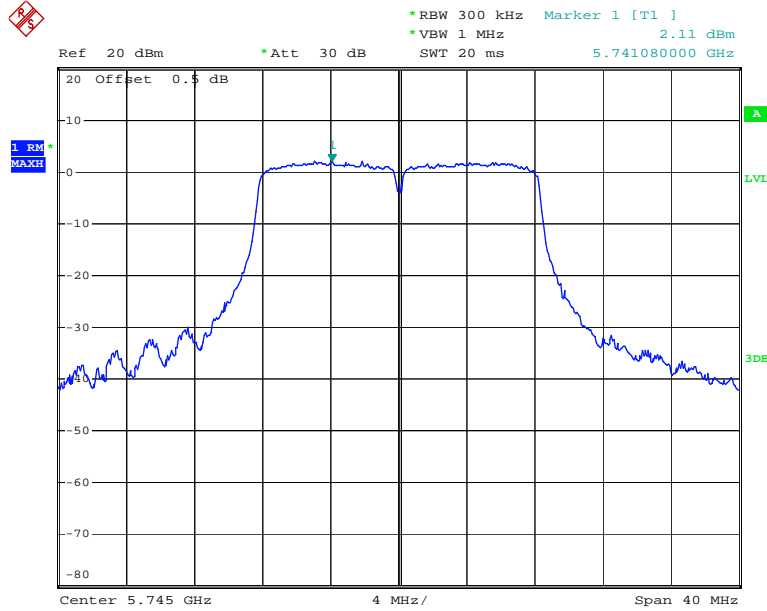

Date: 7.DEC.2017 11:47:13


### 802.11a Middle Channel

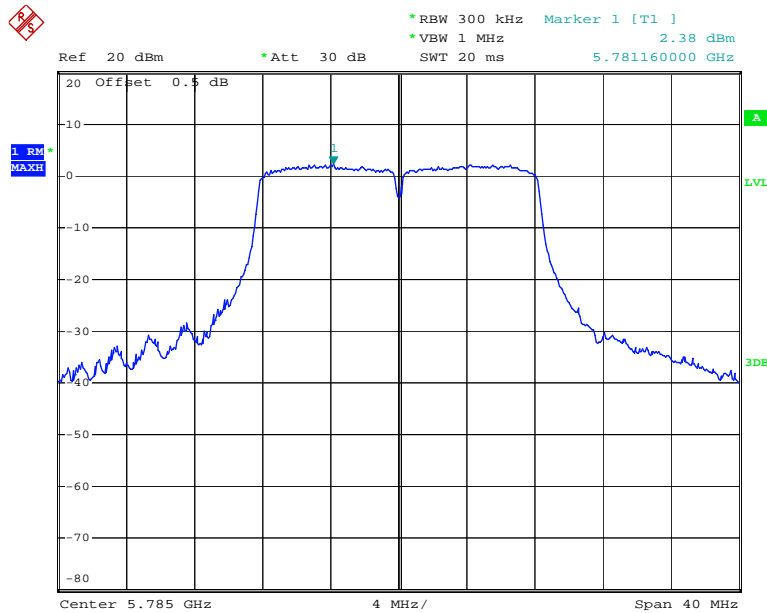

Date: 7.DEC.2017 11:50:12




### 802.11a High Channel

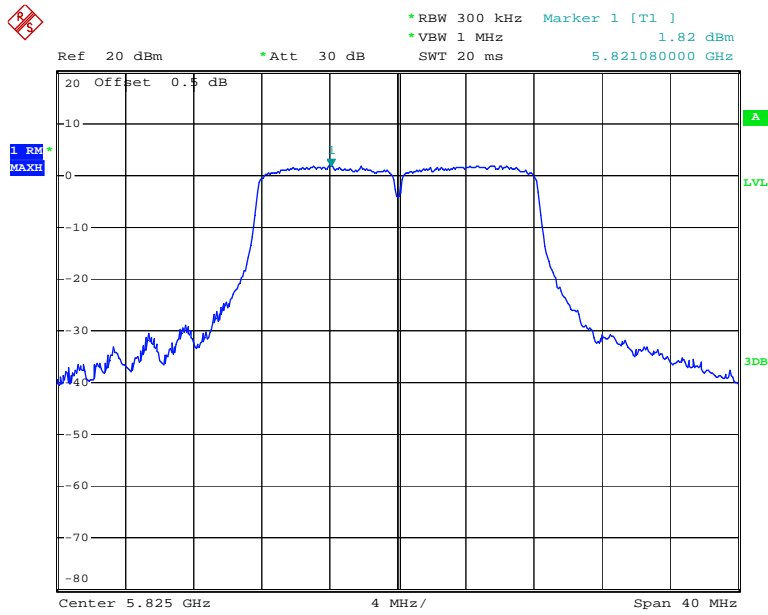


Date: 7.DEC.2017 11:53:44

### 802.11n ht20 Low Channel

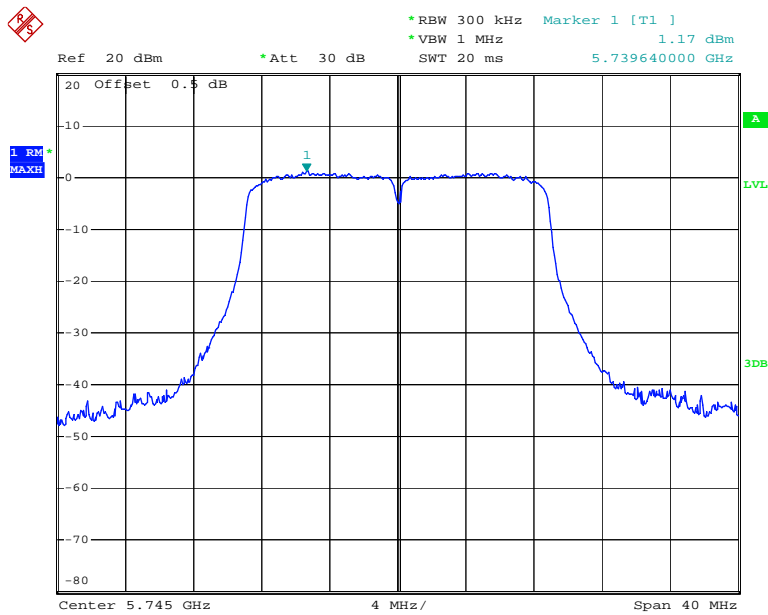


Date: 7.DEC.2017 13:13:49

### 802.11n ht20 Middle Channel

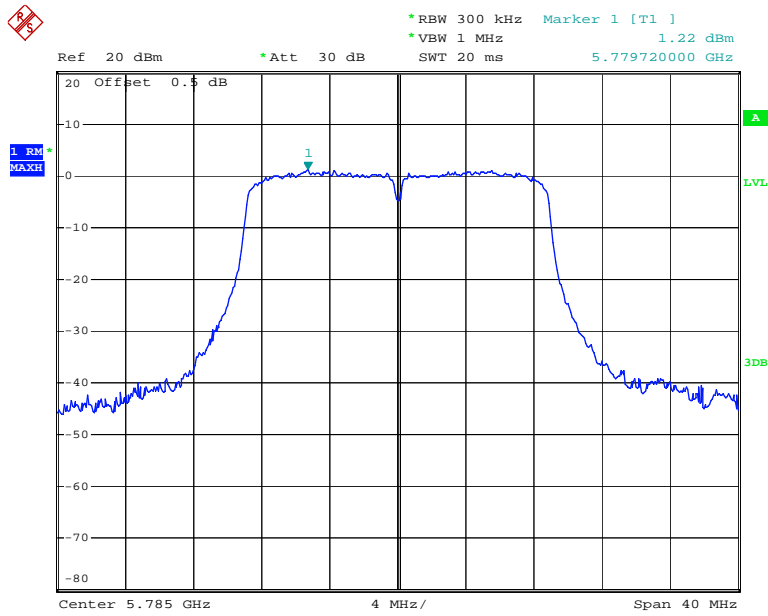


Date: 7.DEC.2017 13:16:56

### 802.11n ht20 High Channel

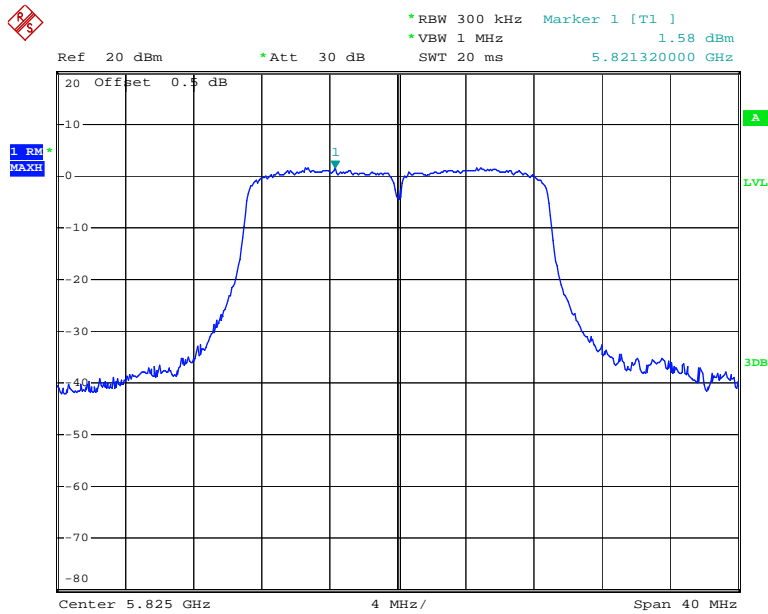


Date: 7.DEC.2017 13:18:57

### 802.11n ht40 Low Channel

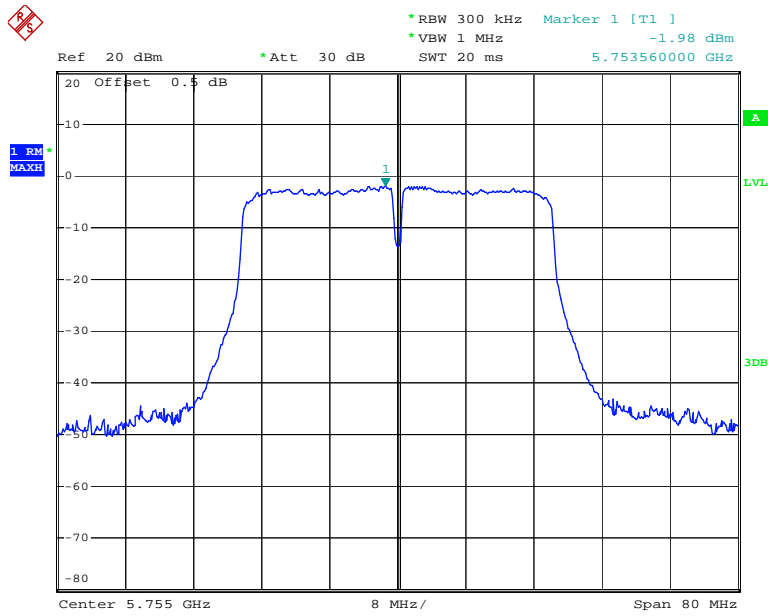


Date: 7.DEC.2017 14:00:09

### 802.11n ht40 High Channel

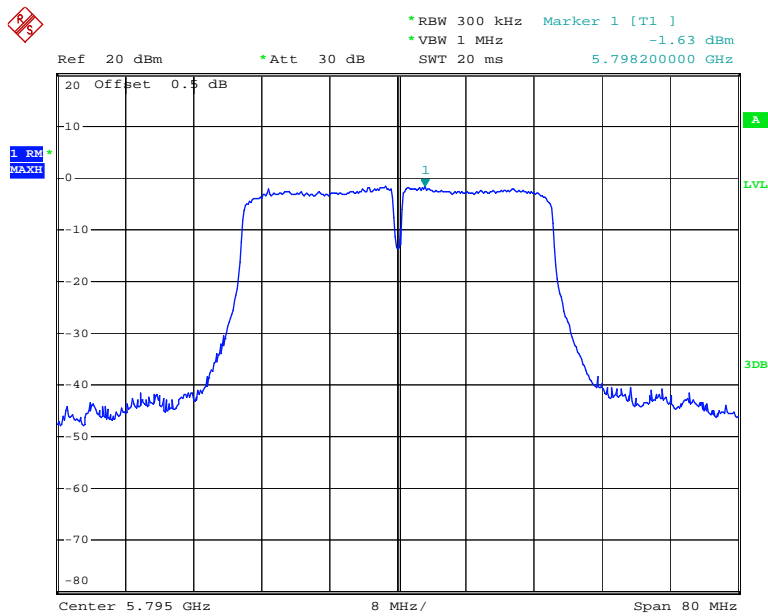

Date: 7.DEC.2017 13:56:51


### 802.11ac80 Middle Channel

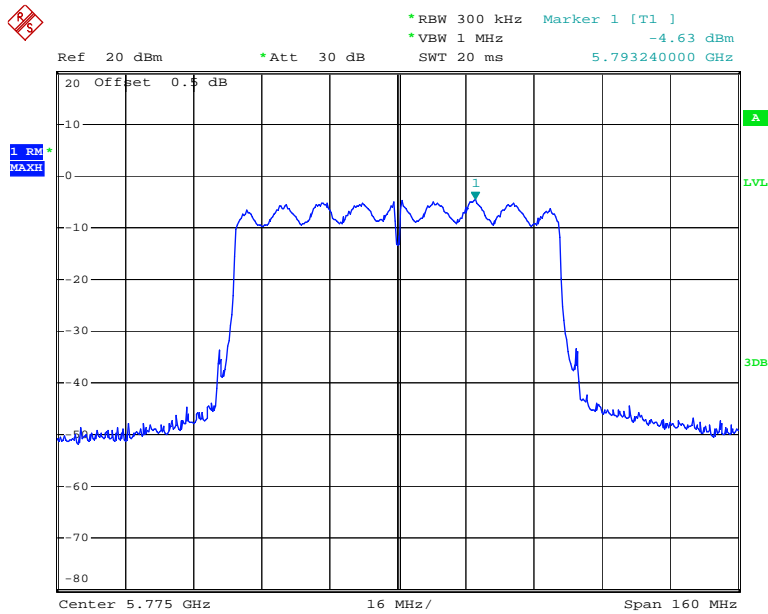

Date: 7.DEC.2017 16:15:01


### Chain 1:

### 802.11a Low Channel

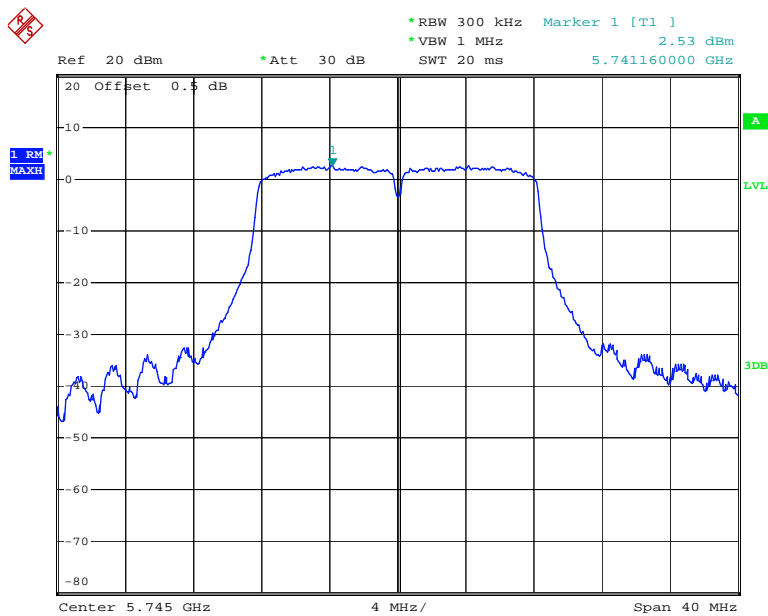


Date: 7.DEC.2017 11:25:39

### 802.11a Middle Channel

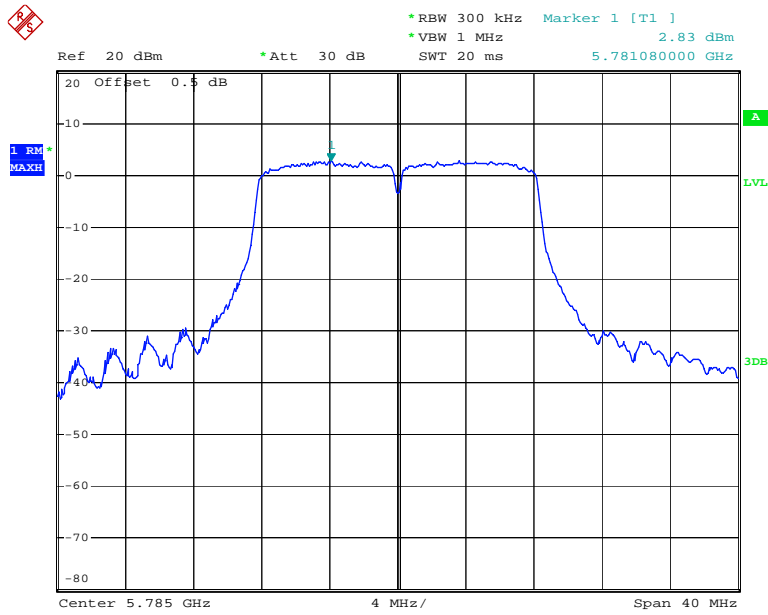


Date: 7.DEC.2017 11:30:35

### 802.11a High Channel

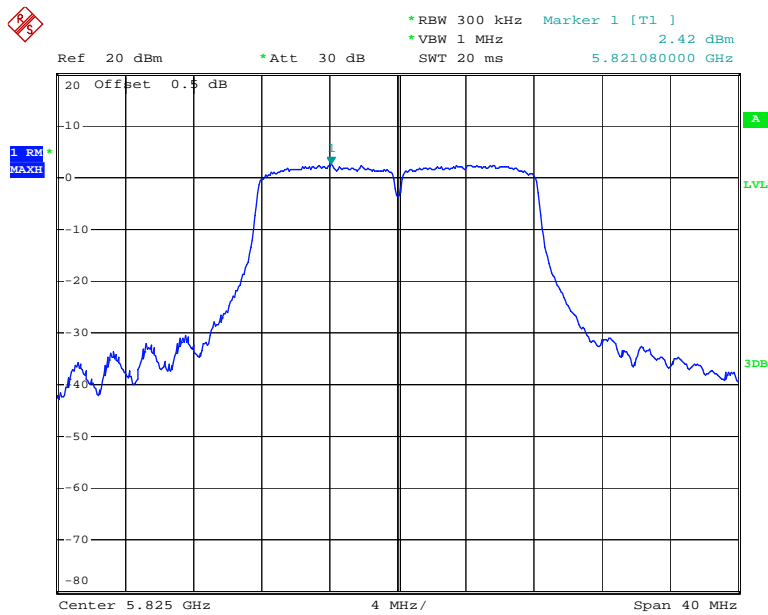


Date: 7.DEC.2017 11:35:00

### 802.11n ht20 Low Channel

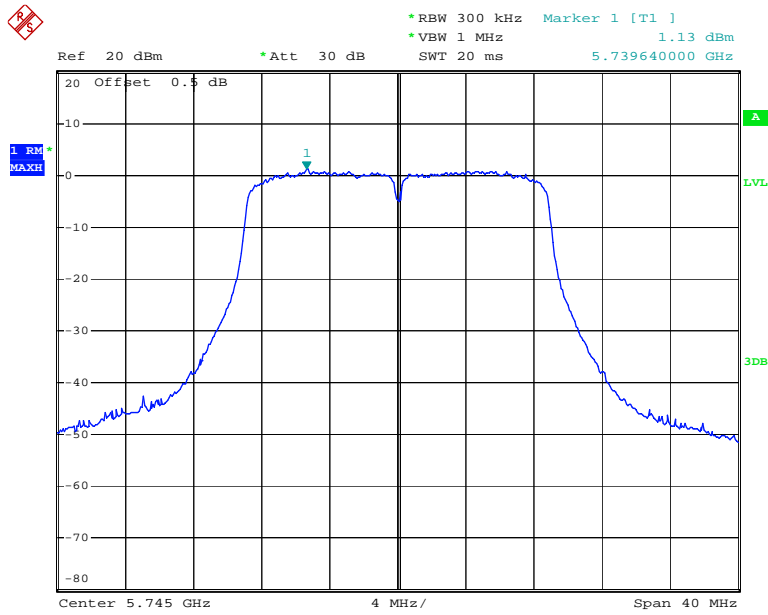


Date: 7.DEC.2017 13:27:05

### 802.11n ht20 Middle Channel

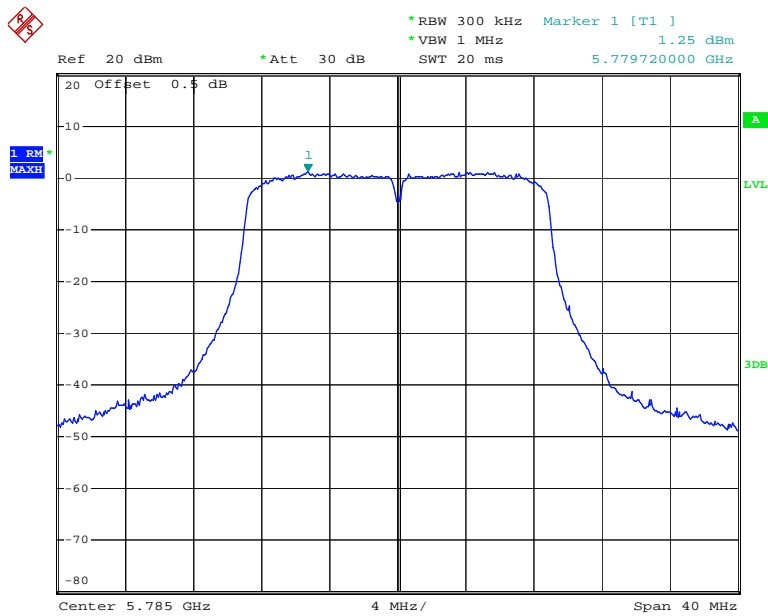


Date: 7.DEC.2017 13:25:08

### 802.11 n ht20 High Channel

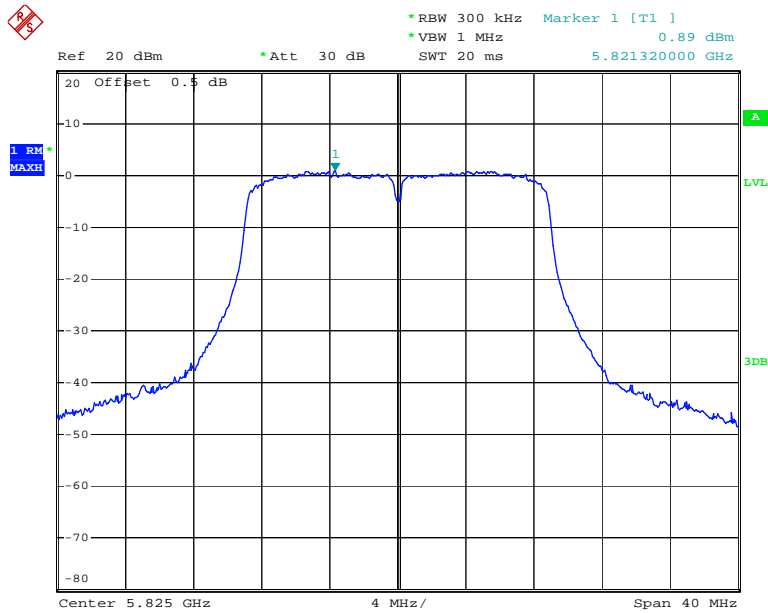


Date: 7.DEC.2017 13:22:22

### 802.11n ht40 Low Channel

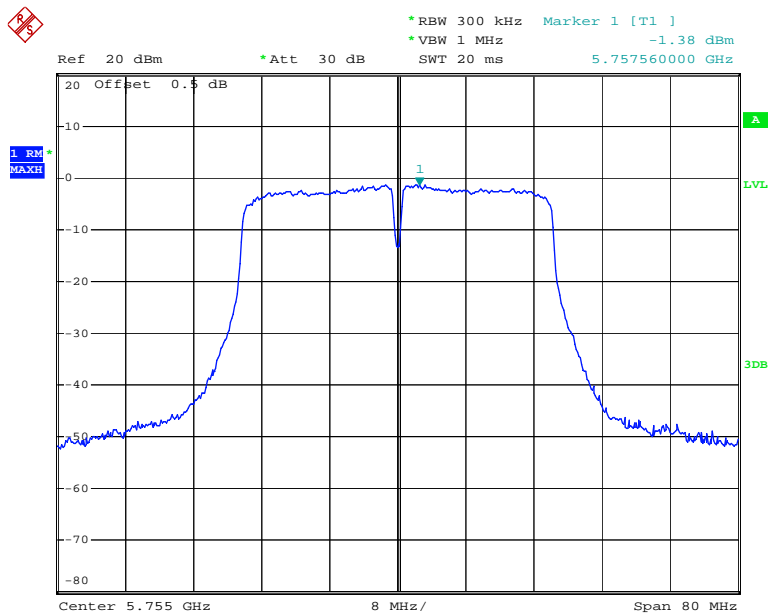


Date: 7.DEC.2017 13:46:34

### 802.11n ht40 High Channel

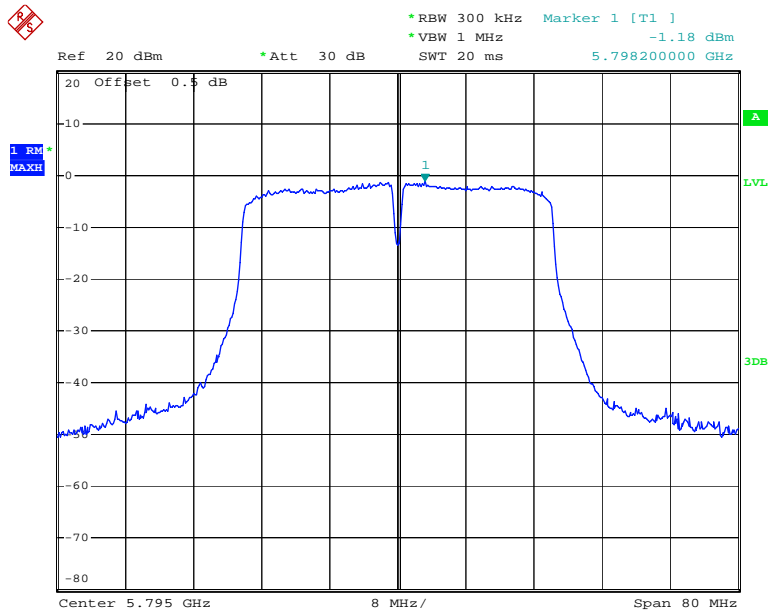

Date: 7.DEC.2017 13:50:50

### 802.11ac80 Middle Channel

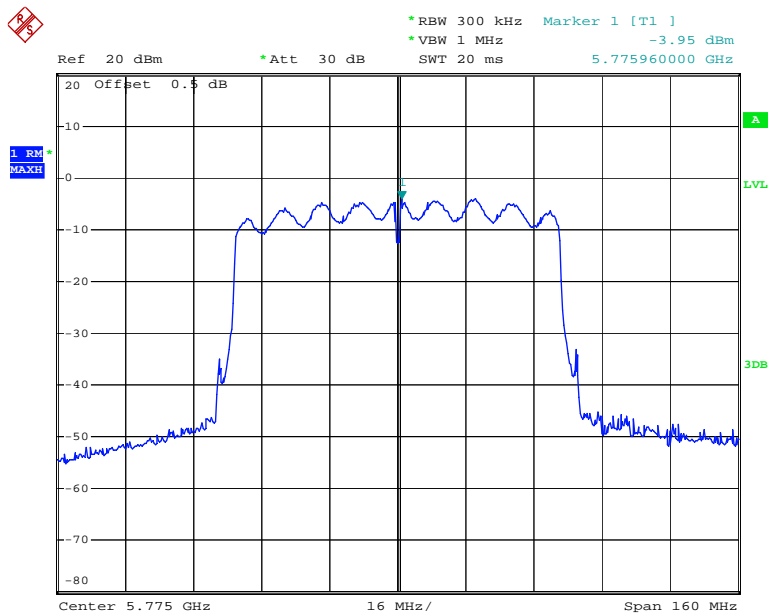

Date: 7.DEC.2017 15:22:43

\*\*\*\*\* END OF REPORT \*\*\*\*\*