



TESTING LABORATORY  
CERTIFICATE #4820.01



## FCC PART 15.247

## TEST REPORT

For

### ZIONCOM ELECTRONICS (SHENZHEN) LTD.

Building A1-A2, Lantian Science and Technology Park, Xinyu Road, Xinqiao Henggang Block,  
Shajing Street, Baoan District, Shenzhen, China

**FCC ID: X7DIP04349**

<b>Report Type:</b> Original Report	<b>Product Name:</b> AC2600 Ultimate Wireless Dual Band Gigabit Router
<b>Report Number:</b>	RDG180129006-00A
<b>Report Date:</b>	2018-08-24
<b>Reviewed By:</b>	Jerry Zhang EMC Manager <i>Jerry Zhang</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*\*”.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
EQUIPMENT MODIFICATIONS .....	9
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....	9
SUPPORT CABLE LIST AND DETAILS .....	9
BLOCK DIAGRAM OF TEST SETUP .....	10
<b>SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
ANTENNA CONNECTOR CONSTRUCTION .....	14
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
EUT SETUP .....	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE .....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA .....	17
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>21</b>
APPLICABLE STANDARD .....	21
EUT SETUP.....	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	22
TEST PROCEDURE .....	22
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	22
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST DATA .....	23
<b>FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH.....</b>	<b>40</b>
APPLICABLE STANDARD .....	40
TEST PROCEDURE .....	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA .....	40
<b>FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER.....</b>	<b>48</b>
APPLICABLE STANDARD .....	48
TEST PROCEDURE .....	48
TEST EQUIPMENT LIST AND DETAILS.....	48

TEST DATA .....49

**FCC §15.247(d)- 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....50**

    APPLICABLE STANDARD .....50

    TEST PROCEDURE .....50

    TEST EQUIPMENT LIST AND DETAILS.....50

    TEST DATA .....51

**FCC §15.247(e) - POWER SPECTRAL DENSITY .....68**

    APPLICABLE STANDARD .....68

    TEST PROCEDURE .....68

    TEST EQUIPMENT LIST AND DETAILS.....68

    TEST DATA .....68

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>		AC2600 Ultimate Wireless Dual Band Gigabit Router
<b>EUT Model:</b>		A7000R
<b>Multiple Models:</b>		A7000RU, IP04349
<b>FCC ID:</b>		X7DIP04349
<b>Rated Input Voltage:</b>		DC 12V from adapter
<b>Adapter Information (for A7000R)</b>	<b>Model:</b>	DCP007B121500U
	<b>Input:</b>	100-240Vac ~ 50/60Hz ,0.6A
	<b>Output:</b>	DC12V, 1.5A
<b>Adapter Information (for A7000RU)</b>	<b>Model:</b>	DCP007B122000U
	<b>Input:</b>	100-240Vac ~ 50/60Hz ,0.6A
	<b>Output:</b>	DC12V, 2A
<b>External Dimension:</b>		500mm (L)*390mm (W)*50mm (H)
<b>Serial Number:</b>		180129006-1(model:A7000R) 180129006-2(model:A7000RU)
<b>EUT Received Date:</b>		2018.01.29

*Note: The series product, models A7000RU, IP04349 are electrically identical with the model A7000R, we selected A7000R for fully testing. The difference between them was explained in the attached declaration letter.*

### Objective

This report is prepared on behalf of *ZIONCOM ELECTRONICS (SHENZHEN) LTD.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: X7DIP04349.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

The device has 4 external antennas for 2.4GHz and 4 external antennas for 5GHz. For 2.4GHz band, 11 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n ht20 modes were test with channel 1,6,11.

For 802.11n ht40 mode was tested with channel 3, 6, 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations. The device supports SISO in all modes, and MIMO in 802.11n modes, per pretest, MIMO 4TX mode was the worst mode and reported for 802.11n modes.


### EUT Exercise Software

The software “QATool\_Dbg” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:

Mode	Channel	Frequency (MHz)	Data rate	Power level Setting			
				Chain 0	Chain 1	Chain 2	Chain 3
802.11b	Low	2412	1 Mbps	20	21	1E	23
	Middle	2437	1 Mbps	20	21	1E	23
	High	2462	1 Mbps	20	21	1E	23
802.11g	Low	2412	6 Mbps	1D	1D	1E	1C
	Middle	2437	6 Mbps	20	1F	1F	1F
	High	2462	6 Mbps	1D	1D	1E	1C
802.11n ht20	Low	2412	MCS24	15	15	15	15
	Middle	2437	MCS24	16	16	16	16
	High	2462	MCS24	15	15	15	15
802.11n ht40	Low	2422	MCS24	13	13	13	13
	Middle	2437	MCS24	18	18	18	18
	High	2452	MCS24	13	13	13	13


The maximum duty cycle as following table:

Test mode	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	Duty Cycle (%)
802.11b	8.45	8.77	96.35
802.11g	1.41	1.71	82.46
802.11n ht20	0.36	0.67	53.73
802.11n ht40	0.21	0.52	40.38

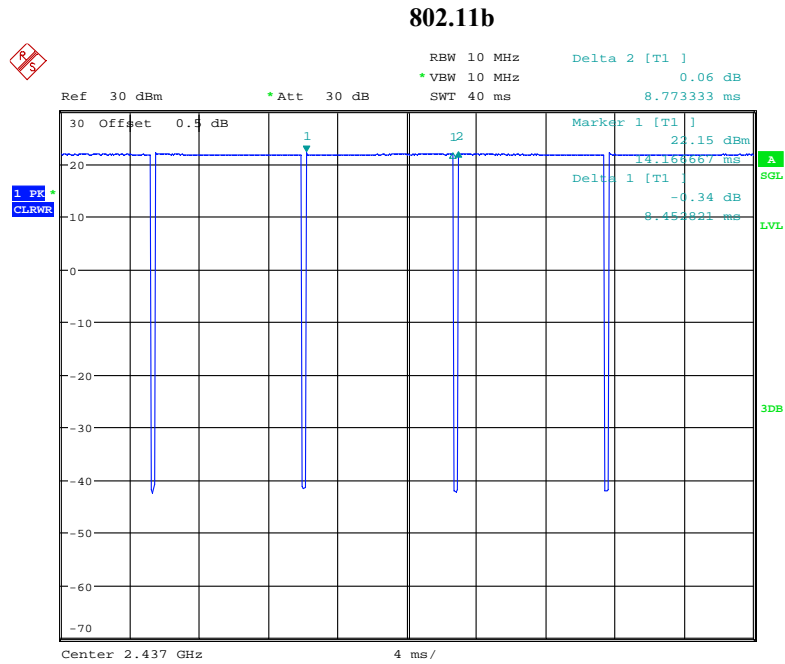


Date: 30.JAN.2018 14:01:41

### 802.11g

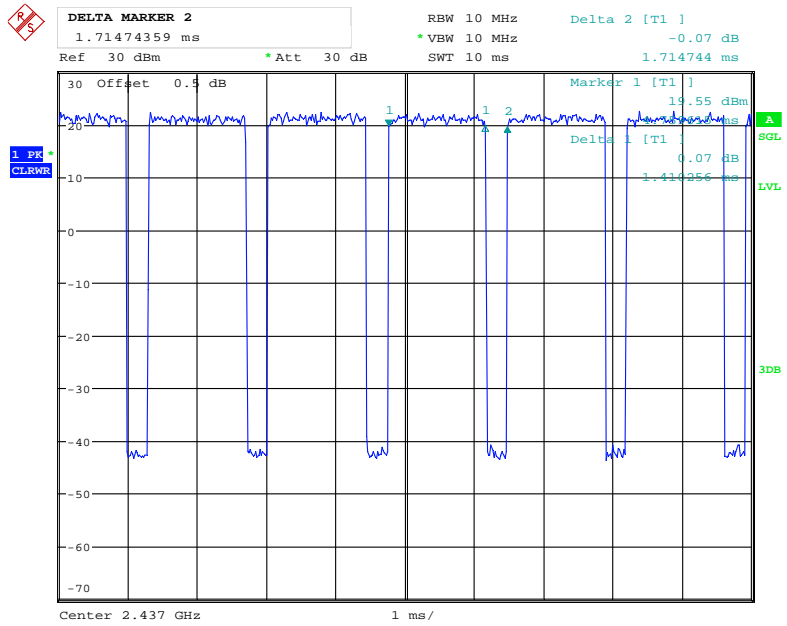

Date: 30.JAN.2018 14:02:46


### 802.11n ht20

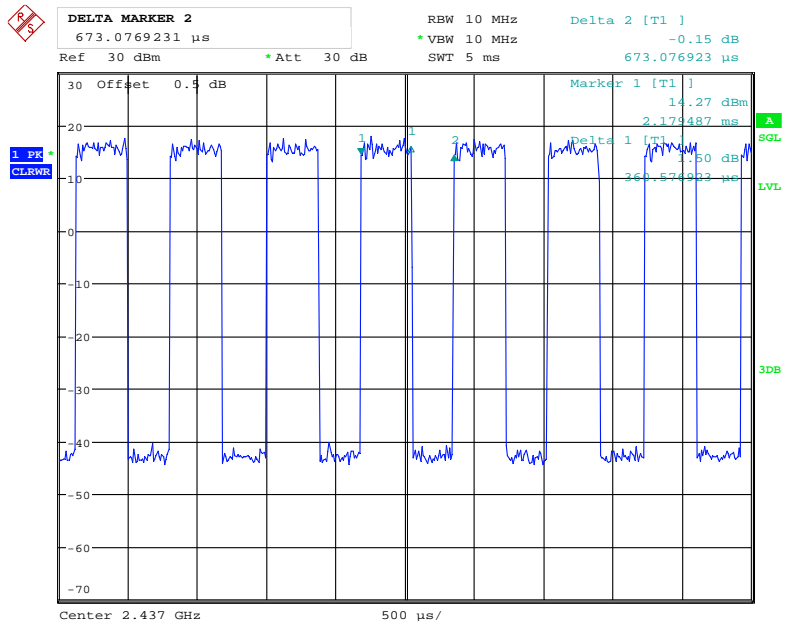

Date: 30.JAN.2018 14:07:36



802.11n ht40

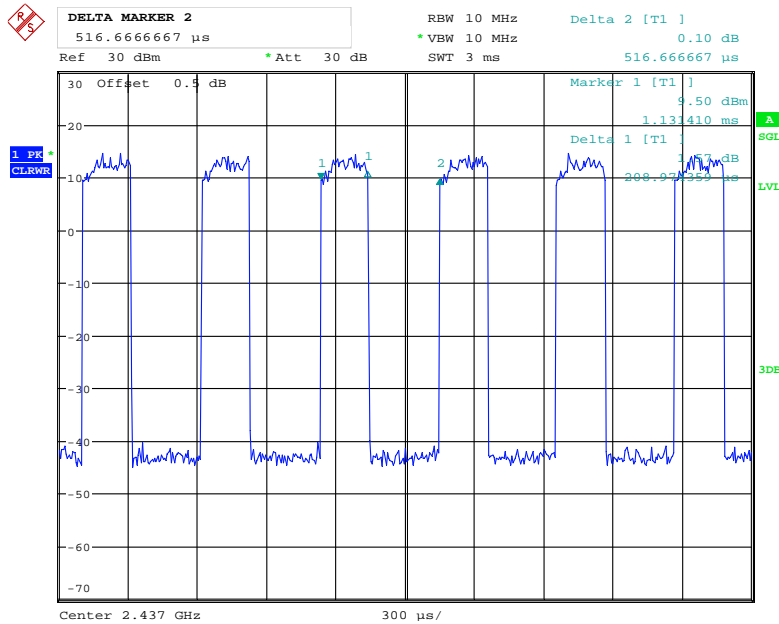

Date: 30.JAN.2018 14:09:09

**Equipment Modifications**

No modification was made to the EUT.

**Local Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
Kinston	USB Flash Disk	4G	/

**Support Cable List and Details**


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	yes	No	10	RJ45 Port of Laptop	EUT
RJ45 Cable*4	yes	No	10	EUT	Load
Adapter Cable	No	No	1.36	Adapter	EUT

### Block Diagram of Test Setup

Model: A7000R

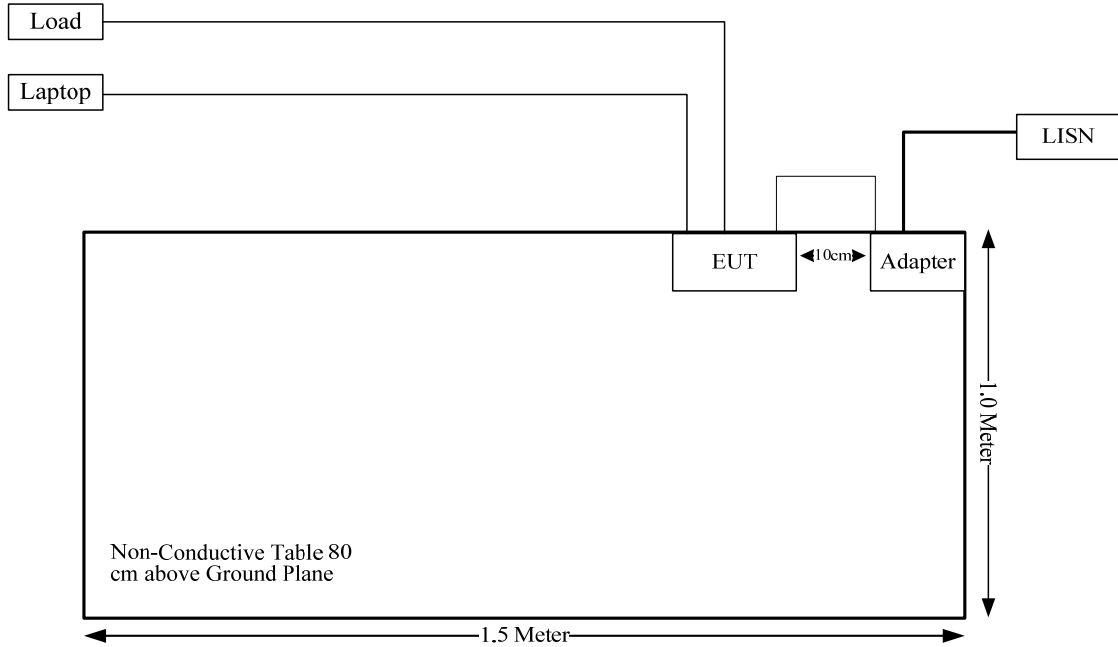

Model: A7000RU

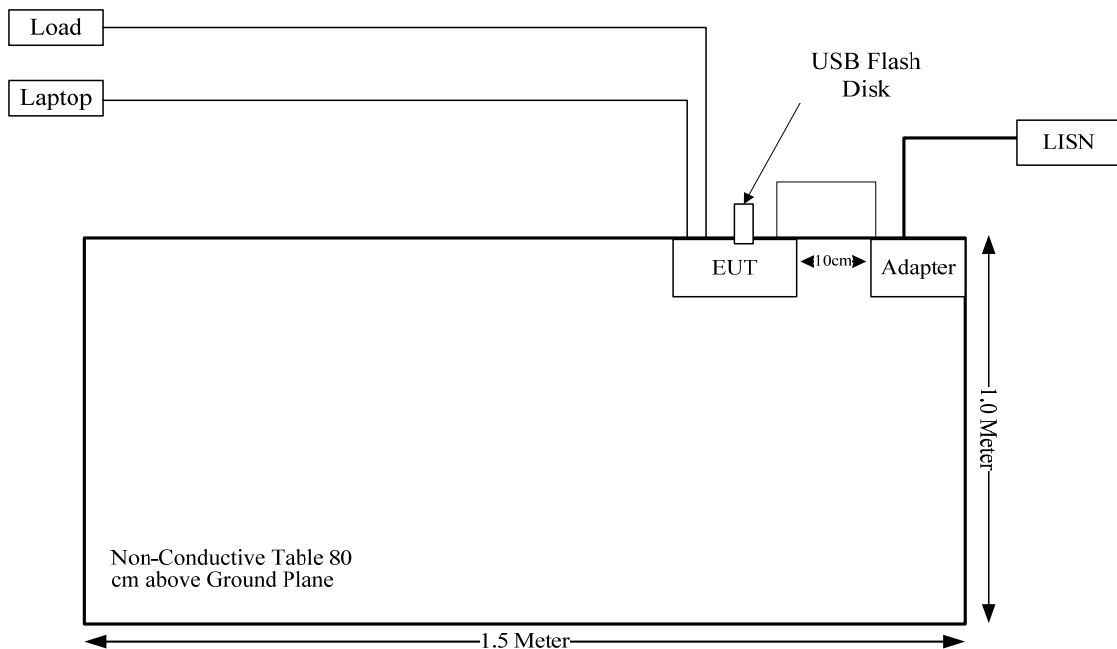

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

## FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

### Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

**Calculated Data:**

Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	5	3.16	27	501.19	20.00	0.32	1.0
5150-5250	5	3.16	18	63.10	20.00	0.04	1.0
5725-5850	5	3.16	20	100.00	20.00	0.06	1.0

The 2.4GHz band and 5GHz band can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$=S_{2.4}/S_{limit-2.4} + S_5/S_{limit-5}$$

$$=0.32/1+0.06/1$$

$$=0.38$$

$$< 1.0$$

**Result:** The device meet FCC MPE at 20 cm distance

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

### **Antenna Connector Construction**

The EUT have 4 external antennas for 2.4G Band, which was permanently attached to the Unit, all antenna gains are 5dBi. Please refer to the EUT photo.


**Result:** Compliance.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC§15.207(a)

**EUT Setup**

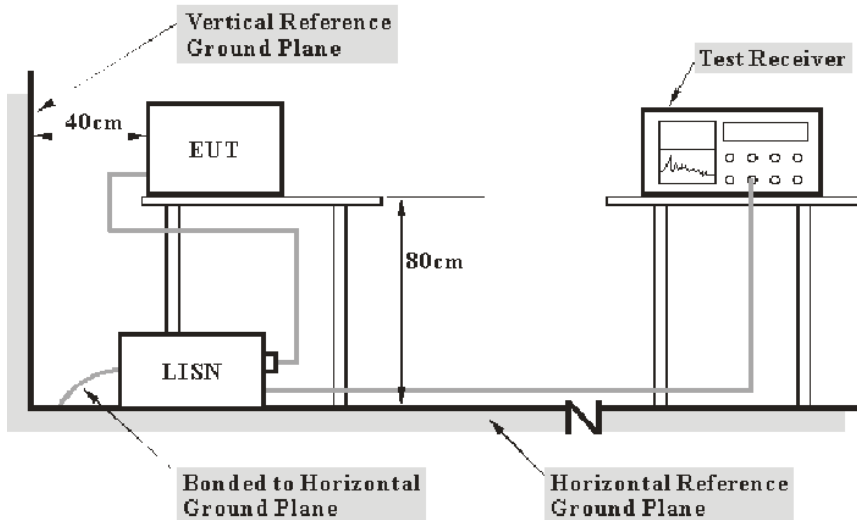

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
R&S	L.I.S.N	ESH2-Z5	892107/021	2017-09-25	2018-09-25
R&S	Two-line V-network	ENV 216	3560.6550.12	2017-12-08	2018-12-08
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2017-09-05	2018-09-05

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).



**Test Data**


**Environmental Conditions**

<b>Temperature:</b>	26.9~28.5°C
<b>Relative Humidity:</b>	57~60%
<b>ATM Pressure:</b>	99.6~100.1kPa

The testing was performed by Sider Huang & Alex You from 2018-07-19 to 2018-08-23.

Test Mode: Transmitting (Wi-Fi 802.11b mode low channel was the worst)


**Model: A7000R**  
**AC120 V, 60 Hz, Line:**

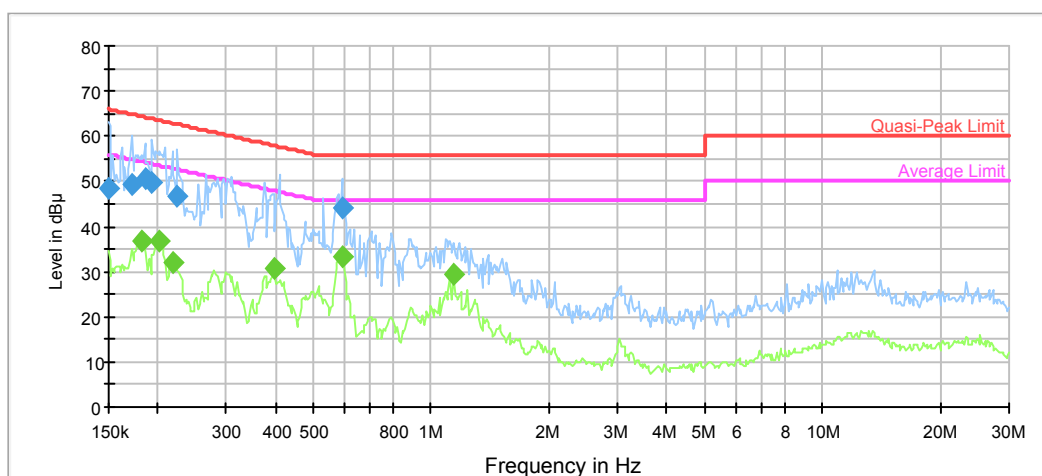

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	48.5	9.000	L1	11.2	17.5	66.0	Compliance
0.171759	49.4	9.000	L1	10.9	15.5	64.9	Compliance
0.186006	50.6	9.000	L1	10.8	13.6	64.2	Compliance
0.193566	49.9	9.000	L1	10.7	14.0	63.9	Compliance
0.225205	46.8	9.000	L1	10.5	15.8	62.6	Compliance
0.590613	44.2	9.000	L1	9.8	11.8	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.183065	37.0	9.000	L1	10.8	17.3	54.3	Compliance
0.201433	36.7	9.000	L1	10.6	16.9	53.6	Compliance
0.219886	32.1	9.000	L1	10.5	20.8	52.8	Compliance
0.396530	30.5	9.000	L1	10.0	17.4	47.9	Compliance
0.595338	33.2	9.000	L1	9.8	12.8	46.0	Compliance
1.144267	29.3	9.000	L1	9.8	16.7	46.0	Compliance


**AC120 V, 60 Hz, Neutral:**

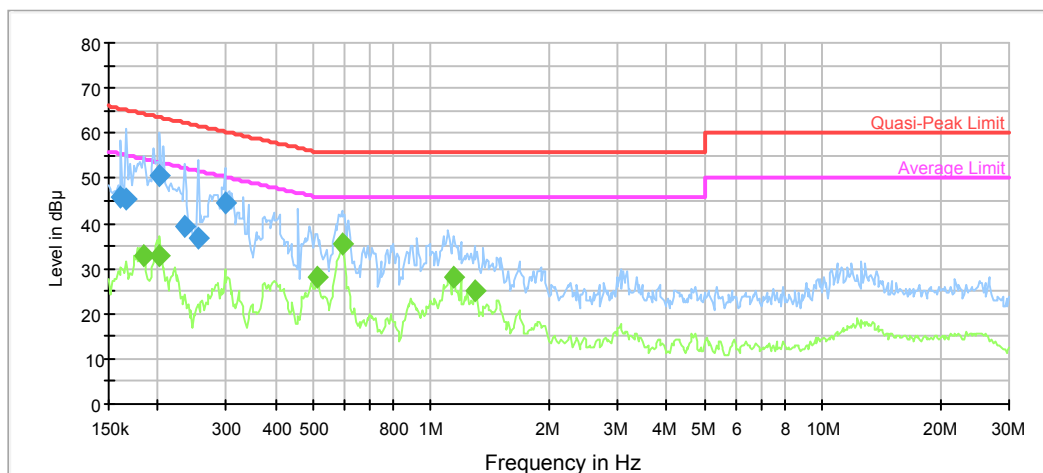

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.161152	45.7	9.000	N	11.0	19.7	65.4	Compliance
0.166371	45.6	9.000	N	10.9	19.5	65.1	Compliance
0.203045	50.8	9.000	N	10.6	12.7	63.5	Compliance
0.234359	39.2	9.000	N	10.4	23.1	62.3	Compliance
0.253797	36.9	9.000	N	10.3	24.7	61.6	Compliance
0.297644	44.5	9.000	N	10.2	15.8	60.3	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.184529	33.0	9.000	N	10.8	21.3	54.3	Compliance
0.203045	32.7	9.000	N	10.6	20.8	53.5	Compliance
0.511698	28.1	9.000	N	9.9	17.9	46.0	Compliance
0.590613	35.4	9.000	N	9.8	10.6	46.0	Compliance
1.144267	28.2	9.000	N	9.8	17.8	46.0	Compliance
1.289541	25.2	9.000	N	9.8	20.8	46.0	Compliance


**Model: A7000RU**  
**AC120 V, 60 Hz, Line:**

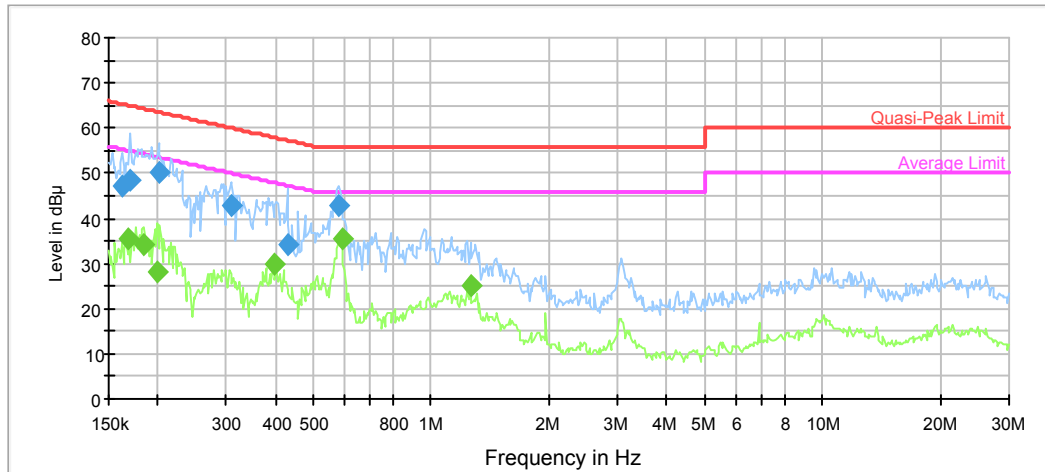

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.162441	47.2	9.000	L1	11.0	18.1	65.3	Compliance
0.170396	48.4	9.000	L1	10.9	16.5	64.9	Compliance
0.201433	50.3	9.000	L1	10.6	13.3	63.6	Compliance
0.307284	43.0	9.000	L1	10.1	17.0	60.0	Compliance
0.429420	34.0	9.000	L1	9.9	23.3	57.3	Compliance
0.581275	42.6	9.000	L1	9.8	13.4	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.169044	35.5	9.000	L1	10.9	19.5	55.0	Compliance
0.184529	34.2	9.000	L1	10.8	20.1	54.3	Compliance
0.199835	28.2	9.000	L1	10.6	25.4	53.6	Compliance
0.396530	29.7	9.000	L1	10.0	18.2	47.9	Compliance
0.590613	35.6	9.000	L1	9.8	10.4	46.0	Compliance
1.259081	24.9	9.000	L1	9.8	21.1	46.0	Compliance

**AC120 V, 60 Hz, Neutral:**

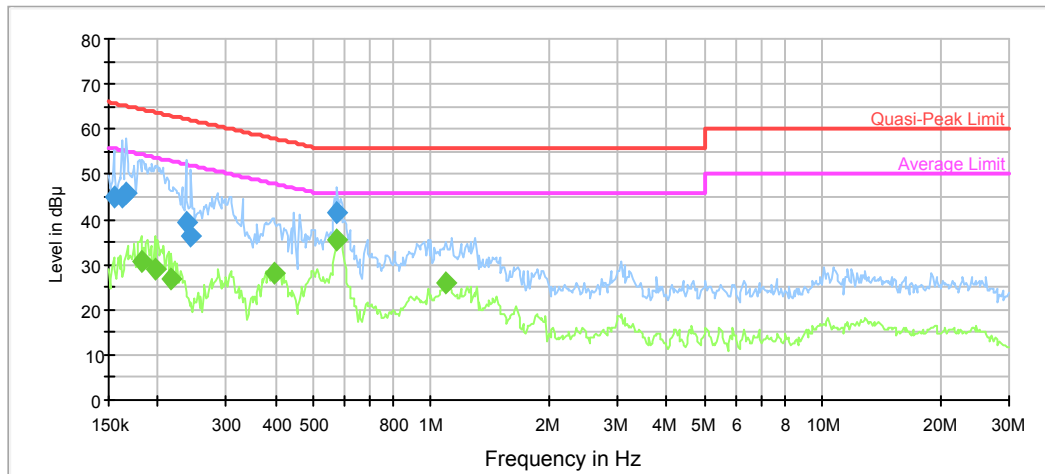

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.154858	44.9	9.000	N	11.1	20.8	65.7	Compliance
0.162441	44.9	9.000	N	11.0	20.4	65.3	Compliance
0.166371	45.8	9.000	N	10.9	19.3	65.1	Compliance
0.236234	39.2	9.000	N	10.4	23.0	62.2	Compliance
0.243884	36.2	9.000	N	10.4	25.8	62.0	Compliance
0.576662	41.5	9.000	N	9.8	14.5	56.0	Compliance

Frequency (MHz)	Average (dB $\mu$ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.181612	30.6	9.000	N	10.8	23.8	54.4	Compliance
0.196675	29.1	9.000	N	10.6	24.6	53.7	Compliance
0.216409	27.1	9.000	N	10.5	25.9	53.0	Compliance
0.399703	28.2	9.000	N	10.0	19.7	47.9	Compliance
0.576662	35.5	9.000	N	9.8	10.5	46.0	Compliance
1.090848	25.9	9.000	N	9.8	20.1	46.0	Compliance


## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### EUT Setup

#### Below 1GHz:

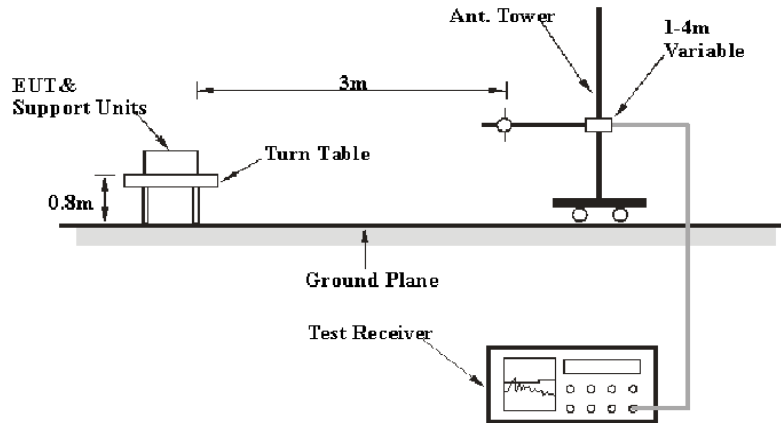

#### Above 1GHz:

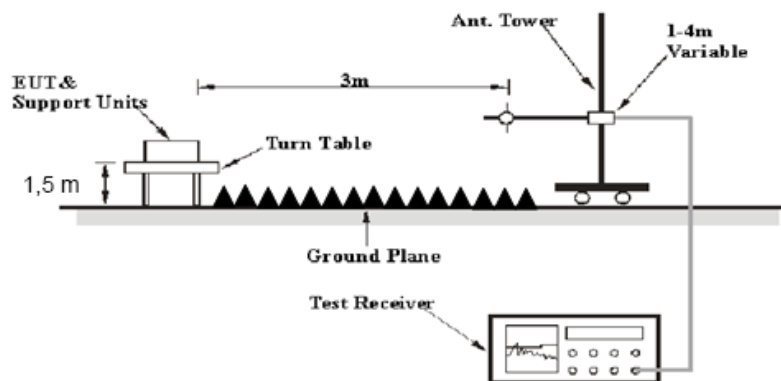

The radiated emission Below 1GHz tests were performed in the 10 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
R&S	EMI Test Receiver	ESCI	100035	2017-08-04	2018-08-04
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2019-07-21
HP	Amplifier	8447F	2443A01912	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-02	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-2200-01	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-04
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2017-09-05	2018-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2018-06-16	2019-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	26.2~27.4 °C
<b>Relative Humidity:</b>	31~57 %
<b>ATM Pressure:</b>	99.8~101.1 kPa

\* The testing was performed by Tyler Pan and Alex You on 2018-07-14 ~ 2018-07-18.


*Test Result: Compliance, please Refer to the following data*

*Test Mode: Transmitting*

1) 30MHz-1GHz(802.11b low channel was the worst)

Model: A7000RU


Horizontal:

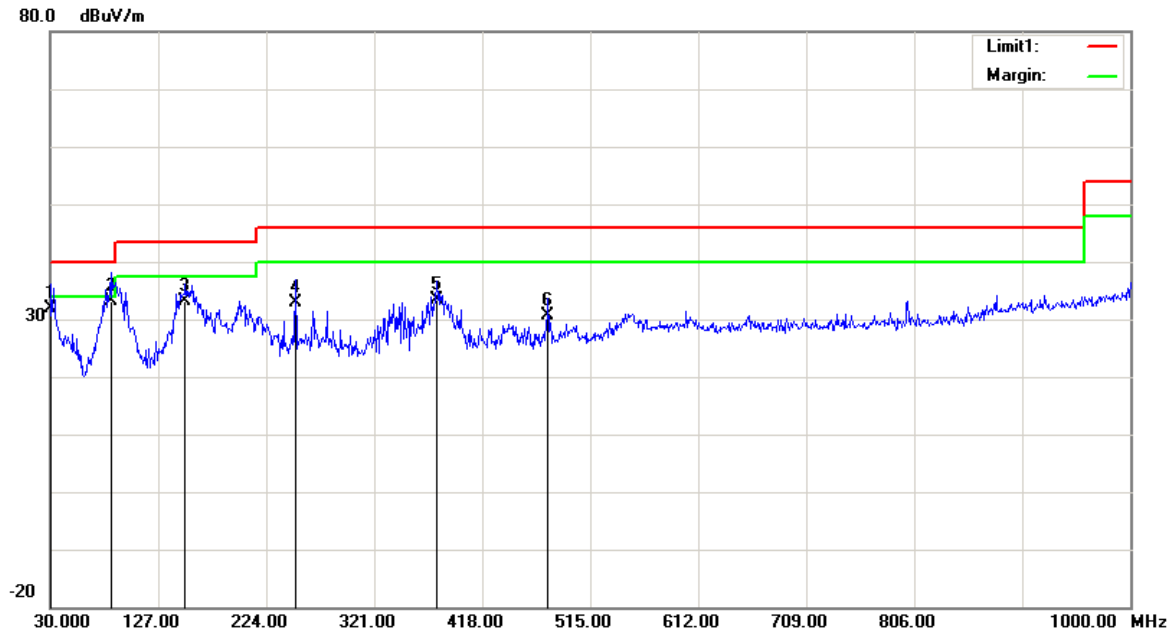

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	33.99	QP	-1.99	32.00	40.00	8.00
84.3200	46.35	QP	-13.15	33.20	40.00	6.80
151.2500	40.01	QP	-6.91	33.10	43.50	10.40
250.1900	40.49	QP	-7.59	32.90	46.00	13.10
377.2600	36.24	QP	-2.74	33.50	46.00	12.50
477.1700	31.40	QP	-0.80	30.60	46.00	15.40




**Vertical:**

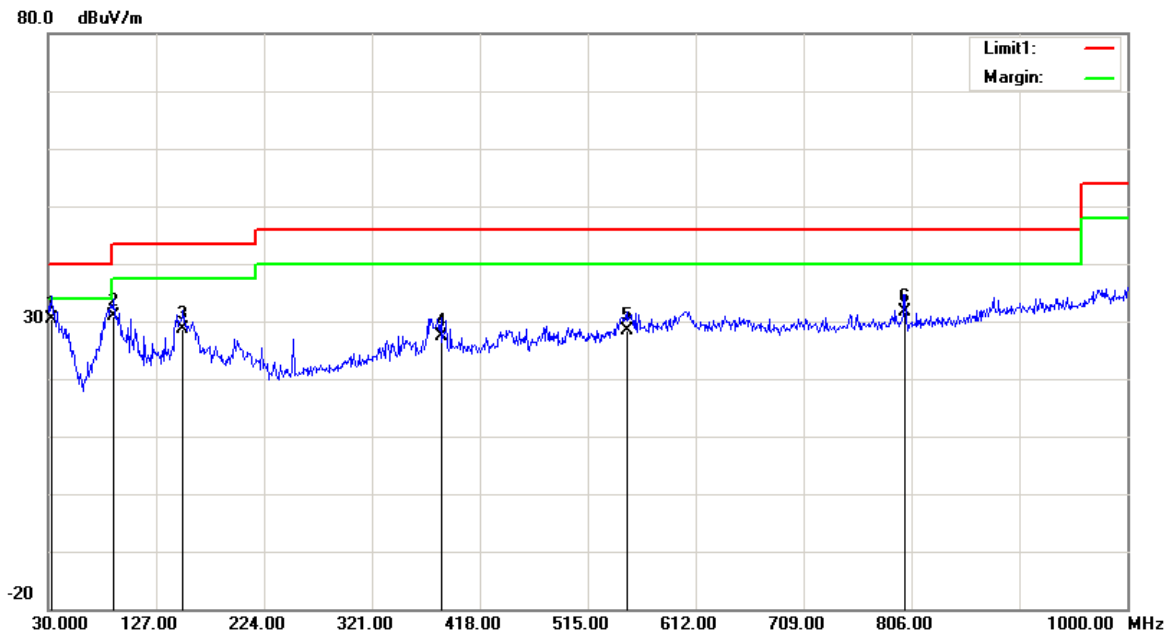

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
32.9100	33.72	QP	-3.42	30.30	40.00	9.70
89.1700	43.69	QP	-12.79	30.90	43.50	12.60
151.2500	35.61	QP	-6.91	28.70	43.50	14.80
383.0800	30.08	QP	-2.58	27.50	46.00	18.50
549.9200	26.74	QP	1.76	28.50	46.00	17.50
800.1800	26.38	QP	5.32	31.70	46.00	14.30


**Model: A7000R**

**Horizontal:**

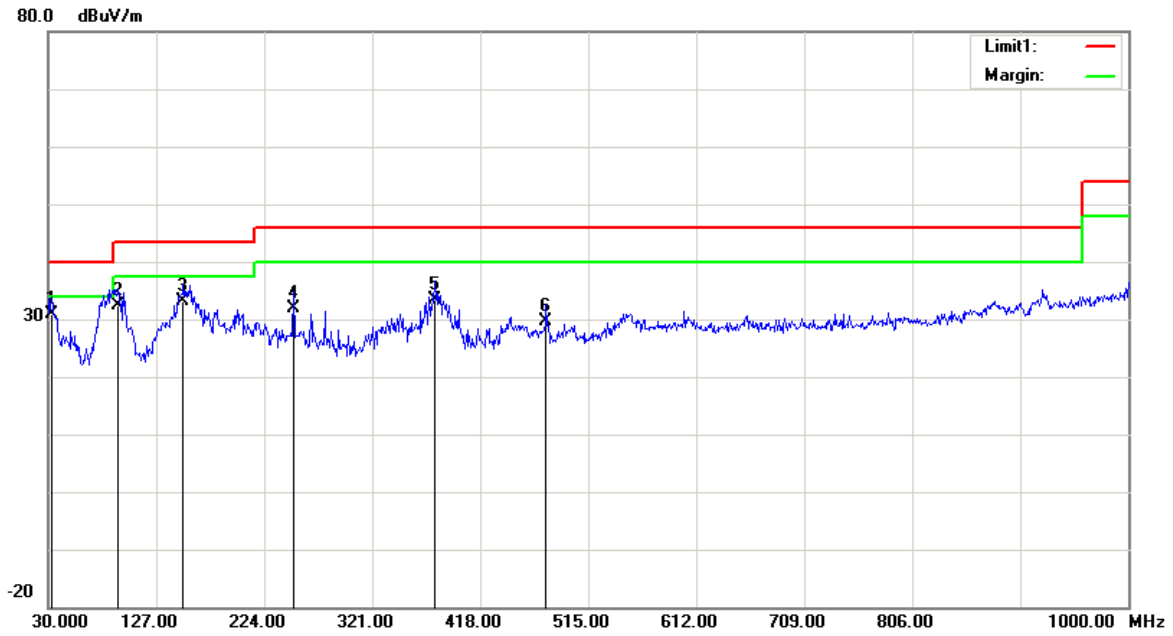

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
32.9100	34.32	QP	-3.42	30.90	40.00	9.10
93.0500	44.70	QP	-12.40	32.30	43.50	11.20
151.2500	40.01	QP	-6.91	33.10	43.50	10.40
250.1900	39.49	QP	-7.59	31.90	46.00	14.10
377.2600	36.24	QP	-2.74	33.50	46.00	12.50
477.1700	30.40	QP	-0.80	29.60	46.00	16.40

**Vertical:**

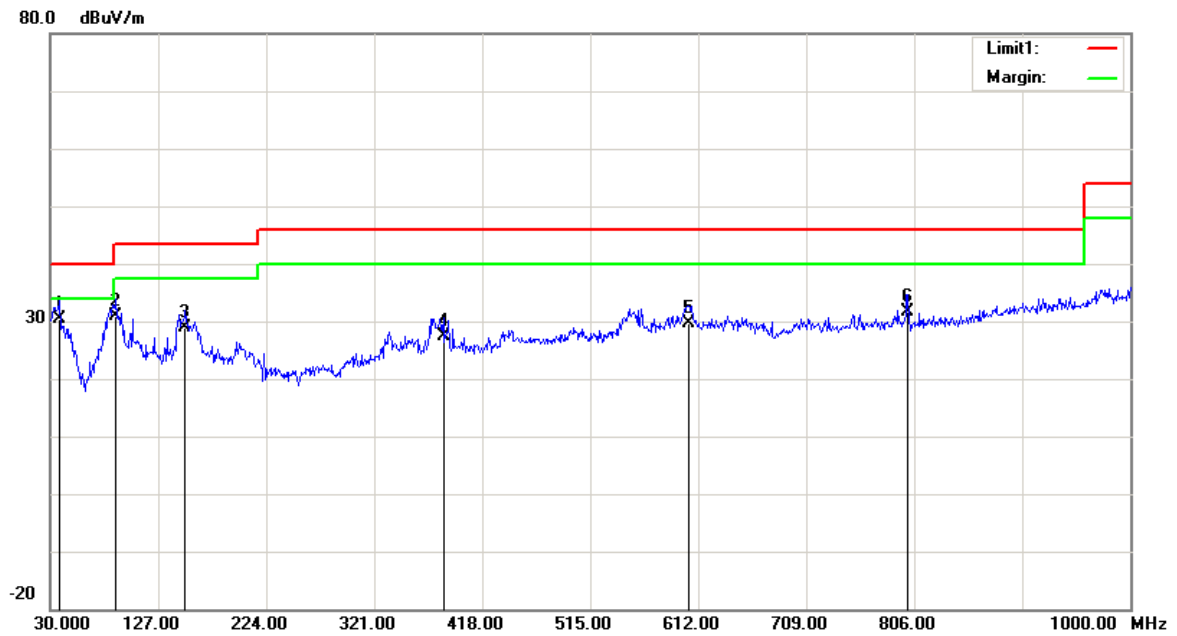

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
38.7300	36.72	QP	-6.22	30.50	40.00	9.50
89.1700	43.69	QP	-12.79	30.90	43.50	12.60
151.2500	35.71	QP	-6.91	28.80	43.50	14.70
383.0800	30.08	QP	-2.58	27.50	46.00	18.50
603.2700	26.97	QP	2.73	29.70	46.00	16.30
800.1800	26.38	QP	5.32	31.70	46.00	14.30

2) 1-25GHz(A7000RU was the worst):

802.11b Chain 0

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.57	PK	H	28.12	1.81	0.00	103.50	N/A	N/A
2412.00	70.30	AV	H	28.12	1.81	0.00	100.23	N/A	N/A
2412.00	83.76	PK	V	28.12	1.81	0.00	113.69	N/A	N/A
2412.00	80.37	AV	V	28.12	1.81	0.00	110.30	N/A	N/A
2390.00	26.81	PK	V	28.08	1.80	0.00	56.69	74.00	17.31
2390.00	14.59	AV	V	28.08	1.80	0.00	44.47	54.00	9.53
4824.00	56.41	PK	V	32.95	3.19	37.20	55.35	74.00	18.65
4824.00	53.67	AV	V	32.95	3.19	37.20	52.61	54.00	1.39
7236.00	48.57	PK	V	35.81	4.77	37.27	51.88	74.00	22.12
7236.00	36.22	AV	V	35.81	4.77	37.27	39.53	54.00	14.47
3473.33	56.94	PK	V	31.24	2.39	36.94	53.63	74.00	20.37
3473.33	54.88	AV	V	31.24	2.39	36.94	51.57	54.00	2.43
Middle Channel: 2437 MHz									
2437.00	72.92	PK	H	28.17	1.82	0.00	102.91	N/A	N/A
2437.00	69.75	AV	H	28.17	1.82	0.00	99.74	N/A	N/A
2437.00	83.62	PK	V	28.17	1.82	0.00	113.61	N/A	N/A
2437.00	80.34	AV	V	28.17	1.82	0.00	110.33	N/A	N/A
4874.00	55.73	PK	V	33.05	3.26	37.21	54.83	74.00	19.17
4874.00	53.44	AV	V	33.05	3.26	37.21	52.54	54.00	1.46
7311.00	47.96	PK	V	36.01	4.64	37.36	51.25	74.00	22.75
7311.00	35.84	AV	V	36.01	4.64	37.36	39.13	54.00	14.87
3473.30	56.23	PK	V	31.24	2.39	36.94	52.92	74.00	21.08
3473.30	54.19	AV	V	31.24	2.39	36.94	50.88	54.00	3.12
High Channel: 2462 MHz									
2462.00	73.12	PK	H	28.22	1.83	0.00	103.17	N/A	N/A
2462.00	69.84	AV	H	28.22	1.83	0.00	99.89	N/A	N/A
2462.00	83.51	PK	V	28.22	1.83	0.00	113.56	N/A	N/A
2462.00	80.26	AV	V	28.22	1.83	0.00	110.31	N/A	N/A
2483.50	29.77	PK	V	28.27	1.84	0.00	59.88	74.00	14.12
2483.50	16.57	AV	V	28.27	1.84	0.00	46.68	54.00	7.32
4924.00	54.37	PK	V	33.15	3.27	37.22	53.57	74.00	20.43
4924.00	52.10	AV	V	33.15	3.27	37.22	51.30	54.00	2.70
7386.00	47.88	PK	V	36.20	4.51	37.46	51.13	74.00	22.87
7386.00	35.62	AV	V	36.20	4.51	37.46	38.87	54.00	15.13
3473.30	55.79	PK	V	31.24	2.39	36.94	52.48	74.00	21.52
3473.30	53.74	AV	V	31.24	2.39	36.94	50.43	54.00	3.57

**802.11b Chain 1**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.97	PK	H	28.12	1.81	0.00	103.90	N/A	N/A
2412.00	70.68	AV	H	28.12	1.81	0.00	100.61	N/A	N/A
2412.00	84.73	PK	V	28.12	1.81	0.00	114.66	N/A	N/A
2412.00	81.45	AV	V	28.12	1.81	0.00	111.38	N/A	N/A
2390.00	29.72	PK	V	28.08	1.80	0.00	59.60	74.00	14.40
2390.00	16.79	AV	V	28.08	1.80	0.00	46.67	54.00	7.33
4824.00	49.75	PK	V	32.95	3.19	37.20	48.69	74.00	25.31
4824.00	37.51	AV	V	32.95	3.19	37.20	36.45	54.00	17.55
7236.00	46.12	PK	V	35.81	4.77	37.27	49.43	74.00	24.57
7236.00	34.06	AV	V	35.81	4.77	37.27	37.37	54.00	16.63
3473.30	56.37	PK	V	31.24	2.39	36.94	53.06	74.00	20.94
3473.30	54.12	AV	V	31.24	2.39	36.94	50.81	54.00	3.19
Middle Channel: 2437 MHz									
2437.00	73.86	PK	H	28.17	1.82	0.00	103.85	N/A	N/A
2437.00	70.55	AV	H	28.17	1.82	0.00	100.54	N/A	N/A
2437.00	84.03	PK	V	28.17	1.82	0.00	114.02	N/A	N/A
2437.00	80.47	AV	V	28.17	1.82	0.00	110.46	N/A	N/A
4874.00	49.88	PK	V	33.05	3.26	37.21	48.98	74.00	25.02
4874.00	38.45	AV	V	33.05	3.26	37.21	37.55	54.00	16.45
7311.00	46.85	PK	V	36.01	4.64	37.36	50.14	74.00	23.86
7311.00	34.56	AV	V	36.01	4.64	37.36	37.85	54.00	16.15
3473.30	56.61	PK	V	31.24	2.39	36.94	53.30	74.00	20.70
3473.30	54.48	AV	V	31.24	2.39	36.94	51.17	54.00	2.83
High Channel: 2462 MHz									
2462.00	73.51	PK	H	28.22	1.83	0.00	103.56	N/A	N/A
2462.00	70.21	AV	H	28.22	1.83	0.00	100.26	N/A	N/A
2462.00	83.99	PK	V	28.22	1.83	0.00	114.04	N/A	N/A
2462.00	80.72	AV	V	28.22	1.83	0.00	110.77	N/A	N/A
2483.50	25.86	PK	V	28.27	1.84	0.00	55.97	74.00	18.03
2483.50	14.33	AV	V	28.27	1.84	0.00	44.44	54.00	9.56
4924.00	48.91	PK	V	33.15	3.27	37.22	48.11	74.00	25.89
4924.00	36.54	AV	V	33.15	3.27	37.22	35.74	54.00	18.26
7386.00	46.33	PK	V	36.20	4.51	37.46	49.58	74.00	24.42
7386.00	34.20	AV	V	36.20	4.51	37.46	37.45	54.00	16.55
3473.30	55.46	PK	V	31.24	2.39	36.94	52.15	74.00	21.85
3473.30	53.31	AV	V	31.24	2.39	36.94	50.00	54.00	4.00

**802.11b Chain 2**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	70.73	PK	H	28.12	1.81	0.00	100.66	N/A	N/A
2412.00	67.34	AV	H	28.12	1.81	0.00	97.27	N/A	N/A
2412.00	81.84	PK	V	28.12	1.81	0.00	111.77	N/A	N/A
2412.00	68.43	AV	V	28.12	1.81	0.00	98.36	N/A	N/A
2390.00	26.94	PK	V	28.08	1.80	0.00	56.82	74.00	17.18
2390.00	14.66	AV	V	28.08	1.80	0.00	44.54	54.00	9.46
4824.00	56.10	PK	V	32.95	3.19	37.20	55.04	74.00	18.96
4824.00	53.65	AV	V	32.95	3.19	37.20	52.59	54.00	1.41
7236.00	48.52	PK	V	35.81	4.77	37.27	51.83	74.00	22.17
7236.00	36.28	AV	V	35.81	4.77	37.27	39.59	54.00	14.41
3473.30	57.10	PK	V	31.24	2.39	36.94	53.79	74.00	20.21
3473.30	55.04	AV	V	31.24	2.39	36.94	51.73	54.00	2.27
Middle Channel: 2437 MHz									
2437.00	70.22	PK	H	28.17	1.82	0.00	100.21	N/A	N/A
2437.00	67.08	AV	H	28.17	1.82	0.00	97.07	N/A	N/A
2437.00	81.72	PK	V	28.17	1.82	0.00	111.71	N/A	N/A
2437.00	78.64	AV	V	28.17	1.82	0.00	108.63	N/A	N/A
4874.00	56.43	PK	V	33.05	3.26	37.21	55.53	74.00	18.47
4874.00	54.02	AV	V	33.05	3.26	37.21	53.12	54.00	0.88
7311.00	47.86	PK	V	36.01	4.64	37.36	51.15	74.00	22.85
7311.00	35.41	AV	V	36.01	4.64	37.36	38.70	54.00	15.30
3473.30	56.86	PK	V	31.24	2.39	36.94	53.55	74.00	20.45
3473.30	54.52	AV	V	31.24	2.39	36.94	51.21	54.00	2.79
High Channel: 2462 MHz									
2462.00	69.23	PK	H	28.22	1.83	0.00	99.28	N/A	N/A
2462.00	65.90	AV	H	28.22	1.83	0.00	95.95	N/A	N/A
2462.00	81.47	PK	V	28.22	1.83	0.00	111.52	N/A	N/A
2462.00	68.10	AV	V	28.22	1.83	0.00	98.15	N/A	N/A
2483.50	26.80	PK	V	28.27	1.84	0.00	56.91	74.00	17.09
2483.50	14.32	AV	V	28.27	1.84	0.00	44.43	54.00	9.57
4924.00	56.51	PK	V	33.15	3.27	37.22	55.71	74.00	18.29
4924.00	54.22	AV	V	33.15	3.27	37.22	53.42	54.00	0.58
7386.00	48.51	PK	V	36.20	4.51	37.46	51.76	74.00	22.24
7386.00	36.12	AV	V	36.20	4.51	37.46	39.37	54.00	14.63
3473.30	57.79	PK	V	31.24	2.39	36.94	54.48	74.00	19.52
3473.30	55.33	AV	V	31.24	2.39	36.94	52.02	54.00	1.98

**802.11b Chain 3**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	74.52	PK	H	28.12	1.81	0.00	104.45	N/A	N/A
2412.00	71.36	AV	H	28.12	1.81	0.00	101.29	N/A	N/A
2412.00	84.73	PK	V	28.12	1.81	0.00	114.66	N/A	N/A
2412.00	81.57	AV	V	28.12	1.81	0.00	111.50	N/A	N/A
2390.00	28.64	PK	V	28.08	1.80	0.00	58.52	74.00	15.48
2390.00	16.67	AV	V	28.08	1.80	0.00	46.55	54.00	7.45
4824.00	53.44	PK	V	32.95	3.19	37.20	52.38	74.00	21.62
4824.00	51.17	AV	V	32.95	3.19	37.20	50.11	54.00	3.89
7236.00	49.66	PK	V	35.81	4.77	37.27	52.97	74.00	21.03
7236.00	37.50	AV	V	35.81	4.77	37.27	40.81	54.00	13.19
3473.30	56.44	PK	V	31.24	2.39	36.94	53.13	74.00	20.87
3473.30	54.10	AV	V	31.24	2.39	36.94	50.79	54.00	3.21
Middle Channel: 2437 MHz									
2437.00	74.81	PK	H	28.17	1.82	0.00	104.80	N/A	N/A
2437.00	71.68	AV	H	28.17	1.82	0.00	101.67	N/A	N/A
2437.00	84.67	PK	V	28.17	1.82	0.00	114.66	N/A	N/A
2437.00	61.55	AV	V	28.17	1.82	0.00	91.54	N/A	N/A
4874.00	53.21	PK	V	33.05	3.26	37.21	52.31	74.00	21.69
4874.00	50.89	AV	V	33.05	3.26	37.21	49.99	54.00	4.01
7311.00	50.46	PK	V	36.01	4.64	37.36	53.75	74.00	20.25
7311.00	40.19	AV	V	36.01	4.64	37.36	43.48	54.00	10.52
3473.30	55.49	PK	V	31.24	2.39	36.94	52.18	74.00	21.82
3473.30	52.31	AV	V	31.24	2.39	36.94	49.00	54.00	5.00
High Channel: 2462 MHz									
2462.00	74.44	PK	H	28.22	1.83	0.00	104.49	N/A	N/A
2462.00	71.30	AV	H	28.22	1.83	0.00	101.35	N/A	N/A
2462.00	84.55	PK	V	28.22	1.83	0.00	114.60	N/A	N/A
2462.00	83.24	AV	V	28.22	1.83	0.00	113.29	N/A	N/A
2483.50	32.00	PK	V	28.27	1.84	0.00	62.11	74.00	11.89
2483.50	17.89	AV	V	28.27	1.84	0.00	48.00	54.00	6.00
4924.00	53.44	PK	V	33.15	3.27	37.22	52.64	74.00	21.36
4924.00	51.06	AV	V	33.15	3.27	37.22	50.26	54.00	3.74
7386.00	50.27	PK	V	36.20	4.51	37.46	53.52	74.00	20.48
7386.00	39.66	AV	V	36.20	4.51	37.46	42.91	54.00	11.09
3473.30	56.12	PK	V	31.24	2.39	36.94	52.81	74.00	21.19
3473.30	53.87	AV	V	31.24	2.39	36.94	50.56	54.00	3.44

**802.11g Chain 0**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	72.45	PK	H	28.12	1.81	0.00	102.38	N/A	N/A
2412.00	64.29	AV	H	28.12	1.81	0.00	94.22	N/A	N/A
2412.00	83.27	PK	V	28.12	1.81	0.00	113.20	N/A	N/A
2412.00	75.09	AV	V	28.12	1.81	0.00	105.02	N/A	N/A
2390.00	39.61	PK	V	28.08	1.80	0.00	69.49	74.00	4.51
2390.00	23.15	AV	V	28.08	1.80	0.00	53.03	54.00	0.97
4824.00	51.81	PK	V	32.95	3.19	37.20	50.75	74.00	23.25
4824.00	41.20	AV	V	32.95	3.19	37.20	40.14	54.00	13.86
7236.00	49.62	PK	V	35.81	4.77	37.27	52.93	74.00	21.07
7236.00	37.55	AV	V	35.81	4.77	37.27	40.86	54.00	13.14
3473.30	56.64	PK	V	31.24	2.39	36.94	53.33	74.00	20.67
3473.30	54.31	AV	V	31.24	2.39	36.94	51.00	54.00	3.00
Middle Channel: 2437 MHz									
2437.00	73.34	PK	H	28.17	1.82	0.00	103.33	N/A	N/A
2437.00	64.77	AV	H	28.17	1.82	0.00	94.76	N/A	N/A
2437.00	83.57	PK	V	28.17	1.82	0.00	113.56	N/A	N/A
2437.00	75.27	AV	V	28.17	1.82	0.00	105.26	N/A	N/A
4874.00	50.76	PK	V	33.05	3.26	37.21	49.86	74.00	24.14
4874.00	39.41	AV	V	33.05	3.26	37.21	38.51	54.00	15.49
7311.00	48.76	PK	V	36.01	4.64	37.36	52.05	74.00	21.95
7311.00	36.55	AV	V	36.01	4.64	37.36	39.84	54.00	14.16
3473.30	56.47	PK	V	31.24	2.39	36.94	53.16	74.00	20.84
3473.30	54.29	AV	V	31.24	2.39	36.94	50.98	54.00	3.02
High Channel: 2462 MHz									
2462.00	71.87	PK	H	28.22	1.83	0.00	101.92	N/A	N/A
2462.00	63.40	AV	H	28.22	1.83	0.00	93.45	N/A	N/A
2462.00	83.08	PK	V	28.22	1.83	0.00	113.13	N/A	N/A
2462.00	74.67	AV	V	28.22	1.83	0.00	104.72	N/A	N/A
2483.50	39.63	PK	V	28.27	1.84	0.00	69.74	74.00	4.26
2483.50	22.86	AV	V	28.27	1.84	0.00	52.97	54.00	1.03
4924.00	50.79	PK	V	33.15	3.27	37.22	49.99	74.00	24.01
4924.00	39.64	AV	V	33.15	3.27	37.22	38.84	54.00	15.16
7386.00	48.52	PK	V	36.20	4.51	37.46	51.77	74.00	22.23
7386.00	36.41	AV	V	36.20	4.51	37.46	39.66	54.00	14.34
3473.30	53.59	PK	V	31.24	2.39	36.94	50.28	74.00	23.72
3473.30	51.33	AV	V	31.24	2.39	36.94	48.02	54.00	5.98



**802.11g Chain 1**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.26	PK	H	28.12	1.81	0.00	103.19	N/A	N/A
2412.00	64.94	AV	H	28.12	1.81	0.00	94.87	N/A	N/A
2412.00	84.05	PK	V	28.12	1.81	0.00	113.98	N/A	N/A
2412.00	75.49	AV	V	28.12	1.81	0.00	105.42	N/A	N/A
2390.00	38.97	PK	V	28.08	1.80	0.00	68.85	74.00	5.15
2390.00	22.89	AV	V	28.08	1.80	0.00	52.77	54.00	1.23
4824.00	49.77	PK	V	32.95	3.19	37.20	48.71	74.00	25.29
4824.00	37.46	AV	V	32.95	3.19	37.20	36.40	54.00	17.60
7236.00	48.96	PK	V	35.81	4.77	37.27	52.27	74.00	21.73
7236.00	36.85	AV	V	35.81	4.77	37.27	40.16	54.00	13.84
3473.30	56.27	PK	V	31.24	2.39	36.94	52.96	74.00	21.04
3473.30	54.10	AV	V	31.24	2.39	36.94	50.79	54.00	3.21
Middle Channel: 2437 MHz									
2437.00	73.42	PK	H	28.17	1.82	0.00	103.41	N/A	N/A
2437.00	65.08	AV	H	28.17	1.82	0.00	95.07	N/A	N/A
2437.00	83.82	PK	V	28.17	1.82	0.00	113.81	N/A	N/A
2437.00	75.63	AV	V	28.17	1.82	0.00	105.62	N/A	N/A
4874.00	50.07	PK	V	33.05	3.26	37.21	49.17	74.00	24.83
4874.00	39.27	AV	V	33.05	3.26	37.21	38.37	54.00	15.63
7311.00	49.66	PK	V	36.01	4.64	37.36	52.95	74.00	21.05
7311.00	37.88	AV	V	36.01	4.64	37.36	41.17	54.00	12.83
3473.30	55.61	PK	V	31.24	2.39	36.94	52.30	74.00	21.70
3473.30	53.29	AV	V	31.24	2.39	36.94	49.98	54.00	4.02
High Channel: 2462 MHz									
2462.00	73.38	PK	H	28.22	1.83	0.00	103.43	N/A	N/A
2462.00	65.02	AV	H	28.22	1.83	0.00	95.07	N/A	N/A
2462.00	83.49	PK	V	28.22	1.83	0.00	113.54	N/A	N/A
2462.00	75.12	AV	V	28.22	1.83	0.00	105.17	N/A	N/A
2483.50	39.91	PK	V	28.27	1.84	0.00	70.02	74.00	3.98
2483.50	23.01	AV	V	28.27	1.84	0.00	53.12	54.00	0.88
4924.00	51.16	PK	V	33.15	3.27	37.22	50.36	74.00	23.64
4924.00	40.20	AV	V	33.15	3.27	37.22	39.40	54.00	14.60
7386.00	50.59	PK	V	36.20	4.51	37.46	53.84	74.00	20.16
7386.00	39.50	AV	V	36.20	4.51	37.46	42.75	54.00	11.25
3473.30	54.75	PK	V	31.24	2.39	36.94	51.44	74.00	22.56
3473.30	52.53	AV	V	31.24	2.39	36.94	49.22	54.00	4.78

**802.11g Chain 2**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.41	PK	H	28.12	1.81	0.00	103.34	N/A	N/A
2412.00	65.13	AV	H	28.12	1.81	0.00	95.06	N/A	N/A
2412.00	83.33	PK	V	28.12	1.81	0.00	113.26	N/A	N/A
2412.00	75.02	AV	V	28.12	1.81	0.00	104.95	N/A	N/A
2390.00	38.79	PK	V	28.08	1.80	0.00	68.67	74.00	5.33
2390.00	22.74	AV	V	28.08	1.80	0.00	52.62	54.00	1.38
4824.00	54.75	PK	V	32.95	3.19	37.20	53.69	74.00	20.31
4824.00	43.40	AV	V	32.95	3.19	37.20	42.34	54.00	11.66
7236.00	47.56	PK	V	35.81	4.77	37.27	50.87	74.00	23.13
7236.00	35.23	AV	V	35.81	4.77	37.27	38.54	54.00	15.46
3473.30	56.71	PK	V	31.24	2.39	36.94	53.40	74.00	20.60
3473.30	54.53	AV	V	31.24	2.39	36.94	51.22	54.00	2.78
Middle Channel: 2437 MHz									
2437.00	73.64	PK	H	28.17	1.82	0.00	103.63	N/A	N/A
2437.00	65.40	AV	H	28.17	1.82	0.00	95.39	N/A	N/A
2437.00	83.87	PK	V	28.17	1.82	0.00	113.86	N/A	N/A
2437.00	74.51	AV	V	28.17	1.82	0.00	104.50	N/A	N/A
4874.00	53.41	PK	V	33.05	3.26	37.21	52.51	74.00	21.49
4874.00	42.10	AV	V	33.05	3.26	37.21	41.20	54.00	12.80
7311.00	47.61	PK	V	36.01	4.64	37.36	50.90	74.00	23.10
7311.00	35.26	AV	V	36.01	4.64	37.36	38.55	54.00	15.45
3473.30	55.84	PK	V	31.24	2.39	36.94	52.53	74.00	21.47
3473.30	53.61	AV	V	31.24	2.39	36.94	50.30	54.00	3.70
High Channel: 2462 MHz									
2462.00	72.67	PK	H	28.22	1.83	0.00	102.72	N/A	N/A
2462.00	64.35	AV	H	28.22	1.83	0.00	94.40	N/A	N/A
2462.00	83.40	PK	V	28.22	1.83	0.00	113.45	N/A	N/A
2462.00	74.29	AV	V	28.22	1.83	0.00	104.34	N/A	N/A
2483.50	39.55	PK	V	28.27	1.84	0.00	69.66	74.00	4.34
2483.50	22.89	AV	V	28.27	1.84	0.00	53.00	54.00	1.00
4924.00	56.20	PK	V	33.15	3.27	37.22	55.40	74.00	18.60
4924.00	45.31	AV	V	33.15	3.27	37.22	44.51	54.00	9.49
7386.00	49.30	PK	V	36.20	4.51	37.46	52.55	74.00	21.45
7386.00	37.12	AV	V	36.20	4.51	37.46	40.37	54.00	13.63
3473.30	56.10	PK	V	31.24	2.39	36.94	52.79	74.00	21.21
3473.30	53.87	AV	V	31.24	2.39	36.94	50.56	54.00	3.44

## 802.11g Chain 3

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
	Reading (dB $\mu$ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.82	PK	H	28.12	1.81	0.00	103.75	N/A	N/A
2412.00	65.51	AV	H	28.12	1.81	0.00	95.44	N/A	N/A
2412.00	84.38	PK	V	28.12	1.81	0.00	114.31	N/A	N/A
2412.00	76.10	AV	V	28.12	1.81	0.00	106.03	N/A	N/A
2390.00	36.44	PK	V	28.08	1.80	0.00	66.32	74.00	7.68
2390.00	22.49	AV	V	28.08	1.80	0.00	52.37	54.00	1.63
4824.00	53.10	PK	V	32.95	3.19	37.20	52.04	74.00	21.96
4824.00	41.11	AV	V	32.95	3.19	37.20	40.05	54.00	13.95
7236.00	47.53	PK	V	35.81	4.77	37.27	50.84	74.00	23.16
7236.00	35.28	AV	V	35.81	4.77	37.27	38.59	54.00	15.41
3473.30	56.22	PK	V	31.24	2.39	36.94	52.91	74.00	21.09
3473.30	54.12	AV	V	31.24	2.39	36.94	50.81	54.00	3.19
Middle Channel: 2437 MHz									
2437.00	73.98	PK	H	28.17	1.82	0.00	103.97	N/A	N/A
2437.00	65.62	AV	H	28.17	1.82	0.00	95.61	N/A	N/A
2437.00	84.75	PK	V	28.17	1.82	0.00	114.74	N/A	N/A
2437.00	76.31	AV	V	28.17	1.82	0.00	106.30	N/A	N/A
4874.00	54.21	PK	V	33.05	3.26	37.21	53.31	74.00	20.69
4874.00	42.57	AV	V	33.05	3.26	37.21	41.67	54.00	12.33
7311.00	49.66	PK	V	36.01	4.64	37.36	52.95	74.00	21.05
7311.00	37.61	AV	V	36.01	4.64	37.36	40.90	54.00	13.10
3473.30	56.31	PK	V	31.24	2.39	36.94	53.00	74.00	21.00
3473.30	54.09	AV	V	31.24	2.39	36.94	50.78	54.00	3.22
High Channel: 2462 MHz									
2462.00	73.18	PK	H	28.22	1.83	0.00	103.23	N/A	N/A
2462.00	64.78	AV	H	28.22	1.83	0.00	94.83	N/A	N/A
2462.00	84.55	PK	V	28.22	1.83	0.00	114.60	N/A	N/A
2462.00	76.20	AV	V	28.22	1.83	0.00	106.25	N/A	N/A
2483.50	39.66	PK	V	28.27	1.84	0.00	69.77	74.00	4.23
2483.50	22.74	AV	V	28.27	1.84	0.00	52.85	54.00	1.15
4924.00	53.66	PK	V	33.15	3.27	37.22	52.86	74.00	21.14
4924.00	41.37	AV	V	33.15	3.27	37.22	40.57	54.00	13.43
7386.00	48.56	PK	V	36.20	4.51	37.46	51.81	74.00	22.19
7386.00	36.22	AV	V	36.20	4.51	37.46	39.47	54.00	14.53
3473.30	56.10	PK	V	31.24	2.39	36.94	52.79	74.00	21.21
3473.30	53.54	AV	V	31.24	2.39	36.94	50.23	54.00	3.77

**802.11n ht20(4Tx was the worst)**




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2412 MHz									
2412.00	73.41	PK	H	28.12	1.81	0.00	103.34	N/A	N/A
2412.00	62.88	AV	H	28.12	1.81	0.00	92.81	N/A	N/A
2412.00	86.39	PK	V	28.12	1.81	0.00	116.32	N/A	N/A
2412.00	75.86	AV	V	28.12	1.81	0.00	105.79	N/A	N/A
2390.00	32.89	PK	V	28.08	1.80	0.00	62.77	74.00	11.23
2390.00	22.43	AV	V	28.08	1.80	0.00	52.31	54.00	1.69
4824.00	48.61	PK	V	32.95	3.19	37.20	47.55	74.00	26.45
4824.00	36.42	AV	V	32.95	3.19	37.20	35.36	54.00	18.64
7236.00	46.25	PK	V	35.81	4.77	37.27	49.56	74.00	24.44
7236.00	34.10	AV	V	35.81	4.77	37.27	37.41	54.00	16.59
3473.30	55.89	PK	V	31.24	2.39	36.94	52.58	74.00	21.42
3473.30	53.54	AV	V	31.24	2.39	36.94	50.23	54.00	3.77
Middle Channel: 2437 MHz									
2437.00	73.24	PK	H	28.17	1.82	0.00	103.23	N/A	N/A
2437.00	62.83	AV	H	28.17	1.82	0.00	92.82	N/A	N/A
2437.00	86.68	PK	V	28.17	1.82	0.00	116.67	N/A	N/A
2437.00	75.23	AV	V	28.17	1.82	0.00	105.22	N/A	N/A
4874.00	48.89	PK	V	33.05	3.26	37.21	47.99	74.00	26.01
4874.00	36.54	AV	V	33.05	3.26	37.21	35.64	54.00	18.36
7311.00	46.31	PK	V	36.01	4.64	37.36	49.60	74.00	24.40
7311.00	34.10	AV	V	36.01	4.64	37.36	37.39	54.00	16.61
3473.30	56.53	PK	V	31.24	2.39	36.94	53.22	74.00	20.78
3473.30	54.18	AV	V	31.24	2.39	36.94	50.87	54.00	3.13
High Channel: 2462 MHz									
2462.00	72.94	PK	H	28.22	1.83	0.00	102.99	N/A	N/A
2462.00	62.57	AV	H	28.22	1.83	0.00	92.62	N/A	N/A
2462.00	86.19	PK	V	28.22	1.83	0.00	116.24	N/A	N/A
2462.00	74.66	AV	V	28.22	1.83	0.00	104.71	N/A	N/A
2483.50	32.55	PK	V	28.27	1.84	0.00	62.66	74.00	11.34
2483.50	22.39	AV	V	28.27	1.84	0.00	52.50	54.00	1.50
4924.00	49.61	PK	V	33.15	3.27	37.22	48.81	74.00	25.19
4924.00	37.52	AV	V	33.15	3.27	37.22	36.72	54.00	17.28
7386.00	46.72	PK	V	36.20	4.51	37.46	49.97	74.00	24.03
7386.00	34.63	AV	V	36.20	4.51	37.46	37.88	54.00	16.12
3473.30	56.49	PK	V	31.24	2.39	36.94	53.18	74.00	20.82
3473.30	53.99	AV	V	31.24	2.39	36.94	50.68	54.00	3.32

**802.11n ht40(4Tx was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB/m)					
Low Channel: 2422 MHz									
2422.00	70.63	PK	H	28.14	1.81	0.00	100.58	N/A	N/A
2422.00	60.32	AV	H	28.14	1.81	0.00	90.27	N/A	N/A
2422.00	82.68	PK	V	28.14	1.81	0.00	112.63	N/A	N/A
2422.00	71.20	AV	V	28.14	1.81	0.00	101.15	N/A	N/A
2390.00	37.65	PK	V	28.08	1.80	0.00	67.53	74.00	6.47
2390.00	23.05	AV	V	28.08	1.80	0.00	52.93	54.00	1.07
4844.00	47.69	PK	V	32.99	3.22	37.20	46.70	74.00	27.30
4844.00	35.41	AV	V	32.99	3.22	37.20	34.42	54.00	19.58
7266.00	45.87	PK	V	35.89	4.72	37.31	49.17	74.00	24.83
7266.00	33.43	AV	V	35.89	4.72	37.31	36.73	54.00	17.27
3473.30	56.28	PK	V	31.24	2.39	36.94	52.97	74.00	21.03
3473.30	53.97	AV	V	31.24	2.39	36.94	50.66	54.00	3.34
Middle Channel: 2437 MHz									
2437.00	73.61	PK	H	28.17	1.82	0.00	103.60	N/A	N/A
2437.00	62.70	AV	H	28.17	1.82	0.00	92.69	N/A	N/A
2437.00	85.16	PK	V	28.17	1.82	0.00	115.15	N/A	N/A
2437.00	74.38	AV	V	28.17	1.82	0.00	104.37	N/A	N/A
4874.00	48.66	PK	V	33.05	3.26	37.21	47.76	74.00	26.24
4874.00	36.37	AV	V	33.05	3.26	37.21	35.47	54.00	18.53
7311.00	46.10	PK	V	36.01	4.64	37.36	49.39	74.00	24.61
7311.00	34.09	AV	V	36.01	4.64	37.36	37.38	54.00	16.62
3473.30	56.51	PK	V	31.24	2.39	36.94	53.20	74.00	20.80
3473.30	54.20	AV	V	31.24	2.39	36.94	50.89	54.00	3.11
High Channel: 2452 MHz									
2452.00	70.78	PK	H	28.20	1.83	0.00	100.81	N/A	N/A
2452.00	60.45	AV	H	28.20	1.83	0.00	90.48	N/A	N/A
2452.00	82.84	PK	V	28.20	1.83	0.00	112.87	N/A	N/A
2452.00	71.96	AV	V	28.20	1.83	0.00	101.99	N/A	N/A
2483.50	33.93	PK	V	28.27	1.84	0.00	64.04	74.00	9.96
2483.50	22.16	AV	V	28.27	1.84	0.00	52.27	54.00	1.73
4904.00	46.94	PK	V	33.11	3.30	37.21	46.14	74.00	27.86
4904.00	34.52	AV	V	33.11	3.30	37.21	33.72	54.00	20.28
7356.00	45.77	PK	V	36.13	4.56	37.42	49.04	74.00	24.96
7356.00	33.41	AV	V	36.13	4.56	37.42	36.68	54.00	17.32
3473.30	56.32	PK	V	31.24	2.39	36.94	53.01	74.00	20.99
3473.30	54.02	AV	V	31.24	2.39	36.94	50.71	54.00	3.29




**Test plots(Chain 2 802.11 b mode chain 2 middle channel was the worst)**  
**Horizontal:**

Fundamental  
Test with Band  
Rejection Filter

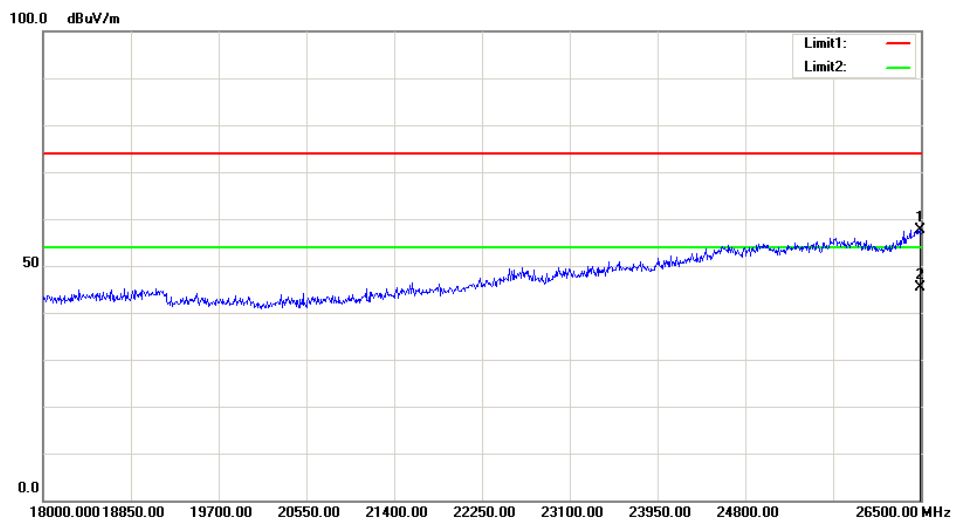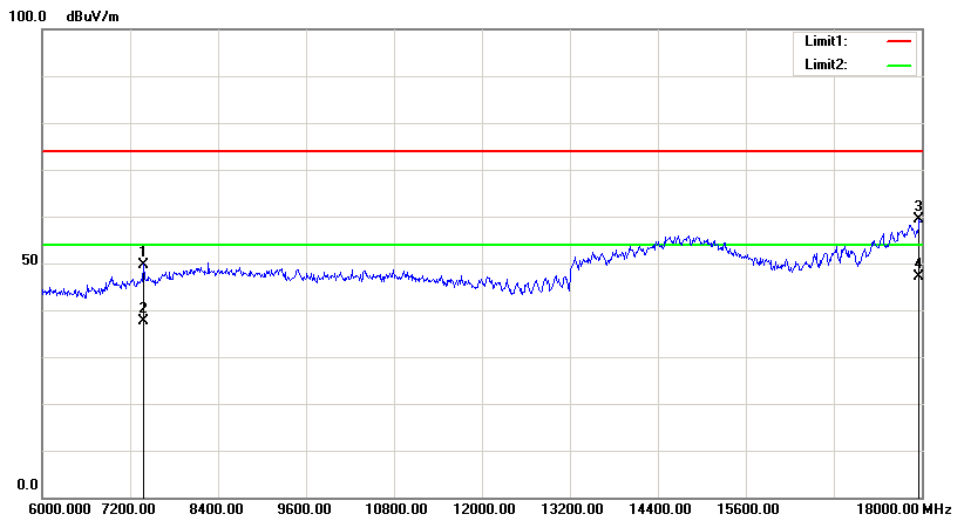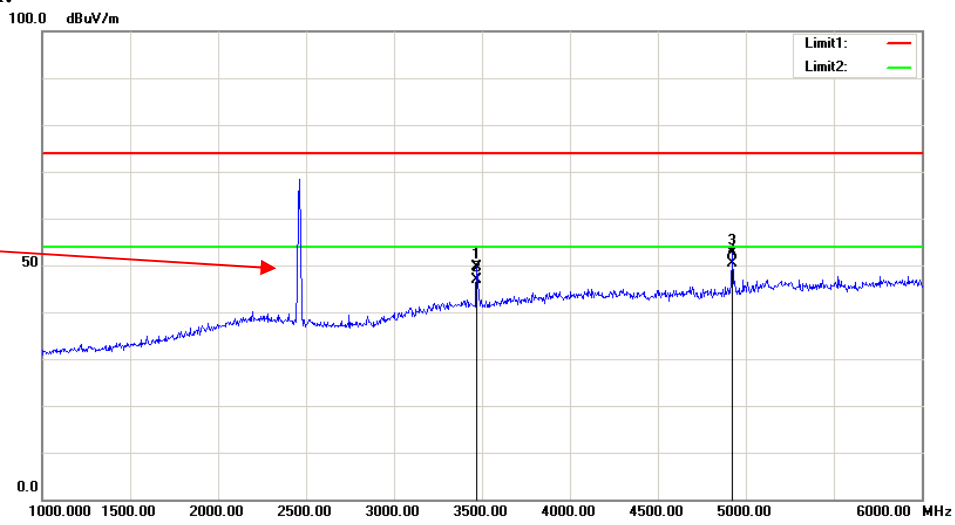

Vertical:

Fundamental Test with Band Rejection Filter

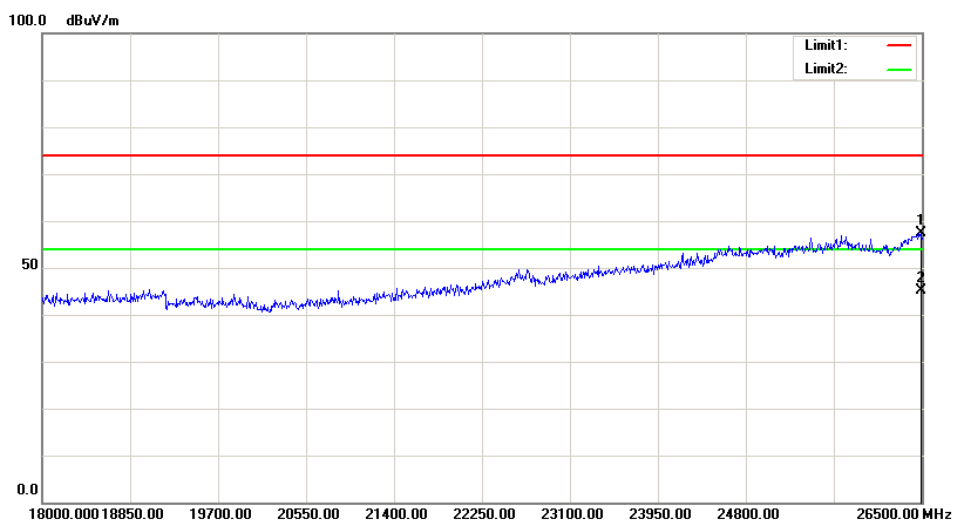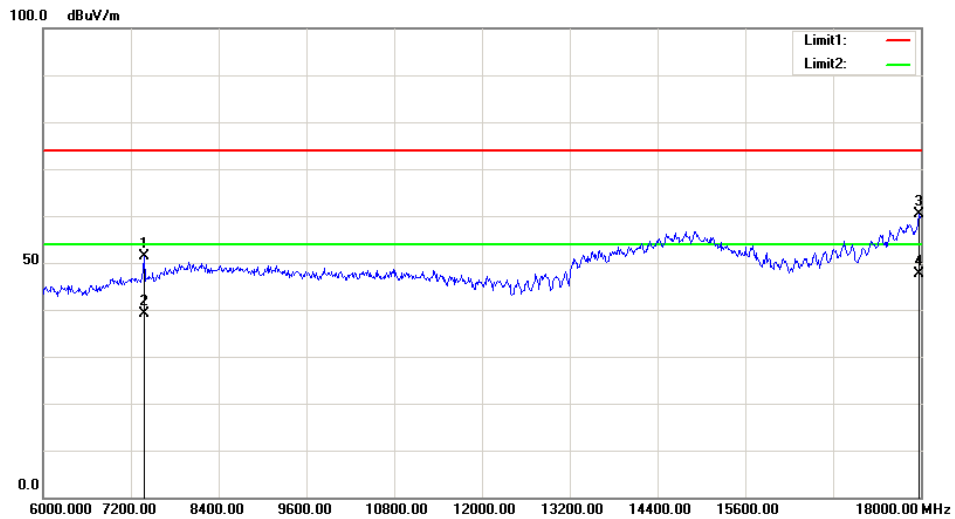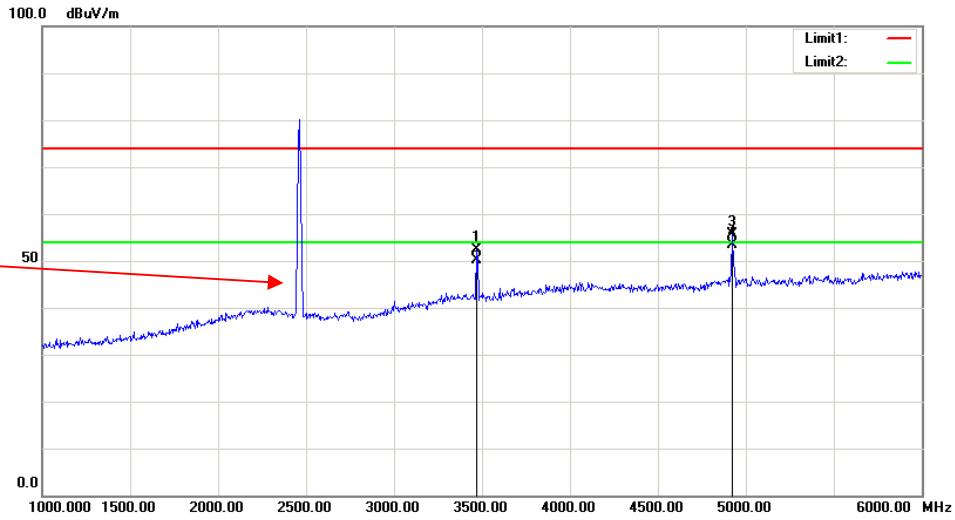

## FCC §15.247(a) (2)–6 dB EMISSION BANDWIDTH


### Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	21.1~28.8°C
<b>Relative Humidity:</b>	39~56 %
<b>ATM Pressure:</b>	99.7~101 kPa

\* The testing was performed by Nami Quan on 2018-01-30~2018-07-21.



Test Mode: Transmitting


Test Result: Compliant.

Test performed at chain 0, please refer to the following table and plots.

Test mode	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	2412	8.98	≥0.5
	2437	8.98	≥0.5
	2462	8.98	≥0.5
802.11g	2412	15.26	≥0.5
	2437	15.26	≥0.5
	2462	15.26	≥0.5
802.11n ht20	2412	15.26	≥0.5
	2437	15.32	≥0.5
	2462	15.25	≥0.5
802.11n ht40	2422	34.95	≥0.5
	2437	34.95	≥0.5
	2452	34.95	≥0.5


6dB bandwidth:

802.11b Low Channel

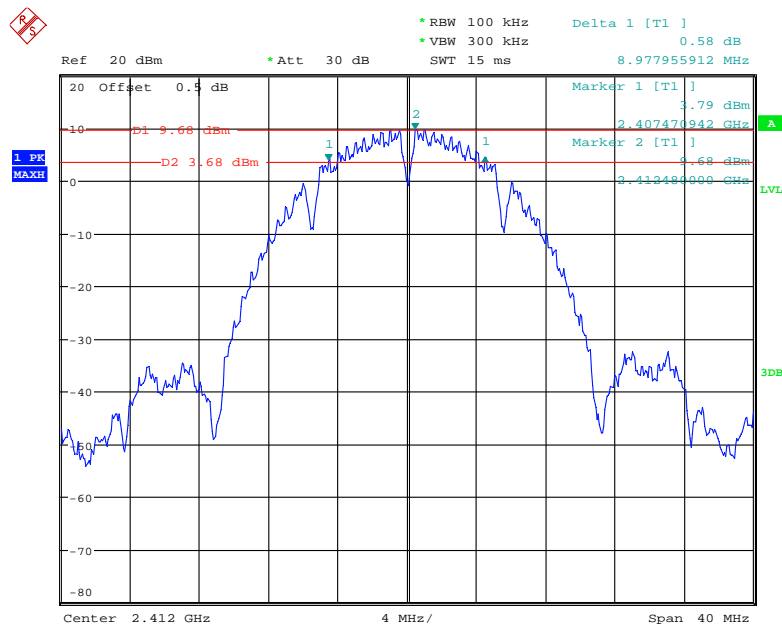


Date: 30.JAN.2018 10:56:23

### 802.11b Middle Channel

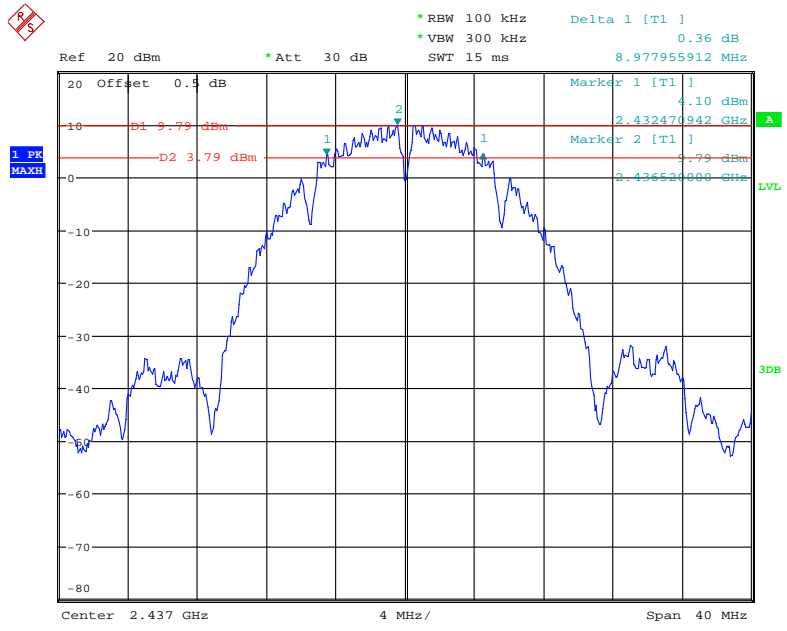


Date: 30.JAN.2018 10:55:00

### 802.11b High Channel

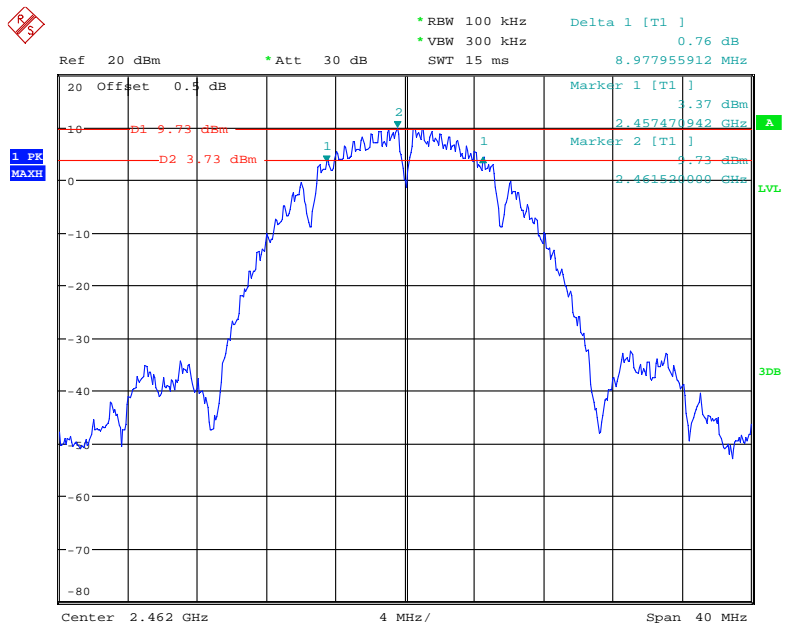


Date: 30.JAN.2018 10:53:10

### 802.11g Low Channel

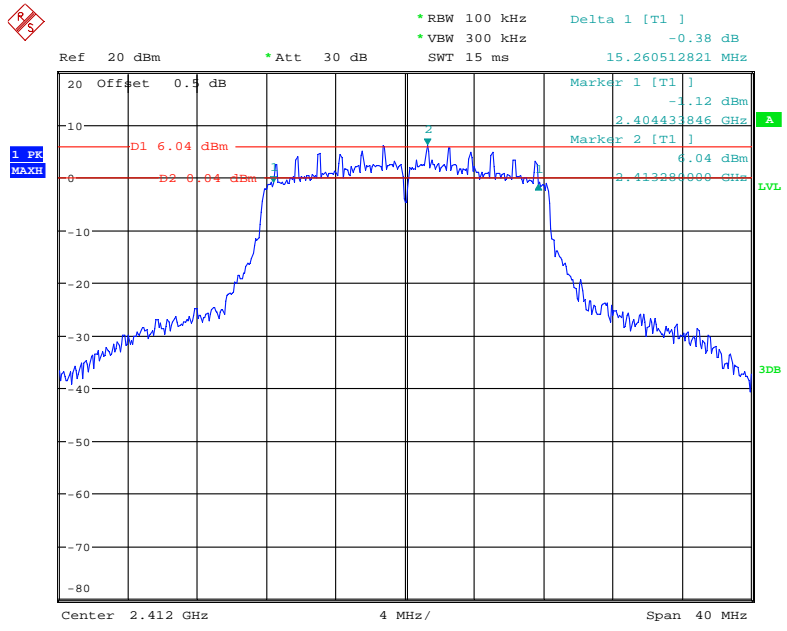


Date: 21.JUL.2018 15:23:30

### 802.11g Middle Channel

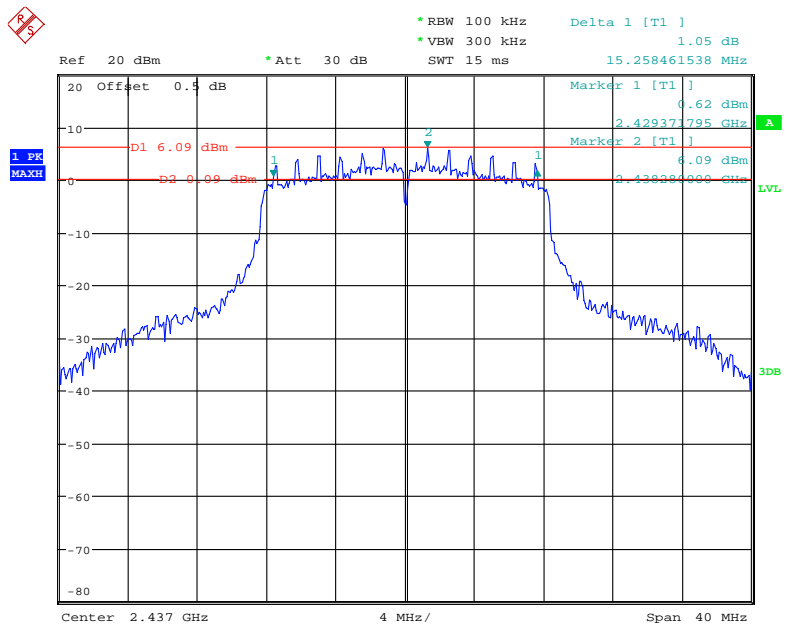


Date: 21.JUL.2018 15:24:18

### 802.11g High Channel

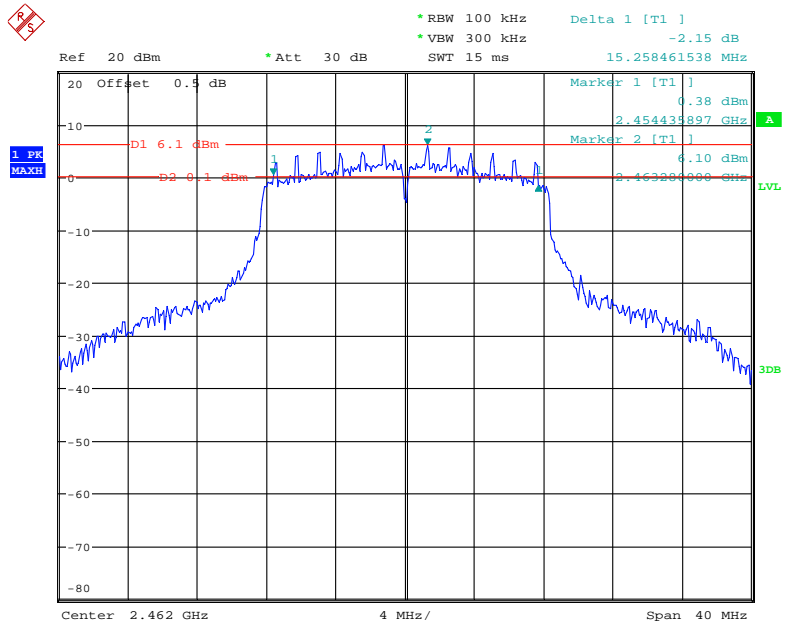


Date: 21.JUL.2018 15:25:27

### 802.11n ht20 Low Channel

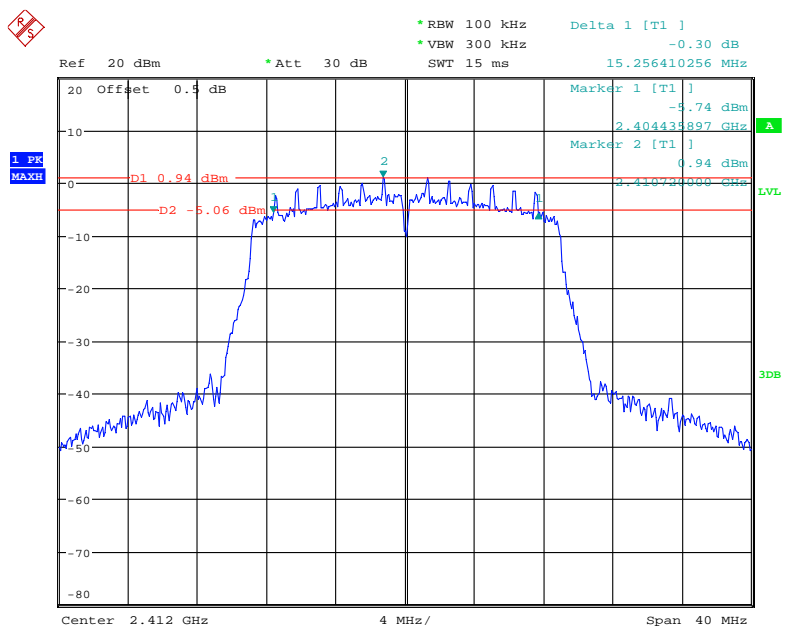


Date: 18.JUL.2018 13:41:37

### 802.11n ht20 Middle Channel

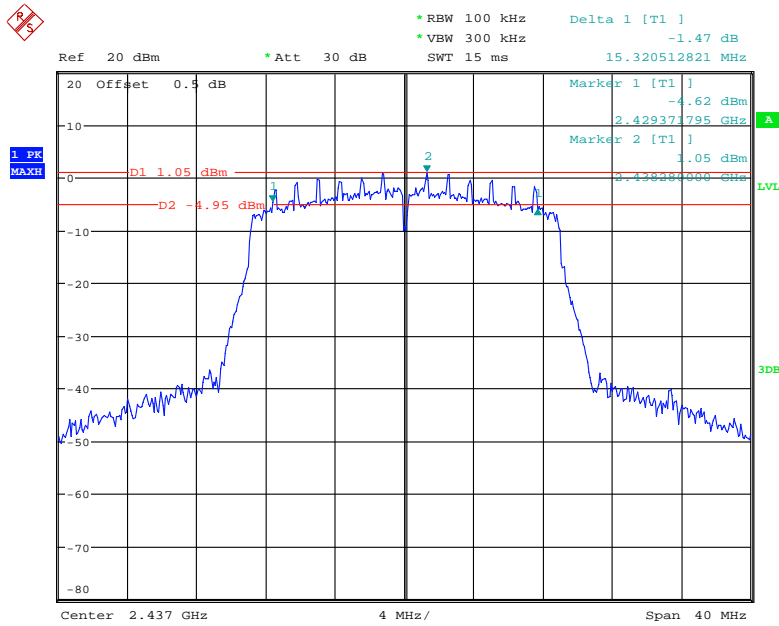


Date: 18.JUL.2018 13:40:39

### 802.11n ht20 High Channel

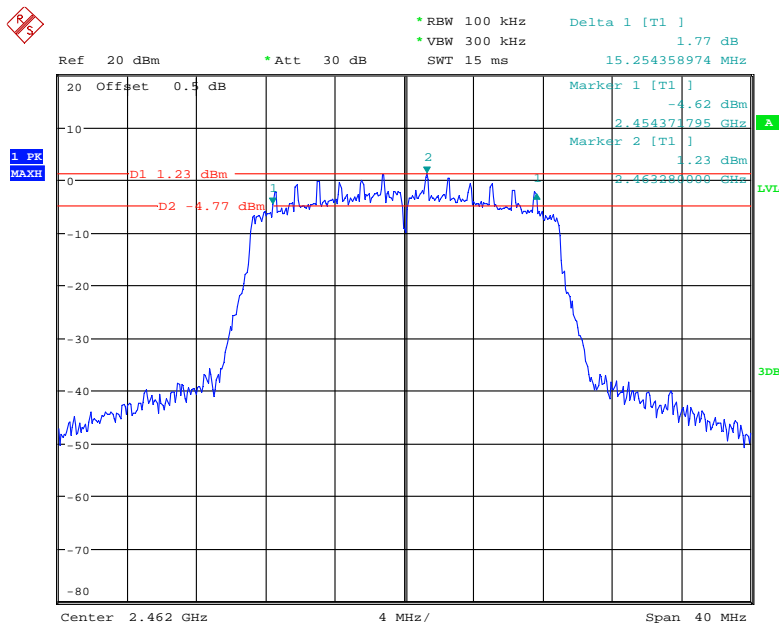


Date: 18.JUL.2018 13:39:29

### 802.11n ht40 Low Channel

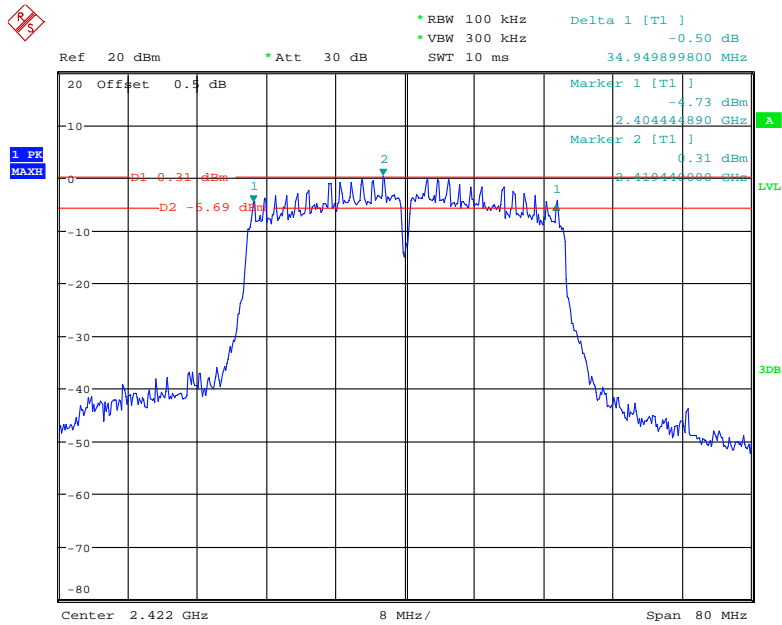


Date: 30.JAN.2018 11:11:55

### 802.11n ht40 Middle Channel

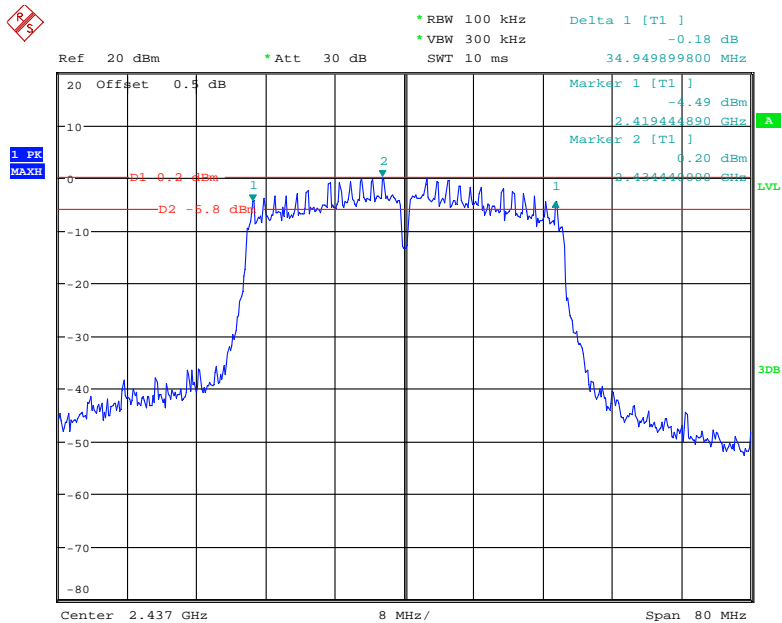

Date: 30.JAN.2018 11:14:04

### 802.11n ht40 High Channel

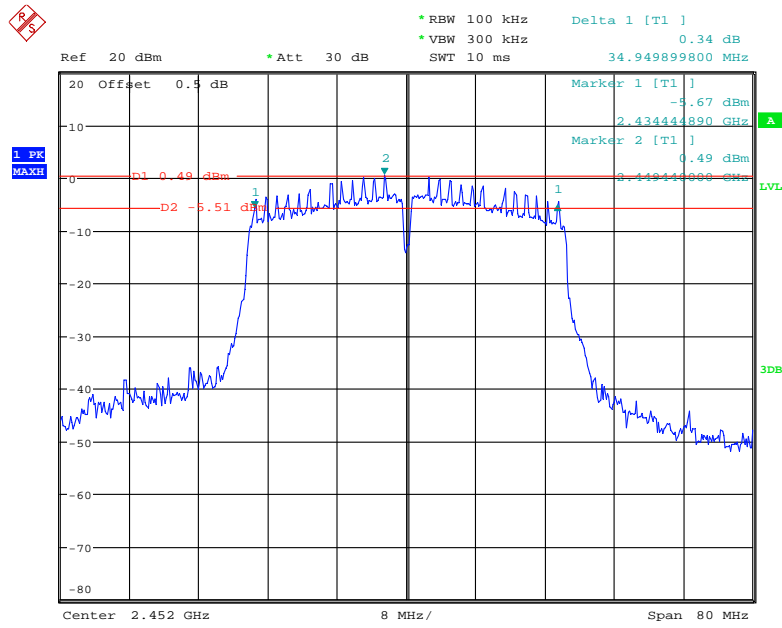

Date: 30.JAN.2018 11:18:34


## **FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER**

### **Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### **Test Procedure**

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power Meter to test Peak output power, record the result as peak power.
5. Set the power meter to test average output power, record the result as average power.



### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
Agilent	USB Wideband Power Sensor	U2021XA	MY5425009	2017-03-21	2018-03-21
Agilent	USB Wideband Power Sensor	U2021XA	MY5425009	2018-03-21	2019-03-21
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).



**Test Data****Environmental Conditions**

<b>Temperature:</b>	21.1~28.8°C
<b>Relative Humidity:</b>	39~56 %
<b>ATM Pressure:</b>	99.7~101 kPa

\* The testing was performed by Nami Quan on 2018-01-30~2018-07-21.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)				Total (dBm)	Limit (dBm)
		Chain 0	Chain 1	Chain 2	Chain 3		
802.11b	2412	20.58	21.62	18.45	20.82	/	30
	2437	20.61	21.58	18.29	20.62	/	30
	2462	20.53	21.31	17.83	20.81	/	30
802.11g	2412	23.42	24.23	21.12	23.16	/	30
	2437	23.75	24.21	21.79	23.71	/	30
	2462	23.04	23.45	21.35	22.93	/	30
802.11n ht20	2412	20.06	20.25	18.15	19.98	25.71	30
	2437	20.29	20.38	18.50	20.06	25.89	30
	2462	19.75	20.07	17.58	19.26	25.28	30
802.11n ht40	2422	18.82	19.68	17.35	19.13	24.85	30
	2437	20.28	21.93	18.65	20.57	26.53	30
	2452	19.21	19.70	19.65	19.26	25.48	30

Note: the maximum antenna gain is 5 dBi, the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

So:

Directional gain =  $G_{ANT} + \text{Array Gain} = 5\text{dBi} < 6\text{dBi}$

## **FCC §15.247(d)– 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**

### **Applicable Standard**

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	21.1~28.8°C
<b>Relative Humidity:</b>	39~56 %
<b>ATM Pressure:</b>	99.7~101 kPa


\* The testing was performed by Nami Quan on 2018-01-30~2018-07-21.

Test mode: Transmitting

Test Result: Compliant. Please refer to following plots.


Chain 0:

**802.11b: Band Edge, Left Side**

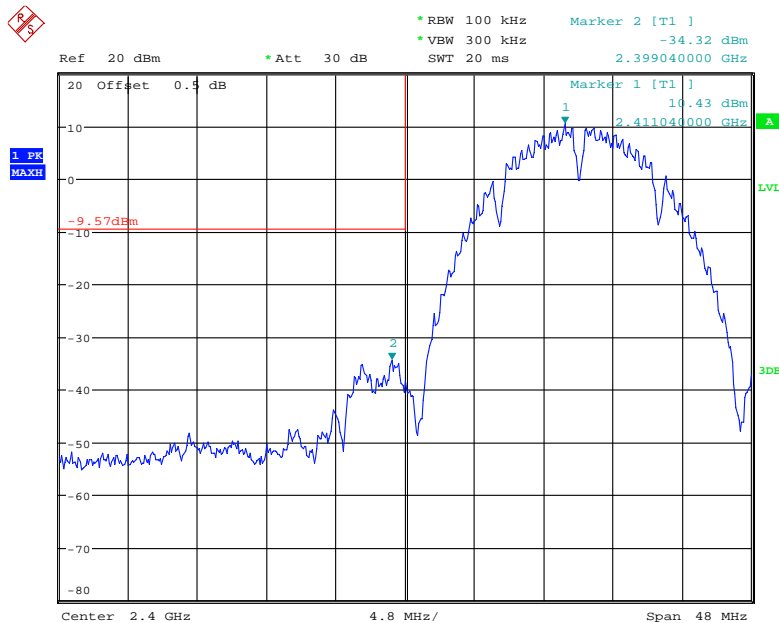


Date: 30.JAN.2018 10:57:31

### 802.11b: Band Edge, Right Side

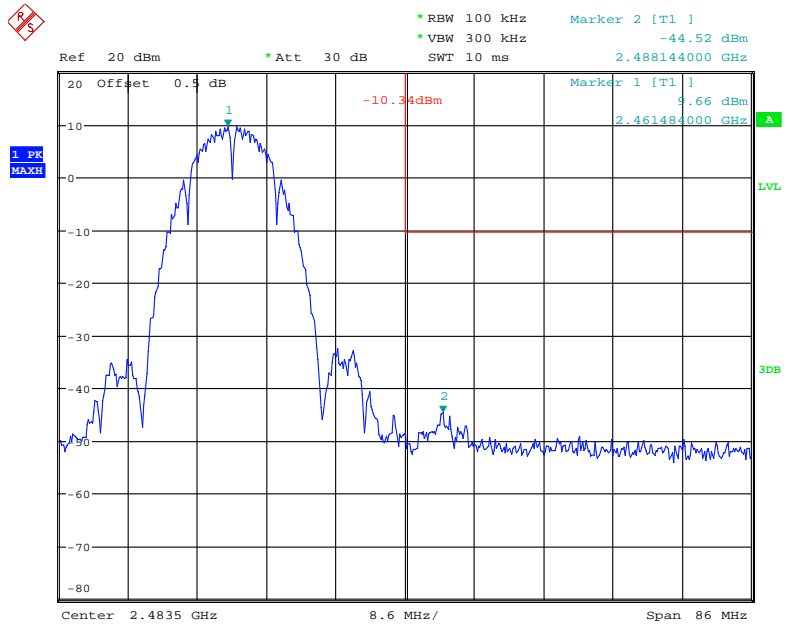


Date: 30.JAN.2018 10:54:17

### 802.11g: Band Edge, Left Side

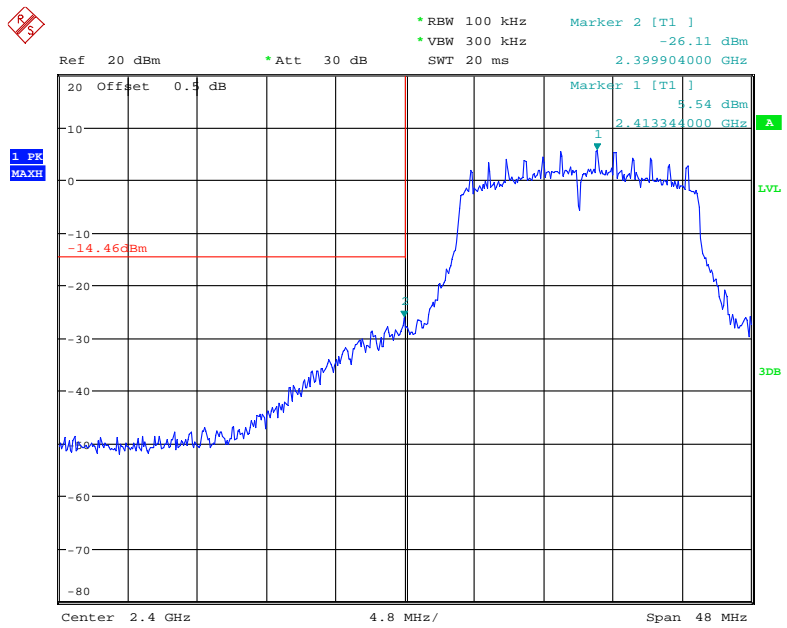


Date: 18.JUL.2018 14:31:51

### 802.11g: Band Edge, Right Side

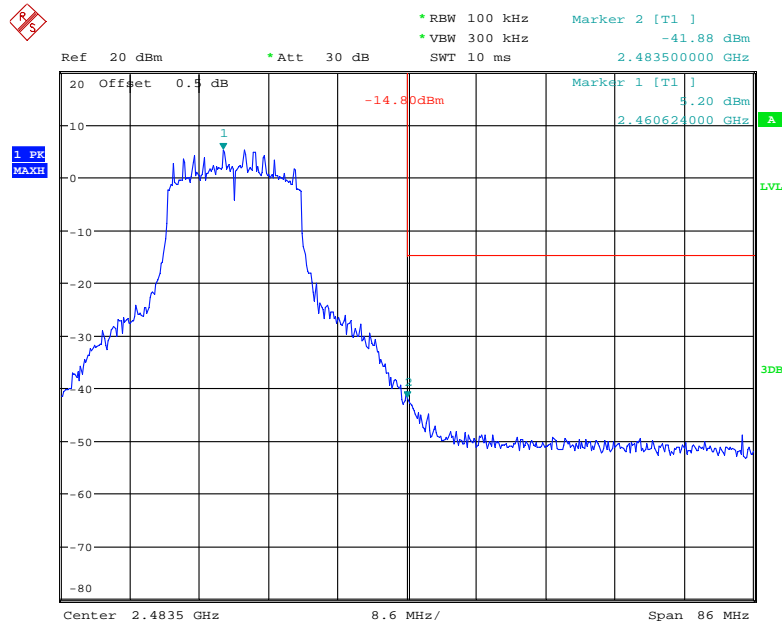


Date: 18.JUL.2018 14:30:32

### 802.11n ht20 Band Edge, Left Side

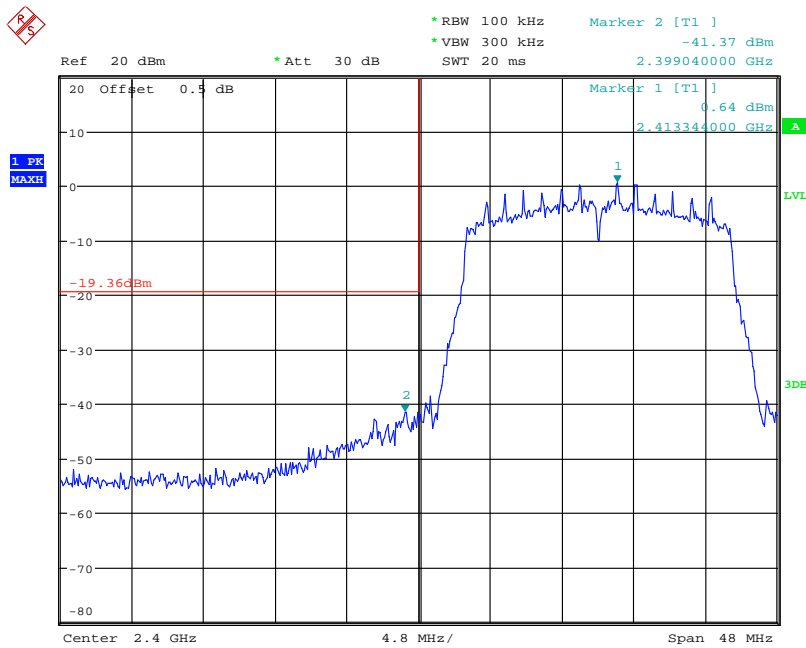


Date: 18.JUL.2018 14:27:28

**802.11n ht20 Band Edge, Right Side**

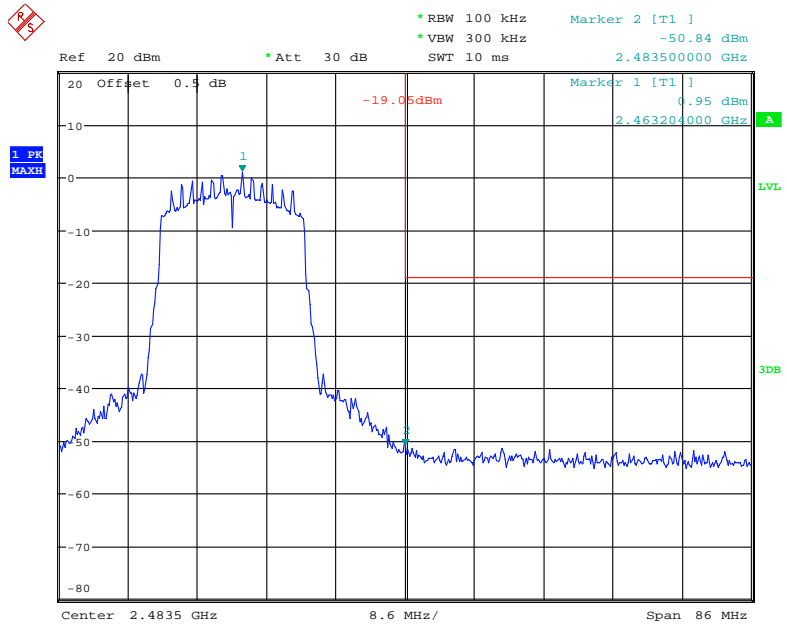


Date: 18.JUL.2018 14:29:01

**802.11n ht40: Band Edge, Left Side**

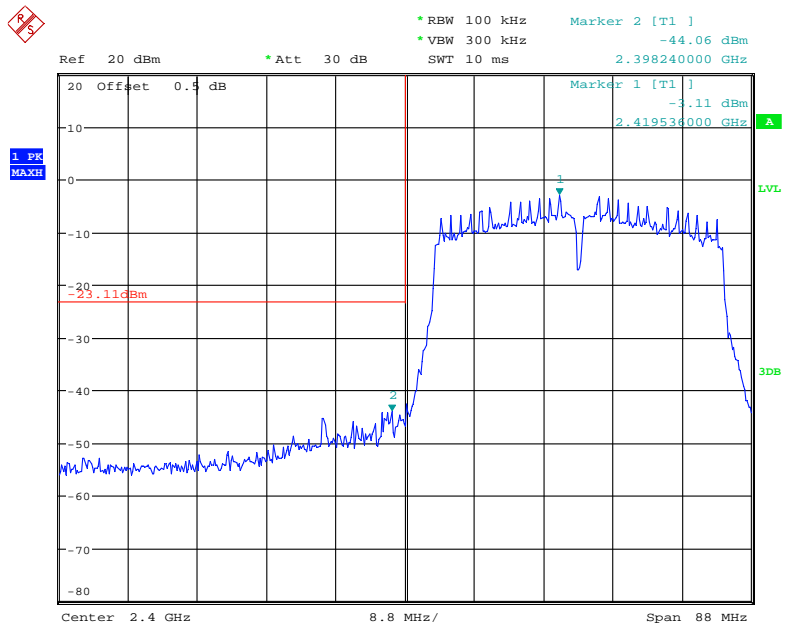

Date: 18.JUL.2018 14:26:02


### 802.11n ht40 Band Edge, Right Side

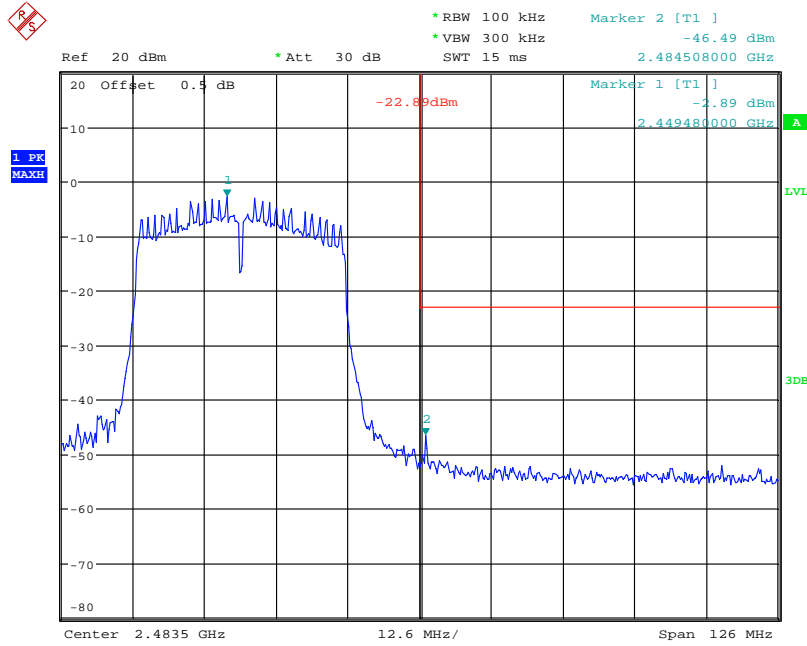

Date: 18.JUL.2018 14:24:49


Chain 1:

### 802.11b: Band Edge, Left Side

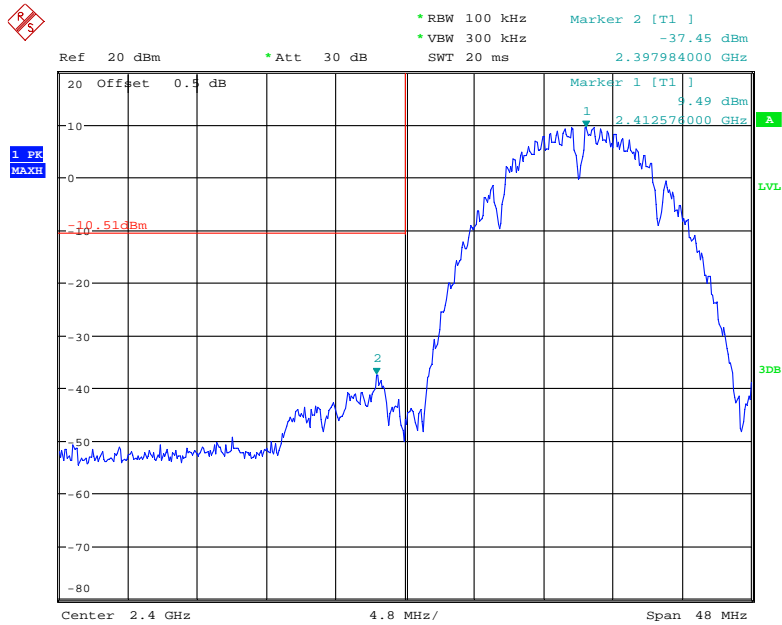


Date: 30.JAN.2018 11:36:23

### 802.11b: Band Edge, Right Side

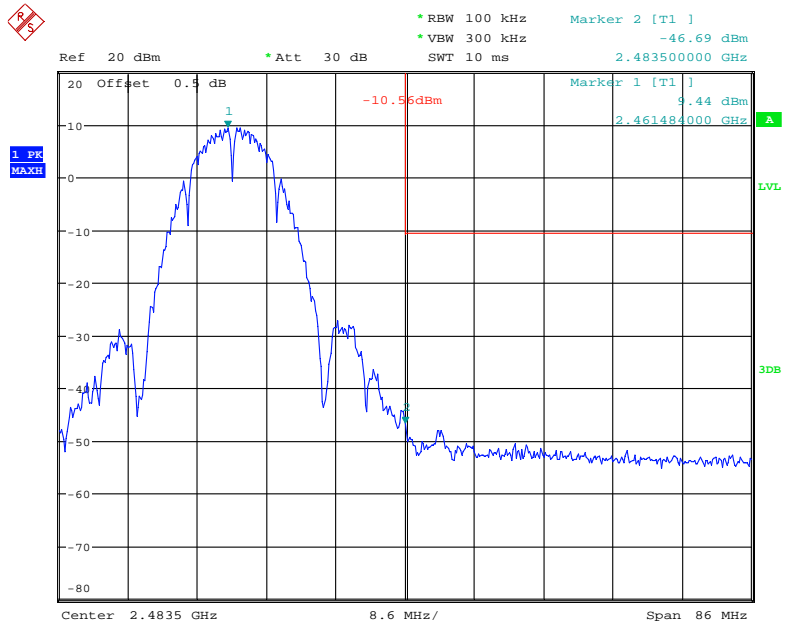

Date: 30.JAN.2018 11:39:25


### 802.11g: Band Edge, Left Side

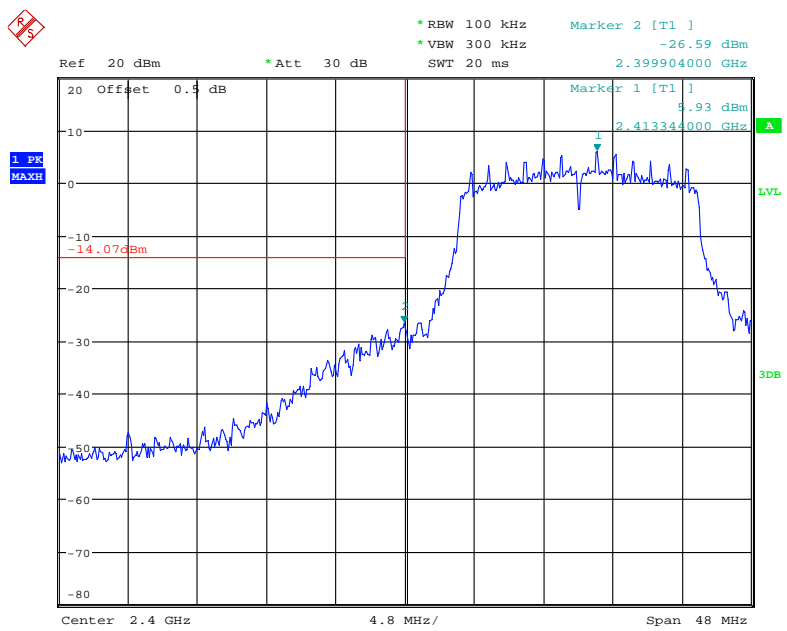

Date: 18.JUL.2018 14:34:14




### 802.11g: Band Edge, Right Side

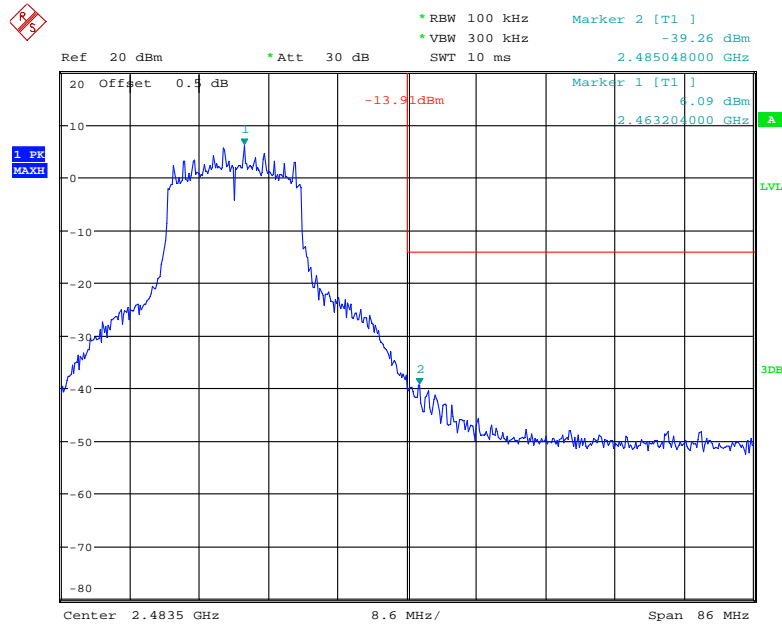


Date: 18.JUL.2018 14:35:08

### 802.11n ht20 Band Edge, Left Side

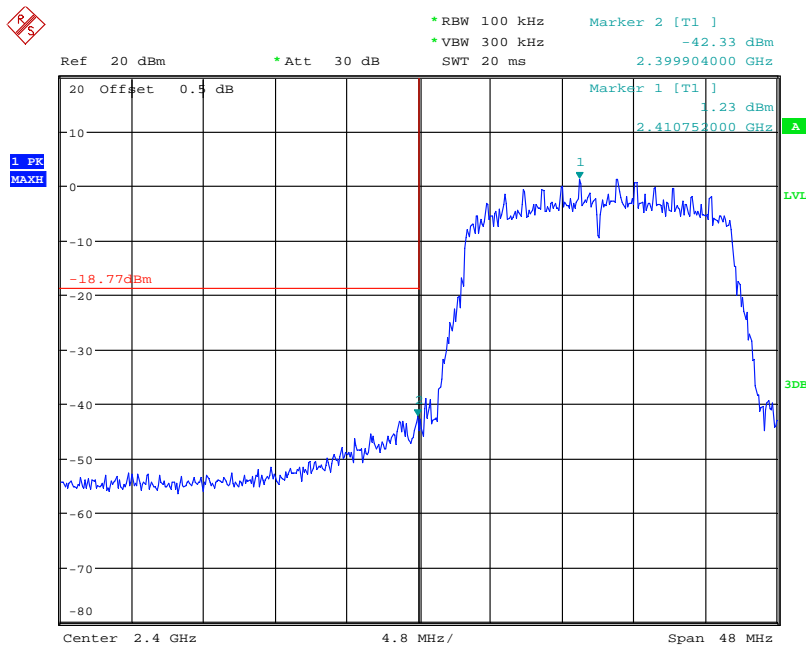


Date: 18.JUL.2018 14:37:29

### 802.11n ht20 Band Edge, Right Side

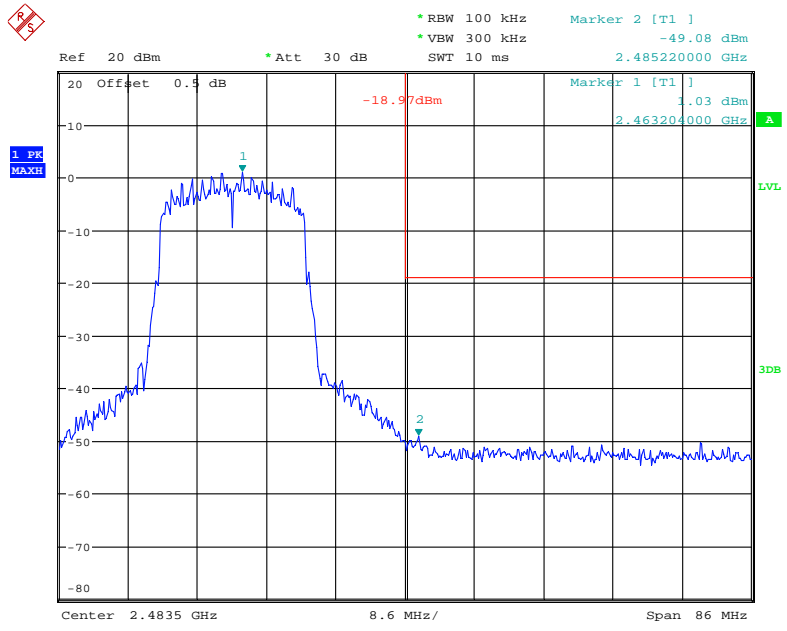


Date: 18.JUL.2018 14:36:37

### 802.11n ht40: Band Edge, Left Side

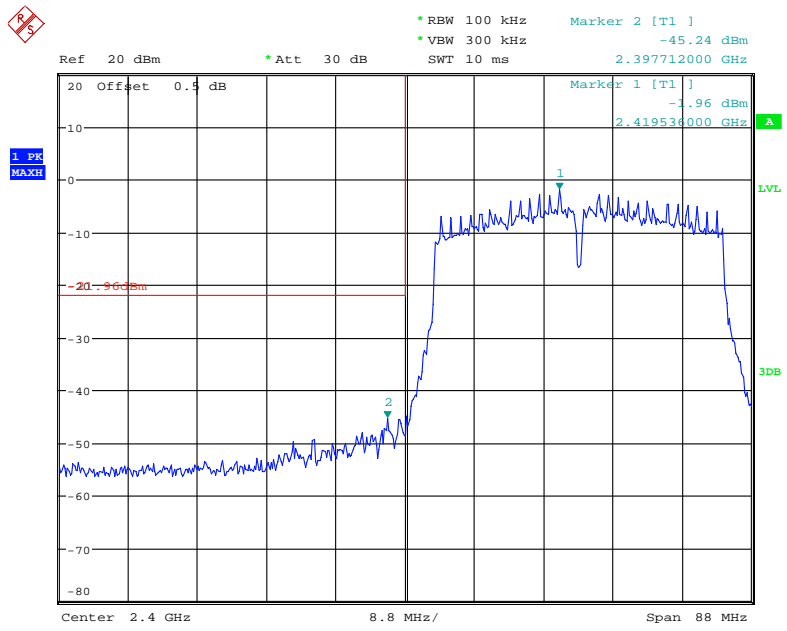

Date: 18.JUL.2018 14:39:34


### 802.11n ht40 Band Edge, Right Side

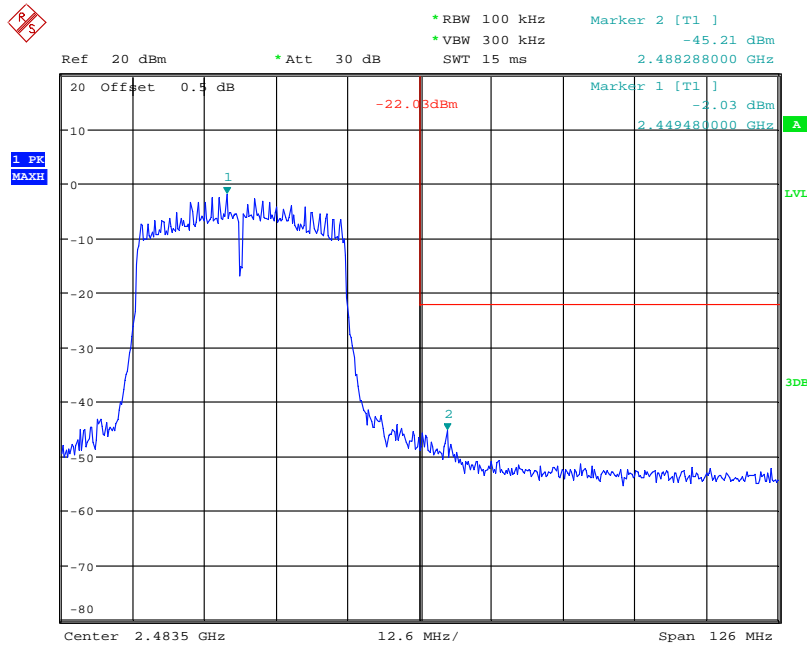

Date: 18.JUL.2018 14:40:51


Chain 2:

### 802.11b: Band Edge, Left Side

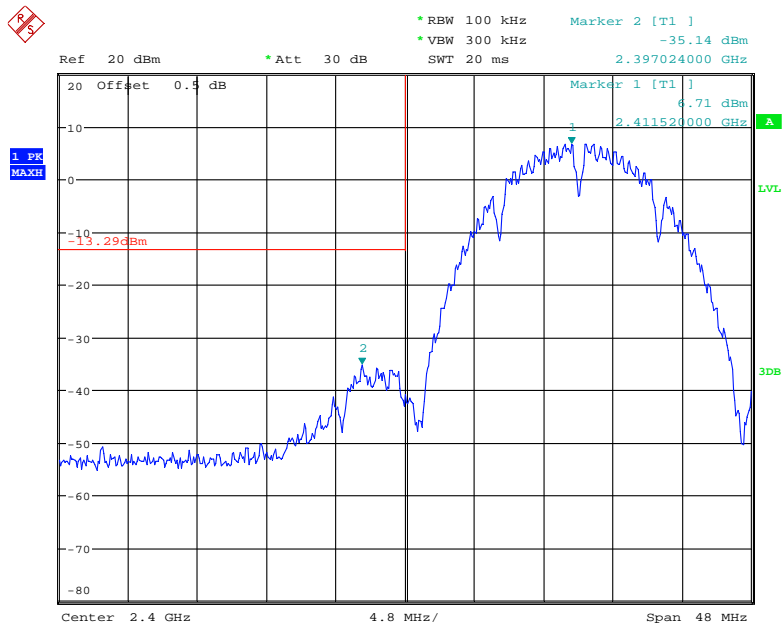


Date: 18.JUL.2018 14:00:46

### 802.11b: Band Edge, Right Side

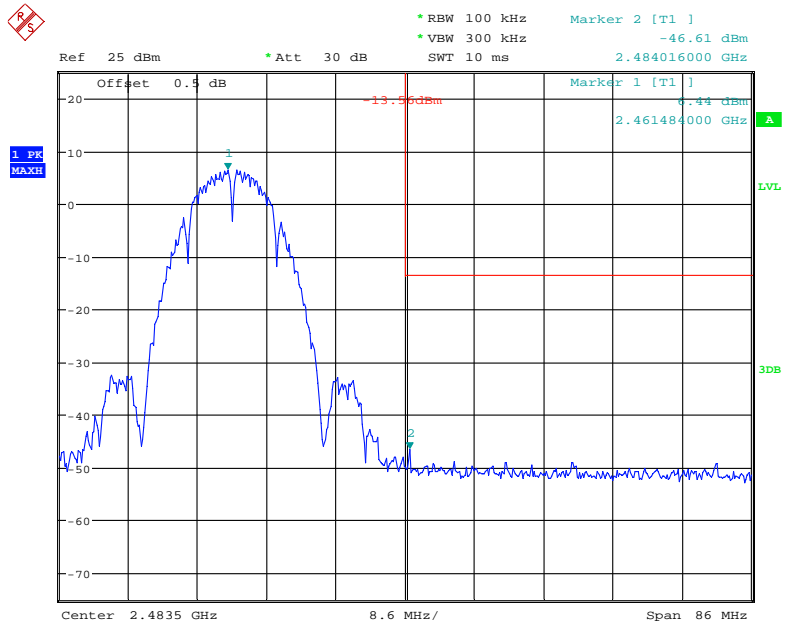


Date: 18.JUL.2018 13:56:20

### 802.11g: Band Edge, Left Side

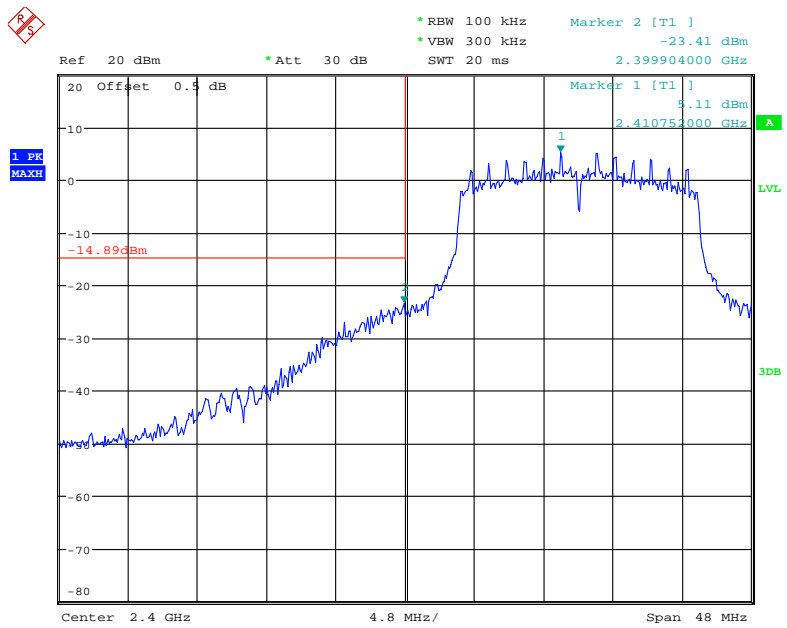


Date: 18.JUL.2018 14:08:07

### 802.11g: Band Edge, Right Side

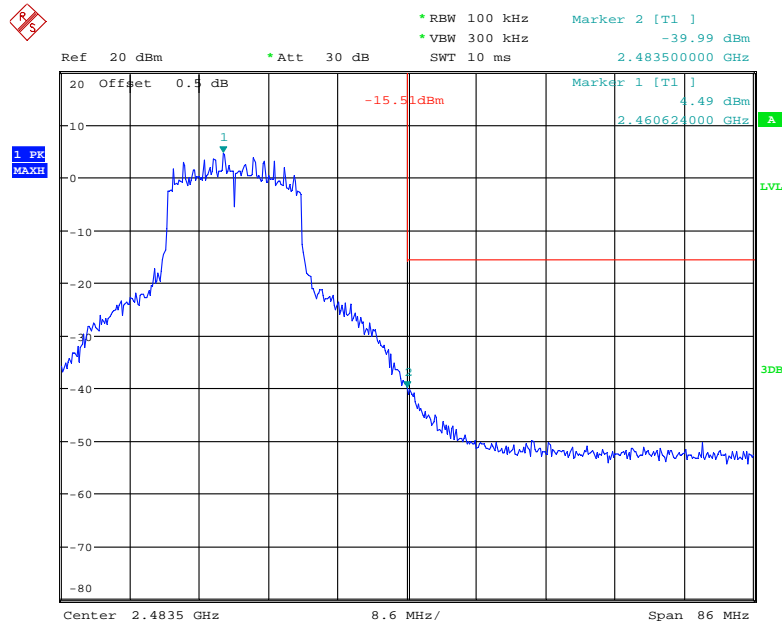


Date: 18.JUL.2018 14:05:34

### 802.11n ht20 Band Edge, Left Side

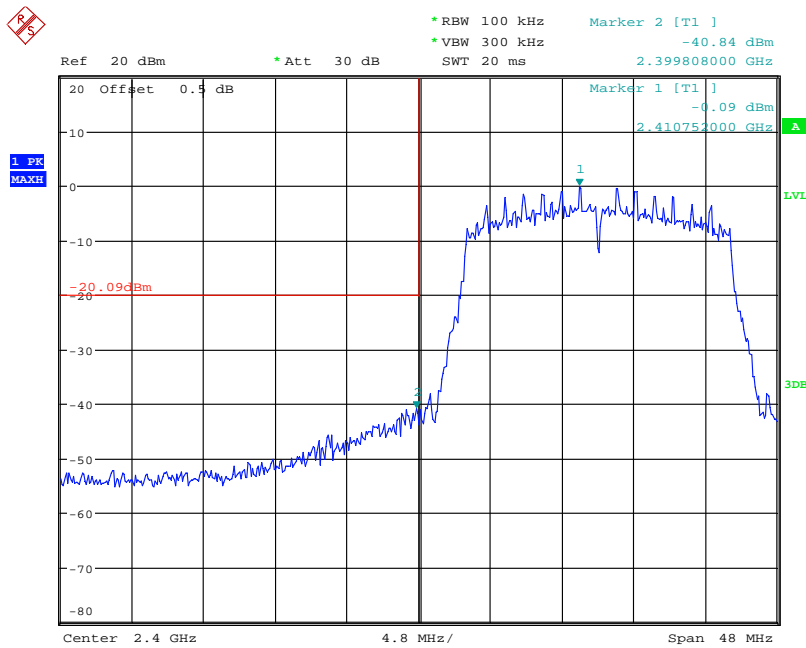


Date: 18.JUL.2018 14:13:20

**802.11n ht20 Band Edge, Right Side**

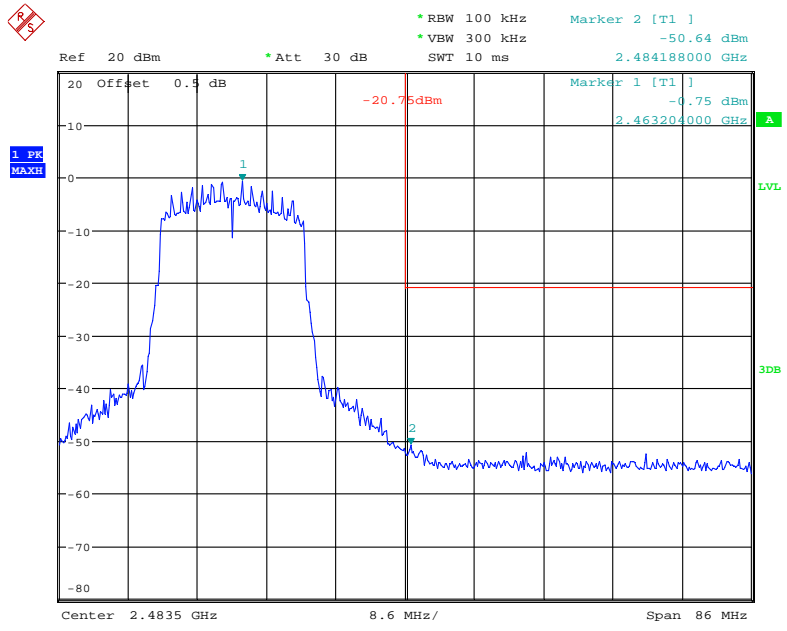


Date: 18.JUL.2018 14:12:36

**802.11n ht40: Band Edge, Left Side**

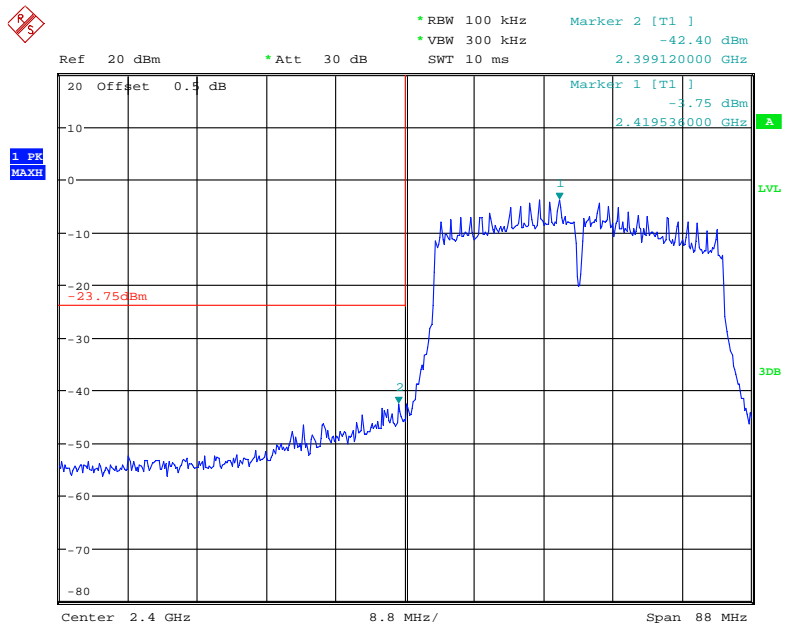

Date: 18.JUL.2018 14:14:55


### 802.11n ht40 Band Edge, Right Side

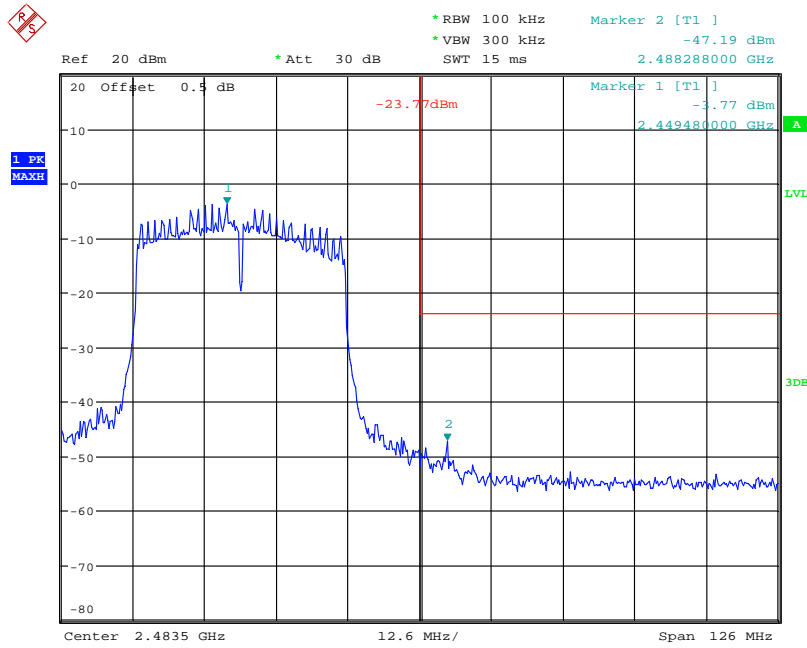

Date: 18.JUL.2018 14:23:07


Chain 3:

### 802.11b: Band Edge, Left Side

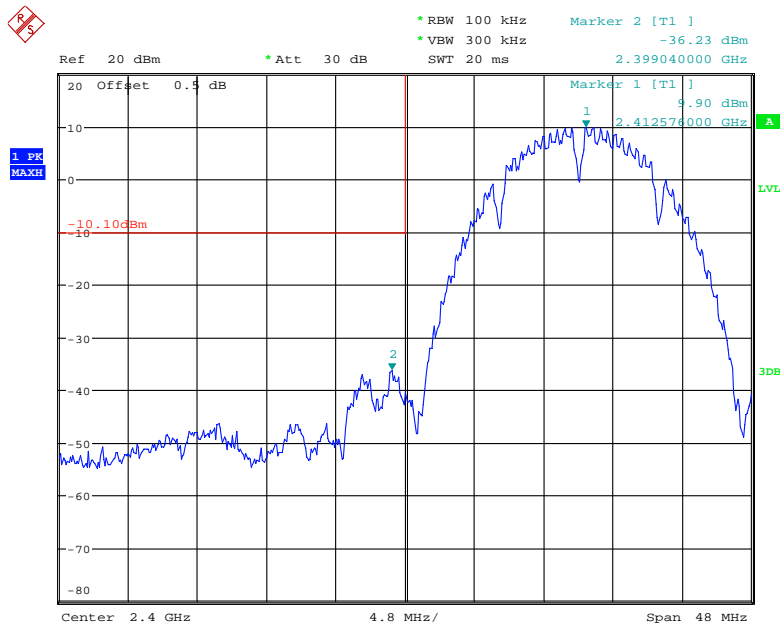


Date: 30.JAN.2018 13:25:16

### 802.11b: Band Edge, Right Side

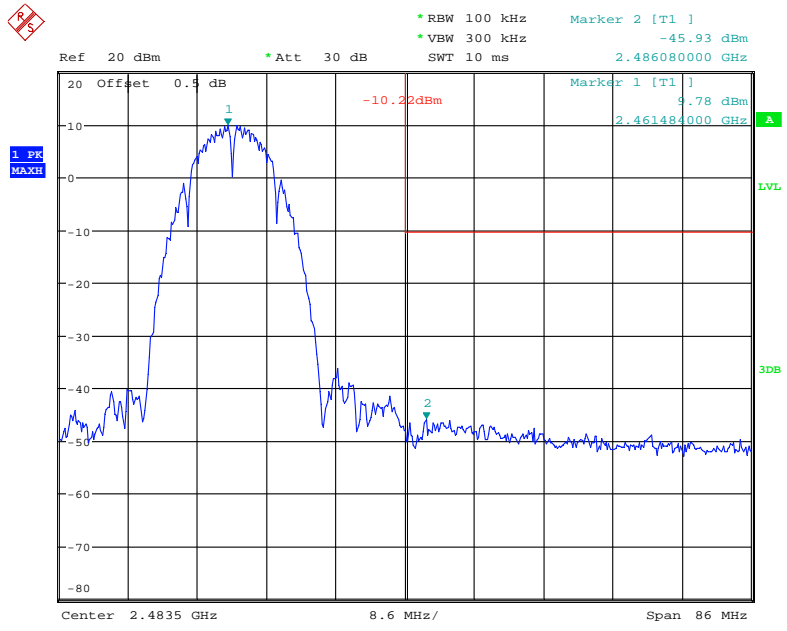

Date: 30.JAN.2018 13:30:14


### 802.11g: Band Edge, Left Side

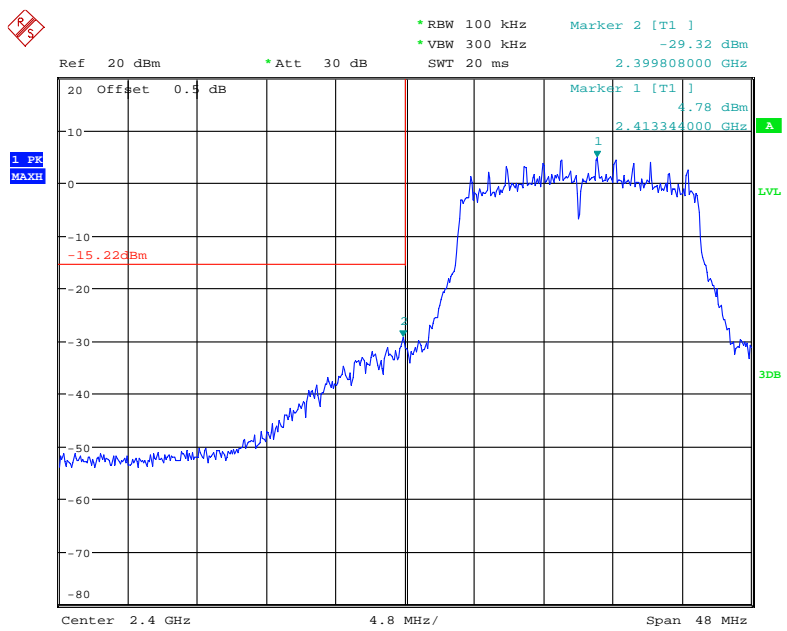

Date: 18.JUL.2018 14:50:40




### 802.11g: Band Edge, Right Side

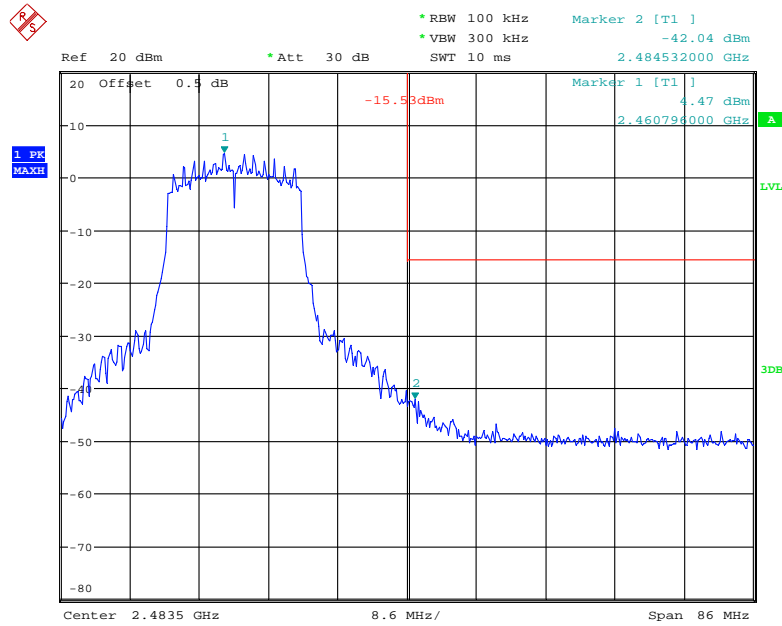


Date: 18.JUL.2018 14:51:50

### 802.11n ht20 Band Edge, Left Side

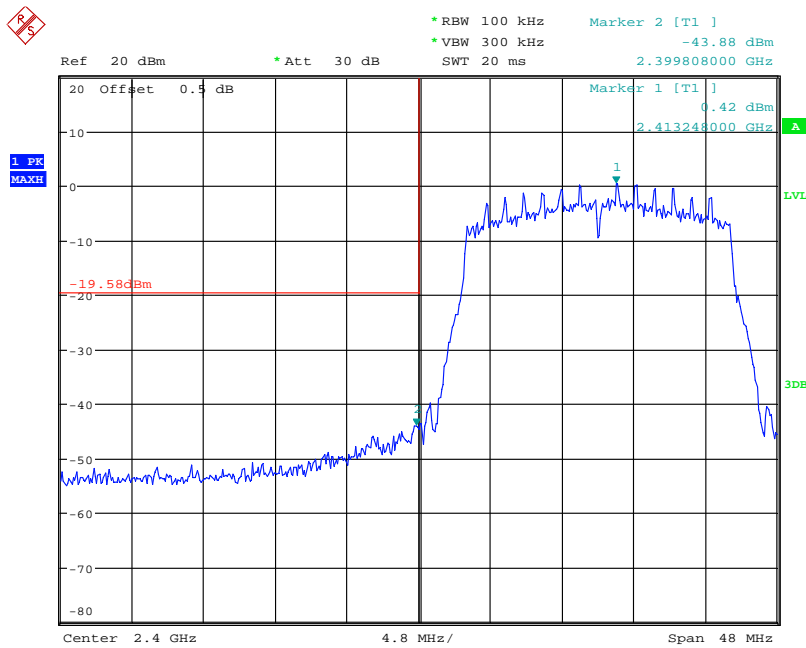


Date: 18.JUL.2018 14:45:22

### 802.11n ht20 Band Edge, Right Side

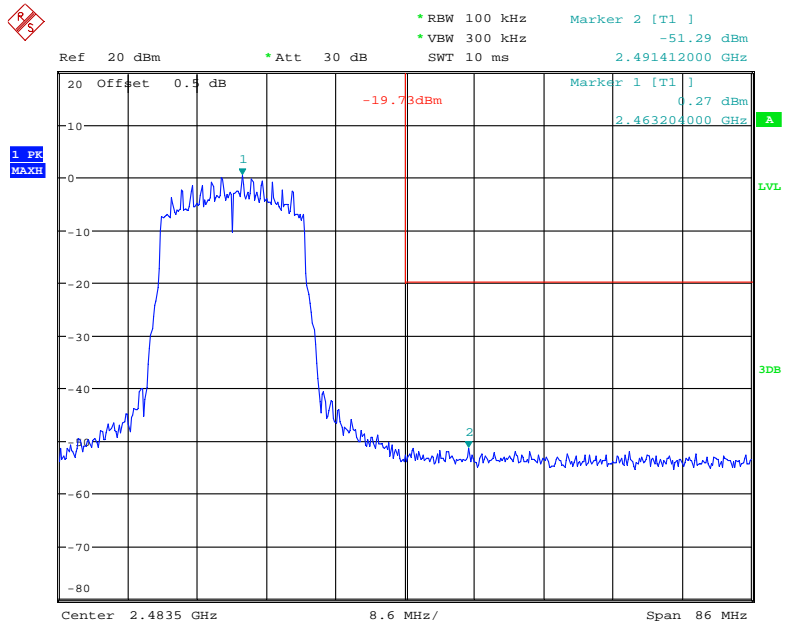


Date: 18.JUL.2018 14:48:06

### 802.11n ht40: Band Edge, Left Side

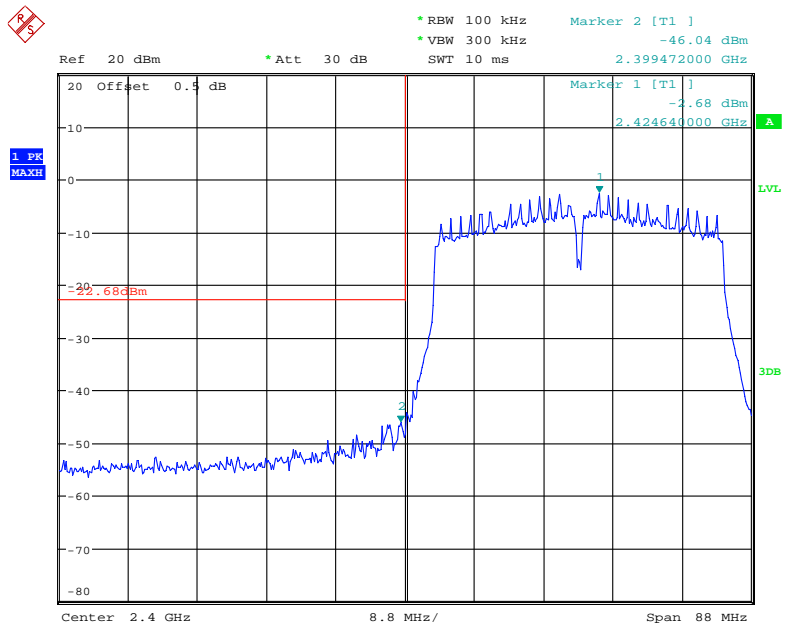

Date: 18.JUL.2018 14:42:59

### 802.11n ht40 Band Edge, Right Side

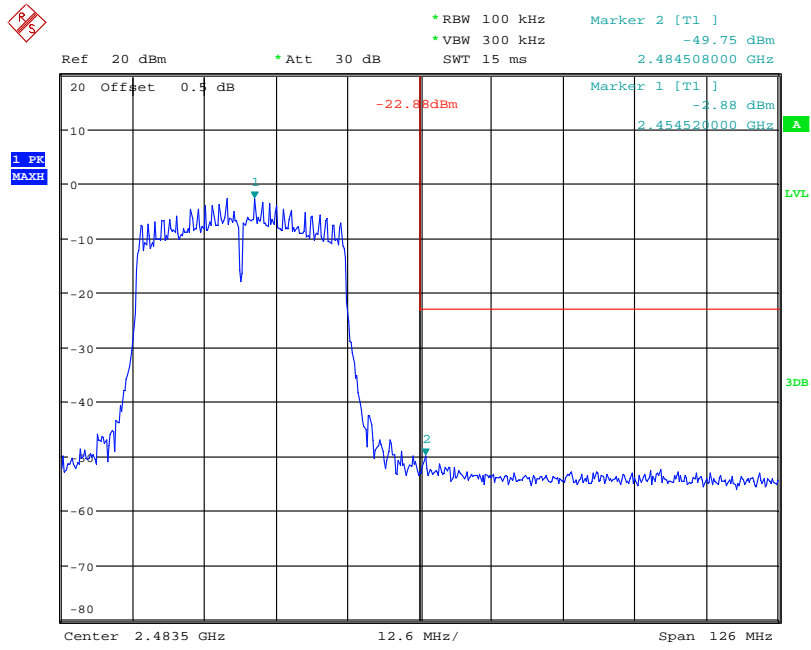

Date: 18.JUL.2018 14:41:55

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2018-01-04	2019-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	21.1~28.8°C
<b>Relative Humidity:</b>	39~56 %
<b>ATM Pressure:</b>	99.7~101 kPa

\* The testing was performed by Nami Quan on 2018-01-30~2018-07-21.

**Test Result:** Compliance

*Test Mode:* Transmitting

*Test Result:* Compliant. Please refer to the following table and plots

Test mode	Frequency (MHz)	Conducted Power Spectral Density (dBm/3kHz)				Total (dBm/3kHz)	Limit (dBm/3kHz)
		Chain 0	Chain 1	Chain 2	Chain 3		
802.11b	2412	-6.12	-5.94	-9.02	-5.99	/	≤8
	2437	-6.52	-7.09	-9.20	-5.90	/	≤8
	2462	-6.74	-6.65	-9.99	-5.70	/	≤8
802.11g	2412	-10.04	-10.73	-11.73	-11.68	/	≤8
	2437	-9.64	-9.78	-10.29	-10.48	/	≤8
	2462	-10.91	-11.46	-11.92	-11.27	/	≤8
802.11n ht20	2412	-15.11	-15.86	-16.99	-15.81	-9.87	≤8
	2437	-14.70	-14.59	-16.13	-16.13	-9.30	≤8
	2462	-16.51	-16.05	-15.90	-15.95	-10.08	≤8
802.11n ht40	2422	-18.76	-18.28	-19.73	-17.74	-12.55	≤8
	2437	-14.52	-15.76	-15.82	-14.11	-8.97	≤8
	2452	-19.57	-17.94	-19.37	-19.39	-12.99	≤8

Note: the maximum antenna gain is 5 dBi. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:


$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 5 + 10 * \log(4/4) = 5 \text{ dBi}$$


**Chain 0:**

**Power Spectral Density, 802.11b Low Channel**

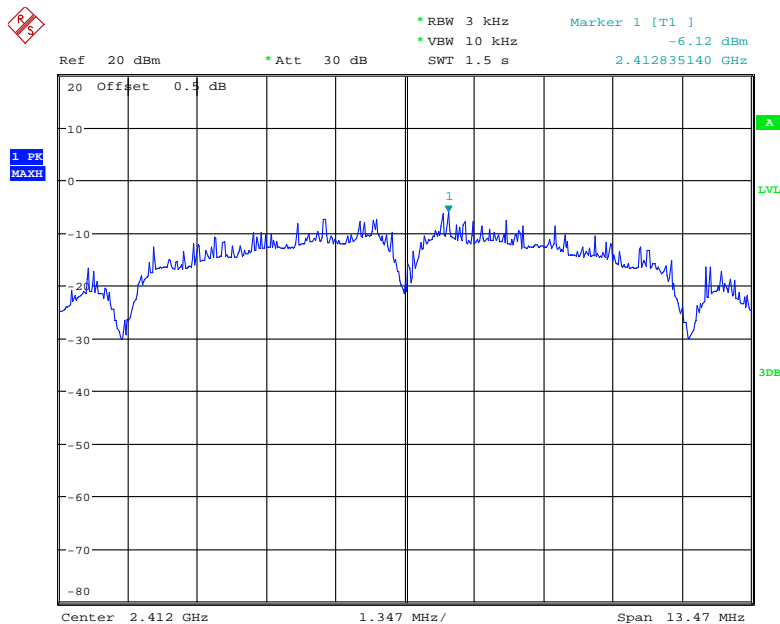


Date: 30.JAN.2018 10:57:13

### Power Spectral Density, 802.11b Middle Channel

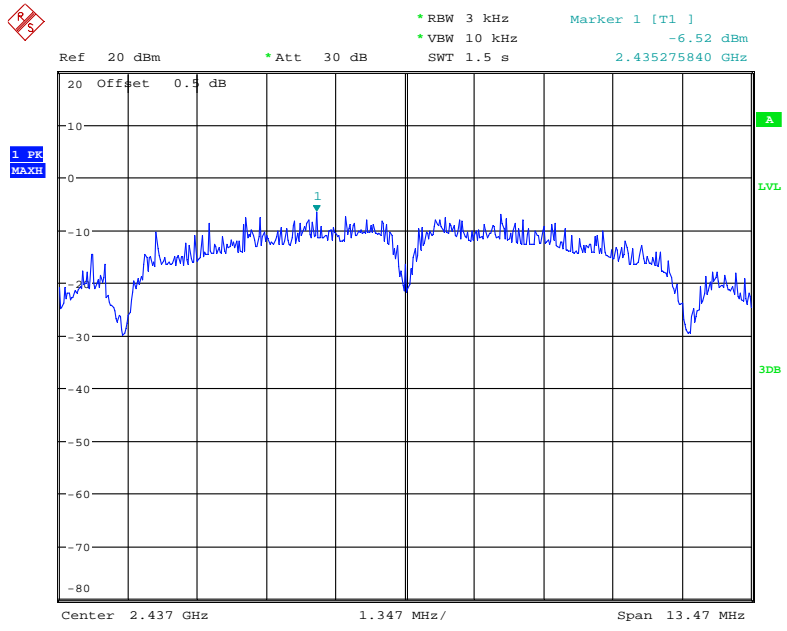


Date: 30.JAN.2018 10:58:21

### Power Spectral Density, 802.11b High Channel

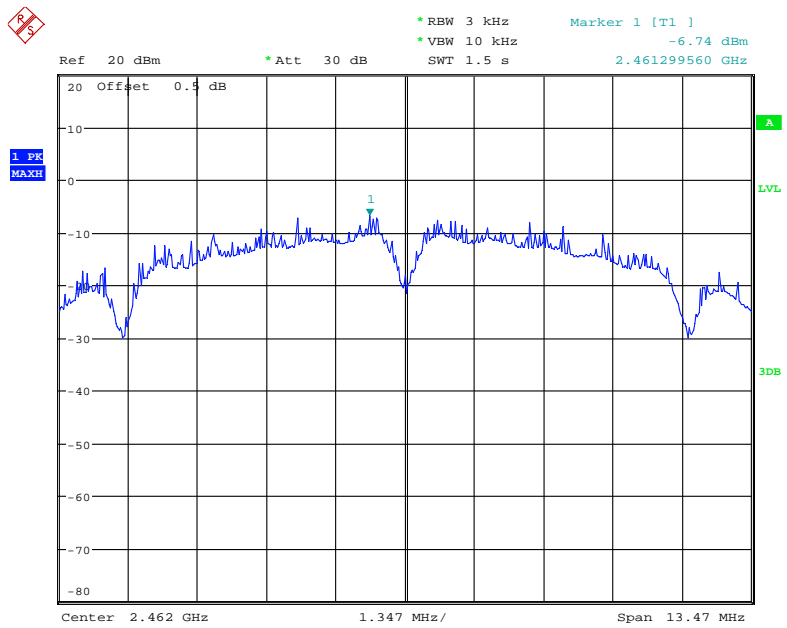


Date: 30.JAN.2018 10:54:00

### Power Spectral Density, 802.11g Low Channel

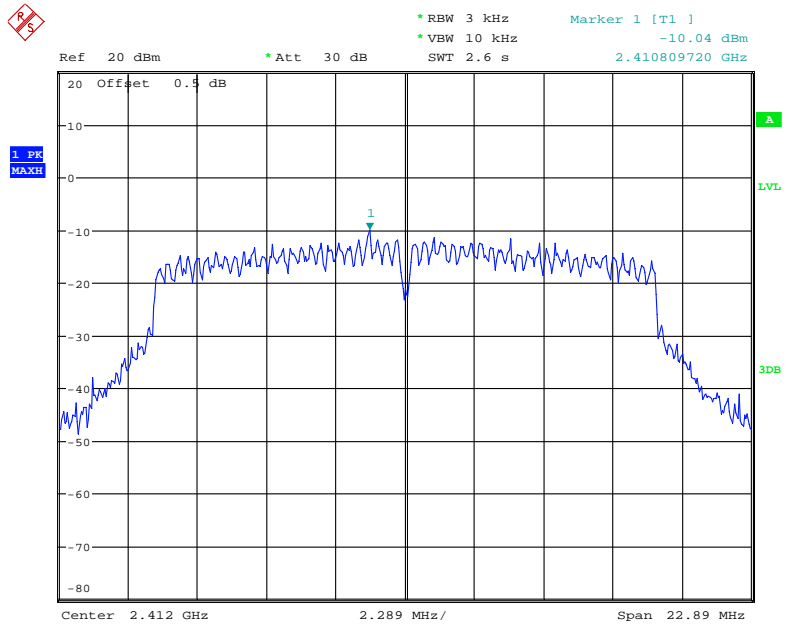


Date: 21.JUL.2018 15:30:41

### Power Spectral Density, 802.11g Middle Channel

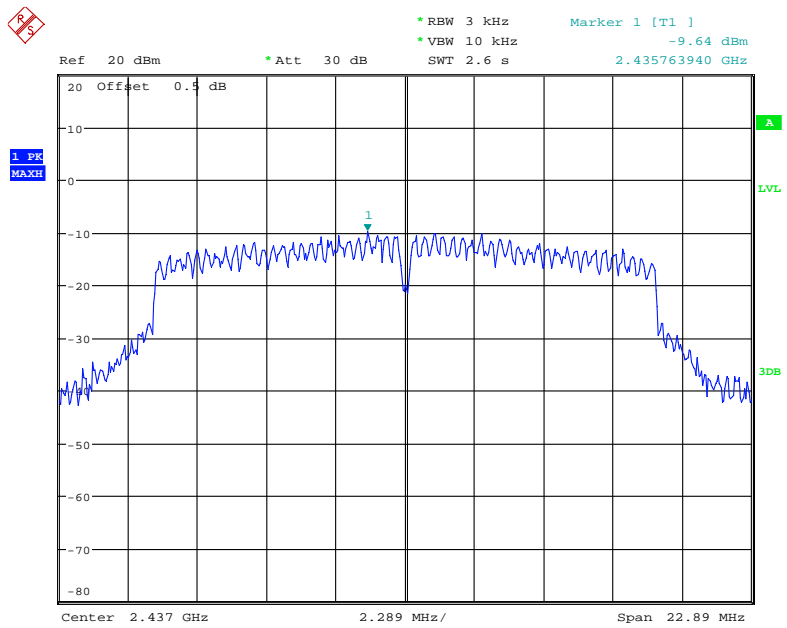


Date: 21.JUL.2018 15:31:16

### Power Spectral Density, 802.11g High Channel

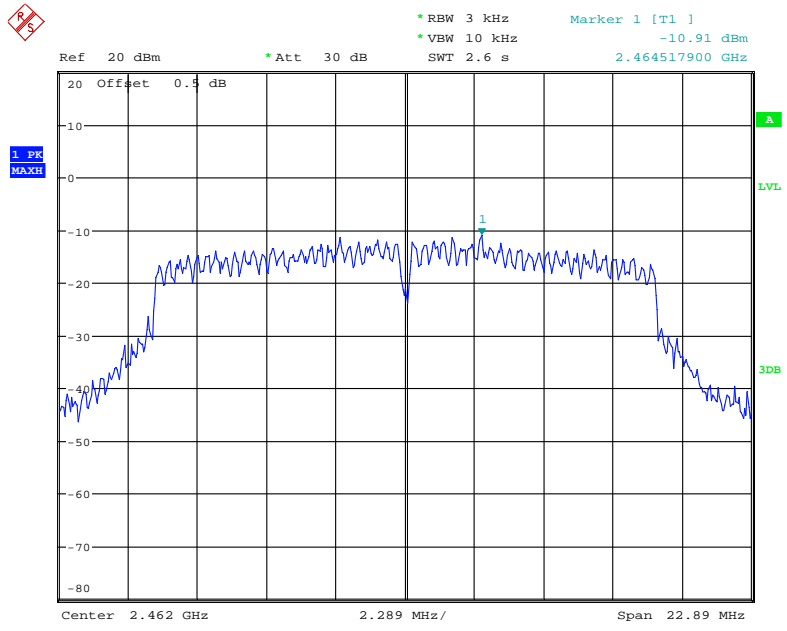

Date: 21.JUL.2018 15:32:45


### Power Spectral Density, 802.11n ht20 Low Channel

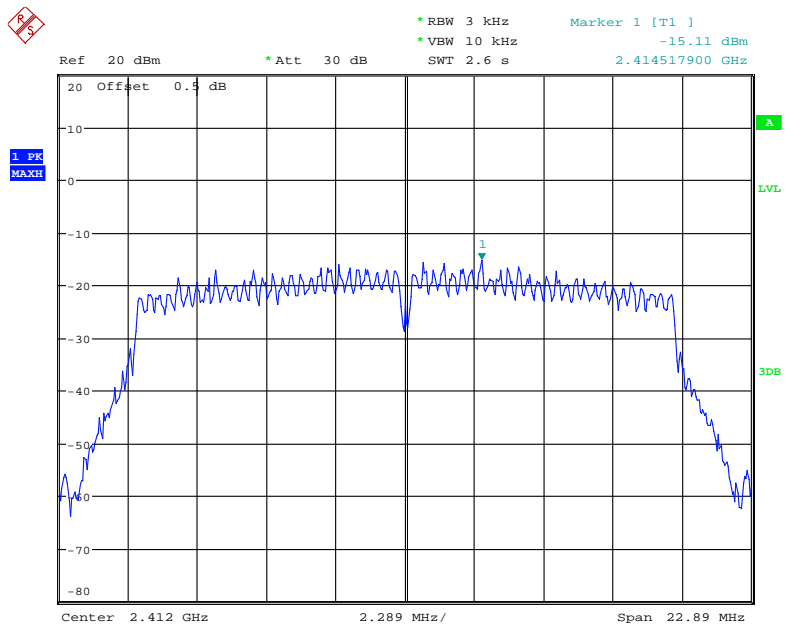

Date: 18.JUL.2018 14:27:10




### Power Spectral Density, 802.11n ht20 Middle Channel

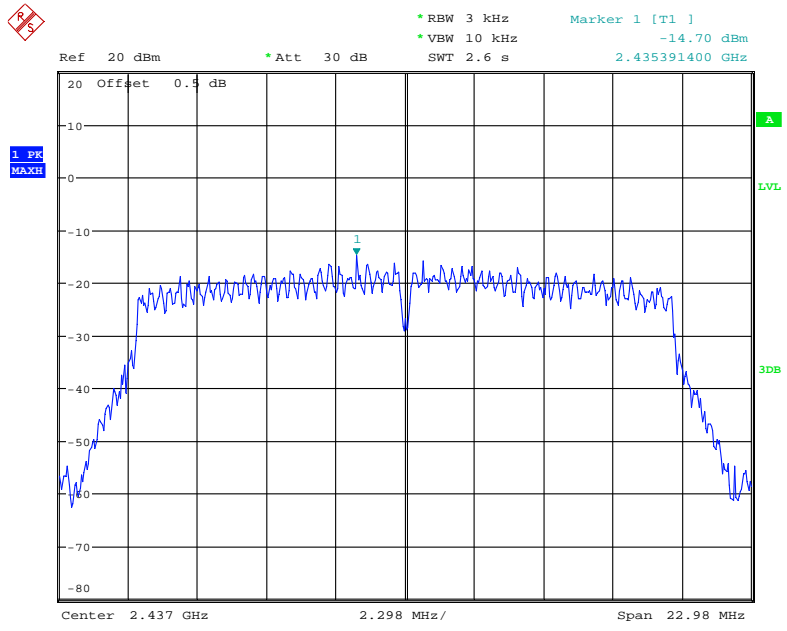


Date: 18.JUL.2018 14:28:04

### Power Spectral Density, 802.11n ht20 High Channel

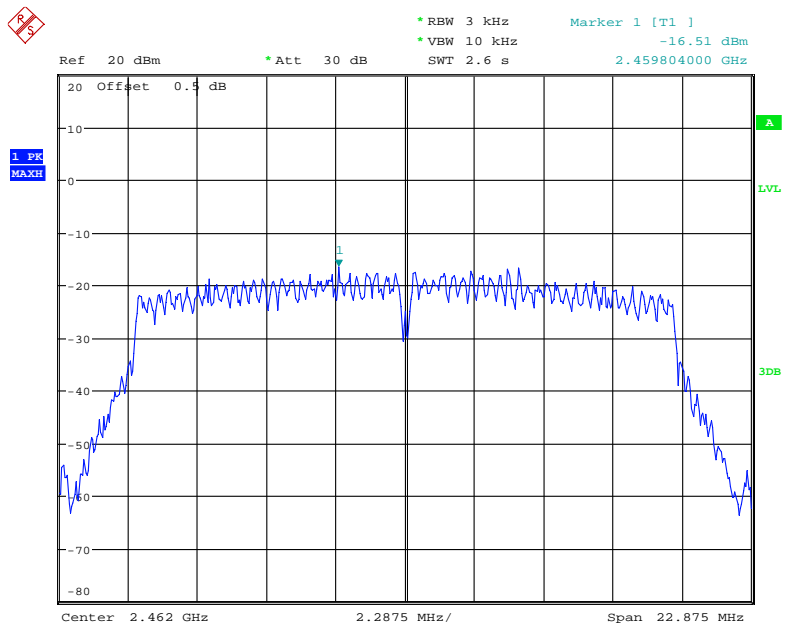


Date: 18.JUL.2018 14:28:36

### Power Spectral Density, 802.11n ht40 Low Channel

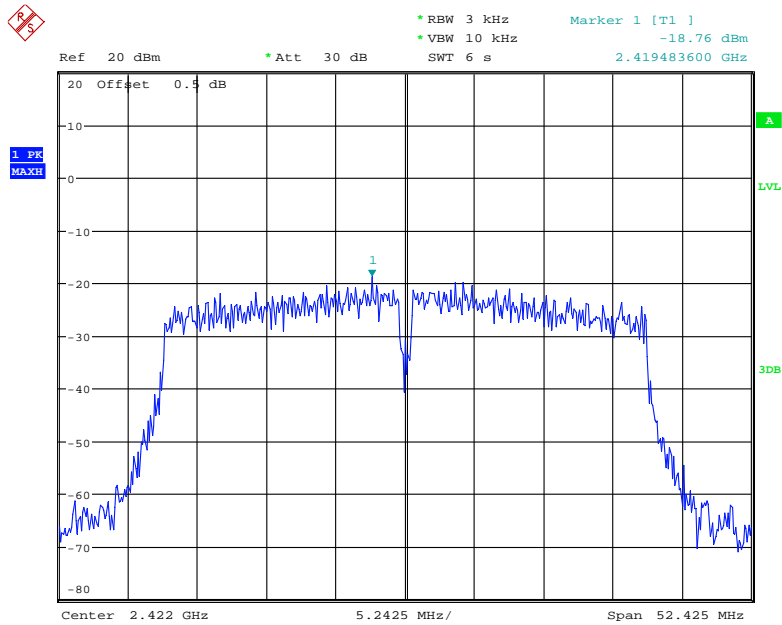


Date: 18.JUL.2018 14:25:44

### Power Spectral Density, 802.11n ht40 Middle Channel

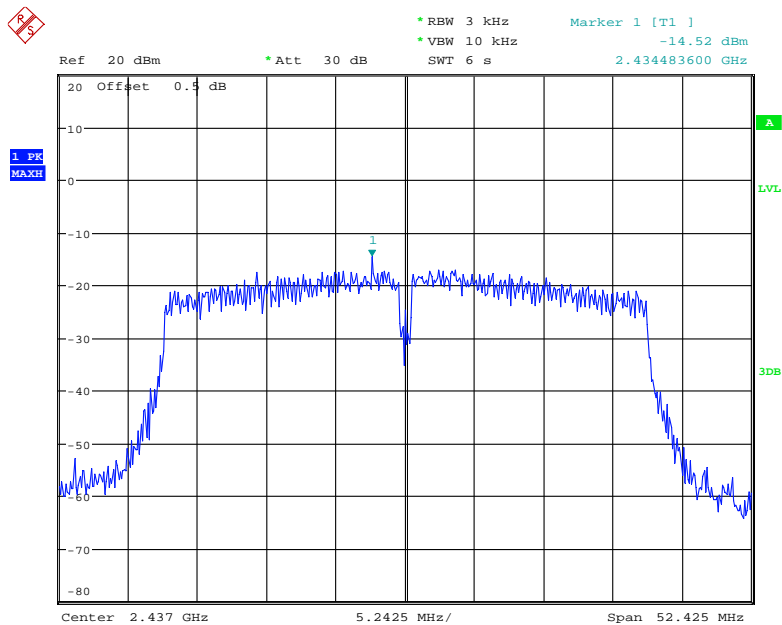

Date: 30.JAN.2018 11:15:31


### Power Spectral Density, 802.11n ht40 High Channel

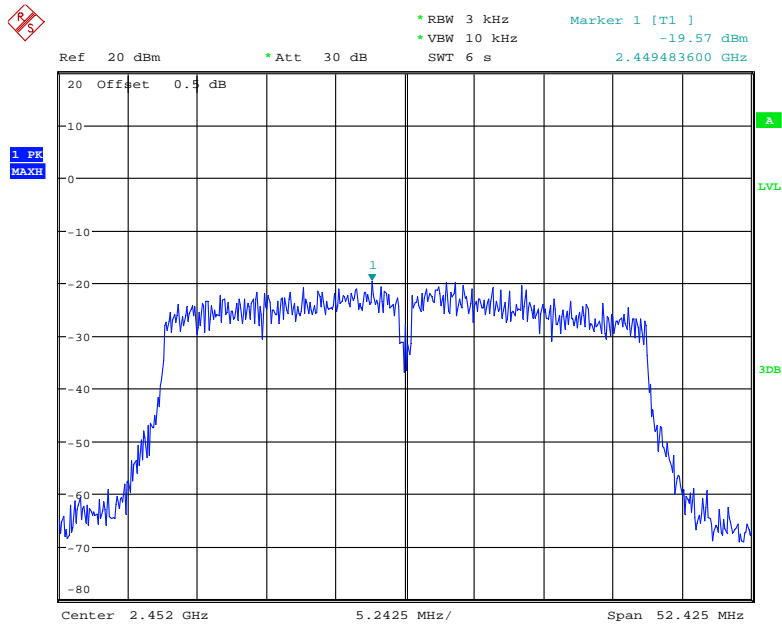

Date: 18.JUL.2018 14:24:26


### Chain 1:

### Power Spectral Density, 802.11b Low Channel

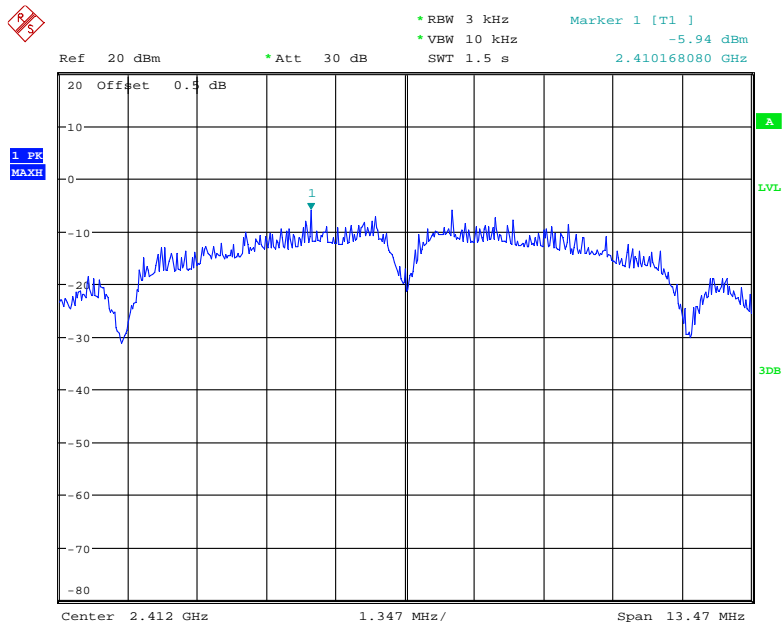


Date: 30.JAN.2018 11:36:46

### Power Spectral Density, 802.11b Middle Channel

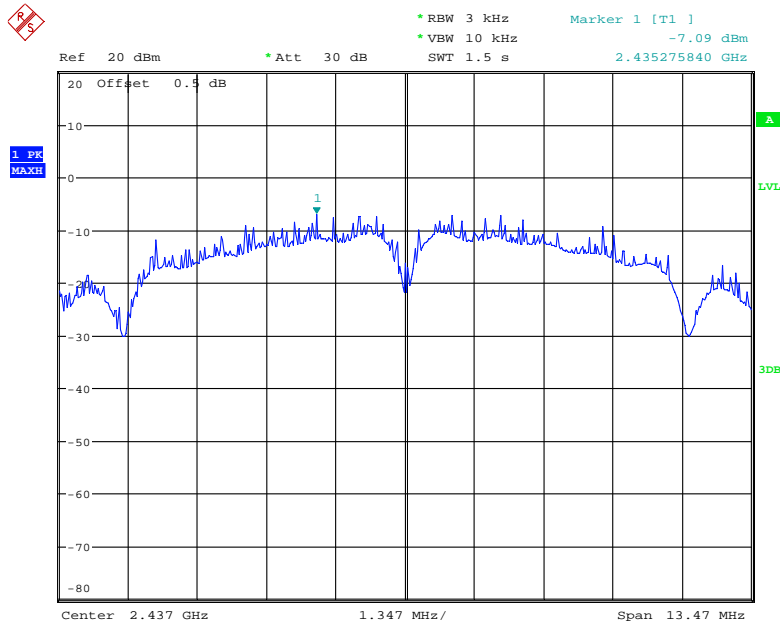


Date: 30.JAN.2018 11:37:49

### Power Spectral Density, 802.11b High Channel

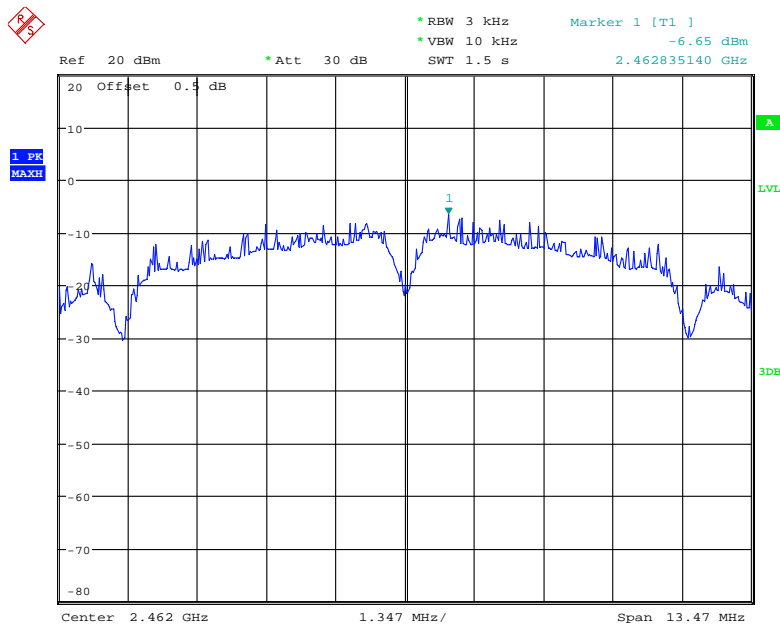


Date: 30.JAN.2018 13:34:03

### Power Spectral Density, 802.11g Low Channel

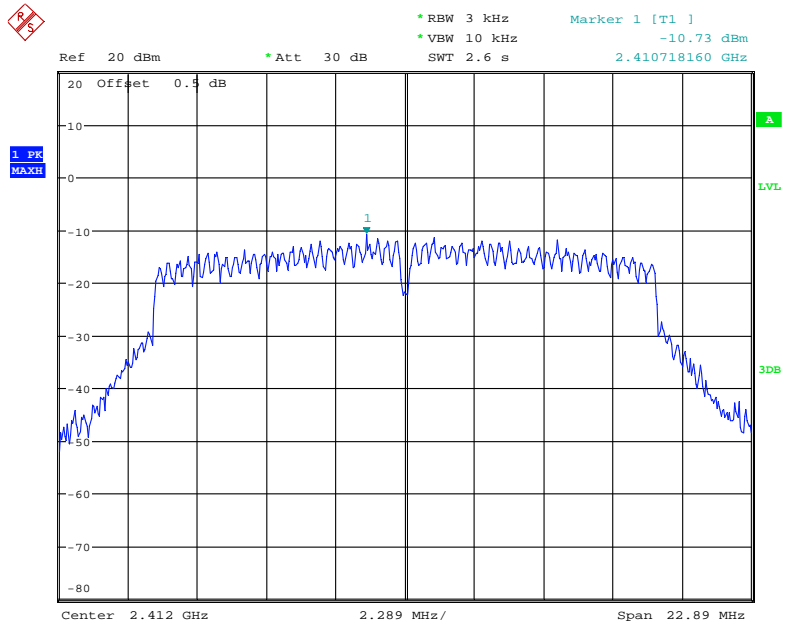


Date: 21.JUL.2018 15:37:00

### Power Spectral Density, 802.11g Middle Channel

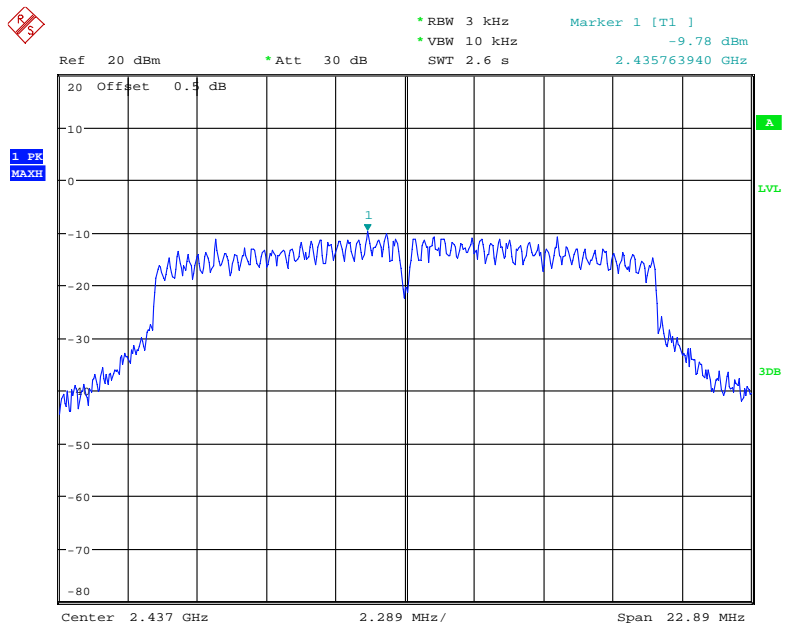


Date: 21.JUL.2018 15:35:41

### Power Spectral Density, 802.11g High Channel

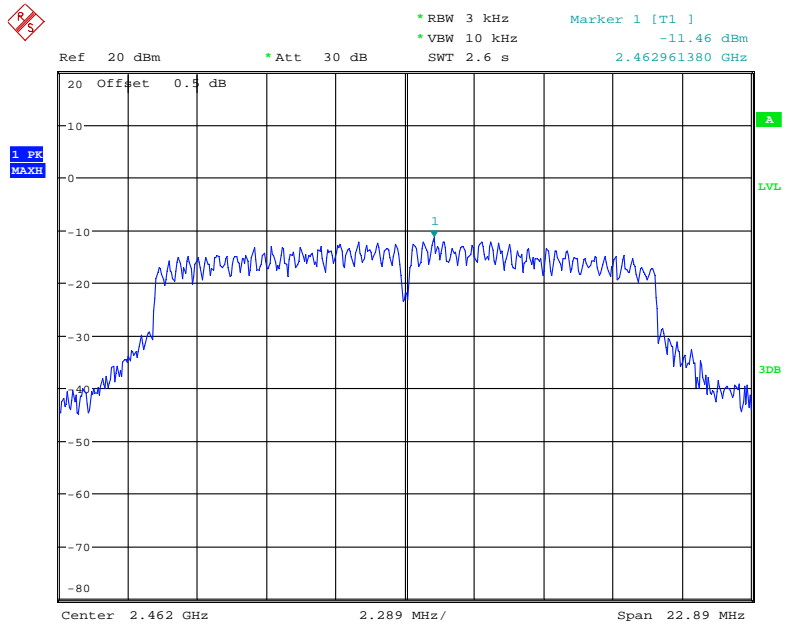


Date: 21.JUL.2018 15:35:00

### Power Spectral Density, 802.11n ht20 Low Channel

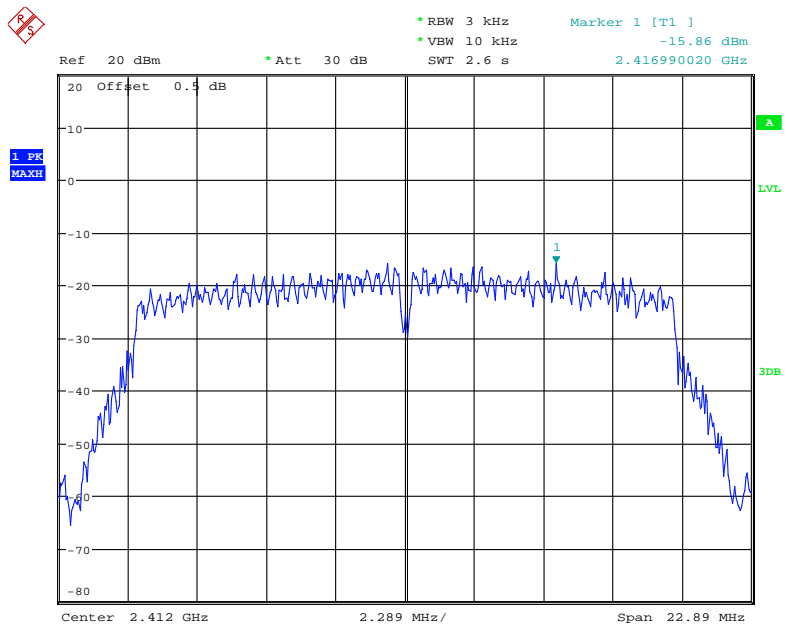


Date: 18.JUL.2018 14:37:06

### Power Spectral Density, 802.11n ht20 Middle Channel

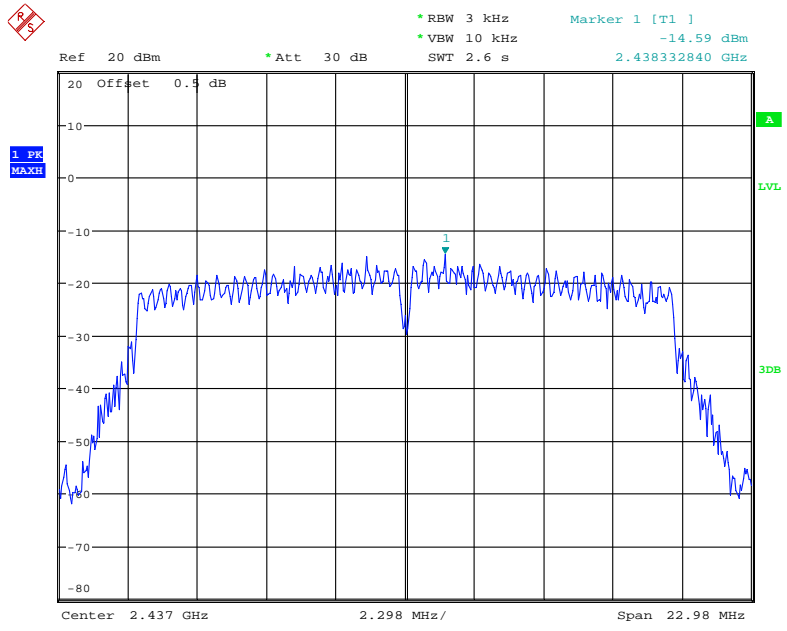


Date: 18.JUL.2018 14:38:04

### Power Spectral Density, 802.11n ht20 High Channel

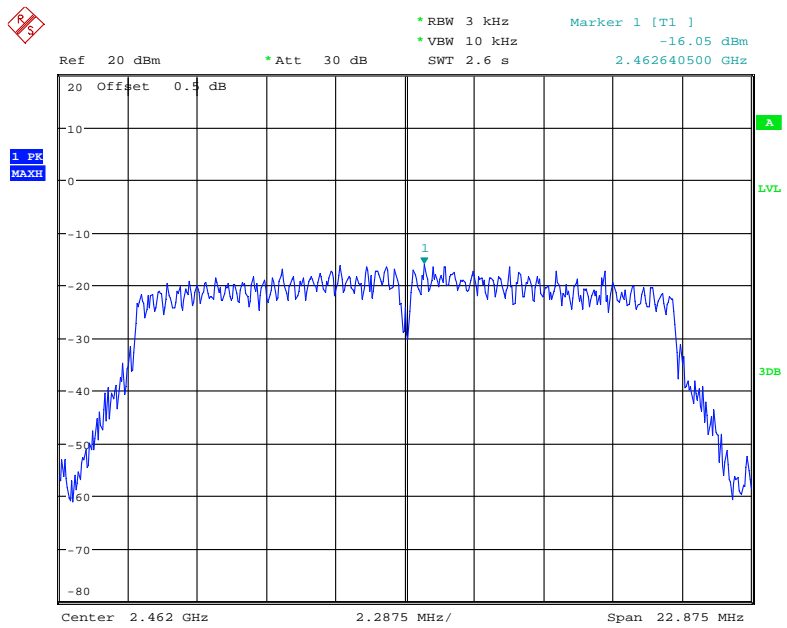


Date: 18.JUL.2018 15:18:12

### Power Spectral Density, 802.11n ht40 Low Channel

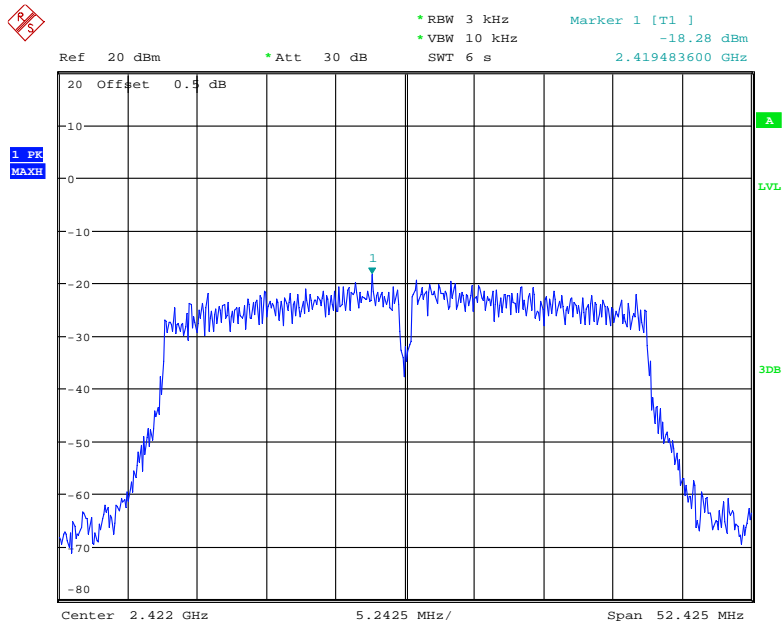

Date: 18.JUL.2018 14:39:16


### Power Spectral Density, 802.11n ht40 Middle Channel

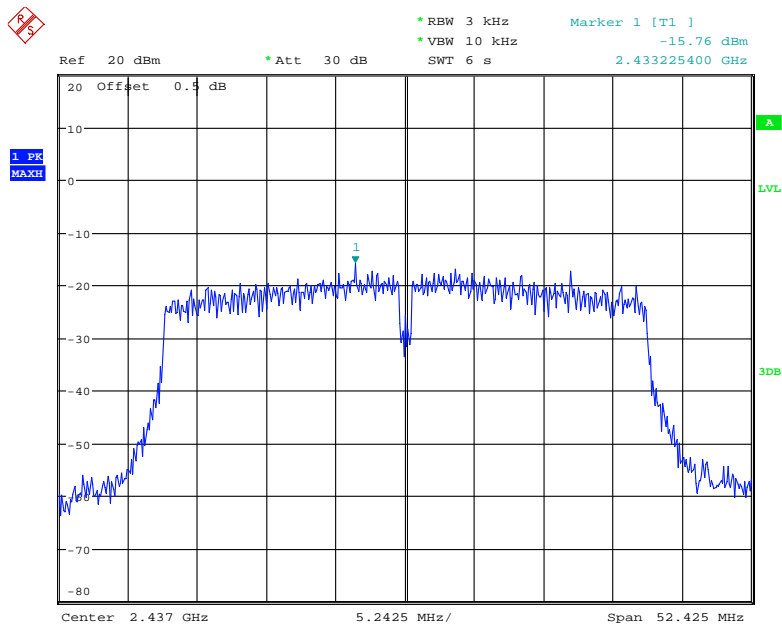

Date: 30.JAN.2018 11:23:28




### Power Spectral Density, 802.11n ht40 High Channel

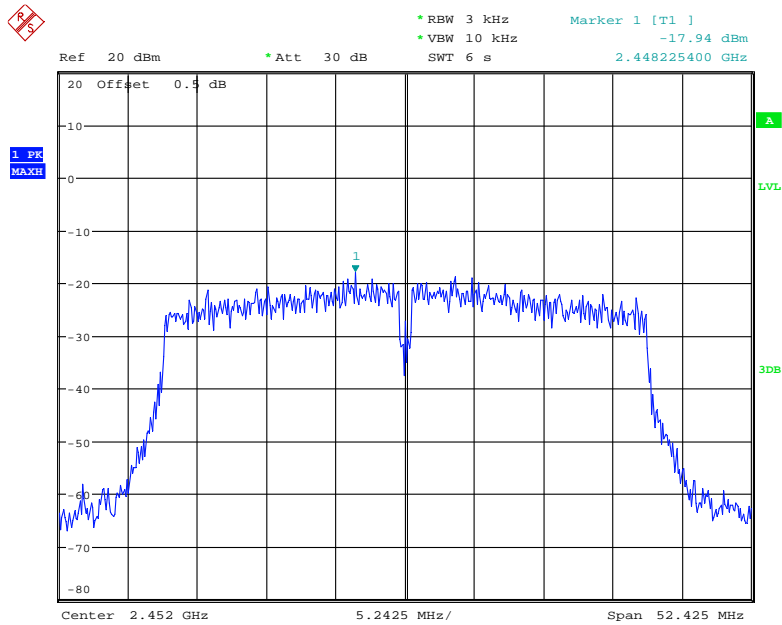

Date: 18.JUL.2018 15:19:40


### Chain 2:

### Power Spectral Density, 802.11b Low Channel

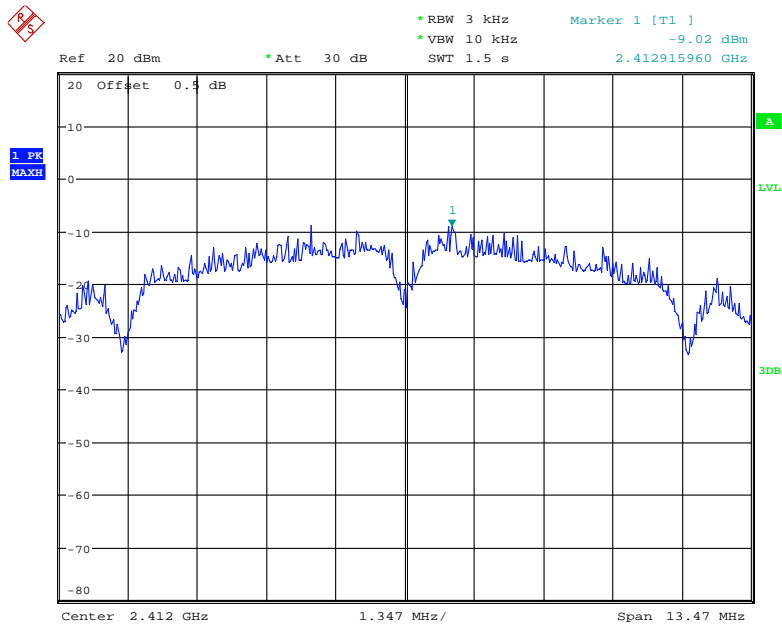


Date: 18.JUL.2018 14:02:40

### Power Spectral Density, 802.11b Middle Channel

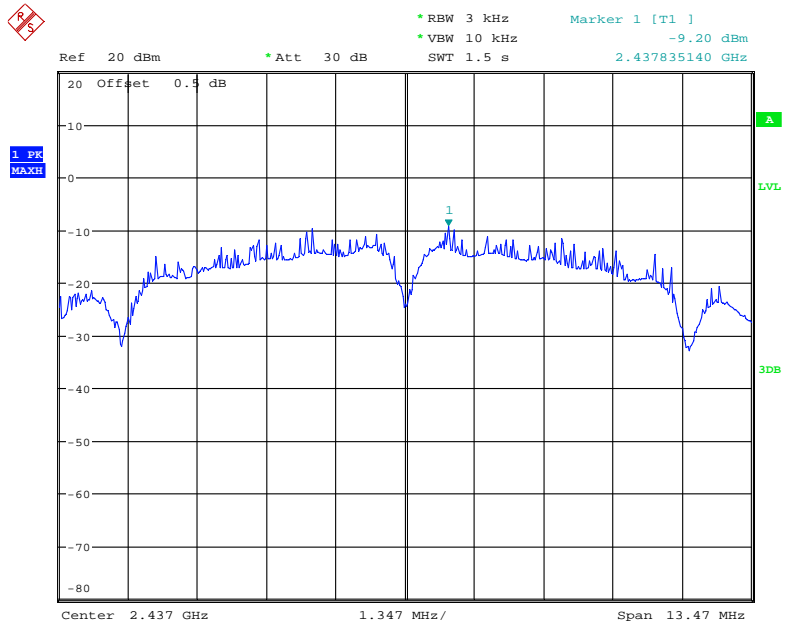


Date: 18.JUL.2018 14:03:09

### Power Spectral Density, 802.11b High Channel

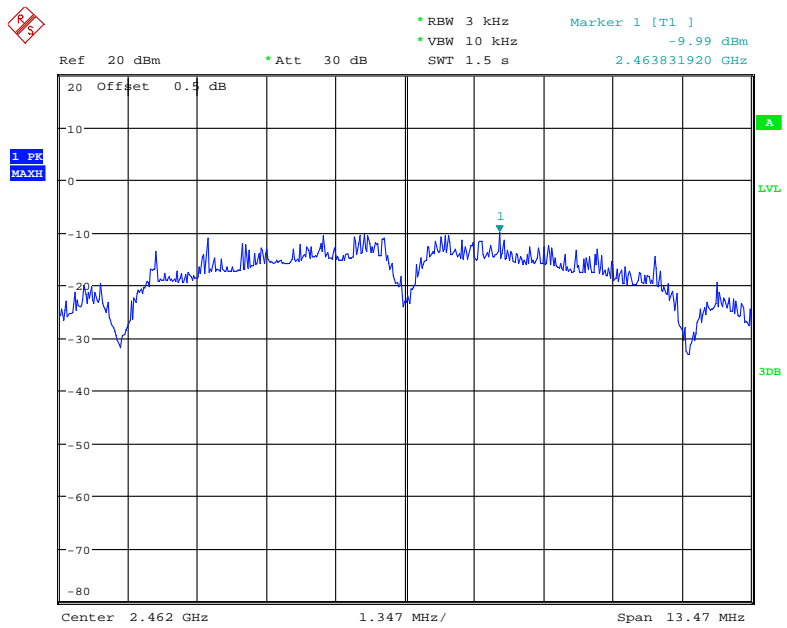


Date: 18.JUL.2018 14:03:47

### Power Spectral Density, 802.11g Low Channel

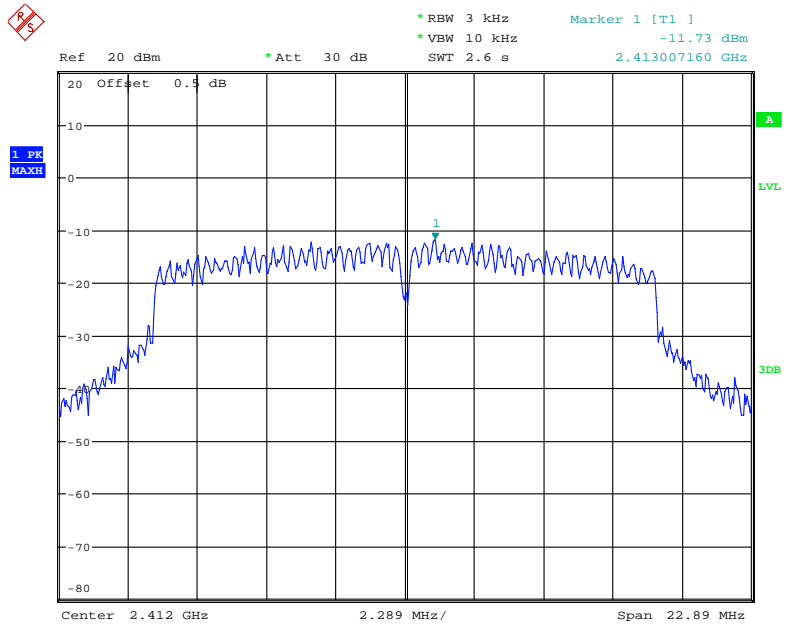


Date: 21.JUL.2018 15:42:08

### Power Spectral Density, 802.11g Middle Channel

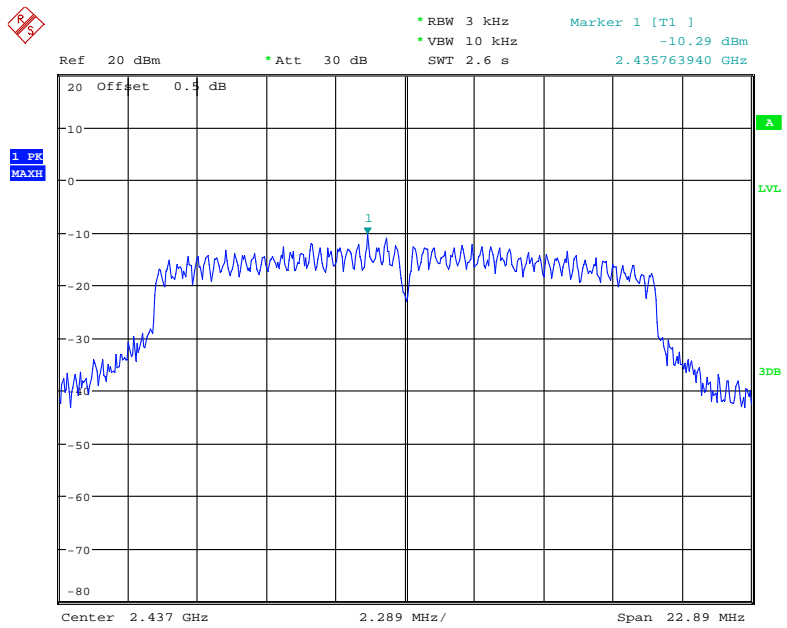


Date: 21.JUL.2018 15:41:36

### Power Spectral Density, 802.11g High Channel

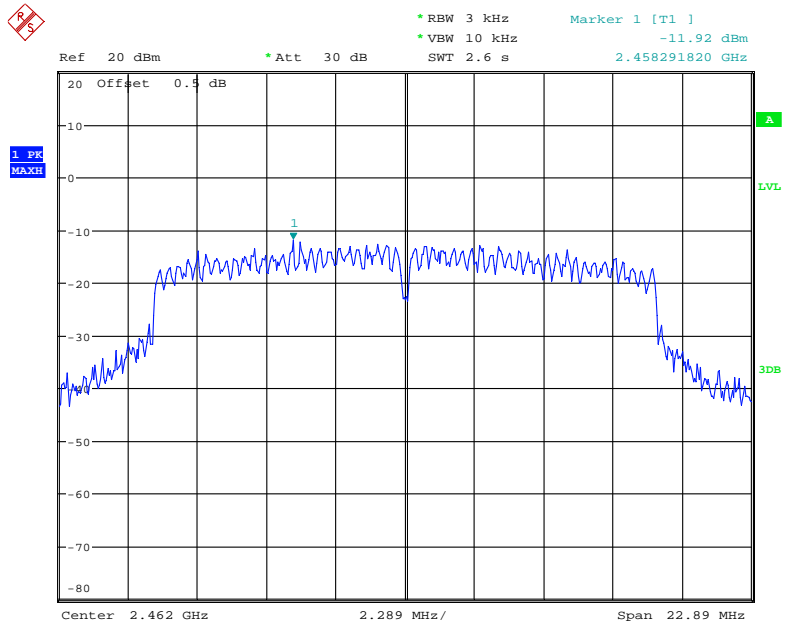


Date: 21.JUL.2018 15:41:11

### Power Spectral Density, 802.11n ht20 Low Channel

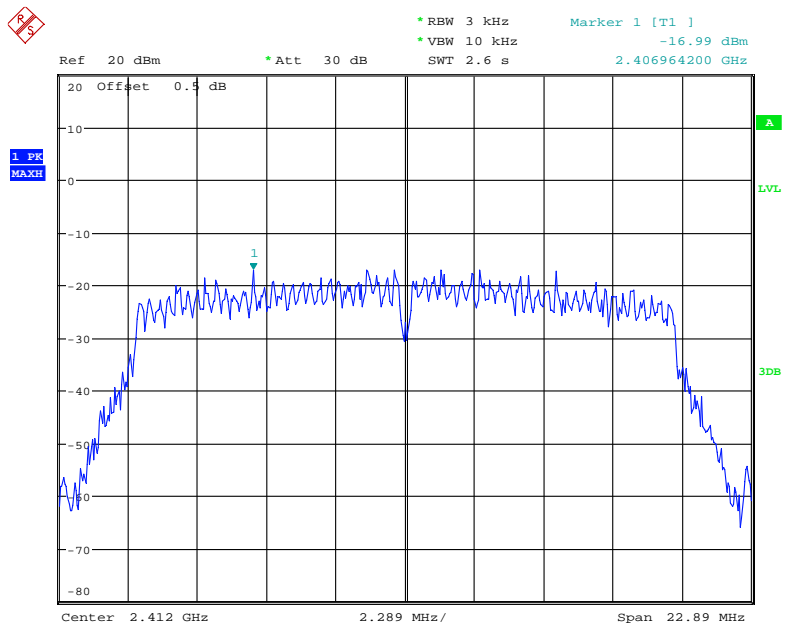


Date: 18.JUL.2018 14:13:03

### Power Spectral Density, 802.11n ht20 Middle Channel

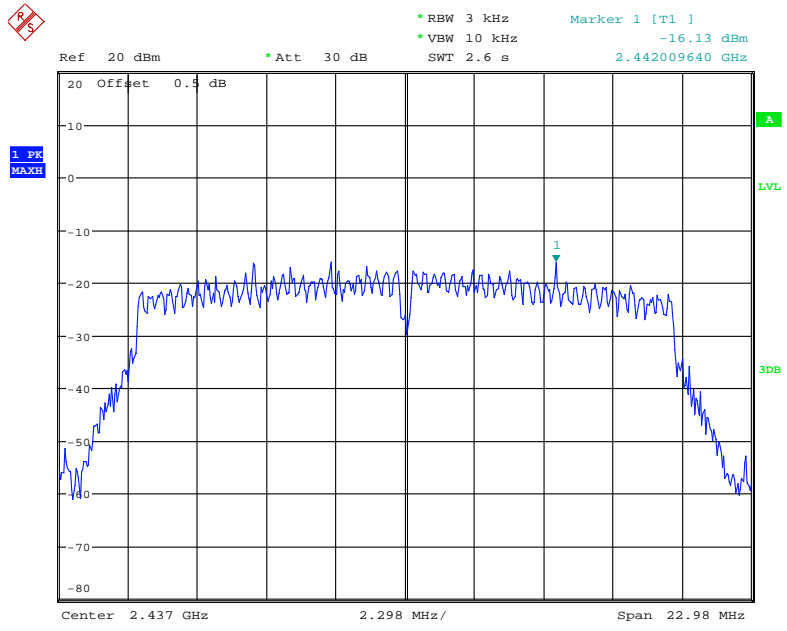


Date: 18.JUL.2018 15:16:48

### Power Spectral Density, 802.11n ht20 High Channel

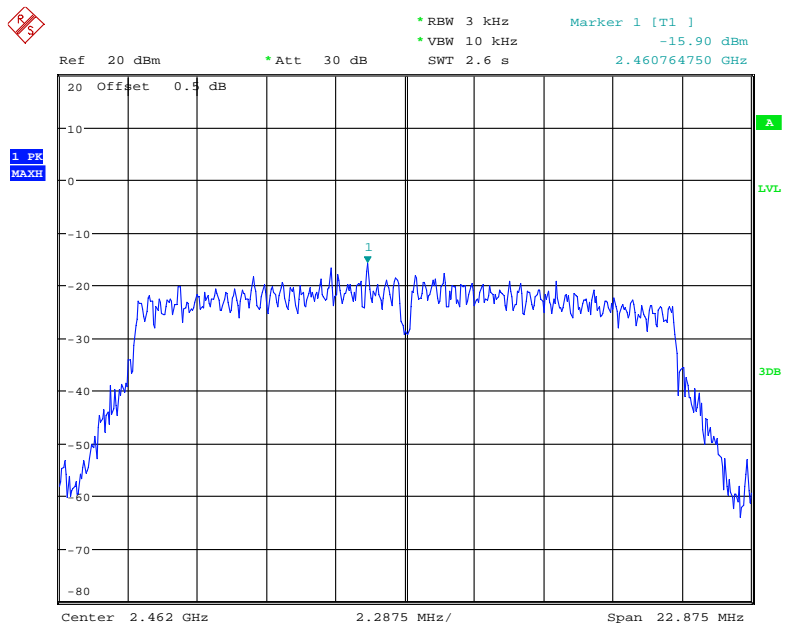


Date: 18.JUL.2018 14:12:19

### Power Spectral Density, 802.11n ht40 Low Channel

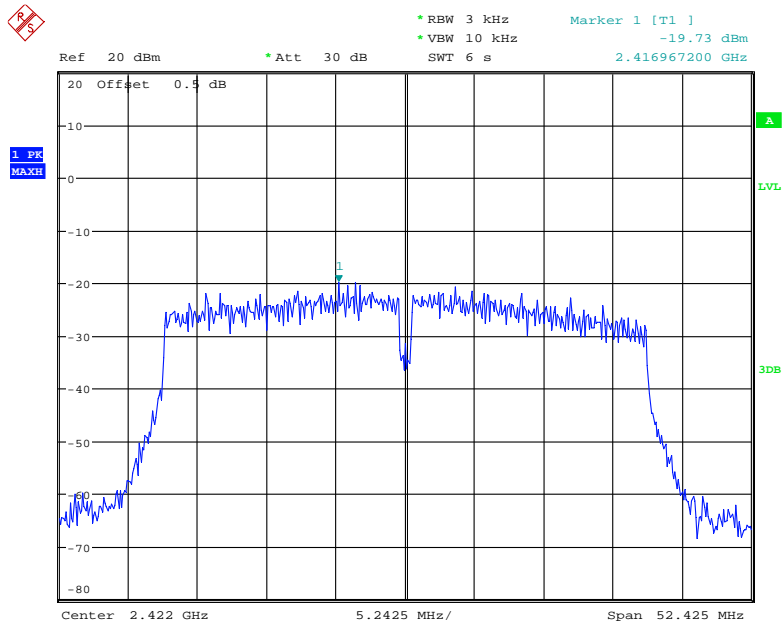


Date: 18.JUL.2018 14:14:31

### Power Spectral Density, 802.11n ht40 Middle Channel

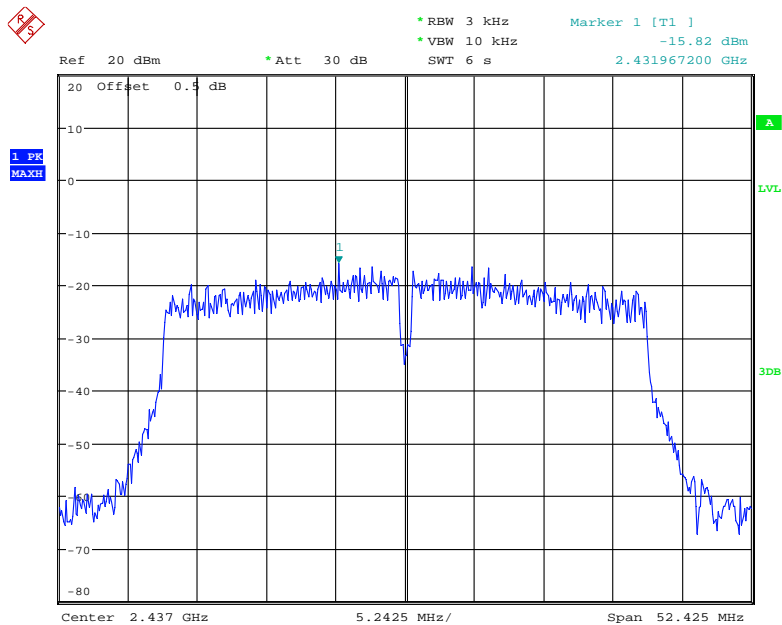

Date: 30.JAN.2018 13:05:55


### Power Spectral Density, 802.11n ht40 High Channel

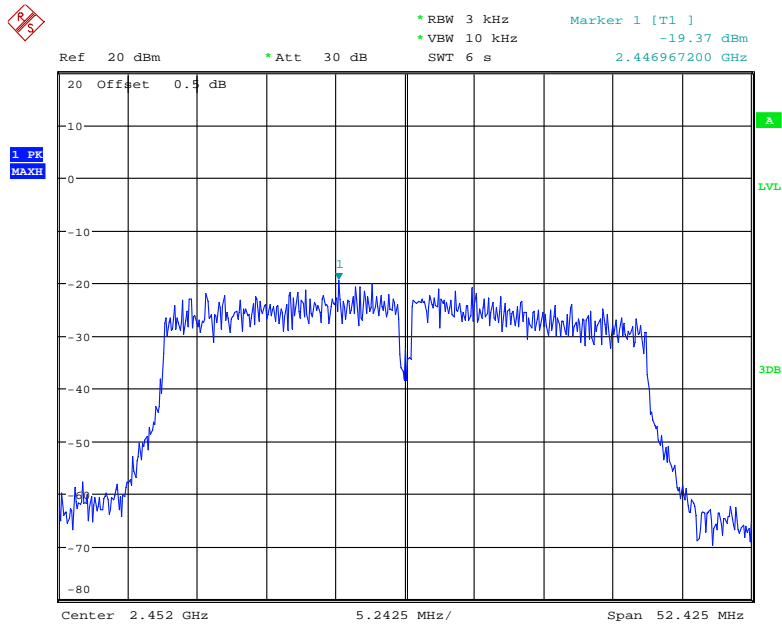

Date: 18.JUL.2018 14:22:50


### Chain 3:

### Power Spectral Density, 802.11b Low Channel

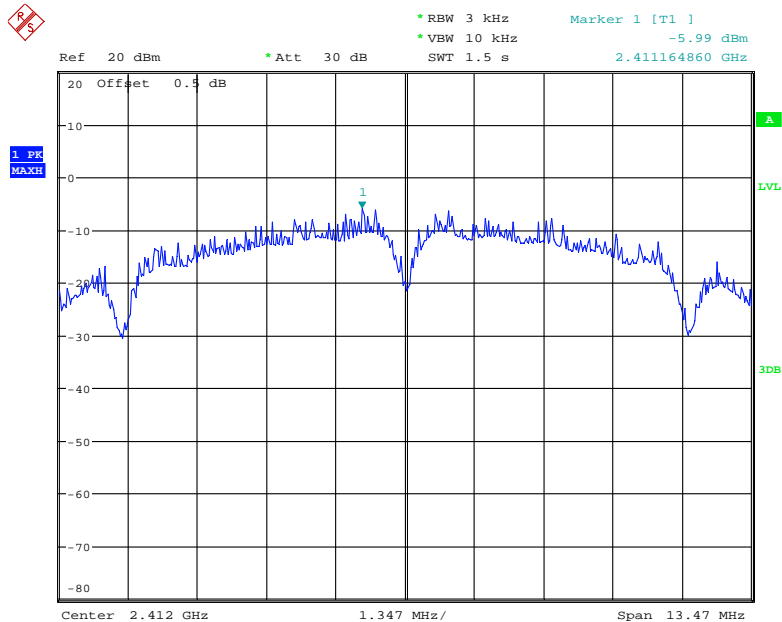


Date: 30.JAN.2018 13:27:07

### Power Spectral Density, 802.11b Middle Channel

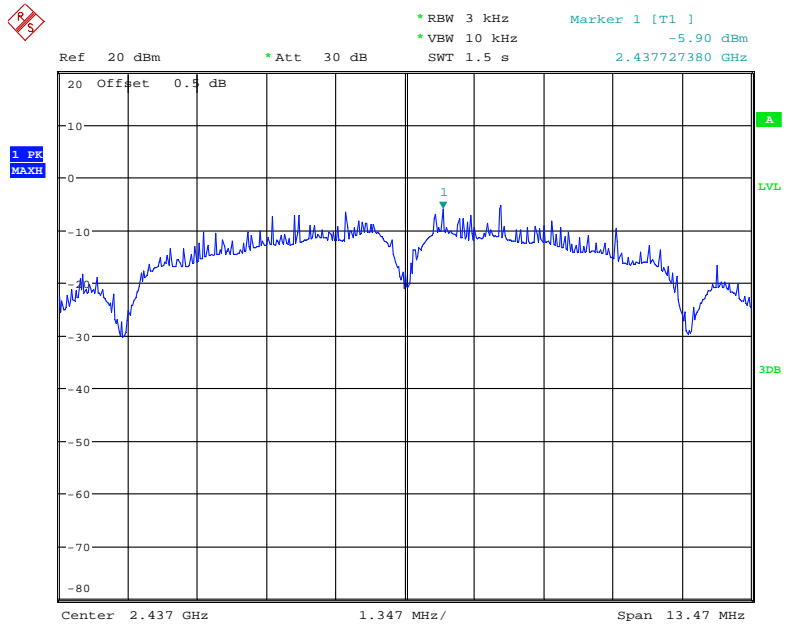

Date: 30.JAN.2018 13:28:41


### Power Spectral Density, 802.11b High Channel

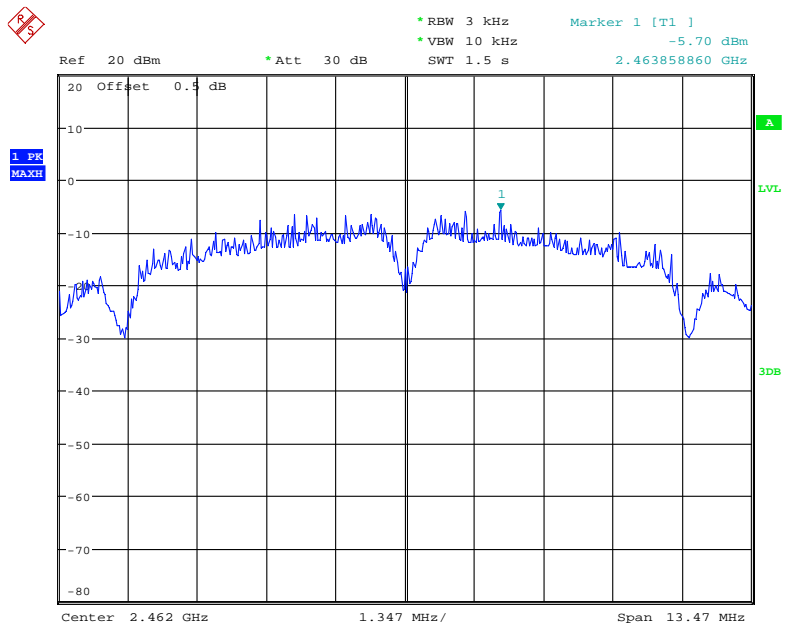

Date: 30.JAN.2018 13:31:33




### Power Spectral Density, 802.11g Low Channel

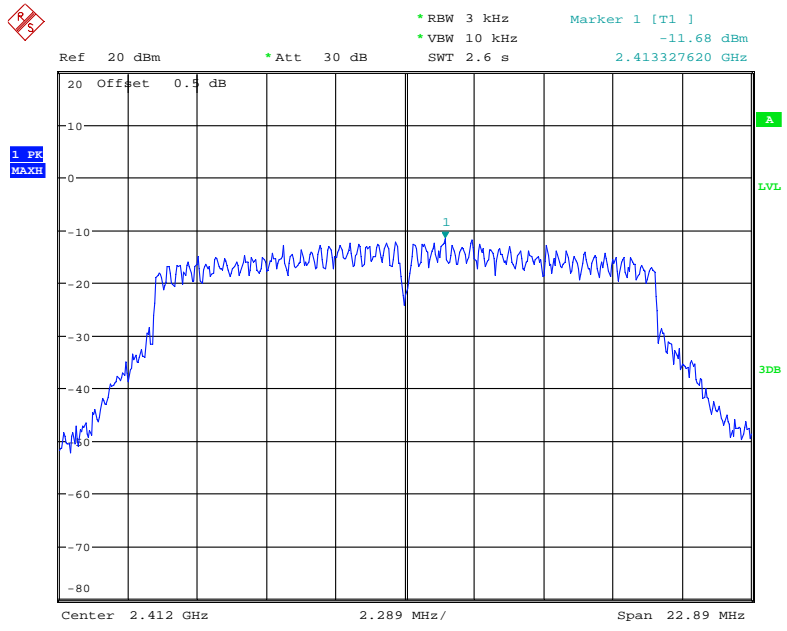


Date: 21.JUL.2018 15:37:41

### Power Spectral Density, 802.11g Middle Channel

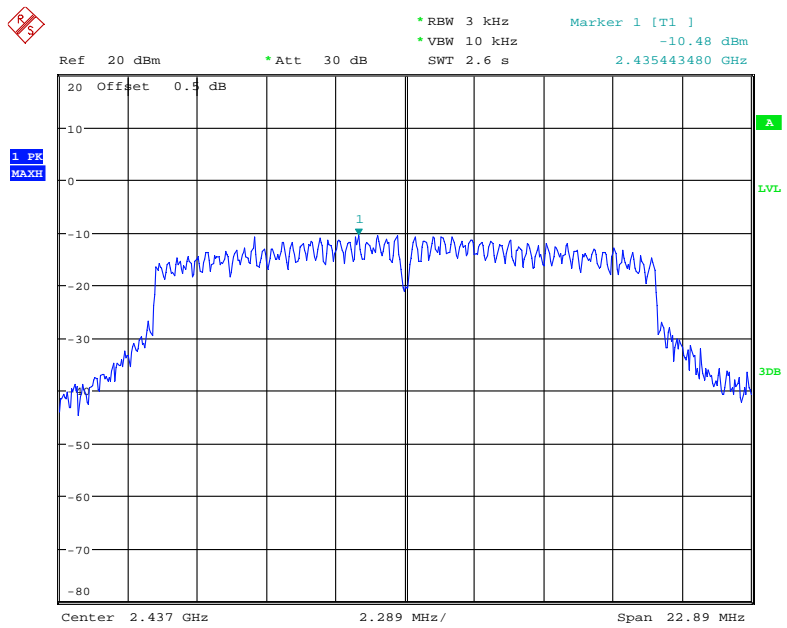


Date: 21.JUL.2018 15:38:25

### Power Spectral Density, 802.11g High Channel

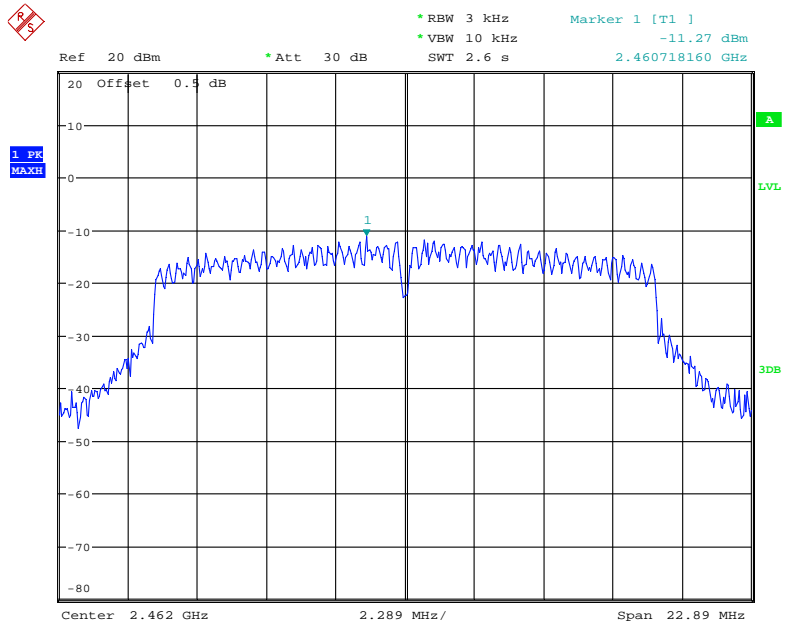


Date: 21.JUL.2018 15:39:48

### Power Spectral Density, 802.11n ht20 Low Channel

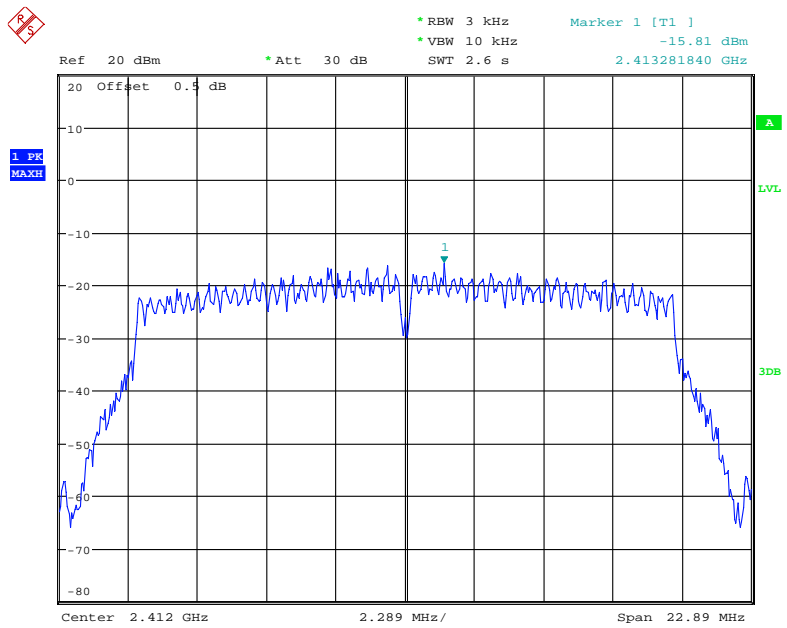


Date: 18.JUL.2018 14:44:52

### Power Spectral Density, 802.11n ht20 Middle Channel

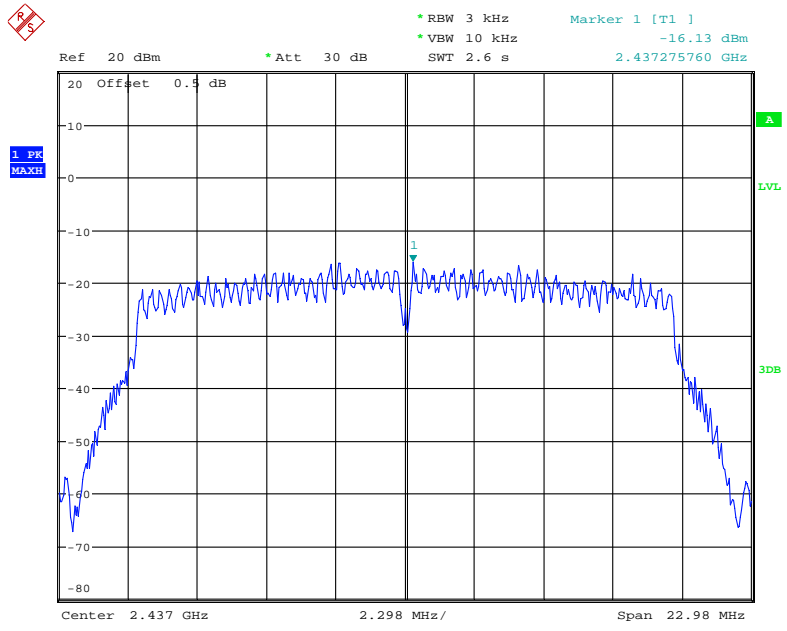


Date: 18.JUL.2018 14:48:51

### Power Spectral Density, 802.11n ht20 High Channel

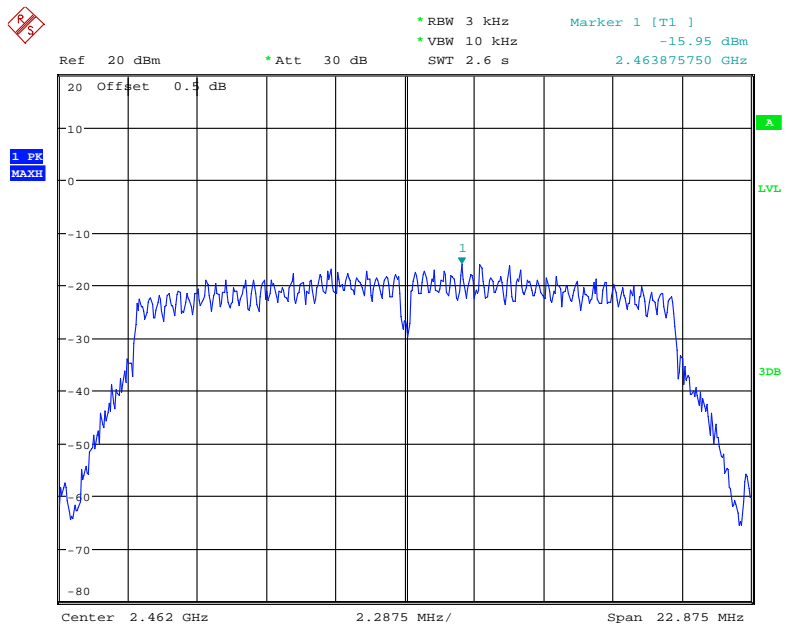


Date: 18.JUL.2018 14:47:43

### Power Spectral Density, 802.11n ht40 Low Channel

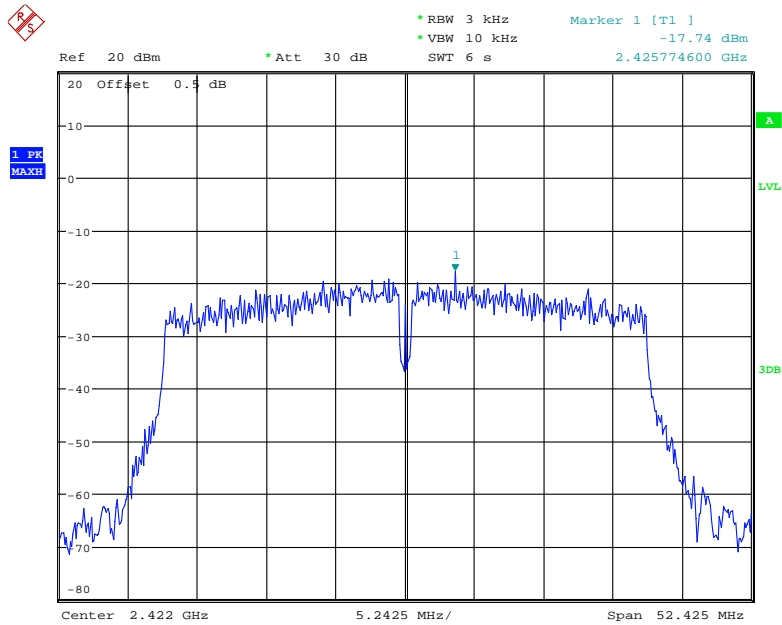


Date: 18.JUL.2018 14:42:36

### Power Spectral Density, 802.11n ht40 Middle Channel

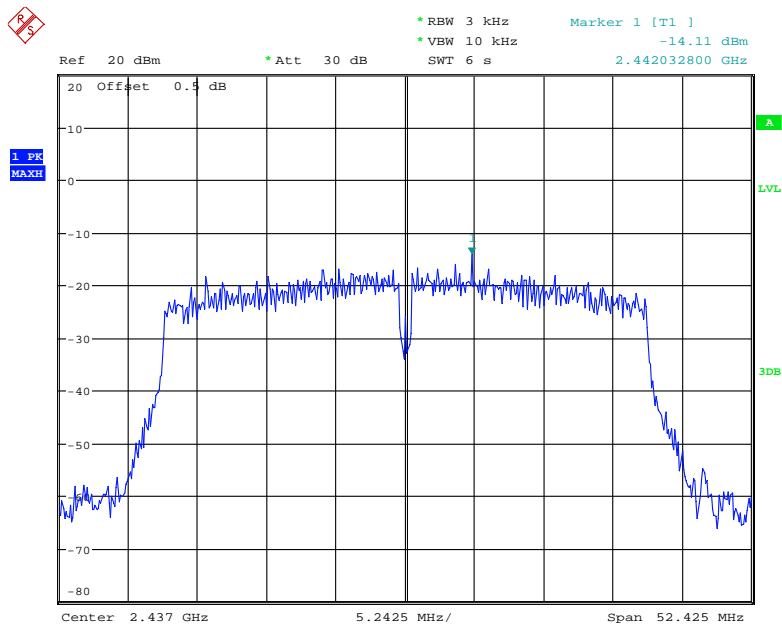

Date: 30.JAN.2018 13:11:54

### Power Spectral Density, 802.11n ht40 High Channel

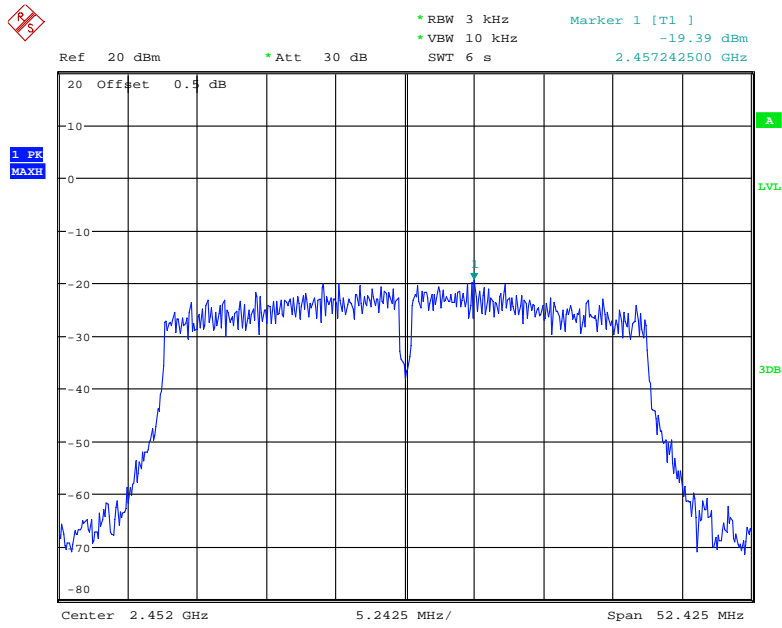

Date: 18.JUL.2018 14:41:31

\*\*\*\*\* END OF REPORT \*\*\*\*\*