

FCC Part 15B Measurement and Test Report




For

Shenzhen Concox Information Technology Co., Ltd

Floor 4th, Building B, Gaoxinqi Industrial Park, Liuxian 1st Road, District

67, Bao'an, Shenzhen, China

FCC ID: X7ICTGT03C

Test Rule(s):	<u>FCC Part 15 Subpart B</u>
Product Description:	<u>Vehicle GPS Tracker</u>
Tested Model:	<u>GT03C</u>
Report No.:	<u>STR16088254I-2</u>
Tested Date:	<u>2016-08-25 to 2016-09-24</u>
Issued Date:	<u>2016-09-24</u>
Tested By:	<u>Neil Wang / Engineer</u> 
Reviewed By:	<u>Silin Chen / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> 
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND OPERATION MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. CONDUCTED EMISSIONS	8
3.1 TEST PROCEDURE	8
3.2 BASIC TEST SETUP BLOCK DIAGRAM	8
3.3 ENVIRONMENTAL CONDITIONS	8
3.4 SUMMARY OF TEST RESULTS/PLOTS	8
3.5 CONDUCTED EMISSIONS TEST DATA	9
4. RADIATED EMISSIONS	11
4.1 TEST PROCEDURE	11
4.2 TEST RECEIVER SETUP	12
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	12
4.4 ENVIRONMENTAL CONDITIONS	12
4.5 SUMMARY OF TEST RESULTS/PLOTS	12

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Concox Information Technology Co., Ltd
Address of applicant: Floor 4th, Building B, Gaoxinqi Industrial Park,
Liuxian 1st Road, District 67, Bao'an, Shenzhen,
China

Manufacturer: Shenzhen Concox Information Technology Co., Ltd
Address of manufacturer: Floor 4th, Building B, Gaoxinqi Industrial Park,
Liuxian 1st Road, District 67, Bao'an, Shenzhen,
China

General Description of EUT	
Product Name:	Vehicle GPS Tracker
Trade Name:	/
Model No.:	GT03C
Adding Model(s):	GT03A, GT730
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model GT03C, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Rated Voltage:	DC 3.7V
Rated Current:	60mA
Rated Power:	/
Power Adapter Model:	HJ-050060-US
Highest Internal Frequency:	260MHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Concox Information Technology Co., Ltd in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging	connect to adaptor
TM2	Data change	connect to PC

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2016-06-04	2017-06-03
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2016-06-04	2017-06-03
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2016-06-04	2017-06-03
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2016-06-04	2017-06-03
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2016-06-04	2017-06-03
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2016-06-04	2017-06-03
SEMT-1042	Horn Antenna	ETS	3117	00086197	2016-06-04	2017-06-03
SEMT-1121	Horn Antenna	ETS	3116B	00088203	2016-06-04	2017-06-03
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2016-06-04	2017-06-03
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2016-06-04	2017-06-03
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2016-06-04	2017-06-03
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2016-06-04	2017-06-03

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant


N/A: not applicable

3. Conducted Emissions

3.1 Test Procedure

Test is conducting under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.2 Basic Test Setup Block Diagram

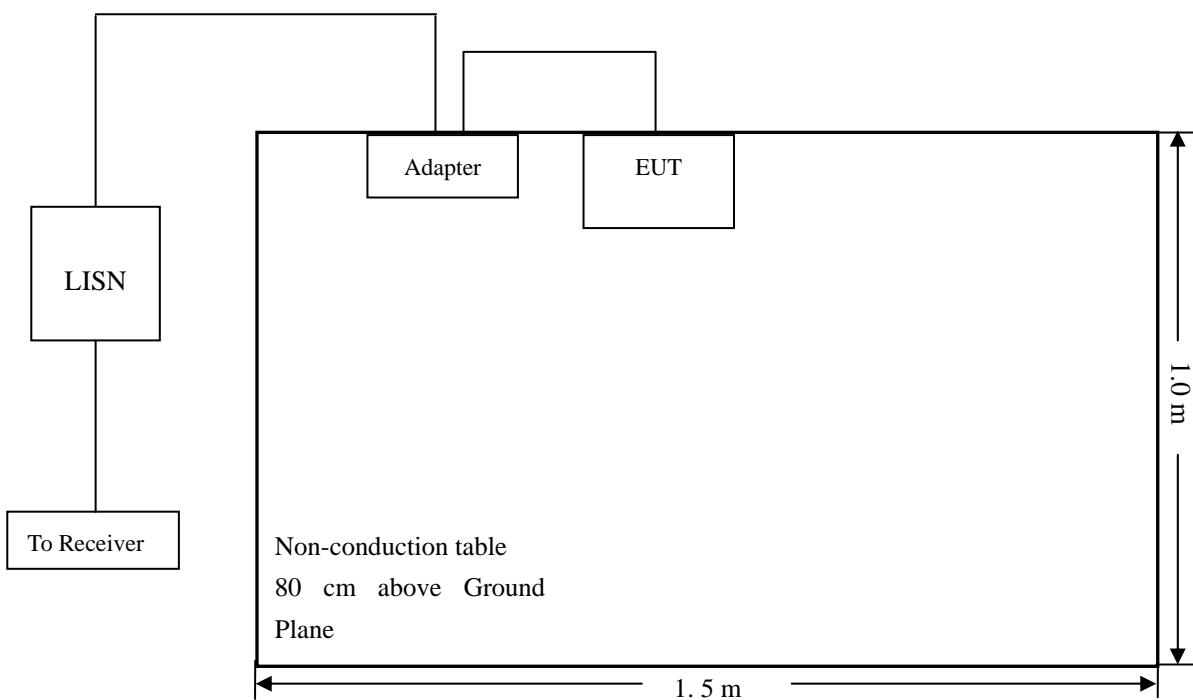

3.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.4 Summary of Test Results/Plots

According to the data in section 3.5, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


-6.83 dB at 0.5940 MHz in the Neutral, Peak detector, 0.15-30MHz

3.5 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: *Vehicle GPS Tracker*
 Tested Model: *GT03C*
 Operating Condition: *TM1*
 Comment: *AC 120V/60Hz; Adapter DC 5V*

Test Specification: *Neutral*

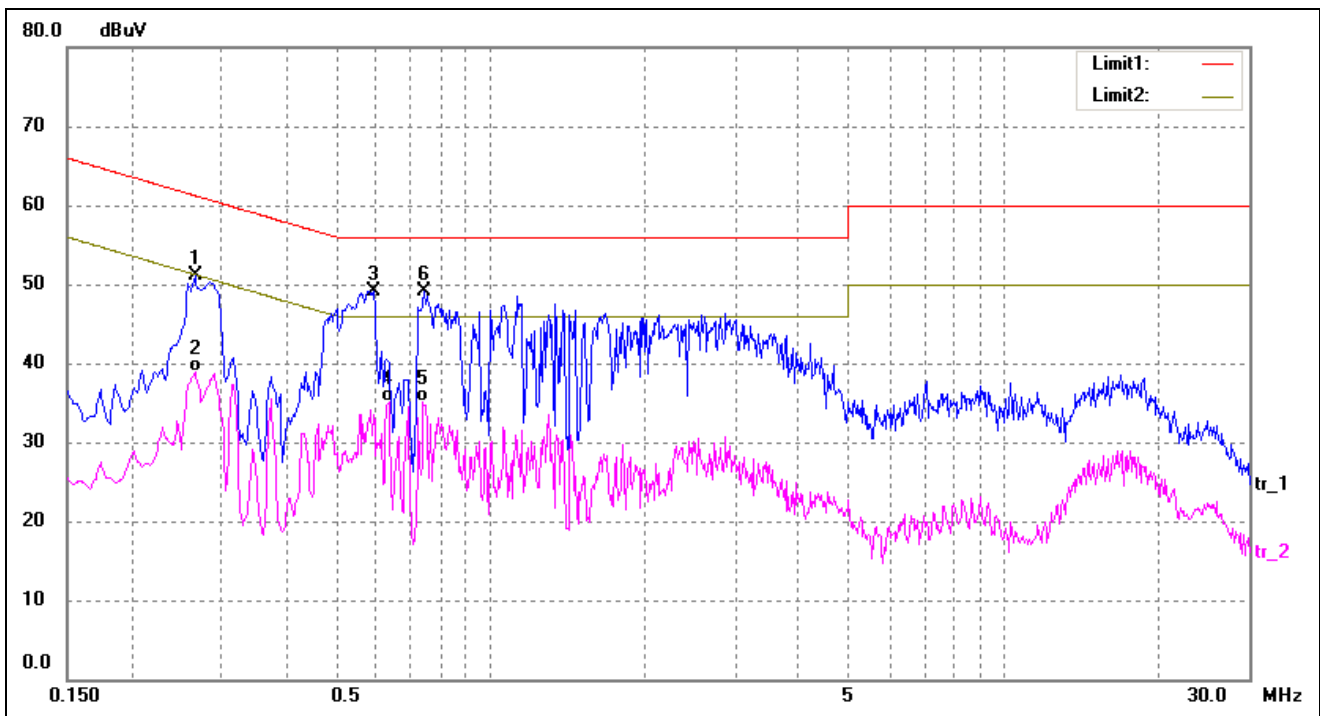

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2660	45.29	5.80	51.09	61.24	-10.15	peak
2	0.2660	33.16	5.80	38.96	51.24	-12.28	AVG
3*	0.5940	43.38	5.79	49.17	56.00	-6.83	peak
4	0.6340	29.35	5.79	35.14	46.00	-10.86	AVG
5	0.7420	29.32	5.78	35.10	46.00	-10.90	AVG
6	0.7460	43.37	5.78	49.15	56.00	-6.85	peak

Test Specification: Line

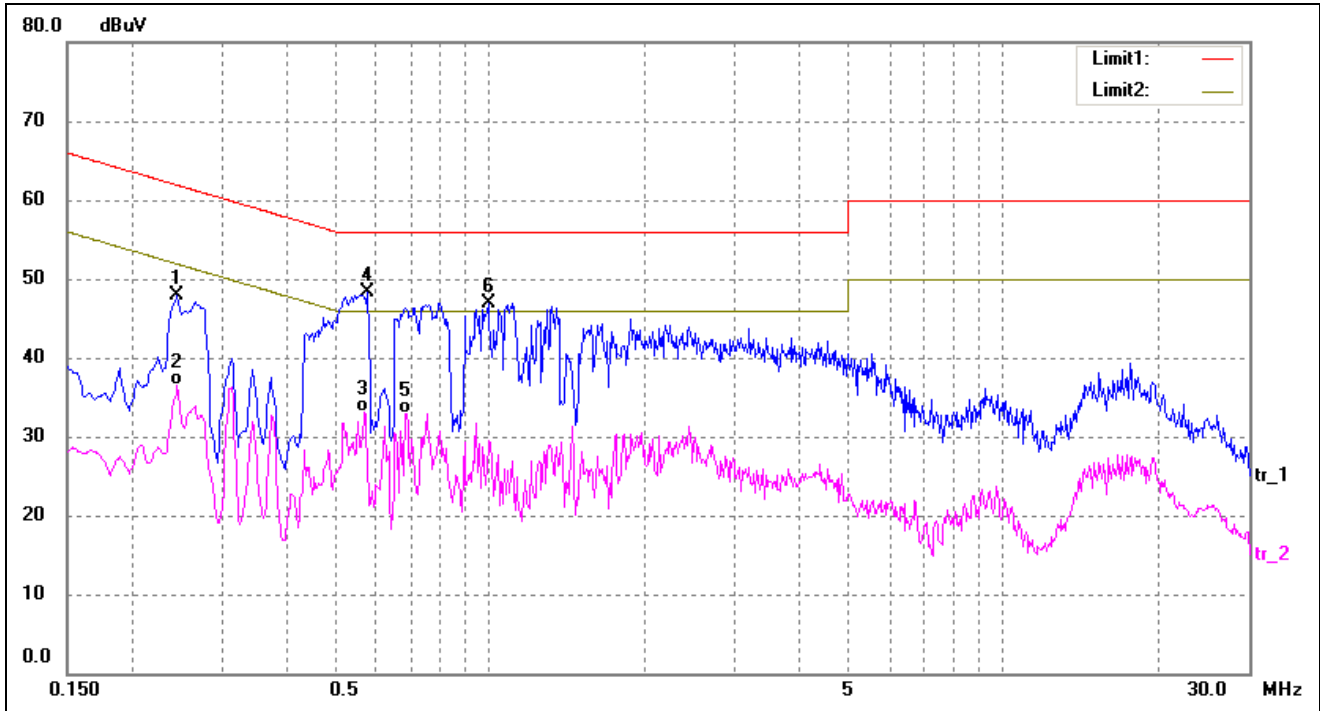

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2460	42.03	5.80	47.83	61.89	-14.06	peak
2	0.2460	30.62	5.80	36.42	51.89	-15.47	AVG
3	0.5700	27.29	5.79	33.08	46.00	-12.92	AVG
4*	0.5780	42.56	5.79	48.35	56.00	-7.65	peak
5	0.6860	27.20	5.79	32.99	46.00	-13.01	AVG
6	0.9900	41.10	5.76	46.86	56.00	-9.14	peak


4. Radiated Emissions

4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

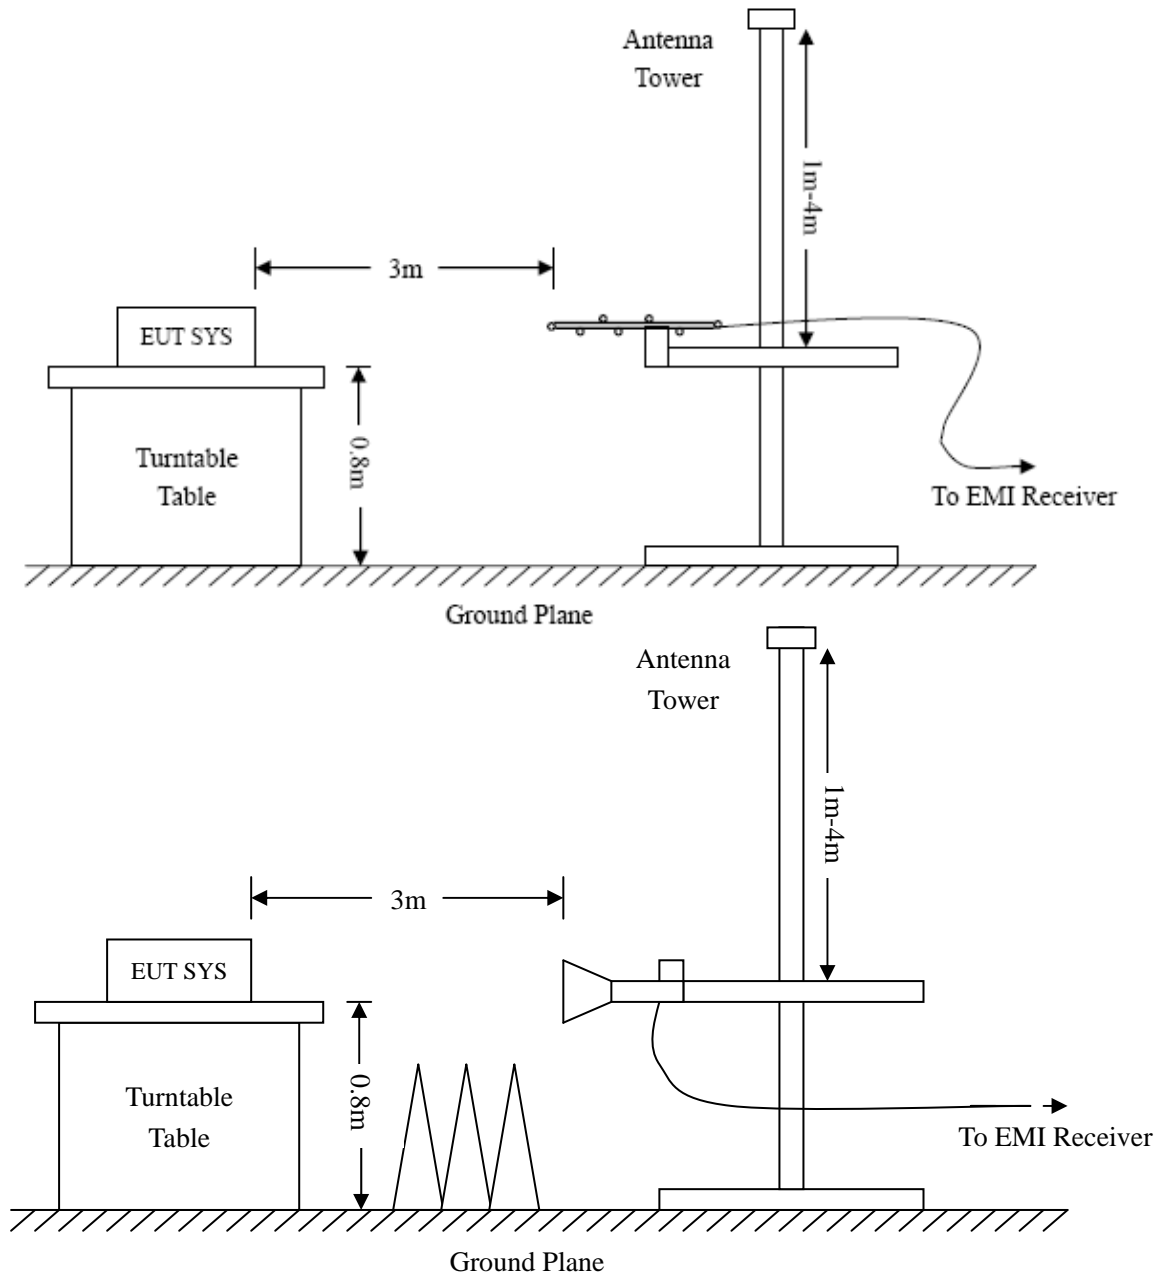

4.2 Test Receiver Setup

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.4 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-2.37 dB at 535.7073 MHz in the Vertical polarization TM2 mode, 30MHz to 1 GHz, 3Meters

Plot of Radiated Emissions Test Data


EUT: *Vehicle GPS Tracker*
 Tested Model: *GT03C*
 Operating Condition: *TM1*
 Comment: *AC 120V/60Hz; Adapter DC 5V*

Test Specification: *Horizontal*

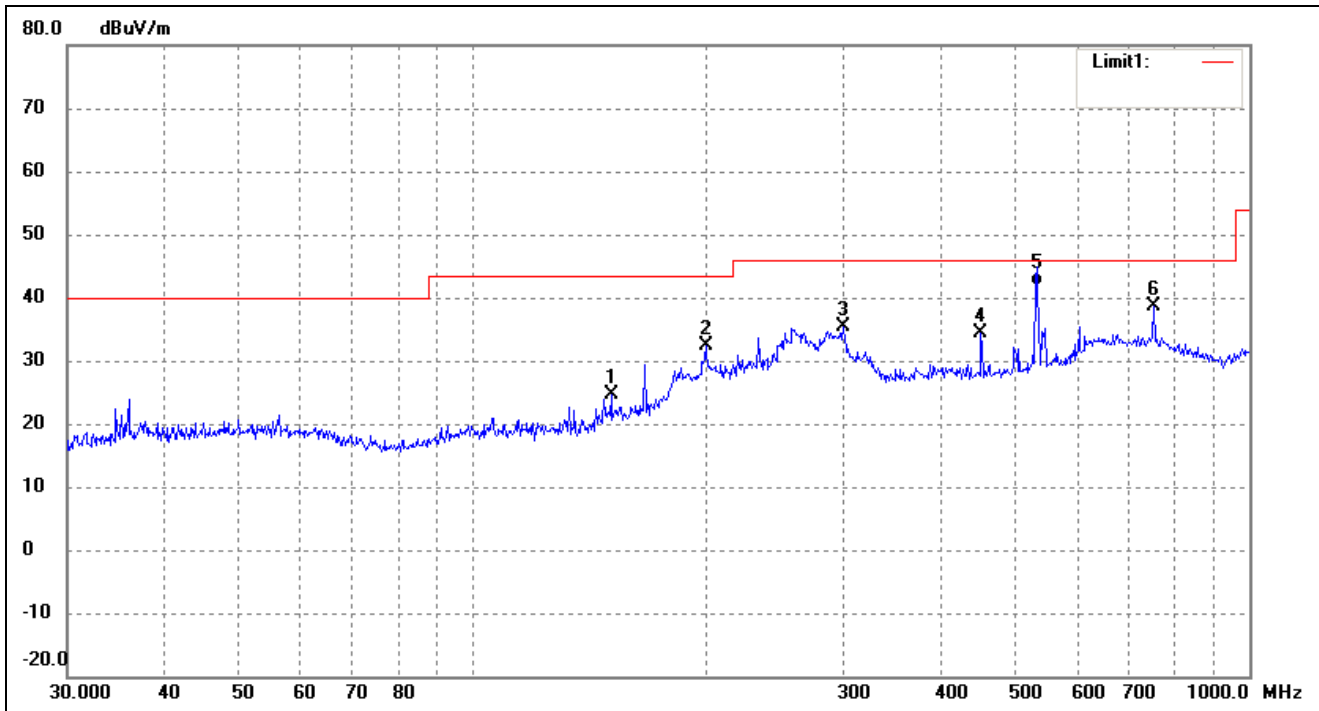

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	150.5378	21.98	2.74	24.72	43.50	-18.78	0	100	peak
2	199.2855	28.99	3.32	32.31	43.50	-11.19	0	100	peak
3	299.3158	23.36	11.92	35.28	46.00	-10.72	0	100	peak
4	451.1349	21.60	12.79	34.39	46.00	-11.61	0	100	peak
5	531.9634	28.01	13.84	41.85	46.00	-4.15	0	100	QP
6	752.7432	20.04	18.47	38.51	46.00	-7.49	0	100	peak

Test Specification: Vertical

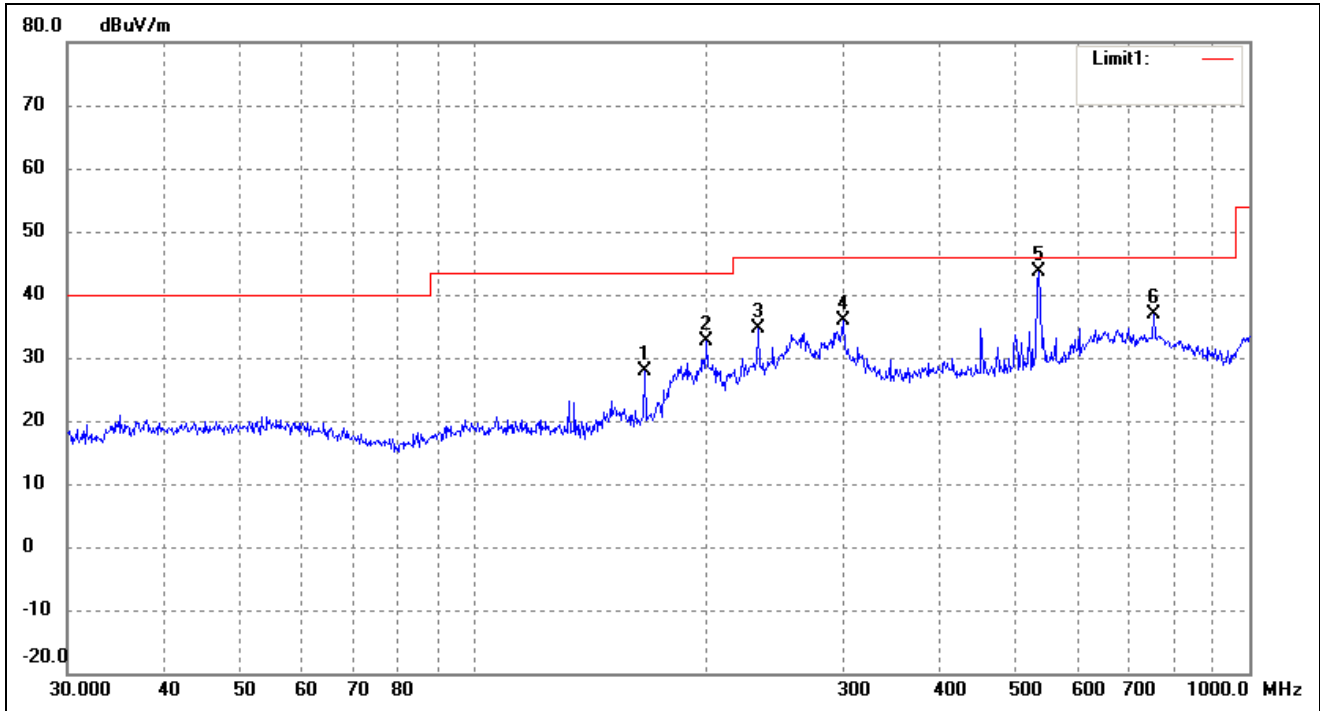


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	166.0680	25.49	2.45	27.94	43.50	-15.56	0	100	peak
2	199.9856	29.28	3.35	32.63	43.50	-10.87	0	100	peak
3	233.3487	26.02	8.51	34.53	46.00	-11.47	0	100	peak
4	300.3673	23.83	11.95	35.78	46.00	-10.22	0	100	peak
5	535.7073	29.81	13.82	43.63	46.00	-2.37	0	100	peak
6	752.7432	18.42	18.47	36.89	46.00	-9.11	0	100	peak

Plot of Radiated Emissions Test Data


EUT: *Vehicle GPS Tracker*
 Tested Model: *GT03C*
 Operating Condition: *TM2*
 Comment: *AC 120V/60Hz; USB 5V*

Test Specification: *Horizontal*

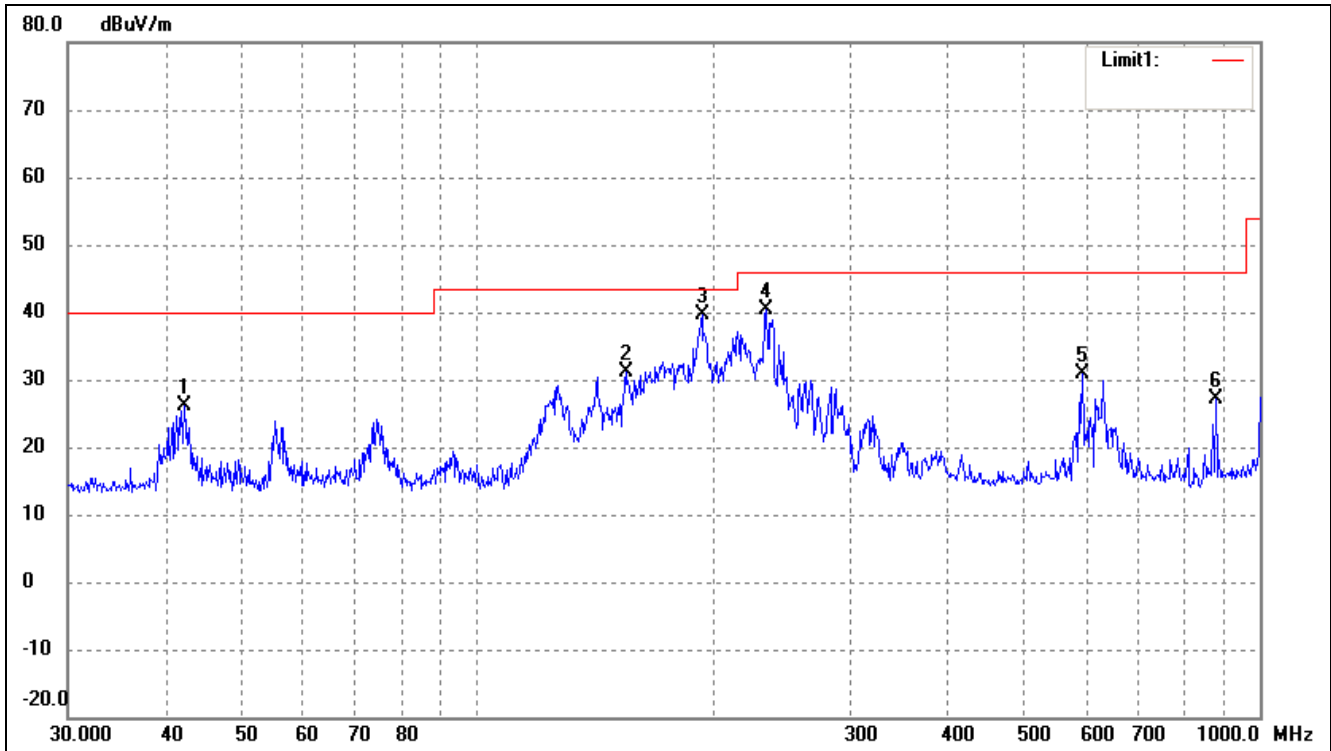

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.3022	21.07	4.94	26.01	40.00	-13.99	214	100	peak
2	154.8205	28.51	2.57	31.08	43.50	-12.42	69	100	peak
3	193.7728	36.62	3.07	39.69	43.50	-3.81	17	100	peak
4	234.1684	31.79	8.56	40.35	46.00	-5.65	165	100	peak
5	593.0497	13.52	17.45	30.97	46.00	-15.03	36	100	peak
6	878.3214	10.99	16.18	27.17	46.00	-18.83	14	100	peak

Test Specification: Vertical

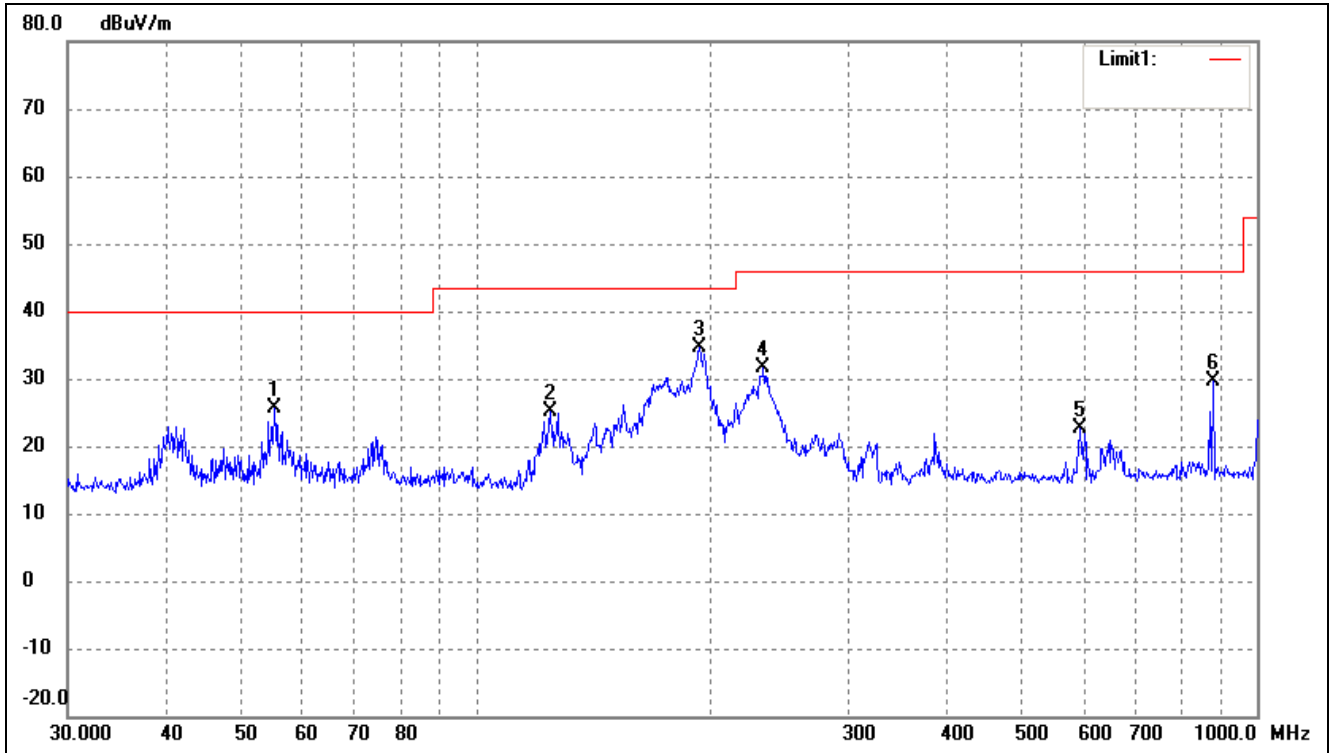

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.2207	20.59	5.02	25.61	40.00	-14.39	174	100	peak
2	124.5690	20.81	4.44	25.25	43.50	-18.25	35	100	peak
3	193.0945	31.63	3.04	34.67	43.50	-8.83	39	100	peak
4	233.3487	23.13	8.51	31.64	46.00	-14.36	98	100	peak
5	593.0497	5.12	17.45	22.57	46.00	-23.43	49	100	peak
6	878.3214	13.49	16.18	29.67	46.00	-16.33	54	100	peak

Note: Testing is carried out with frequency rang 30MHz to the 2GHz, which above 1GHz is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4.

***** END OF REPORT *****