

Application for FCC Certificate
On Behalf of
Lineage Power (Shanghai) Co., Ltd.

Electric Discharge Lamp Control Equipment

Model No. :	SP779#	SP780#	SP784#
Serial No. :	E2010102906	E2010102907	--

FCC ID : X82-BLST-SP77X

Prepared For : Lineage Power (Shanghai) Co., Ltd.
1-2F, Building #58, No.461 Hongcao Road,
Caohejing Hi-Tech Park, Shanghai 200233,
China

Prepared By : Audix Technology (Shanghai) Co., Ltd.
3F 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai 200233, China

Tel: +86-21-64955500
Fax: +86-21-64955491

Report No. : ACI-F10151
Date of Test : Oct 22-29, 2010
Date of Report : Nov 10, 2010

TABLE OF CONTENTS

	Page
1 SUMMARY OF STANDARDS AND RESULTS.....	4
1.1 Description of Standards and Results.....	4
2 GENERAL INFORMATION.....	5
2.1 Description of Equipment Under Test.....	5
2.2 Description of Test Facility	6
2.3 Measurement Uncertainty	6
3 CONDUCTED EMISSION TEST	7
3.1 Test Equipment.....	7
3.2 Block Diagram of Test Setup	7
3.3 Conducted Emission Limits (FCC Part 18 Consumer Equipment).....	7
3.4 Test Configuration.....	7
3.5 Operating Condition of EUT	8
3.6 Test Procedures	8
3.7 Test Results	8
4 MAGNETIC FIELD EMISSION TEST	11
4.1 Test Equipment.....	11
4.2 Block Diagram of Test Setup	11
4.3 Magnetic Field Emission Limit (FCC Part 18 305(b)).....	12
4.4 Test Configuration.....	12
4.5 Operating Condition of EUT	12
4.6 Test Procedures	12
4.7 Test Results	13
5 RADIATED EMISSION TEST.....	16
5.1 Test Equipment.....	16
5.2 Block Diagram of Test Setup	16
5.3 Radiated Emission Limit (FCC Part 18.305(c) Consumer Equipment).....	17
5.4 Test Configuration.....	17
5.5 Operating Condition of EUT	17
5.6 Test Procedures	17
5.7 Test Results	18
6 DEVIATION TO TEST SPECIFICATIONS.....	21

TEST REPORT FOR FCC CERTIFICATE

Applicant : Lineage Power (Shanghai) Co., Ltd.
Manufacturer : Cherokee International (China) Power Supply Ltd.
EUT Description : Electric Discharge Lamp Control Equipment

(A) Model No.	SP779#	SP780#	SP784#
(B) Serial No.	E2010102906	E2010102907	--
(C) Power Supply	120V/60Hz		

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 18 SUBPART C RF LIGHTING DEVICES
OCTOBER 2009 AND MP-5/1986*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 18 Subpart C (RF Lighting Devices) limits both radiated and conducted emissions.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report shows that the EUT which was tested in 3m anechoic chamber on Oct 22-29, 2010 is technically compliance with the FCC official limits also.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.


This report contains data that are not covered by the NVLAP accreditation.


This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Oct 22-29, 2010 Date of Report : Nov 10, 2010

Producer : 
CANDY XI / Assistant

Review : 
DIO YANG / Deputy Assistant Manager

 For and on behalf of
Audix Technology (Shanghai) Co., Ltd.

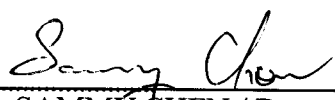Signatory : 
Authorized Signature EMC SAMMY CHEN / Deputy Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description / Test Item	Test Standard	Meets Limit	Results
EMISSION			
Conducted Disturbance at the Mains Terminals	FCC RULES AND REGULATIONS PART 18 SUBPART C OCTOBER 2009 AND MP-5/1986	18.307(c) Consumer Equipment	Pass
Magnetic Field Strength	FCC RULES AND REGULATIONS PART 18 SUBPART C OCTOBER 2009 AND MP-5/1986	18.305(b) Any type, Non-ISM Frequency	Pass
Radiated Emission	FCC RULES AND REGULATIONS PART 18 SUBPART C OCTOBER 2009 AND MP-5/1986	18.305(c) Consumer Equipment	Pass

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description : Electric Discharge Lamp Control Equipment

Type of EUT : ☒ Production ☐ Pre-product ☐ Pro-type

Model No.	:	SP779#	SP780#	SP784#
Serial No.	:	E2010102906	E2010102907	--

Note 1 : The “#” in above models means the model designation may be followed by suffix.

Note 2 : The SP779# and SP780# models are all the same except for the different power (The value of L302, C314 and C315 of these two models is different). The SP780# and SP784# models are all the same except for the different model number. Different model number for different customers.

Applicant : Lineage Power (Shanghai) Co., Ltd.
1-2F, Building #58, No.461 Hongcao Road,
Caohejing Hi-Tech Park, Shanghai 200233,
China

Manufacturer : Cherokee International (China) Power Supply Ltd.
No.1353 Chen Qiao Road, Fengpu Industrial Park,
201401 Fengxian, Shanghai, China

Model No	V _{in}	f _{in}	I _{in}	Power	U-OUT
SP779#	120Vac	50-60Hz	1.45A	150W	300V
SP780#, SP784#	120Vac	50-60Hz	1.94A	200W	300V

2.2 Peripherals

2.2.1 Discharge Lamp Device (150W)

Manufacturer : Kai Yuan
Model Number : IP65

2.2.2 Discharge Lamp Device (200W)

Manufacturer : Kai Yuan
Model Number : IP65

2.3 Description of Test Facility

Site Description (Semi-Anechoic Chamber) : Sept. 17, 1998 file on
July 26, 2006 Renewed
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046, USA

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3F 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai 200233, China

NVLAP Lab Code : 200371-0

2.4 Measurement Uncertainty

Conducted Emission Expanded Uncertainty: U = 1.26 dB
Radiated Emission Expanded Uncertainty : U = 3.02 dB

3 CONDUCTED EMISSION TEST


3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESCI	100841	Oct 15, 2009	Oct 15, 2010
2.	Artificial Mains Network (AMN)	R&S	ESH2-Z5	843890/011	Apr 02, 2010	Apr 02, 2011
3.	50 Ω Coaxial Switch	Anritsu	MP59B	6200426389	Sep 19, 2010	Mar 19, 2011
4.	50 Ω Terminator	Anritsu	BNC	001	Apr 02, 2010	Apr 02, 2011
5.	Software	Audix	E3	SET00200 9804M592	--	--

3.2 Block Diagram of Test Setup

3.2.1 Conducted Disturbance Test Setup

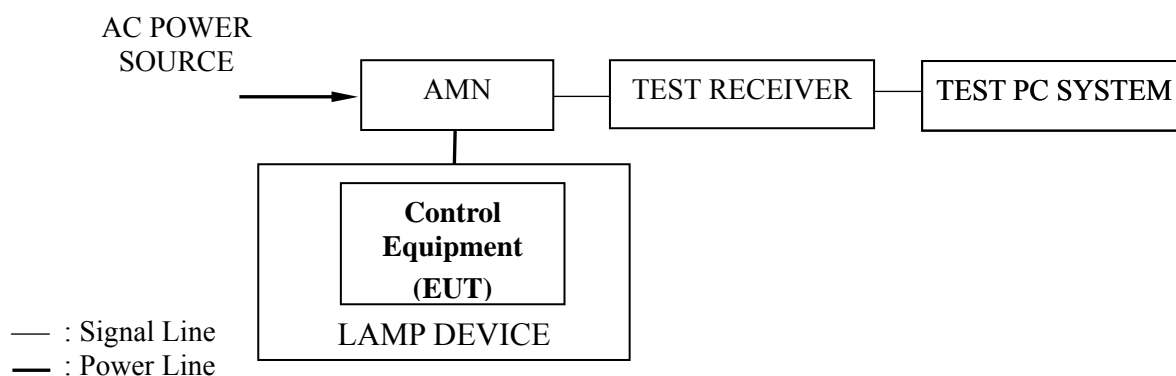

3.3 Conducted Emission Limits (FCC Part 18 Consumer Equipment)

Frequency (MHz)	Maximum RF Line Voltage	
	(μ V)	dB(μ V)
0.45 ~ 2.51	250	48
2.51 ~ 3.0	3000	70
3.0 ~ 30	250	48
NOTE 1 – RF Line Voltage dB (μ V) = 20 log RF Line Voltage (μ V) NOTE 2 – The tighter limits shall apply at the boundary between two frequency ranges.		

3.4 Test Configuration

The EUT (listed in Sec.2.1) was installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner that tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

- 3.5.1 Setup the EUT as shown in Sec. 3.2.
- 3.5.2 Turn on the power of EUT.
- 3.5.3 The EUT will be operated normally.
- 3.5.4 Set the EUT on the lighting test mode, and then test.

3.6 Test Procedures

The EUT was connected to the power mains through a Artificial Mains Network (AMN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to MP-5/1986 during conducted emission test.

The I.F bandwidth of Test Receiver ESCI was set at 9 kHz.

The frequency range from 450 kHz to 30 MHz for Lighting mode was checked.

The test modes were done on conducted test and the test results of the highest emissions are listed in Sec. 3.7.

3.7 Test Results

< PASS >

The frequency and amplitude of the highest conducted emission relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

Model No	Test Mode	Data Page
SP779#	Lighting	P9
SP780#		P10

NOTE 1 – Factor = Cable Loss + AMN Factor.

NOTE 2 – Emission Level = Meter Reading + Factor.

NOTE 3 – All readings are Quasi-Peak values. (QP)

NOTE 4 – The worst case is for SP779# model. The worst emission is detected at 17.017 MHz with corrected signal level of 41.48 dB (μV) (limit is 48.00 dB (μV)), when the Line of the EUT is connected to AMN.

EUT : Electric Discharge Lamp Control Equipment Temperature : 22°C

Model No. : SP779# Humidity : 52%RH

Serial No. : E2010102906 Date of Test : Oct 22, 2010

Test Mode : Lighting

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.723	26.51	0.52	27.03	48.00	20.97	QP
	1.202	28.07	0.55	28.62	48.00	19.38	
	2.164	30.19	0.63	30.82	48.00	17.18	
	3.350	31.50	0.71	32.21	48.00	15.79	
	17.017	40.07	1.41	41.48	48.00	6.52	
	29.950	39.10	1.90	41.00	48.00	7.00	
Neutral	0.460	23.74	0.47	24.21	48.00	23.79	QP
	0.717	29.80	0.49	30.29	48.00	17.71	
	1.202	25.52	0.52	26.04	48.00	21.96	
	3.308	35.32	0.66	35.98	48.00	12.02	
	17.747	37.58	1.64	39.22	48.00	8.78	
	29.960	34.72	1.93	36.65	48.00	11.35	

TEST ENGINEER: WENCY YANG

EUT : Electric Discharge Lamp Control Equipment Temperature : 22°C

Model No. : SP780# Humidity : 52%RH

Serial No. : E2010102907 Date of Test : Oct 22, 2010

Test Mode : Lighting

Test Line	Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
Line	0.702	35.32	0.52	35.84	48.00	12.16	QP
	1.634	22.25	0.59	22.84	48.00	25.16	
	3.508	27.05	0.73	27.78	48.00	20.22	
	6.316	25.14	0.86	26.00	48.00	22.00	
	17.525	38.37	1.45	39.82	48.00	8.18	
	29.960	32.86	1.90	34.76	48.00	13.24	
Neutral	0.702	35.31	0.49	35.80	48.00	12.20	QP
	1.177	25.60	0.52	26.12	48.00	21.88	
	3.508	30.20	0.68	30.88	48.00	17.12	
	9.102	26.00	0.98	26.98	48.00	21.02	
	18.048	38.67	1.66	40.33	48.00	7.67	
	29.930	38.86	1.93	40.79	48.00	7.21	

TEST ENGINEER: WENCY YANG


4 MAGNETIC FIELD EMISSION TEST

4.1 Test Equipment

The following test equipment are used during the field strength test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Loop Antenna	Schaffner	HLA6120	1193	Apr 29, 2010	Apr 29, 2011
2.	Test Receiver	R&S	ESHS10	830223/007	Mar 07, 2010	Mar 07, 2011
3.	50Ω Coaxial Switch	ANRITSU	MP59B	6200426390	Sep 18, 2010	Mar 18, 2011
4.	Software	Audix	E3	SET00200 9912M295-2	--	--

4.2 Block Diagram of Test Setup

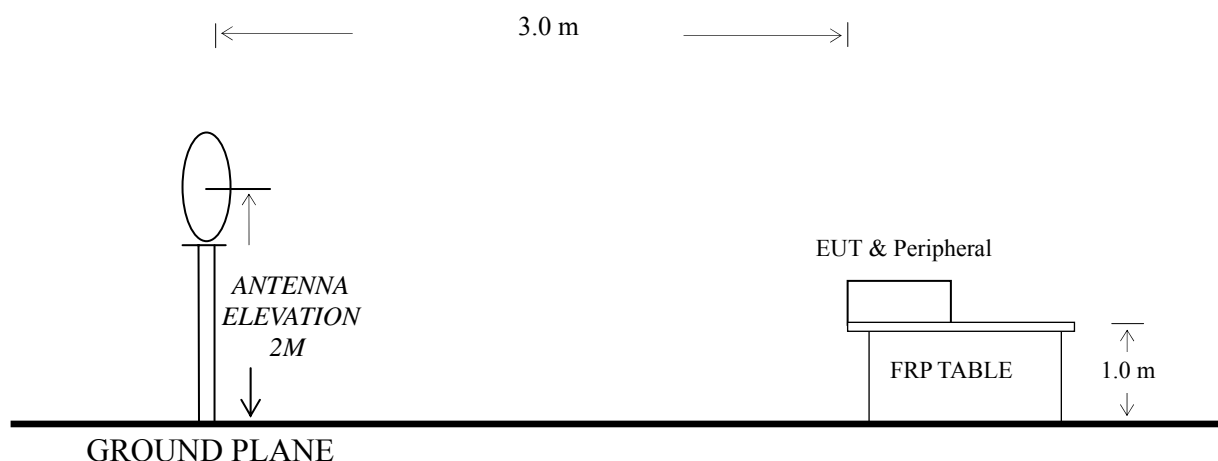

4.3 Magnetic Field Emission Limit (FCC Part 18 305(b))

All emanations from Non-ISM frequency devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

Frequency (MHz)	Distance (m)	Field Strength Limits ($\mu\text{V/m}$)	Converted Field Strength Limits By 3 Meters Measuring Distance dB ($\mu\text{V/m}$)
0.009~30	300	15	63.5
NOTE 1 - Distance refers to the distance in meters between the test antenna and the closed point of any part of the EUT.			
NOTE 2 - Audix Technology (Shanghai) Co., Ltd. only has a 3 meters Semi-anechoic Chamber to do the radiated disturbance test, therefore, Audix Shanghai used 3 meters measuring distance and converted limits to judge the EUT compliance with or not.			

4.4 Test Configuration

The FCC part 18 regulations test method must be used to find the maximum emission during Radiated Emission test.

The configuration of the EUT is same as used in conducted emission test. Please Refer to Section 3.4.

4.5 Operating Condition of EUT

- 4.5.1 Setup the EUT as shown on Section 4.2.
- 4.5.2 Turn on the power of all equipments.
- 4.5.3 Let the EUT work in test mode and test it.

4.6 Test Procedures

The EUT was placed on a table, which is 1.0 meter above ground. Measurements are performed at distance 3.0m with a 0.6m loop antenna as described in 2.2.4 of MP-5. The antenna shall be with the lower edge of the loop at height 2m above the floor.

The bandwidth setting on the test receiver (R&S Test Receiver ESHS10) is 200Hz from 9kHz to 150kHz and 10kHz from 150kHz to 30MHz. The EUT is tested in a semi-anechoic chamber.

All the test results are attached within Sec. 4.7.

4.7 Test Results

<PASS>

Refer to the following pages.

Model No	Test Mode	Data Page
SP779#	Lighting	P14
SP780#		P15

NOTE 1 – Factor = Antenna Factor + Cable Loss

Emission Level = Meter Reading + Factor

NOTE 2 – All reading are Quasi-Peak Values.

NOTE 3 – The worst case is for SP779# model. The worst emission is detected at 0.025 MHz with corrected signal level of 57.58 dB (μV) (limit is 63.50 dB (μV)).

EUT : Electric Discharge Lamp Control Equipment Temperature : 22°C

Model No. : SP779# Humidity : 52%RH

Serial No. : E2010102906 Date of Test : Oct 29, 2010

Test Mode : Lighting

Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
0.011	32.50	23.14	55.64	63.50	7.86	QP
0.019	31.00	21.76	52.76	63.50	10.74	
0.025	36.06	21.52	57.58	63.50	5.92	
0.030	35.15	21.42	56.57	63.50	6.93	
0.156	28.96	22.10	51.06	63.50	12.44	
1.198	34.98	21.51	56.49	63.50	7.01	

TEST ENGINEER: RAVEN JIN

EUT : Electric Discharge Lamp Control Equipment Temperature : 22°C

Model No. : SP780# Humidity : 52%RH

Serial No. : E2010102907 Date of Test : Oct 29, 2010

Test Mode : Lighting

Frequency (MHz)	Meter Reading dB(μV)	Factor (dB)	Emission Level dB(μV)	Limits dB(μV)	Margin (dB)	Remark
0.016	30.03	22.12	52.15	63.50	11.35	QP
0.026	34.31	21.52	55.83	63.50	7.67	
0.047	28.41	21.17	49.58	63.50	13.92	
0.154	29.29	22.12	51.41	63.50	12.09	
0.939	33.59	21.50	55.09	63.50	8.41	
1.218	31.59	21.52	53.11	63.50	10.39	

TEST ENGINEER: RAVEN JIN

5 RADIATED EMISSION TEST


5.1 Test Equipment

The following test equipments are used during the radiated emission test in a semi-anechoic chamber:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESVS10	844594/001	Mar 07, 2010	Mar 07, 2011
2.	Preamplifier	Agilent	8447D	2944A10548	Sep 19, 2010	Mar 19, 2011
3.	Bi-log Antenna	TESEQ	CBL6112D	23192	Dec 01, 2009	Dec 01, 2010
4.	Spectrum	Agilent	E7405A	MY45106600	Apr 30, 2010	Apr 30, 2011
5.	Software	Audix	E3	SET00200 9912M295-2	--	--

5.2 Block Diagram of Test Setup

5.2.1 Radiated emission test setup

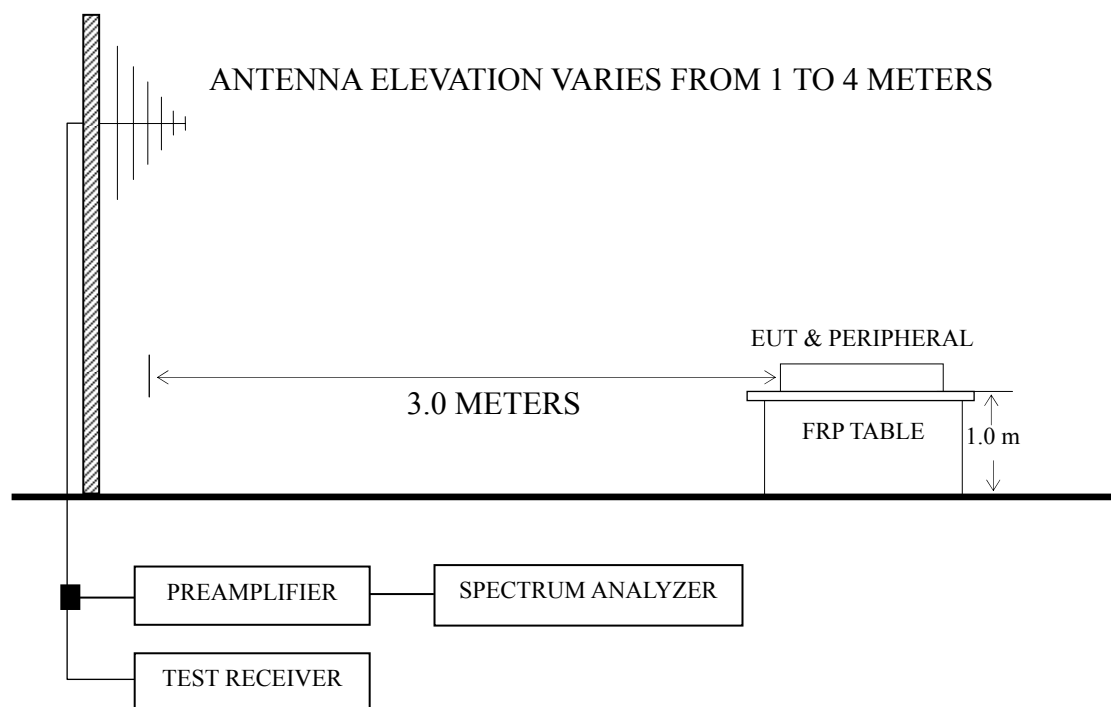

■ : 50 ohm Coaxial Switch

5.3 Radiated Emission Limit (FCC Part 18.305(c) Consumer Equipment)

Frequency (MHz)	Distance (m)	Field strength limits		Converted Field Strength Limits By 3 Meters Measuring Distance
		($\mu\text{V/m}$)	dB ($\mu\text{V/m}$)	dB ($\mu\text{V/m}$)
30 ~ 88	30	10	20.0	40.0
88 ~ 216	30	15	23.5	43.5
216 ~ 1000	30	20	26.0	46.0
NOTE 1 - The lower limit shall apply at the transition frequency. NOTE 2 - Measuring distance of 30 m is a primary requirement. However, 3 m (instead of 30 m) distance maybe allowed. In this case, the limits with measuring distance of 3 m shall be the above limit value increased $20\lg(30/3)=20\text{dB}$. NOTE 3 - 1 $\mu\text{V/m}$ is regarded as 0 dB $\mu\text{V/m}$.				

5.4 Test Configuration

The configuration of the EUT and peripherals are same as those used in conducted emission test.

Please refer to Sec.3.4.

5.5 Operating Condition of EUT

Same as conducted emission test which is listed in Sec.3.5, except for the test setup replaced by Sec.5.2.

5.6 Test Procedures

The EUT was placed on a turntable that is 1.0 meter above ground. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (Calibrated Bilog Antenna) was used as receiving antenna. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to FCC MP-5: 1986 requirements during radiated emission test.

The bandwidth of Test Receiver R&S ESVS10 was set at 120 kHz.

The frequency range from 30 MHz to 1000 MHz was checked.

The test mode was done on radiated disturbance test and all the test results are listed in Sec.5.7.

5.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Model No	Test Mode	Data Page
SP779#	Lighting	P19
SP780#		P20

NOTE 1 – Emission Level = Antenna Factor + Cable Loss + Meter Reading.

NOTE 2 – The emission levels that are 20dB below the official limit are not reported.

NOTE 3 – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

NOTE 4 – The worst case is for SP779# model. The worst emission at horizontal polarization was detected at 140.000 MHz with corrected signal level of 30.61 dB (μV/m) (limit is 43.50 dB (μV/m)), when the antenna was 1.00 m height and the turntable was at 73°. The worst emission at vertical polarization was detected at 31.940 MHz with corrected signal level of 33.33 dB (μV/m) (limit is 40.00 dB (μV/m)), when the antenna was 1.00 m height and the turntable was at 208°.

EUT : Electric Discharge Lamp Control Equipment Temperature : 22°C

Model No. : SP779# Humidity : 60%RH

Serial No. : E2010102906 Date of Test : Oct 29, 2010

Test Mode : Lighting

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	31.940	4.00	18.49	0.65	23.14	40.00	16.86
	62.980	12.15	6.57	0.86	19.58	40.00	20.42
	140.000	17.30	12.10	1.21	30.61	43.50	12.89
	167.740	16.88	10.27	1.32	28.47	43.50	15.03
	407.330	7.75	16.59	2.08	26.42	46.00	19.58
	805.030	4.28	20.73	2.90	27.91	46.00	18.09
Vertical	31.940	14.19	18.49	0.65	33.33	40.00	6.67
	56.000	23.69	7.46	0.82	31.97	40.00	8.03
	133.790	14.83	12.35	1.18	28.36	43.50	15.14
	167.740	18.17	10.27	1.32	29.76	43.50	13.74
	528.580	9.87	18.27	2.32	30.46	46.00	15.54
	877.780	10.52	21.49	3.00	35.01	46.00	10.99

TEST ENGINEER: RAVEN JIN

EUT : Electric Discharge Lamp Control Equipment Temperature : 22°C

Model No. : SP780# Humidity : 60%RH

Serial No. : E2010102907 Date of Test : Oct 29, 2010

Test Mode : Lighting

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	31.940	13.45	18.49	0.65	32.59	40.00	7.41
	58.130	23.20	6.96	0.83	30.99	40.00	9.01
	82.380	21.32	8.19	0.96	30.47	40.00	9.53
	130.000	16.90	12.52	1.17	30.59	43.50	12.91
	182.290	19.51	9.99	1.38	30.88	43.50	12.62
	427.700	7.18	16.89	2.12	26.19	46.00	19.81
Vertical	30.970	5.24	19.03	0.64	24.91	40.00	15.09
	104.690	10.83	11.88	1.06	23.77	43.50	19.73
	143.490	20.21	11.81	1.22	33.24	43.50	10.26
	182.000	23.70	9.96	1.38	35.04	43.50	8.46
	281.230	7.04	13.57	1.70	22.31	46.00	23.69
	633.340	3.51	19.37	2.52	25.40	46.00	20.60

TEST ENGINEER: RAVEN JIN

6 DEVIATION TO TEST SPECIFICATIONS

None.