

APPLICATION CERTIFICATION
On Behalf of
Dongguan Southstar Electronics Limited

echo™ EYE for Receiver Unit
Model No.: EE1.0A1

FCC ID: X8C-EE10A1

Prepared for : Dongguan Southstar Electronics Limited
Address : F Building, 3 Chengtian Rd., Mintian, Shatian Town
Dongguan, Guangdong, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20102044
Date of Test : October 14-22, 2010
Date of Report : October 23, 2010

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Description of Test Facility	6
1.3. Measurement Uncertainty	6
2. MEASURING DEVICE AND TEST EQUIPMENT	7
3. OPERATION OF EUT DURING TESTING	8
3.1. Operating Mode	8
3.2. Configuration and peripherals	8
4. TEST PROCEDURES AND RESULTS	9
5. 20DB BANDWIDTH TEST.....	10
5.1. Block Diagram of Test Setup.....	10
5.2. The Requirement For Section 15.247(a)(1).....	10
5.3. EUT Configuration on Measurement	10
5.4. Operating Condition of EUT	10
5.5. Test Procedure	11
5.6. Test Result	11
6. CARRIER FREQUENCY SEPARATION TEST.....	15
6.1. Block Diagram of Test Setup.....	15
6.2. The Requirement For Section 15.247(a)(1).....	15
6.3. EUT Configuration on Measurement	15
6.4. Operating Condition of EUT	15
6.5. Test Procedure	16
6.6. Test Result	16
7. NUMBER OF HOPPING FREQUENCY TEST	20
7.1. Block Diagram of Test Setup.....	20
7.2. The Requirement For Section 15.247(a)(1)(iii).....	20
7.3. EUT Configuration on Measurement	20
7.4. Operating Condition of EUT	20
7.5. Test Procedure	21
7.6. Test Result	21
8. DWELL TIME TEST	23
8.1. Block Diagram of Test Setup.....	23
8.2. The Requirement For Section 15.247(a)(1)(iii).....	23
8.3. EUT Configuration on Measurement	23
8.4. Operating Condition of EUT	23
8.5. Test Procedure	24
8.6. Test Result	24
9. MAXIMUM PEAK OUTPUT POWER TEST	28
9.1. Block Diagram of Test Setup.....	28
9.2. The Requirement For Section 15.247(b)(1).....	28
9.3. EUT Configuration on Measurement	28
9.4. Operating Condition of EUT	28
9.5. Test Procedure	29

9.6.	Test Result	29
10.	BAND EDGE COMPLIANCE CONDUCTED TEST.....	33
10.1.	Block Diagram of Test Setup.....	33
10.2.	The Requirement For Section 15.247(d)	33
10.3.	EUT Configuration on Measurement	33
10.4.	Operating Condition of EUT	34
10.5.	Test Procedure	34
10.6.	Test Result	35
11.	RADIATED SPURIOUS EMISSION AND BANDEDGE TEST	40
11.1.	Block Diagram of Test Setup.....	40
11.2.	The Limit For Section 15.247(d)	41
11.3.	Restricted bands of operation	41
11.4.	Configuration of EUT on Measurement	42
11.5.	Operating Condition of EUT	42
11.6.	Test Procedure	42
11.7.	The Field Strength of Radiation Emission Measurement Results	43
12.	AC POWER LINE CONDUCTED EMISSION FOR FCC PART 15 SECTION 15.207(A) ..	64
12.1.	Block Diagram of Test Setup.....	64
12.2.	The Emission Limit	64
12.3.	Configuration of EUT on Measurement	65
12.4.	Operating Condition of EUT	65
12.5.	Test Procedure	65
12.6.	Power Line Conducted Emission Measurement Results	66
13.	ANTENNA REQUIREMENT.....	69
13.1.	The Requirement	69
13.2.	Antenna Construction	69

Test Report Certification

Applicant : Dongguan Southstar Electronics Limited
Manufacturer : Dongguan Southstar Electronics Limited
EUT Description : echo™ EYE for Receiver Unit
(A) MODEL NO.: EE1.0A1
(B) SERIAL NO.: N/A
(C) POWER SUPPLY: DC 3.7V(Li-ion battery 1×) or
DC 7.5V/600mA (Adapter input)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : October 14-22, 2010

Prepared by :



(Engineer)

Approved & Authorized Signer :



(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	echo™ EYE for Receiver Unit
Model Number	:	EE1.0A1
Frequency Band	:	2402MHz-2480MHz
Number of Channels	:	40
Antenna Gain	:	1dBi
Power Supply	:	DC 3.7V(Li-ion battery 1×) or DC 7.5V/600mA (Adapter input)
Adapter	:	Model: RGD410750600 Input: AC 120V/60Hz Output: DC 7.5V/600mA
Applicant	:	Dongguan Southstar Electronics Limited
Address	:	F Building, 3 Chengtian Rd., Mintian, Shatian Town Dongguan, Guangdong, China
Manufacturer	:	Dongguan Southstar Electronics Limited
Address	:	F Building, 3 Chengtian Rd., Mintian, Shatian Town Dongguan, Guangdong, China
Date of sample received	:	October 10, 2010
Date of Test	:	October 14-22, 2010

1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC
The Registration Number is 752051

Listed by Industry Canada
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee
for Laboratories
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

1.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2
(Above 1GHz)

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 9, 2011
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 9, 2011
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 9, 2011
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 9, 2011
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 9, 2011
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 9, 2011
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 9, 2011
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 9, 2011
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 9, 2011
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 9, 2011

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode

The mode is used: Transmitting mode


Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

Hopping

3.2.Configuration and peripherals



Setup: Transmitting mode


(EUT: echoTM EYE for Receiver Unit)

4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.247(a)(1)	20dB Bandwidth Test	Compliant
Section 15.247(a)(1)	Carrier Frequency Separation Test	Compliant
Section 15.247(a)(1)(iii)	Number Of Hopping Frequency Test	Compliant
Section 15.247(a)(1)(iii)	Dwell Time Test	Compliant
Section 15.247(b)(1)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. 20DB BANDWIDTH TEST

5.1. Block Diagram of Test Setup



(EUT: echoTM EYE for Receiver Unit)

5.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. echoTM EYE for Receiver Unit (EUT)

Model Number	:	EE1.0A1
Serial Number	:	N/A
Manufacturer	:	Dongguan Southstar Electronics Limited

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in TX(Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, 2480MHz TX frequency to transmit.

5.5. Test Procedure

5.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

5.5.2. Set RBW of spectrum analyzer to 30kHz and VBW to 100kHz.

5.5.3. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

5.6. Test Result

PASS.

Date of Test:	October 21, 2010	Temperature:	25°C
EUT:	echo TM EYE for Receiver Unit	Humidity:	50%
Model No.:	EE1.0A1	Power Supply:	AC 120V/60Hz
Test Mode:	TX	Test Engineer:	Joe

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
Low	2402	0.570	---
Middle	2440	0.696	---
High	2480	0.978	---

The spectrum analyzer plots are attached as below.




*RBW 30 kHz Marker 1 [T1]
VBW 100 kHz 10.42 dBm
SWT 5 ms 2.401862000 GHz

Ref 20 dBm

Att 50 dB

1 PK
MAXH

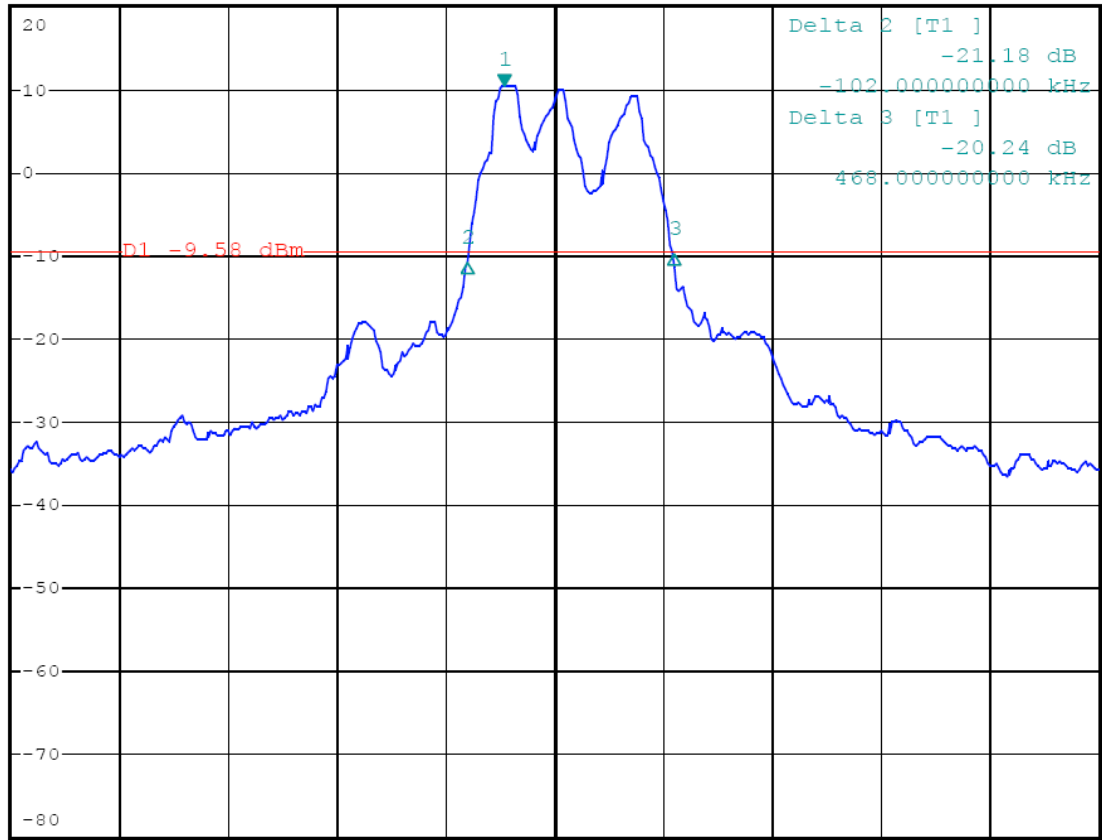


Center 2.402 GHz

300 kHz/

Span 3 MHz




1 PK
MAXH

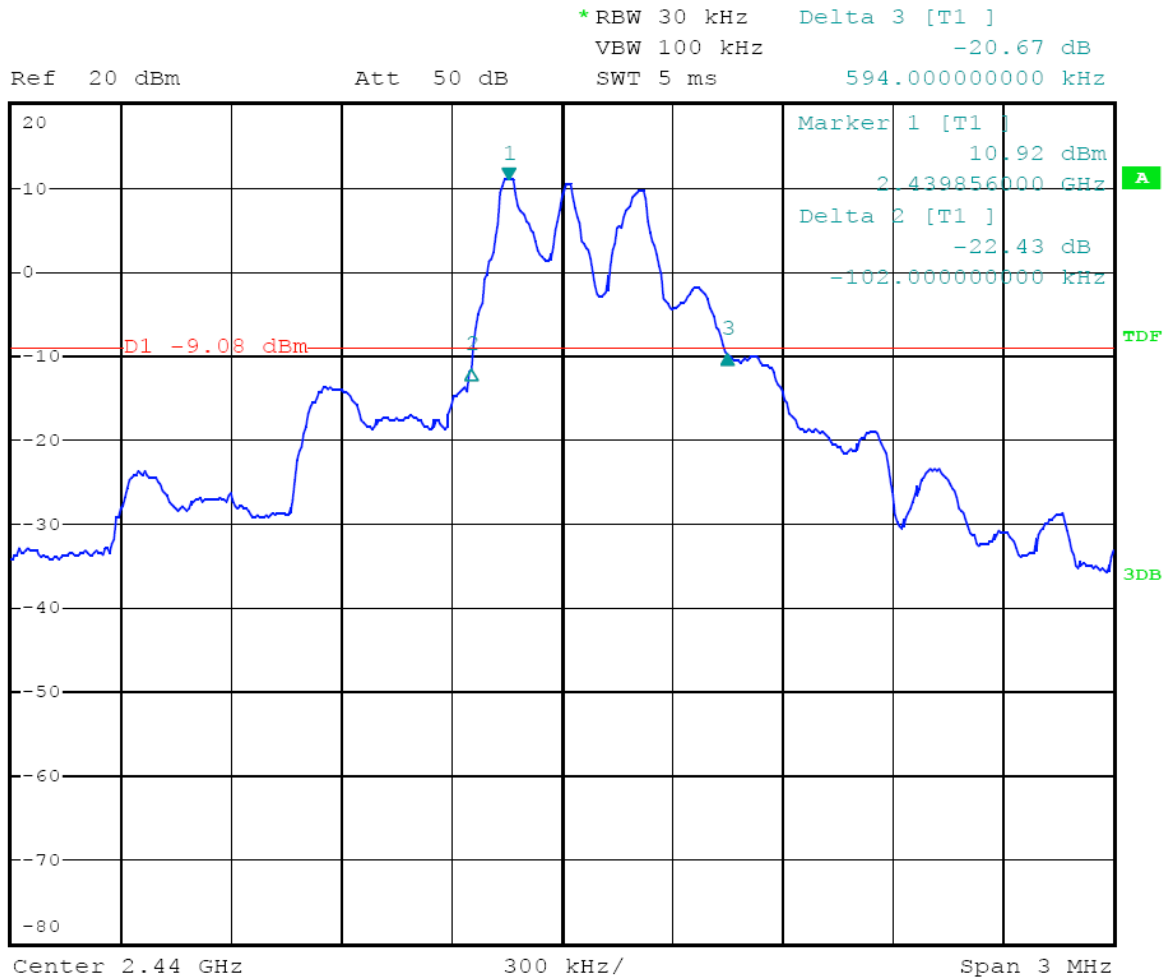




1 PK
MAXH

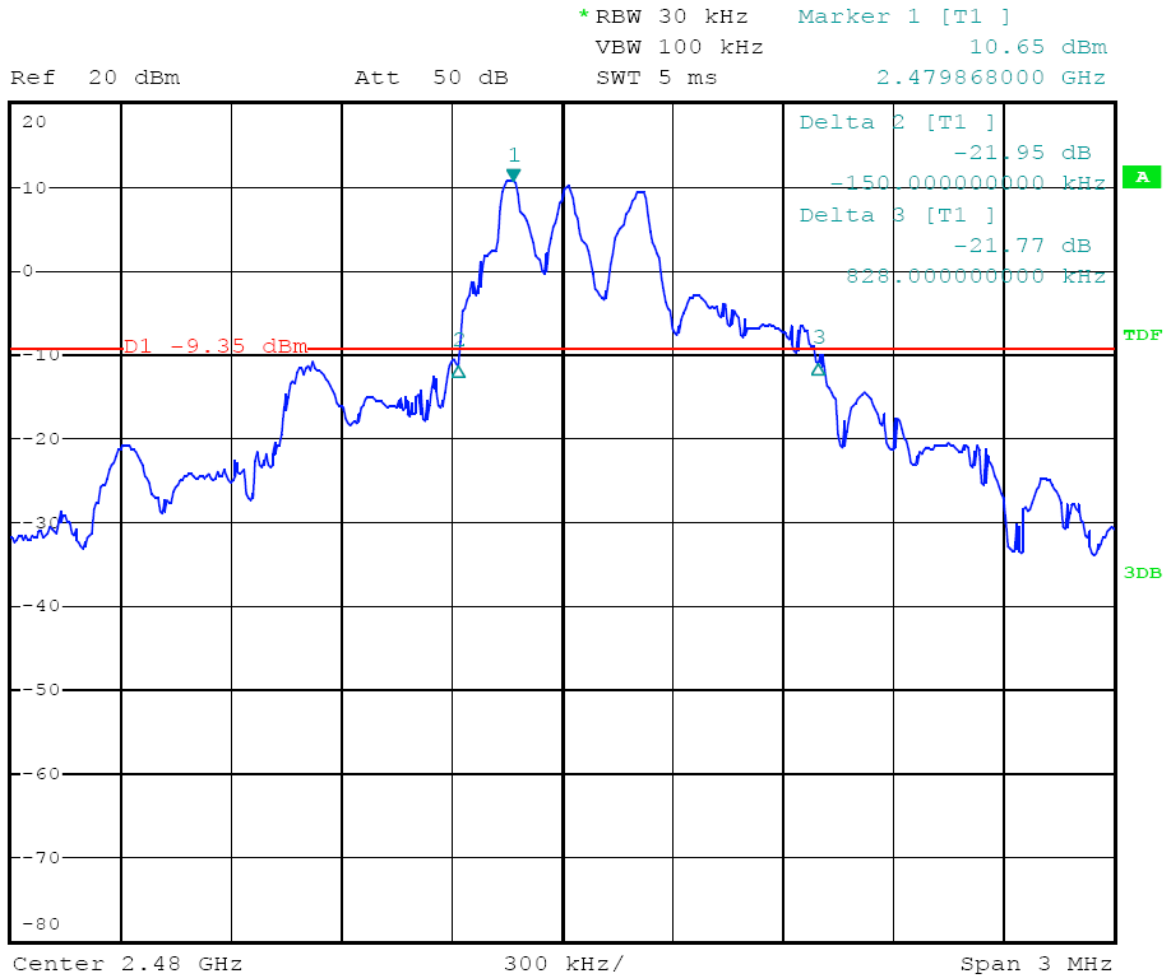

6. CARRIER FREQUENCY SEPARATION TEST

6.1. Block Diagram of Test Setup



(EUT: echoTM EYE for Receiver Unit)

6.2. The Requirement For Section 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

6.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. echoTM EYE for Receiver Unit (EUT)

Model Number	:	EE1.0A1
Serial Number	:	N/A
Manufacturer	:	Dongguan Southstar Electronics Limited

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz. Adjust Span to 6 MHz.

6.5.3. Set the adjacent channel of the EUT maxhold another trace.

6.5.4. Measurement the channel separation


6.6. Test Result


PASS.


Date of Test:	October 21, 2010	Temperature:	25°C
EUT:	echo TM EYE for Receiver Unit	Humidity:	50%
Model No.:	EE1.0A1	Power Supply:	AC 120V/60Hz
Test Mode:	Hopping	Test Engineer:	Joe

Channel	Channel Frequency (MHz)	Channel separation (MHz)	Limit
Low	2402	2.004	> 25 kHz or two-thirds of the 20 dB bandwidth (whichever is greater)
Middle	2440	2.004	> 25 kHz or two-thirds of the 20 dB bandwidth (whichever is greater)
High	2480	2.004	> 25 kHz or two-thirds of the 20 dB bandwidth (whichever is greater)

The spectrum analyzer plots are attached as below.

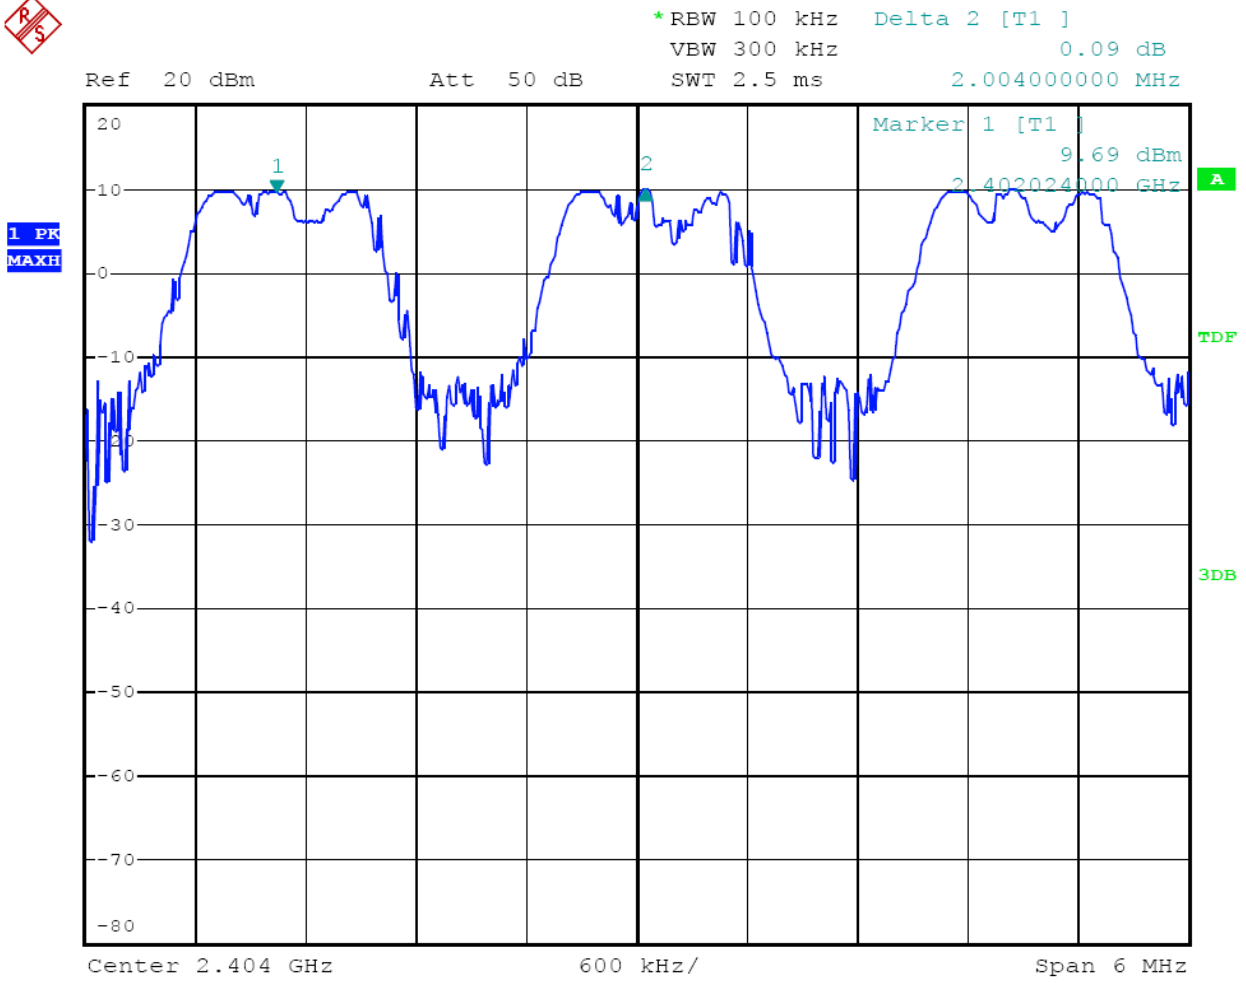


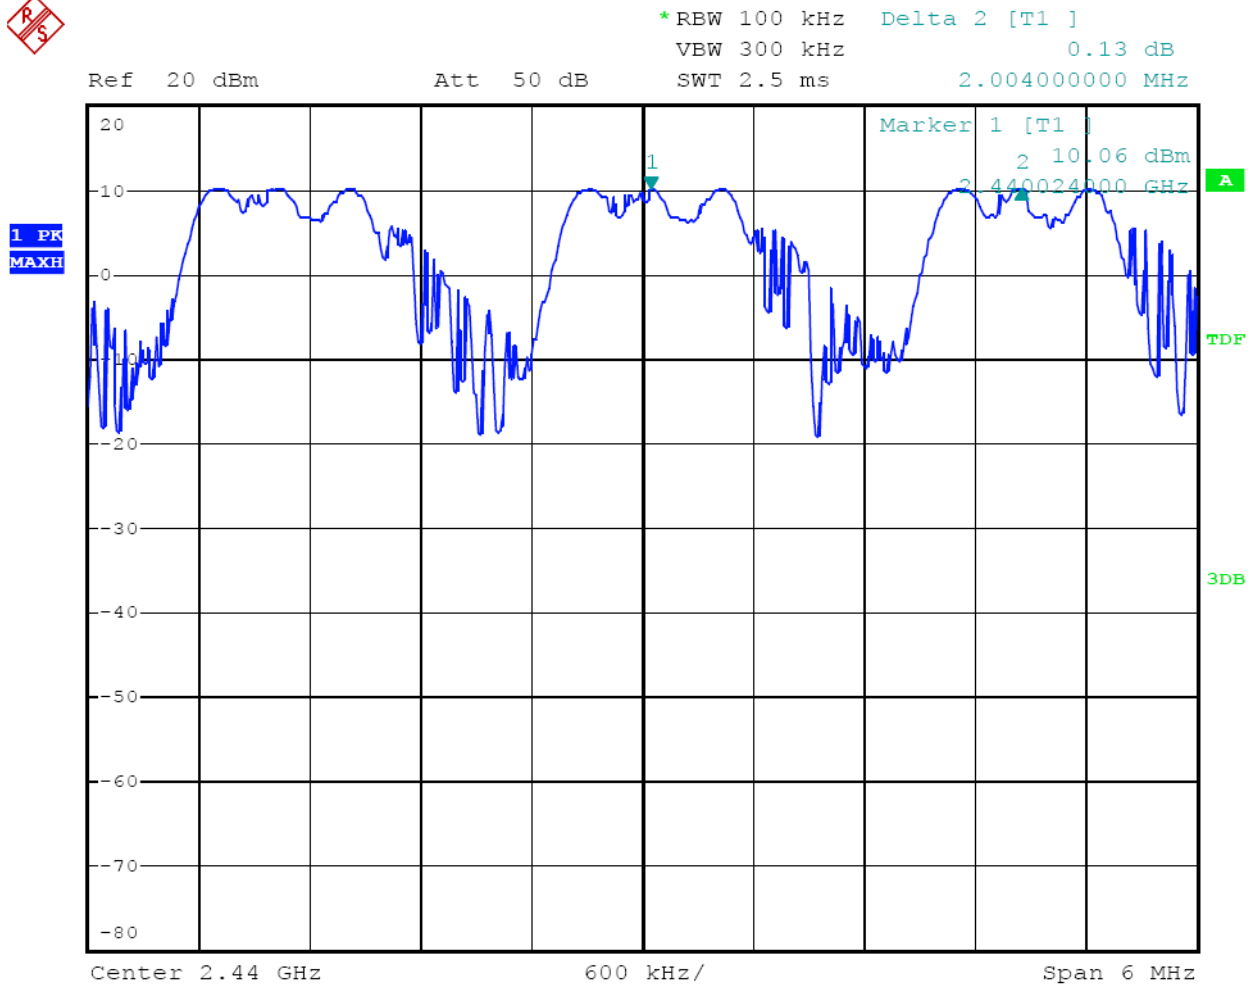

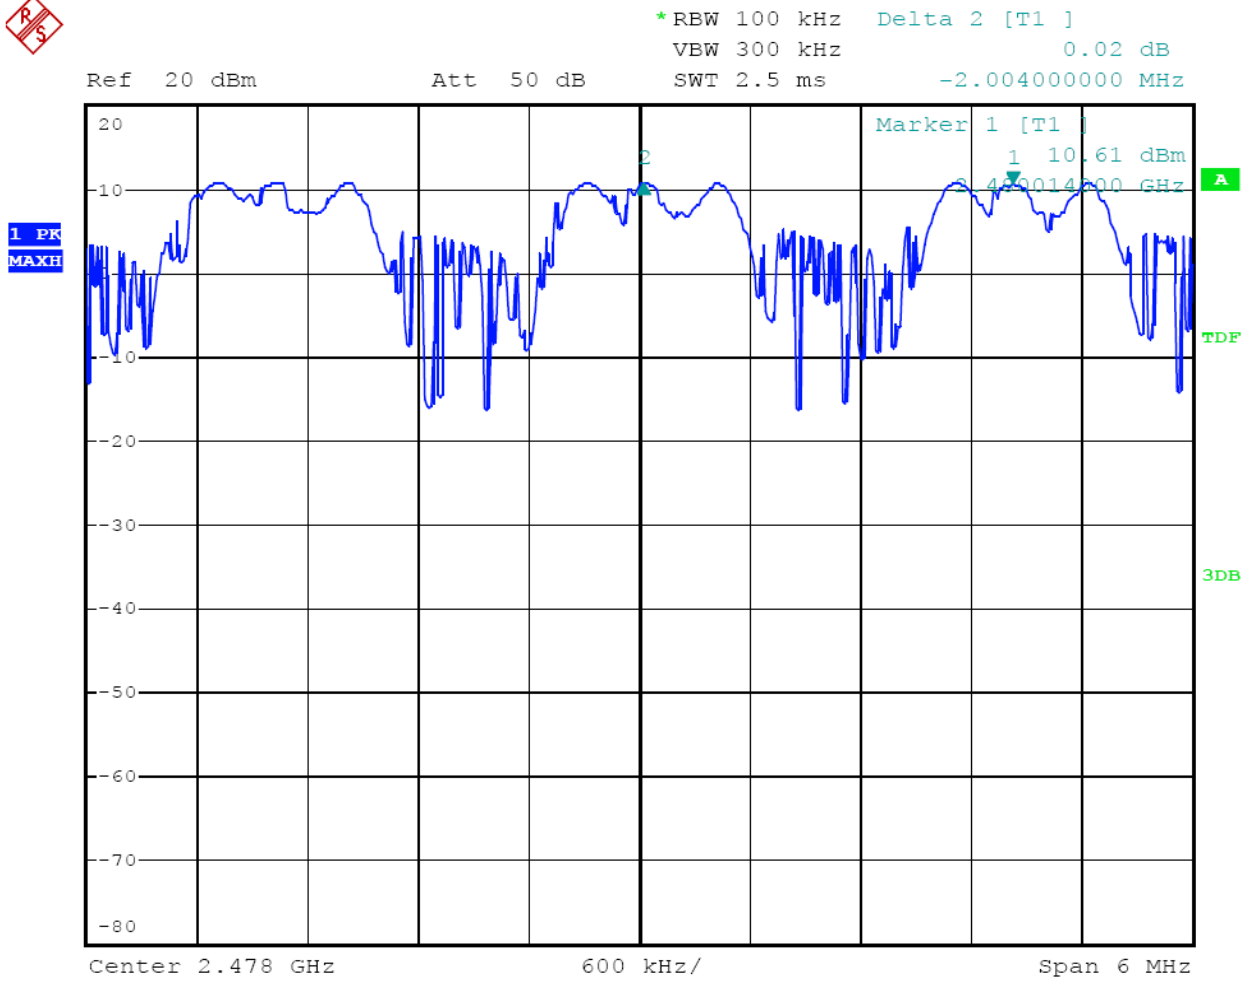

7. NUMBER OF HOPPING FREQUENCY TEST

7.1. Block Diagram of Test Setup



(EUT: echoTM EYE for Receiver Unit)

7.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.3.1. echoTM EYE for Receiver Unit (EUT)

Model Number	:	EE1.0A1
Serial Number	:	N/A
Manufacturer	:	Dongguan Southstar Electronics Limited

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX (Hopping on) modes measure it.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Set the spectrum analyzer as Span=90MHz, RBW=300kHz, VBW=300kHz.

7.5.3. Max hold, view and count how many channel in the band.

7.6. Test Result

PASS.

Date of Test:	<u>October 21, 2010</u>	Temperature:	<u>25°C</u>
EUT:	<u>echo™ EYE for Receiver Unit</u>	Humidity:	<u>50%</u>
Model No.:	<u>EE1.0A1</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>Hopping</u>	Test Engineer:	<u>Joe</u>

Total number of hopping channel	Measurement result (CH)	Limit (CH)
	40	≥15

The spectrum analyzer plots are attached as below.




*RBW 300 kHz
*VBW 300 kHz
SWT 2.5 ms

Ref 20 dBm


Att 50 dB

SWT 2.5 ms

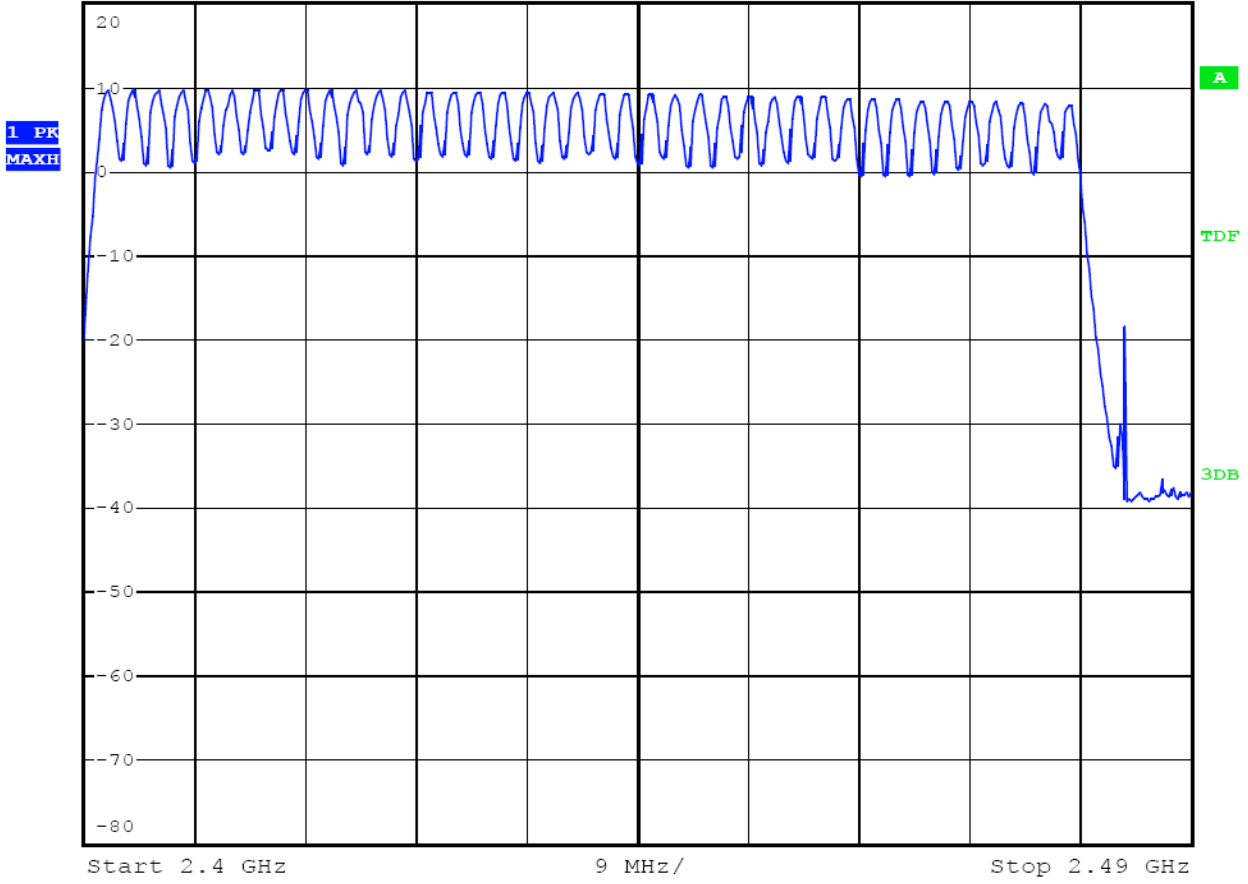

8. DWELL TIME TEST

8.1. Block Diagram of Test Setup



(EUT: echoTM EYE for Receiver Unit)

8.2. The Requirement For Section 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.3. EUT Configuration on Measurement

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.3.1. echoTM EYE for Receiver Unit (EUT)

Model Number	:	EE1.0A1
Serial Number	:	N/A
Manufacturer	:	Dongguan Southstat Electronics Limited

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.2. Set center frequency of spectrum analyzer = operating frequency.

8.5.3. Set the spectrum analyzer as RBW=100kHz, VBW=300kHz, Span=0Hz, Adjust Sweep=16s.

8.5.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz, Adjust Sweep=3ms. Get the pulse time.

8.5.5. Repeat above procedures until all frequency measured were complete.



8.6. Test Result



PASS.



Date of Test:	<u>October 21, 2010</u>	Temperature:	<u>25°C</u>
EUT:	<u>echo™ EYE for Receiver Unit</u>	Humidity:	<u>50%</u>
Model No.:	<u>EE1.0A1</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>Hopping</u>	Test Engineer:	<u>Joe</u>

A period transmit time = $0.4 \times 40 = 16$					
Dwell time = pulse time $\times$ burst (in 16 sec.)					
Channel	Channel Frequency (MHz)	Pulse Time (ms)	Burst (in 16 sec.)	Dwell Time (ms)	Limit (ms)
Low	2402	1.308	123	160.9	400
Middle	2440	1.308	123	160.9	400
High	2480	1.326	123	163.1	400

The spectrum analyzer plots are attached as below.

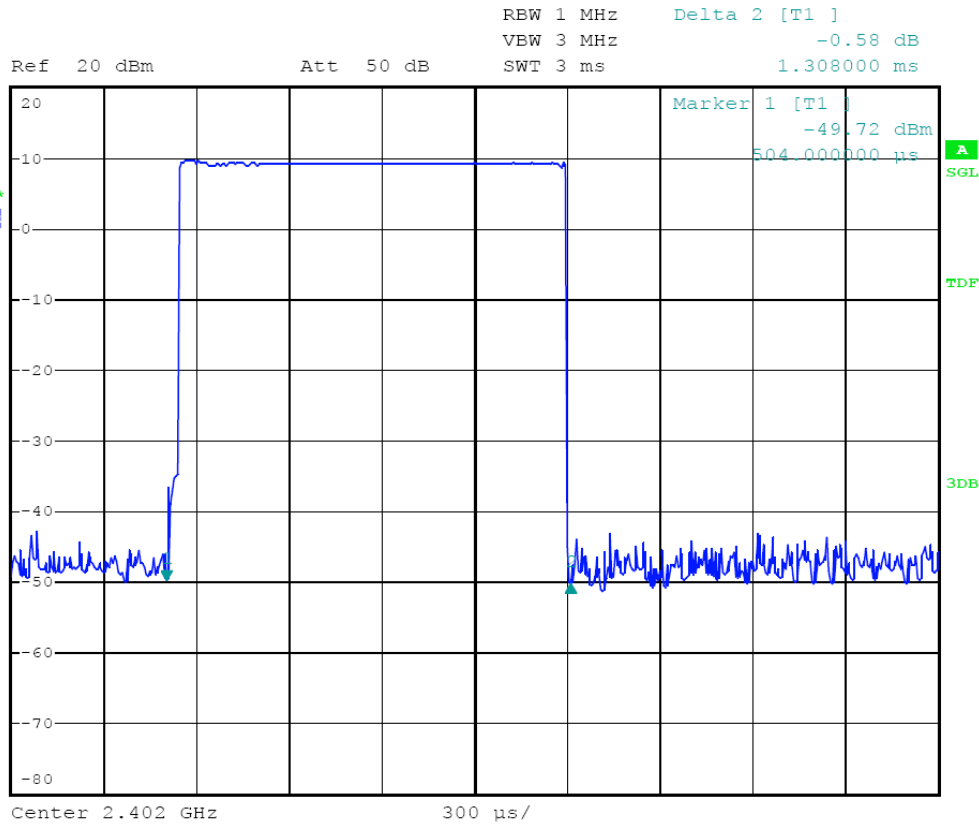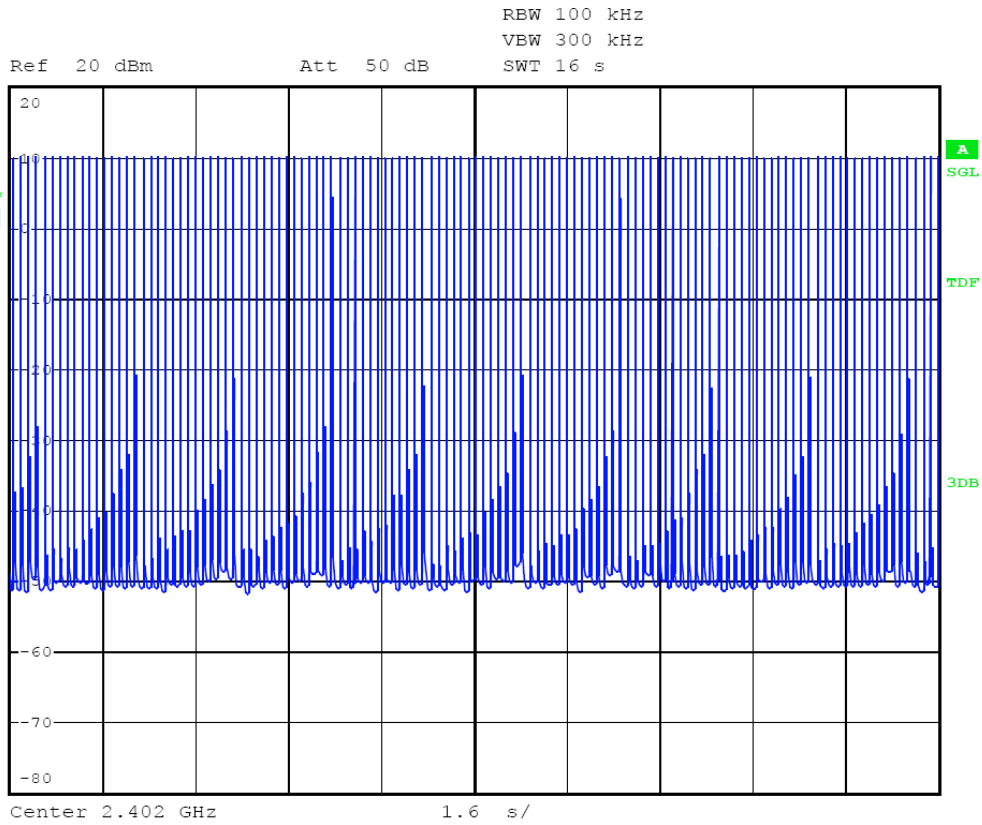


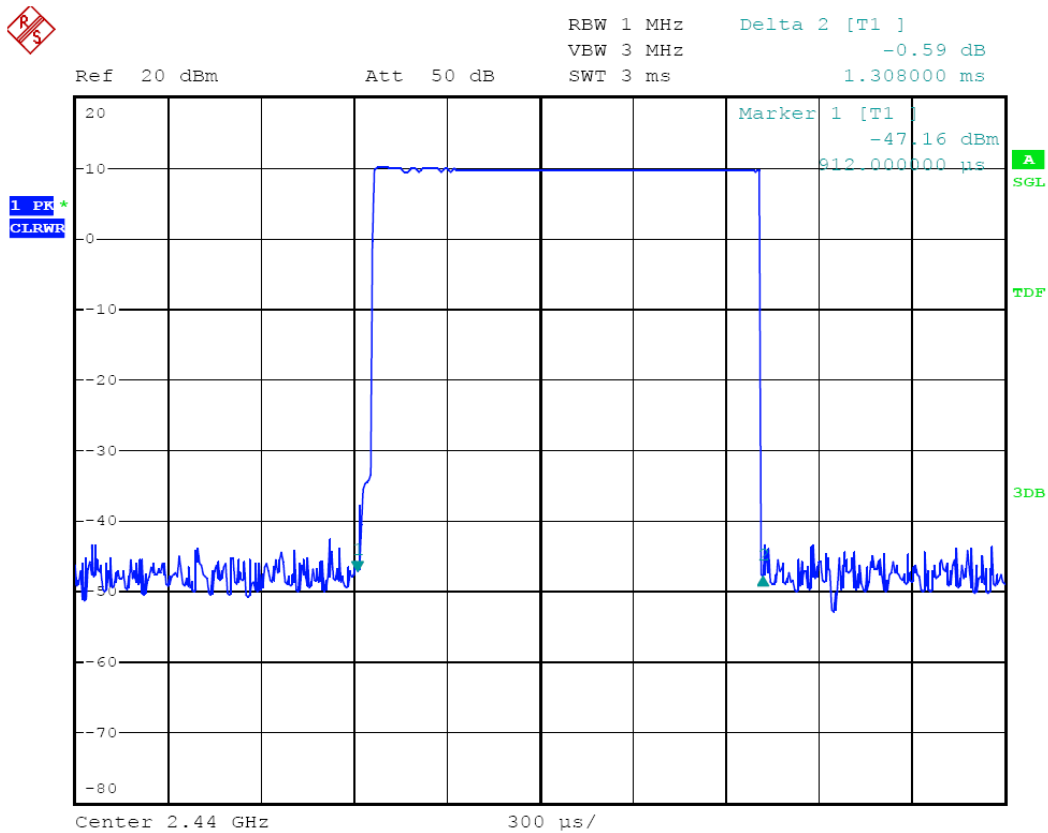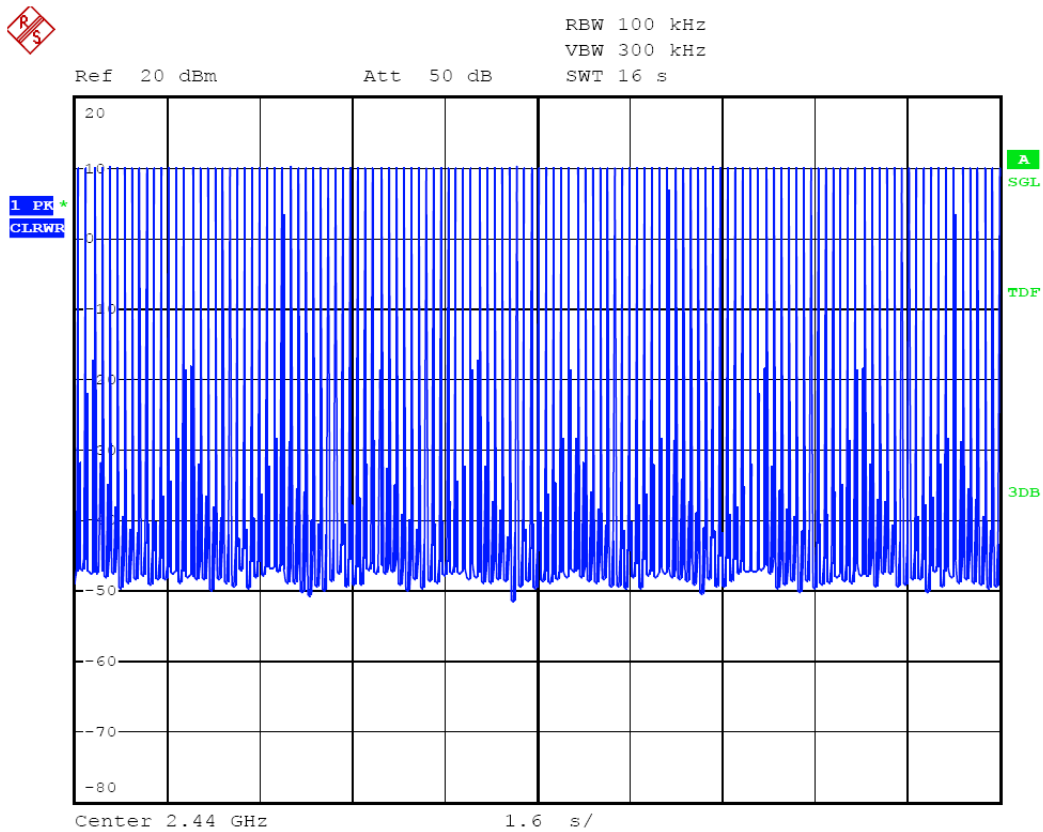

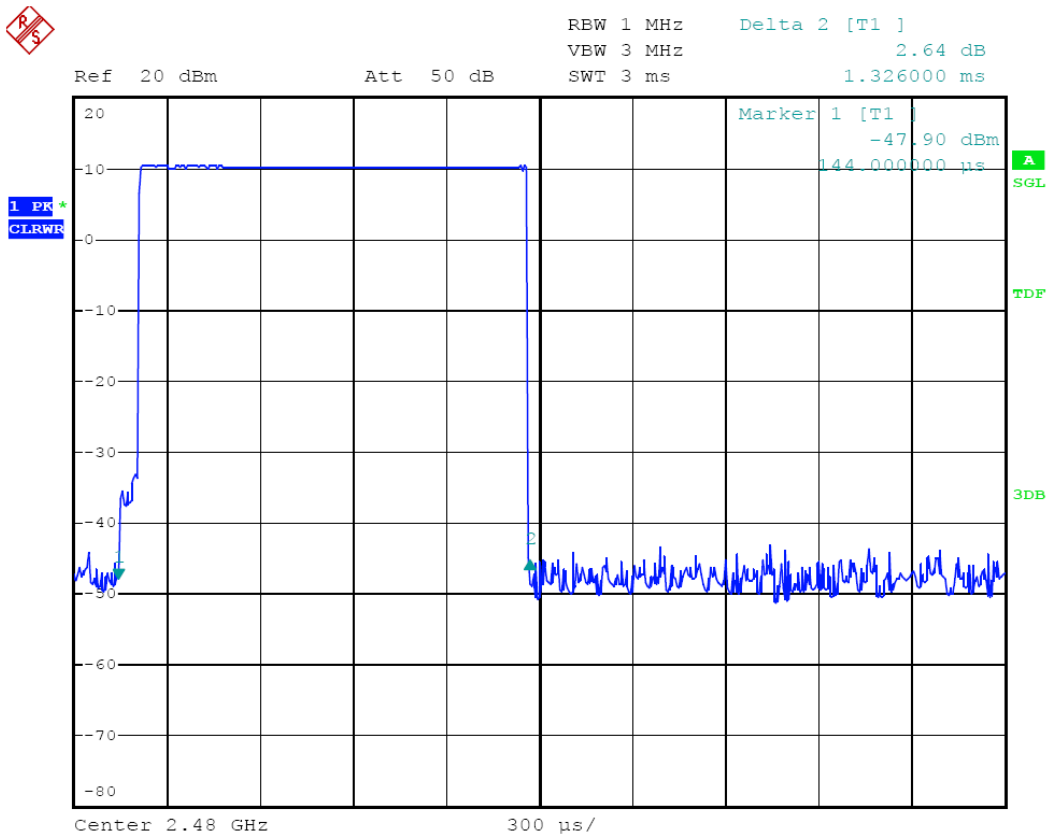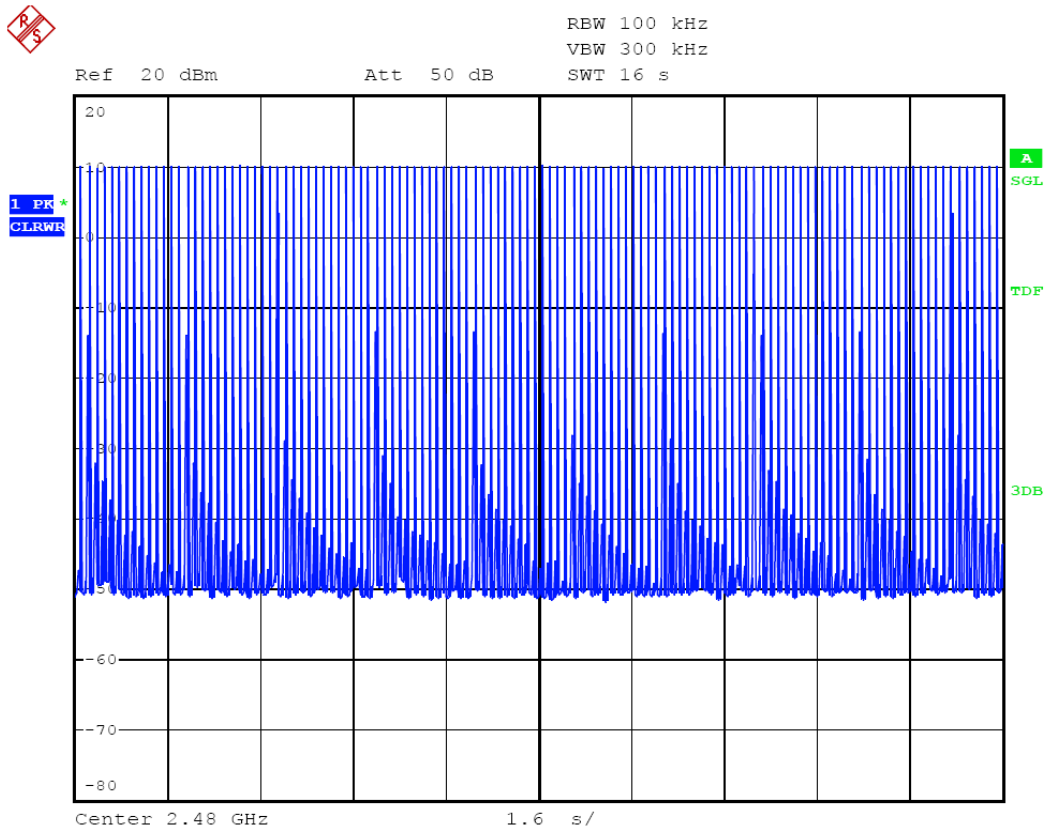

9. MAXIMUM PEAK OUTPUT POWER TEST

9.1. Block Diagram of Test Setup



(EUT: echoTM EYE for Receiver Unit)

9.2. The Requirement For Section 15.247(b)(1)

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.3.1. echoTM EYE for Receiver Unit (EUT)

Model Number	:	EE1.0A1
Serial Number	:	N/A
Manufacturer	:	Dongguan Southstar Electronics Limited

9.4. Operating Condition of EUT

9.4.1. Setup the EUT and simulator as shown as Section 9.1.

9.4.2. Turn on the power of all equipment.

9.4.3. Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, 2480MHz TX frequency to transmit.

9.5. Test Procedure

9.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

9.5.2. Set RBW of spectrum analyzer to 1MHz and VBW to 3MHz.

9.5.3. Measurement the maximum peak output power.

9.6. Test Result

PASS.

Date of Test:	October 21, 2010	Temperature:	25°C
EUT:	echo™ EYE for Receiver Unit	Humidity:	50%
Model No.:	EE1.0A1	Power Supply:	AC 120V/60Hz
Test Mode:	TX	Test Engineer:	Joe

Channel	Frequency (MHz)	Peak Output Power (dBm)	Peak Output Power (mW)	Limits dBm / W
Low	2402	9.53	8.974	30 dBm / 1 W
Middle	2440	8.63	7.295	30 dBm / 1 W
High	2480	7.50	5.623	30 dBm / 1 W

The spectrum analyzer plots are attached as below.



*RBW 1 MHz Marker 1 [T1]
VBW 3 MHz 9.53 dBm
SWT 2.5 ms 2.401970000 GHz


Ref 20 dBm

Att 50 dB

SWT 2.5 ms

2.401970000 GHz


1 PK
MAXH

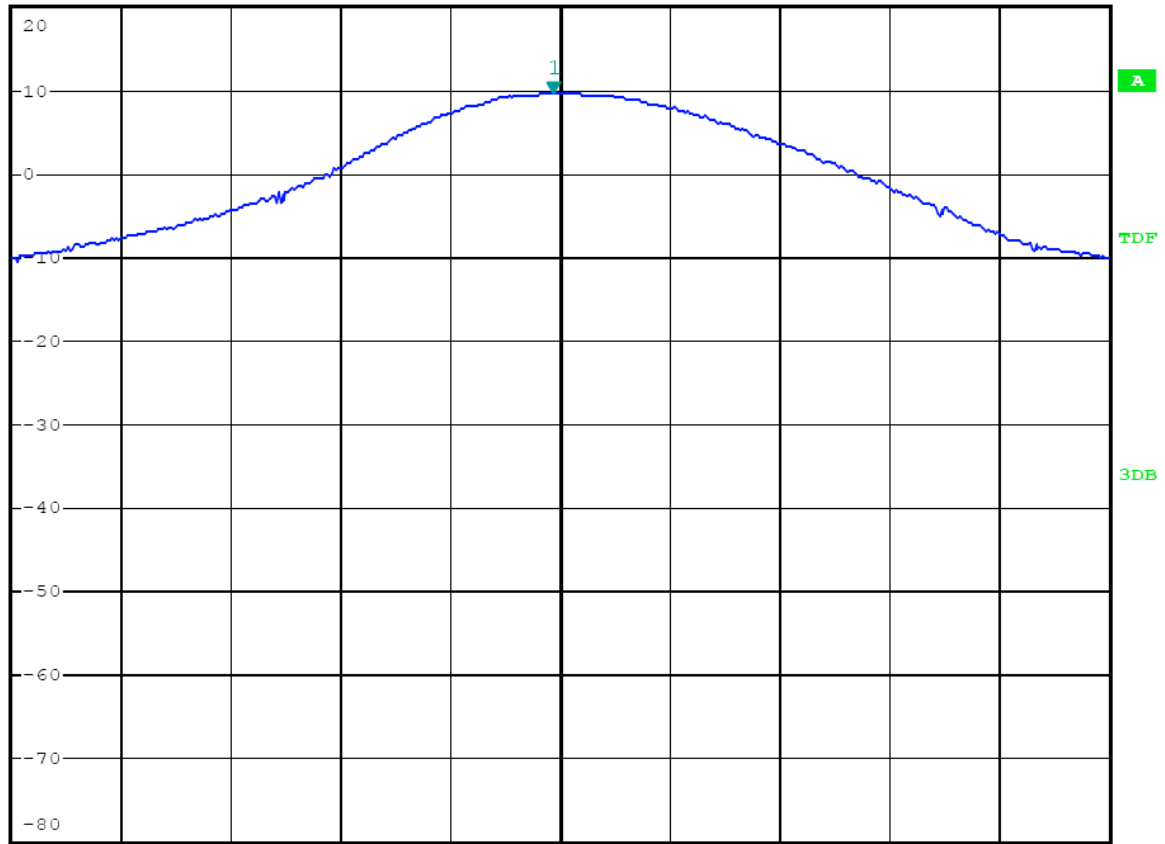


Center 2.402 GHz

500 kHz/


Span 5 MHz

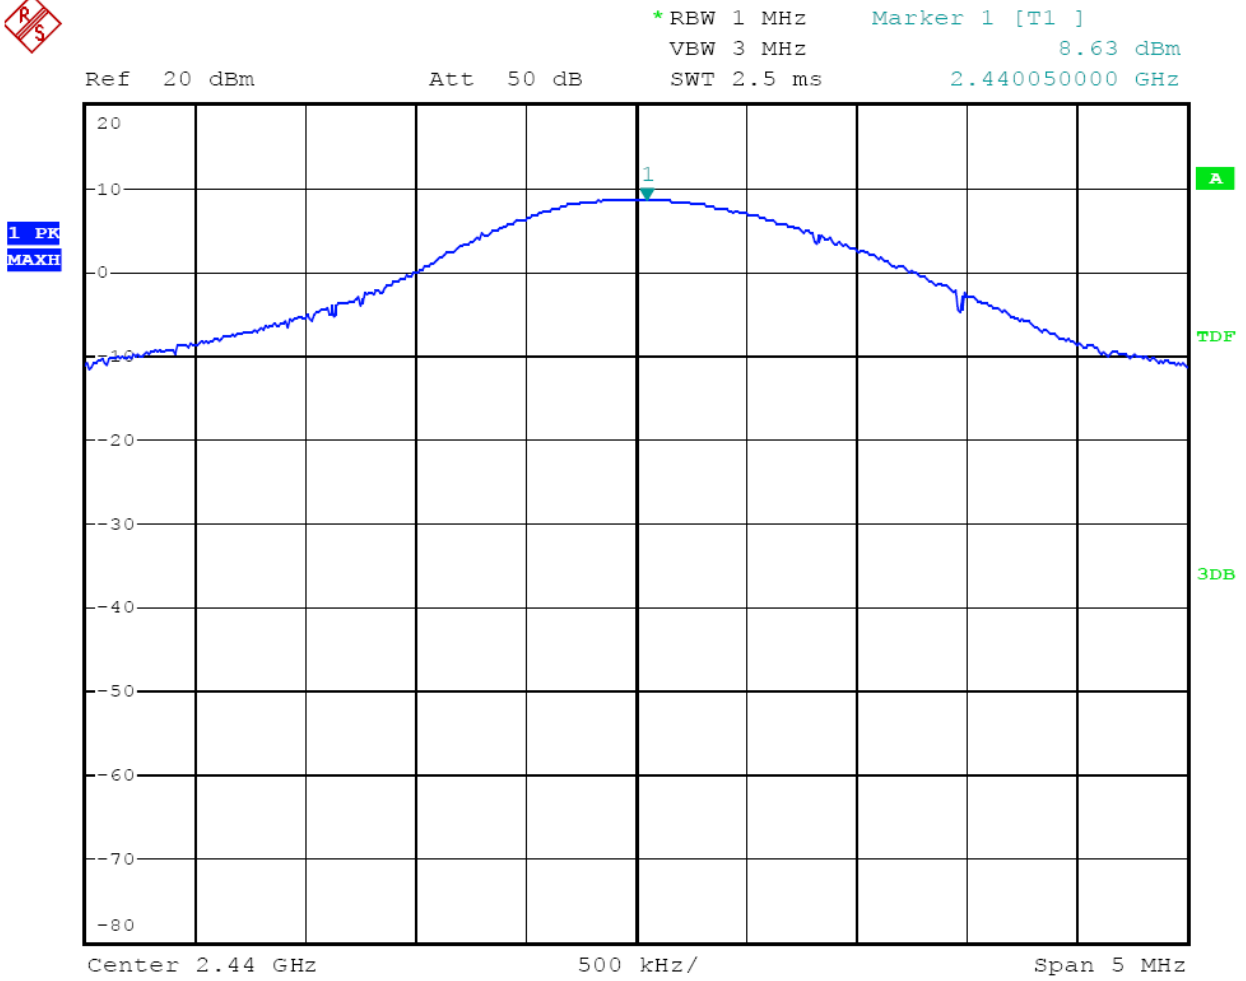

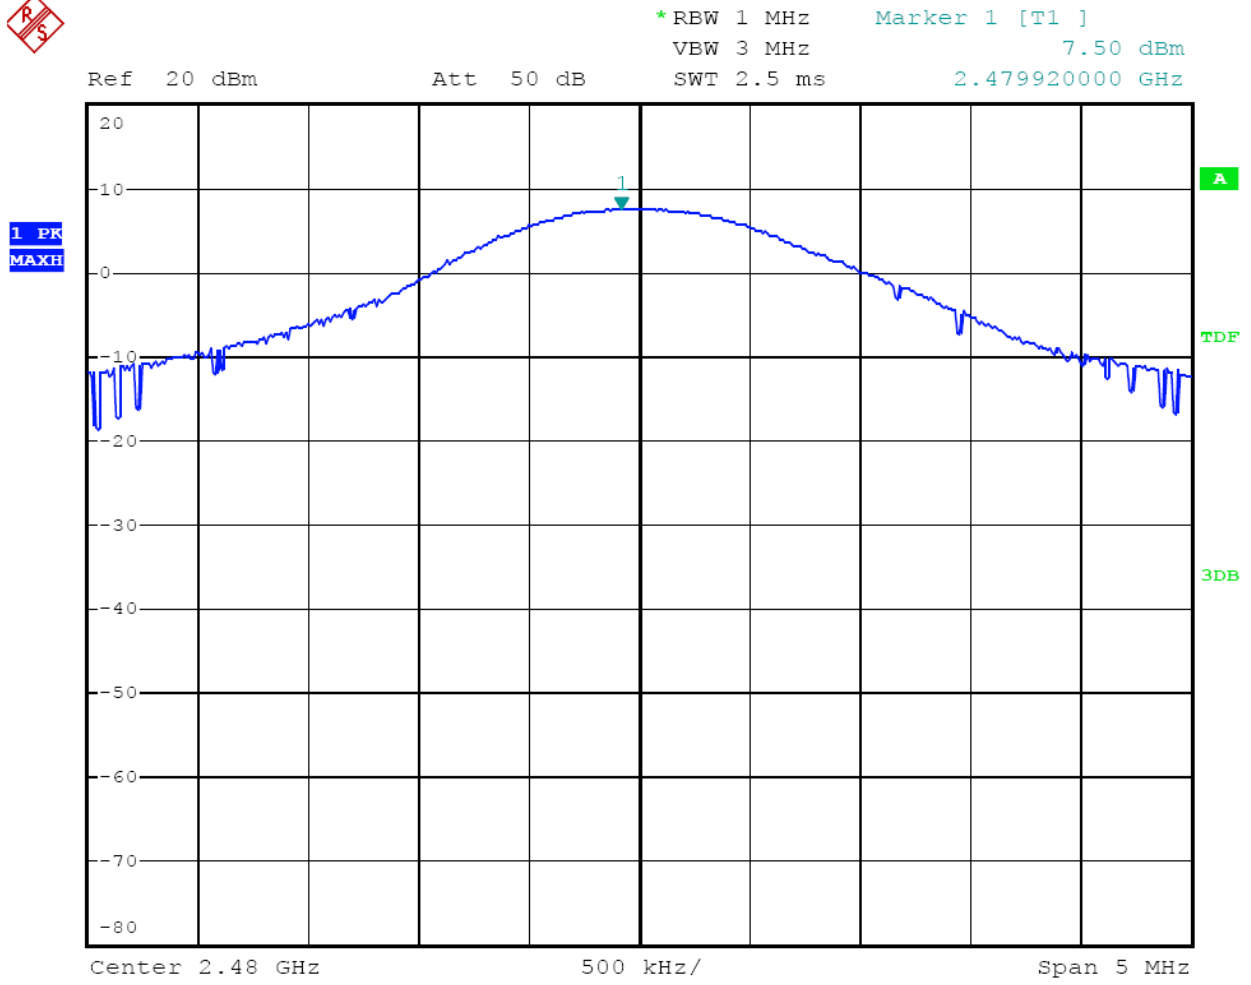

10.BAND EDGE COMPLIANCE CONDUCTED TEST

10.1.Block Diagram of Test Setup



(EUT: echoTM EYE for Receiver Unit)

10.2.The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.3.1.echoTM EYE for Receiver Unit (EUT)

Model Number	:	EE1.0A1
Serial Number	:	N/A
Manufacturer	:	Dongguan Southstar Electronics Limited

10.4.Operating Condition of EUT

10.4.1.Setup the EUT and simulator as shown as Section 10.1.

10.4.2.Turn on the power of all equipment.

10.4.3.Let the EUT work in TX (Hopping off, Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

10.5.Test Procedure

10.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

10.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz.

10.5.3.The band edges was measured and recorded.

10.6. Test Result

Pass

Date of Test:	<u>October 22, 2010</u>	Temperature:	<u>25°C</u>
EUT:	<u>echo™ EYE for Receiver Unit</u>	Humidity:	<u>50%</u>
Model No.:	<u>EE1.0A1</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>TX (Hopping off)</u>	Test Engineer:	<u>Joe</u>


Conducted test

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2402	37.41	> 20dBc
2480	42.52	> 20dBc

Date of Test:	<u>October 22, 2010</u>	Temperature:	<u>25°C</u>
EUT:	<u>echo™ EYE for Receiver Unit</u>	Humidity:	<u>50%</u>
Model No.:	<u>EE1.0A1</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>TX (Hopping on)</u>	Test Engineer:	<u>Joe</u>

Conducted test

Frequency (MHz)	Result of Band Edge (dBc)	Limit of Band Edge (dBc)
2402	38.63	> 20dBc
2480	43.41	> 20dBc

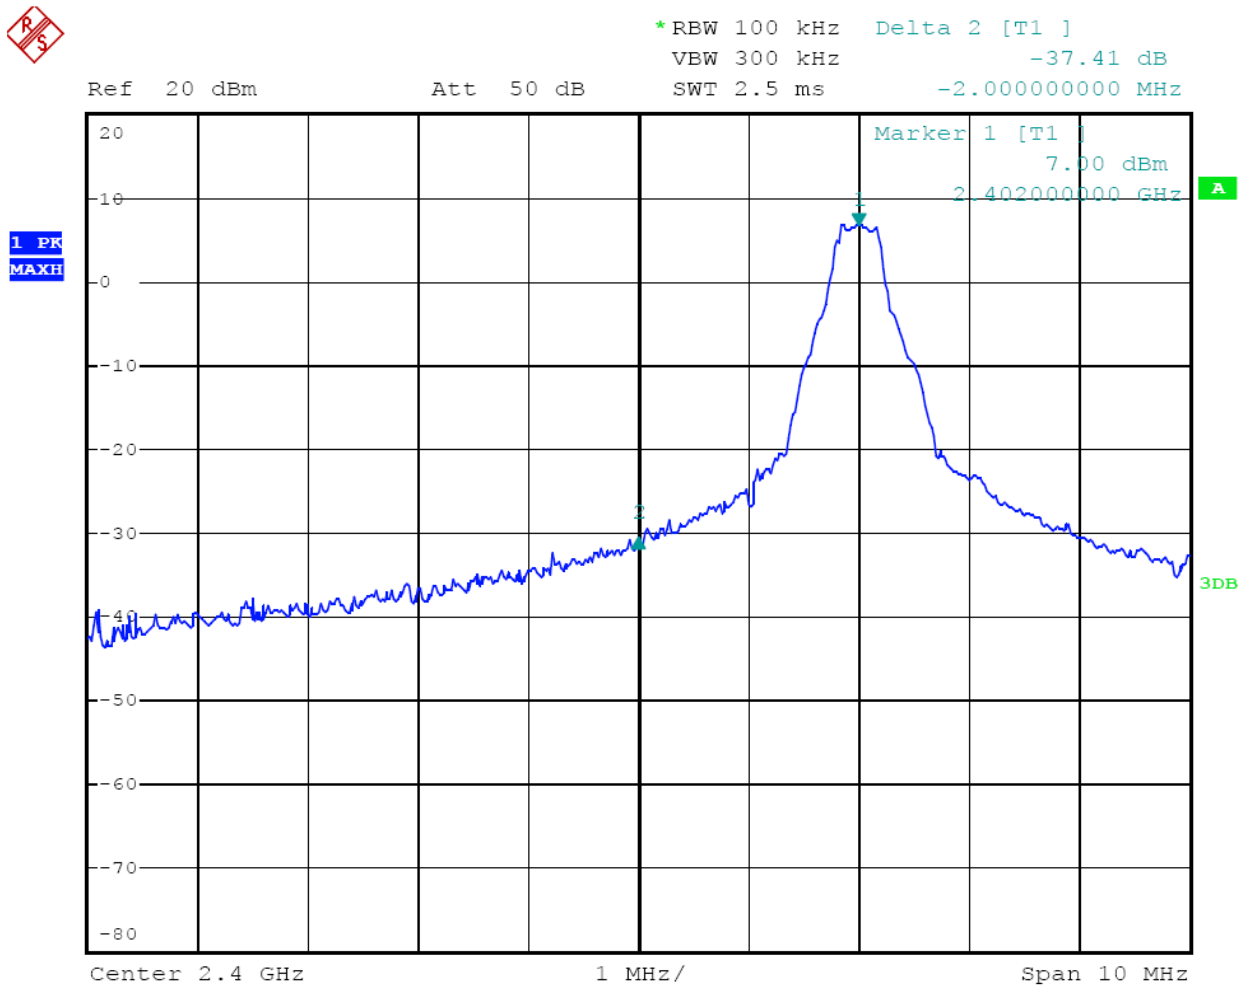




*RBW 100 kHz Delta 2 [T1]
VBW 300 kHz -42.53 dB
SWT 2.5 ms 3.660000000 MHz

Ref 20 dBm Att 50 dB


1 PK
MAXH

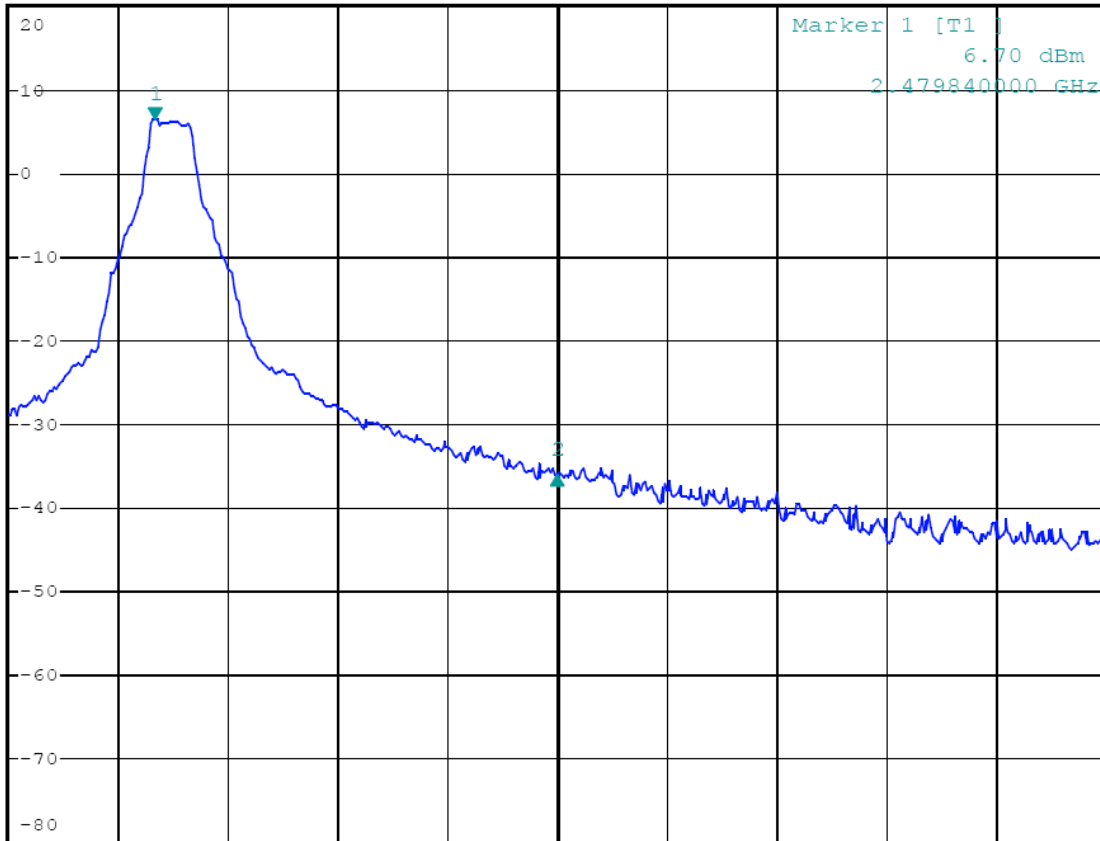


Center 2.4835 GHz 1 MHz/ Span 10 MHz



1 PK
MAXH

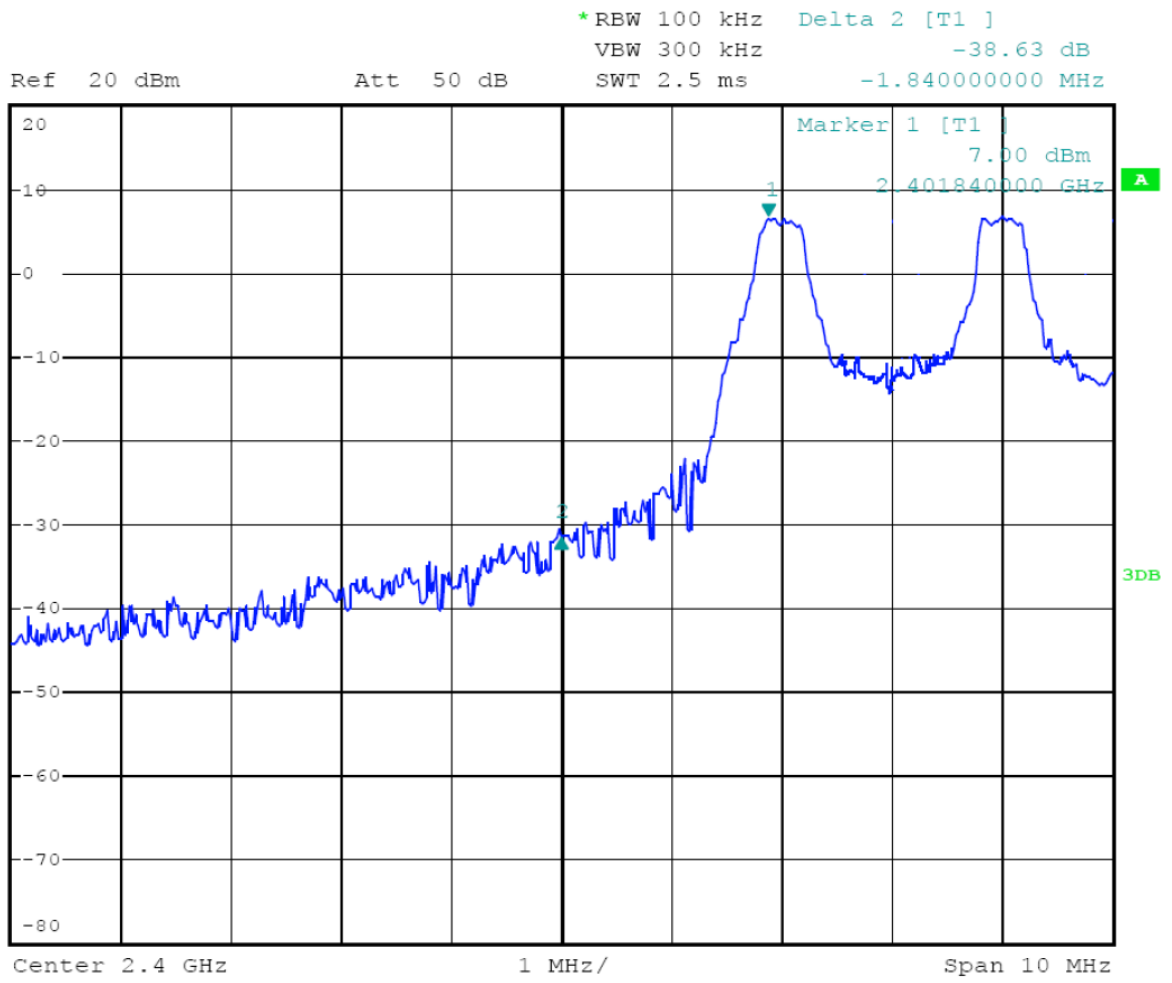


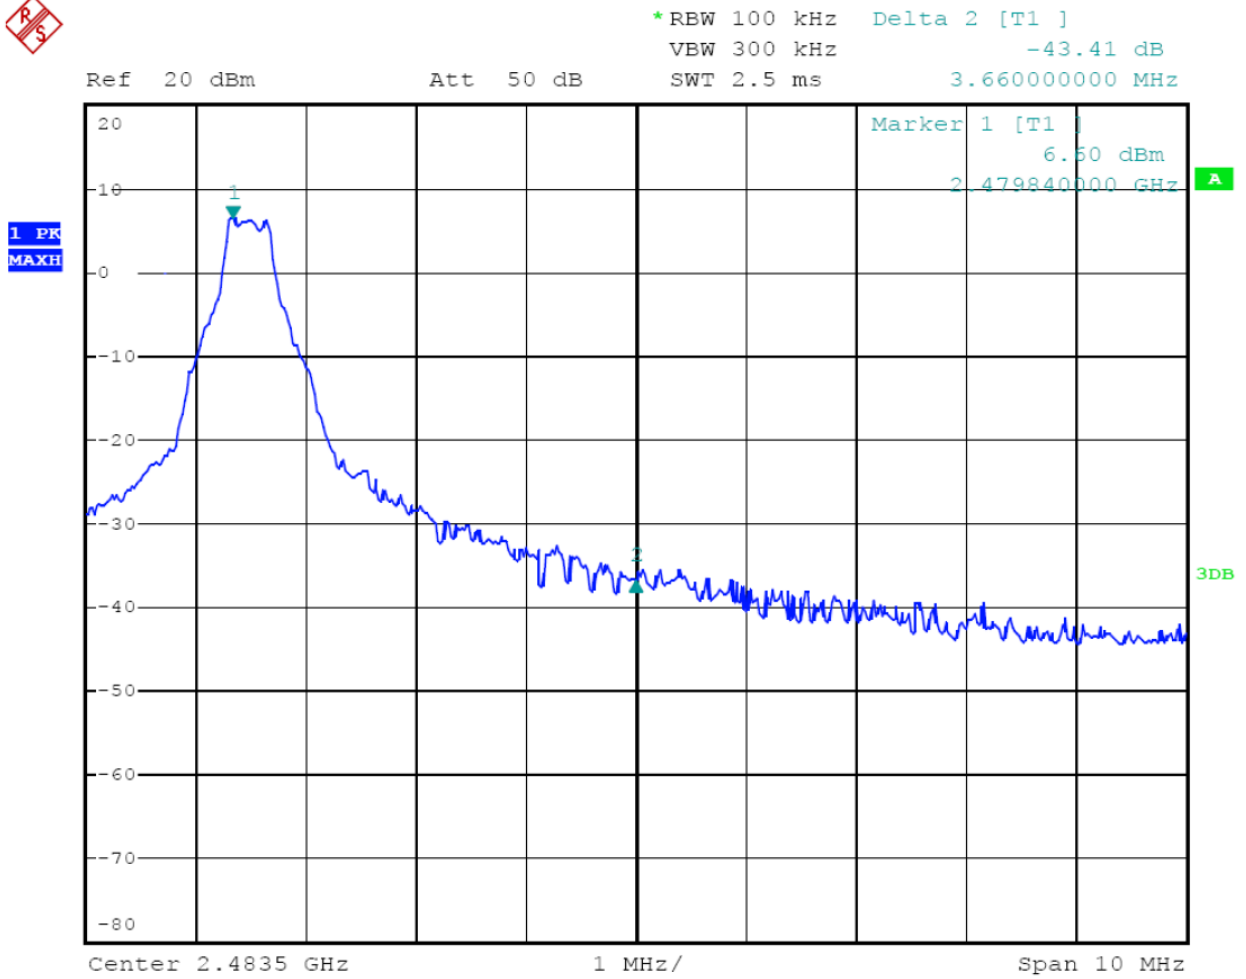

11.RADIATED SPURIOUS EMISSION AND BANDEDGE TEST

11.1.Block Diagram of Test Setup


11.1.1.Block diagram of connection between the EUT and simulators



Setup: Transmitting mode

(EUT: echoTM EYE for Receiver Unit)

11.1.2.Semi-Anechoic Chamber Test Setup Diagram

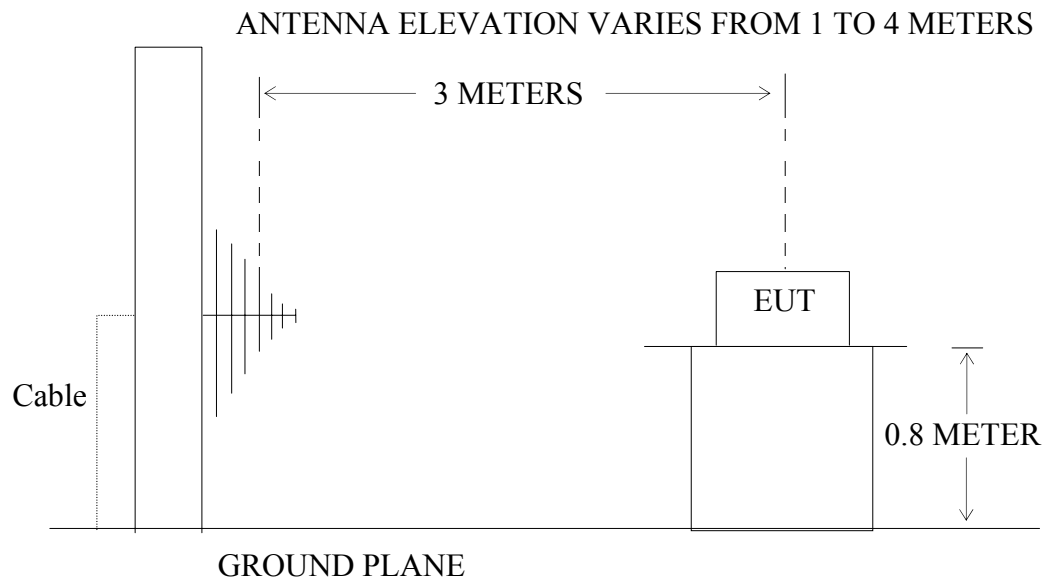

(EUT: echoTM EYE for Receiver Unit)

11.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.Restricted bands of operation

11.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

11.4.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.1.echo™ EYE for Receiver Unit (EUT)

Model Number : EE1.0A1
 Serial Number : N/A
 Manufacturer : Dongguan Southstar Electronics Limited

11.5.Operating Condition of EUT

11.5.1.Setup the EUT and simulator as shown as Section 11.1.

11.5.2.Turn on the power of all equipment.

11.5.3.Let the EUT work in TX (Hopping off) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2440MHz, 2480MHz TX frequency to transmit.

11.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 120kHz in 30-1000MHz. and set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 25000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

11.7. The Field Strength of Radiation Emission Measurement Results

PASS.

Date of Test:	October 18-19, 2010	Temperature:	25°C
EUT:	echo™ EYE for Receiver Unit	Humidity:	50%
Model No.:	EE1.0A1	Power Supply:	AC 120V/60Hz
Test Mode:	TX (2402MHz)	Test Engineer:	Joe

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
189.0250	24.40	16.00	40.40	43.5	-3.10	Vertical
243.0260	25.91	16.96	42.87	46.0	-3.13	Vertical
270.0310	24.43	18.20	42.63	46.0	-3.37	Vertical
189.0250	24.07	16.06	40.13	43.5	-3.37	Horizontal
243.0260	25.68	16.96	42.64	46.0	-3.36	Horizontal
270.0310	24.77	18.20	42.97	46.0	-3.03	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2400.00	40.20	43.64	-7.46	32.74	36.18	54	74	-21.26	-37.82	Vertical
2402.010	104.66	108.17	-7.45	97.21	100.72	-	-	-	-	Vertical
*4804.016	49.53	53.24	-0.30	49.23	52.94	54	74	-4.77	-21.06	Vertical
7206.024	43.72	47.21	2.97	46.69	50.18	54	74	-7.31	-23.82	Vertical
2400.00	40.70	44.14	-7.46	33.24	36.68	54	74	-20.76	-37.32	Horizontal
2402.010	103.22	106.70	-7.45	95.77	99.25	-	-	-	-	Horizontal
*4804.016	49.39	52.88	-0.30	49.09	52.58	54	74	-4.91	-21.42	Horizontal
7206.024	43.17	46.61	2.97	46.14	49.58	54	74	-7.86	-24.42	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

Date of Test:	October 18-19, 2010	Temperature:	25°C
EUT:	echo™ EYE for Receiver Unit	Humidity:	50%
Model No.:	EE1.0A1	Power Supply:	AC 120V/60Hz
Test Mode:	TX (2440MHz)	Test Engineer:	Joe

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
189.0250	24.06	16.00	40.06	43.5	-3.44	Vertical
243.0260	25.12	16.96	42.08	46.0	-3.92	Vertical
270.0310	24.31	18.20	42.51	46.0	-3.49	Vertical
189.0250	23.66	16.06	39.72	43.5	-3.78	Horizontal
243.0260	25.36	16.96	42.32	46.0	-3.68	Horizontal
270.0310	24.16	18.20	42.36	46.0	-3.64	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2440.010	104.70	108.23	-7.36	97.34	100.87	-	-	-	-	Vertical
*4880.017	49.26	52.74	0.13	49.39	52.87	54	74	-4.61	-21.13	Vertical
*7320.025	43.19	46.66	3.24	46.43	49.90	54	74	-7.57	-24.10	Vertical
2440.010	103.23	106.73	-7.36	95.87	99.37	-	-	-	-	Horizontal
*4880.017	49.00	52.47	0.13	49.13	52.60	54	74	-4.87	-21.40	Horizontal
*7320.025	42.12	45.64	3.24	45.36	48.88	54	74	-8.64	-25.12	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**

Date of Test:	October 18-19, 2010	Temperature:	25°C
EUT:	echo TM EYE for Receiver Unit	Humidity:	50%
Model No.:	EE1.0A1	Power Supply:	AC 120V/60Hz
Test Mode:	TX (2480MHz)	Test Engineer:	Joe

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
189.0250	24.32	16.00	40.32	43.5	-3.18	Vertical
243.0260	25.20	16.96	42.46	46.0	-3.54	Vertical
270.0310	24.43	18.20	42.63	46.0	-3.37	Vertical
189.0250	23.41	16.06	39.47	43.5	-4.03	Horizontal
243.0260	25.19	16.96	42.15	46.0	-3.85	Horizontal
270.0310	24.40	18.20	42.60	46.0	-3.40	Horizontal

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2480.010	103.03	106.51	-7.37	95.66	99.14	-	-	-	-	Vertical
2483.500	40.91	44.45	-7.37	33.54	37.08	54	74	-20.46	-36.92	Vertical
*4960.018	48.14	551.65	0.52	48.66	52.17	54	74	-5.34	-21.83	Vertical
*7440.026	41.70	45.20	3.69	45.39	48.89	54	74	-8.61	-25.11	Vertical
2480.010	104.92	108.45	-7.37	97.55	101.08	-	-	-	-	Horizontal
2483.500	40.87	44.38	-7.37	33.50	37.01	54	74	-20.50	-36.99	Horizontal
*4960.018	49.08	52.61	0.52	49.60	53.13	54	74	-4.40	-20.87	Horizontal
*7440.026	42.82	46.36	3.69	46.51	50.05	54	74	-7.49	-23.95	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.**



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #941

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: echo™ EYE for Receiver Unit

Mode: TX 2402MHz

Model: EE1.0A1

Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2010/10/18

Time: 10:33:12

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

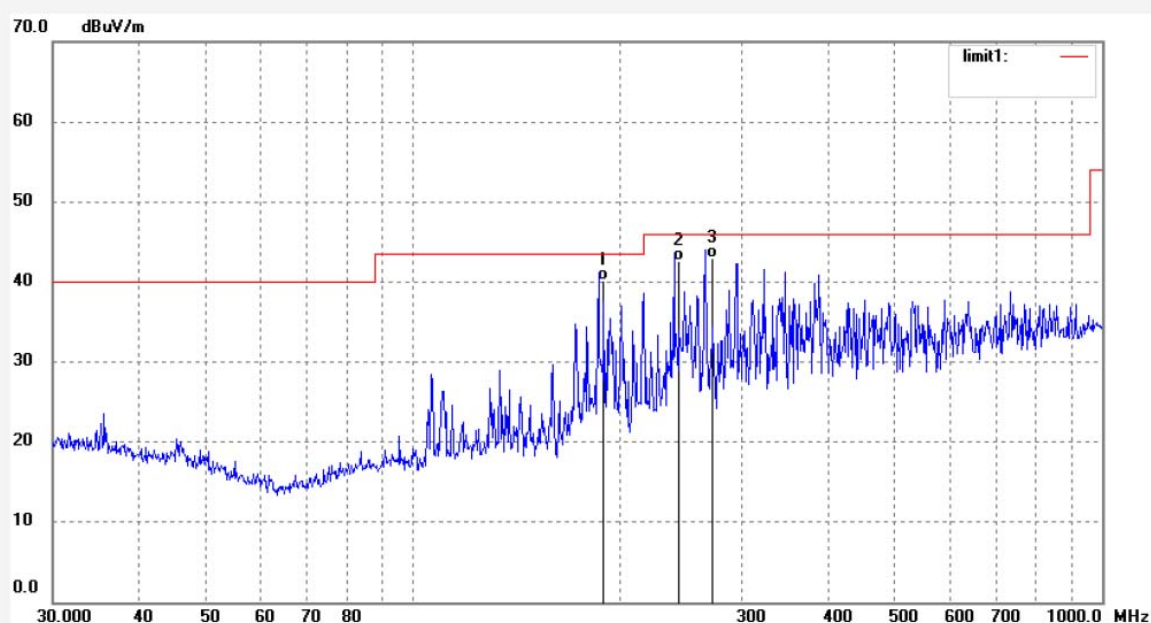

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.0250	24.07	16.06	40.13	43.50	-3.37	QP			
2	243.0260	25.68	16.96	42.64	46.00	-3.36	QP			
3	270.0310	24.77	18.20	42.97	46.00	-3.03	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #942

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: echo™ EYE for Receiver Unit

Mode: TX 2402MHz

Model: EE1.0A1

Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2010/10/18

Time: 10:36:49

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

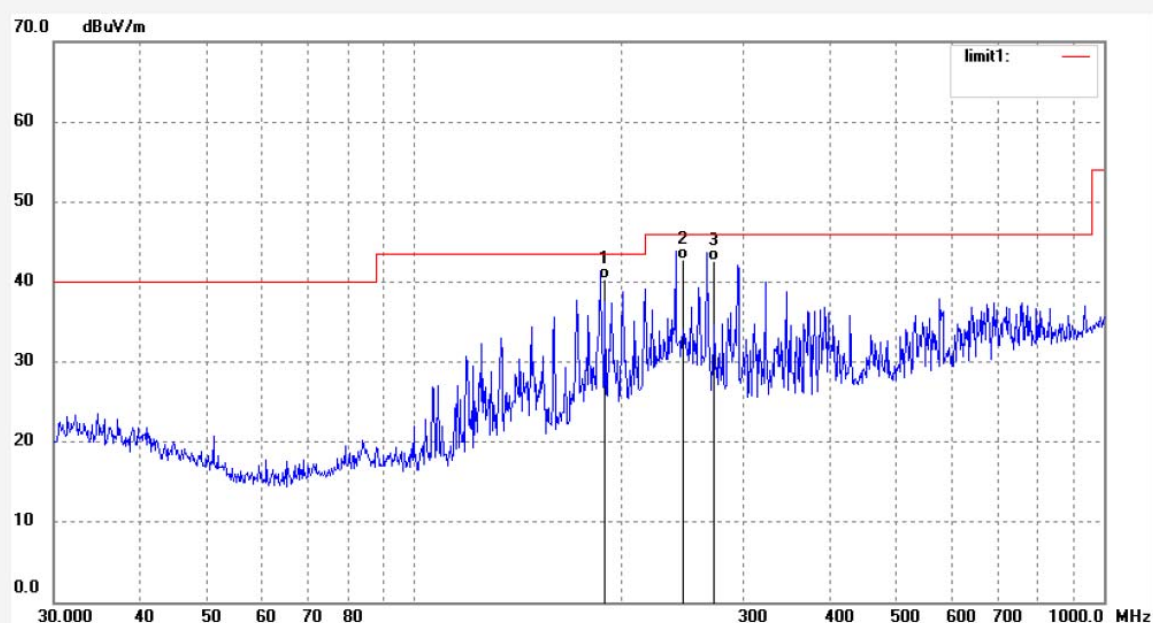

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.0250	24.40	16.00	40.40	43.50	-3.10	QP			
2	243.0260	25.91	16.96	42.87	46.00	-3.13	QP			
3	270.0310	24.43	18.20	42.63	46.00	-3.37	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #965
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: echo™ EYE for Receiver Unit
Mode: TX 2402MHz
Model: EE1.0A1
Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2010/10/19
Time: 13:30:20
Engineer Signature: Joe
Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

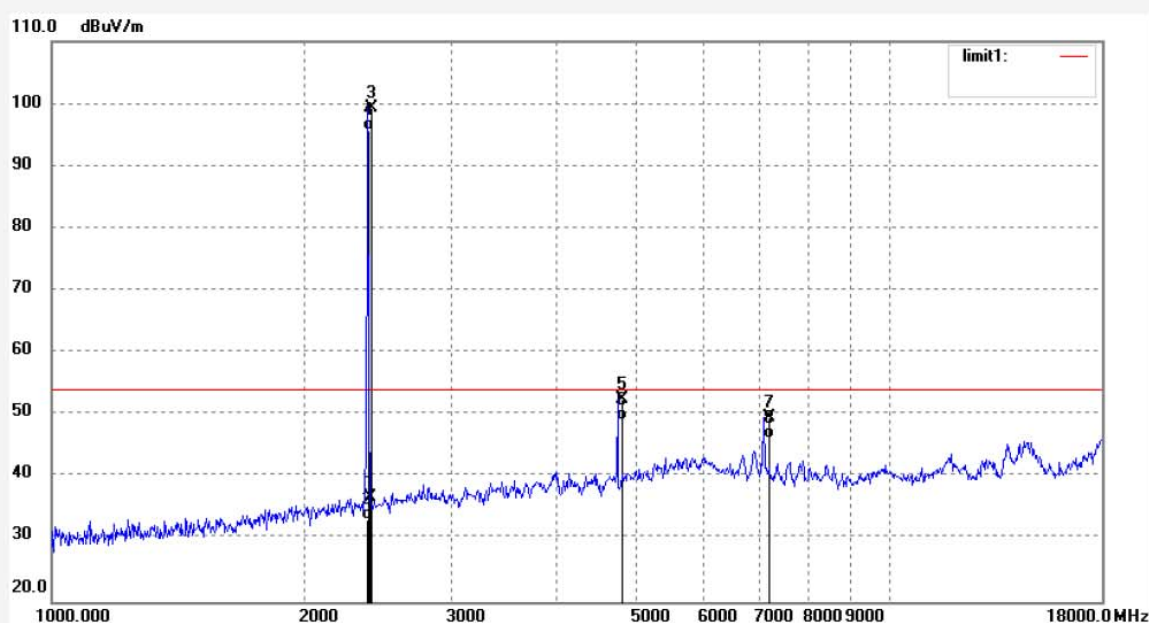

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.000	44.14	-7.46	36.68	74.00	-37.32	peak			
2	2400.000	40.70	-7.46	33.24	54.00	-20.76	AVG			
3	2402.010	106.70	-7.45	99.25	-	-	peak			
4	2402.010	103.22	-7.45	95.77	-	-	AVG			
5	4804.016	52.88	-0.30	52.58	74.00	-21.42	peak			
6	4804.016	49.39	-0.30	49.09	54.00	-4.91	AVG			
7	7206.024	46.61	2.97	49.58	74.00	-24.42	peak			
8	7206.024	43.17	2.97	46.14	54.00	-7.86	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #966

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: echo™ EYE for Receiver Unit

Mode: TX 2402MHz

Model: EE1.0A1

Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2010/10/19

Time: 13:34:36

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

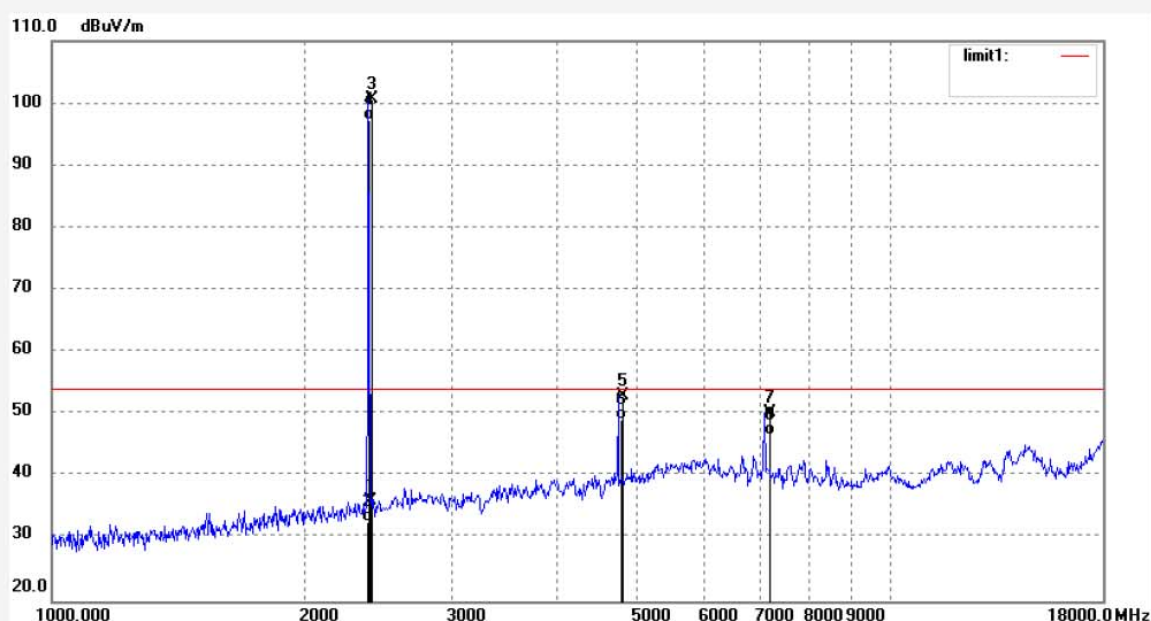

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2400.000	43.64	-7.46	36.18	74.00	-37.82	peak			
2	2400.000	40.20	-7.46	32.74	54.00	-21.26	AVG			
3	2402.010	108.17	-7.45	100.72	-	-	peak			
4	2402.010	104.66	-7.45	97.21	-	-	AVG			
5	4804.016	53.24	-0.30	52.94	74.00	-21.06	peak			
6	4804.016	49.53	-0.30	49.23	54.00	-4.77	AVG			
7	7206.024	47.21	2.97	50.18	74.00	-23.82	peak			
8	7206.024	43.72	2.97	46.69	54.00	-7.31	AVG			


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #971

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: echo™ EYE for Receiver Unit

Mode: TX 2402MHz

Model: EE1.0A1

Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2010/10/19

Time: 13:58:54

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

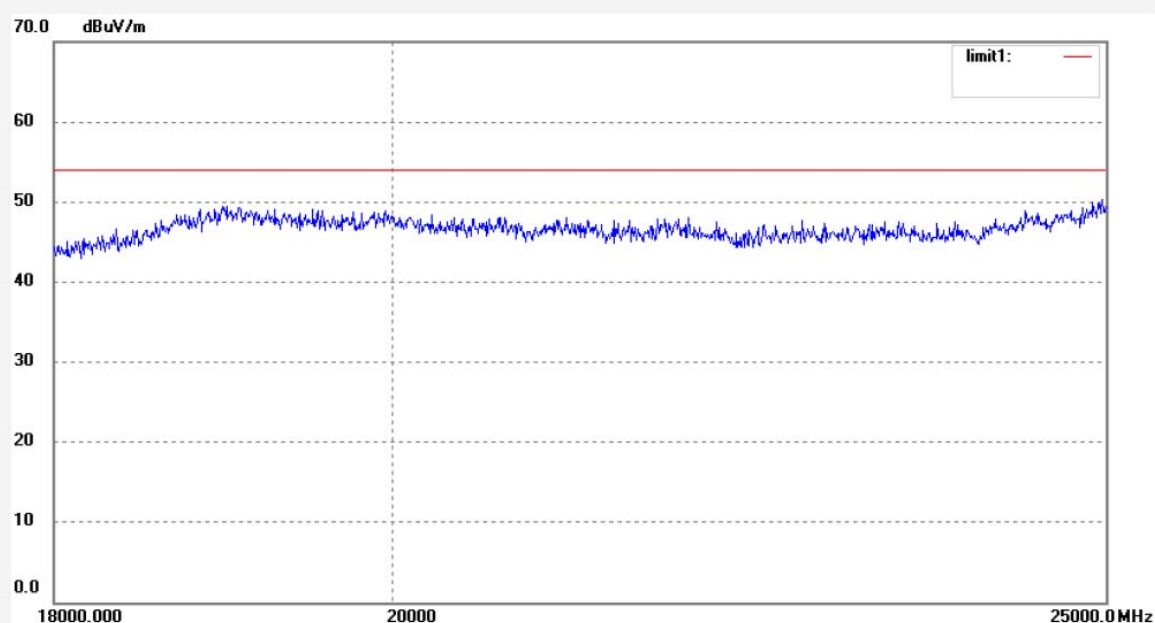

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #972

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: echo™ EYE for Receiver Unit

Mode: TX 2402MHz

Model: EE1.0A1

Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2010/10/19

Time: 14:03:02

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

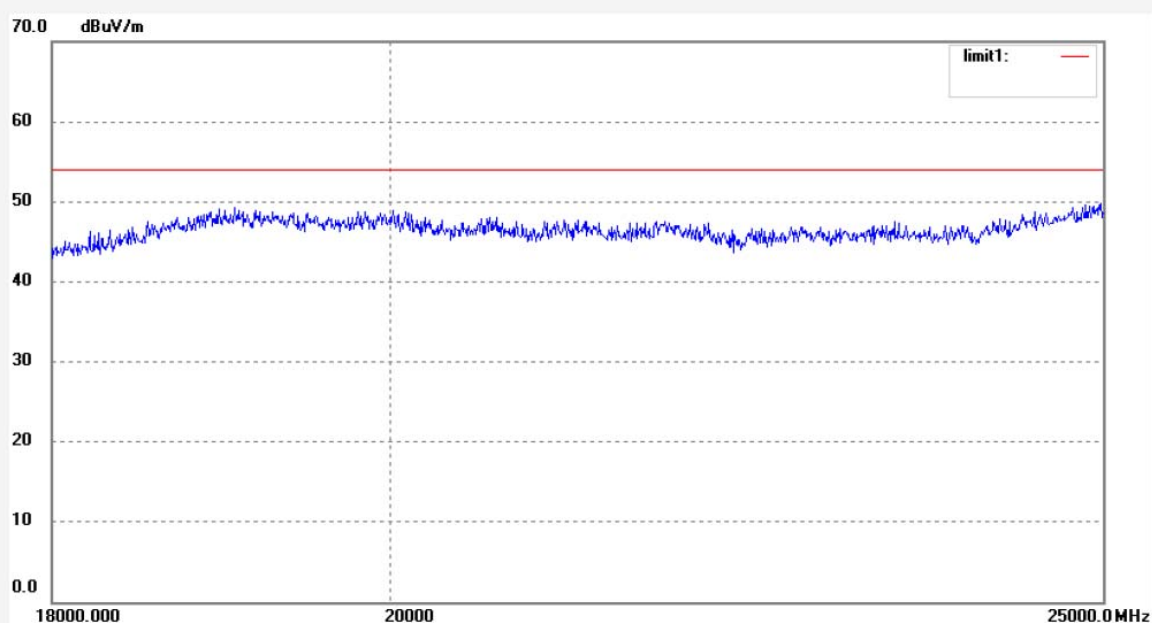

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #944

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: echo™ EYE for Receiver Unit

Mode: TX 2440MHz

Model: EE1.0A1

Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2010/10/18

Time: 10:44:39

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

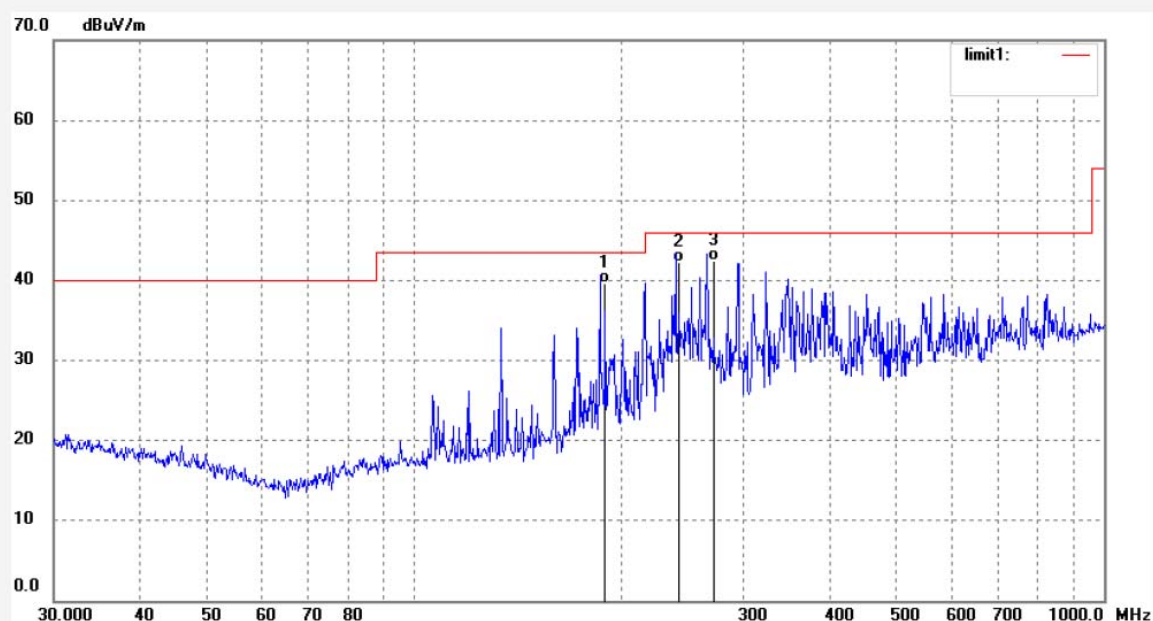

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.0250	23.66	16.06	39.72	43.50	-3.78	QP			
2	243.0260	25.36	16.96	42.32	46.00	-3.68	QP			
3	270.0310	24.16	18.20	42.36	46.00	-3.64	QP			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #943

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: echo™ EYE for Receiver Unit

Mode: TX 2440MHz

Model: EE1.0A1

Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2010/10/18

Time: 10:41:02

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

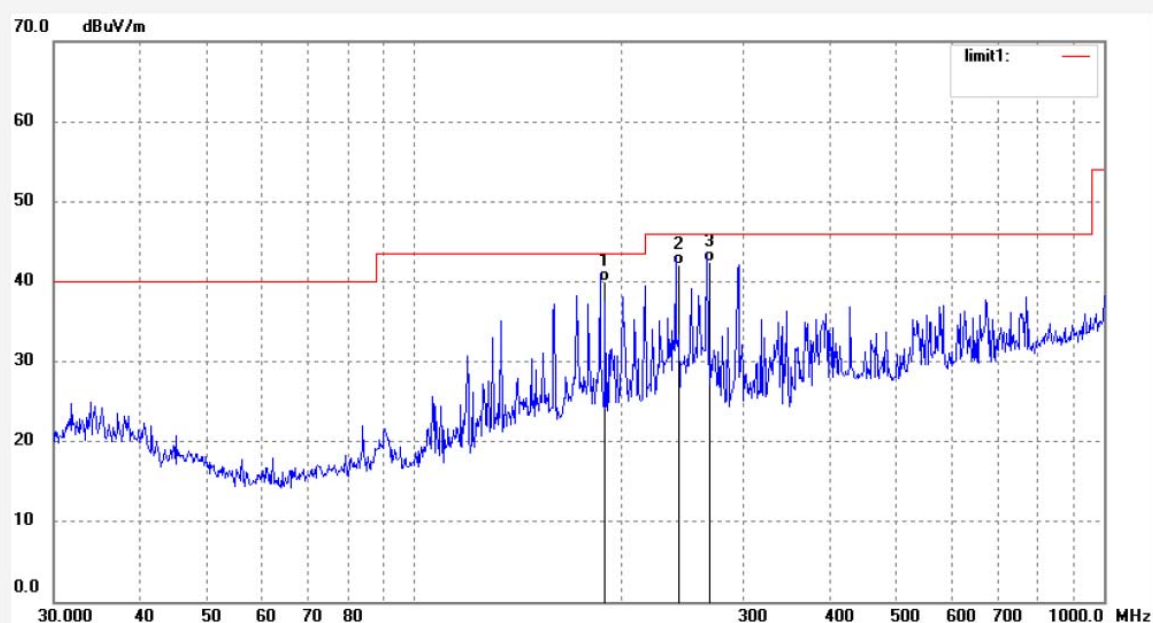

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.0250	24.06	16.00	40.06	43.50	-3.44	QP			
2	243.0260	25.12	16.96	42.08	46.00	-3.92	QP			
3	270.0310	24.31	18.20	42.51	46.00	-3.49	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #968
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: echo™ EYE for Receiver Unit
Mode: TX 2440MHz
Model: EE1.0A1
Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2010/10/19
Time: 13:43:59
Engineer Signature: Joe
Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

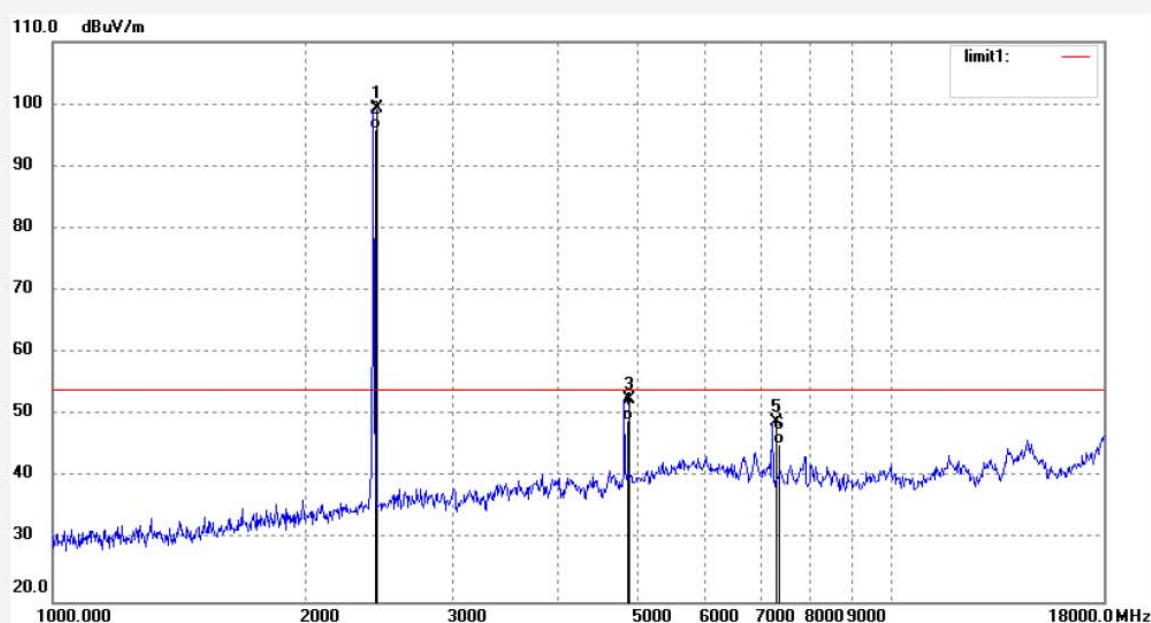

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.010	106.73	-7.36	99.37	-	-	peak			
2	2440.010	103.23	-7.36	95.87	-	-	AVG			
3	4880.017	52.47	0.13	52.60	74.00	-21.40	peak			
4	4880.017	49.00	0.13	49.13	54.00	-4.87	AVG			
5	7320.025	45.64	3.24	48.88	74.00	-25.12	peak			
6	7320.025	42.12	3.24	45.36	54.00	-8.64	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #967

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: echo™ EYE for Receiver Unit

Mode: TX 2440MHz

Model: EE1.0A1

Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2010/10/19

Time: 13:39:45

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

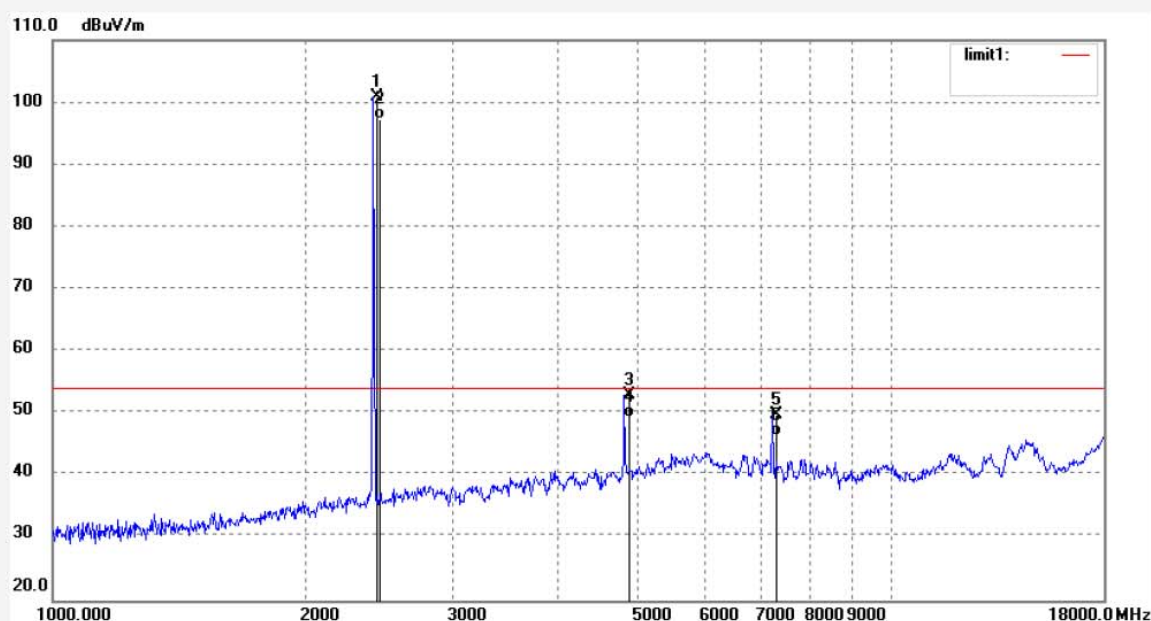

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.010	108.23	-7.36	100.87	-	-	peak			
2	2440.010	104.70	-7.36	97.34	-	-	AVG			
3	4880.017	52.74	0.13	52.87	74.00	-21.13	peak			
4	4880.017	49.26	0.13	49.39	54.00	-4.61	AVG			
5	7320.025	46.66	3.24	49.90	74.00	-24.10	peak			
6	7320.025	43.19	3.24	46.43	54.00	-7.57	AVG			


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #974
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: echo™ EYE for Receiver Unit
Mode: TX 2440MHz
Model: EE1.0A1
Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2010/10/19
Time: 14:12:09
Engineer Signature: Joe
Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

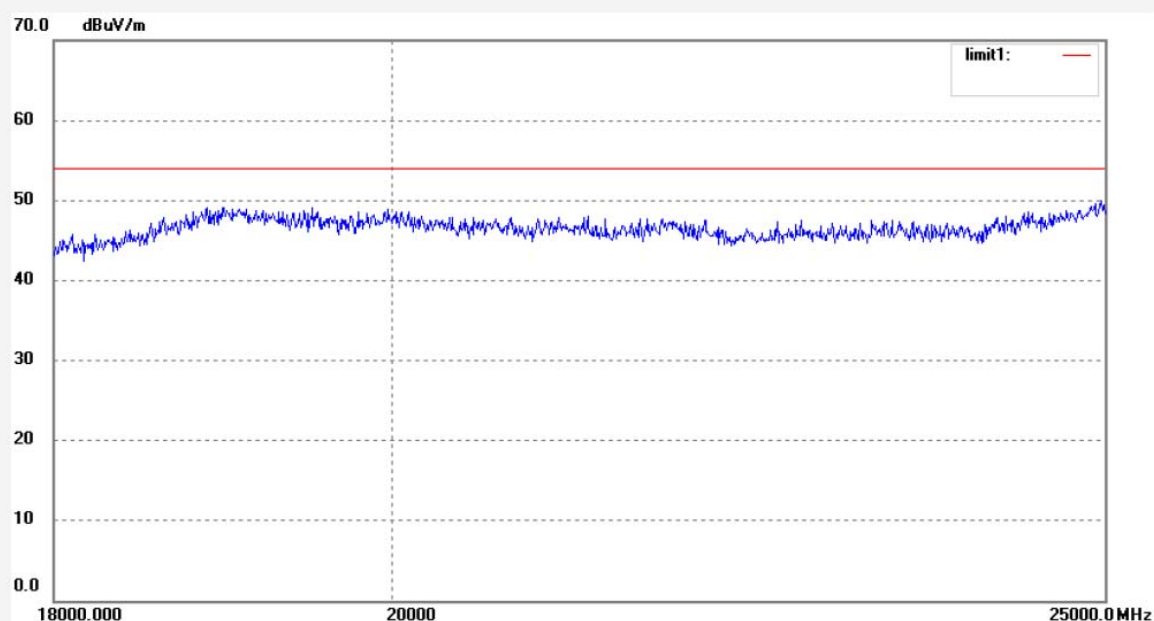

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

 Job No.: joe #973
 Standard: FCC Class B 3M Radiated
 Test item: Radiation Test
 Temp.(C)/Hum.(%) 25 C / 50 %
 EUT: echo™ EYE for Receiver Unit
 Mode: TX 2440MHz
 Model: EE1.0A1
 Manufacturer: Dongguan Southstar Electronics Limited

 Polarization: Vertical
 Power Source: AC 120V/60Hz
 Date: 2010/10/19
 Time: 14:07:55
 Engineer Signature: Joe
 Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

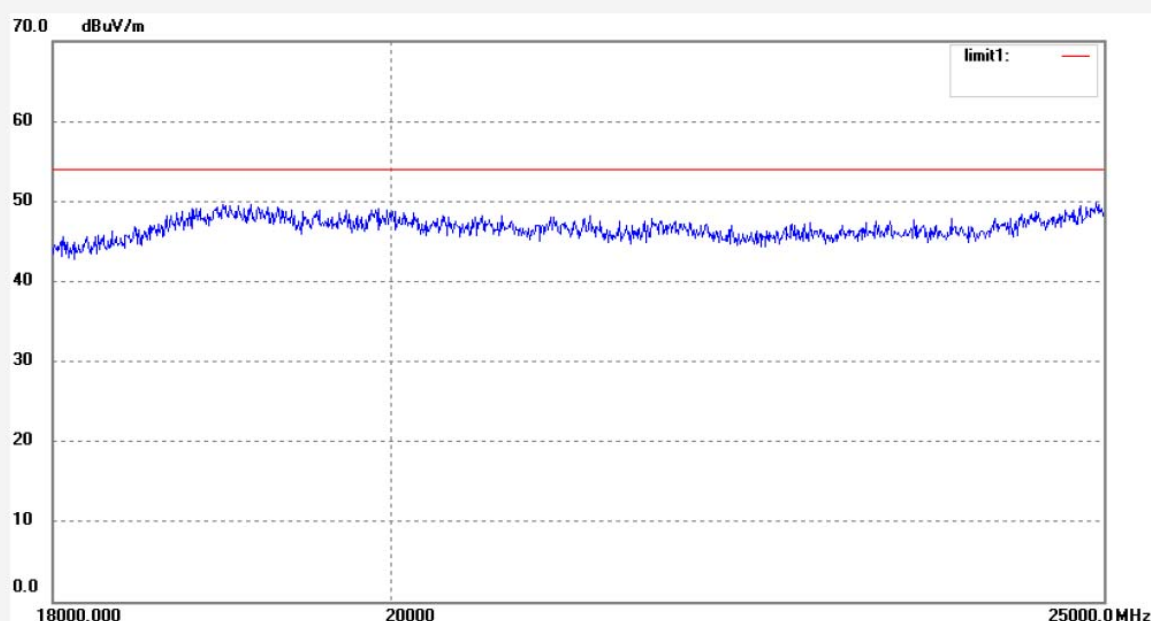

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #945

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: echo™ EYE for Receiver Unit

Mode: TX 2480MHz

Model: EE1.0A1

Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2010/10/18

Time: 10:48:55

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

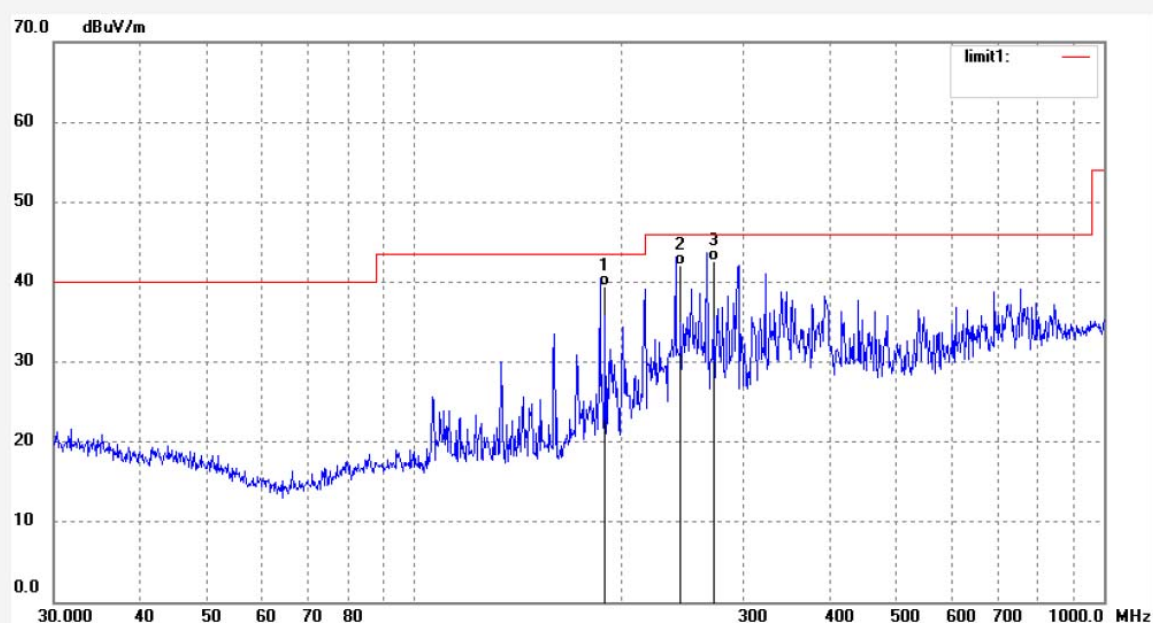

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.0250	23.41	16.06	39.47	43.50	-4.03	QP			
2	243.0260	25.19	16.96	42.15	46.00	-3.85	QP			
3	270.0310	24.40	18.20	42.60	46.00	-3.40	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #946

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: echo™ EYE for Receiver Unit

Mode: TX 2480MHz

Model: EE1.0A1

Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 2010/10/18

Time: 10:52:36

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

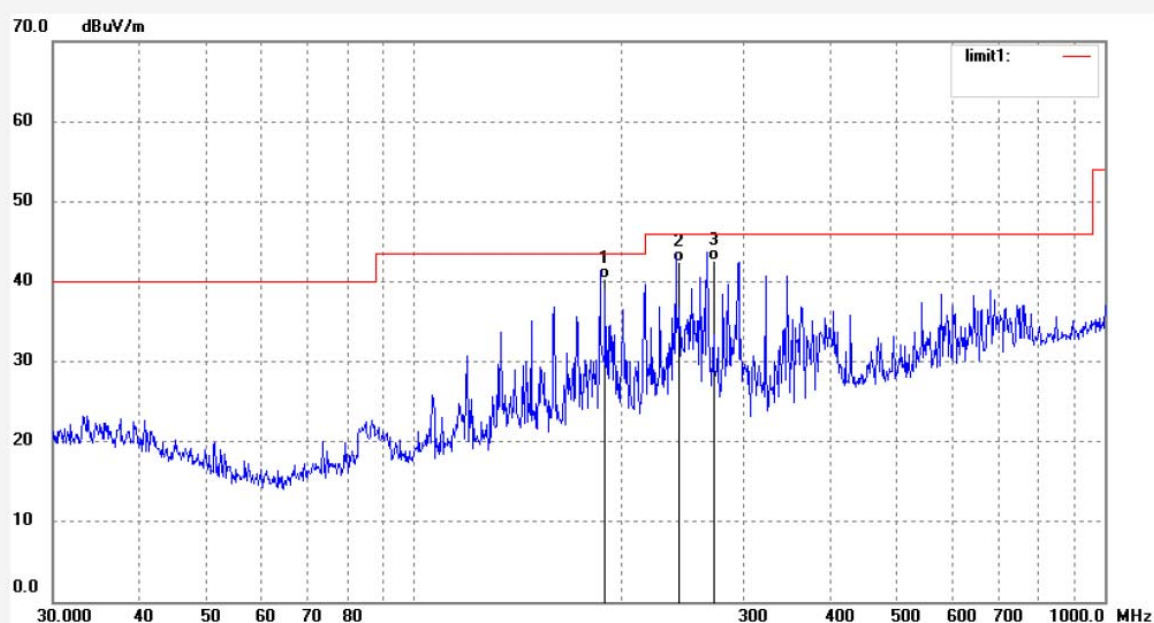

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	189.0250	24.32	16.00	40.32	43.50	-3.18	QP			
2	243.0260	25.50	16.96	42.46	46.00	-3.54	QP			
3	270.0310	24.43	18.20	42.63	46.00	-3.37	QP			


ACCURATE TECHNOLOGY CO., LTD.

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 966 chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: joe #969

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 50 %

EUT: echo™ EYE for Receiver Unit

Mode: TX 2480MHz

Model: EE1.0A1

Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 2010/10/19

Time: 13:45:09

Engineer Signature: Joe

Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

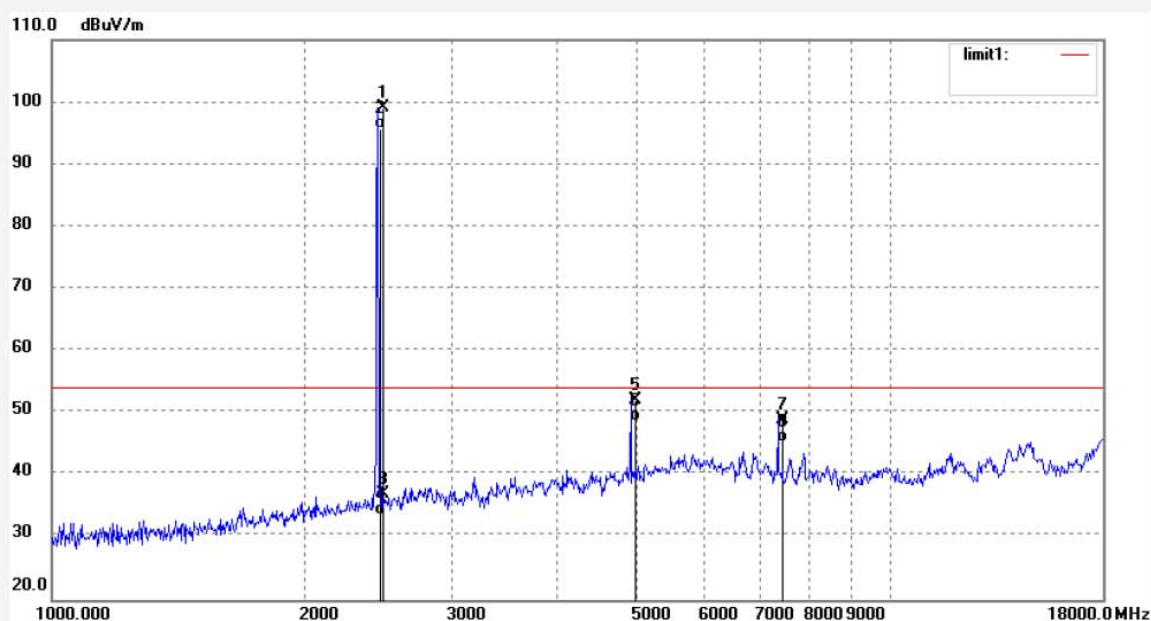

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.010	106.51	-7.37	99.14	-	-	peak			
2	2480.010	103.03	-7.37	95.66	-	-	AVG			
3	2483.500	44.45	-7.37	37.08	74.00	-36.92	peak			
4	2483.500	40.91	-7.37	33.54	54.00	-20.46	AVG			
5	4960.018	51.65	0.52	52.17	74.00	-21.83	peak			
6	4960.018	48.14	0.52	48.66	54.00	-5.34	AVG			
7	7440.026	45.20	3.69	48.89	74.00	-25.11	peak			
8	7440.026	41.70	3.69	45.39	54.00	-8.61	AVG			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #970
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: echo™ EYE for Receiver Unit
Mode: TX 2480MHz
Model: EE1.0A1
Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2010/10/19
Time: 13:49:32
Engineer Signature: Joe
Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

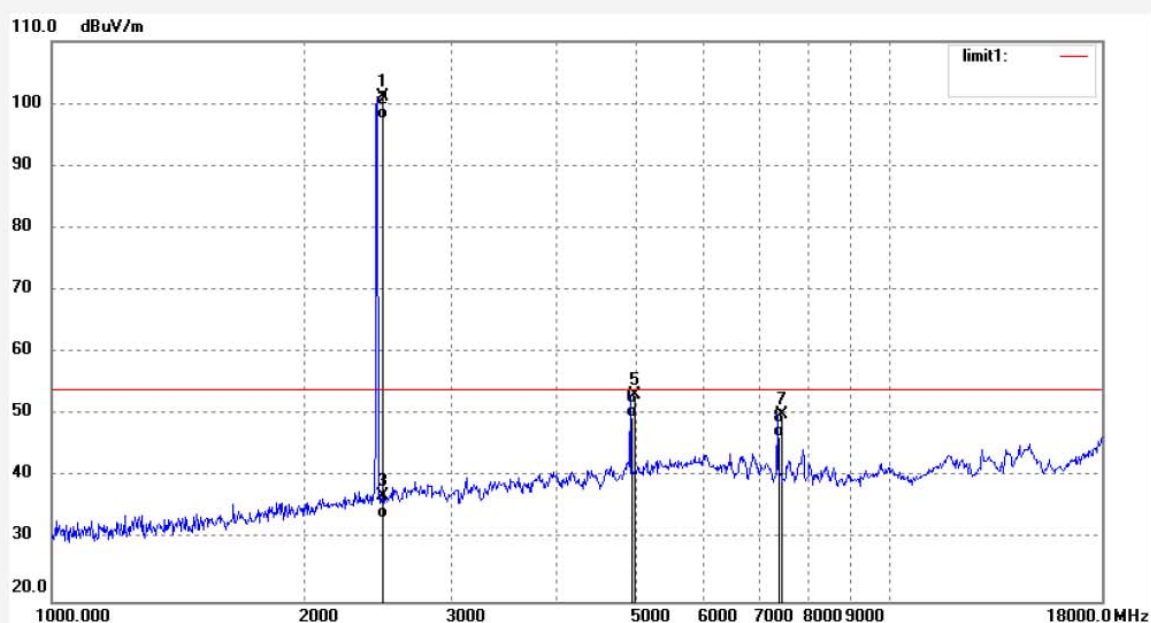

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.010	108.45	-7.37	101.08	-	-	peak			
2	2480.010	104.92	-7.37	97.55	-	-	AVG			
3	2483.500	44.38	-7.37	37.01	74.00	-36.99	peak			
4	2483.500	40.87	-7.37	33.50	54.00	-20.50	AVG			
5	4960.018	52.61	0.52	53.13	74.00	-20.87	peak			
6	4960.018	49.08	0.52	49.60	54.00	-4.40	AVG			
7	7440.026	46.36	3.69	50.05	74.00	-23.95	peak			
8	7440.026	42.82	3.69	46.51	54.00	-7.49	AVG			


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #975
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: echo™ EYE for Receiver Unit
Mode: TX 2480MHz
Model: EE1.0A1
Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2010/10/19
Time: 14:16:59
Engineer Signature: Joe
Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

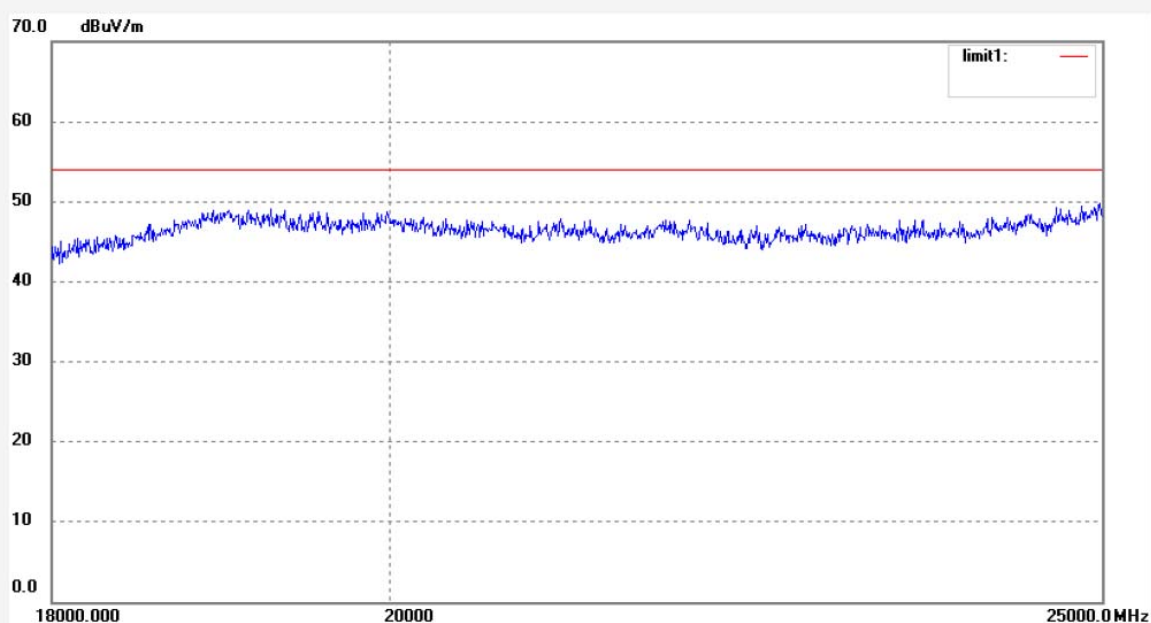

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------


ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: joe #976
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: echo™ EYE for Receiver Unit
Mode: TX 2480MHz
Model: EE1.0A1
Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2010/10/19
Time: 14:21:18
Engineer Signature: Joe
Distance: 3m

Note: Sample No.:102328 Report No.:ATE20102044

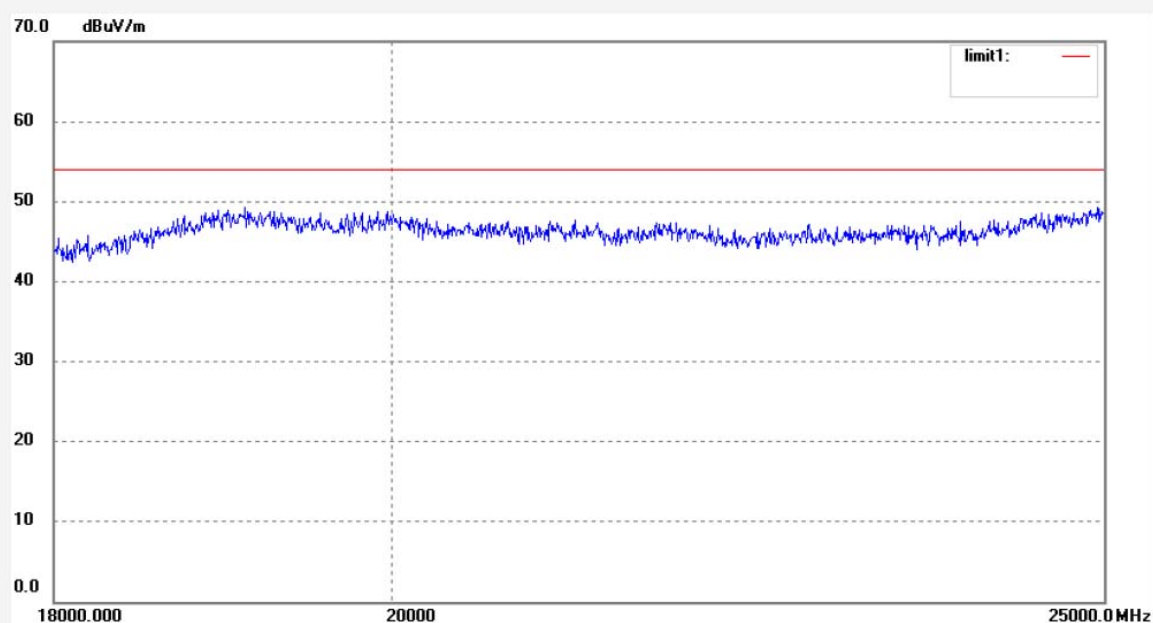


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

12.AC POWER LINE CONDUCTED EMISSION FOR FCC PART

15 SECTION 15.207(A)


12.1.Block Diagram of Test Setup

12.1.1.Block diagram of connection between the EUT and simulators



(EUT: echo™ EYE for Receiver Unit)

12.1.2.Shielding Room Test Setup Diagram

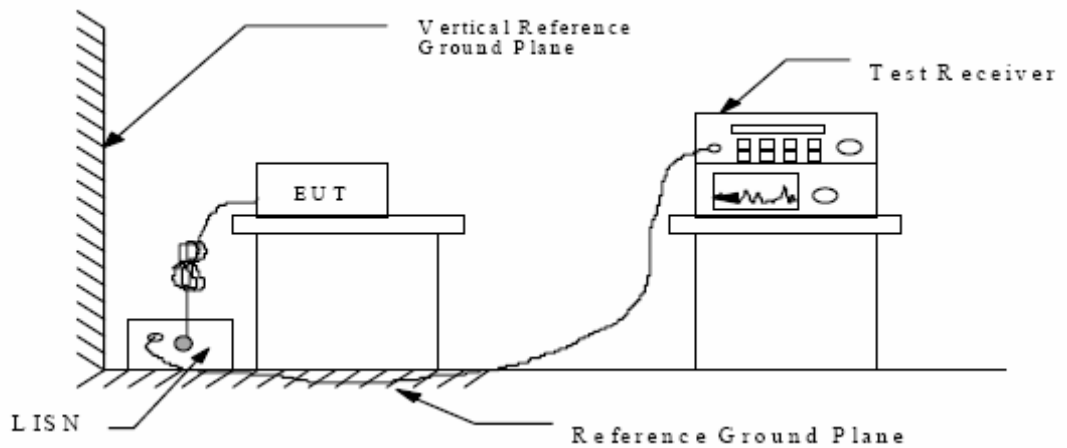

(EUT: echo™ EYE for Receiver Unit)

12.2.The Emission Limit

12.2.1.Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency (MHz)	Limit dB(μV)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

* Decreases with the logarithm of the frequency.

12.3.Configuration of EUT on Measurement

The following equipment are installed on the Conducted Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

12.3.1.echoTM EYE for Receiver Unit (EUT)

Model Number	:	EE1.0A1
Serial Number	:	N/A
Manufacturer	:	Dongguan Southstar Electronics Limited

12.4.Operating Condition of EUT

12.4.1.Setup the EUT and simulator as shown as Section 12.1.

12.4.2.Turn on the power of all equipment.

12.4.3.Let the EUT work in TX 2440MHz mode measure it.

12.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

12.6. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Date of Test:	October 14, 2010	Temperature:	25°C
EUT:	echo TM EYE for Receiver Unit	Humidity:	50%
Model No.:	EE1.0A1	Power Supply:	AC 120V/60Hz
Test Mode:	TX 2440MHz	Test Engineer:	Joe

Frequency (MHz)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector	Line
0.502813	31.50	56.0	-24.5	QP	Neutral
0.948564	36.70	56.0	-19.3	QP	
1.543759	31.10	56.0	-24.9	QP	
0.500809	32.20	56.0	-23.8	QP	Live
0.952358	39.00	56.0	-17.0	QP	
1.489279	32.40	56.0	-23.6	QP	


Emissions attenuated more than 20 dB below the permissible value are not reported.
The spectral diagrams are attached as below.

ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC PART 15B**

EUT: echo™ EYE for Receiver Unit M/N:EE1.0A1
 Manufacturer: Dongguan Southstar Electronics Limited
 Operating Condition: TX 2440MHz
 Test Site: 1#Shielding Room
 Operator: Joe
 Test Specification: N 120V/60Hz
 Comment: Sample No.:102328 Report No.:ATE20102044
 Start of Test: 10/14/2010 / 2:12:47PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.8 % QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

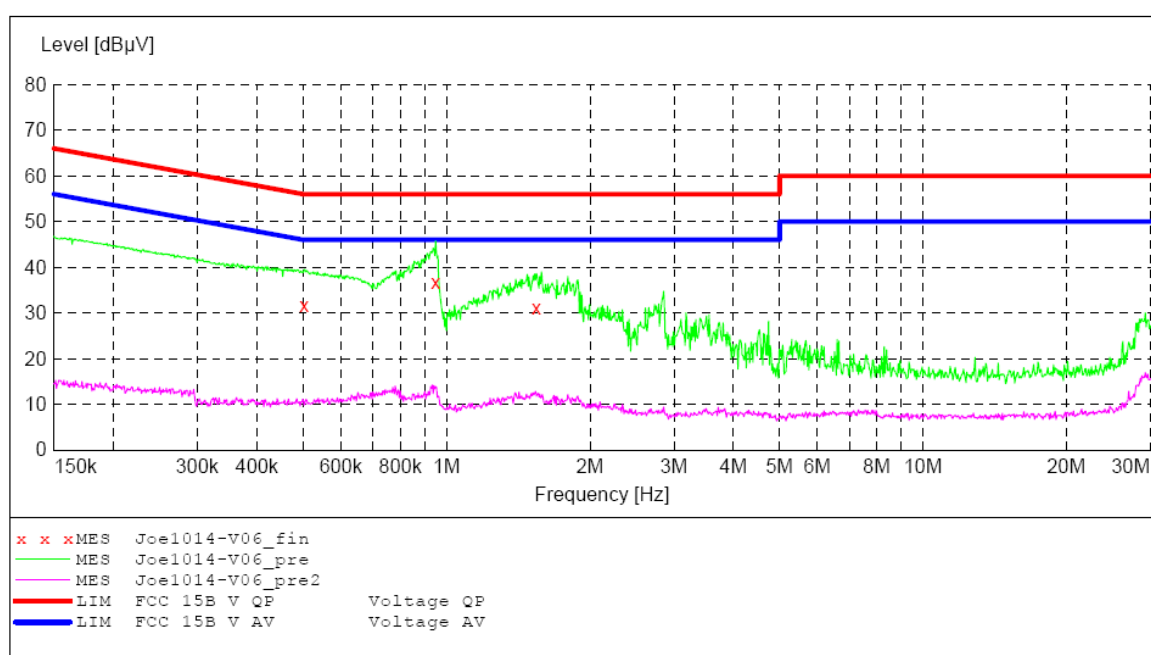**MEASUREMENT RESULT: "Joe1014-V06_fin"**

10/14/2010 2:15PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.502813	31.50	12.0	56	24.5	QP	N	GND
0.948564	36.70	11.8	56	19.3	QP	N	GND
1.543759	31.10	11.7	56	24.9	QP	N	GND

ACCURATE TECHNOLOGY CO.,LTD**CONDUCTED EMISSION STANDARD FCC PART 15B**


EUT: echo™ EYE for Receiver Unit M/N:EE1.0A1
 Manufacturer: Dongguan Southstar Electronics Limited
 Operating Condition: TX 2440MHz
 Test Site: l#Shielding Room
 Operator: Joe
 Test Specification: L 120V/60Hz
 Comment: Sample No.:102328 Report No.:ATE20102044
 Start of Test: 10/14/2010 / 2:16:32PM

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 150.0 kHz	Frequency 30.0 MHz	Step Width 0.8 %	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008

 Average

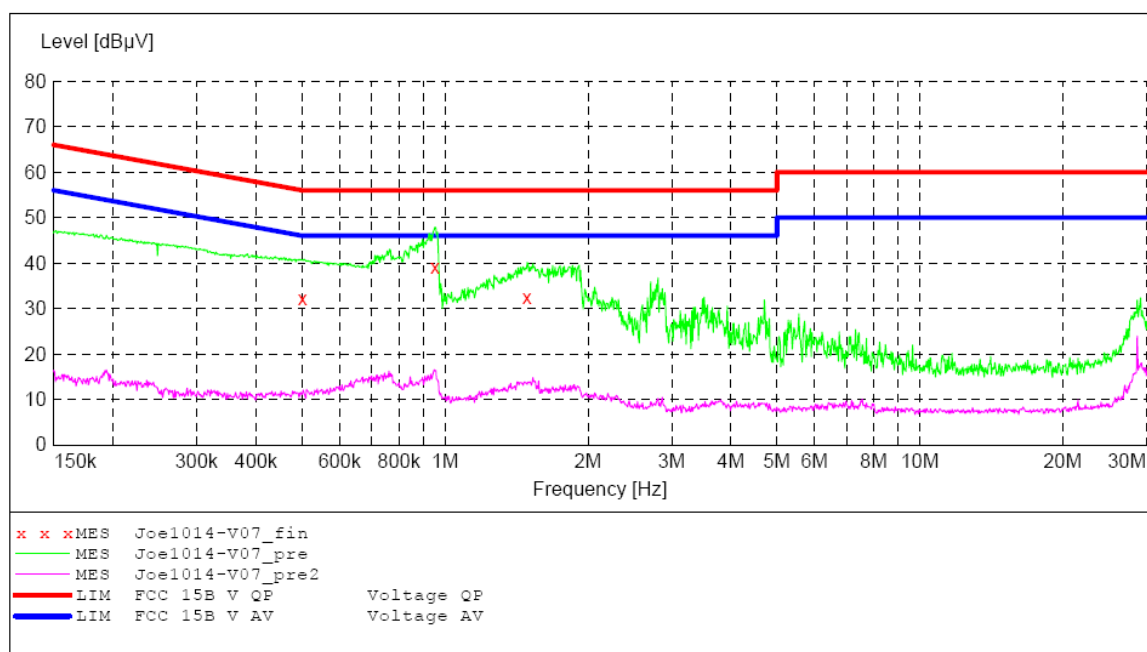**MEASUREMENT RESULT: "Joe1014-V07_fin"**

10/14/2010 2:19PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.500809	32.20	12.0	56	23.8	QP	L1	GND
0.952358	39.00	11.8	56	17.0	QP	L1	GND
1.489279	32.40	11.7	56	23.6	QP	L1	GND


13.ANTENNA REQUIREMENT

13.1.The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

13.2.Antenna Construction

The device is equipped with unique antenna, no consideration of replacement. Therefore, the equipment complies with the antenna requirement of Section 15.203.

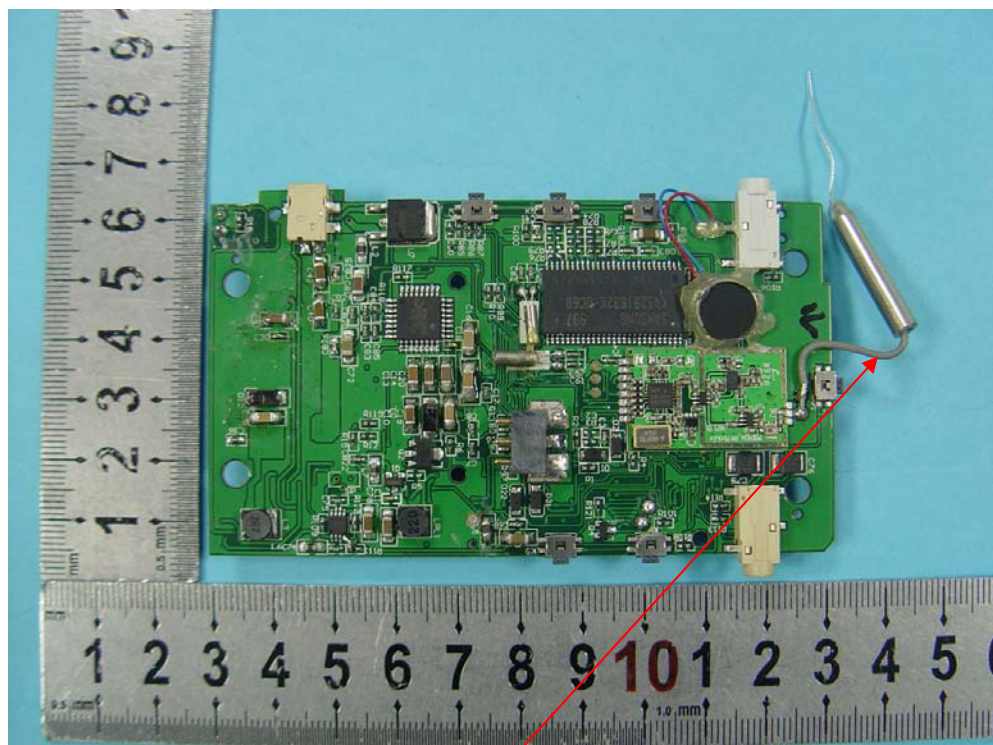

Antenna