

APPLICATION CERTIFICATION  
On Behalf of  
Dongguan Southstar Electronics Limited

Smart Meter Auto Leveler  
Model No.: WS-2000

FCC ID: X8CWS-2000

Prepared for : Dongguan Southstar Electronics Limited  
Address : F Building, 3 Chengtian Rd., Mintian, Shatian Town,  
Dongguan, Guangdong, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20100455  
Date of Test : April 14-16, 2010  
Date of Report : April 16, 2010

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility .....	5
1.3. Measurement Uncertainty .....	5
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>6</b>
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>4. THE FIELD STRENGTH OF RADIATION EMISSION .....</b>	<b>8</b>
4.1. Block Diagram of Test Setup.....	8
4.2. The Field Strength of Radiation Emission Measurement Limits.....	9
4.3. Configuration of EUT on Measurement .....	9
4.4. Operating Condition of EUT .....	9
4.5. Test Procedure .....	10
4.6. The Field Strength of Radiation Emission Measurement Results .....	11
<b>5. 20DB OCCUPIED BANDWIDTH .....</b>	<b>12</b>
5.1. Block Diagram of Test Setup.....	12
5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c).....	12
5.3. EUT Configuration on Measurement .....	13
5.4. Operating Condition of EUT .....	13
5.5. Test Procedure .....	13
5.6. Measurement Result .....	13
<b>6. DURATION TIME AND SILENT PERIOD MEASUREMENT .....</b>	<b>14</b>
6.1. Block Diagram of Test Setup.....	14
6.2. Duration Time and silent period measurement according to FCC Part 15 Section 15.231(e).....	14
6.3. EUT Configuration on Measurement .....	15
6.4. Operating Condition of EUT .....	15
6.5. Test Procedure .....	15
6.6. Measurement Result .....	16
<b>7. AVERAGE FACTOR MEASUREMENT .....</b>	<b>17</b>
7.1. Block Diagram of Test Setup.....	17
7.2. Average factor Measurement according to ANSI 63.4: 2003.....	17
7.3. EUT Configuration on Measurement .....	18
7.4. Operating Condition of EUT .....	18
7.5. Test Procedure .....	18
7.6. Measurement Result .....	19

APPENDIX I ( TEST CURVES) (7 pages)

## Test Report Certification

Applicant : Dongguan Southstar Electronics Limited  
Manufacturer : Dongguan Southstar Electronics Limited  
EUT Description : Smart Meter Auto Leveler  
(A) MODEL NO.: WS-2000  
(B) SERIAL NO.: N/A  
(C) POWER SUPPLY: DC 6V (“AA” batteries 4×)

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.231  
ANSI 63.4: 2003**

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : April 14-16, 2010

Prepared by :   
(Engineer)

Approved & Authorized Signer :   
(Manager)

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

EUT : Smart Meter Auto Leveler

Model Number : WS-2000

Operation Frequency : 433.92MHz

Power Supply : DC 6V (“AA” batteries 4×)

Applicant : Dongguan Southstar Electronics Limited  
Address : F Building, 3 Chengtian Rd., Mintian, Shatian Town,  
Dongguan, Guangdong, China

Manufacturer : Dongguan Southstar Electronics Limited  
Address : F Building, 3 Chengtian Rd., Mintian, Shatian Town,  
Dongguan, Guangdong, China

Date of sample received : March 12, 2010

Date of Test : April 14-16, 2010

## 1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen

Listed by FCC  
The Registration Number is 752051

Listed by Industry Canada  
The Registration Number is 5077A-2

Accredited by China National Accreditation Committee  
for Laboratories  
The Certificate Registration Number is L3193

Name of Firm : ACCURATE TECHNOLOGY CO. LTD

Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

## 1.3. Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2  
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2  
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2  
(Above 1GHz)

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 9, 2011
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 9, 2011
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 9, 2011
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 9, 2011
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 9, 2011
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 9, 2011
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 9, 2011
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 9, 2011
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 9, 2011
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 9, 2011

### 3. SUMMARY OF TEST RESULTS

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
Section 15.207	Conducted Emission	N/A
Section 15.231(e)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(e)	Duration time and silent period measurement	Compliant

Remark: "N/A" means "Not applicable".

## 4. THE FIELD STRENGTH OF RADIATION EMISSION


### 4.1. Block Diagram of Test Setup

#### 4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Smart Meter Auto Leveler)

#### 4.1.2. Semi-anechoic Chamber Test Setup Diagram

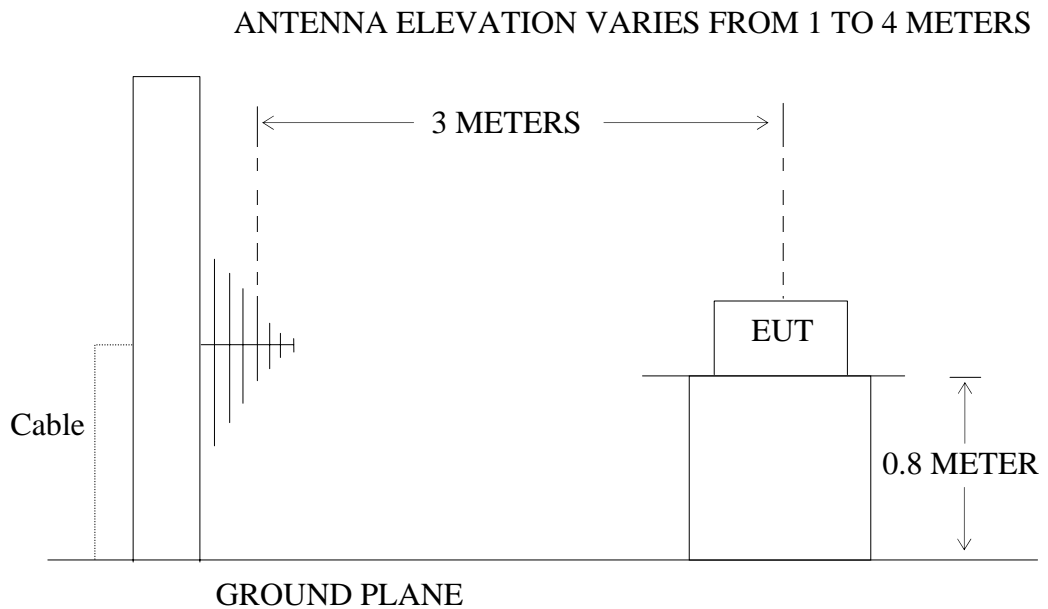

(EUT: Smart Meter Auto Leveler)



## 4.2. The Field Strength of Radiation Emission Measurement Limits

### 4.2.1. Radiation Emission Measurement Limits According to Section 15.231(e)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [ $\mu\text{V}/\text{m}$ ]	Field Strength of Spurious Emission [Average] [ $\mu\text{V}/\text{m}$ ]
40.66-40.70	1000	100
70-130	500	50
130-174	500 - 1500	50-150
174-260	1500	150
260-470	1500-5000	150-500
Above 470	5000	500

Where F is the frequency in MHz, The formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174MHz,  $\mu\text{V}/\text{m}$  at 3 meters= $22.72727(F)-2454.545$ ; For the band 260-470MHz,  $\mu\text{V}/\text{m}$  at 3 meters= $16.6667(F)-2833.3333$ . The maximum permissible unwanted emission level is 20dB below the maximum permitted fundamental level.

### 4.2.2. Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section 15.209.

## 4.3. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 4.3.1. Smart Meter Auto Leveler (EUT)

Model Number : WS-2000  
 Serial Number : N/A  
 Manufacturer : Dongguan Southstar Electronics Limited

## 4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in measuring mode (TX) measure it.

#### 4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI 63.4 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120kHz in 30-1000MHz, and 1MHz in 1000-5000MHz.

The frequency range from 30MHz to 5000MHz is checked.

#### 4.6. The Field Strength of Radiation Emission Measurement Results

**PASS.**

The frequency range 30MHz to 5000MHz is investigated.

Date of Test:	<u>April 14, 2010</u>	Temperature:	<u>25°C</u>
EUT:	<u>Smart Meter Auto Leveler</u>	Humidity:	<u>50%</u>
Model No.:	<u>WS-2000</u>	Power Supply:	<u>DC 6V</u>
Test Mode:	<u>TX</u>	Test Engineer:	<u>Joe</u>

Frequency (MHz)	Reading (dBμV/m)	Factor Corr.	Average Factor	Result(dBμV/m)		Limit(dBμV/m)		Margin(dB)		Polarization
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
<b>433.9960</b>	<b>61.72</b>	<b>22.95</b>	<b>-13.7</b>	<b>70.97</b>	<b>84.67</b>	<b>72.8</b>	<b>92.8</b>	<b>-1.83</b>	<b>-8.13</b>	Horizontal
867.9920	35.13	28.64	-13.7	50.07	63.77	52.8	72.8	-2.73	-9.03	
*1301.993	69.15	-12.20	-13.7	43.25	56.95	54.0	74.0	-10.75	-17.05	
1735.994	72.29	-10.40	-13.7	48.19	61.89	52.8	72.8	-4.61	-10.91	
2169.995	58.32	-8.38	-13.7	36.24	49.94	52.8	72.8	-16.56	-22.86	
2603.996	60.89	-6.72	-13.7	40.47	54.17	52.8	72.8	-12.33	-18.63	
<b>433.9960</b>	<b>61.57</b>	<b>22.95</b>	<b>-13.7</b>	<b>70.82</b>	<b>84.52</b>	<b>72.8</b>	<b>92.8</b>	<b>-1.98</b>	<b>-8.28</b>	Vertical
867.9920	34.53	28.64	-13.7	49.47	63.17	52.8	72.8	-3.33	-9.63	
*1301.993	68.71	-12.20	-13.7	42.81	56.51	54.0	74.0	-11.19	-17.49	
1735.994	70.93	-10.40	-13.7	46.83	60.53	52.8	72.8	-5.97	-12.27	
2169.995	60.98	-8.38	-13.7	38.90	52.60	52.8	72.8	-13.90	-20.20	
2603.996	63.34	-6.72	-13.7	42.92	56.62	52.8	72.8	-9.88	-16.18	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. \*: Denotes restricted band of operation.

Measurements were made using a peak detector. Average results were calculated by using average factor calculation method. Any emission falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

4. FCC Limit for Average Measurement =  $16.6667(433.92) - 2833.3333 = 4398.68\mu\text{V/m} = 72.8\text{dB}\mu\text{V/m}$
5. The spectral diagrams in appendix I display the measurement of peak values.

## 5. 20DB OCCUPIED BANDWIDTH


### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Smart Meter Auto Leveler)

#### 5.1.2. Semi-anechoic Chamber Test Setup Diagram

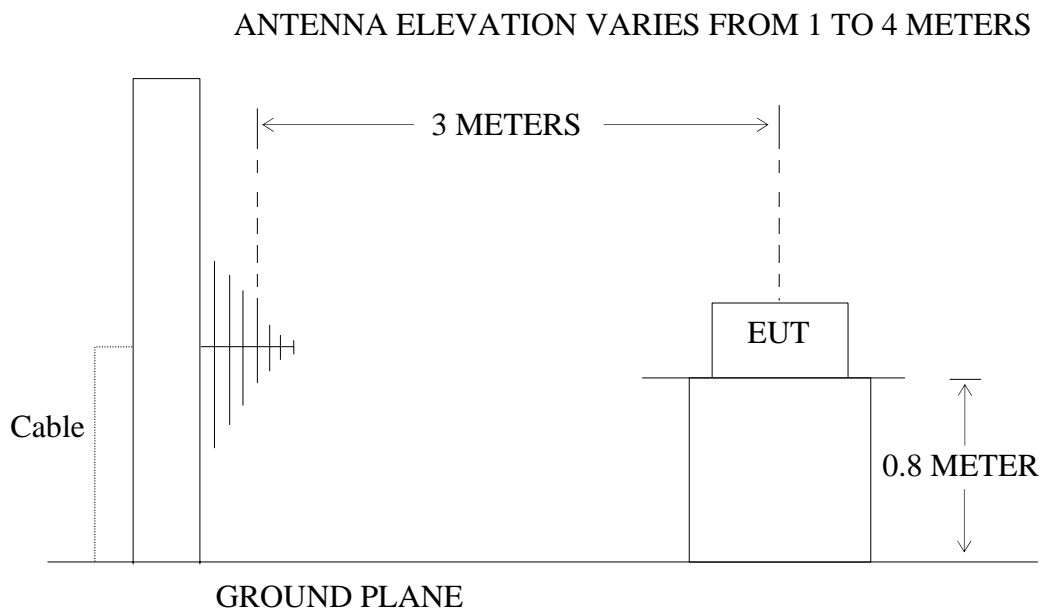

(EUT: Smart Meter Auto Leveler)

### 5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

#### 15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is  $433.92\text{MHz} \times 0.25\% = 1084.8\text{kHz}$ . Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

### 5.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 5.3.1. Smart Meter Auto Leveler (EUT)

Model Number : WS-2000  
Serial Number : N/A  
Manufacturer : Dongguan Southstar Electronics Limited

### 5.4.Operating Condition of EUT

5.4.1.Setup the EUT and simulator as shown as Section 5.1.

5.4.2.Turn on the power of all equipment.

5.4.3.Let the EUT work in measuring mode (TX) measure it.

### 5.5.Test Procedure

5.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz, VBW = 30kHz, Span = 500kHz.

5.5.2.Set SPA Max hold. Mark peak, -20dB

### 5.6. Measurement Result

**The EUT does meet the FCC requirement.**

-20dB bandwidth = 54.0 kHz < 1084.8 kHz.

The spectral diagrams in appendix I.

## 6. DURATION TIME AND SILENT PERIOD MEASUREMENT


### 6.1. Block Diagram of Test Setup

#### 6.1.1. Block diagram of connection between the EUT and simulators



(EUT: Smart Meter Auto Leveler)

#### 6.1.2. Semi-anechoic Chamber Test Setup Diagram

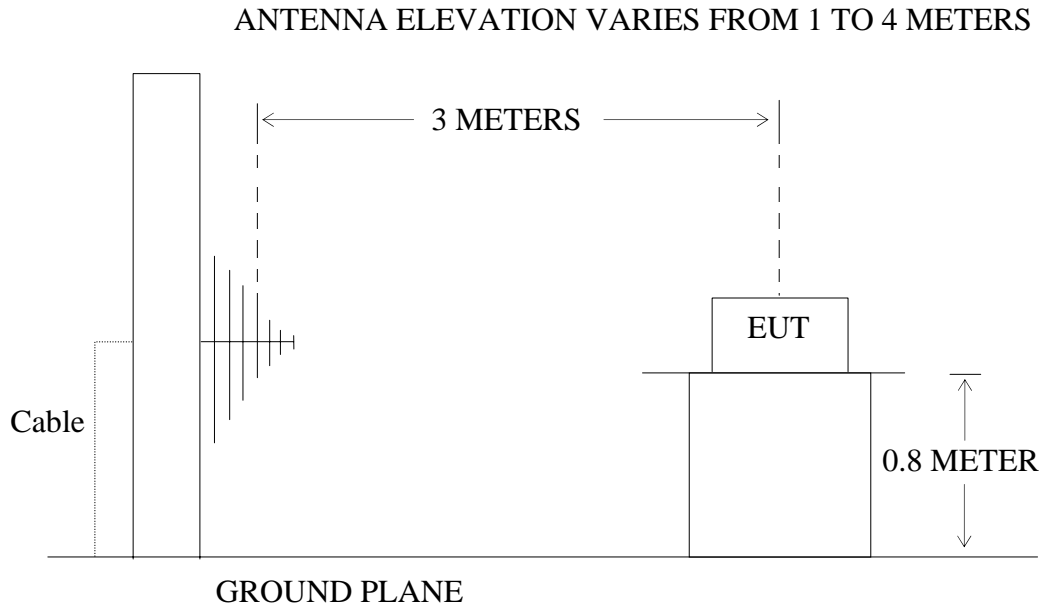

(EUT: Smart Meter Auto Leveler)

### 6.2. Duration Time and silent period measurement according to FCC Part 15

#### Section 15.231(e)

Section 15.231(e) In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

### 6.3.EUT Configuration on Measurement

The following equipment are installed on duration time and silent period measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 6.3.1.Smart Meter Auto Leveler (EUT)

Model Number : WS-2000  
Serial Number : N/A  
Manufacturer : Dongguan Southstar Electronics Limited

### 6.4.Operating Condition of EUT

6.4.1.Setup the EUT and simulator as shown as Section 6.1.

6.4.2.Turn on the power of all equipment.

6.4.3.Let the EUT work in measuring mode (TX) measure it.

### 6.5.Test Procedure

6.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz,

VBW =30kHz, Span = 0Hz.

6.5.2.Set EUT as normal operation.

6.5.3.Set SPA View. Delta Mark time.

## 6.6. Measurement Result

**The EUT does meet the FCC requirement.**

Duration time = 20.6 ms < 1 s

Silent period = 11.6 seconds > 30 times the duration of the transmission > 10 seconds

The spectral diagrams in appendix I.



## 7. AVERAGE FACTOR MEASUREMENT


### 7.1. Block Diagram of Test Setup

#### 7.1.1. Block diagram of connection between the EUT and simulators



(EUT: Smart Meter Auto Leveler)

#### 7.1.2. Semi-anechoic Chamber Test Setup Diagram

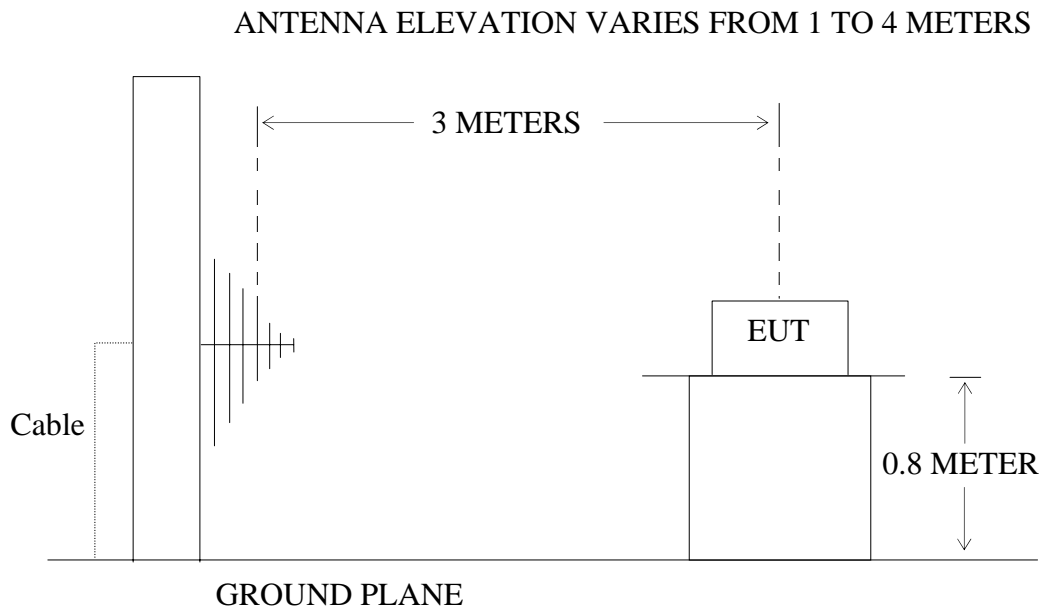

(EUT: Smart Meter Auto Leveler)

### 7.2. Average factor Measurement according to ANSI 63.4: 2003

**ANSI 63.4: 2003 Section 13.1.4.2** Devices transmitting pulsed emissions and subject to a limit requiring an average detector function for radiated emissions shall initially be measured with an instrument that uses a peak detector. A radiated emission measured with a peak detector may then be corrected to a true average using the appropriate factor for emission duty cycle. This correction factor relates the measured peak level to the average limit and is derived by averaging absolute field strength over one complete pulse train that is 0.1 s, or less, in length. If the pulse train is longer than 0.1 s, the average shall be determined from the average absolute field strength during the 0.1 s interval in which the field strength is at a maximum. Instructions on calculating the duty cycle of a transmitter with pulsed emissions are provided in ANSI 63.4 H.4, step j.

**Average factor in dB = 20 log ( duty cycle )**

### 7.3.EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 7.3.1. Smart Meter Auto Leveler (EUT)

Model Number : WS-2000  
Serial Number : N/A  
Manufacturer : Dongguan Southstar Electronics Limited

### 7.4.Operating Condition of EUT

7.4.1.Setup the EUT and simulator as shown as Section 7.1.

7.4.2.Turn on the power of all equipment.

7.4.3.Let the EUT work in measuring mode (TX) measure it.

### 7.5.Test Procedure

7.5.1.The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.

7.5.2.Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz,

VBW =30kHz, Span = 0Hz.

7.5.3.Set EUT as normal operation.

7.5.4.Set SPA View. Delta Mark time.

## 7.6. Measurement Result

**The duty cycle is simply the on time divided by the period:**

Effective period of one cycle = 100ms

Sum of pulse width = 20.6ms

Duty Cycle =  $20.6\text{ms}/100\text{ms} = 0.206$

**Therefore, the average factor is found by  $20\log 0.206 = -13.7\text{dB}$**

The spectral diagrams in appendix I.

# APPENDIX I (Test Curves)



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #4526  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 50 %  
EUT: Smart Meter Auto Leveler  
Mode: TX  
Model: WS-2000  
Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Horizontal  
Power Source: DC 6V  
Date: 2010/04/14  
Time: 17:56:12  
Engineer Signature: Joe  
Distance: 3m

Note: Sample No.:100712 Report No.:ATE20100455

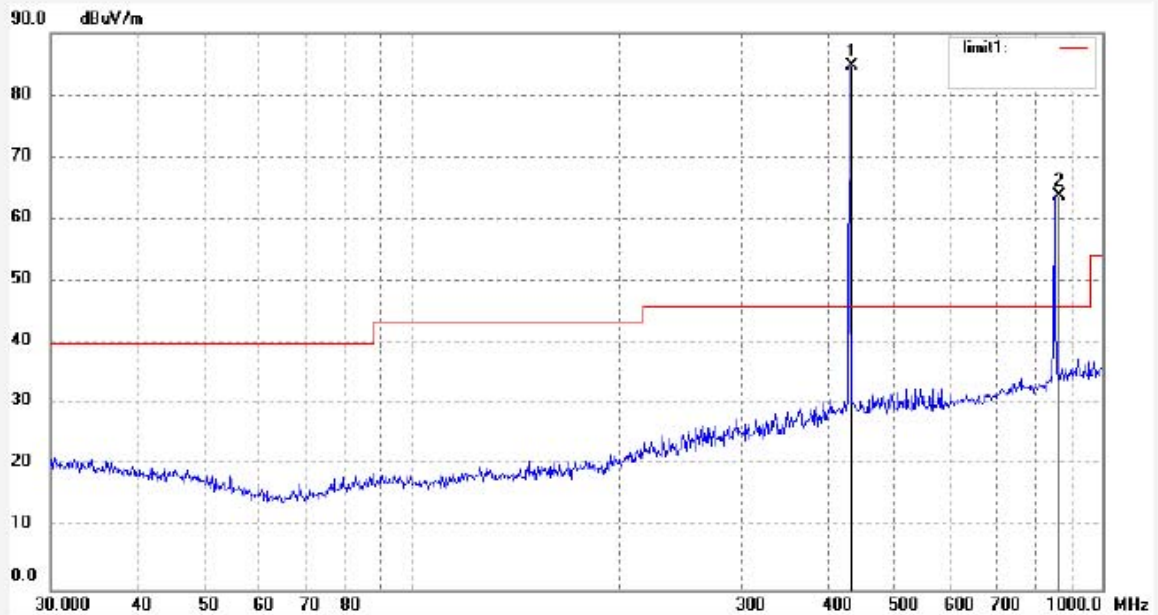

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.9960	61.72	22.95	84.67	92.8	-8.13	peak			
2	867.9920	35.13	28.64	63.77	72.8	-9.03	peak			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #4527  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 50 %  
EUT: Smart Meter Auto Leveler  
Mode: TX  
Model: WS-2000  
Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Vertical  
Power Source: DC 6V  
Date: 2010/04/14  
Time: 18:00:20  
Engineer Signature: Joe  
Distance: 3m

Note: Sample No.:100712 Report No.:ATE20100455

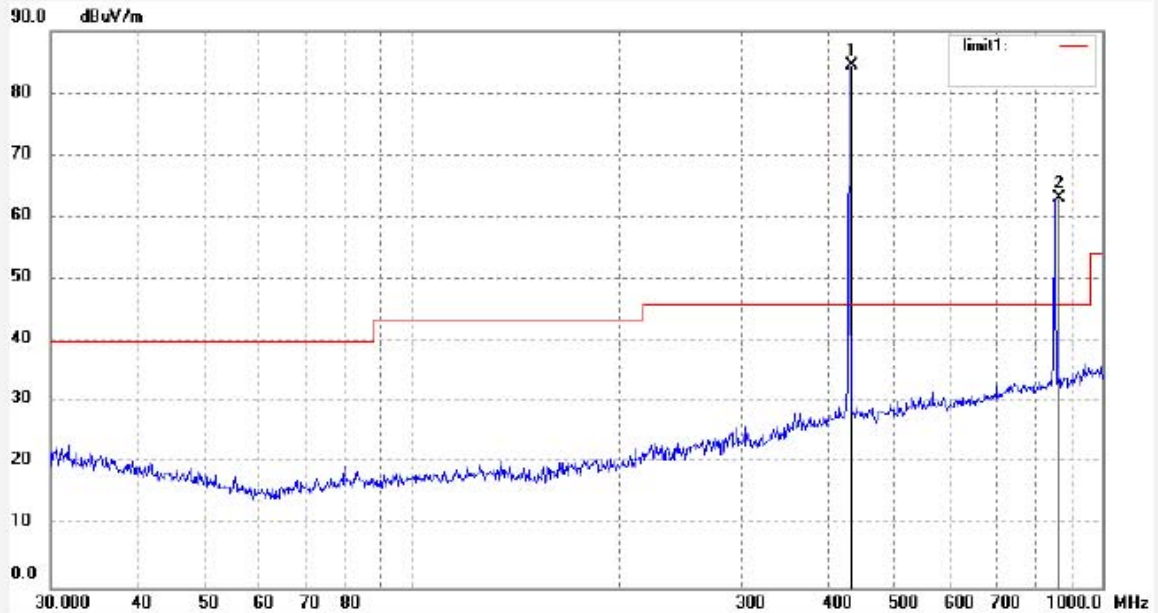

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.9960	61.57	22.95	84.52	92.8	-8.28	peak			
2	867.9920	34.53	28.64	63.17	72.8	-9.63	peak			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #4537  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 50 %  
EUT: Smart Meter Auto Leveler  
Mode: TX  
Model: WS-2000  
Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Horizontal  
Power Source: DC 6V  
Date: 2010/04/14  
Time: 20:42:39  
Engineer Signature: Joe  
Distance: 3m

Note: Sample No.:100712 Report No.:ATE20100455

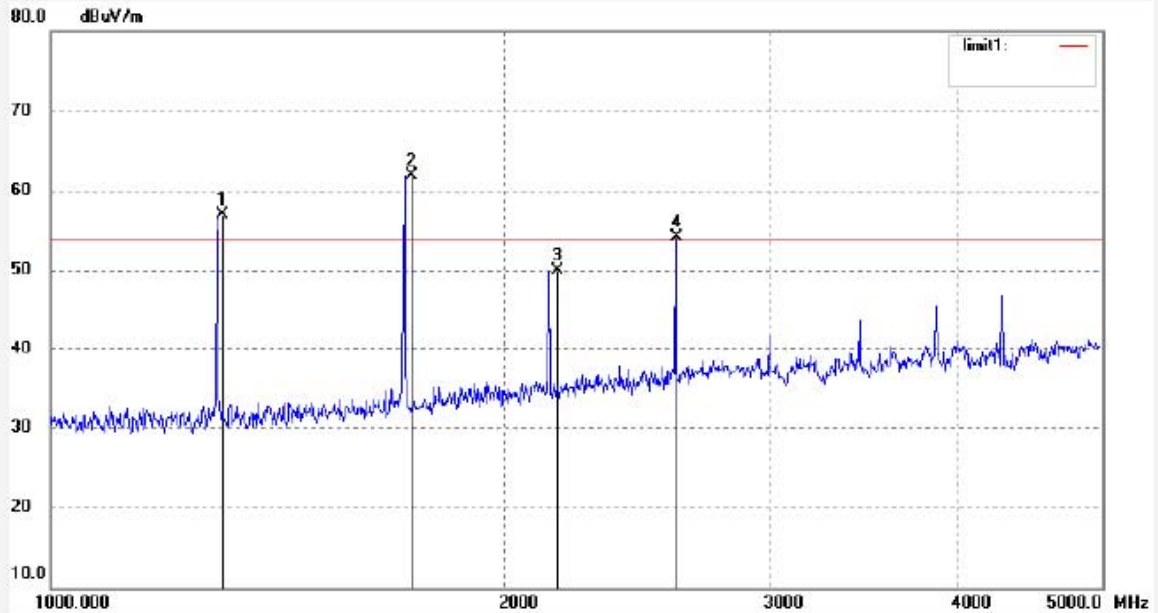

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1301.993	69.15	-12.20	56.95	74.0	-17.05	peak			
2	1735.994	72.29	-10.40	61.89	72.8	-10.91	peak			
3	2169.995	58.32	-8.38	49.94	72.8	-22.86	peak			
4	2603.996	60.89	-6.72	54.17	72.8	-18.63	peak			



**ACCURATE TECHNOLOGY CO., LTD.**


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: RTTE #4536  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 25 C / 50 %  
EUT: Smart Meter Auto Leveler  
Mode: TX  
Model: WS-2000  
Manufacturer: Dongguan Southstar Electronics Limited

Polarization: Vertical  
Power Source: DC 6V  
Date: 2010/04/14  
Time: 20:38:21  
Engineer Signature: Joe  
Distance: 3m

Note: Sample No.:100712 Report No.:ATE20100455

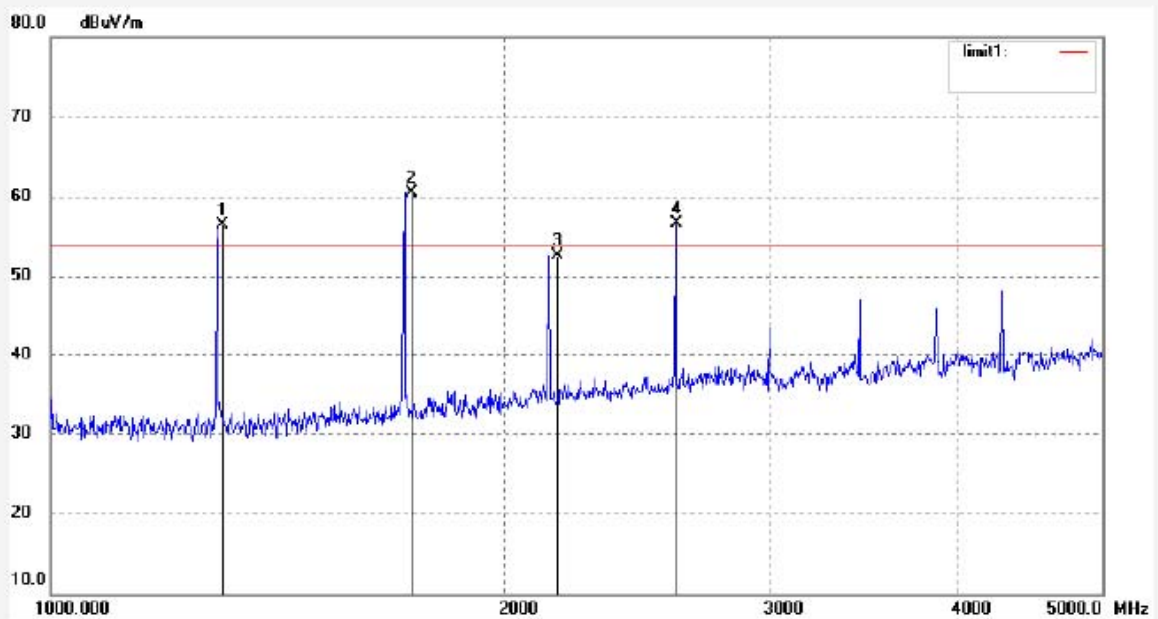

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1301.993	68.71	-12.20	56.51	74.0	-17.49	peak			
2	1735.994	70.93	-10.40	60.53	72.8	-12.27	peak			
3	2169.995	60.98	-8.38	52.60	72.8	-20.20	peak			
4	2603.996	63.34	-6.72	56.62	72.8	-16.18	peak			






\*RBW 10 kHz      Marker 1 [T1 ]  
 VBW 30 kHz      83.73 dBμV  
 SWT 5 ms      433.992000000 MHz

Ref 90 dBμV

Att 20 dB

1 PK  
MAXH

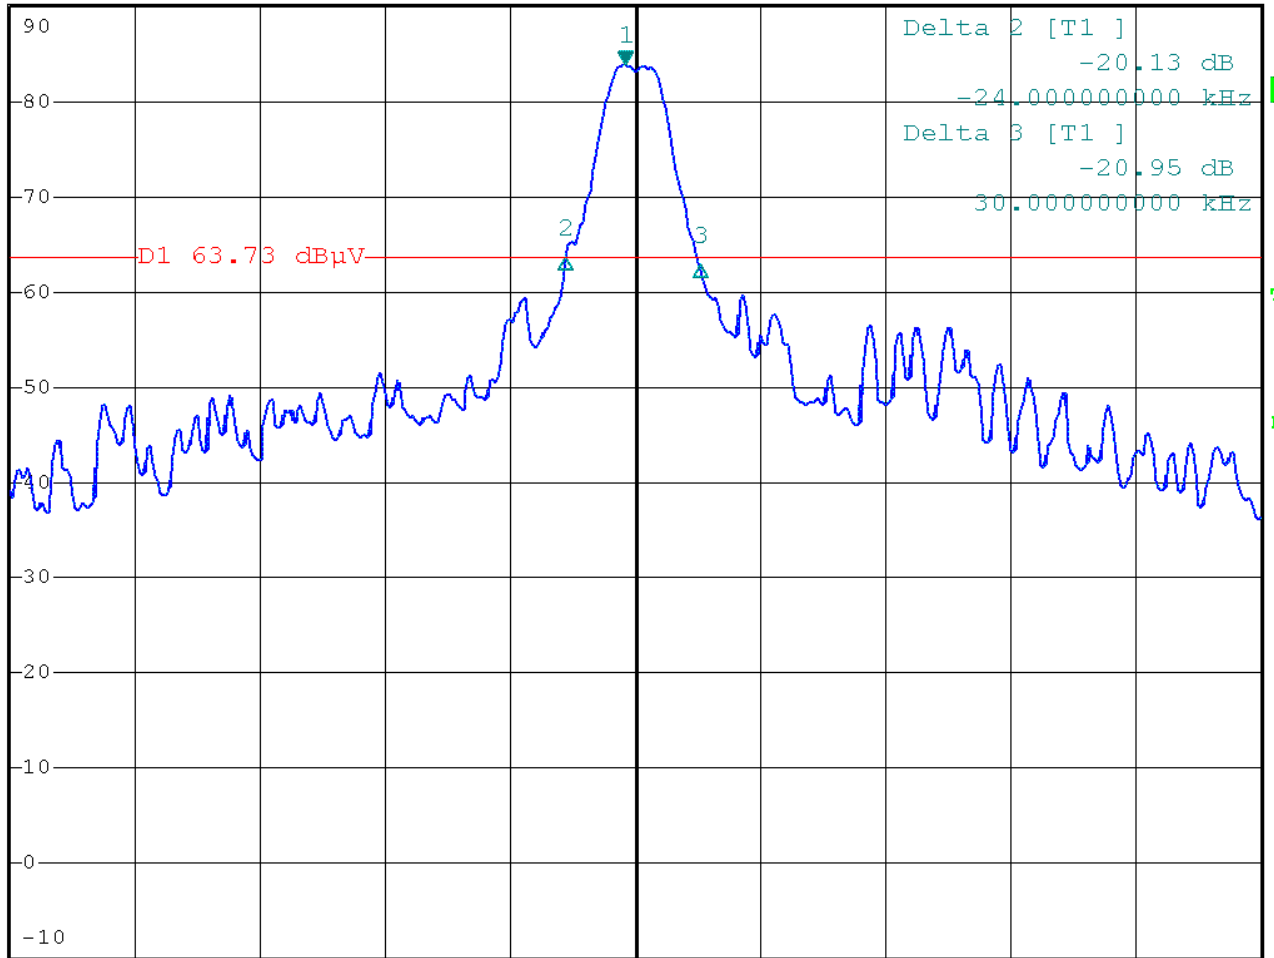


Center 433.996 MHz      50 kHz/      Span 500 kHz

Comment A:  
 Date: 16.APR.2010 10:18:04

-20dB bandwidth is 54.0 kHz.



RBW 10 kHz Delta 2 [T1 ]  
VBW 30 kHz -0.14 dB  
SWT 100 ms 20.600000 ms  
Ref 90 dBµV Att 20 dB

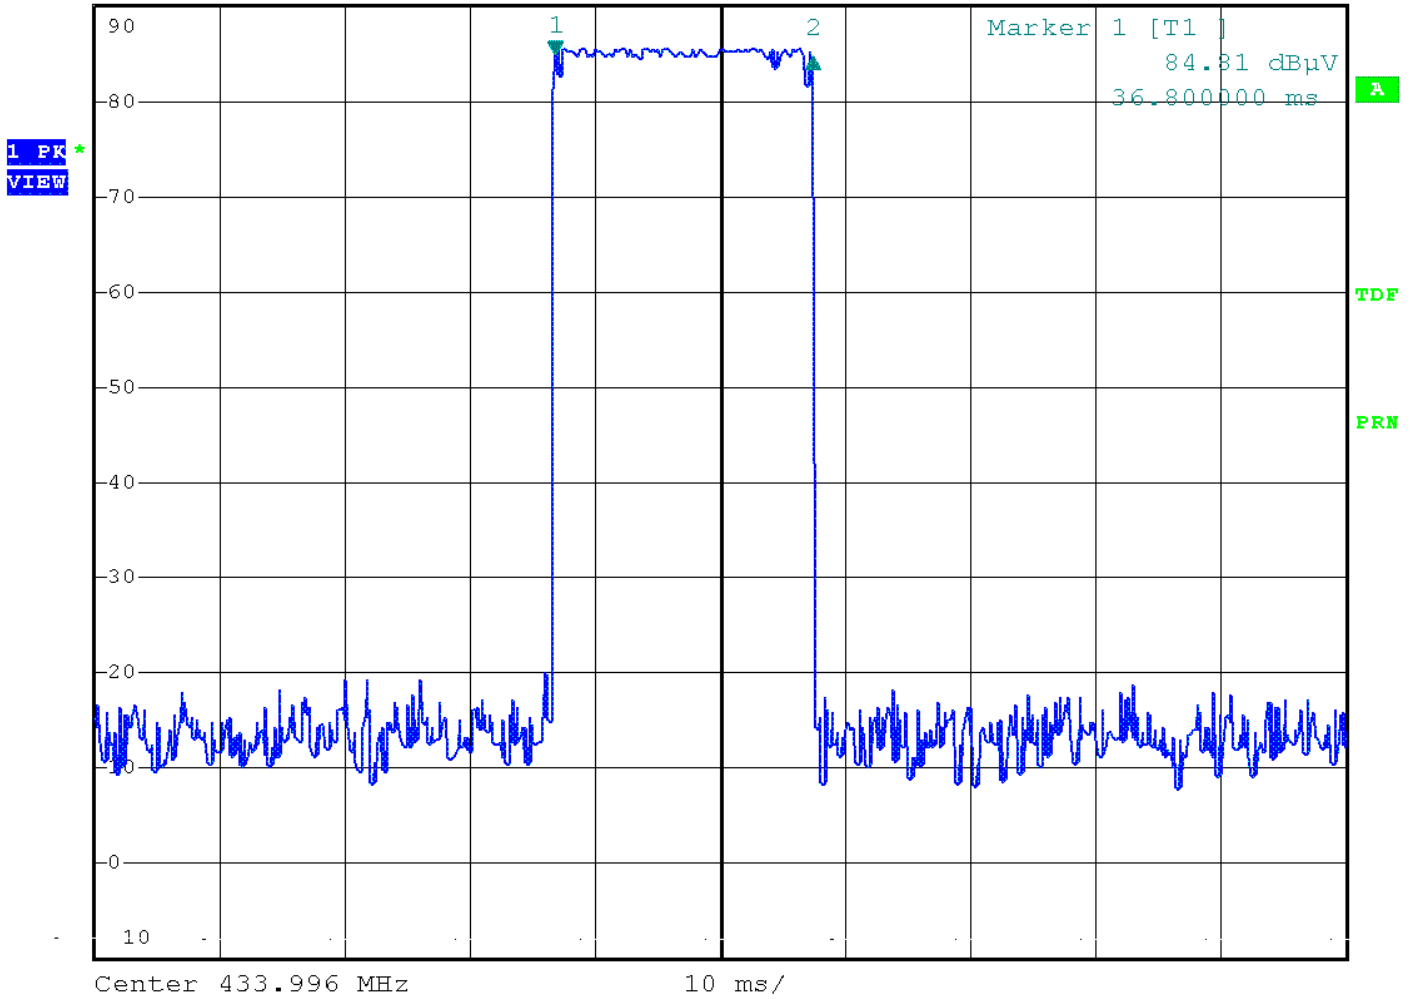


Comment A:  
Date: 16.APR.2010 10:03:19

The graphs show the duration of 'on' signal, duration is 20.6 ms.  
Duty Cycle = 20.6ms/100ms = 0.206.



RBW 10 kHz Delta 2 [T1 ]  
VBW 30 kHz 0.54 dB  
SWT 20 s 11.600000 s  
Ref 90 dBμV Att 20 dB

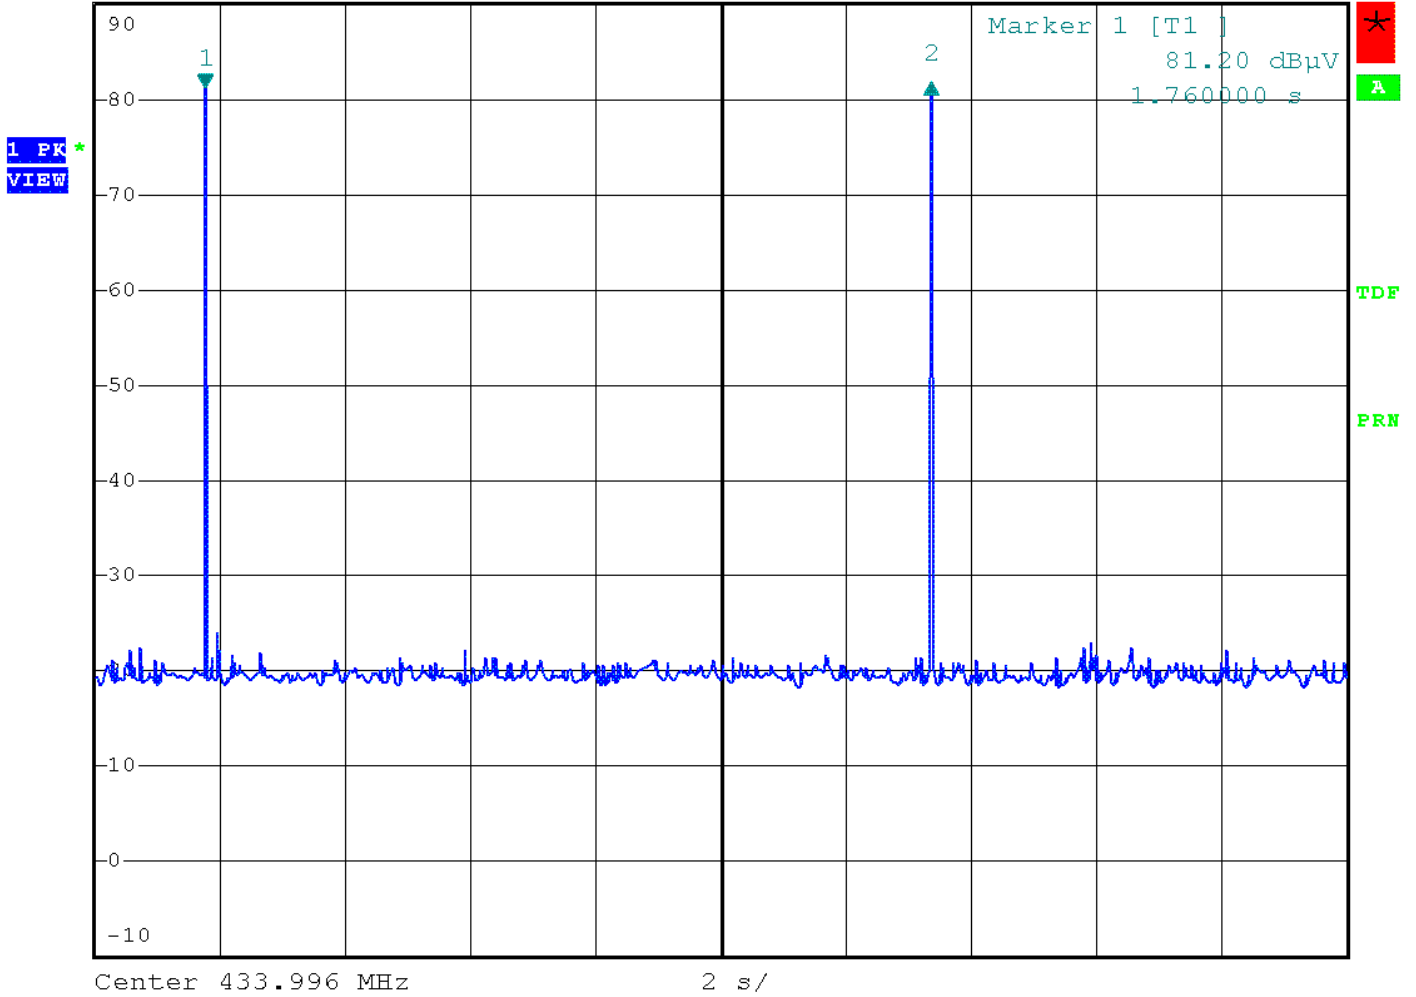

Comment A:  
Date: 16.APR.2010 10:15:28

The graphs show the silent period of 'off' signal, silent period is 11.6 s.