


International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type B3 Tx Mid CH Tested by : Weitin Chen

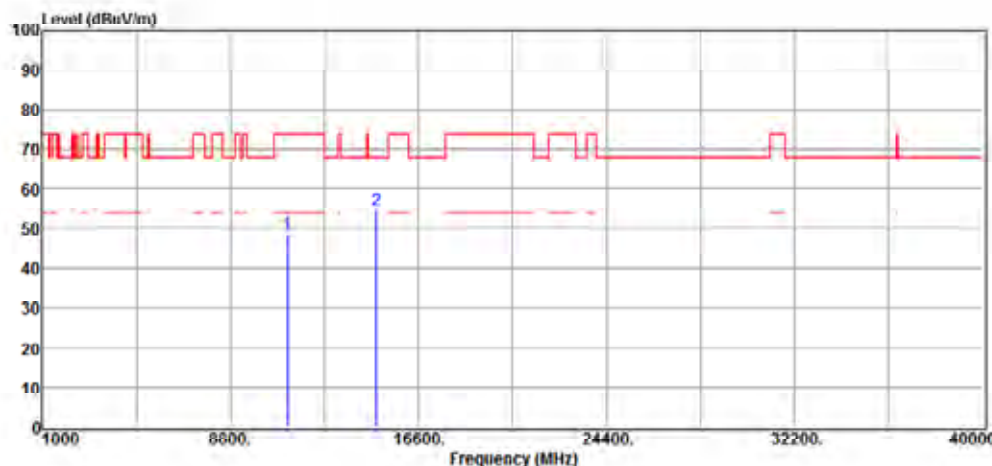

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11160.00	34.62	14.53	49.15	74.00	-24.85	Peak	VERTICAL
2	14872.00	34.69	18.67	53.36	68.20	-14.84	Peak	VERTICAL

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type B3 Tx Mid CH Tested by : Weitin Chen

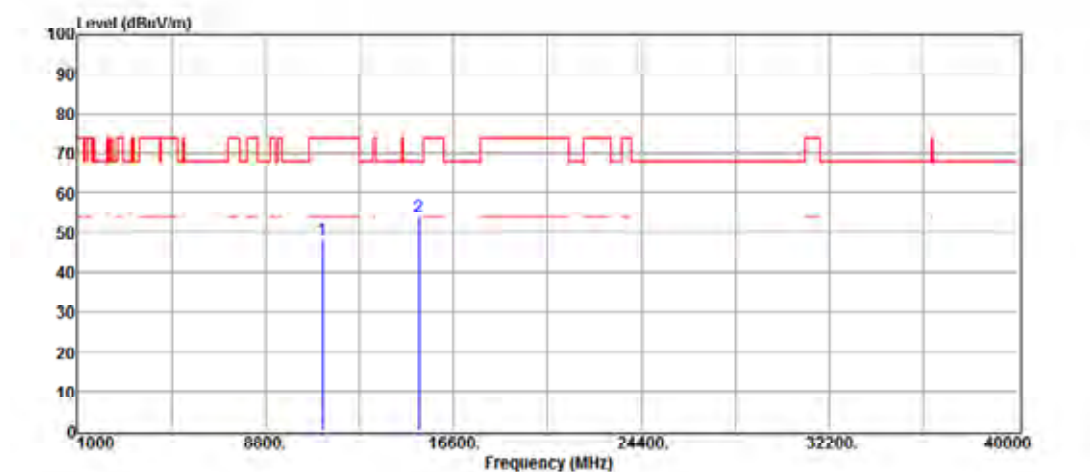

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11160.00	33.66	14.53	48.19	74.00	-25.81	Peak	HORIZONTAL
2	15178.00	37.28	18.66	55.94	68.20	-12.26	Peak	HORIZONTAL

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type B3 Tx High CH Tested by : Weitin Chen

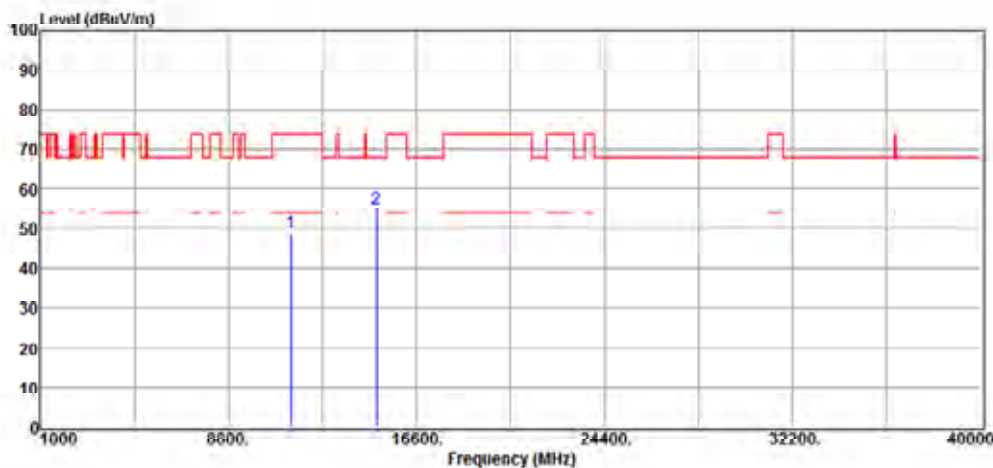

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11400.00	34.11	14.84	48.95	74.00	-25.05	Peak	VERTICAL
2	14957.00	37.36	18.77	56.13	68.20	-12.07	Peak	VERTICAL

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type B3 Tx High CH Tested by : Weitin Chen

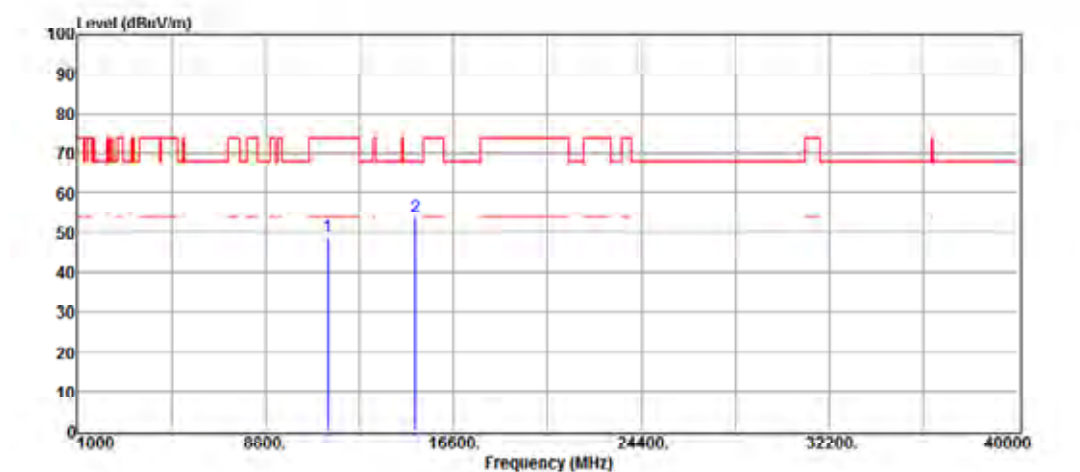

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11400.00	34.96	14.84	49.80	74.00	-24.20	Peak	HORIZONTAL
2	15025.00	35.53	18.84	54.37	68.20	-13.83	Peak	HORIZONTAL

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type B4 Tx Low CH Tested by : Weitin Chen

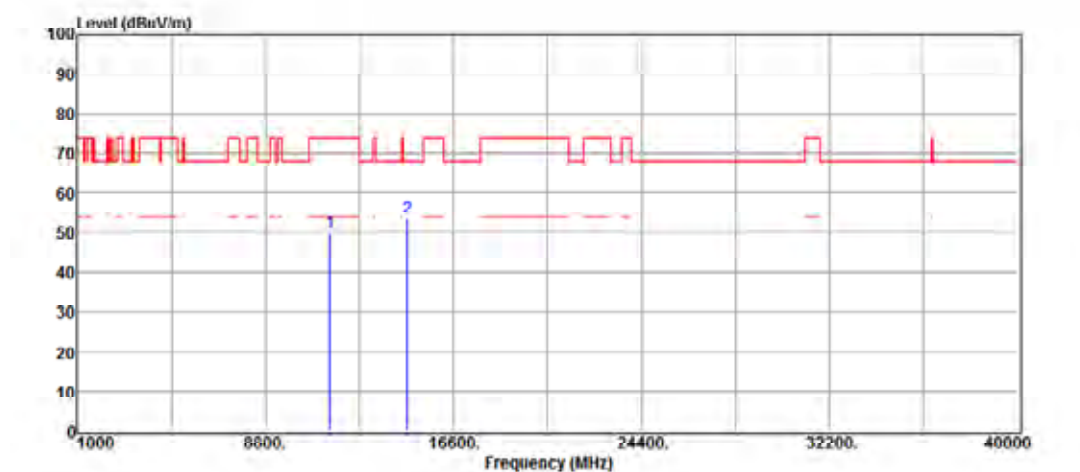

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11490.00	35.48	14.97	50.45	74.00	-23.55	Peak	VERTICAL
2	14702.00	34.86	18.84	53.70	68.20	-14.50	Peak	VERTICAL

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type B4 Tx Low CH Tested by : Weitin Chen

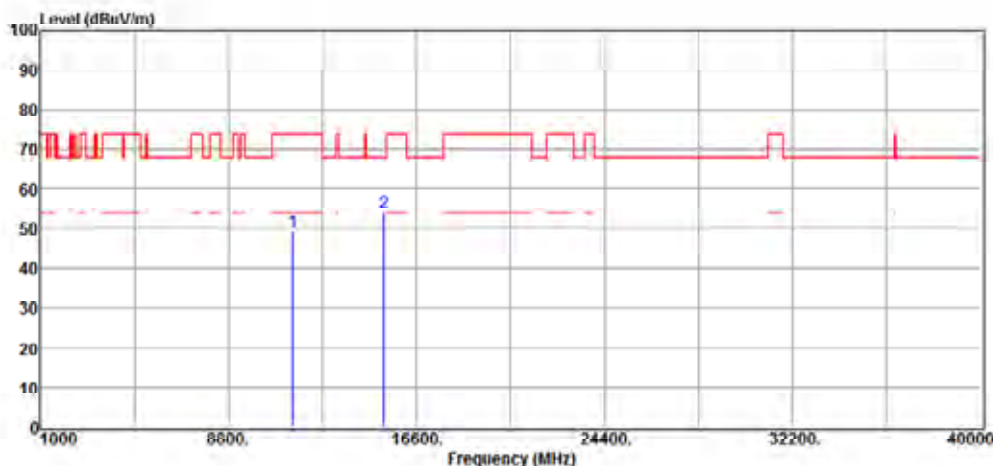

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11490.00	35.12	14.97	50.09	74.00	-23.91	Peak	HORIZONTAL
2	15263.00	34.92	18.53	53.45	68.20	-14.75	Peak	HORIZONTAL

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type B4 Tx Mid CH Tested by : Weitin Chen

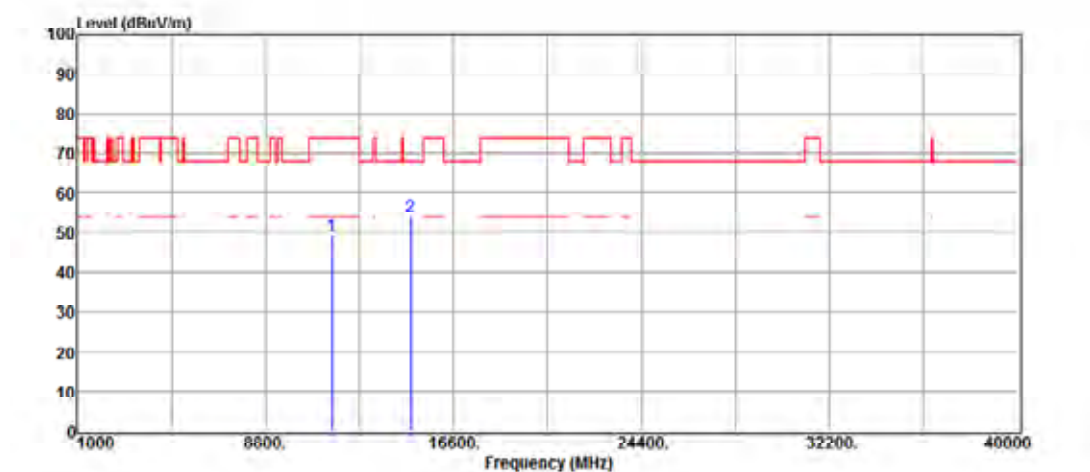

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11570.00	35.08	15.10	50.18	74.00	-23.82	Peak	VERTICAL
2	14821.00	36.21	18.78	54.99	68.20	-13.21	Peak	VERTICAL

International Standard Laboratory Corp.
Company Address: No.120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F TYPE B4 Tx Mid CH Tested by : Weitin Chen

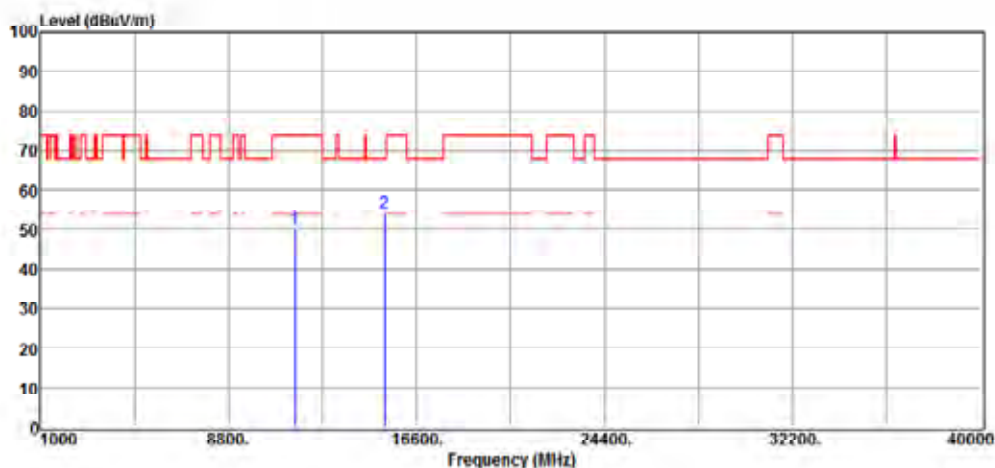

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11570.00	35.68	15.10	50.78	74.00	-23.22	Peak	HORIZONTAL
2	15280.00	36.47	18.50	54.97	68.20	-13.23	Peak	HORIZONTAL

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type B4 Tx High CH Tested by : Weitin Chen

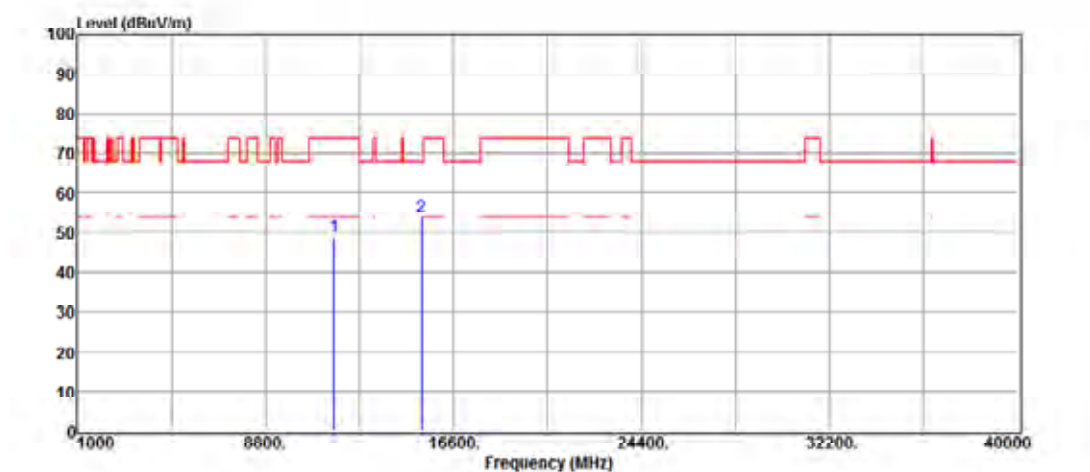

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11650.00	34.38	15.22	49.60	74.00	-24.40	Peak	VERTICAL
2	15280.00	36.48	18.50	54.98	68.20	-13.22	Peak	VERTICAL

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type B4 Tx High CH Tested by : Weitin Chen

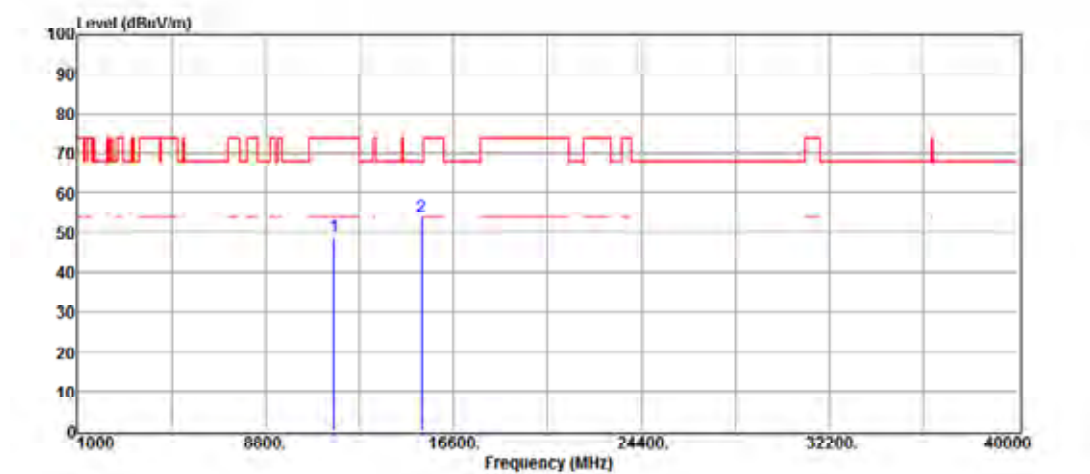

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11650.00	34.50	15.22	49.72	74.00	-24.28	Peak	HORIZONTAL
2	15280.00	33.61	18.50	52.11	68.20	-16.09	Peak	HORIZONTAL

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type Straddle Ch Tx Tested by : Weitin Chen

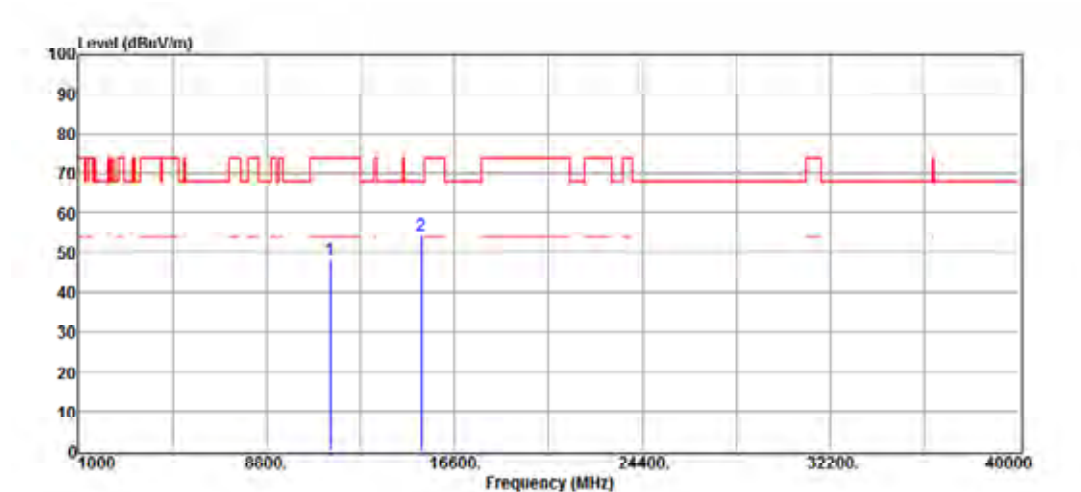

No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11440.00	33.41	14.91	48.32	74.00	-25.68	Peak	VERTICAL
2	15212.00	37.45	18.62	56.07	68.20	-12.13	Peak	VERTICAL

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type Straddle Ch Tx Tested by : Weitin Chen

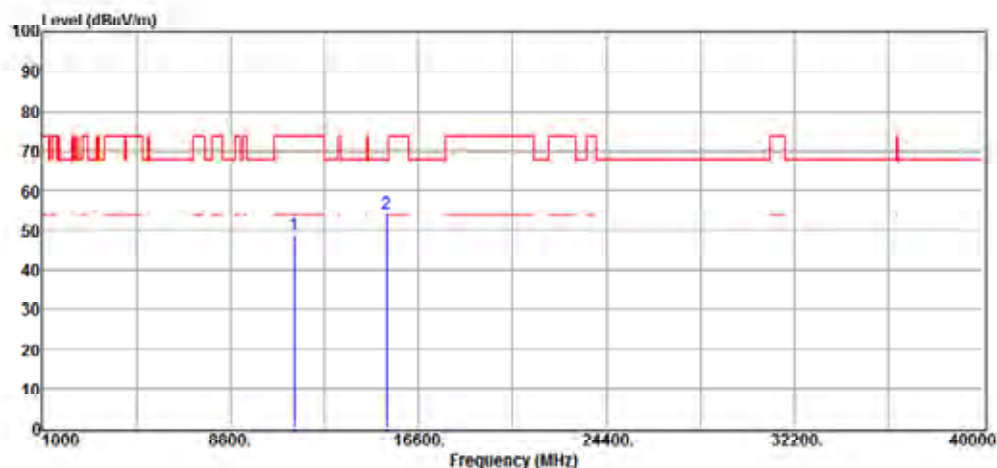


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	11440.00	34.44	14.91	49.35	74.00	-24.65	Peak	HORIZONTAL
2	15280.00	35.73	18.50	54.23	68.20	-13.97	Peak	HORIZONTAL

Band Edges test -Radiated

International Standard Laboratory Corp.
Company Address: No.120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F Type a mode B1&2 Low Ch Tested by : Weitin Chen

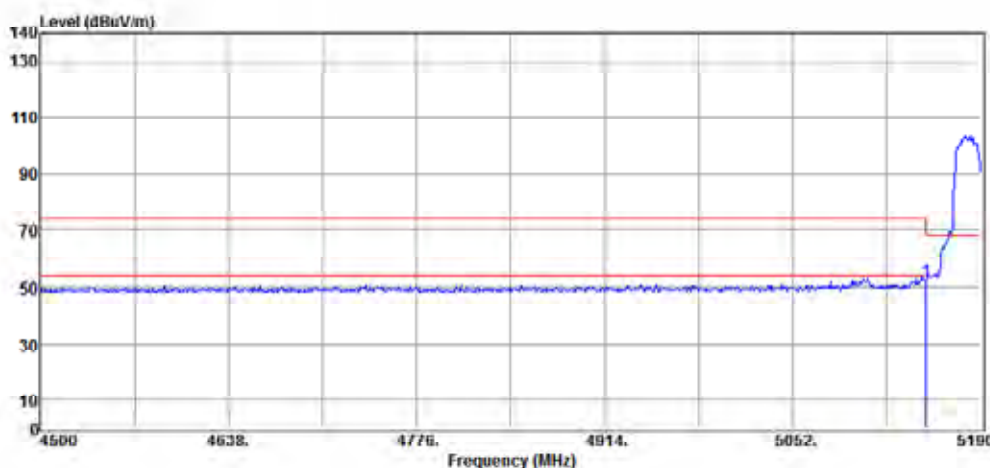


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	44.95	6.77	51.72	68.20	-16.48	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No.120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F Type a mode B1&2 Low Ch Tested by : Weitin Chen

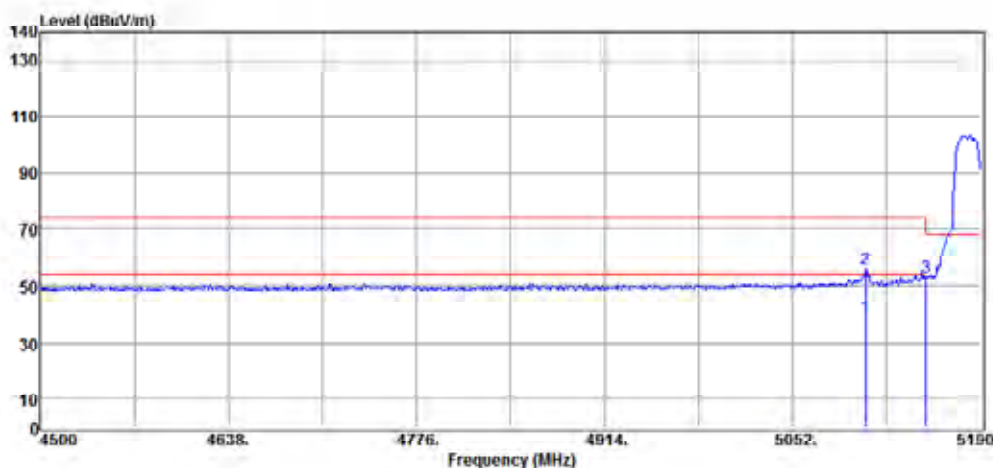


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5105.82	32.48	6.64	39.12	114.00	-74.88	Average	HORIZONTAL
2	5105.82	49.09	6.64	55.73	74.00	-18.27	Peak	HORIZONTAL
3	5150.00	46.17	6.77	52.94	68.20	-15.26	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F Type a mode B1&2 High Ch Tested by : Weitin Chen

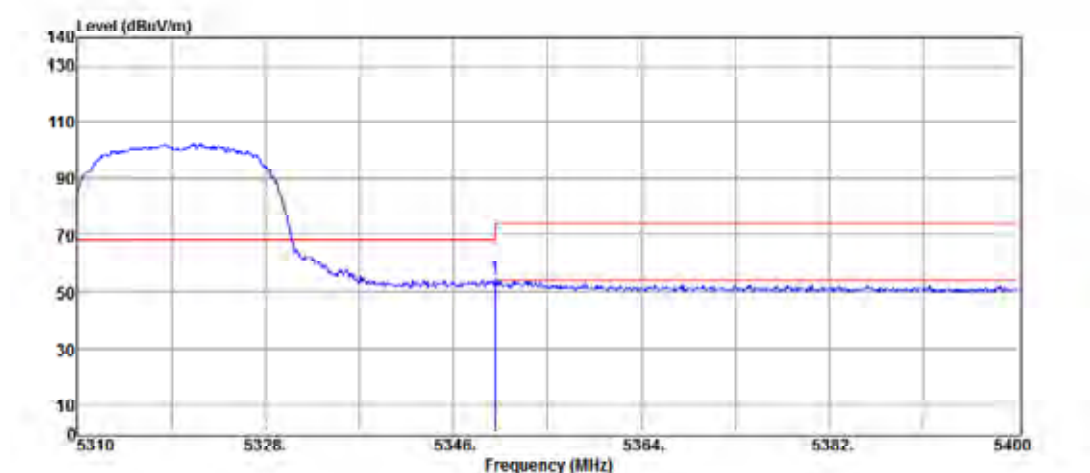


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	47.01	7.27	54.28	68.20	-13.92	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan

Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F Type a mode B1&2 High Ch Tested by : Weitin Chen

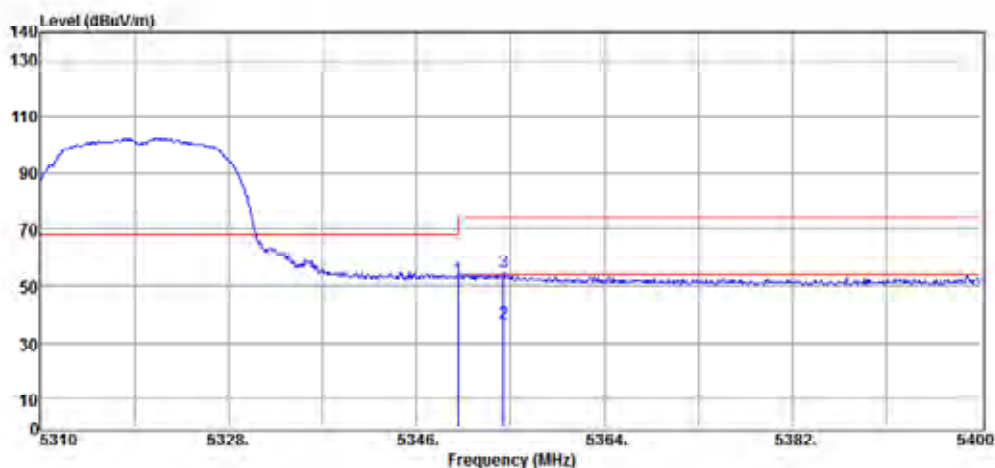


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	45.25	7.27	52.52	68.20	-15.68	Peak	HORIZONTAL
2	5354.37	29.35	7.25	36.60	114.00	-77.40	Average	HORIZONTAL
3	5354.37	47.72	7.25	54.97	74.00	-19.03	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HT20 mode B1&2 Low Ch Tested by : Weitin Chen

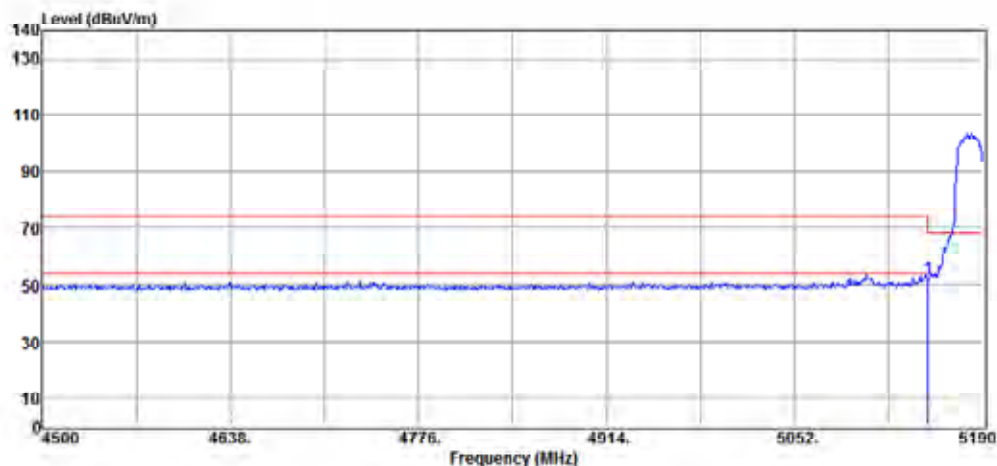


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	45.26	6.77	52.03	68.20	-16.17	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HT20 mode B1&2 Low Ch Tested by : Weitin Chen

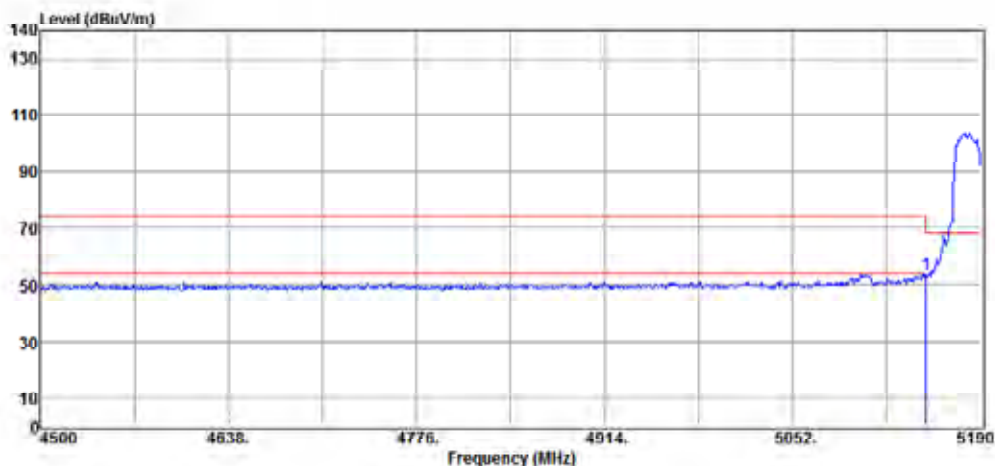


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	46.53	6.77	53.30	68.20	-14.90	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HT20 mode B1&2 High Ch Tested by : Weitin Chen

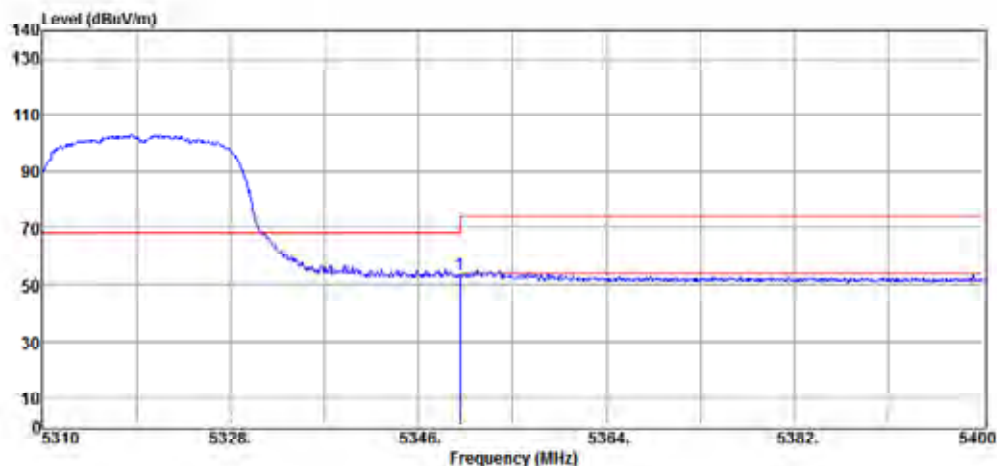


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	45.91	7.27	53.18	68.20	-15.02	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HT20 mode B1&2 High Ch Tested by : Weitin Chen

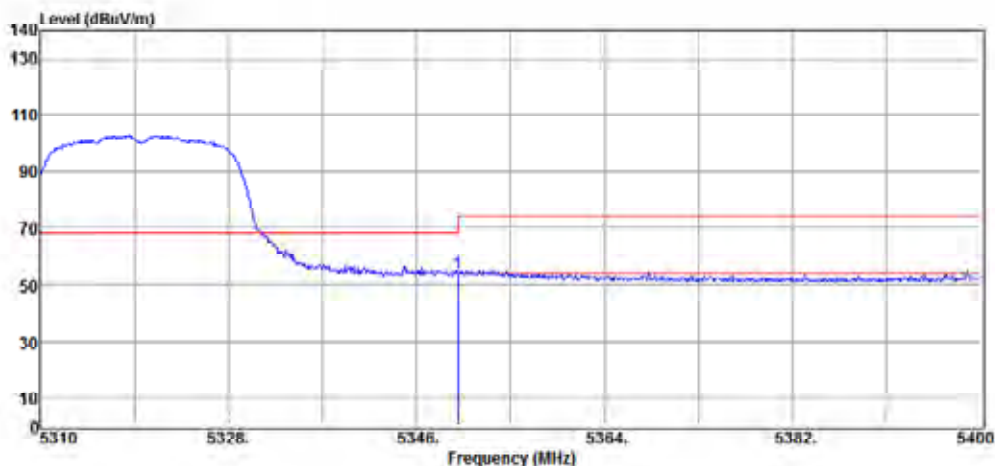


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	46.77	7.27	54.04	68.20	-14.16	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type VHT20 mode B1&2 Low Ch Tested by : Weitin Chen

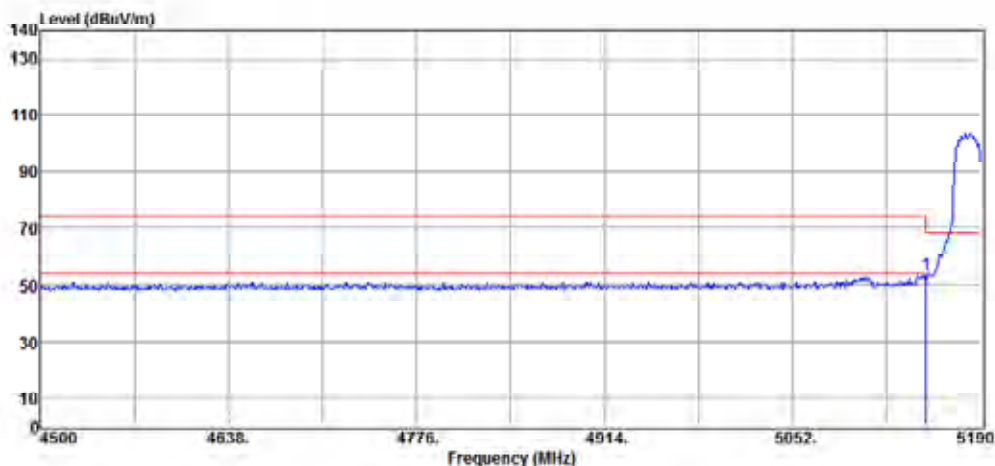


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	46.54	6.77	53.31	68.20	-14.89	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No.120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type VHT20 mode B1&2 Low Ch Tested by : Weitin Chen

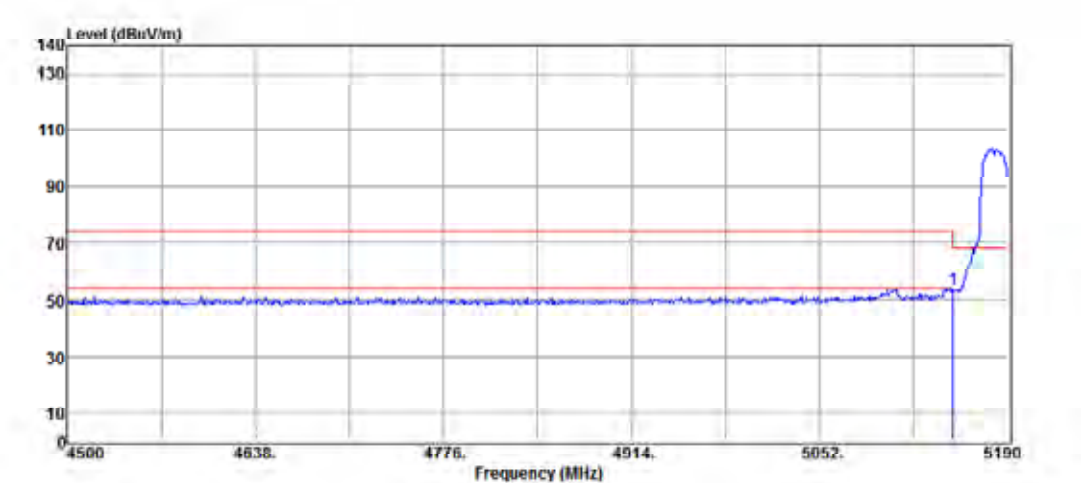


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	46.62	6.77	53.39	68.20	-14.81	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type VHT20 mode B1&2 High Ch Tested by : Weitin Chen

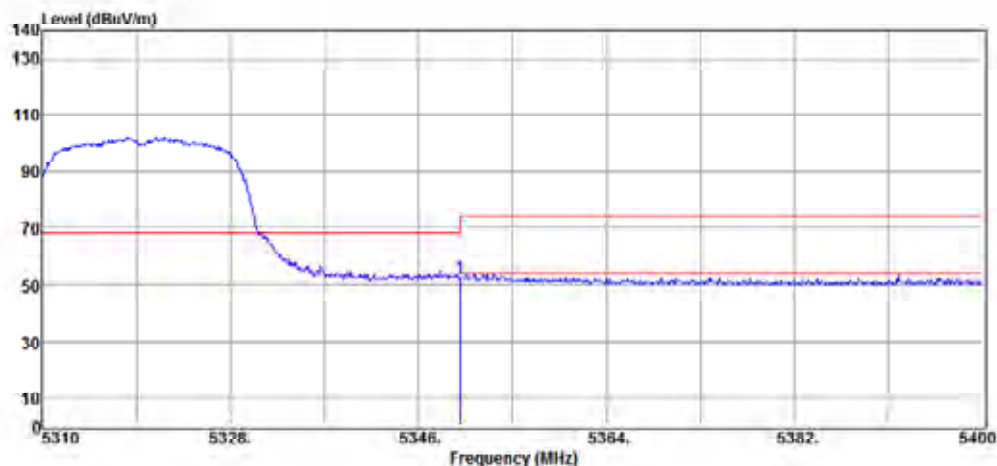


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	45.04	7.27	52.31	68.20	-15.89	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type VHT20 mode B1&2 High Ch Tested by : Weitin Chen

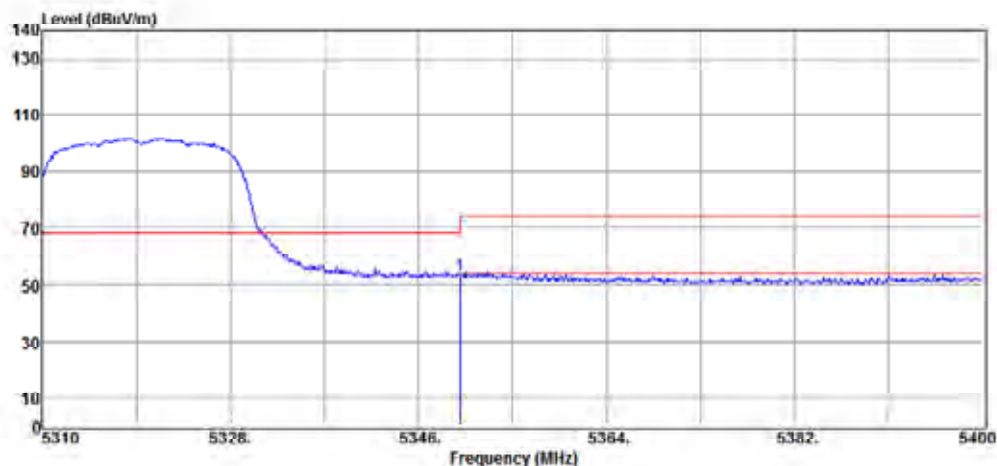


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	45.75	7.27	53.02	68.20	-15.18	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HE20 mode B1&2 Low Ch Tested by : Weitin Chen

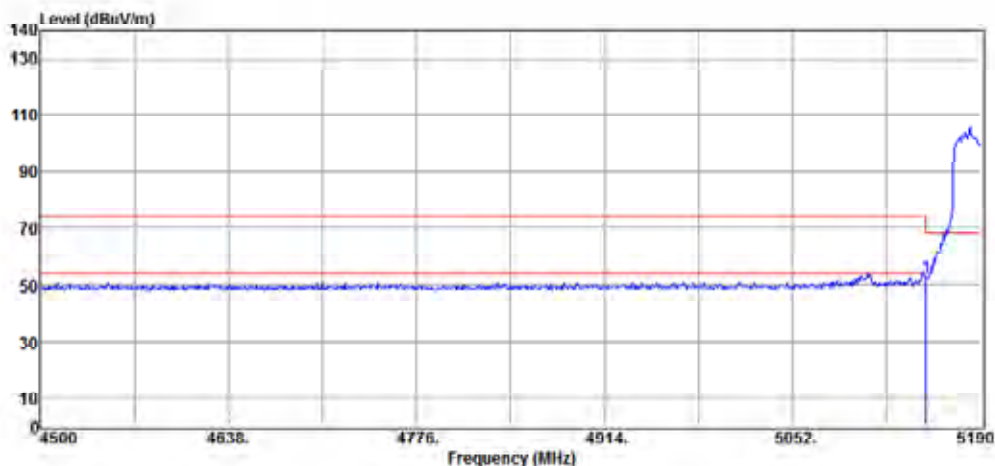


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	45.69	6.77	52.46	68.20	-15.74	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HE20 mode B1&2 Low Ch Tested by : Weitin Chen

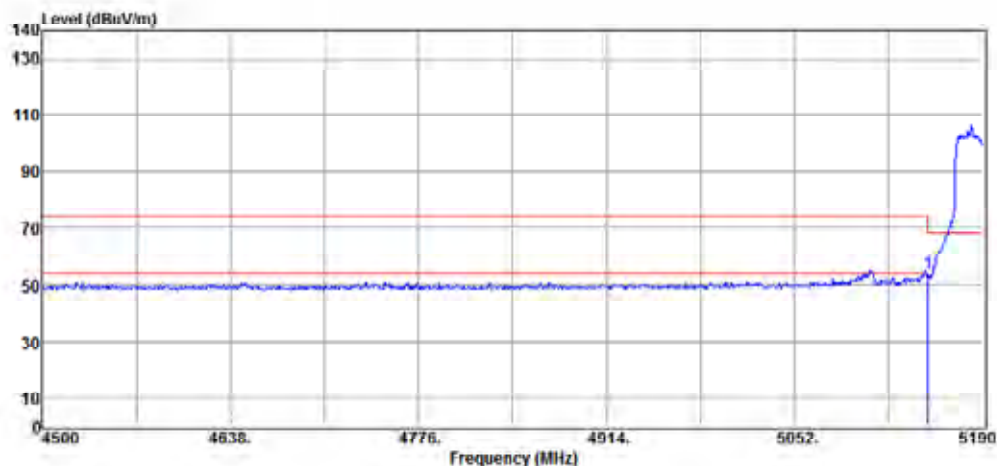


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	46.95	6.77	53.72	68.20	-14.48	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HE20 mode B1&2 High Ch Tested by : Weitin Chen

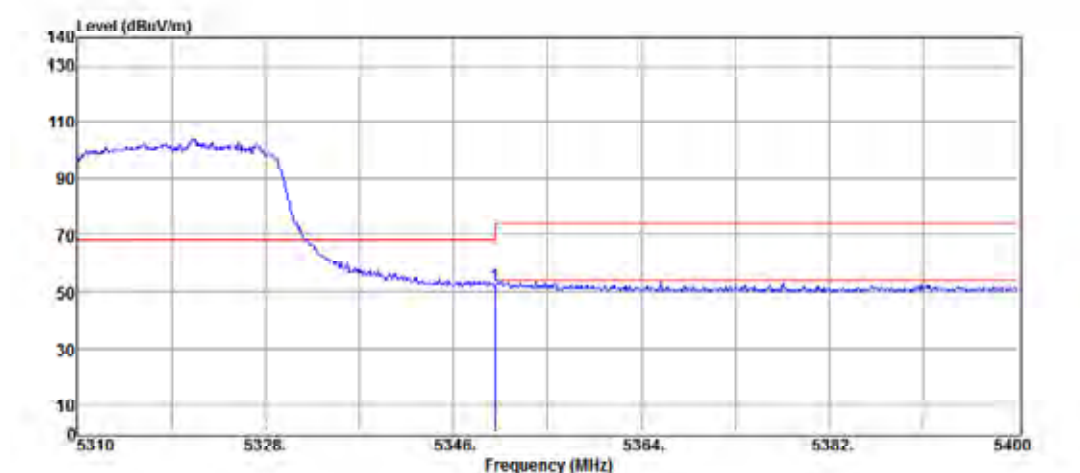


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	44.87	7.27	52.14	68.20	-16.06	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HE20 mode B1&2 High Ch Tested by : Weitin Chen

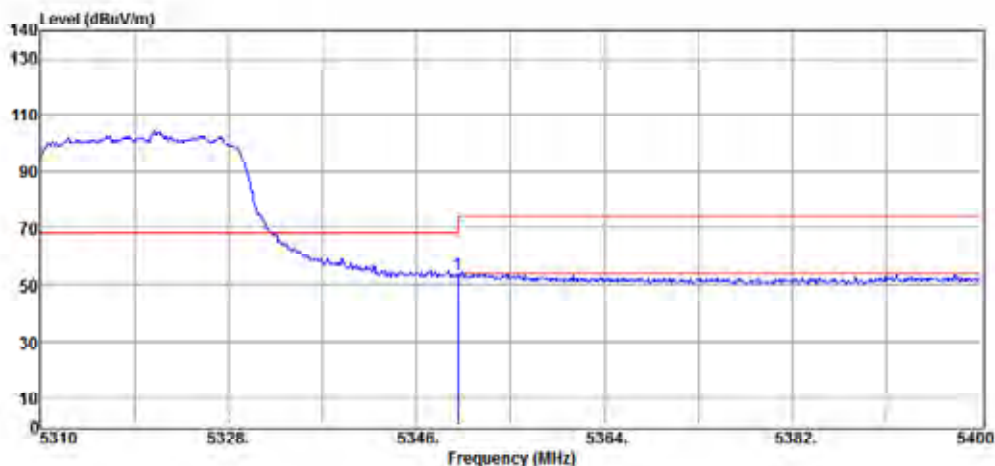


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	46.16	7.27	53.43	68.20	-14.77	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type a mode B3 Low Ch Tested by : Weitin Chen

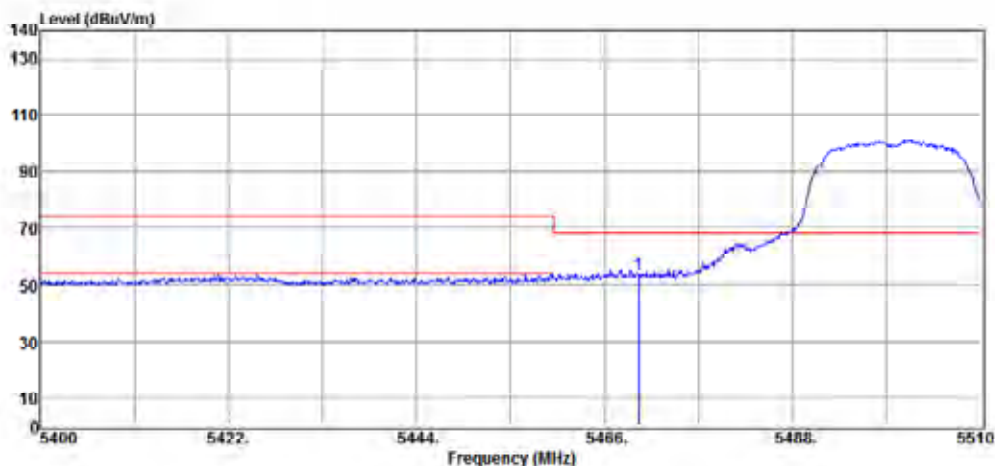


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	46.07	7.32	53.39	68.20	-14.81	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type a mode B3 Low Ch Tested by : Weitin Chen

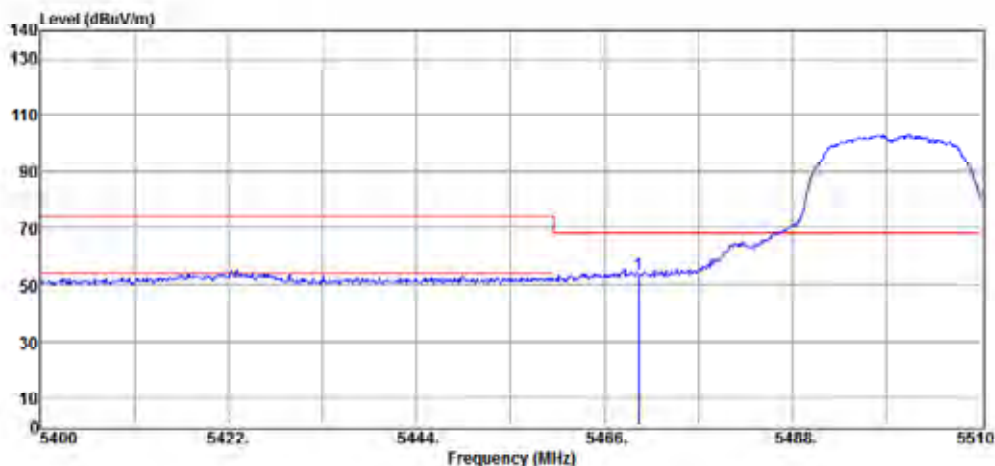


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	45.94	7.32	53.26	68.20	-14.94	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type a mode B3 High Ch Tested by : Weitin Chen

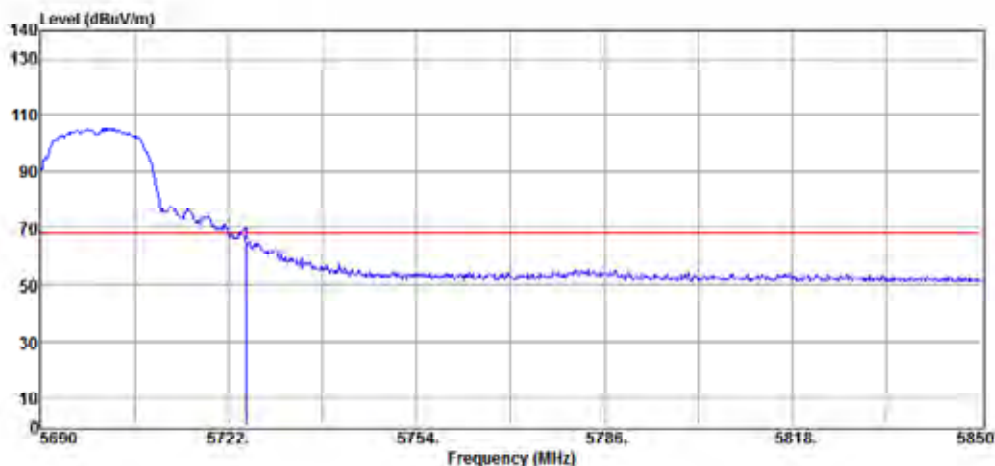


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	56.37	8.15	64.52	68.20	-3.68	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type a mode B3 High Ch Tested by : Weitin Chen

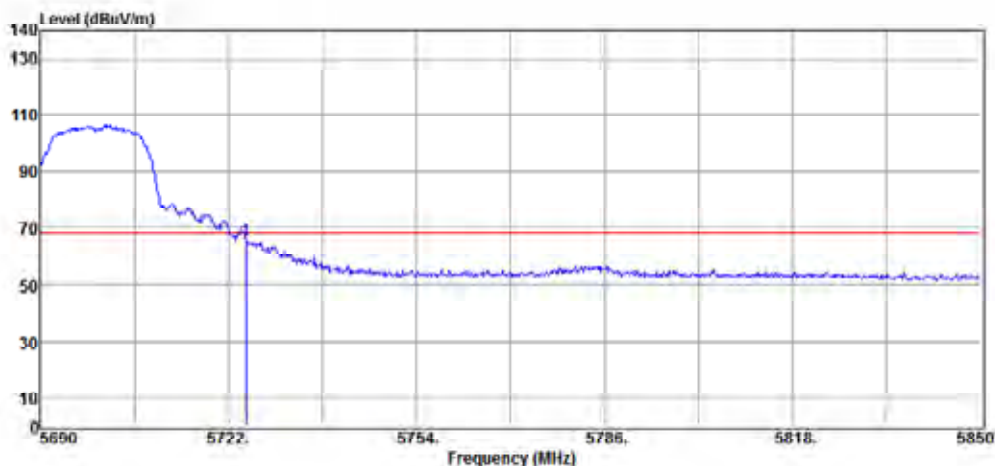


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	57.34	8.15	65.49	68.20	-2.71	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HT20 mode B3 Low Ch Tested by : Weitin Chen

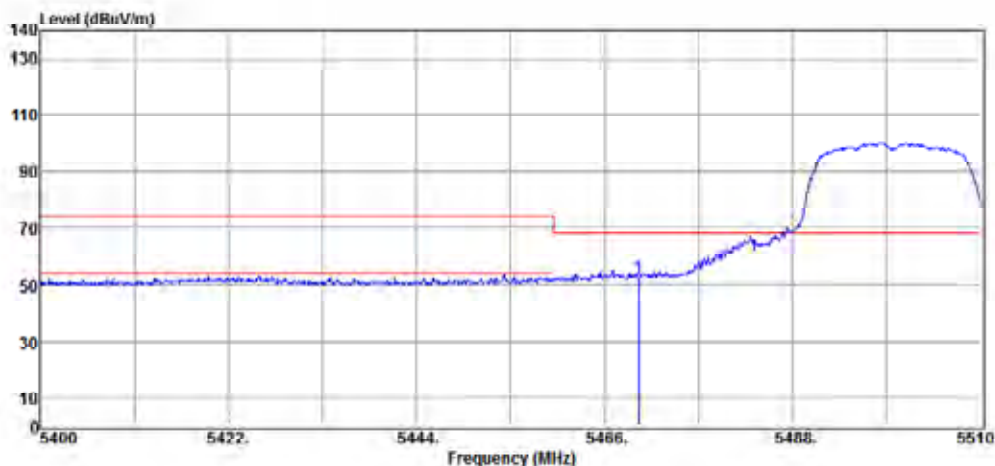


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	45.11	7.32	52.43	68.20	-15.77	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HT20 mode B3 Low Ch Tested by : Weitin Chen

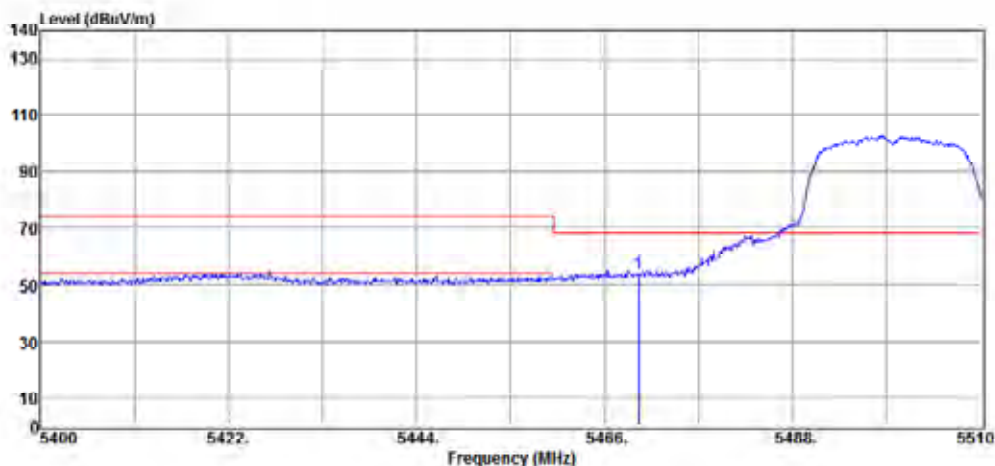


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	46.62	7.32	53.94	68.20	-14.26	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HT20 mode B3 High Ch Tested by : Weitin Chen

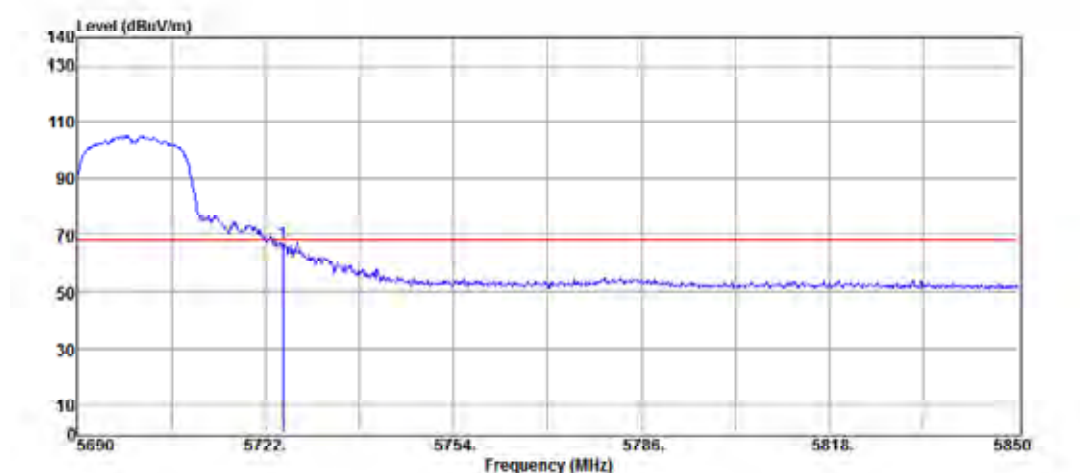


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	58.89	8.15	67.04	68.20	-1.16	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HT20 mode B3 High Ch Tested by : Weitin Chen

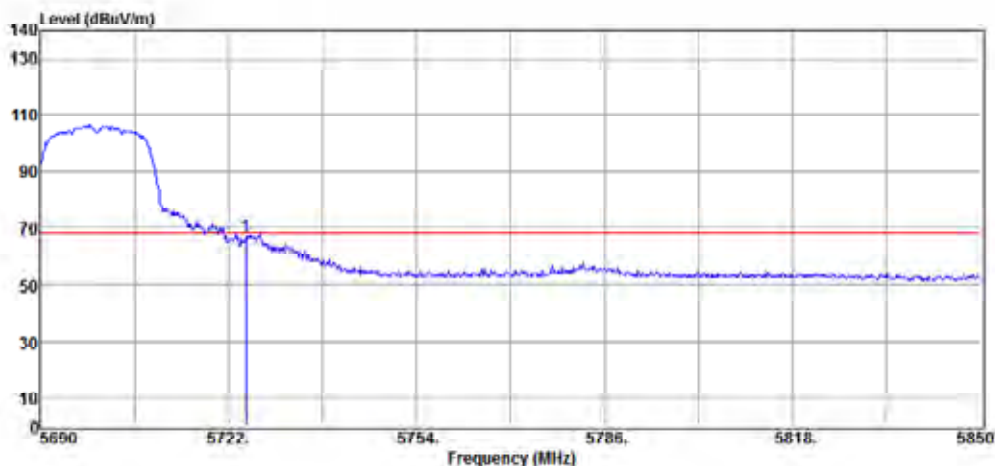


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	58.54	8.15	66.69	68.20	-1.51	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type VHT20 mode B3 Low Ch Tested by : Weitin Chen

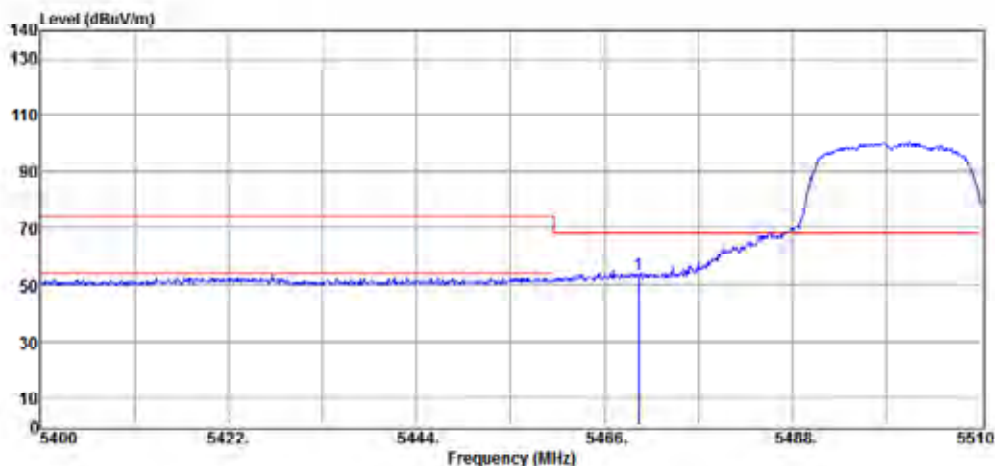


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	45.87	7.32	53.19	68.20	-15.01	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type VHT20 mode B3 Low Ch Tested by : Weitin Chen

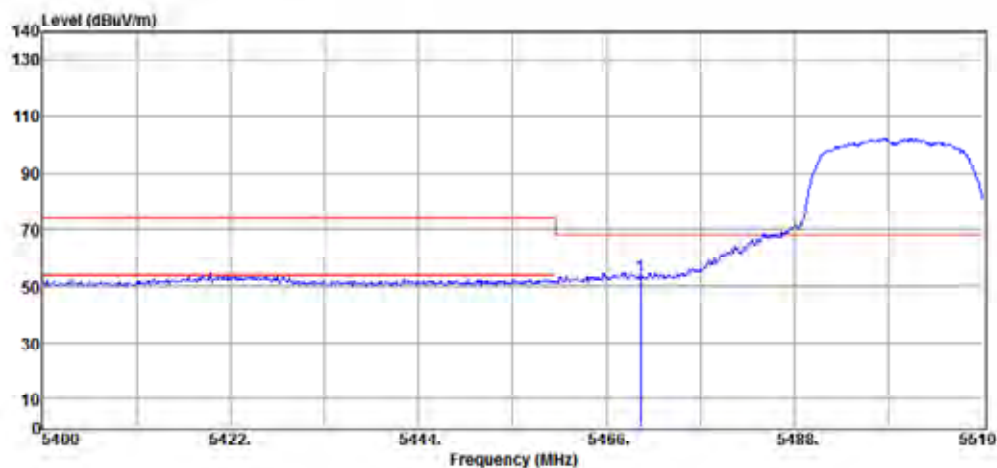


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	46.14	7.32	53.46	68.20	-14.74	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type VHT20 mode B3 High Ch Tested by : Weitin Chen

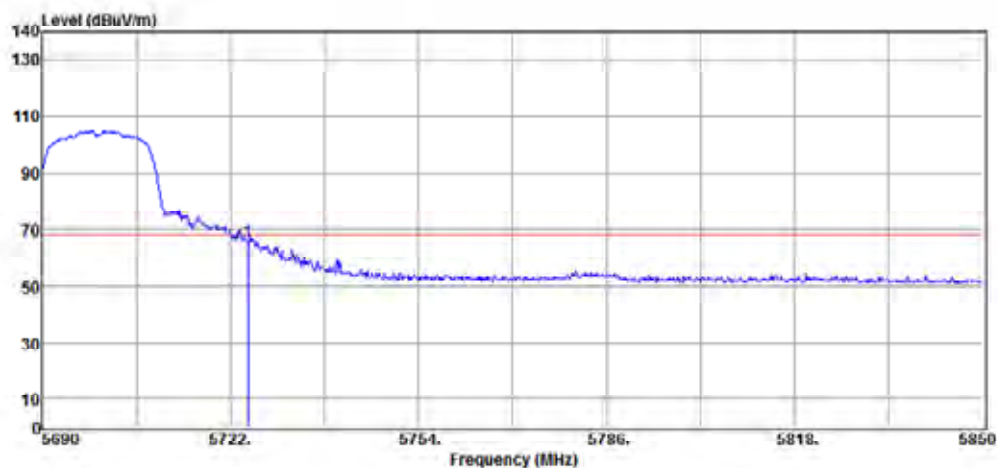


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	57.63	8.15	65.78	68.20	-2.42	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type VHT20 mode B3 High Ch Tested by : Weitin Chen

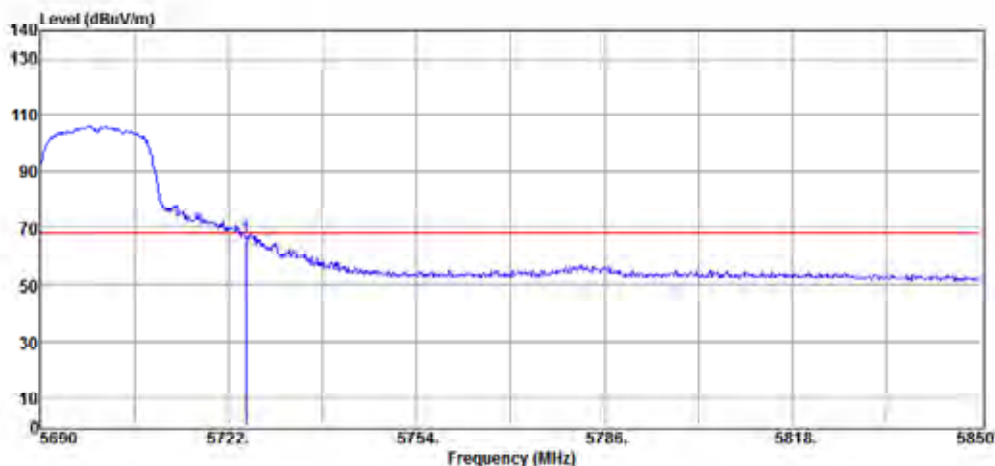


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	58.10	8.15	66.25	68.20	-1.95	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HE20 mode B3 Low Ch Tested by : Weitin Chen

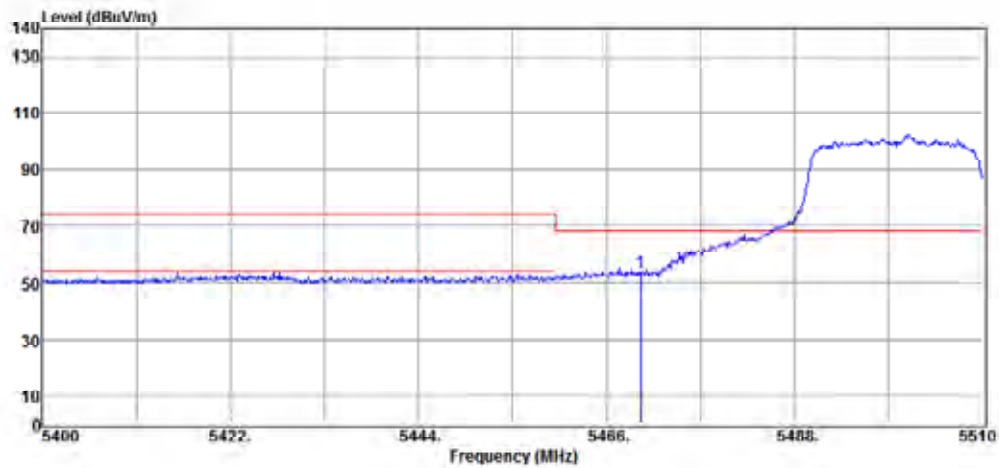


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	46.22	7.32	53.54	68.20	-14.66	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HE20 mode B3 Low Ch Tested by : Weitin Chen

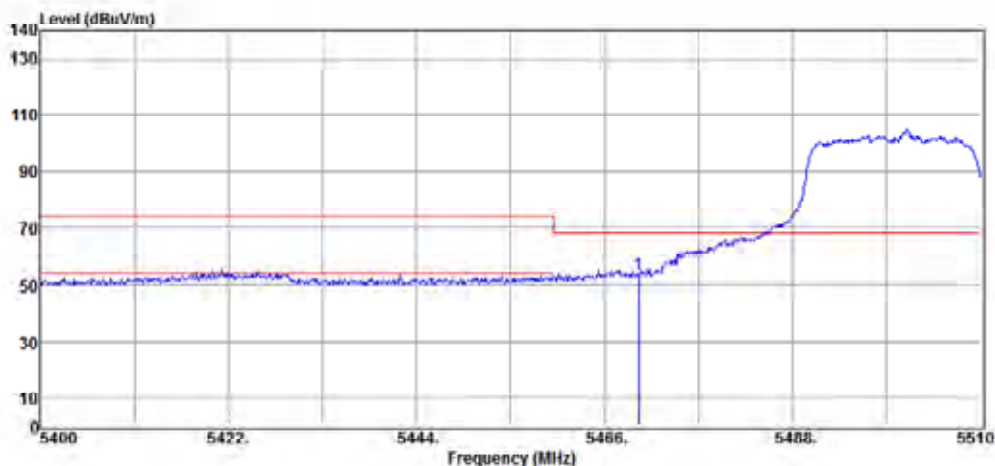


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	45.98	7.32	53.30	68.20	-14.90	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HE20 mode B3 High Ch Tested by : Weitin Chen

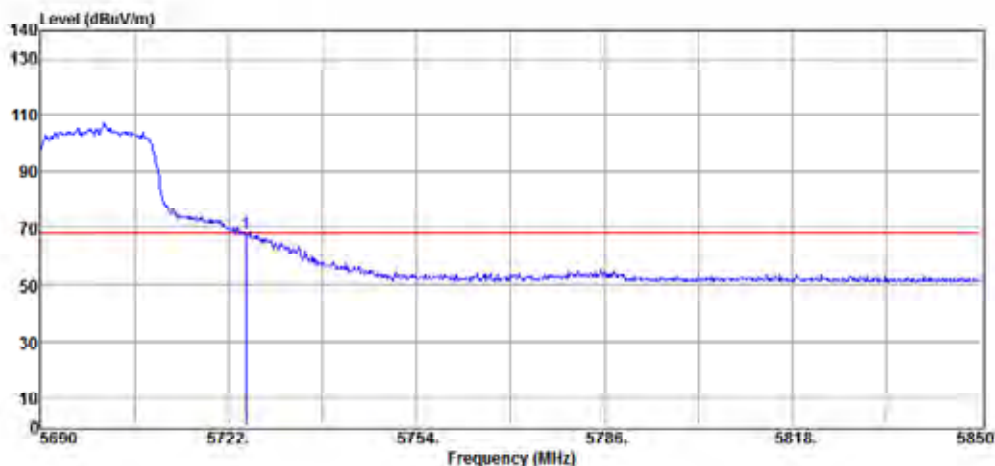


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	59.51	8.15	67.66	68.20	-0.54	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-25

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HE20 mode B3 High Ch Tested by : Weitin Chen

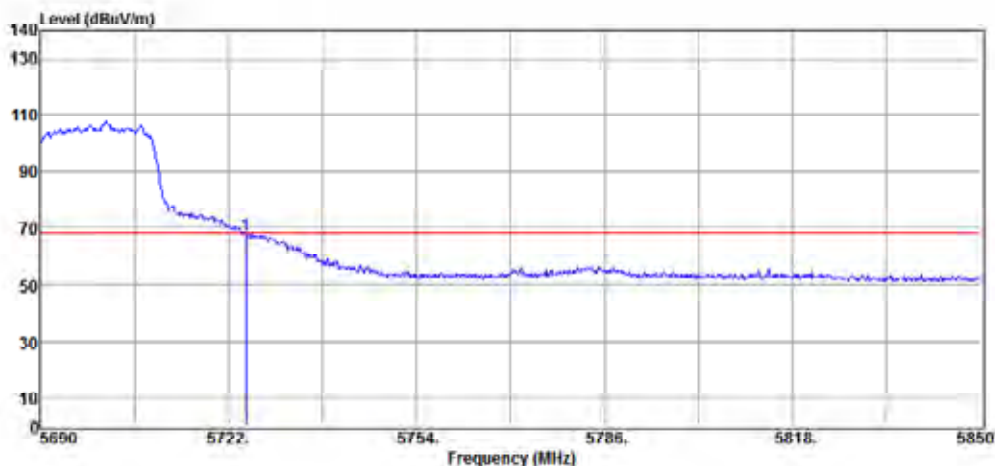


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	59.07	8.15	67.22	68.20	-0.98	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-30

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type a mode Ch 144 Tested by : Weitin Chen

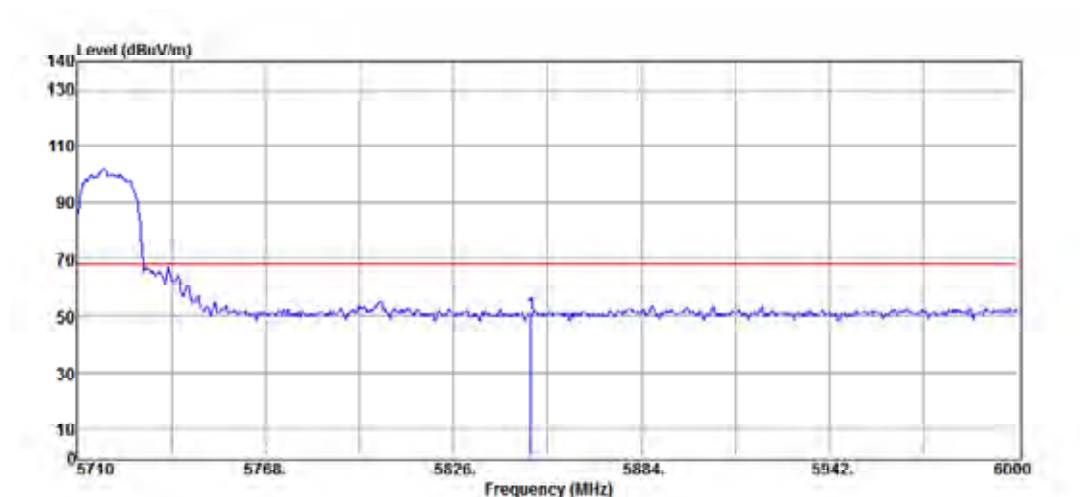


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	42.34	8.02	50.36	68.20	-17.84	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-30

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type a mode Ch 144 Tested by : Weitin Chen

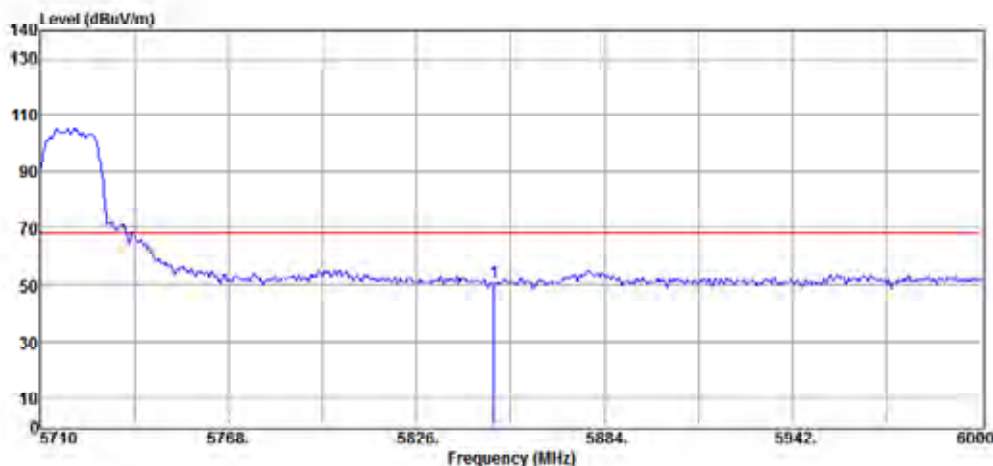


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	42.40	8.02	50.42	68.20	-17.78	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-30

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HT20 mode Ch 144 Tested by : Weitin Chen

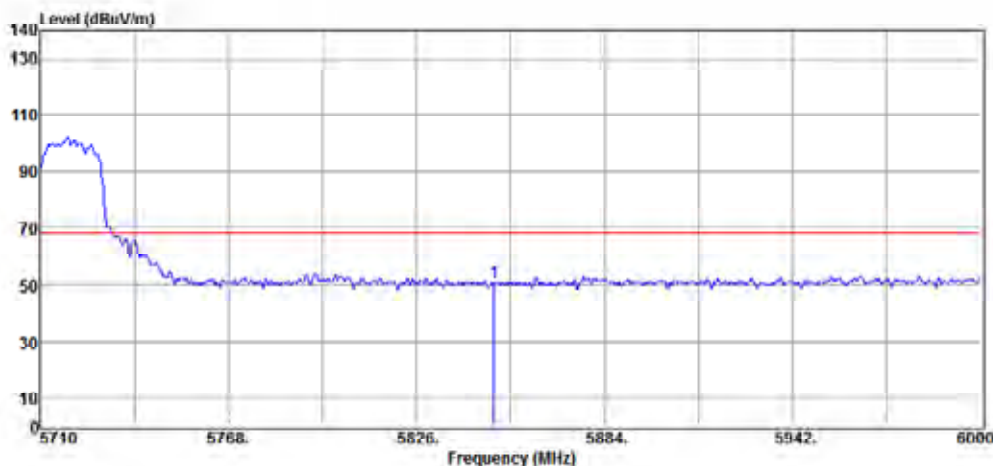


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	42.66	8.02	50.68	68.20	-17.52	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-30

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HT20 mode Ch 144 Tested by : Weitin Chen

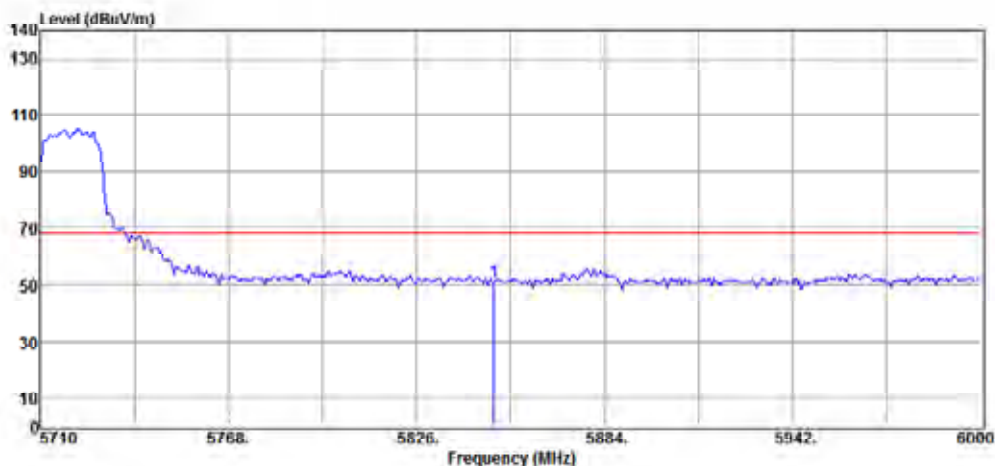


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	42.98	8.02	51.00	68.20	-17.20	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-30

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type VHT20 mode Ch 144 Tested by : Weitin Chen

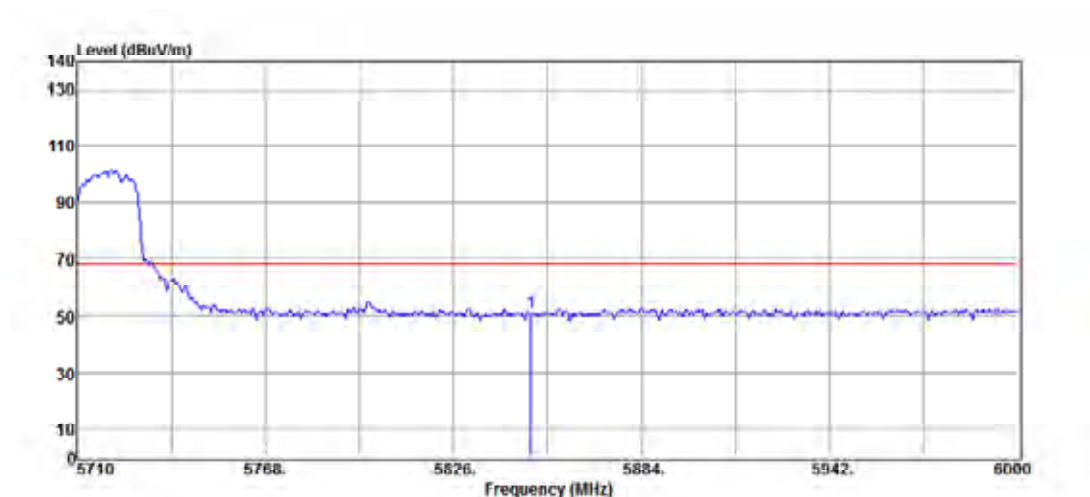


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	42.74	8.02	50.76	68.20	-17.44	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-30

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type VHT20 mode Ch 144 Tested by : Weitin Chen

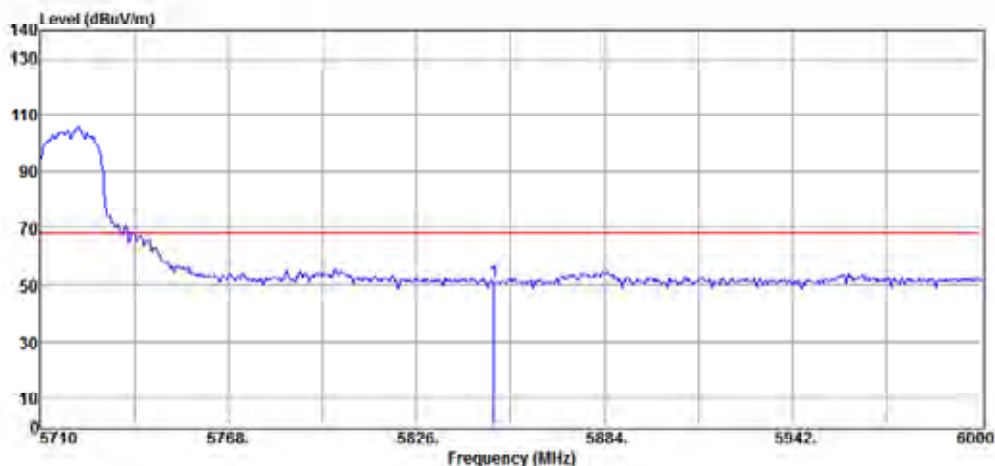


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	42.79	8.02	50.81	68.20	-17.39	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-30


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HE20 mode Ch 144 Tested by : Weitin Chen

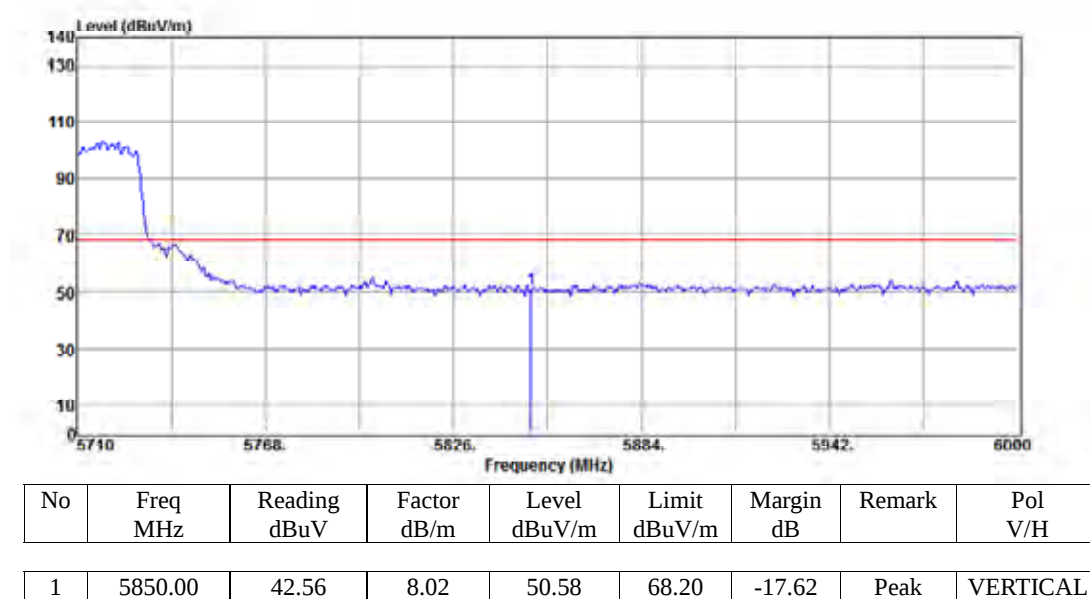

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-04-30

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : F type HE20 mode Ch 144 Tested by : Weitin Chen

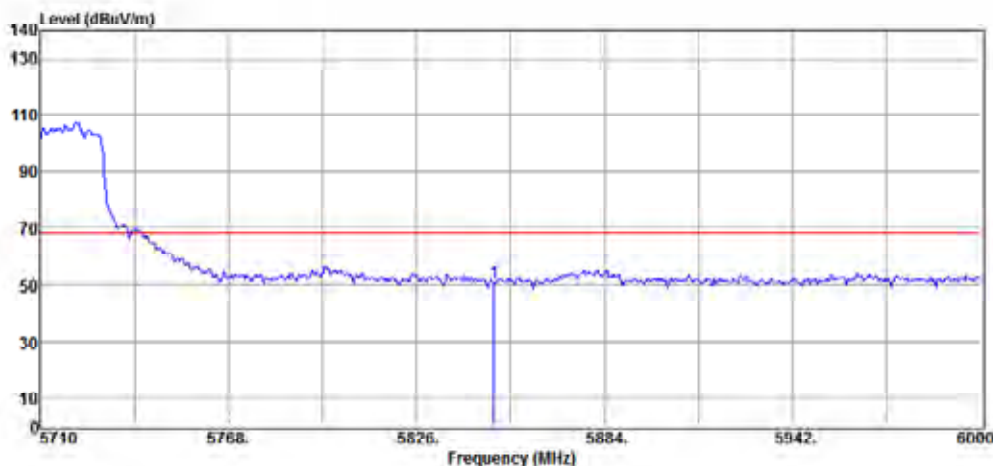


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	42.62	8.02	50.64	68.20	-17.56	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type a mode B1&2 Low Ch Tested by : Weitin Chen

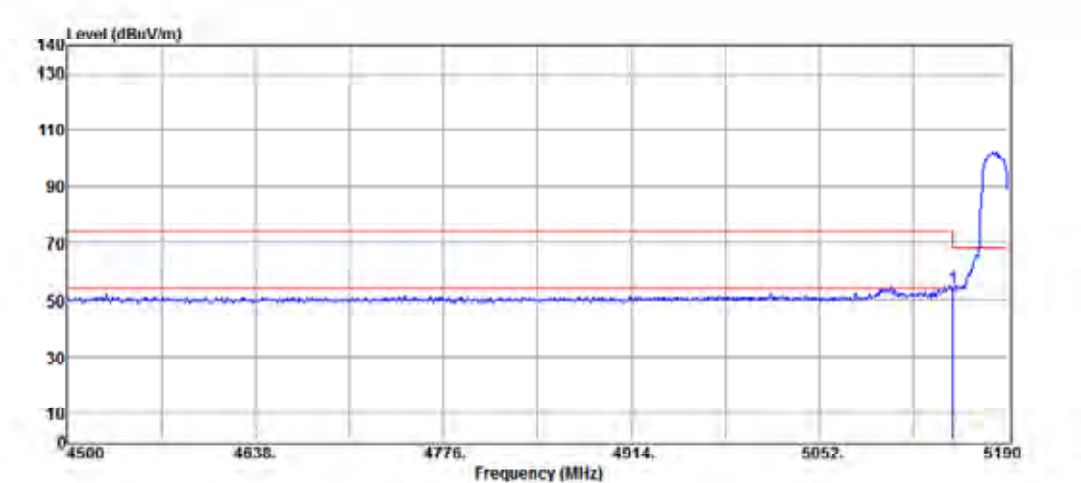


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	47.18	6.77	53.95	68.20	-14.25	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type a mode B1&2 Low Ch Tested by : Weitin Chen

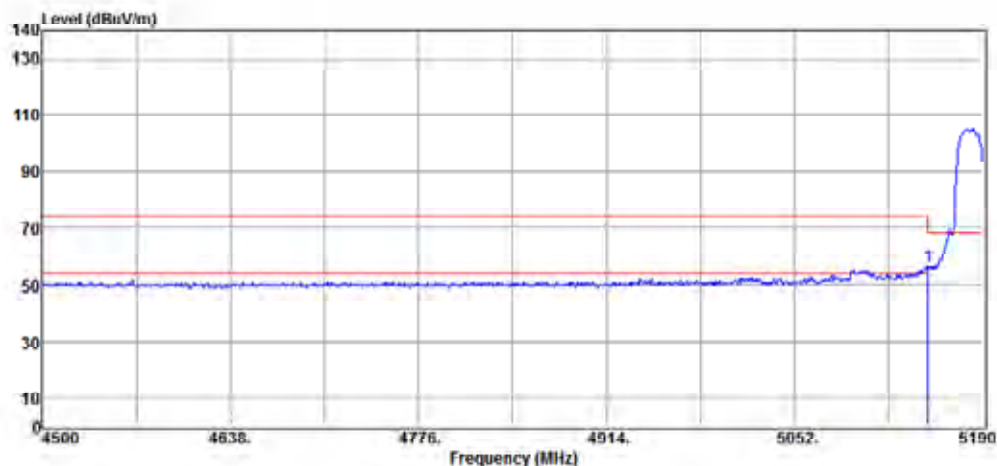


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	49.28	6.77	56.05	68.20	-12.15	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type a mode B1&2 High Ch Tested by : Weitin Chen

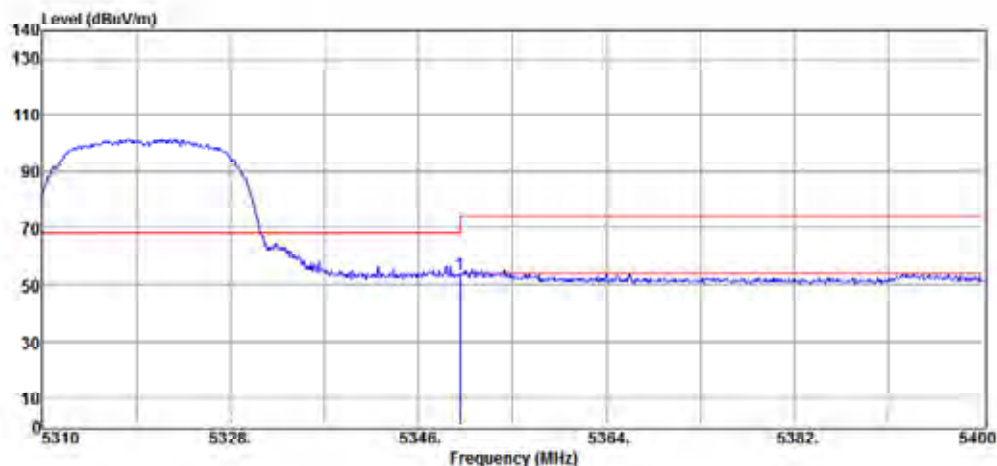


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	45.91	7.27	53.18	68.20	-15.02	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type a mode B1&2 High Ch Tested by : Weitin Chen

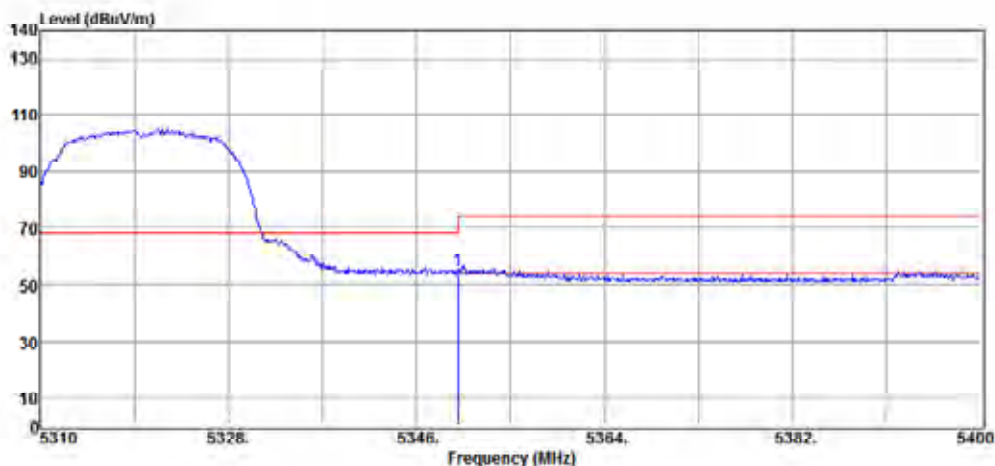


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	47.65	7.27	54.92	68.20	-13.28	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HT20 mode B1&2 Low Ch Tested by : Weitin Chen

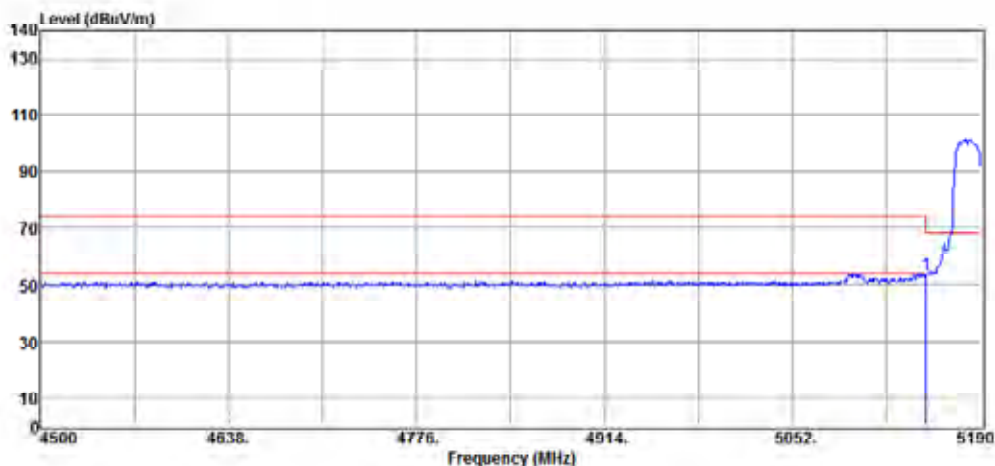


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	46.80	6.77	53.57	68.20	-14.63	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No.120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HT20 mode B1&2 Low Ch Tested by : Weitin Chen

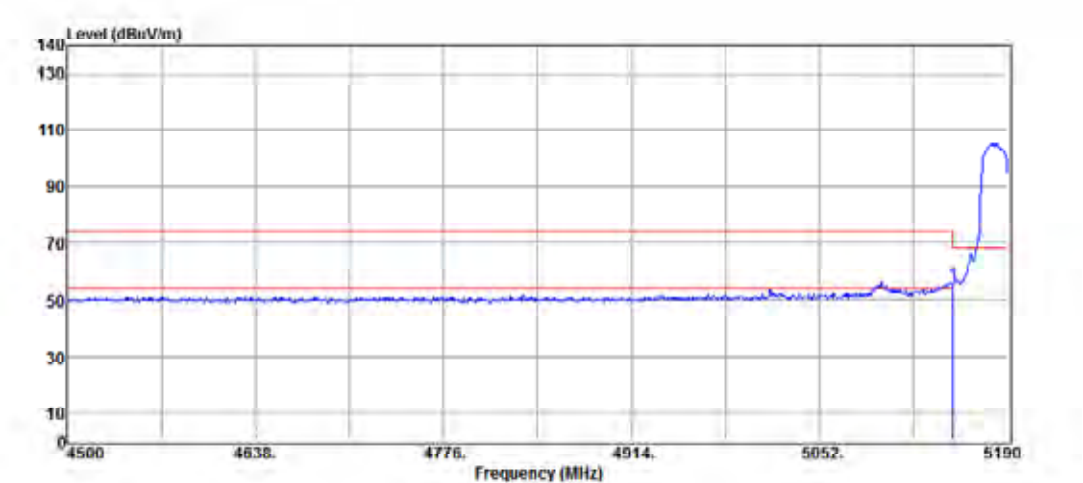


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	48.52	6.77	55.29	68.20	-12.91	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HT20 mode B1&2 High Ch Tested by : Weitin Chen

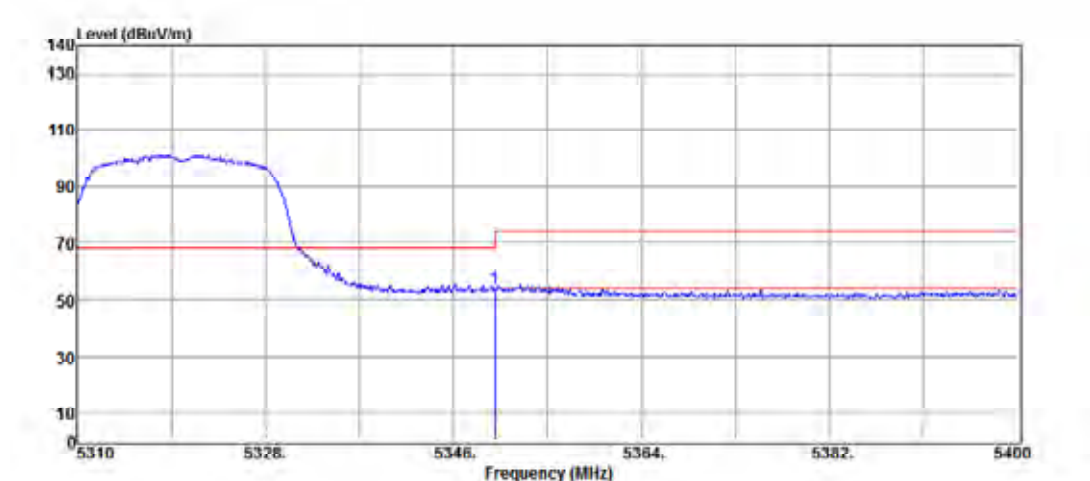


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	46.53	7.27	53.80	68.20	-14.40	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HT20 mode B1&2 High Ch Tested by : Weitin Chen

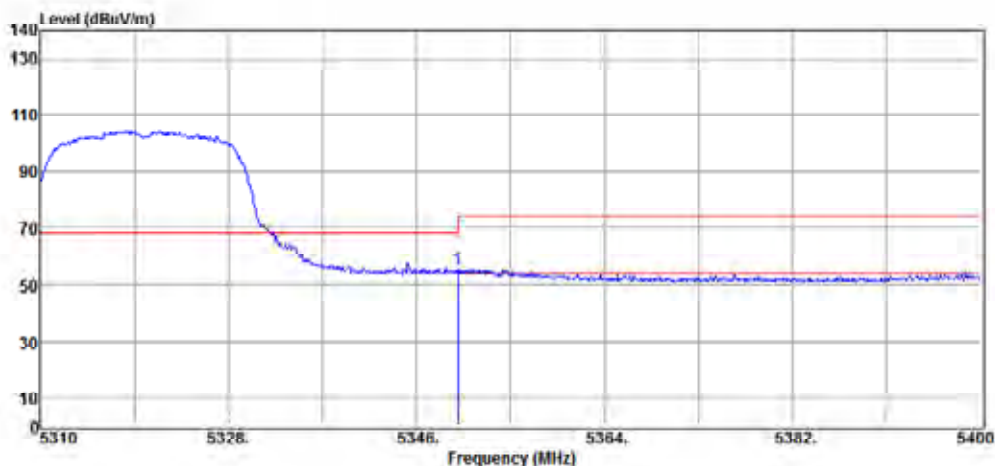


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	48.19	7.27	55.46	68.20	-12.74	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type VHT20 mode B1&2 Low Ch Tested by : Weitin Chen

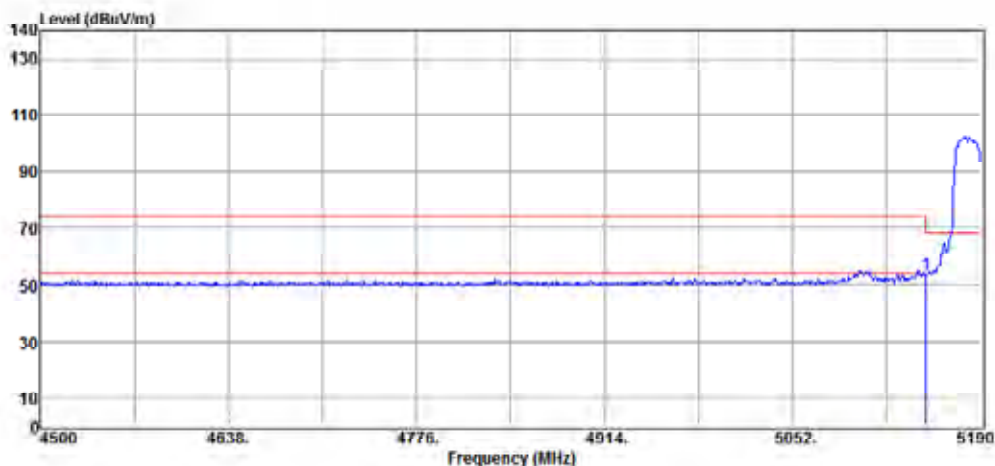


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	46.73	6.77	53.50	68.20	-14.70	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type VHT20 mode B1&2 Low Ch Tested by : Weitin Chen

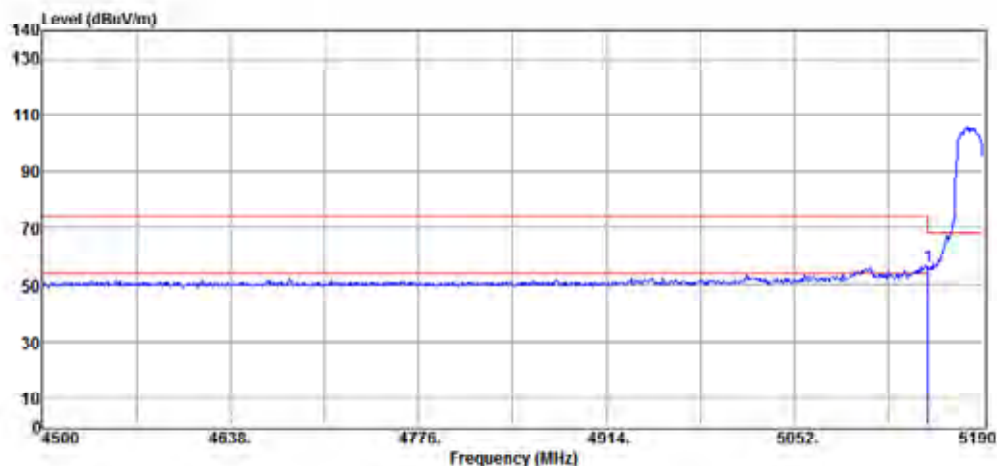


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	49.30	6.77	56.07	68.20	-12.13	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type VHT20 mode B1&2 High Ch Tested by : Weitin Chen

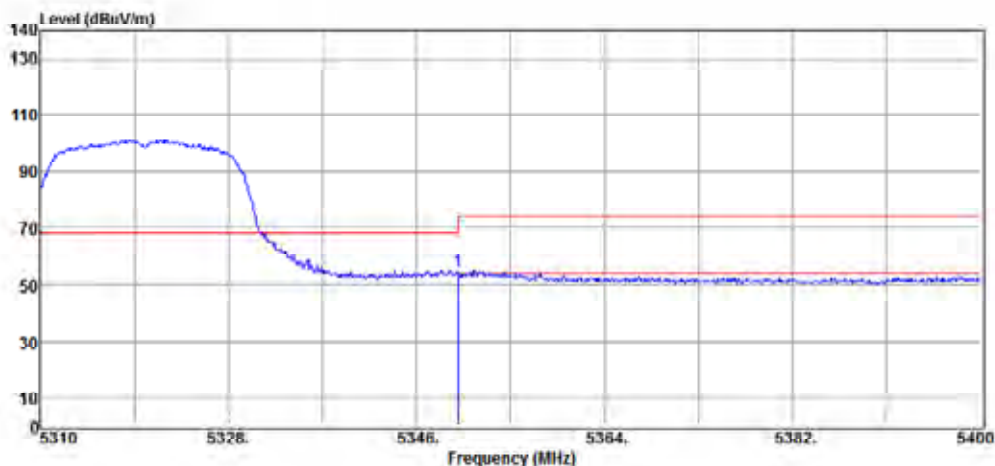


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	46.92	7.27	54.19	68.20	-14.01	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type VHT20 mode B1&2 High Ch Tested by : Weitin Chen

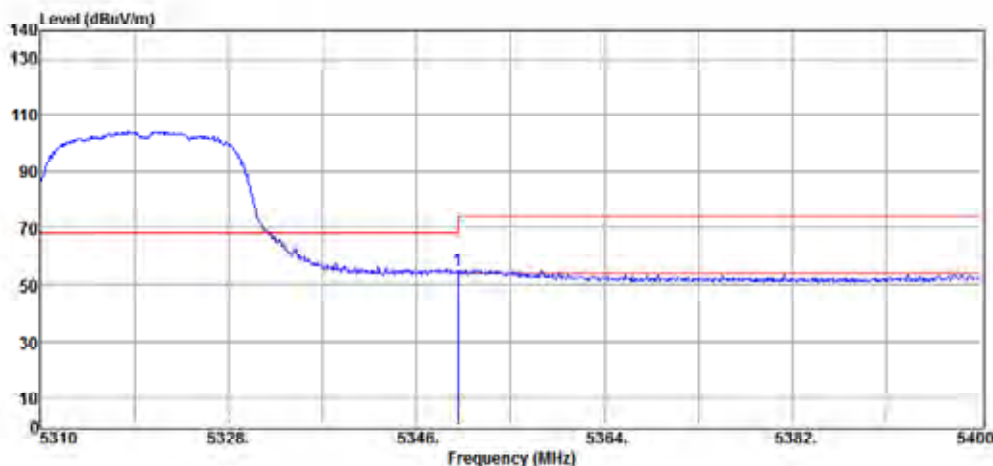


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	47.48	7.27	54.75	68.20	-13.45	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HE20 mode B1&2 Low Ch Tested by : Weitin Chen

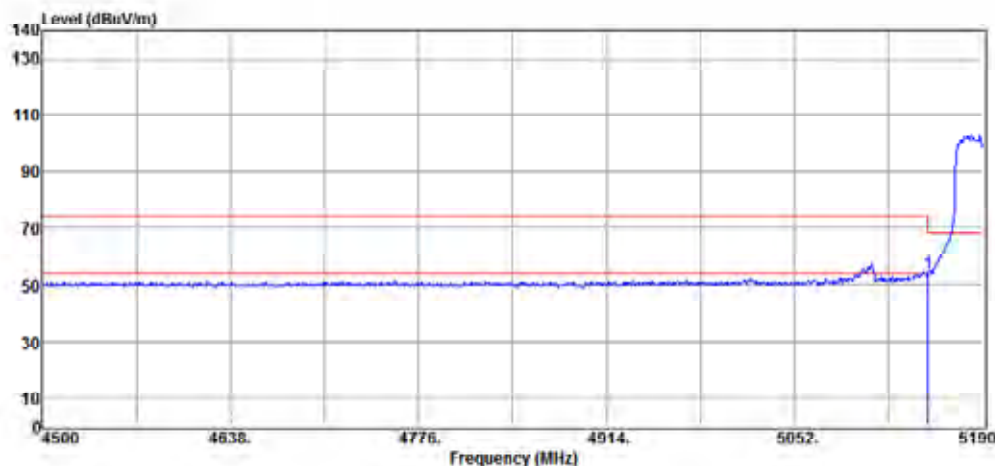


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	46.89	6.77	53.66	68.20	-14.54	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HE20 mode B1&2 Low Ch Tested by : Weitin Chen

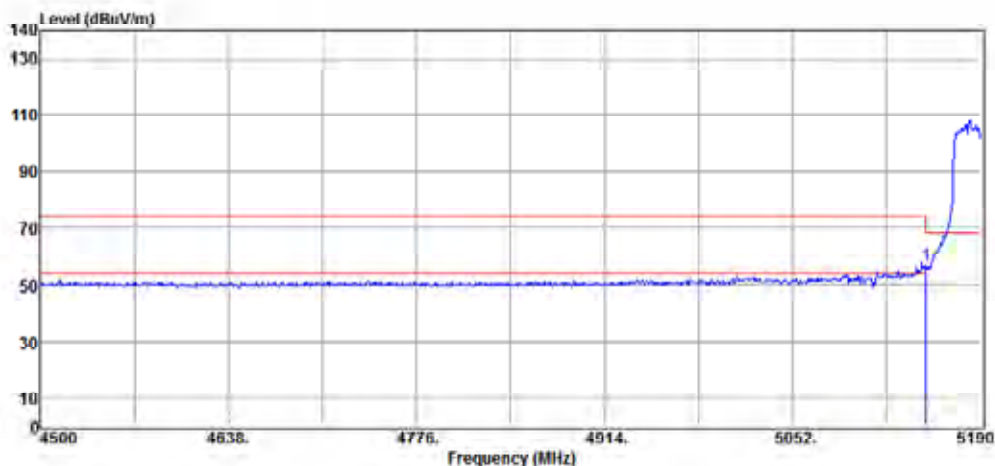


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	50.14	6.77	56.91	68.20	-11.29	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HE20 mode B1&2 High Ch Tested by : Weitin Chen

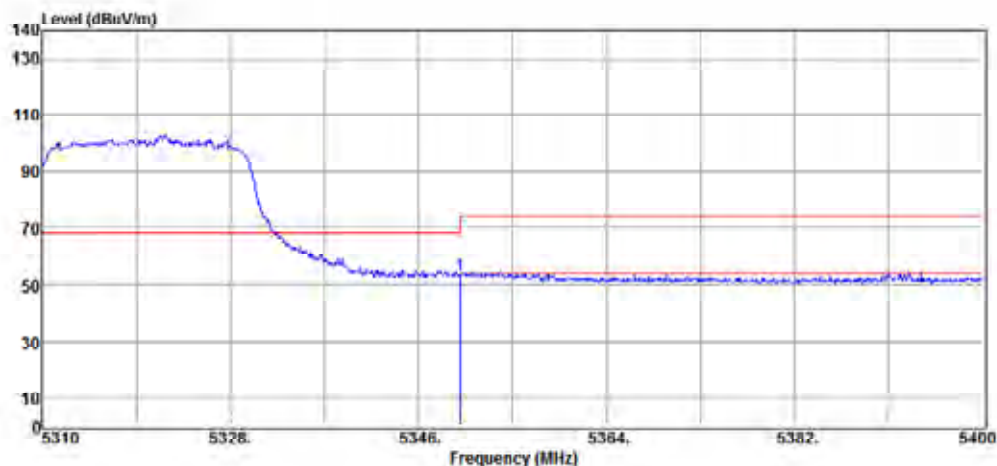


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	45.52	7.27	52.79	68.20	-15.41	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HE20 mode B1&2 High Ch Tested by : Weitin Chen

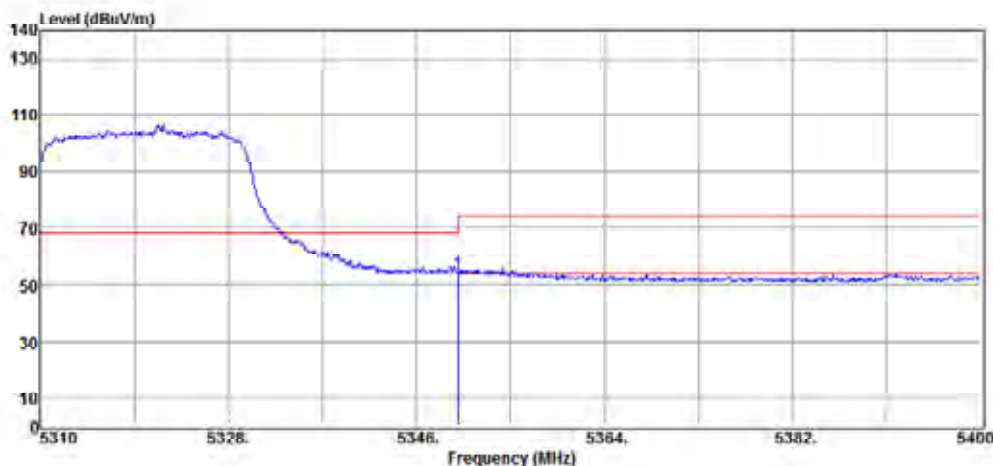


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	46.49	7.27	53.76	68.20	-14.44	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type a mode B3 Low Ch Tested by : Weitin Chen

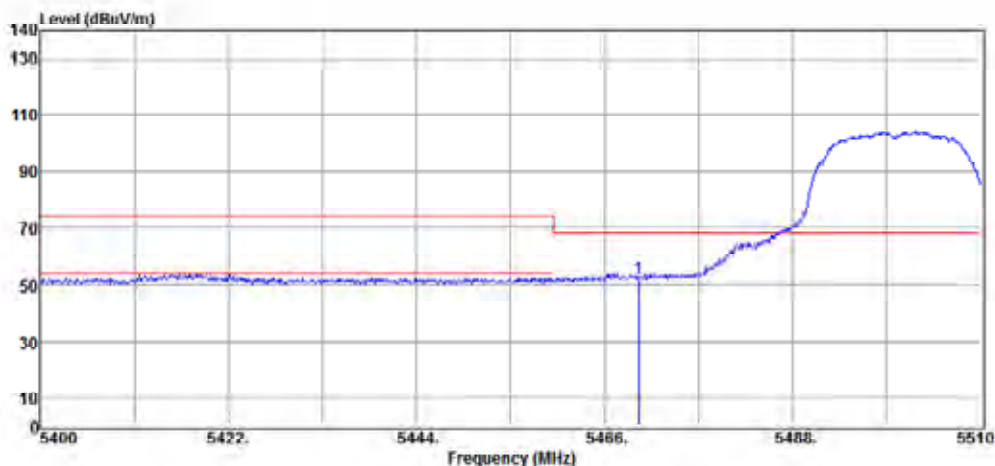


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	44.72	7.32	52.04	68.20	-16.16	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type a mode B3 Low Ch Tested by : Weitin Chen

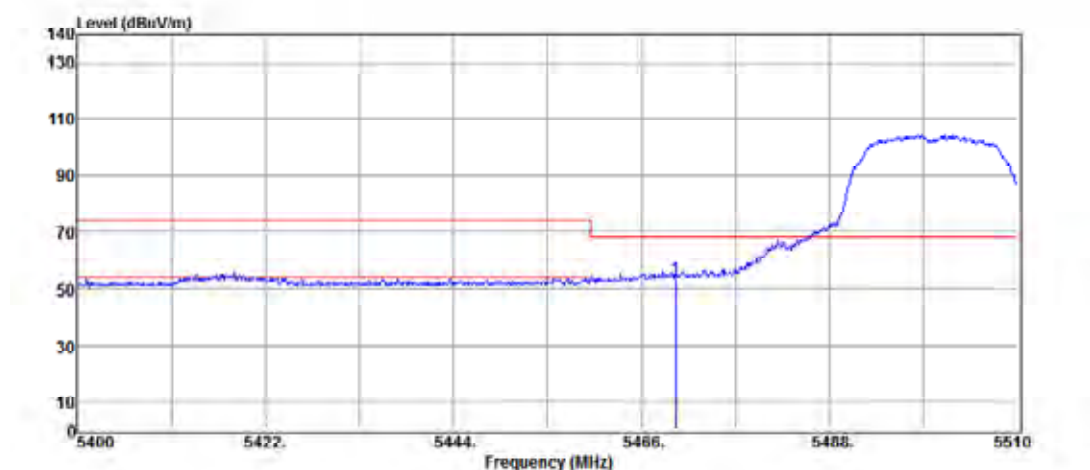


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	46.24	7.32	53.56	68.20	-14.64	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type a mode B3 High Ch Tested by : Weitin Chen

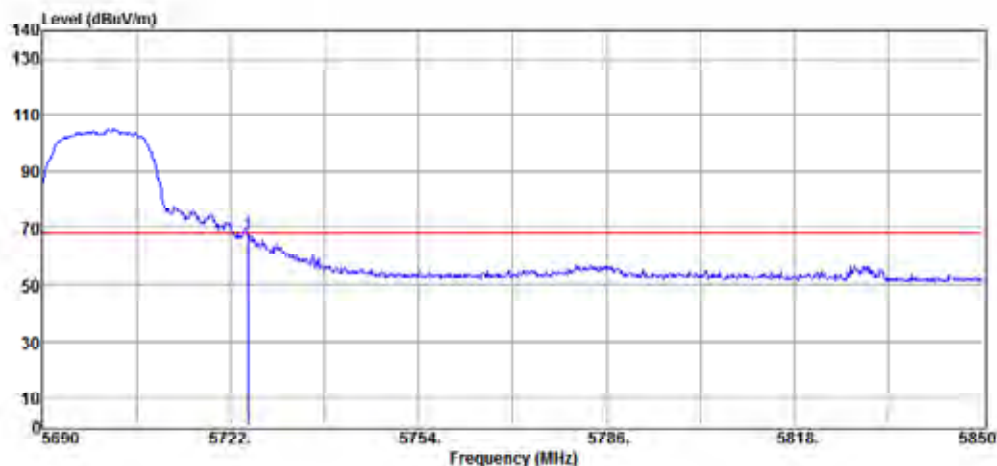


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	59.82	8.15	67.97	68.20	-0.23	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type a mode B3 High Ch Tested by : Weitin Chen

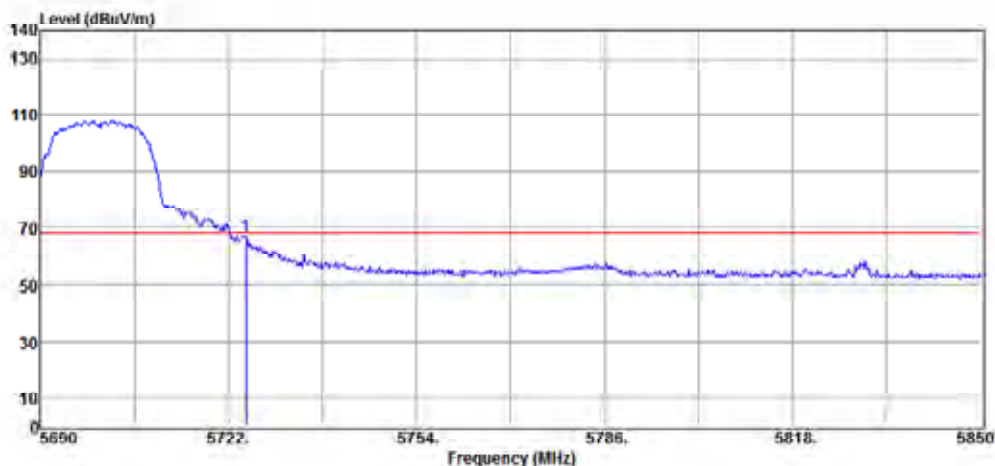


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	58.70	8.15	66.85	68.20	-1.35	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HT20 mode B3 Low Ch Tested by : Weitin Chen

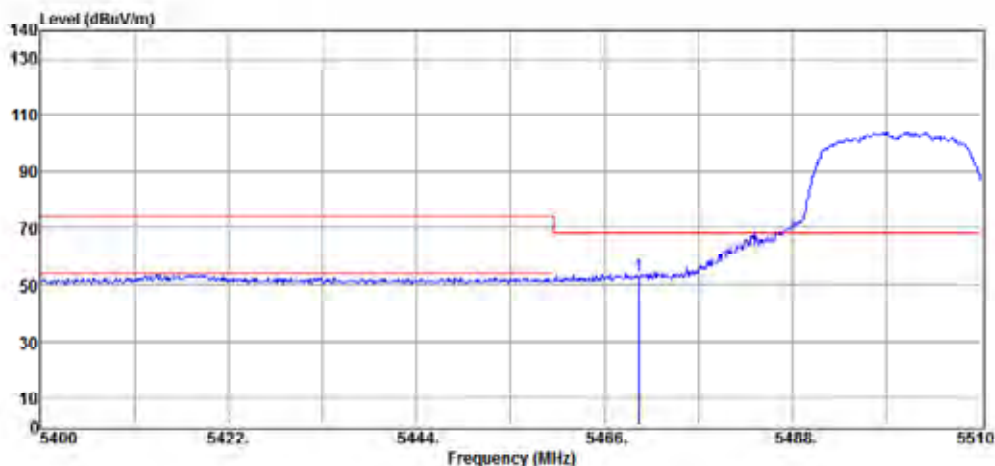


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	45.72	7.32	53.04	68.20	-15.16	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HT20 mode B3 Low Ch Tested by : Weitin Chen

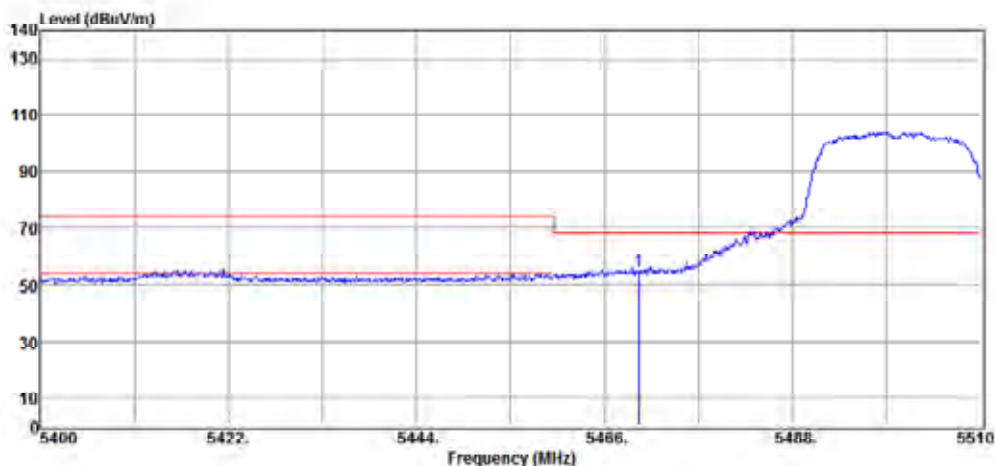


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	47.02	7.32	54.34	68.20	-13.86	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HT20 mode B3 High Ch Tested by : Weitin Chen

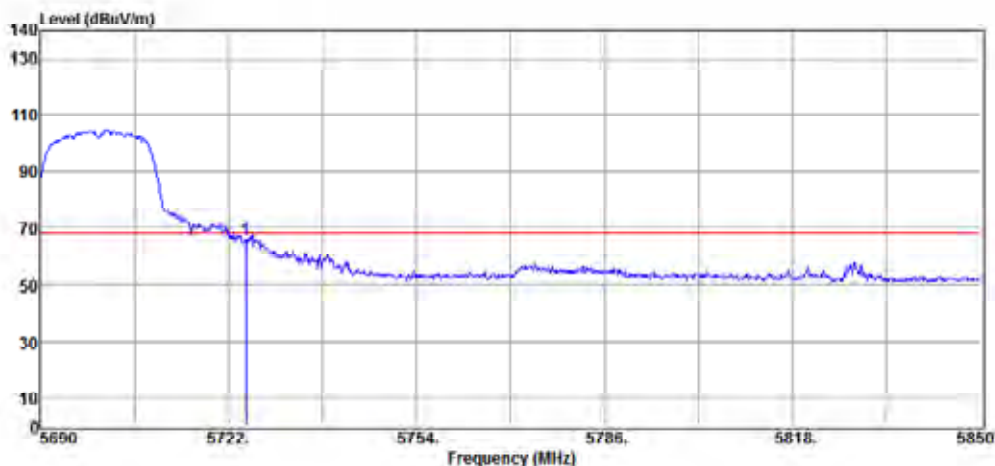


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	57.89	8.15	66.04	68.20	-2.16	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HT20 mode B3 High Ch Tested by : Weitin Chen

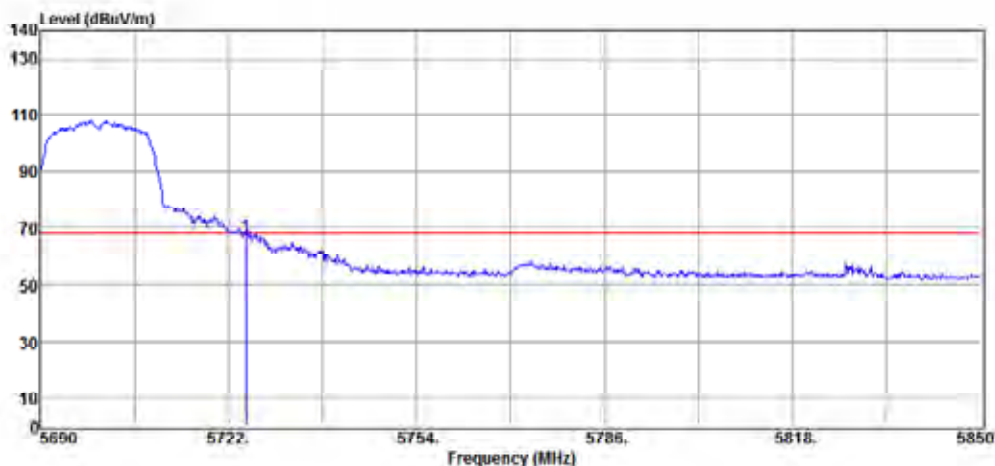


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	58.52	8.15	66.67	68.20	-1.53	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type VHT20 mode B3 Low Ch Tested by : Weitin Chen

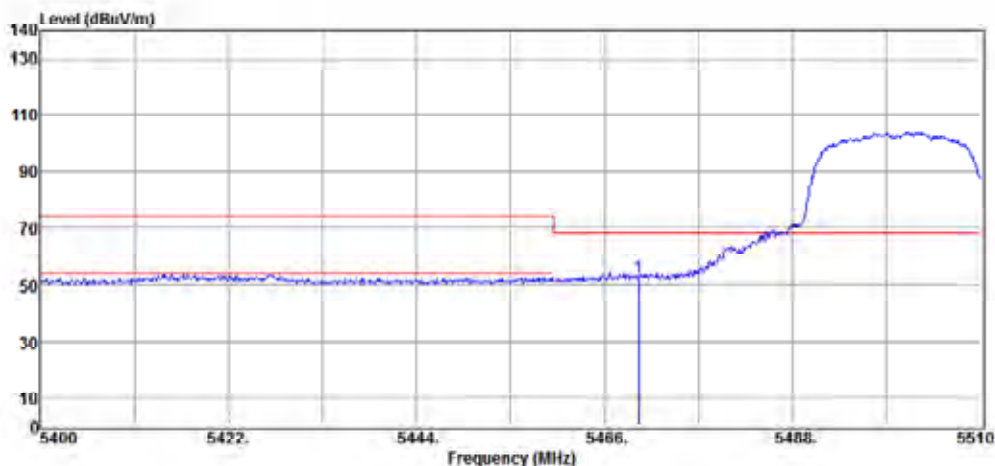


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	45.17	7.32	52.49	68.20	-15.71	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type VHT20 mode B3 Low Ch Tested by : Weitin Chen

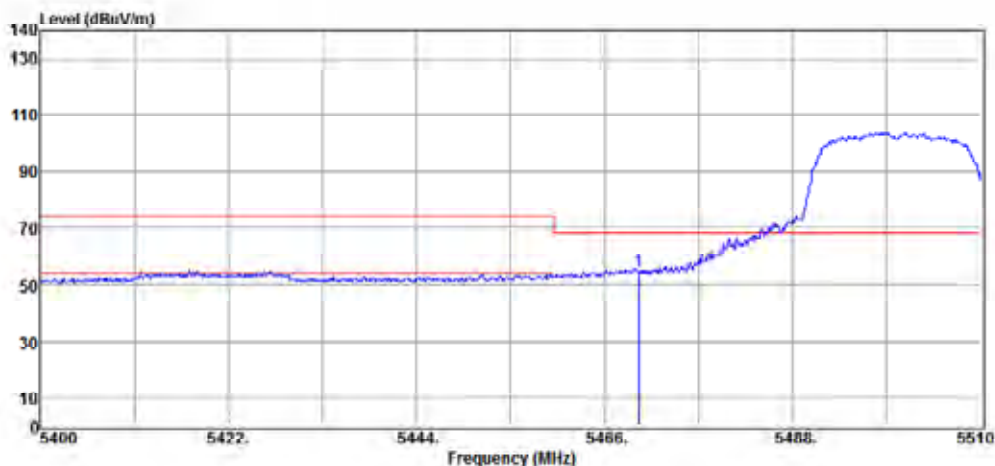


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	46.90	7.32	54.22	68.20	-13.98	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type VHT20 mode B3 High Ch Tested by : Weitin Chen

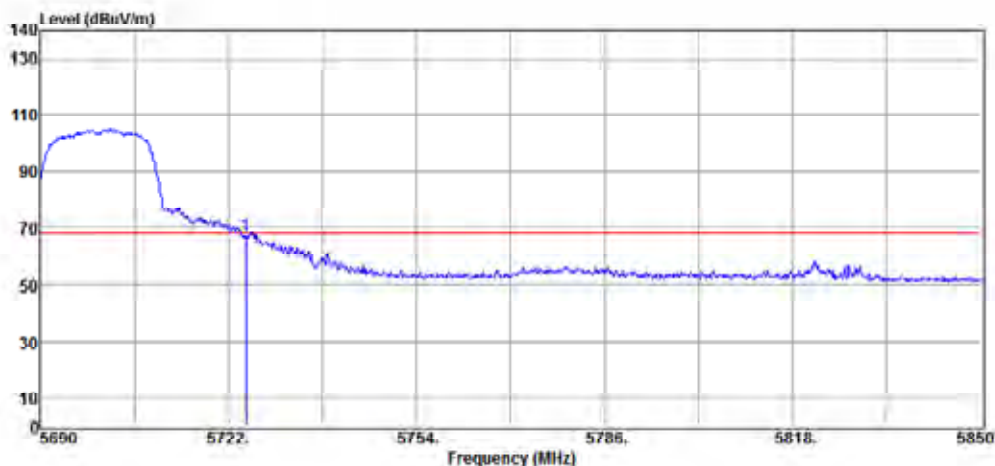


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	59.12	8.15	67.27	68.20	-0.93	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type VHT20 mode B3 High Ch Tested by : Weitin Chen

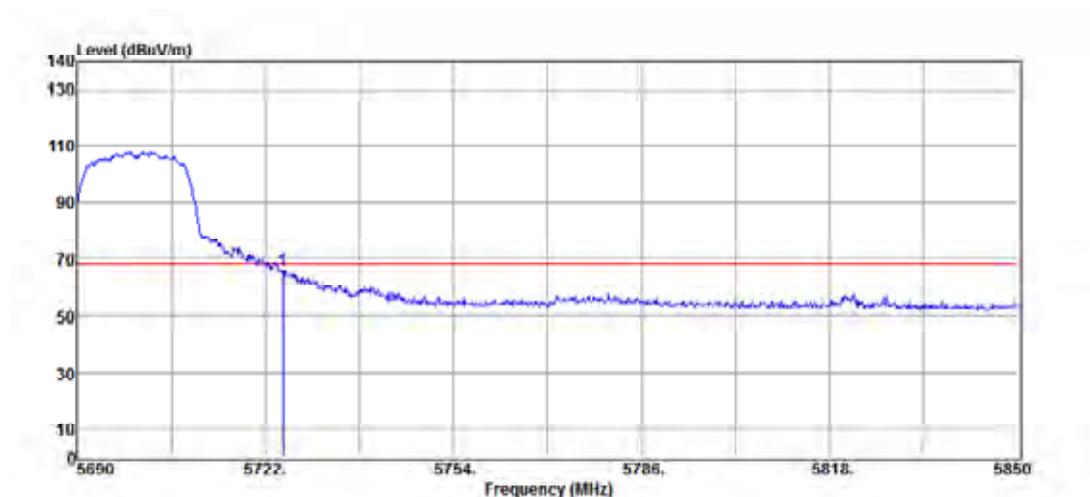


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	57.78	8.15	65.93	68.20	-2.27	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HE20 mode B3 Low Ch Tested by : Weitin Chen

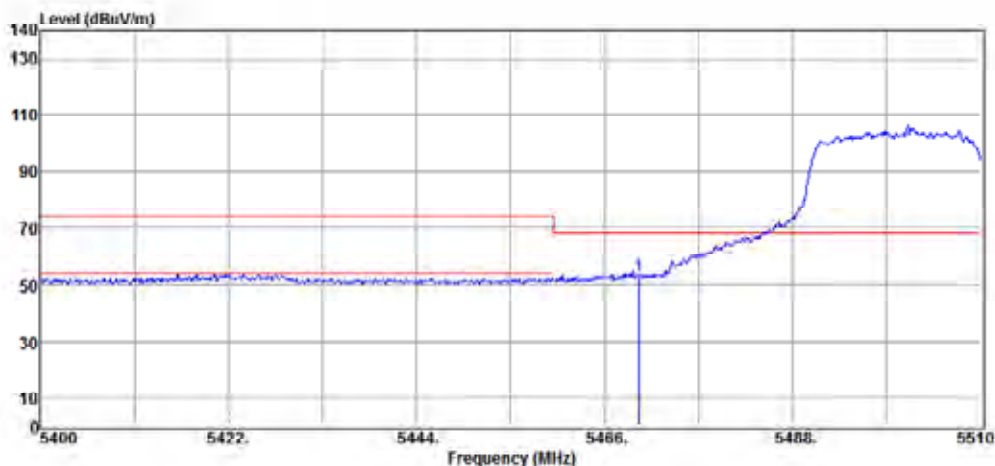


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	45.73	7.32	53.05	68.20	-15.15	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HE20 mode B3 Low Ch Tested by : Weitin Chen

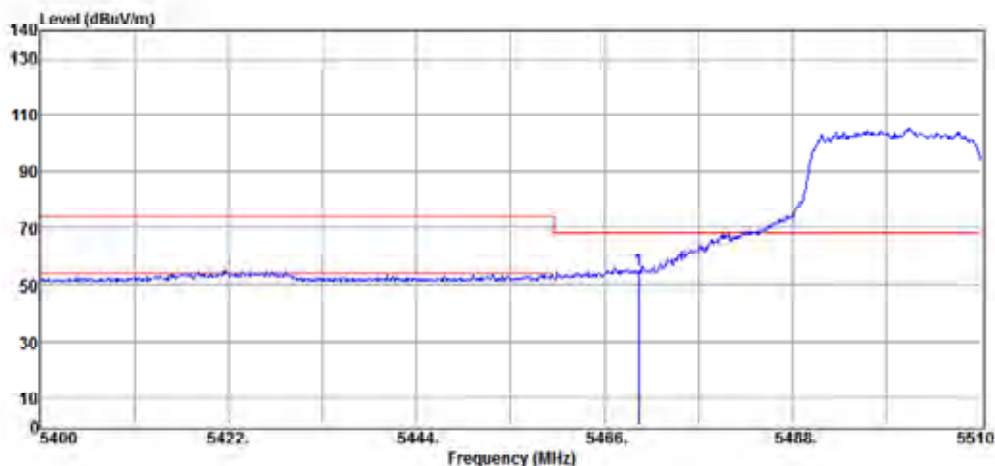


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	47.36	7.32	54.68	68.20	-13.52	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No.120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HE20 mode B3 High Ch Tested by : Weitin Chen

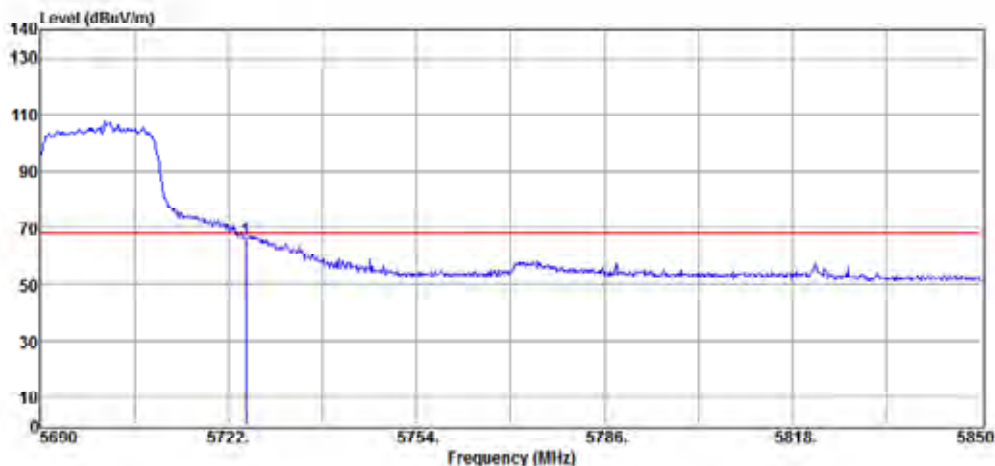


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	57.99	8.15	66.14	68.20	-2.06	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C Type HE20 mode B3 High Ch Tested by : Weitin Chen

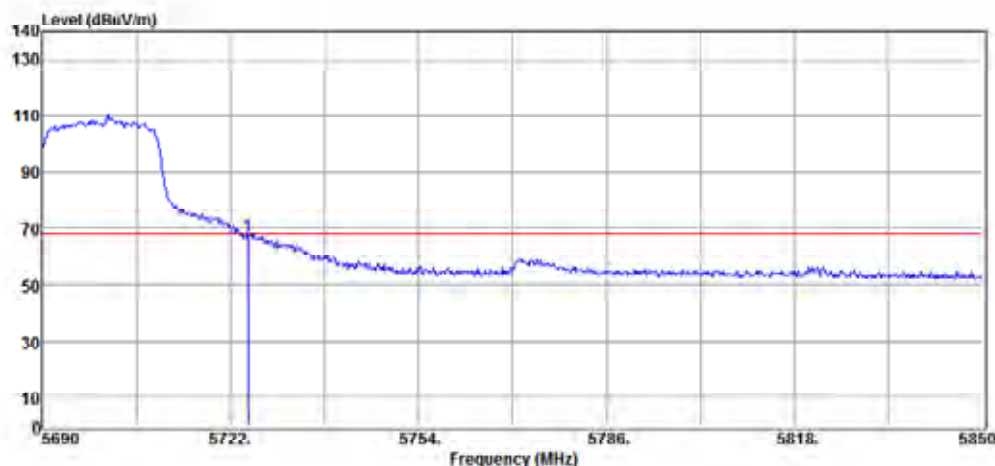


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	59.27	8.15	67.42	68.20	-0.78	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C type a mode Ch 144 Tested by : Weitin Chen

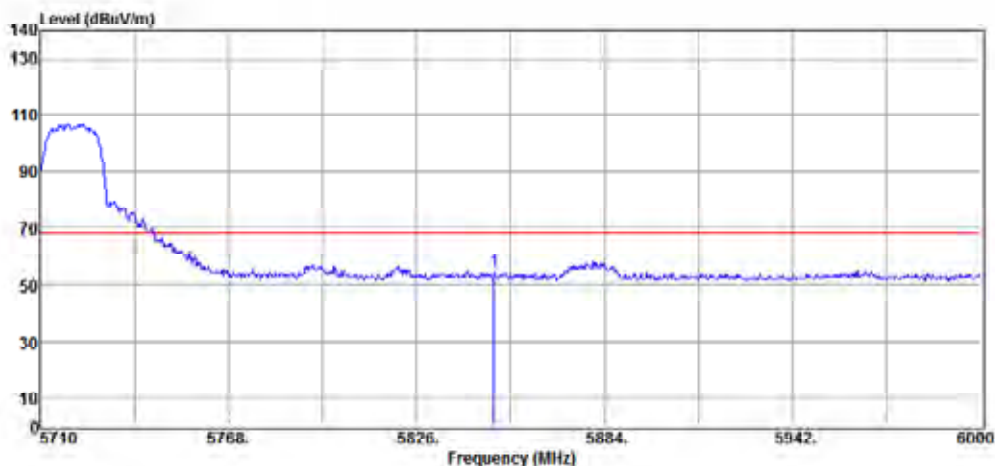


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	46.11	8.02	54.13	68.20	-14.07	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C type a mode Ch 144 Tested by : Weitin Chen

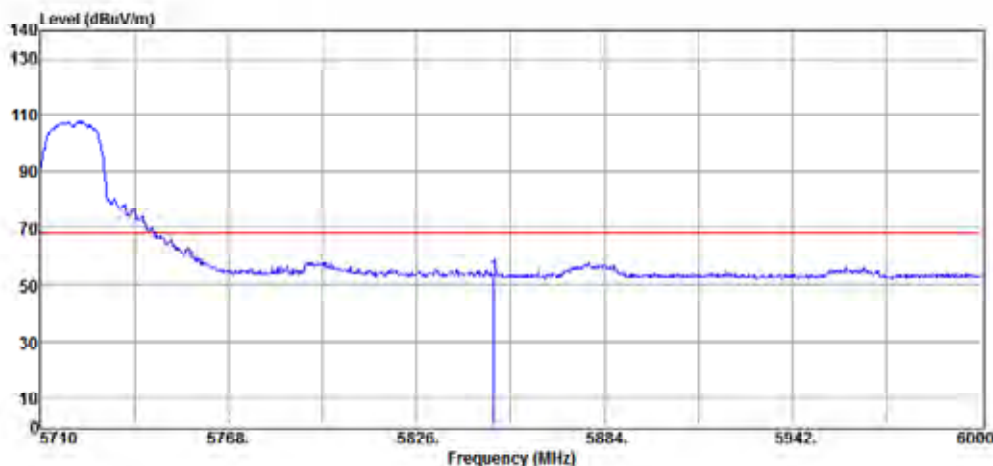


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	45.02	8.02	53.04	68.20	-15.16	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C type HT20 mode Ch 144 Tested by : Weitin Chen

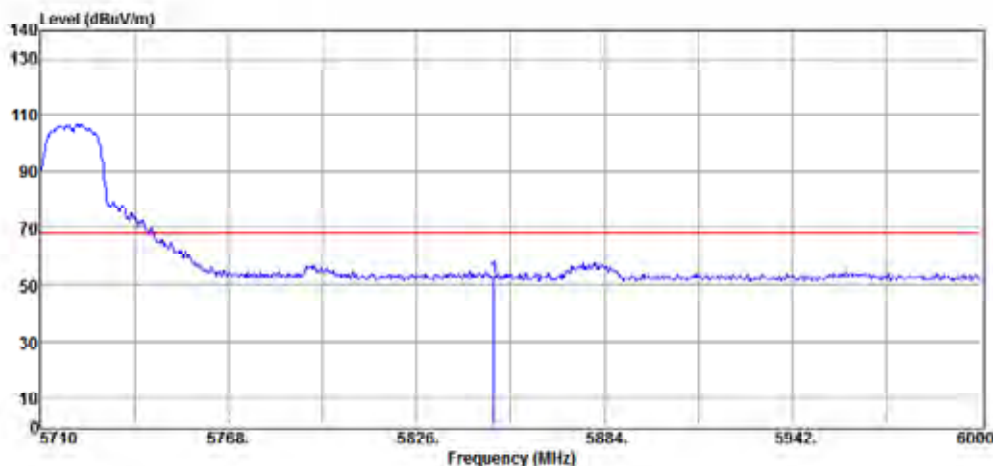


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	44.31	8.02	52.33	68.20	-15.87	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C type HT20 mode Ch 144 Tested by : Weitin Chen

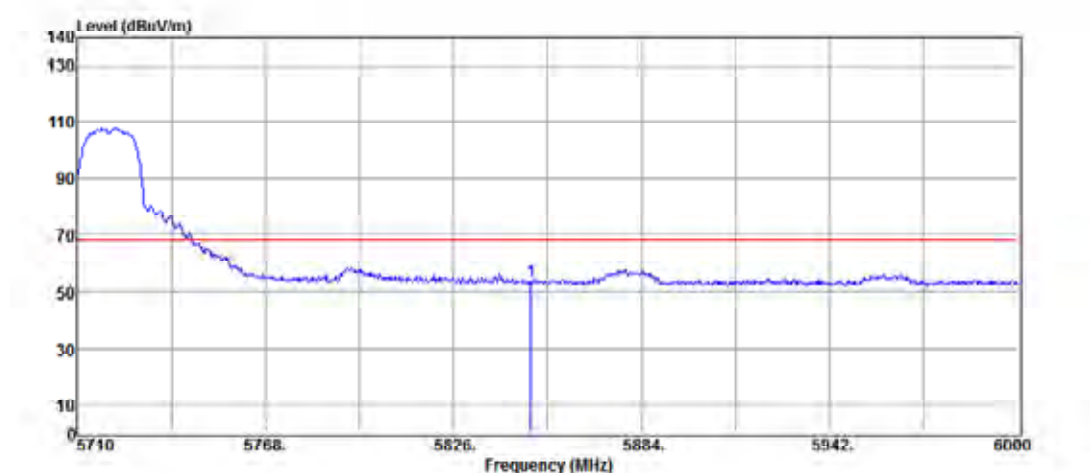


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	45.47	8.02	53.49	68.20	-14.71	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C type VHT20 mode Ch 144 Tested by : Weitin Chen

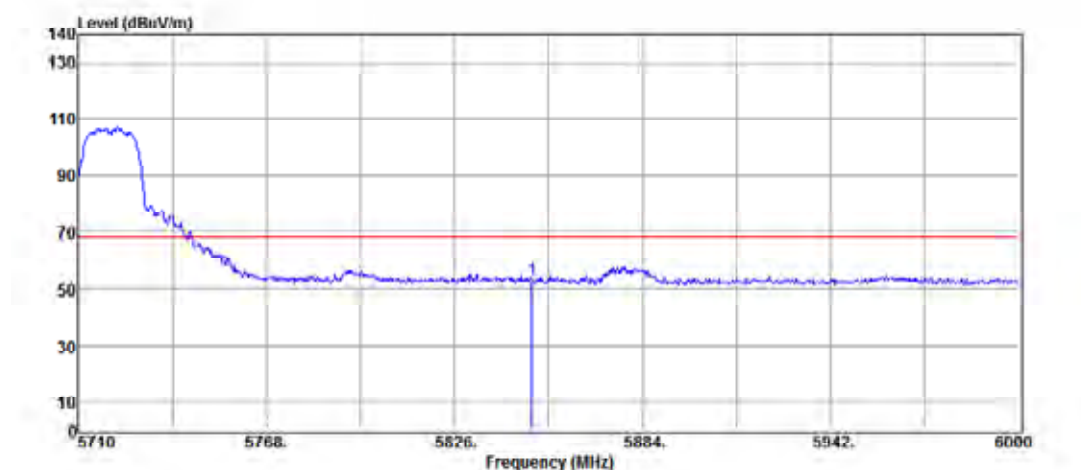


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	44.97	8.02	52.99	68.20	-15.21	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C type VHT20 mode Ch 144 Tested by : Weitin Chen

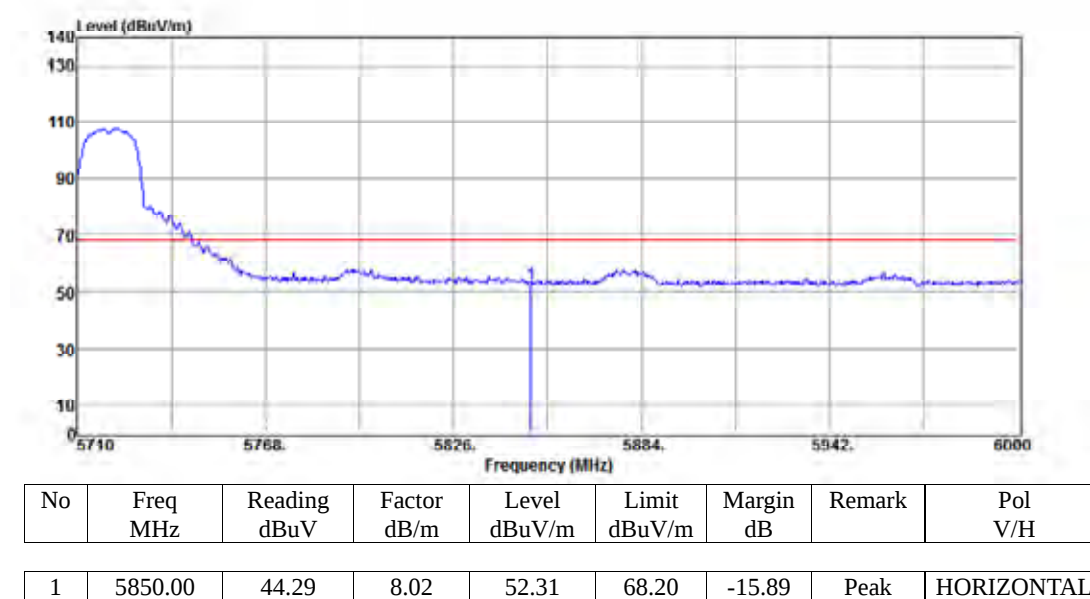

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C type HE20 mode Ch 144 Tested by : Weitin Chen

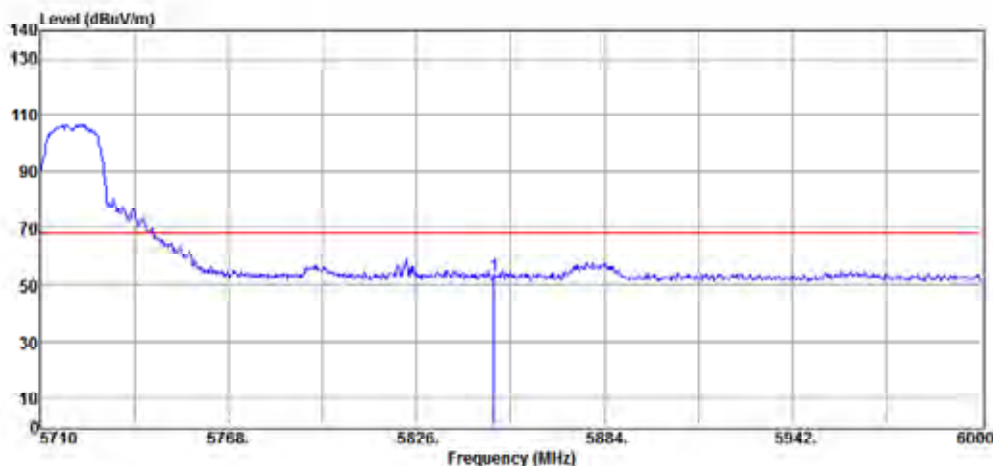


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	44.90	8.02	52.92	68.20	-15.28	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : C type HE20 mode Ch 144 Tested by : Weitin Chen

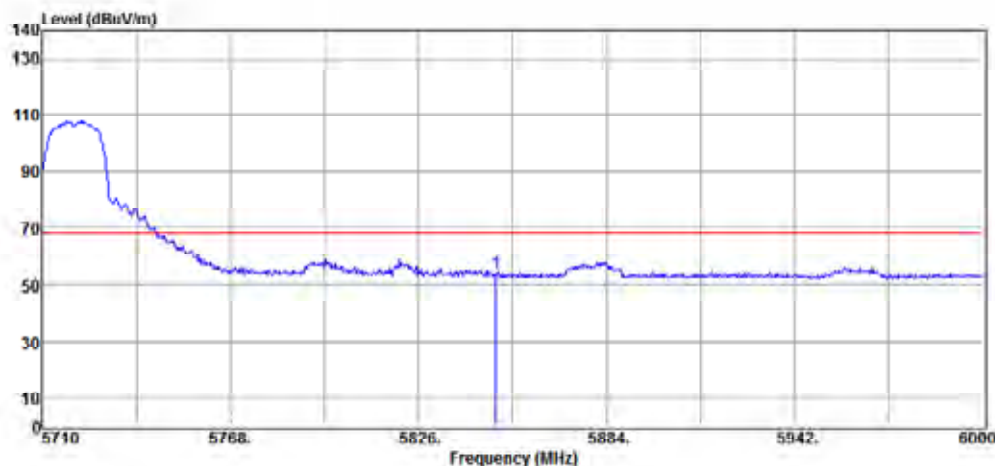


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	45.69	8.02	53.71	68.20	-14.49	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type a mode B1&2 Low Ch Tested by : Weitin Chen

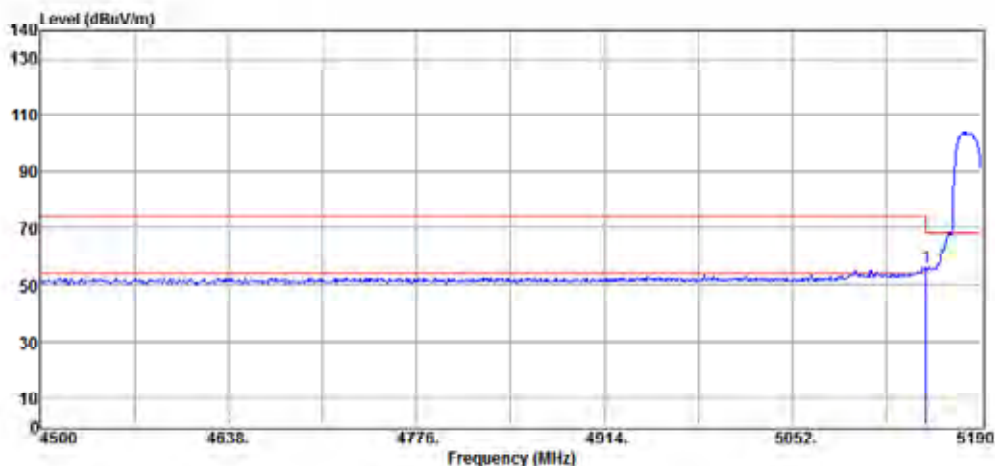


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	48.86	6.77	55.63	68.20	-12.57	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type a mode B1&2 Low Ch Tested by : Weitin Chen

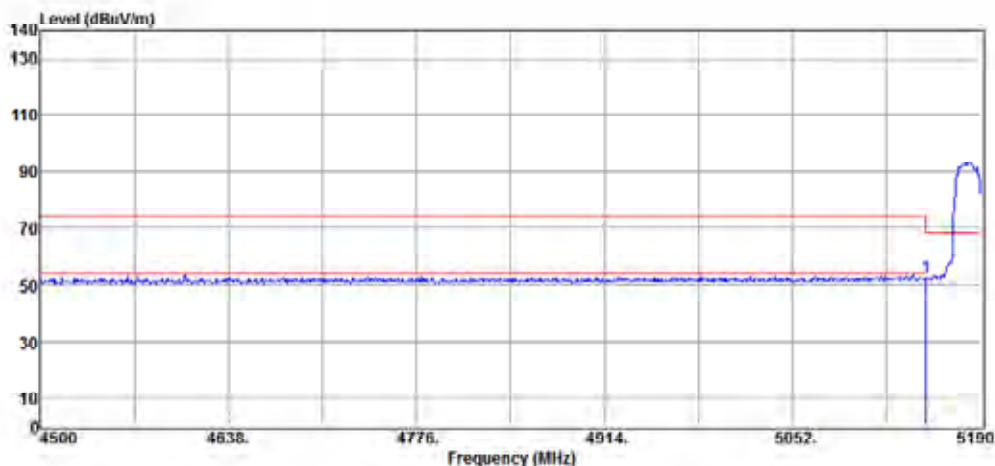


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	45.79	6.77	52.56	68.20	-15.64	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type a mode B1&2 High Ch Tested by : Weitin Chen

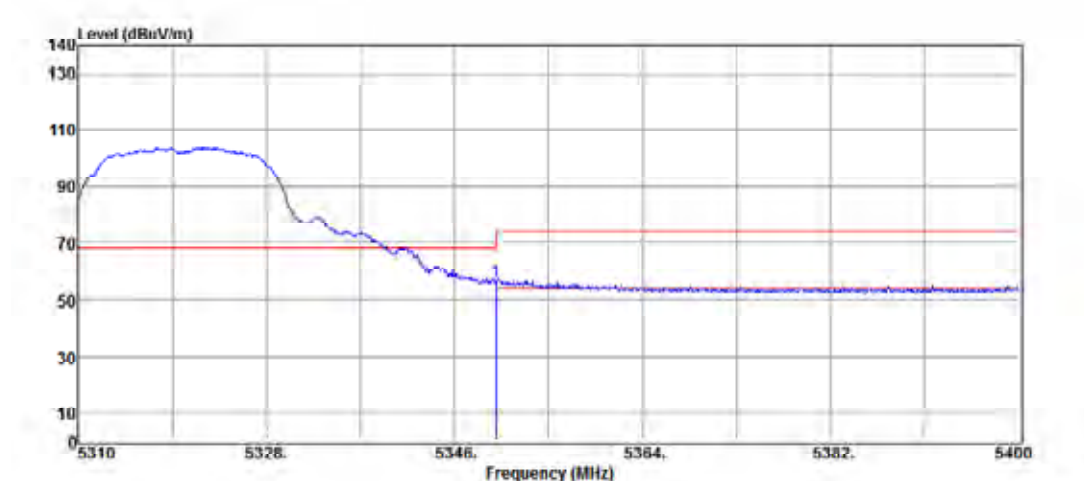


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	48.81	7.27	56.08	68.20	-12.12	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type a mode BB1&2 High Ch Tested by : Weitin Chen

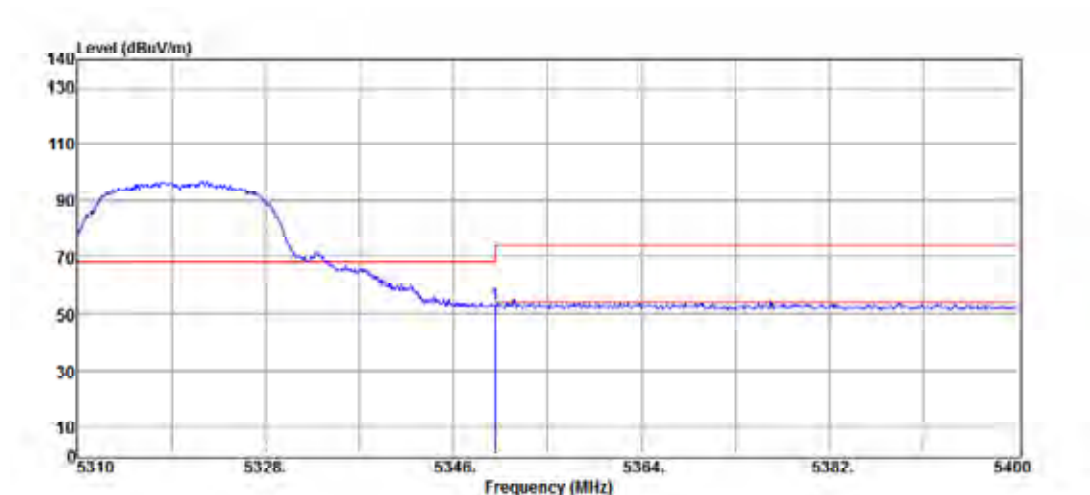


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	45.54	7.27	52.81	68.20	-15.39	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HT20 mode B1&2 Low Ch Tested by :
Weitn Chen

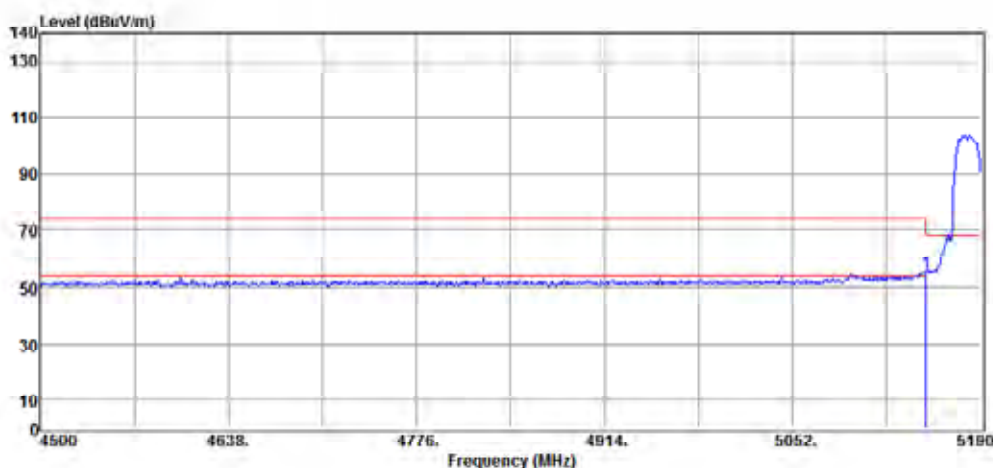


No	Freq MHz	Reading dBUV	Factor dB/m	Level dBUV/m	Limit dBUV/m	Margin dB	Remark	Pol V/H
1	5150.00	48.00	6.77	54.77	68.20	-13.43	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HT20 mode B1&2 Low Ch Tested by :
Weitn Chen

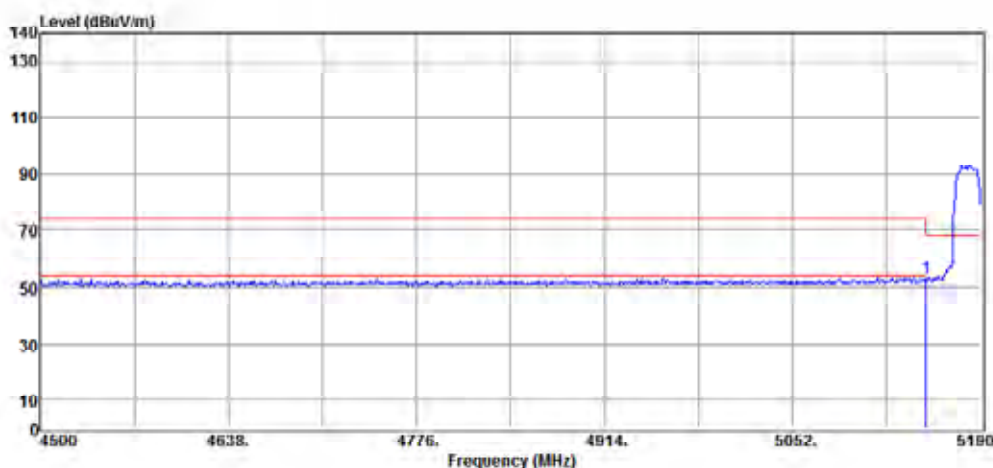


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	45.94	6.77	52.71	68.20	-15.49	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HT20 mode B1&2 High Ch Tested by :
Weitn Chen

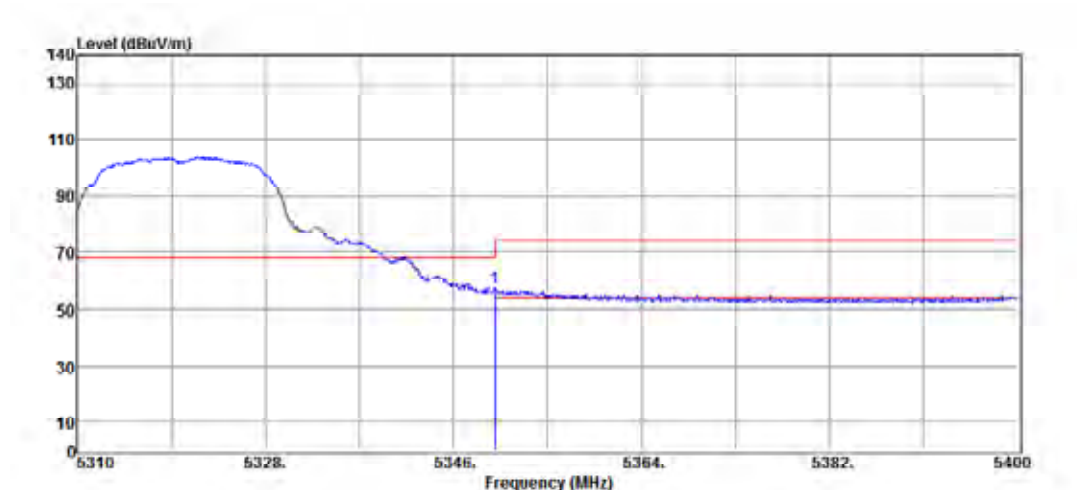


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	50.04	7.27	57.31	68.20	-10.89	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HT20 mode B1&2 High Ch Tested by :
Weitn Chen

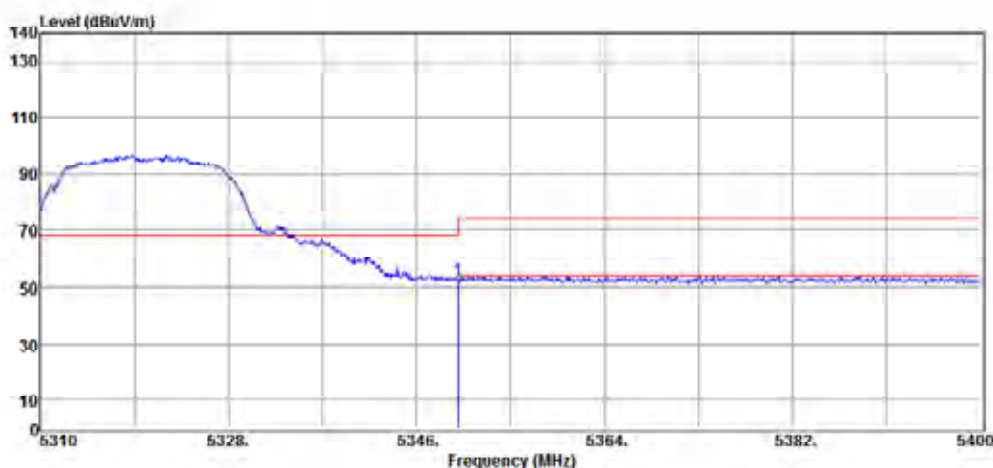


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	44.94	7.27	52.21	68.20	-15.99	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type VHT20 mode B1&2 Low Ch Tested by : Weitin Chen

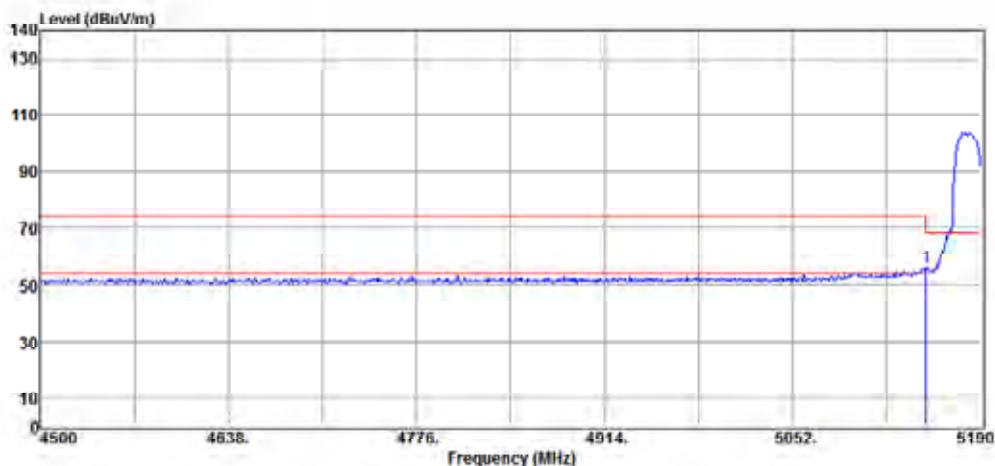


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	49.11	6.77	55.88	68.20	-12.32	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No.120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type VHT20 mode B1&2 Low Ch Tested by : Weitin Chen

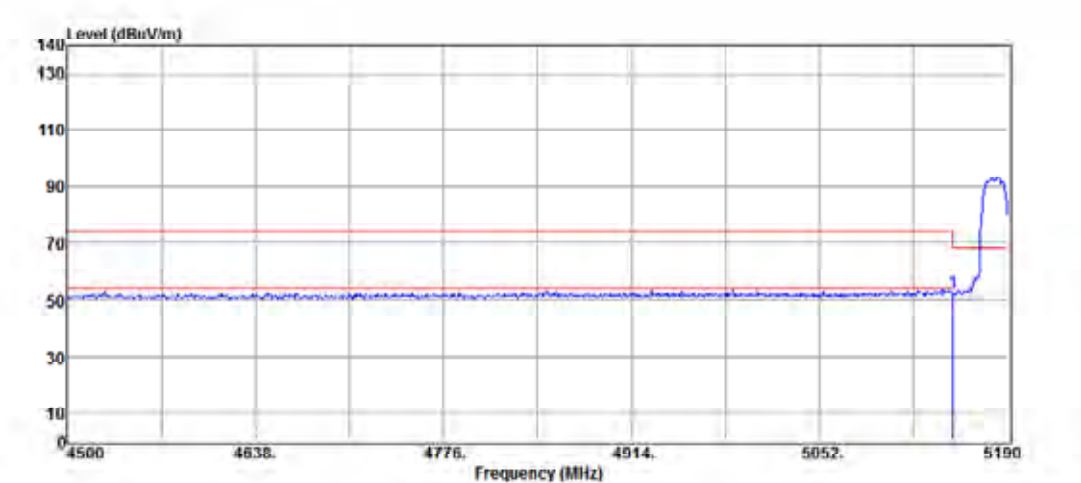


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	45.58	6.77	52.35	68.20	-15.85	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type VHT20 mode B1&2 High Ch Tested by : Weitin Chen

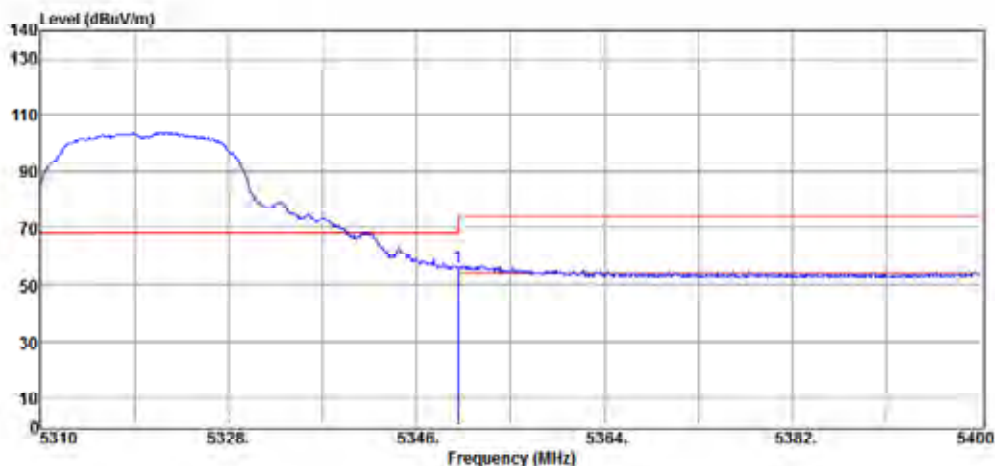


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	48.47	7.27	55.74	68.20	-12.46	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type VHT20 mode B1&2 High Ch Tested by : Weitin Chen

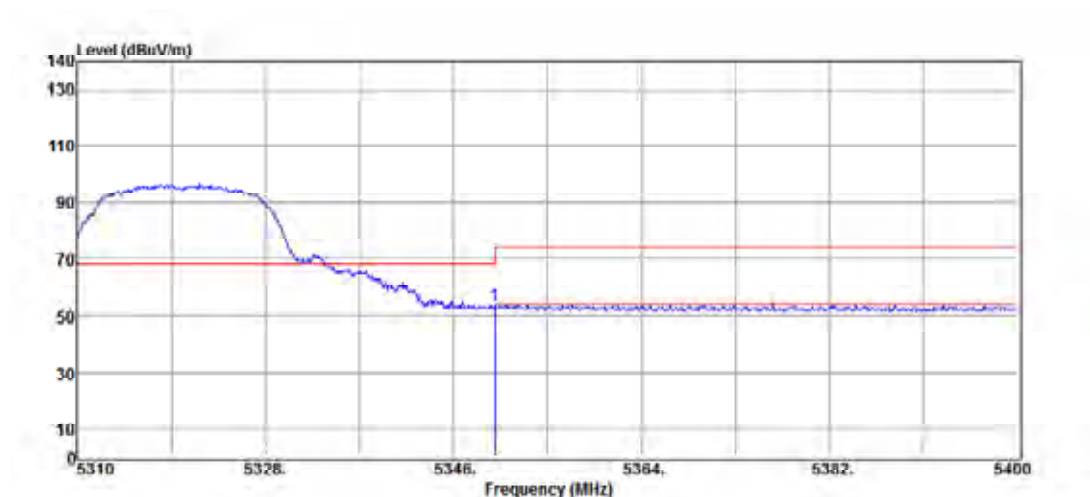


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	45.89	7.27	53.16	68.20	-15.04	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HE20 mode B1&2 Low Ch Tested by : Weitin Chen

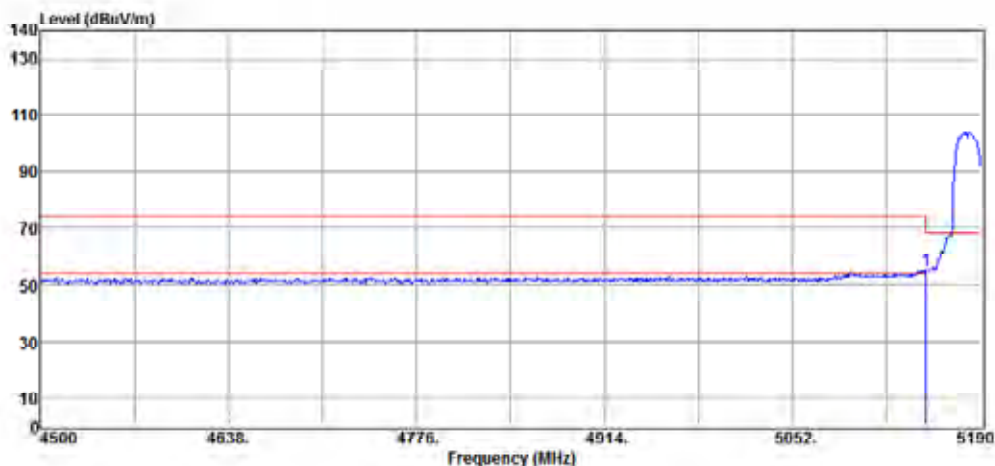


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	47.90	6.77	54.67	68.20	-13.53	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan

Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HE20 mode B1&2 Low Ch Tested by : Weitin Chen

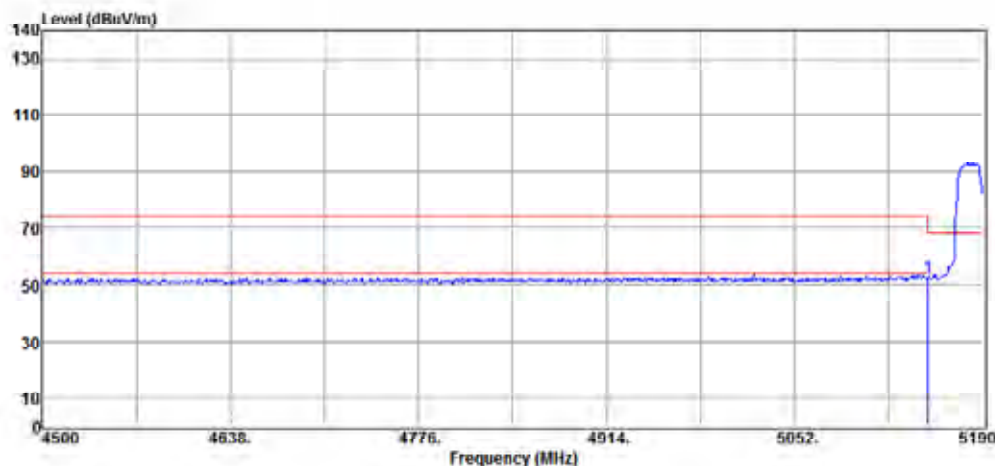


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5150.00	45.78	6.77	52.55	68.20	-15.65	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HE20 mode B1&2 High Ch Tested by : Weitin Chen

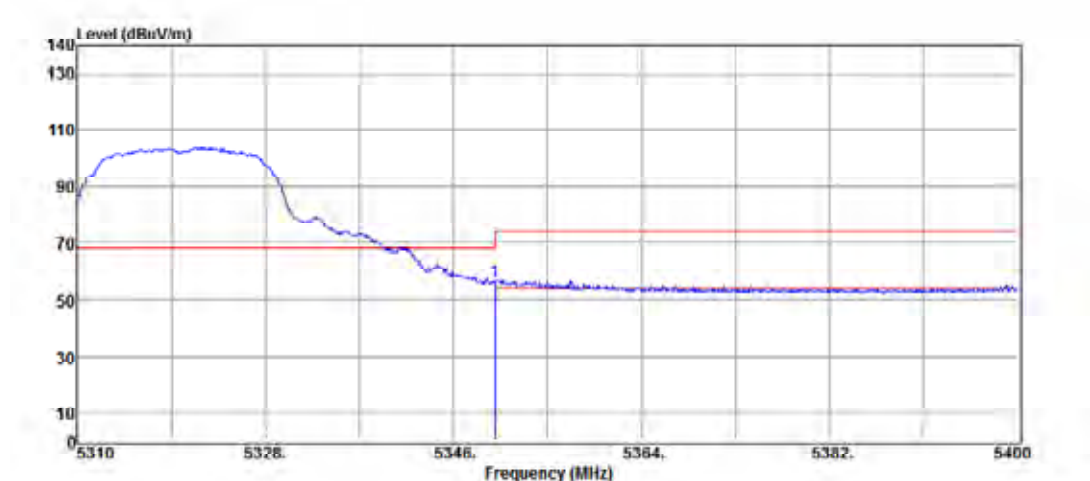


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	49.02	7.27	56.29	68.20	-11.91	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HE20 mode B1&2 High Ch Tested by : Weitin Chen

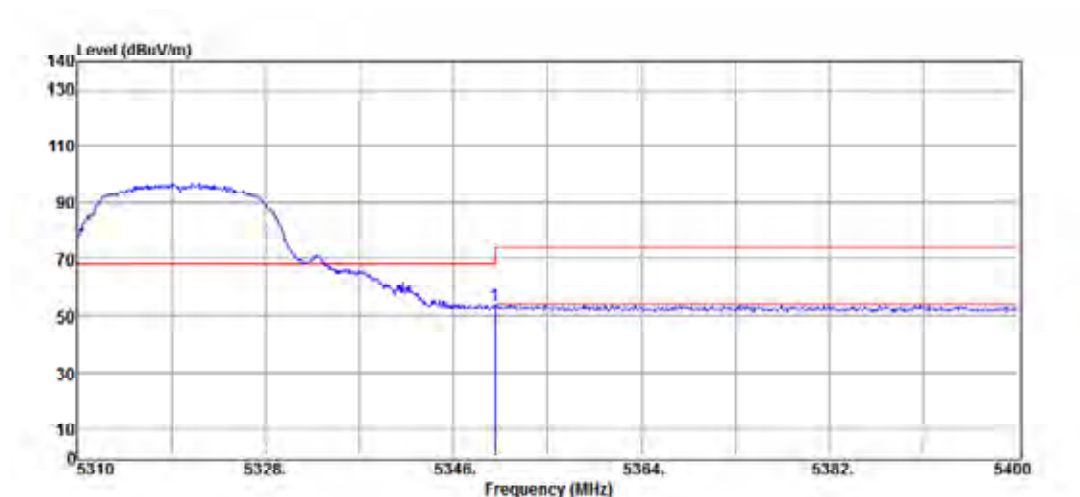


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5350.00	46.10	7.27	53.37	68.20	-14.83	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type a mode B3 Low Ch Tested by : Weitin Chen

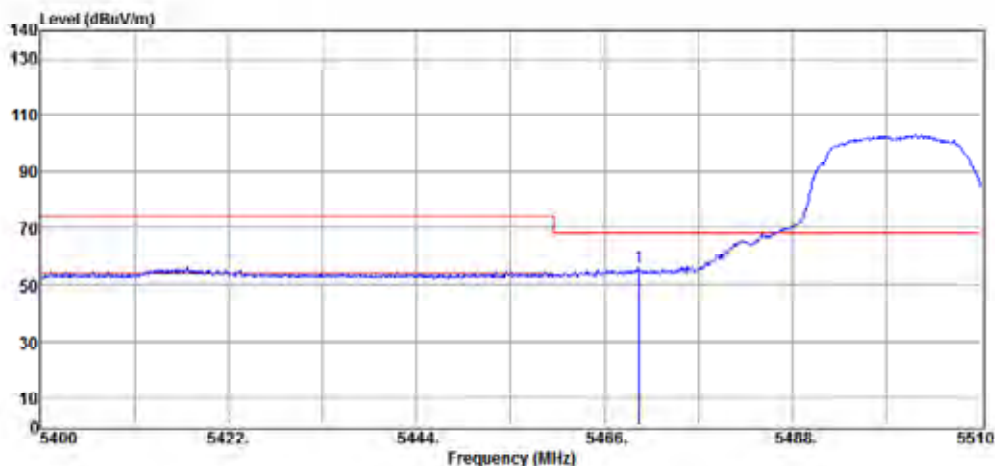


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	48.53	7.32	55.85	68.20	-12.35	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type a mode B3 Low Ch Tested by : Weitin Chen

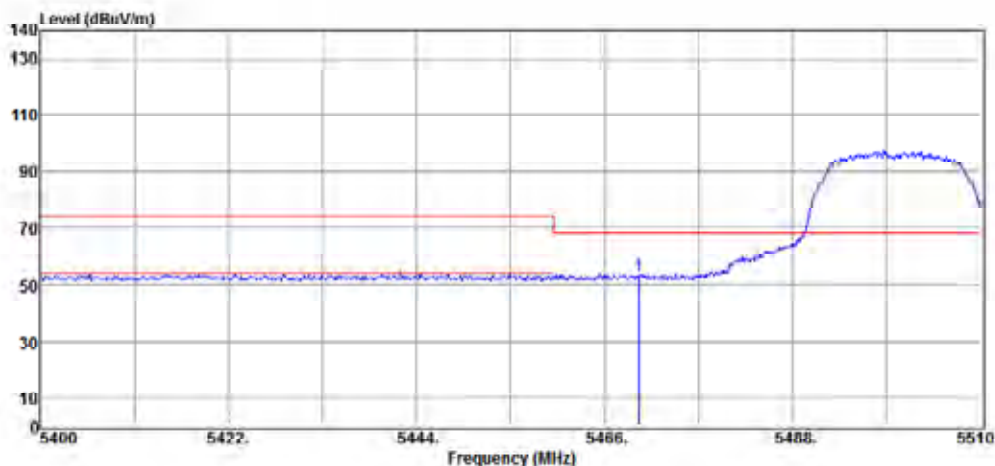


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	45.40	7.32	52.72	68.20	-15.48	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type a mode B3 High Ch Tested by : Weitin Chen

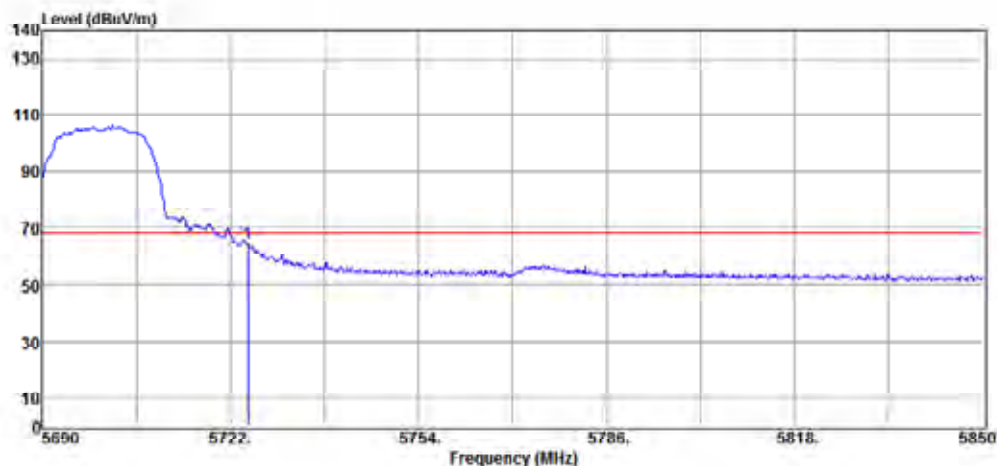


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	56.53	8.15	64.68	68.20	-3.52	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type a mode B3 High Ch Tested by : Weitin Chen

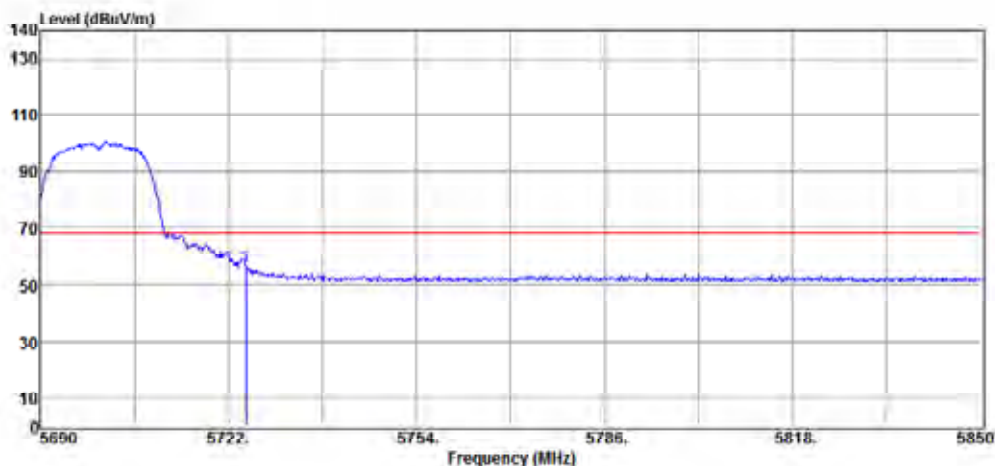


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	48.26	8.15	56.41	68.20	-11.79	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HT20 mode B3 Low Ch Tested by : Weitin Chen

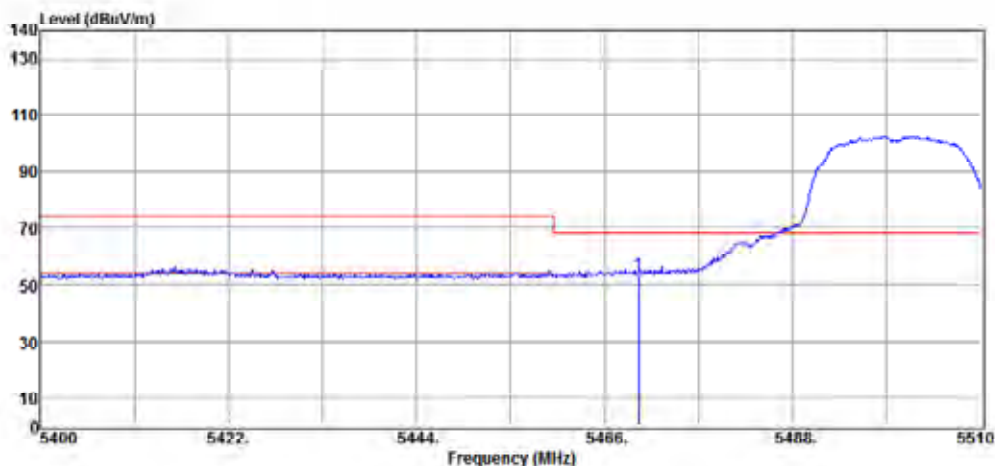


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	46.31	7.32	53.63	68.20	-14.57	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HT20 mode B3 Low Ch Tested by : Weitin Chen

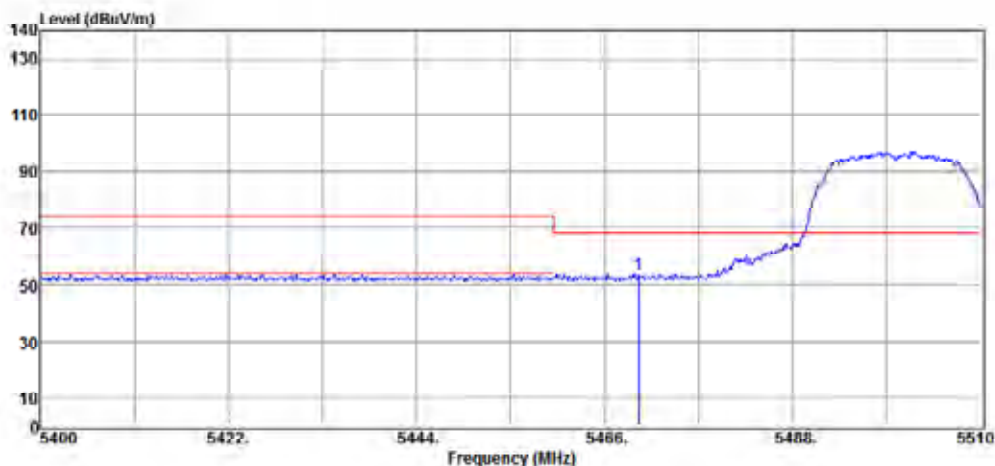


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	46.15	7.32	53.47	68.20	-14.73	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HT20 mode B3 High Ch Tested by : Weitin Chen

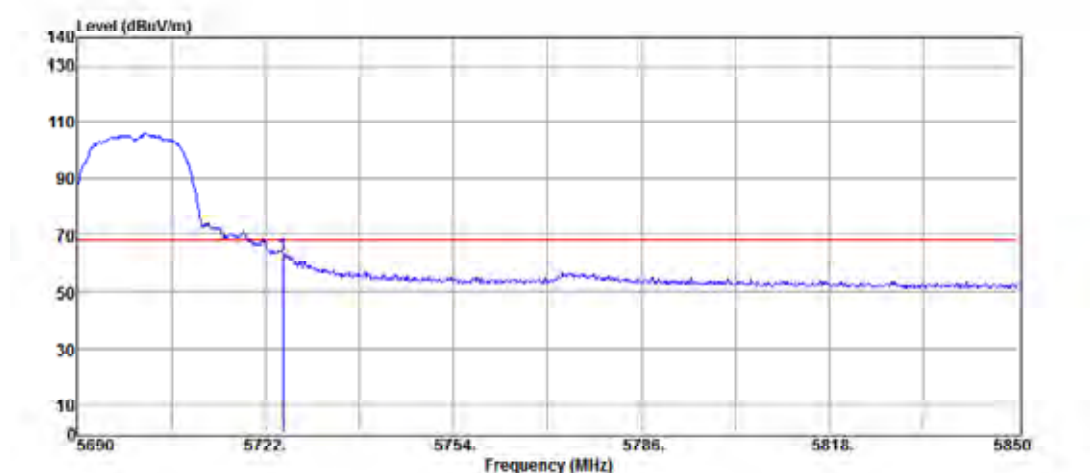


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	54.85	8.15	63.00	68.20	-5.20	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HT20 mode B3 High Ch Tested by : Weitin Chen

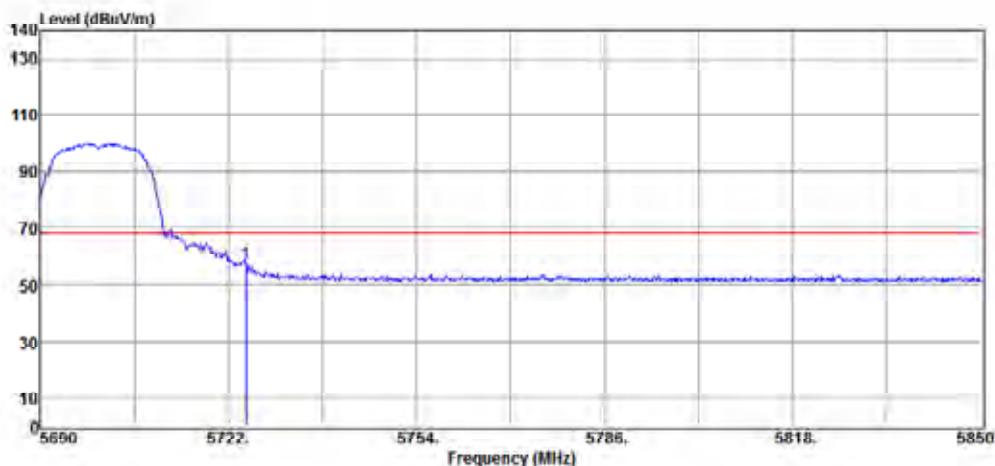


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	49.31	8.15	57.46	68.20	-10.74	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type VHT20 mode B3 Low Ch Tested by : Weitin Chen

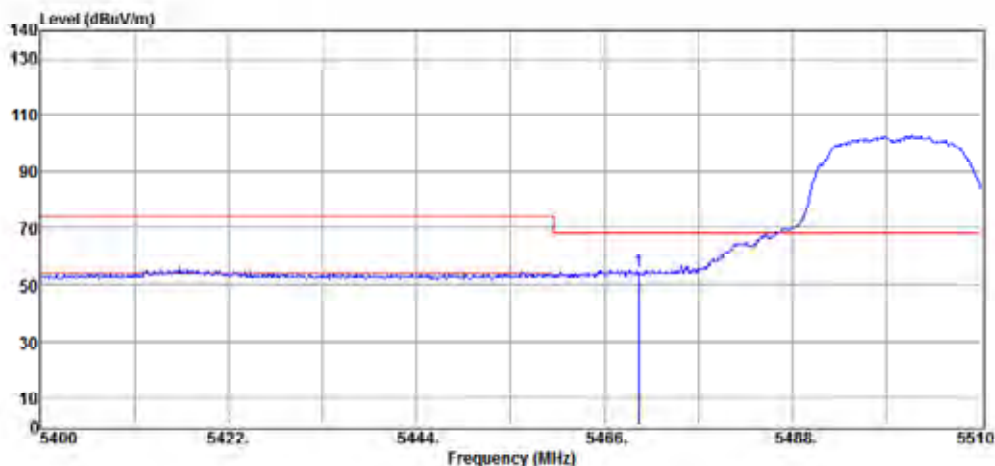


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	46.96	7.32	54.28	68.20	-13.92	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type VHT20 mode B3 Low Ch Tested by : Weitin Chen

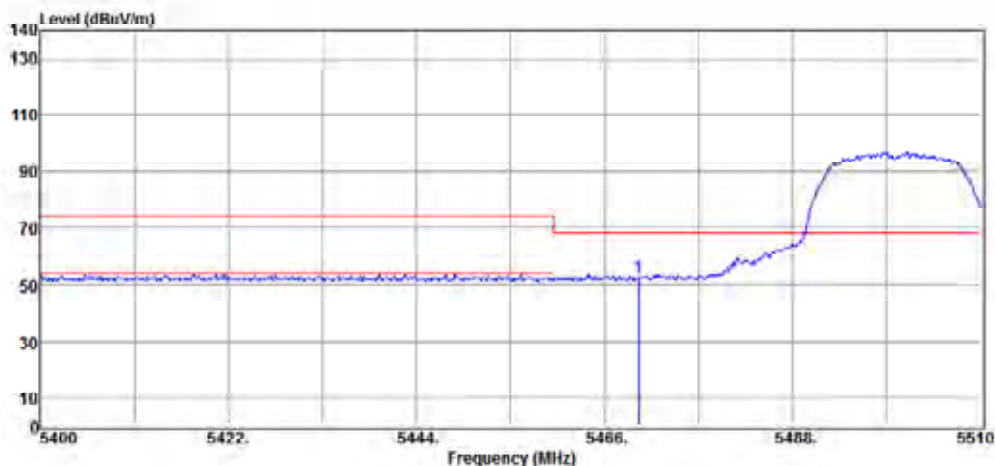


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	45.12	7.32	52.44	68.20	-15.76	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type VHT20 mode B3 High Ch Tested by : Weitin Chen

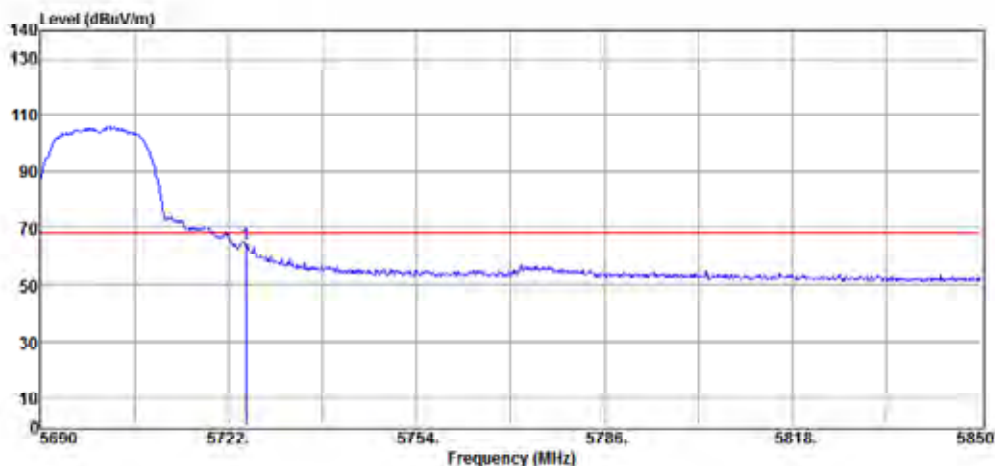


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	55.65	8.15	63.80	68.20	-4.40	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type VHT20 mode B3 High Ch Tested by : Weitin Chen

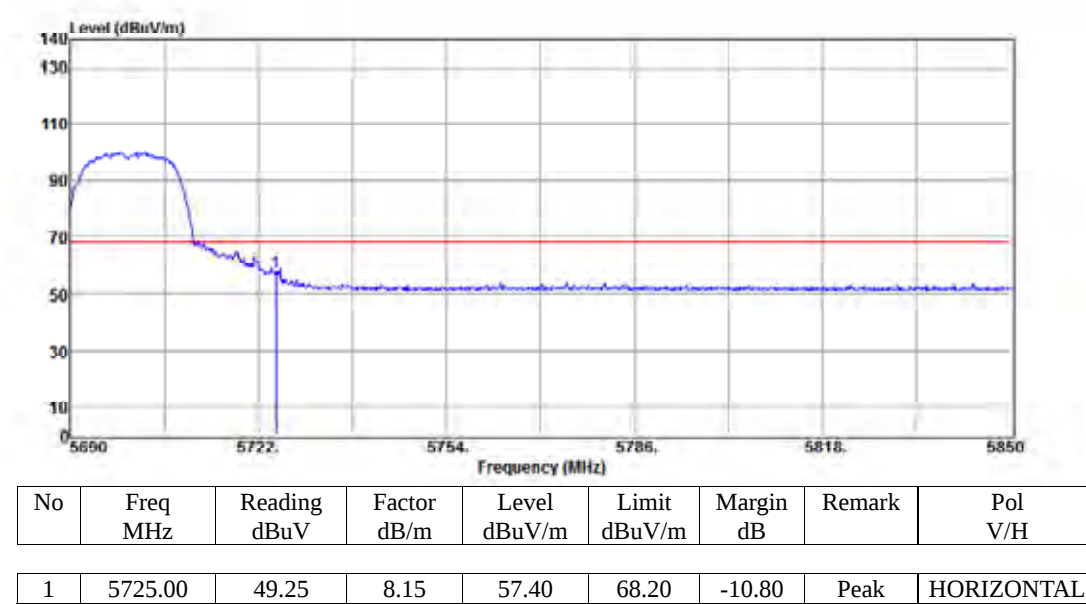

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HE20 mode B3 Low Ch Tested by : Weitin Chen

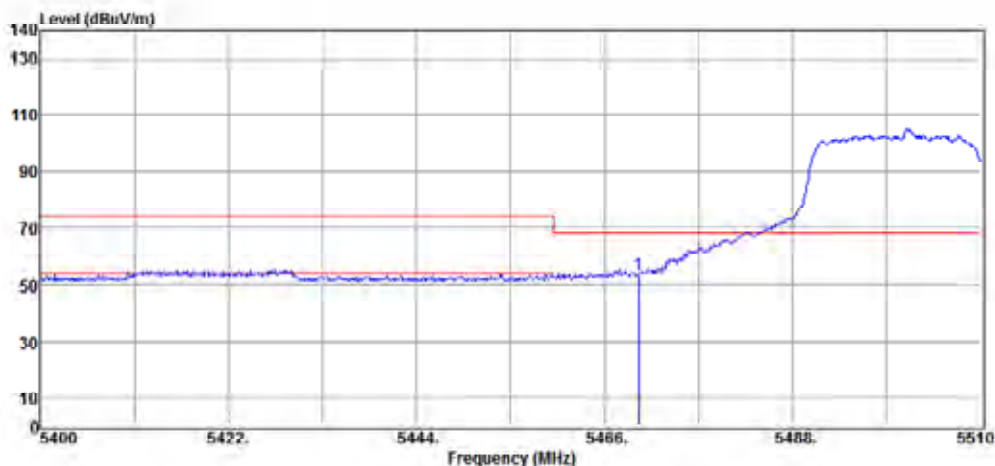


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	46.21	7.32	53.53	68.20	-14.67	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HE20 mode B3 Low Ch Tested by : Weitin Chen

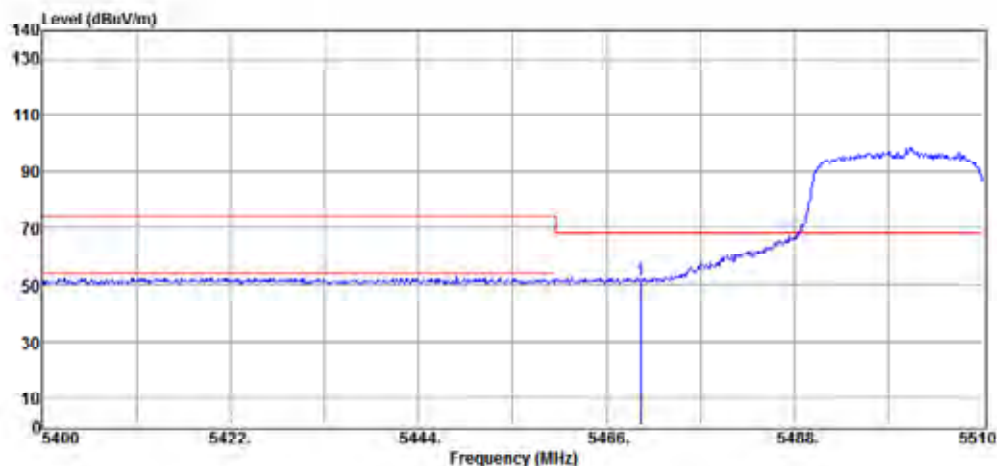


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5470.00	44.13	7.32	51.45	68.20	-16.75	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HE20 mode B3 High Ch Tested by : Weitin Chen

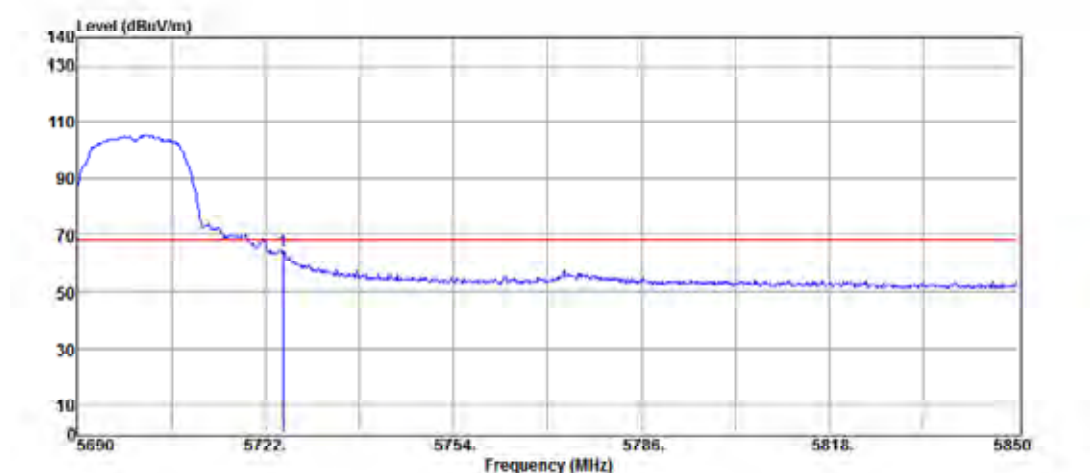


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	55.61	8.15	63.76	68.20	-4.44	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HE20 mode B3 High Ch Tested by : Weitin Chen

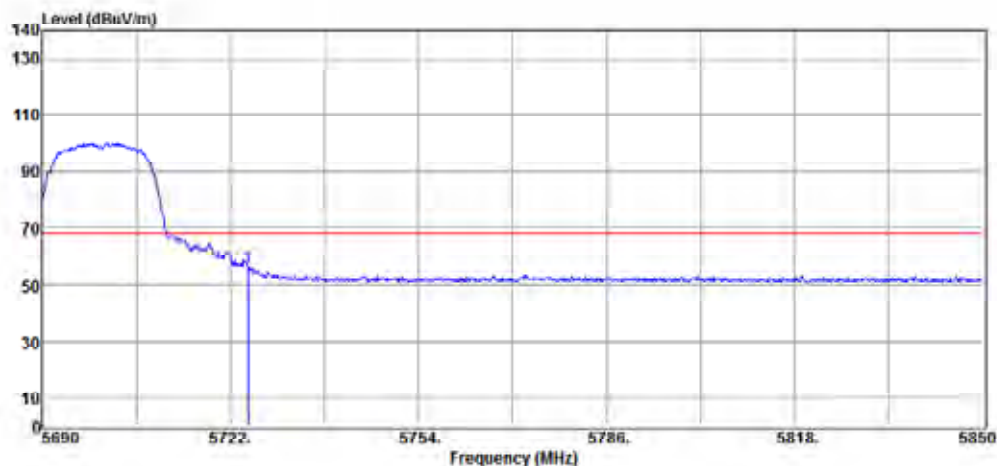


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5725.00	48.15	8.15	56.30	68.20	-11.90	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type a mode Ch 144 Tested by : Weitin Chen

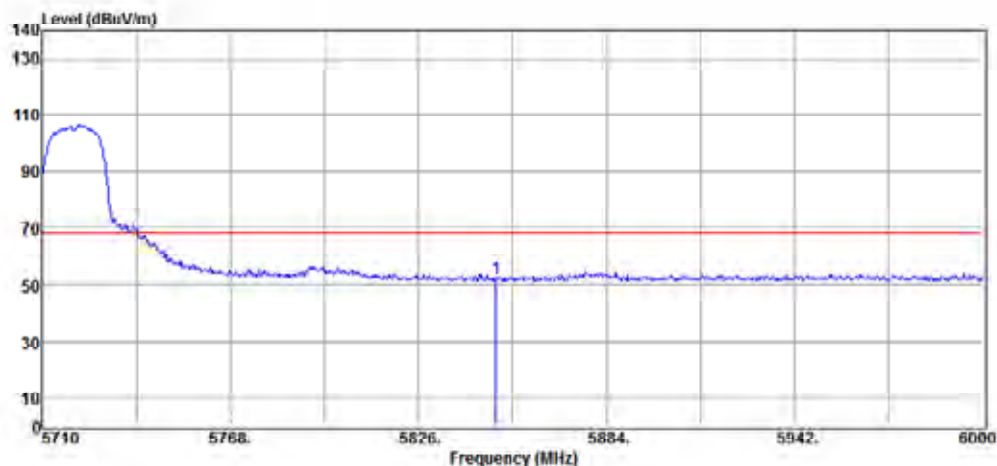


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	43.89	8.02	51.91	68.20	-16.29	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type a mode Ch 144 Tested by : Weitin Chen

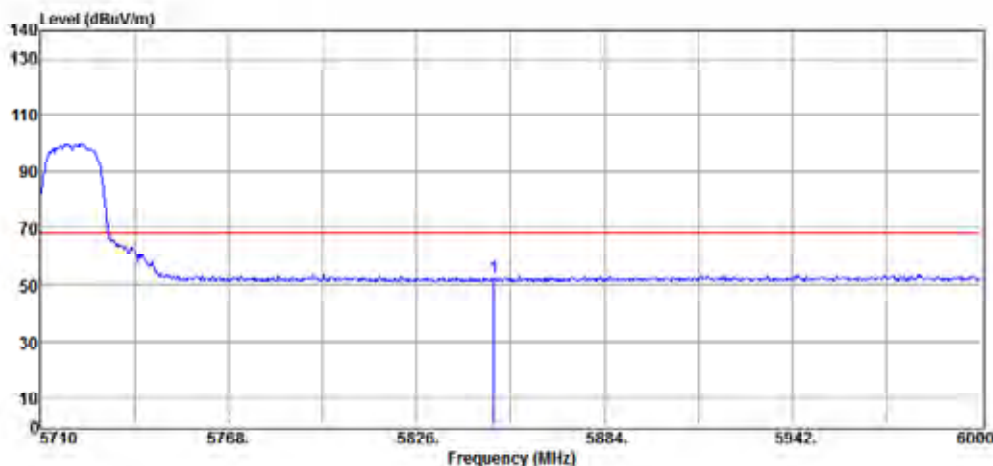


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	44.50	8.02	52.52	68.20	-15.68	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HT20 mode Ch 144 Tested by : Weitin Chen

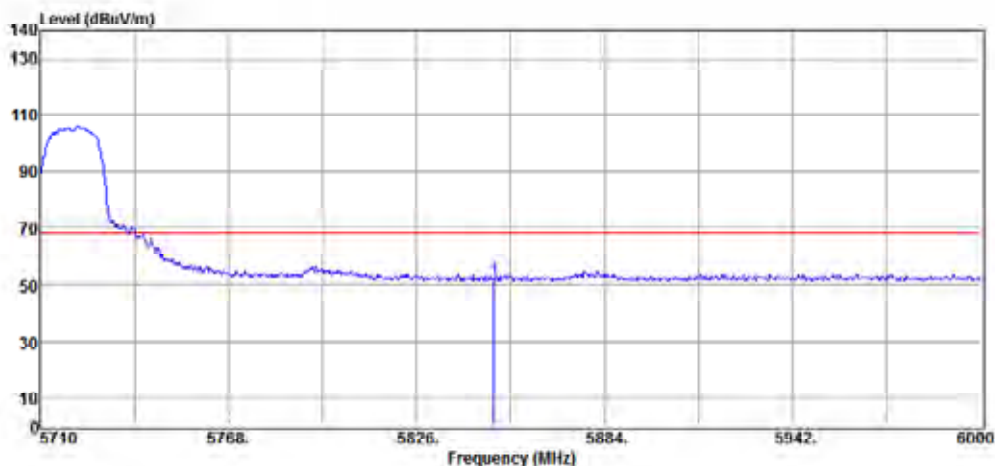


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	43.61	8.02	51.63	68.20	-16.57	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HT20 mode Ch 144 Tested by : Weitin Chen

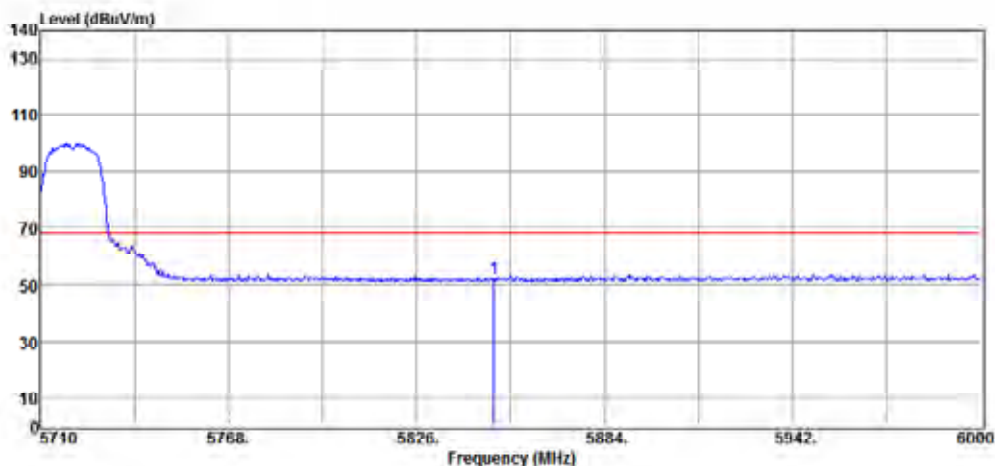


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	43.99	8.02	52.01	68.20	-16.19	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type VHT20 mode Ch 144 Tested by : Weitin Chen

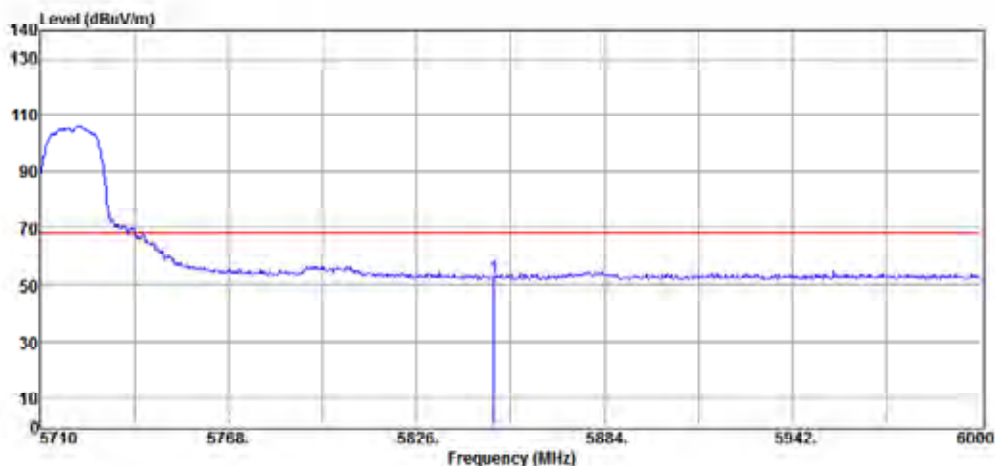


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	44.28	8.02	52.30	68.20	-15.90	Peak	VERTICAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type VHT20 mode Ch 144 Tested by : Weitin Chen

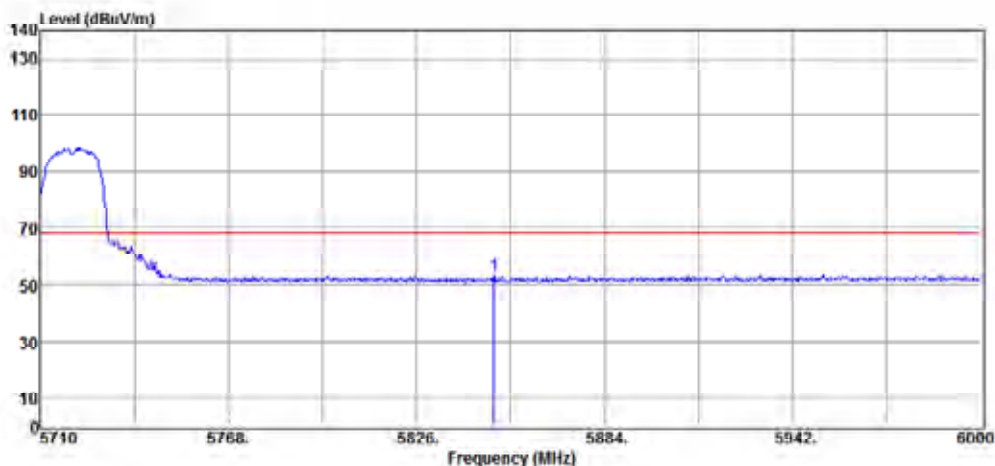


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	44.85	8.02	52.87	68.20	-15.33	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12


Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HE20 mode Ch 144 Tested by : Weitin Chen

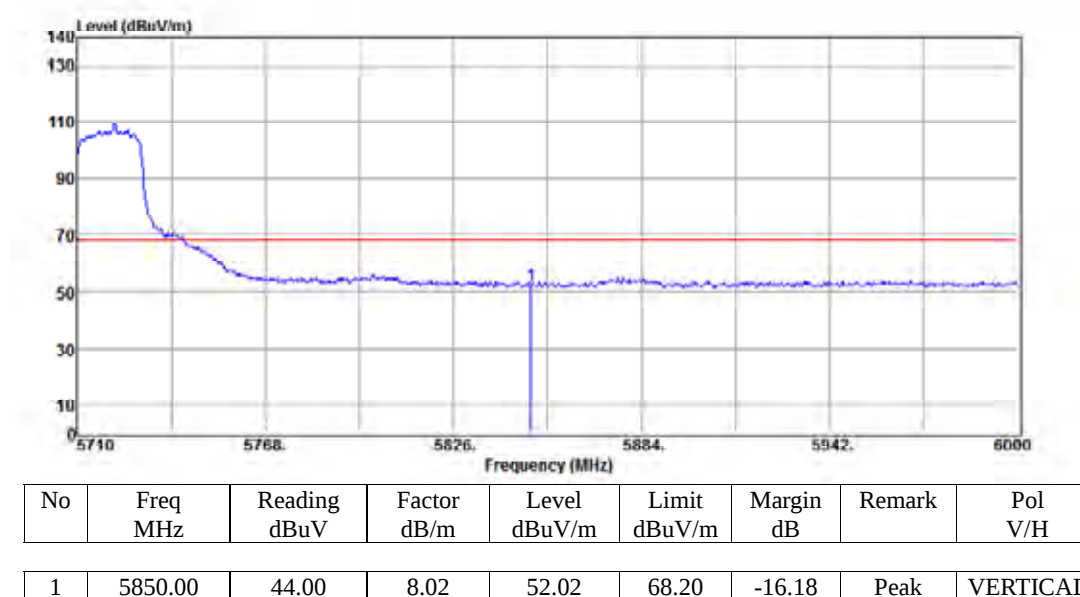

Note: "F" denotes fundamental frequency.

International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Date: 2024-07-12

Project Number. : 24LR0052 Temp.()/RH(%) : 25/57
Test Mode : E type HE20 mode Ch 144 Tested by : Weitin Chen

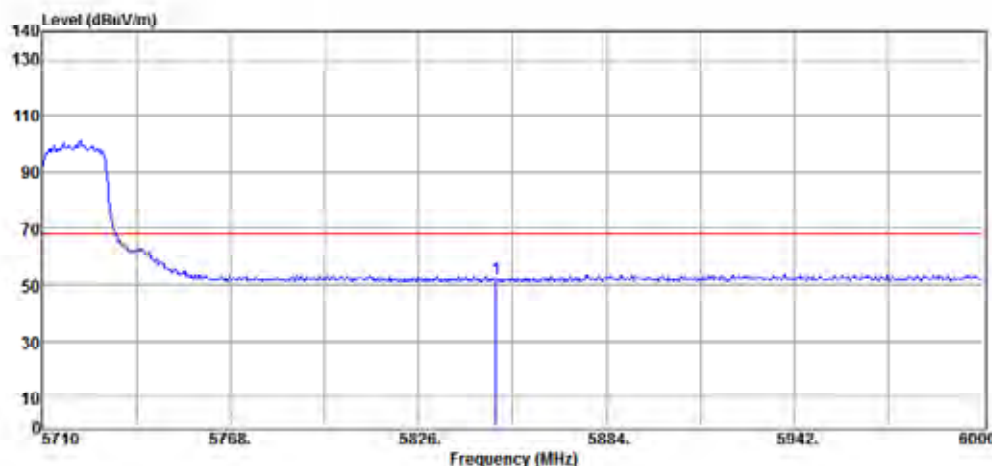


No	Freq MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol V/H
1	5850.00	43.82	8.02	51.84	68.20	-16.36	Peak	HORIZONTAL

Note: "F" denotes fundamental frequency.



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

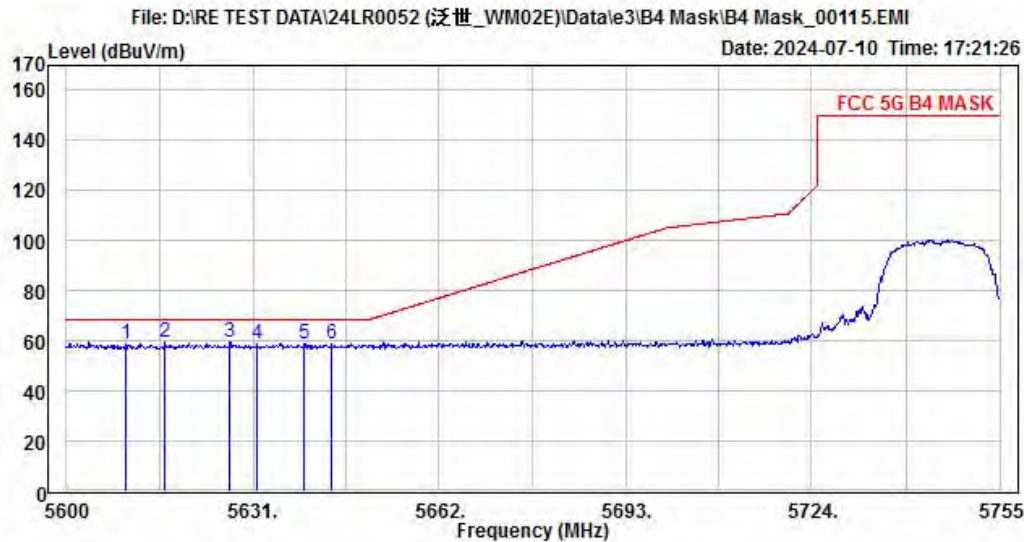


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11a Low Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5609.920	51.00	7.85	58.85	68.20	-9.35 Vertical
2 PP	5616.430	51.63	7.86	59.49	68.20	-8.71 Vertical
3	5627.125	51.36	7.89	59.25	68.20	-8.95 Vertical
4	5631.775	51.14	7.90	59.04	68.20	-9.16 Vertical
5	5639.525	50.77	7.92	58.69	68.20	-9.51 Vertical
6	5644.175	50.92	7.93	58.85	68.20	-9.35 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

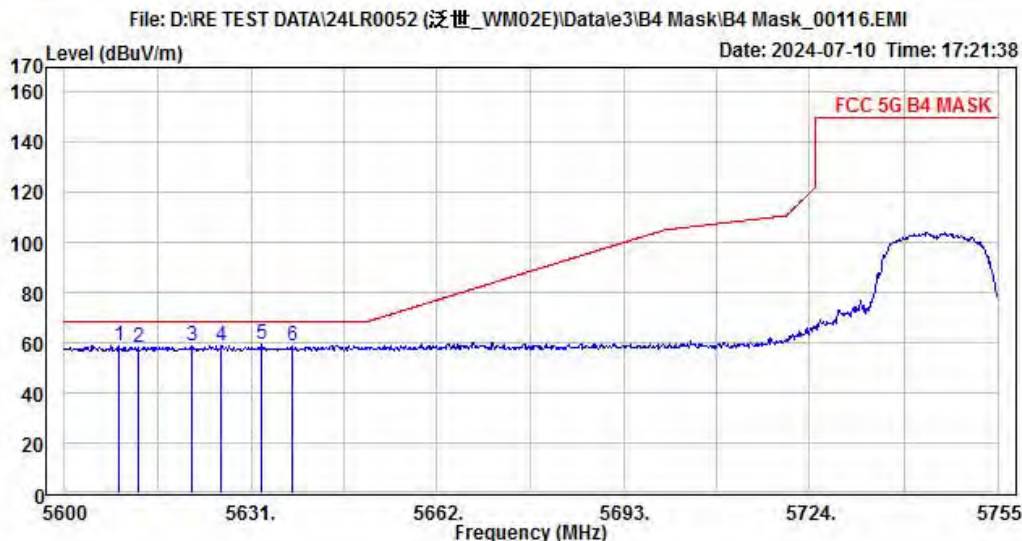


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11a Low Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5608.990	51.03	7.85	58.88	68.20	-9.32 Horizontal
2	5612.400	50.57	7.85	58.42	68.20	-9.78 Horizontal
3	5621.080	50.81	7.87	58.68	68.20	-9.52 Horizontal
4	5626.040	51.00	7.89	58.89	68.20	-9.31 Horizontal
5 PP	5632.860	51.50	7.91	59.41	68.20	-8.79 Horizontal
6	5637.820	51.21	7.93	59.14	68.20	-9.06 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

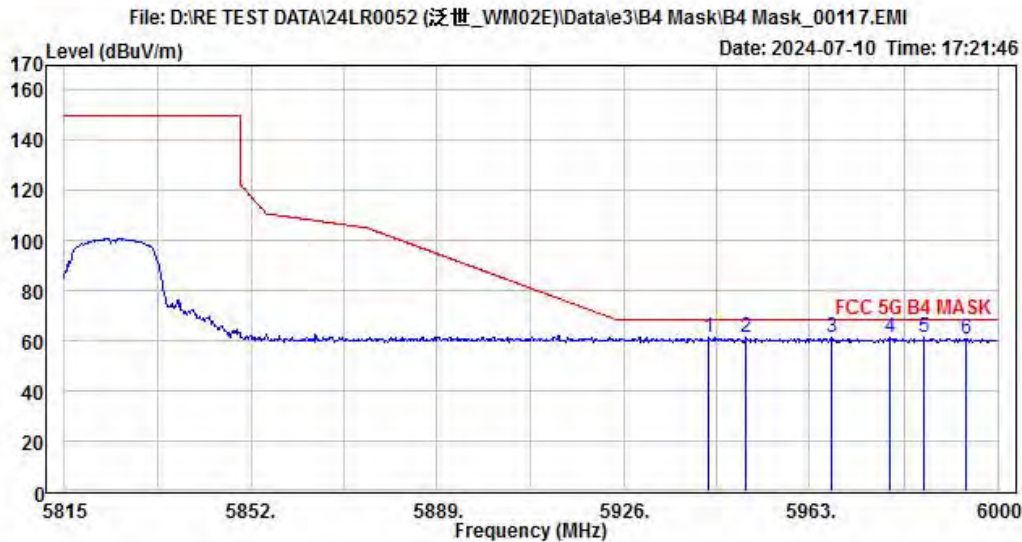


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11a High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5943.020	52.56	8.54	61.10	68.20	-7.10 Vertical
2	5950.420	52.67	8.53	61.20	68.20	-7.00 Vertical
3	5967.255	52.55	8.57	61.12	68.20	-7.08 Vertical
4	5978.540	52.49	8.60	61.09	68.20	-7.11 Vertical
5 PP	5985.385	52.65	8.62	61.27	68.20	-6.93 Vertical
6	5993.710	52.38	8.65	61.03	68.20	-7.17 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

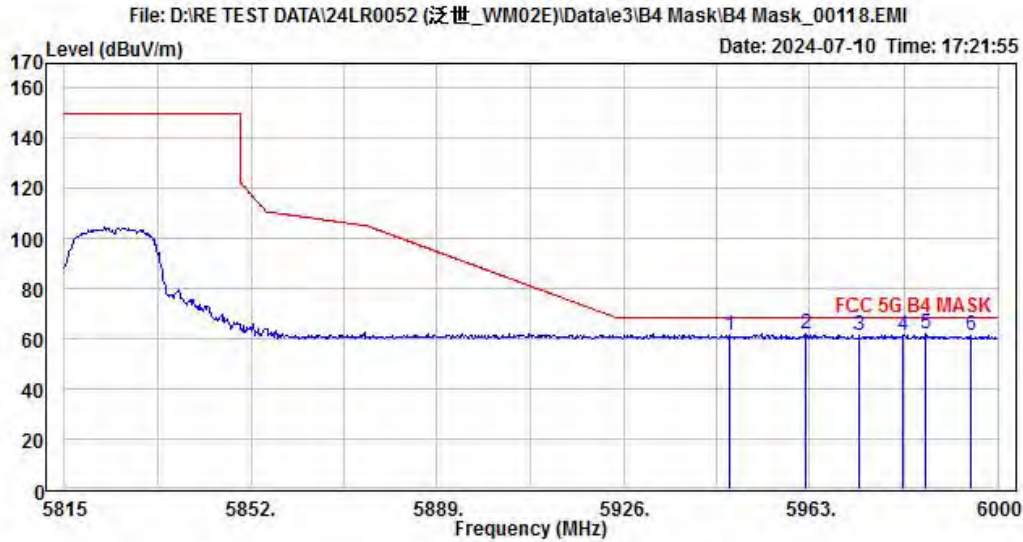


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11a High Ch
Note :

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5947.090	52.95	8.54	61.49	68.20	-6.71	Horizontal
2 PP	5962.075	53.66	8.56	62.22	68.20	-5.98	Horizontal
3	5972.620	52.92	8.59	61.51	68.20	-6.69	Horizontal
4	5981.315	52.93	8.61	61.54	68.20	-6.66	Horizontal
5	5985.755	53.18	8.62	61.80	68.20	-6.40	Horizontal
6	5994.635	53.06	8.65	61.71	68.20	-6.49	Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

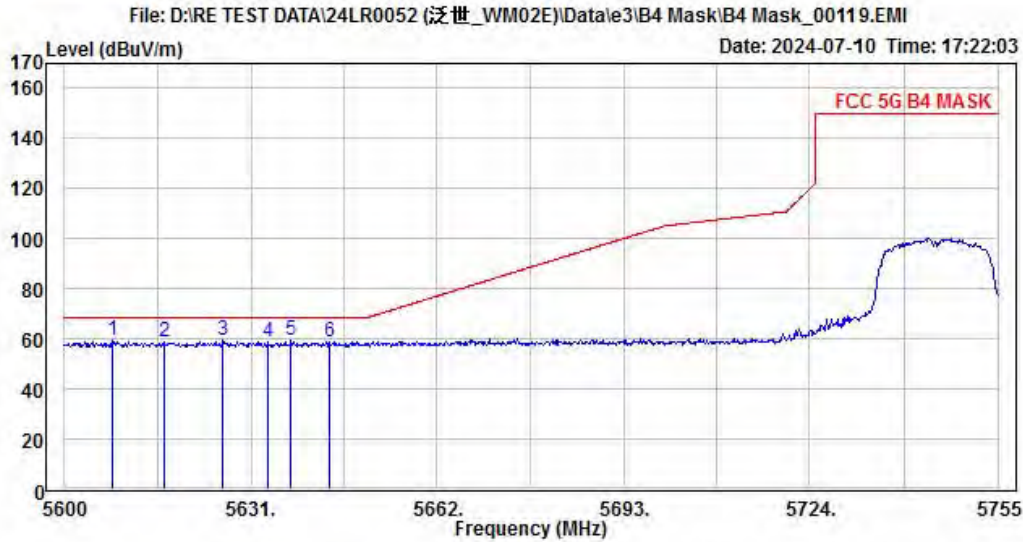


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11HT20 Low Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5608.060	51.60	7.84	59.44	68.20	-8.76 Vertical
2	5616.585	50.71	7.86	58.57	68.20	-9.63 Vertical
3 PP	5626.358	51.68	7.89	59.57	68.20	-8.63 Vertical
4	5633.790	50.85	7.91	58.76	68.20	-9.44 Vertical
5	5637.665	51.43	7.93	59.36	68.20	-8.84 Vertical
6	5644.175	50.86	7.93	58.79	68.20	-9.41 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

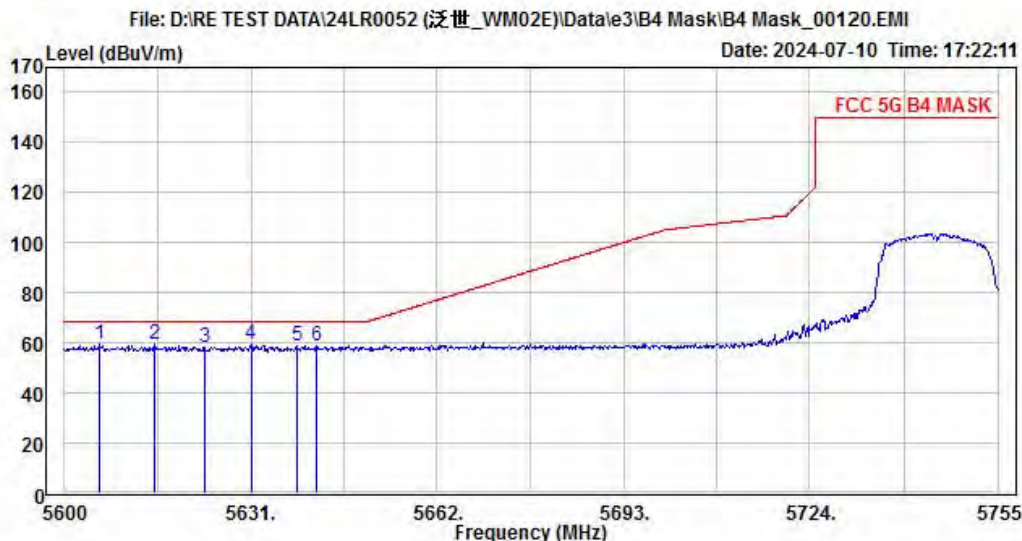


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11HT20 Low Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5605.890	51.34	7.83	59.17	68.20	-9.03 Horizontal
2	5614.880	51.32	7.86	59.18	68.20	-9.02 Horizontal
3	5623.405	50.40	7.89	58.29	68.20	-9.91 Horizontal
4 PP	5631.000	51.42	7.90	59.32	68.20	-8.88 Horizontal
5	5638.595	50.83	7.93	58.76	68.20	-9.44 Horizontal
6	5642.005	50.66	7.92	58.58	68.20	-9.62 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

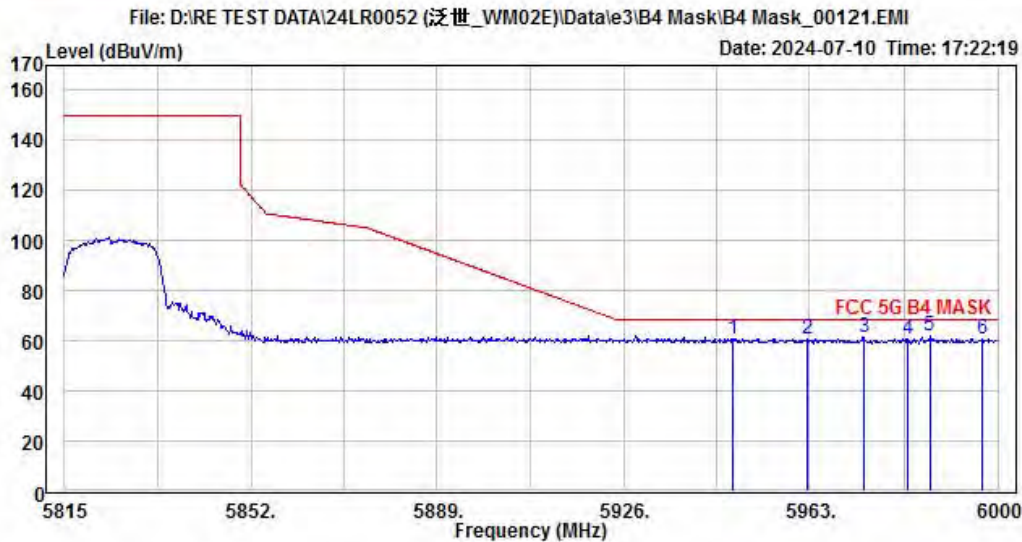


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11HT20 High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5947.645	52.53	8.53	61.06	68.20	-7.14 Vertical
2	5962.445	52.16	8.56	60.72	68.20	-7.48 Vertical
3	5973.360	53.01	8.59	61.60	68.20	-6.60 Vertical
4	5982.055	52.46	8.61	61.07	68.20	-7.13 Vertical
5 PP	5986.495	53.37	8.62	61.99	68.20	-6.21 Vertical
6	5997.040	52.36	8.65	61.01	68.20	-7.19 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

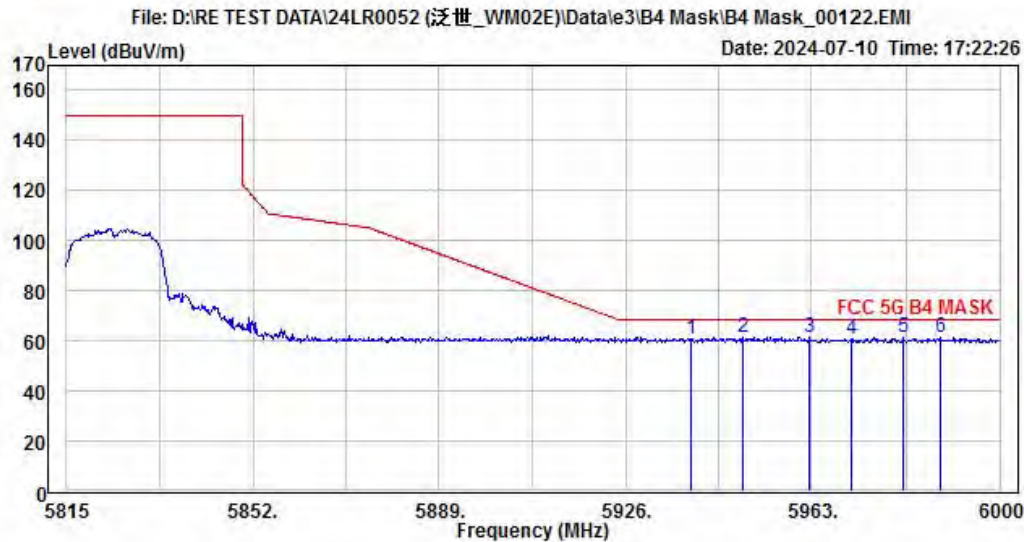


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11HT20 High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5938.950	52.29	8.54	60.83	68.20	-7.37 Horizontal
2	5949.310	52.62	8.53	61.15	68.20	-7.05 Horizontal
3	5962.630	52.70	8.57	61.27	68.20	-6.93 Horizontal
4	5970.770	52.27	8.59	60.86	68.20	-7.34 Horizontal
5	5980.760	52.90	8.60	61.50	68.20	-6.70 Horizontal
6 PP	5988.345	53.06	8.63	61.69	68.20	-6.51 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

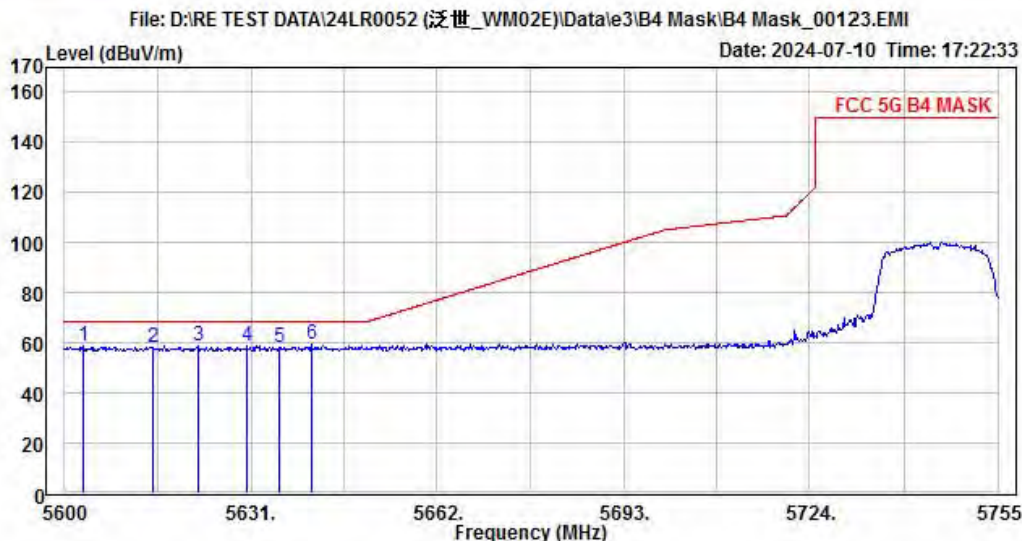


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11VHT20 Low Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5603.100	51.10	7.83	58.93	68.20	-9.27 Vertical
2	5614.570	50.32	7.86	58.18	68.20	-10.02 Vertical
3	5622.320	50.92	7.88	58.80	68.20	-9.40 Vertical
4	5630.380	51.03	7.90	58.93	68.20	-9.27 Vertical
5	5635.650	50.25	7.92	58.17	68.20	-10.03 Vertical
6 PP	5641.075	51.28	7.92	59.20	68.20	-9.00 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

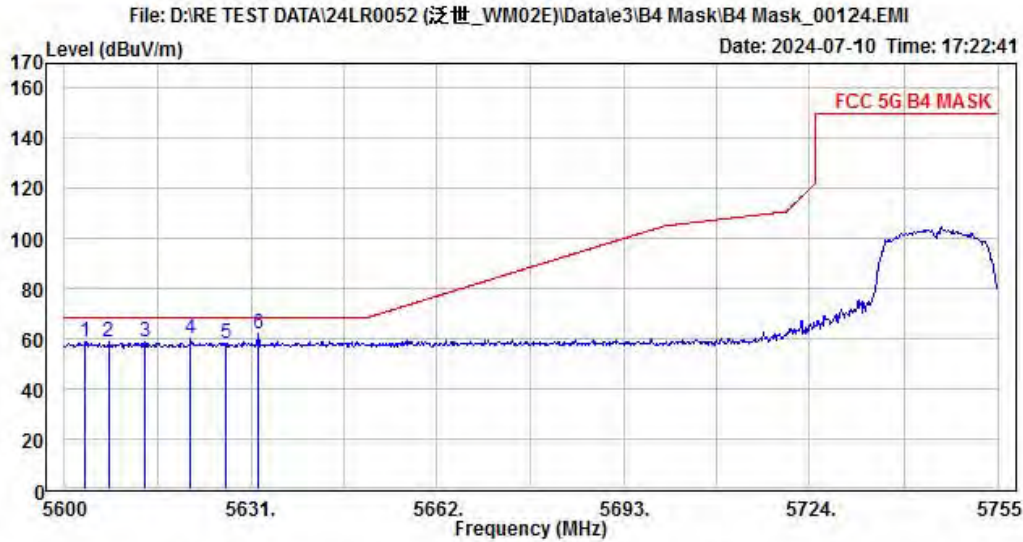


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11VHT20 Low Ch
Note :

	Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	5603.410	50.94	7.83	58.77	68.20	-9.43 Horizontal
2	5607.285	50.69	7.83	58.52	68.20	-9.68 Horizontal
3	5613.330	50.77	7.86	58.63	68.20	-9.57 Horizontal
4	5620.925	52.53	7.87	60.40	68.20	-7.80 Horizontal
5	5626.815	50.44	7.89	58.33	68.20	-9.87 Horizontal
6 PP	5632.240	53.94	7.90	61.84	68.20	-6.36 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

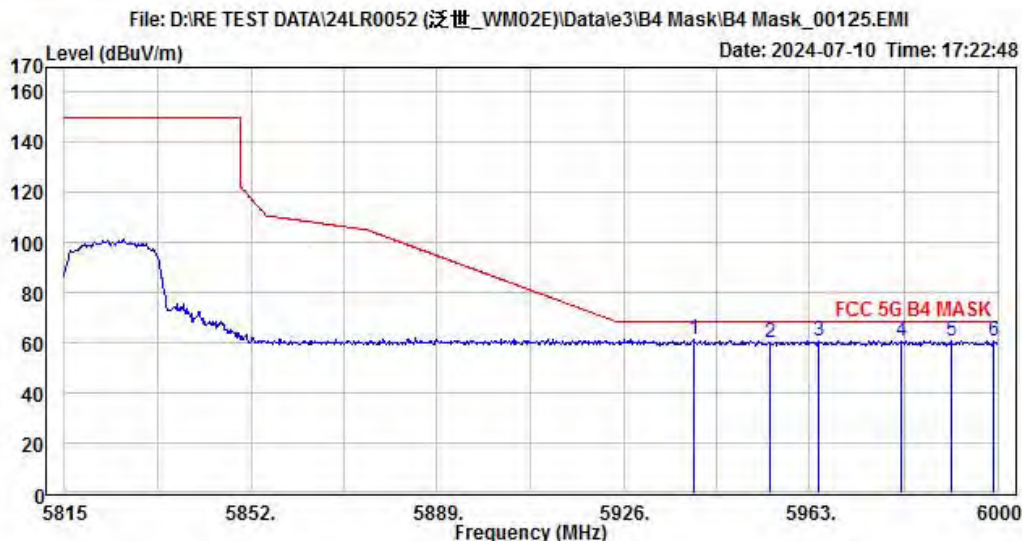


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11VHT20 High Ch
Note :

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 PP 5939.875	52.92	8.54	61.46	68.20	-6.74 Vertical
2 5955.045	51.59	8.54	60.13	68.20	-8.07 Vertical
3 5964.850	52.13	8.57	60.70	68.20	-7.50 Vertical
4 5980.760	51.90	8.60	60.50	68.20	-7.70 Vertical
5 5990.935	51.89	8.63	60.52	68.20	-7.68 Vertical
6 5999.260	52.21	8.66	60.87	68.20	-7.33 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03)2638888 ; Fax: (03)2638899
Web: www.isl.com.tw

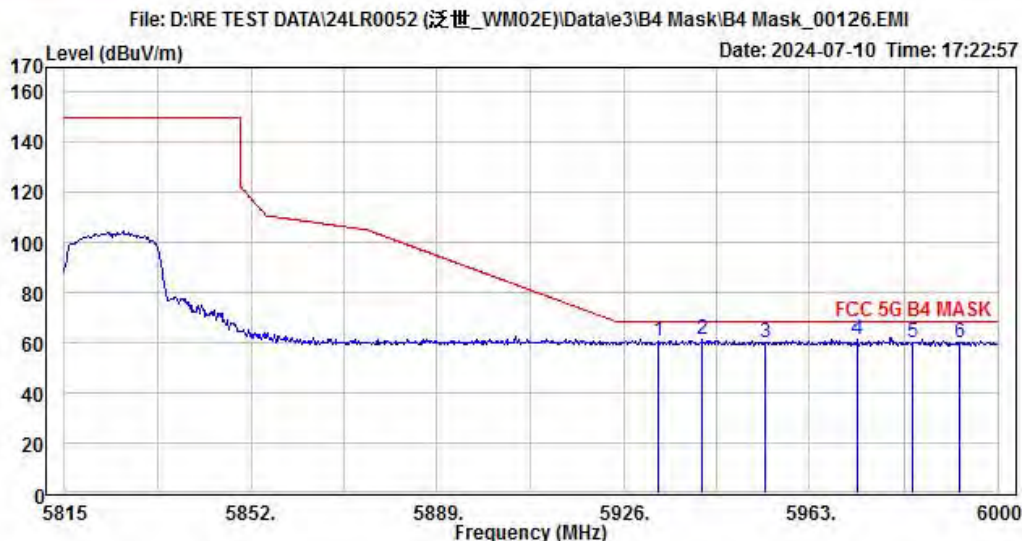


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11VHT20 High Ch
Note :

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5933.030	52.17	8.55	60.72	68.20	-7.48	Horizontal
2 PP	5941.725	52.96	8.54	61.50	68.20	-6.70	Horizontal
3	5954.120	51.85	8.54	60.39	68.20	-7.81	Horizontal
4	5972.250	52.55	8.58	61.13	68.20	-7.07	Horizontal
5	5983.165	51.54	8.62	60.16	68.20	-8.04	Horizontal
6	5992.415	51.77	8.63	60.40	68.20	-7.80	Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

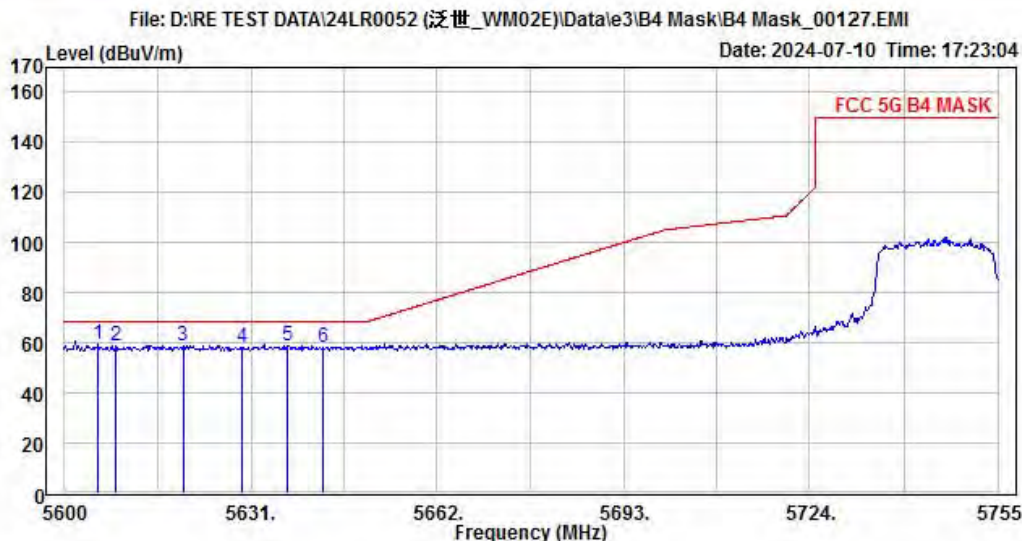


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11HE20 Low Ch
Note :

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 PP 5605.580	51.39	7.83	59.22	68.20	-8.98 Vertical
2 5608.370	50.95	7.84	58.79	68.20	-9.41 Vertical
3 5619.685	50.88	7.87	58.75	68.20	-9.45 Vertical
4 5629.450	50.53	7.90	58.43	68.20	-9.77 Vertical
5 5637.045	51.13	7.92	59.05	68.20	-9.15 Vertical
6 5642.935	50.34	7.93	58.27	68.20	-9.93 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

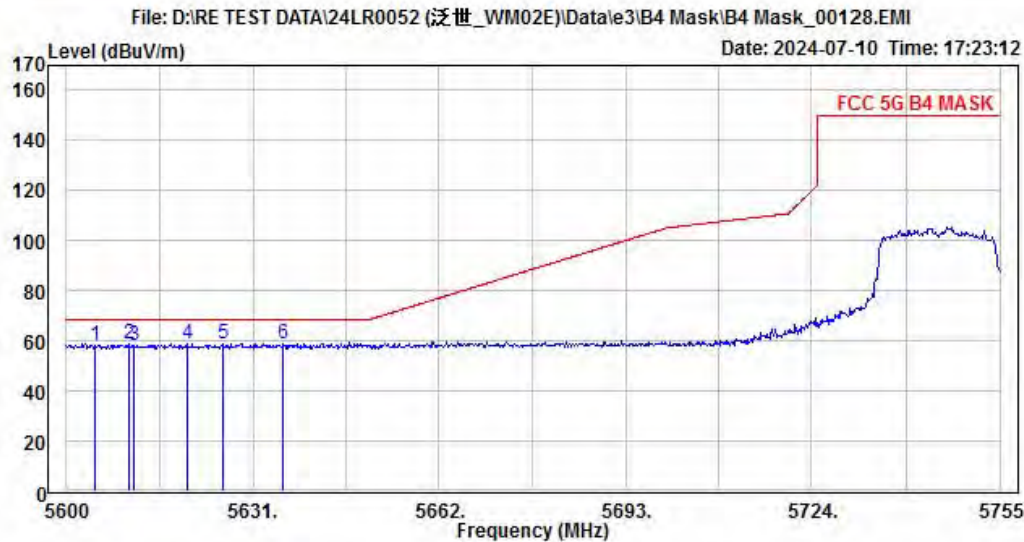


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11HE20 Low Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5604.650	50.43	7.83	58.26	68.20	-9.94 Horizontal
2	5610.385	50.78	7.85	58.63	68.20	-9.57 Horizontal
3	5611.315	50.27	7.85	58.12	68.20	-10.08 Horizontal
4	5620.150	50.98	7.87	58.85	68.20	-9.35 Horizontal
5	5626.040	50.63	7.89	58.52	68.20	-9.68 Horizontal
6 PP	5636.115	50.98	7.92	58.90	68.20	-9.30 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

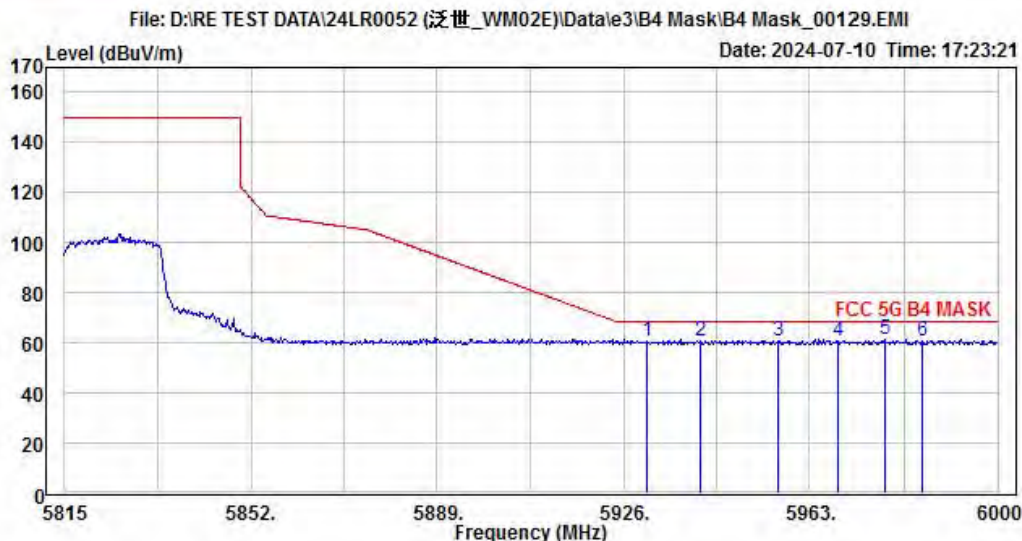


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11HE20 High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5930.810	52.06	8.56	60.62	68.20	-7.58 Vertical
2	5941.170	52.23	8.54	60.77	68.20	-7.43 Vertical
3	5956.710	52.22	8.55	60.77	68.20	-7.43 Vertical
4	5968.550	52.13	8.59	60.72	68.20	-7.48 Vertical
5 PP	5977.615	52.54	8.60	61.14	68.20	-7.06 Vertical
6	5985.015	52.27	8.62	60.89	68.20	-7.31 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

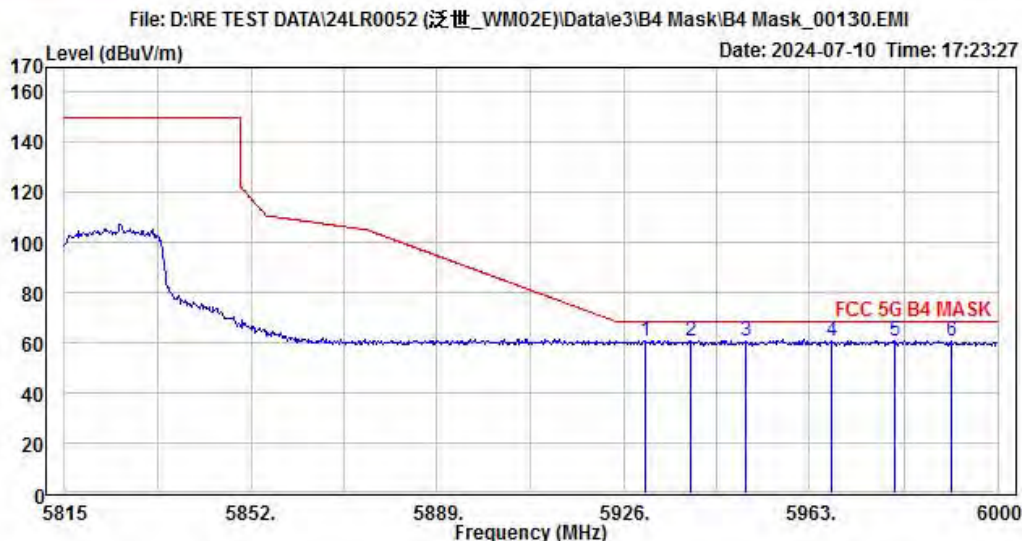


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02F
Mode : Wifi 5G Mask B4 802.11HE20 High Ch
Note :

		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5930.255	52.40	8.56	60.96	68.20	-7.24	Horizontal
2 PP	5939.505	52.49	8.54	61.03	68.20	-7.17	Horizontal
3	5950.235	52.38	8.53	60.91	68.20	-7.29	Horizontal
4	5967.255	52.00	8.57	60.57	68.20	-7.63	Horizontal
5	5979.650	52.25	8.60	60.85	68.20	-7.35	Horizontal
6	5990.750	52.22	8.63	60.85	68.20	-7.35	Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

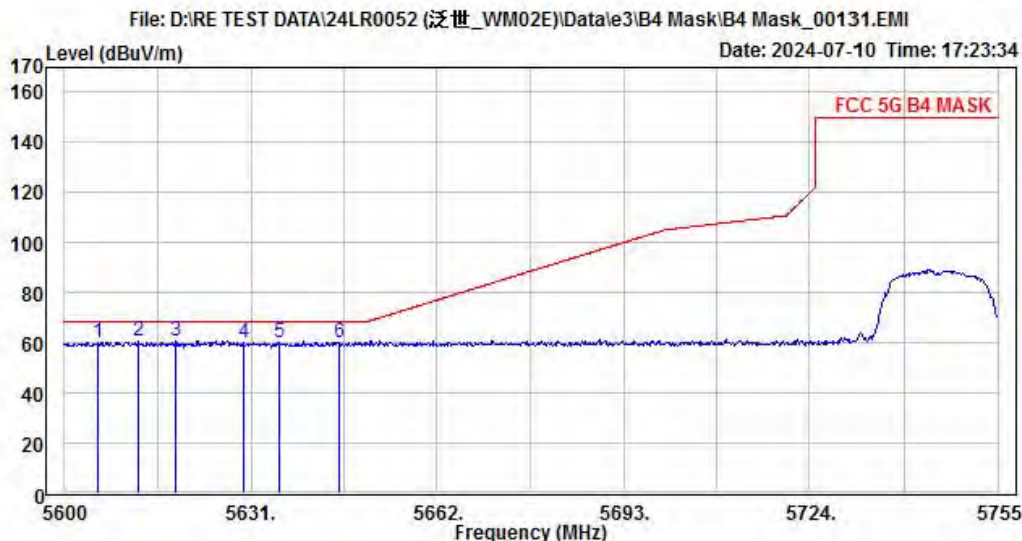


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11a Low Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5605.580	52.61	7.61	60.22	68.20	-7.98 Vertical
2	5612.245	52.96	7.63	60.59	68.20	-7.61 Vertical
3 PP	5618.445	52.99	7.65	60.64	68.20	-7.56 Vertical
4	5629.915	52.25	7.68	59.93	68.20	-8.27 Vertical
5	5635.650	52.36	7.69	60.05	68.20	-8.15 Vertical
6	5645.570	52.19	7.71	59.90	68.20	-8.30 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

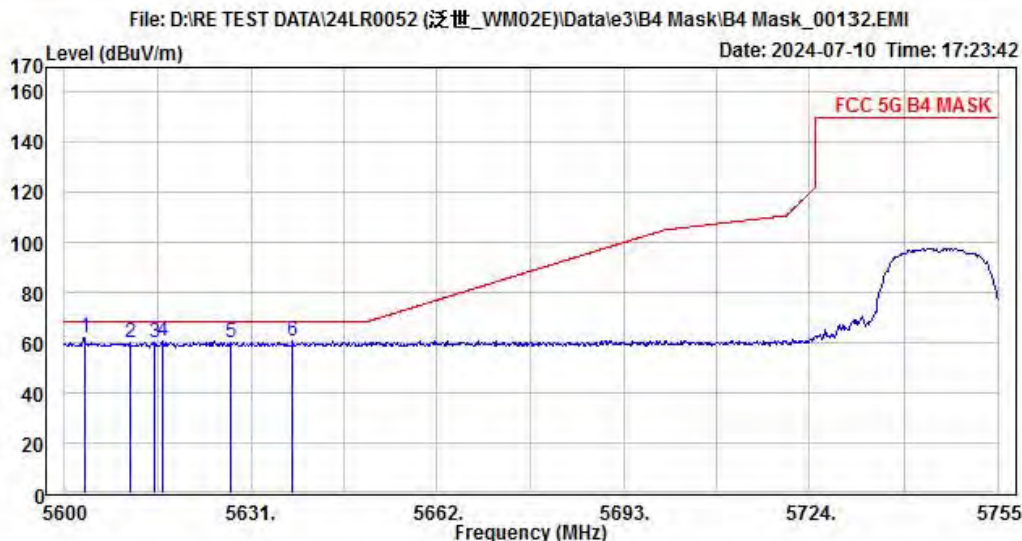


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11a Low Ch
Note :

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 PP 5603.255	54.41	7.61	62.02	68.20	-6.18	Horizontal
2 5610.850	52.70	7.63	60.33	68.20	-7.87	Horizontal
3 5614.880	52.61	7.64	60.25	68.20	-7.95	Horizontal
4 5616.275	52.83	7.64	60.47	68.20	-7.73	Horizontal
5 5627.745	52.47	7.68	60.15	68.20	-8.05	Horizontal
6 5637.975	53.10	7.71	60.81	68.20	-7.39	Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

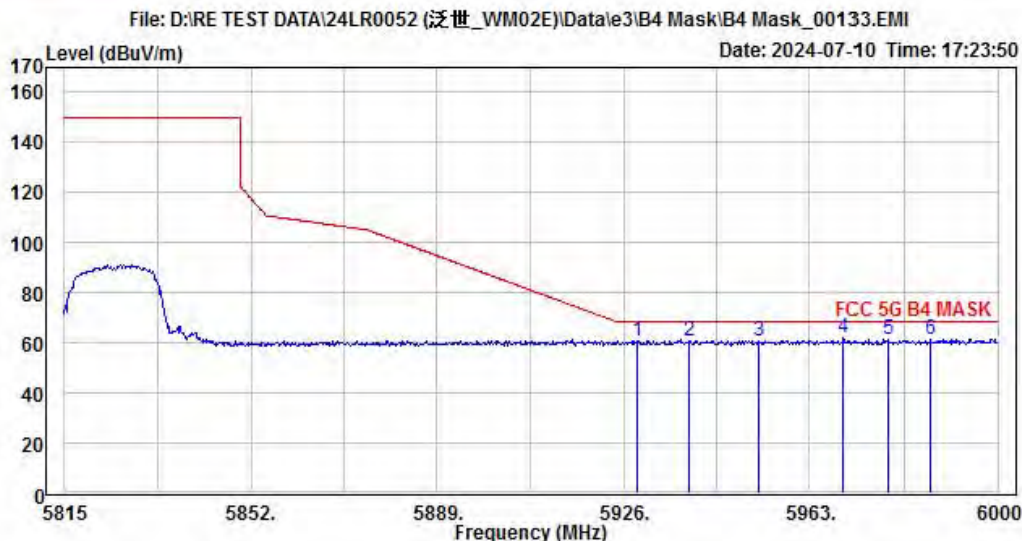


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11a High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5928.775	52.60	8.31	60.91	68.20	-7.29 Vertical
2	5939.135	52.37	8.30	60.67	68.20	-7.53 Vertical
3	5952.825	52.52	8.30	60.82	68.20	-7.38 Vertical
4 PP	5969.660	53.40	8.34	61.74	68.20	-6.46 Vertical
5	5978.170	53.24	8.35	61.59	68.20	-6.61 Vertical
6	5986.680	52.89	8.37	61.26	68.20	-6.94 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

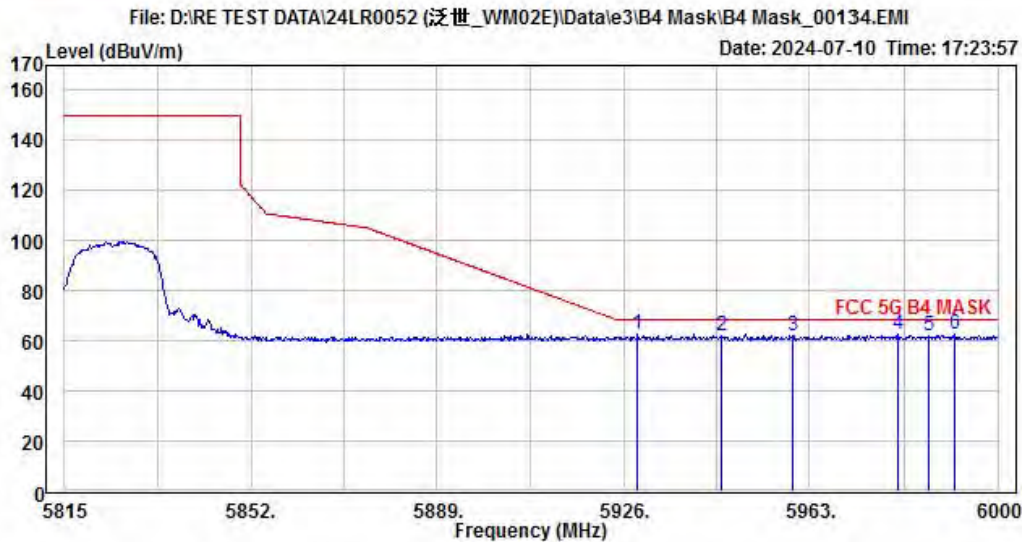


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11a High Ch
Note :

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 PP 5928.775	54.32	8.31	62.63	68.20	-5.57	Horizontal
2 5945.425	54.01	8.29	62.30	68.20	-5.90	Horizontal
3 5959.670	54.04	8.31	62.35	68.20	-5.85	Horizontal
4 5980.205	54.06	8.36	62.42	68.20	-5.78	Horizontal
5 5986.310	53.98	8.37	62.35	68.20	-5.85	Horizontal
6 5991.490	54.11	8.38	62.49	68.20	-5.71	Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

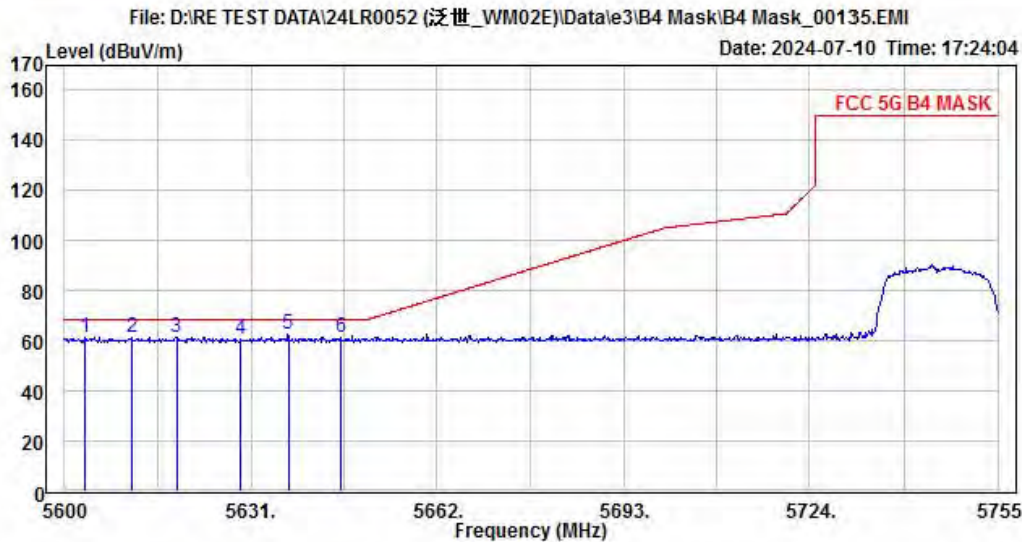


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11HT20 Low Ch
Note :

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	5603.255	53.81	7.61	61.42	68.20	-6.78 Vertical
2	5611.160	53.58	7.63	61.21	68.20	-6.99 Vertical
3	5618.600	54.06	7.65	61.71	68.20	-6.49 Vertical
4	5629.295	53.08	7.68	60.76	68.20	-7.44 Vertical
5 PP	5637.200	54.68	7.70	62.38	68.20	-5.82 Vertical
6	5645.880	54.00	7.71	61.71	68.20	-6.49 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

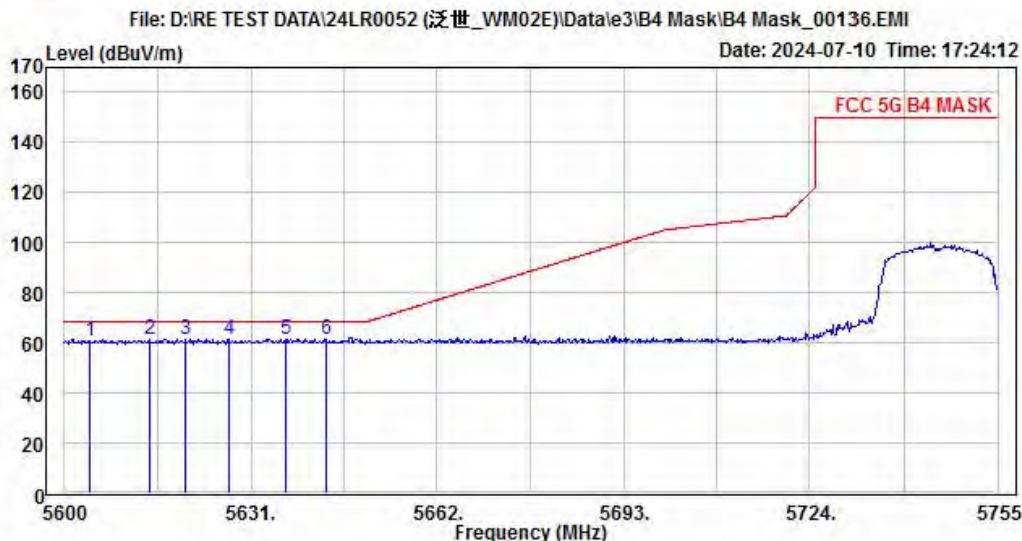


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11HT20 Low Ch
Note :

	Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	5604.185	53.46	7.61	61.07	68.20	-7.13 Horizontal
2	5614.105	53.46	7.64	61.10	68.20	-7.10 Horizontal
3	5620.150	53.51	7.65	61.16	68.20	-7.04 Horizontal
4	5627.435	53.74	7.67	61.41	68.20	-6.79 Horizontal
5	5636.890	53.55	7.70	61.25	68.20	-6.95 Horizontal
6 PP	5643.555	53.79	7.71	61.50	68.20	-6.70 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

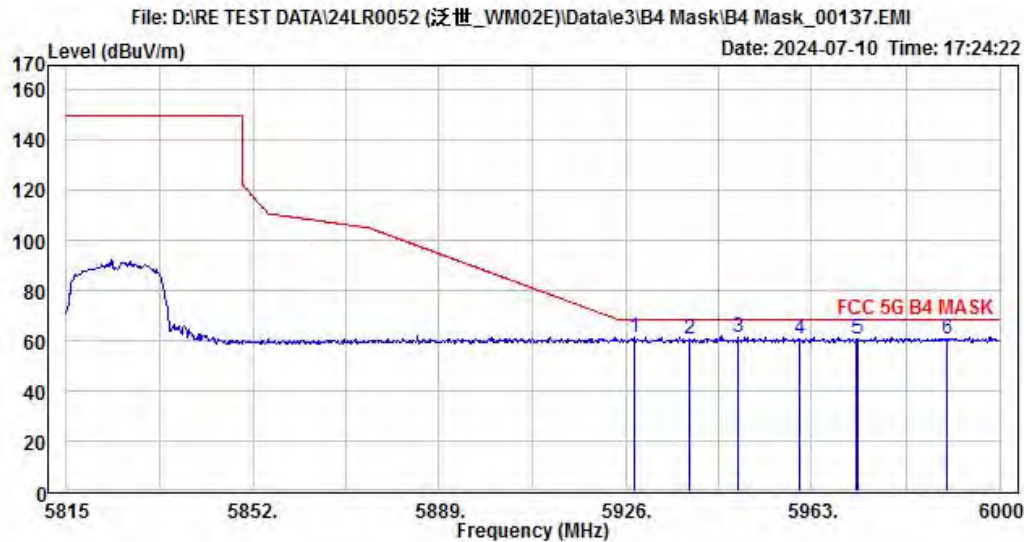


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11HT20 High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5927.665	52.89	8.31	61.20	68.20	-7.00 Vertical
2	5938.765	52.67	8.30	60.97	68.20	-7.23 Vertical
3 PP	5948.385	53.08	8.28	61.36	68.20	-6.84 Vertical
4	5960.595	52.53	8.31	60.84	68.20	-7.36 Vertical
5	5971.880	52.26	8.34	60.60	68.20	-7.60 Vertical
6	5989.455	52.66	8.38	61.04	68.20	-7.16 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

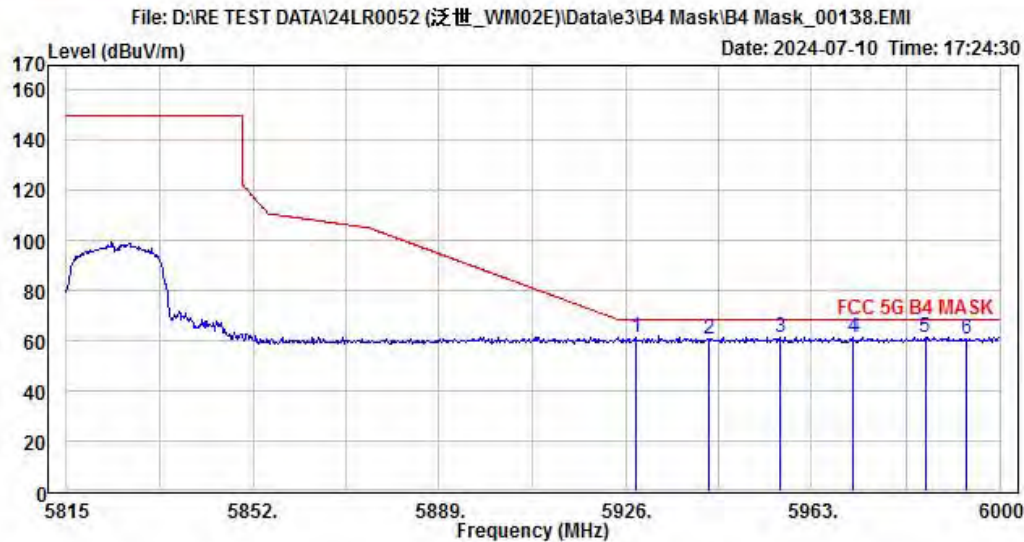


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11HT20 High Ch
Note :

	Read		Limit	Over			
	Freq	Level	Factor	Level	Line	Limit	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5928.035	53.18	8.31	61.49	68.20	-6.71	Horizontal
2	5942.465	52.59	8.30	60.89	68.20	-7.31	Horizontal
3 PP	5956.718	53.42	8.38	61.72	68.20	-6.48	Horizontal
4	5971.325	53.07	8.34	61.41	68.20	-6.79	Horizontal
5	5985.200	53.16	8.37	61.53	68.20	-6.67	Horizontal
6	5993.525	52.43	8.40	60.83	68.20	-7.37	Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

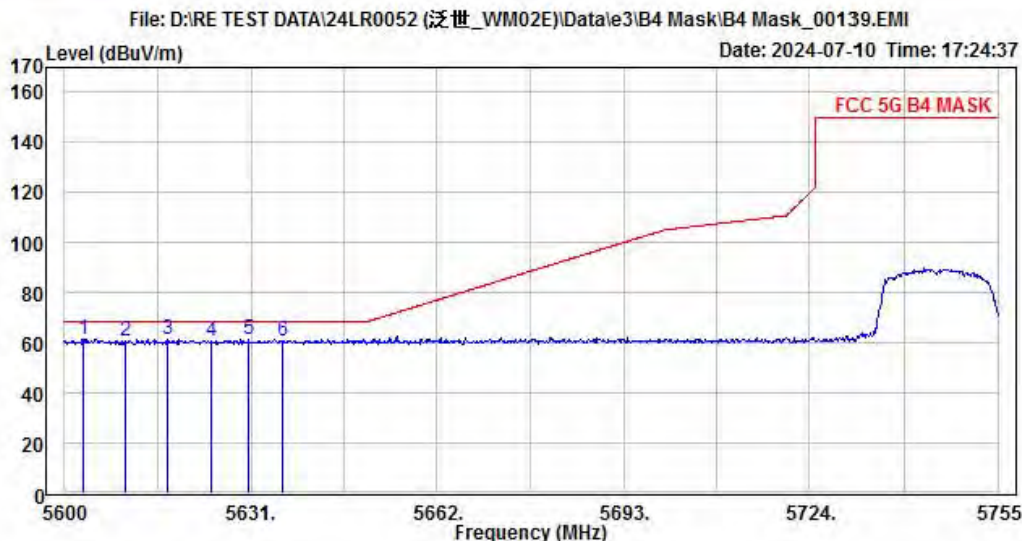


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11VHT20 Low Ch
Note :

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5603.100	53.77	7.61	61.38	68.20	-6.82	Vertical
2	5610.075	53.06	7.63	60.69	68.20	-7.51	Vertical
3	5617.050	53.72	7.64	61.36	68.20	-6.84	Vertical
4	5624.490	53.24	7.67	60.91	68.20	-7.29	Vertical
5 PP	5630.690	54.02	7.68	61.70	68.20	-6.50	Vertical
6	5636.270	53.12	7.70	60.82	68.20	-7.38	Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

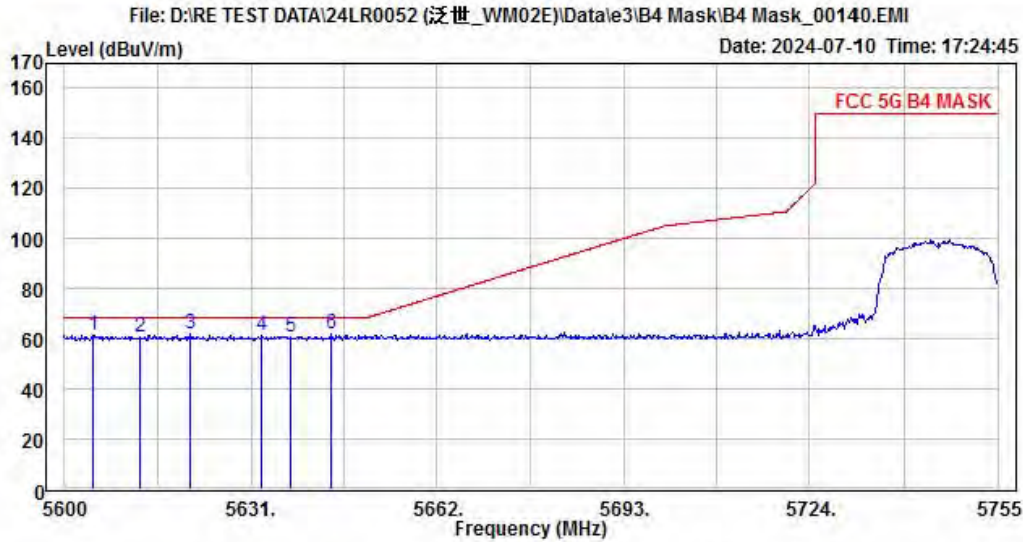


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11VHT20 Low Ch
Note :

	Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	5604.805	54.06	7.61	61.67	68.20	-6.53 Horizontal
2	5612.555	53.14	7.64	60.78	68.20	-7.42 Horizontal
3 PP	5620.770	54.49	7.65	62.14	68.20	-6.06 Horizontal
4	5632.860	53.78	7.69	61.47	68.20	-6.73 Horizontal
5	5637.665	53.20	7.71	60.91	68.20	-7.29 Horizontal
6	5644.330	54.02	7.71	61.73	68.20	-6.47 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

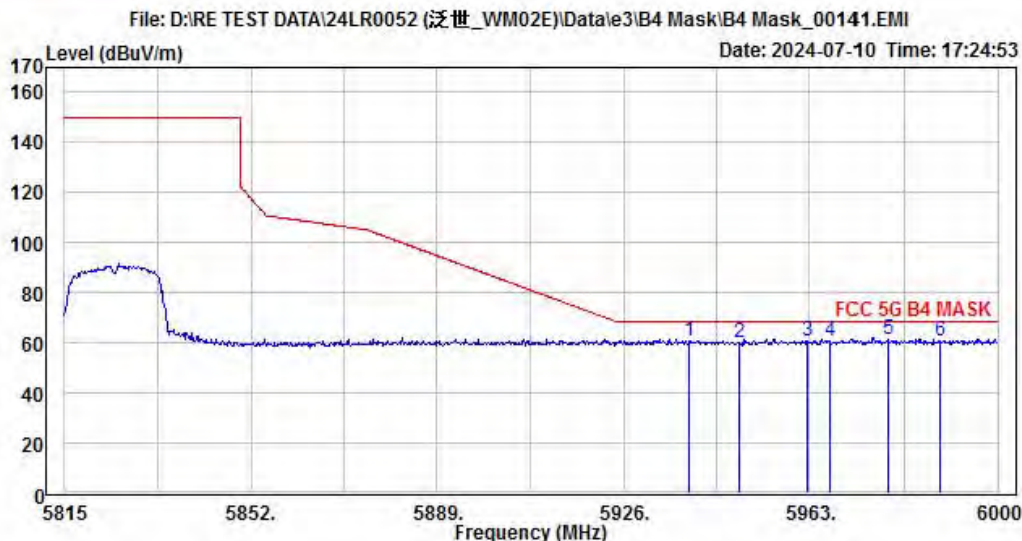


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11VHT20 High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5939.135	52.60	8.30	60.90	68.20	-7.30 Vertical
2	5949.125	51.90	8.28	60.18	68.20	-8.02 Vertical
3	5962.630	52.54	8.32	60.86	68.20	-7.34 Vertical
4	5966.885	52.69	8.33	61.02	68.20	-7.18 Vertical
5 PP	5978.170	52.85	8.35	61.20	68.20	-7.00 Vertical
6	5988.530	52.68	8.38	61.06	68.20	-7.14 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

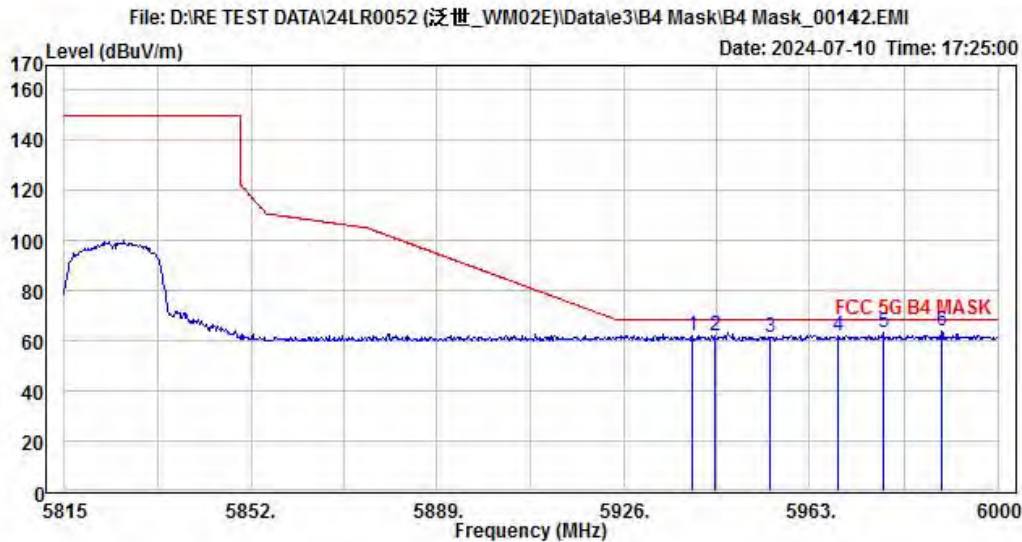


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11VHT20 High Ch
Note :

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5939.690	53.63	8.30	61.93	68.20	-6.27 Horizontal
2	5944.130	53.44	8.29	61.73	68.20	-6.47 Horizontal
3	5955.230	53.12	8.30	61.42	68.20	-6.78 Horizontal
4	5968.735	53.66	8.34	62.00	68.20	-6.20 Horizontal
5	5977.245	54.94	8.34	63.28	68.20	-4.92 Horizontal
6 PP	5988.900	55.42	8.38	63.80	68.20	-4.40 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03)2638888 ; Fax: (03)2638899
Web: www.isl.com.tw

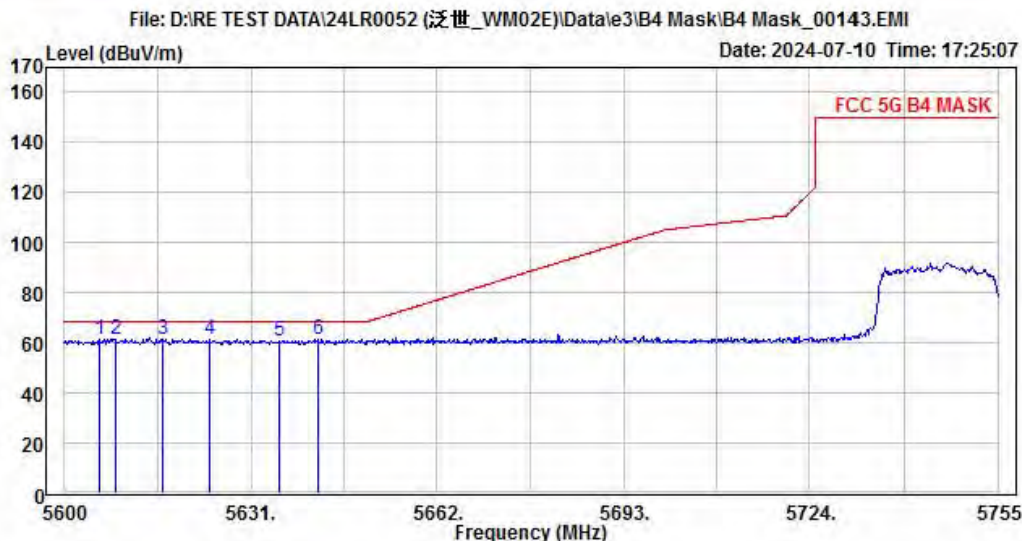


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11HE20 Low Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5605.735	53.70	7.61	61.31	68.20	-6.89 Vertical
2	5608.370	53.82	7.63	61.45	68.20	-6.75 Vertical
3 PP	5616.430	54.02	7.64	61.66	68.20	-6.54 Vertical
4	5624.180	53.98	7.67	61.65	68.20	-6.55 Vertical
5	5635.650	53.39	7.69	61.08	68.20	-7.12 Vertical
6	5642.160	53.85	7.70	61.55	68.20	-6.65 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

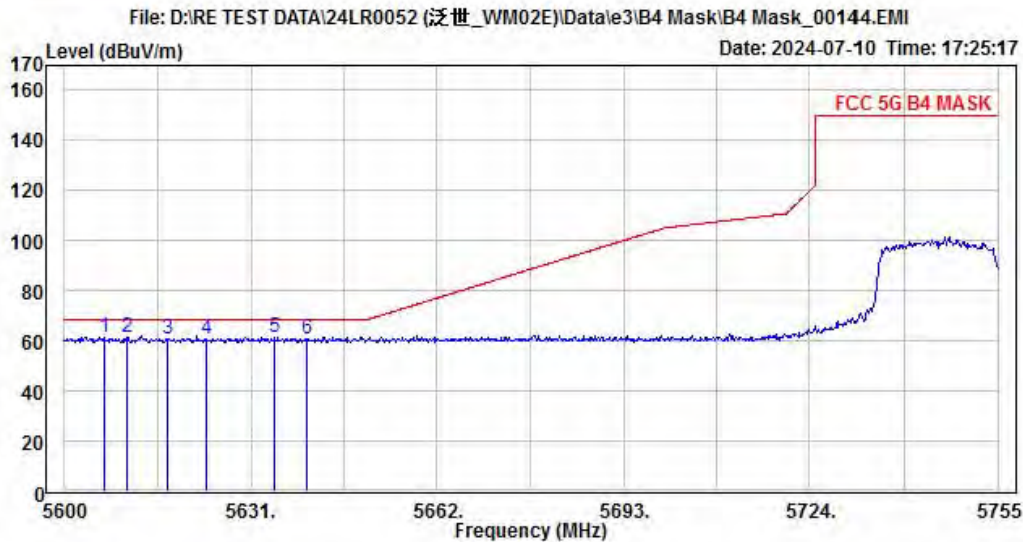


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11HE20 Low Ch
Note :

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5606.510	53.50	7.61	61.11	68.20	-7.09	Horizontal
2 PP	5610.385	54.09	7.63	61.72	68.20	-6.48	Horizontal
3	5617.050	53.27	7.64	60.91	68.20	-7.29	Horizontal
4	5623.715	53.36	7.67	61.03	68.20	-7.17	Horizontal
5	5635.030	53.60	7.69	61.29	68.20	-6.91	Horizontal
6	5640.300	53.11	7.70	60.81	68.20	-7.39	Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

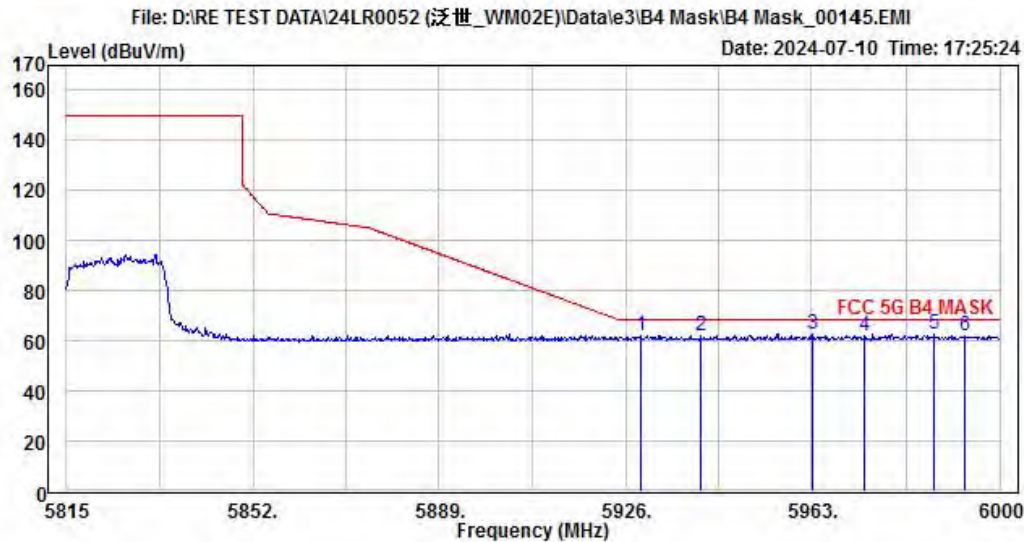


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11HE20 High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5929.145	53.54	8.31	61.85	68.20	-6.35 Vertical
2	5940.985	53.52	8.30	61.82	68.20	-6.38 Vertical
3 PP	5963.185	54.62	8.32	62.94	68.20	-5.26 Vertical
4	5973.175	53.59	8.34	61.93	68.20	-6.27 Vertical
5	5987.050	54.05	8.37	62.42	68.20	-5.78 Vertical
6	5993.155	53.40	8.40	61.80	68.20	-6.40 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

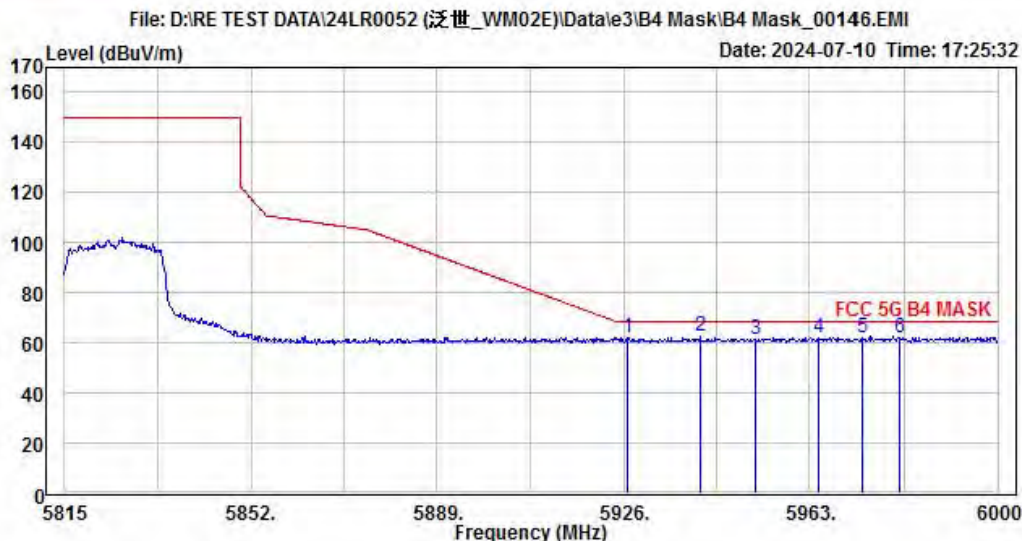


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02C
Mode : Wifi 5G Mask B4 802.11HE20 High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5926.925	54.04	8.32	62.36	68.20	-5.84 Horizontal
2 PP	5941.170	54.18	8.30	62.48	68.20	-5.72 Horizontal
3	5952.270	53.43	8.29	61.72	68.20	-6.48 Horizontal
4	5964.665	53.61	8.33	61.94	68.20	-6.26 Horizontal
5	5972.990	53.87	8.34	62.21	68.20	-5.99 Horizontal
6	5980.390	54.01	8.36	62.37	68.20	-5.83 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

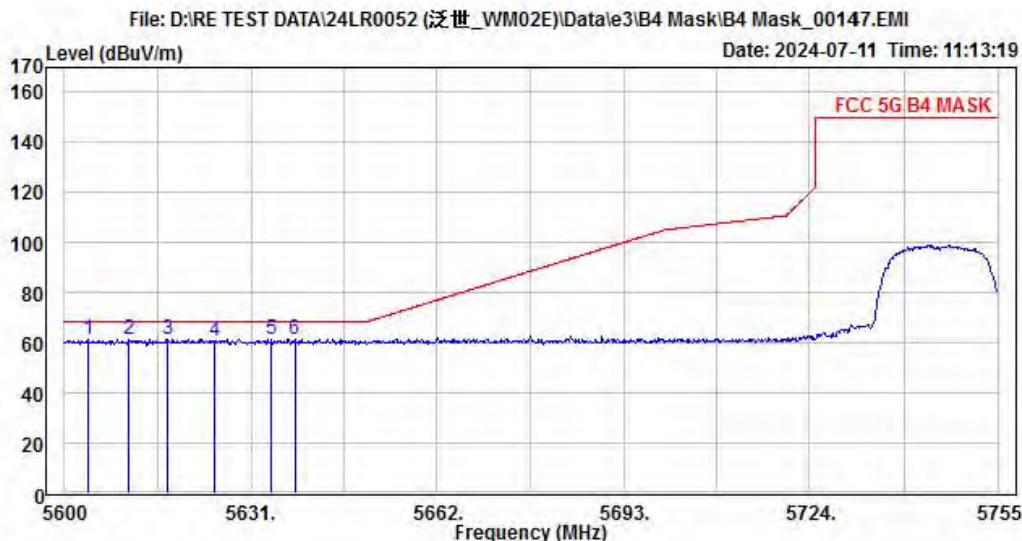


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11a Low Ch
Note :

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5603.875	53.67	7.61	61.28	68.20	-6.92	Vertical
2 PP	5610.540	53.98	7.63	61.61	68.20	-6.59	Vertical
3	5617.050	53.83	7.64	61.47	68.20	-6.73	Vertical
4	5624.955	53.25	7.67	60.92	68.20	-7.28	Vertical
5	5634.410	53.60	7.69	61.29	68.20	-6.91	Vertical
6	5638.285	53.83	7.71	61.54	68.20	-6.66	Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

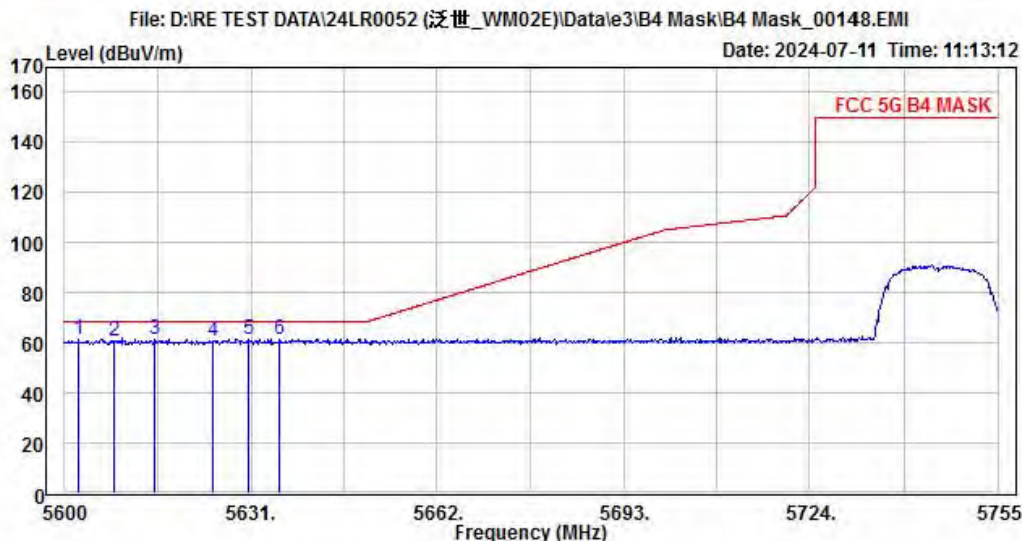


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11a Low Ch
Note :

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5602.325	53.87	7.60	61.47	68.20	-6.73	Horizontal
2	5608.215	53.29	7.63	60.92	68.20	-7.28	Horizontal
3	5614.880	53.56	7.64	61.20	68.20	-7.00	Horizontal
4	5624.800	53.25	7.67	60.92	68.20	-7.28	Horizontal
5 PP	5630.535	53.85	7.68	61.53	68.20	-6.67	Horizontal
6	5635.805	53.39	7.70	61.09	68.20	-7.11	Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

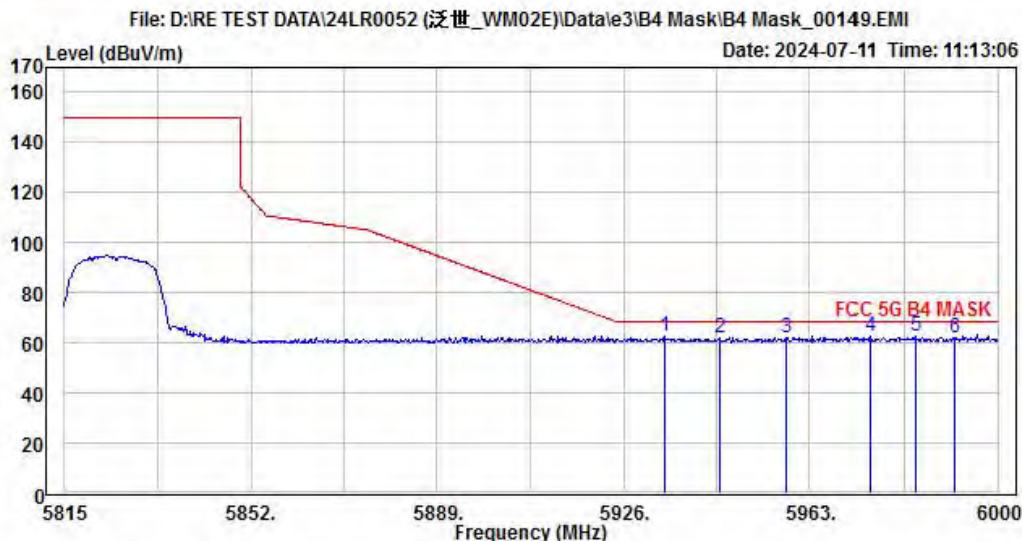


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11a High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5934.325	54.40	8.30	62.70	68.20	-5.50 Vertical
2	5945.055	53.80	8.29	62.09	68.20	-6.11 Vertical
3	5958.190	54.06	8.31	62.37	68.20	-5.83 Vertical
4	5974.655	54.17	8.34	62.51	68.20	-5.69 Vertical
5 PP	5983.720	54.64	8.37	63.01	68.20	-5.19 Vertical
6	5991.490	53.66	8.38	62.04	68.20	-6.16 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

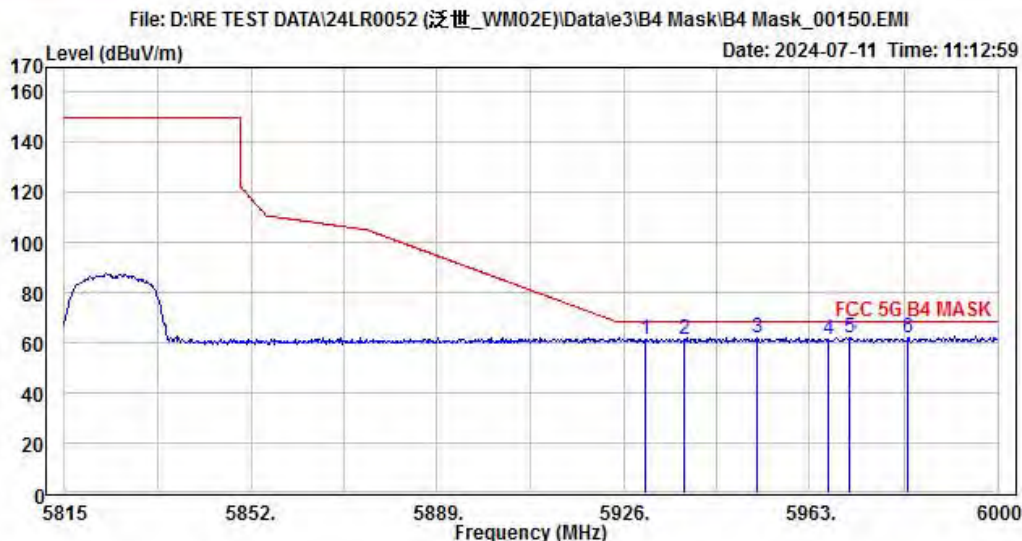


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11a High Ch
Note :

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5930.255	53.14	8.31	61.45	68.20	-6.75 Horizontal
2	5938.210	53.26	8.30	61.56	68.20	-6.64 Horizontal
3	5952.455	53.51	8.29	61.80	68.20	-6.40 Horizontal
4	5966.700	53.38	8.33	61.71	68.20	-6.49 Horizontal
5 PP	5970.955	54.00	8.34	62.34	68.20	-5.86 Horizontal
6	5982.240	53.78	8.36	62.14	68.20	-6.06 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

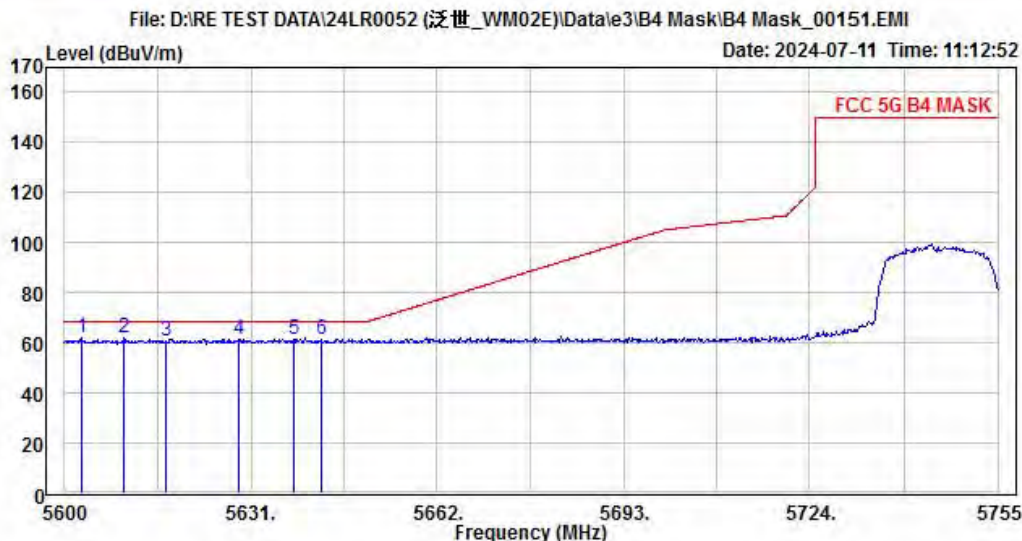


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11HT20 Low Ch
Note :

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 PP 5602.945	54.30	7.61	61.91	68.20	-6.29 Vertical
2 5609.920	54.17	7.63	61.80	68.20	-6.40 Vertical
3 5616.740	53.30	7.64	60.94	68.20	-7.26 Vertical
4 5628.985	53.53	7.68	61.21	68.20	-6.99 Vertical
5 5638.130	53.92	7.71	61.63	68.20	-6.57 Vertical
6 5642.780	53.92	7.71	61.63	68.20	-6.57 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

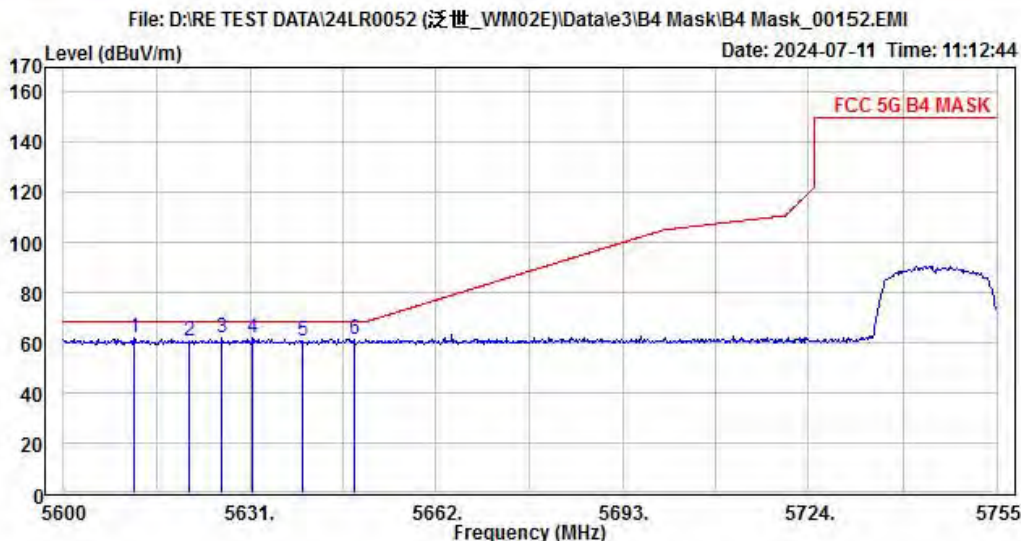


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11HT20 Low Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 PP 5611.625	54.64	7.63	62.27	68.20	-5.93	Horizontal
2 5620.770	53.31	7.65	60.96	68.20	-7.24	Horizontal
3 5626.350	54.12	7.67	61.79	68.20	-6.41	Horizontal
4 5631.465	54.08	7.68	61.76	68.20	-6.44	Horizontal
5 5639.680	53.34	7.70	61.04	68.20	-7.16	Horizontal
6 5648.360	53.75	7.72	61.47	68.20	-6.73	Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

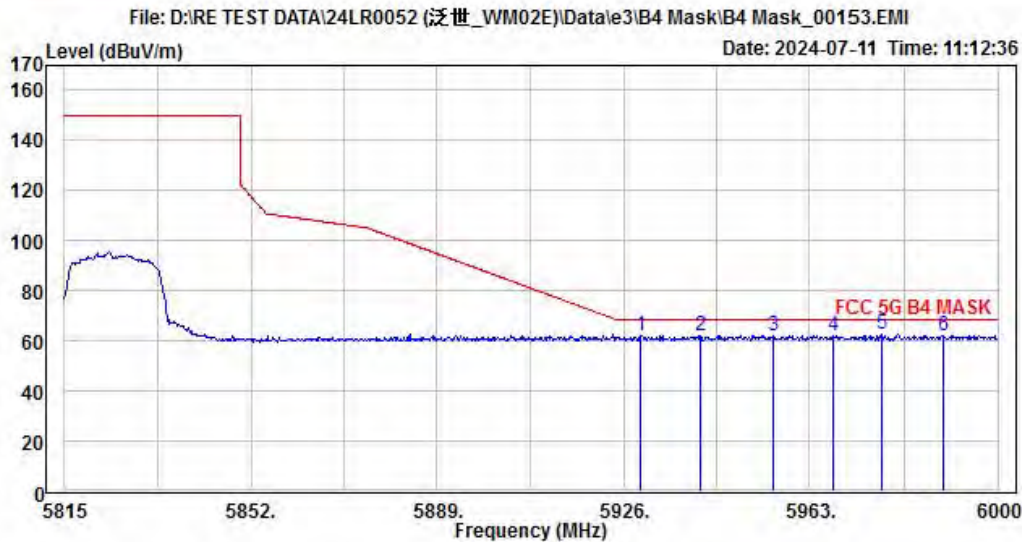


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11HT20 High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5929.515	53.95	8.31	62.26	68.20	-5.94 Vertical
2	5941.170	53.53	8.30	61.83	68.20	-6.37 Vertical
3	5955.785	53.76	8.30	62.06	68.20	-6.14 Vertical
4	5967.810	53.52	8.34	61.86	68.20	-6.34 Vertical
5 PP	5976.875	54.21	8.34	62.55	68.20	-5.65 Vertical
6	5989.085	53.58	8.38	61.96	68.20	-6.24 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

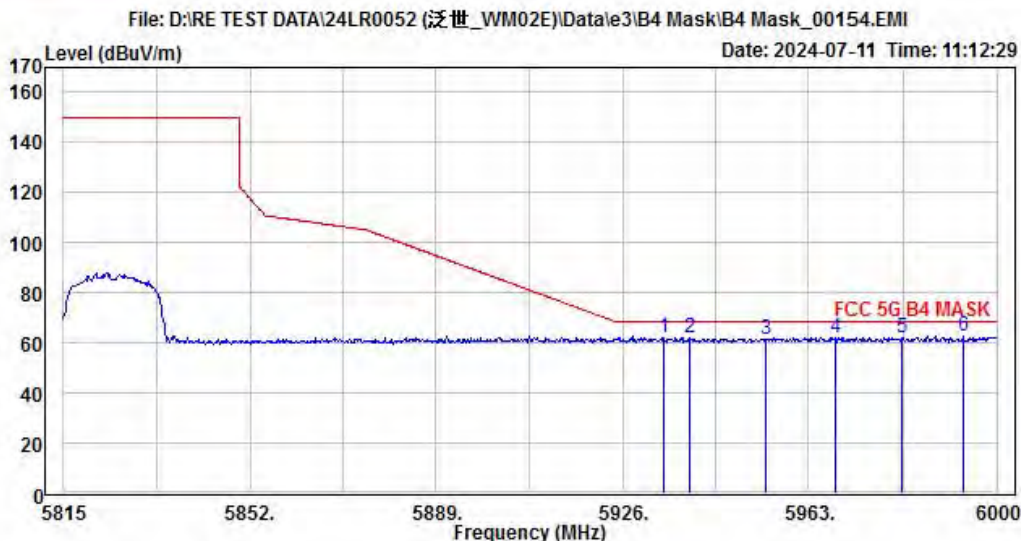


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11HT20 High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5934.325	53.96	8.30	62.26	68.20	-5.94 Horizontal
2	5939.505	53.57	8.30	61.87	68.20	-6.33 Horizontal
3	5954.490	53.34	8.30	61.64	68.20	-6.56 Horizontal
4	5968.180	53.90	8.34	62.24	68.20	-5.96 Horizontal
5	5981.315	53.58	8.36	61.94	68.20	-6.26 Horizontal
6 PP	5993.340	54.41	8.40	62.81	68.20	-5.39 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

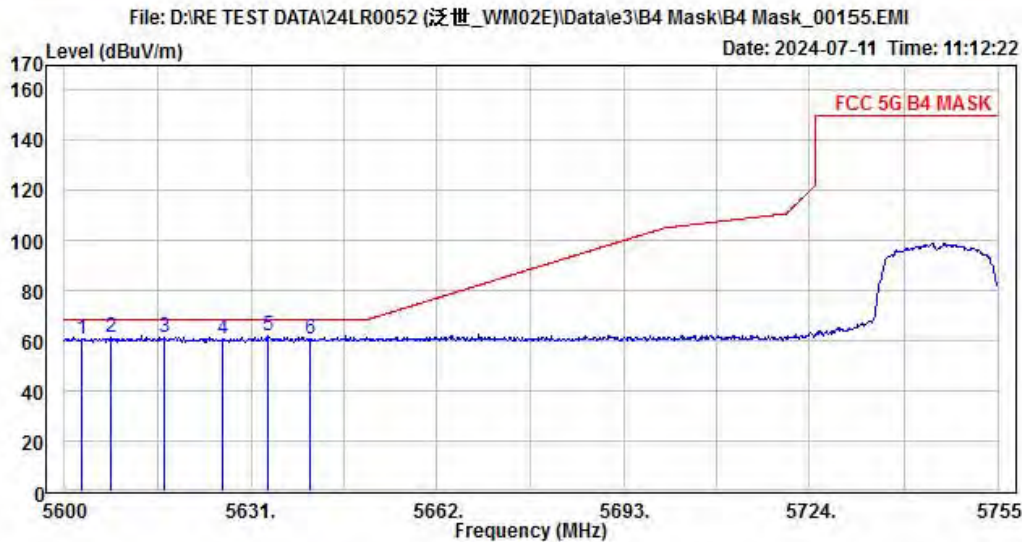


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11VHT20 Low Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5602.790	53.43	7.61	61.04	68.20	-7.16 Vertical
2	5607.595	54.10	7.63	61.73	68.20	-6.47 Vertical
3	5616.585	54.06	7.64	61.70	68.20	-6.50 Vertical
4	5626.195	53.33	7.67	61.00	68.20	-7.20 Vertical
5 PP	5633.790	54.25	7.69	61.94	68.20	-6.26 Vertical
6	5640.920	53.19	7.70	60.89	68.20	-7.31 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

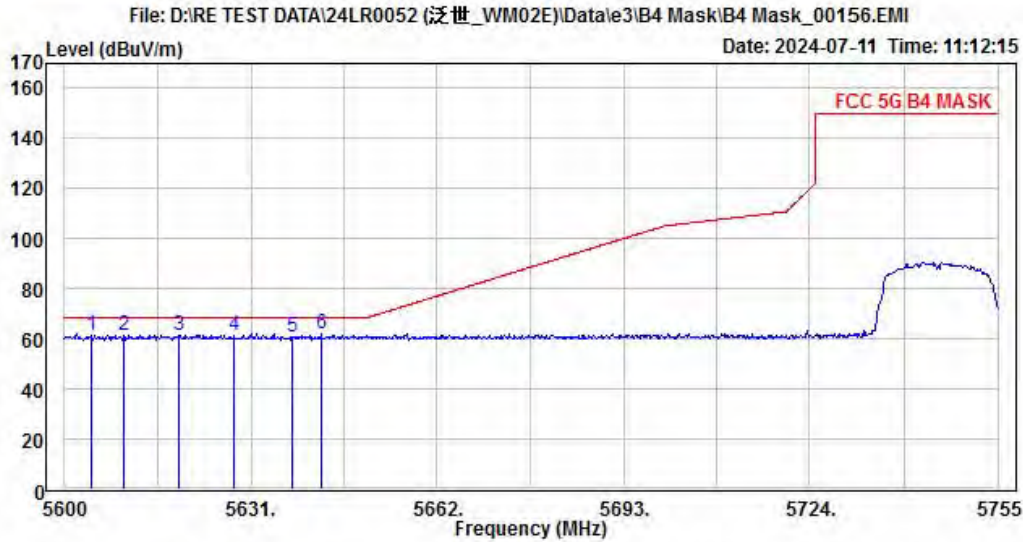


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11VHT20 Low Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5604.495	53.79	7.61	61.40	68.20	-6.80 Horizontal
2	5609.920	53.76	7.63	61.39	68.20	-6.81 Horizontal
3	5619.065	53.66	7.65	61.31	68.20	-6.89 Horizontal
4	5628.210	54.02	7.68	61.70	68.20	-6.50 Horizontal
5	5637.820	53.33	7.71	61.04	68.20	-7.16 Horizontal
6 PP	5642.625	54.51	7.71	62.22	68.20	-5.98 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

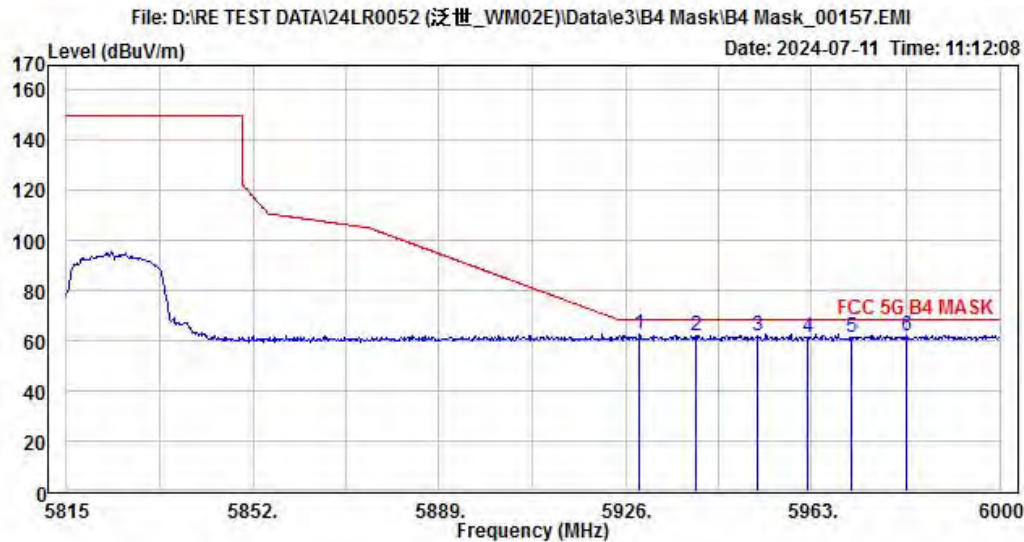


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11VHT20 High Ch
Note :

	Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 PP 5928.775	54.18	8.31	62.49	68.20	-5.71 Vertical
2 5939.875	53.71	8.30	62.01	68.20	-6.19 Vertical
3 5952.085	53.92	8.29	62.21	68.20	-5.99 Vertical
4 5962.075	53.25	8.31	61.56	68.20	-6.64 Vertical
5 5970.770	53.31	8.34	61.65	68.20	-6.55 Vertical
6 5981.500	53.54	8.36	61.90	68.20	-6.30 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

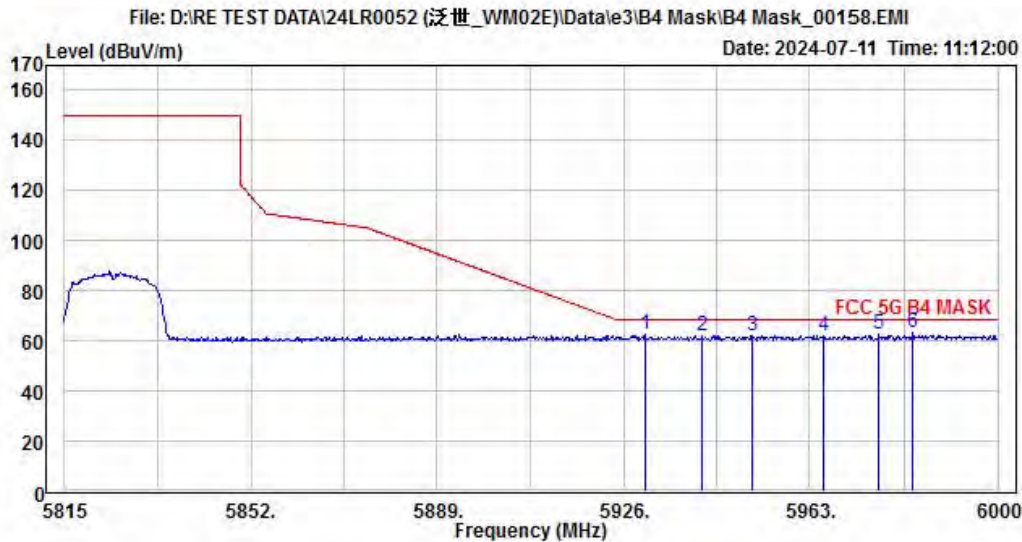


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11VHT20 High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5930.255	54.52	8.31	62.83	68.20	-5.37 Horizontal
2	5941.725	53.91	8.30	62.21	68.20	-5.99 Horizontal
3	5951.715	53.56	8.29	61.85	68.20	-6.35 Horizontal
4	5965.590	53.93	8.33	62.26	68.20	-5.94 Horizontal
5	5976.505	54.09	8.34	62.43	68.20	-5.77 Horizontal
6 PP	5983.165	54.80	8.37	63.17	68.20	-5.03 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

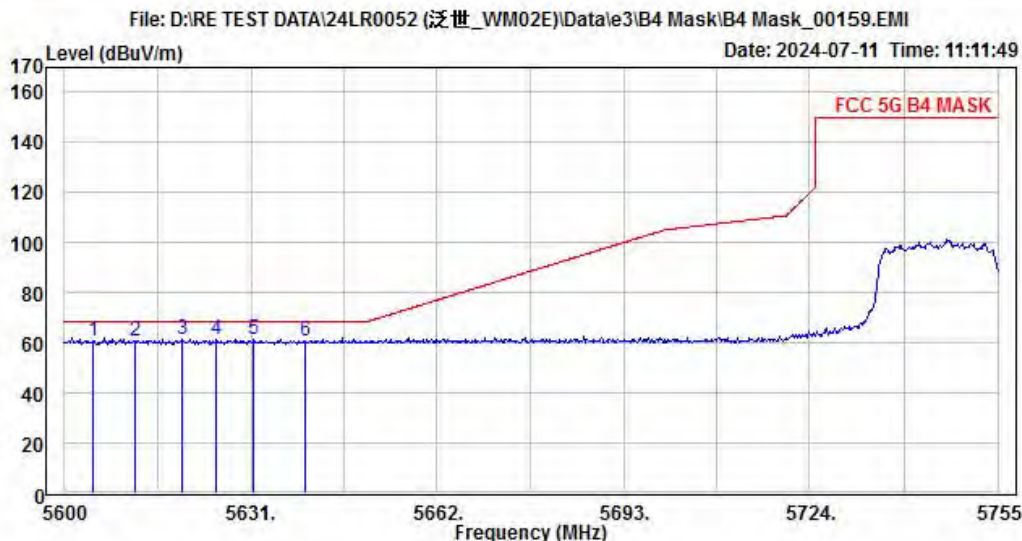


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11HE20 Low Ch
Note :

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5604.805	53.41	7.61	61.02	68.20	-7.18	Vertical
2	5611.625	53.09	7.63	60.72	68.20	-7.48	Vertical
3 PP	5619.530	53.88	7.65	61.53	68.20	-6.67	Vertical
4	5625.265	53.42	7.67	61.09	68.20	-7.11	Vertical
5	5631.465	53.79	7.68	61.47	68.20	-6.73	Vertical
6	5639.990	53.11	7.70	60.81	68.20	-7.39	Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03)2638888 ; Fax: (03)2638899
Web: www.isl.com.tw

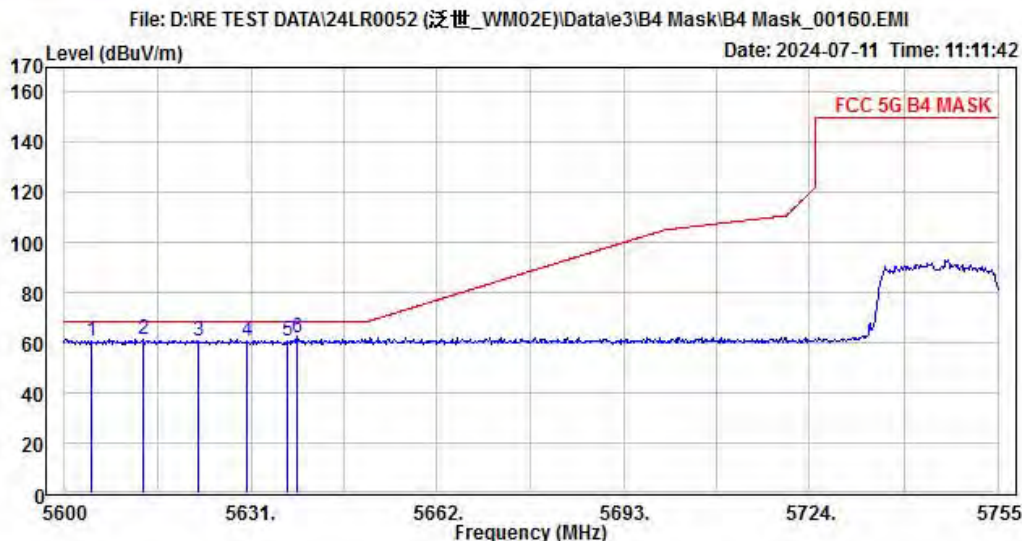


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11HE20 Low Ch
Note :

	Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	5604.340	53.33	7.61	60.94	68.20	-7.26 Horizontal
2	5613.020	53.62	7.64	61.26	68.20	-6.94 Horizontal
3	5622.165	53.21	7.66	60.87	68.20	-7.33 Horizontal
4	5630.380	53.11	7.68	60.79	68.20	-7.41 Horizontal
5	5637.045	53.22	7.70	60.92	68.20	-7.28 Horizontal
6 PP	5638.595	54.14	7.71	61.85	68.20	-6.35 Horizontal



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

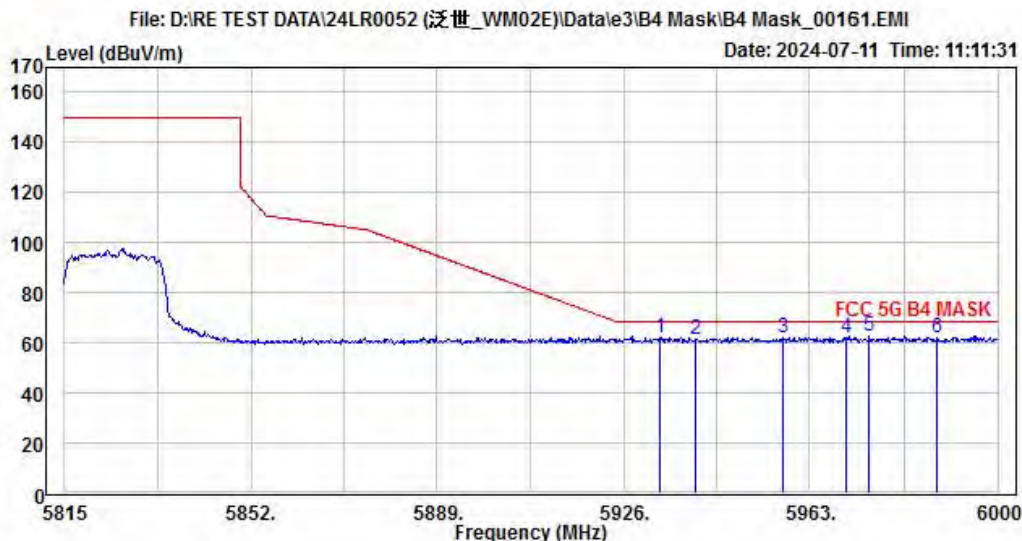


Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 V 1-18G.csv Vertical
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11HE20 High Ch
Note :

	Read			Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5933.400	53.64	8.30	61.94	68.20	-6.26 Vertical
2	5940.430	53.33	8.30	61.63	68.20	-6.57 Vertical
3	5957.820	53.65	8.31	61.96	68.20	-6.24 Vertical
4	5970.215	53.54	8.34	61.88	68.20	-6.32 Vertical
5 PP	5974.470	54.06	8.34	62.40	68.20	-5.80 Vertical
6	5987.975	53.71	8.38	62.09	68.20	-6.11 Vertical



International Standard Laboratory Corp.
Company Address: No. 120, Lane 180, Hsin Ho Rd.
Lung-Tan Dist., Tao Yuan City 325, Taiwan
Tel: (03) 2638888 ; Fax: (03) 2638899
Web: www.isl.com.tw

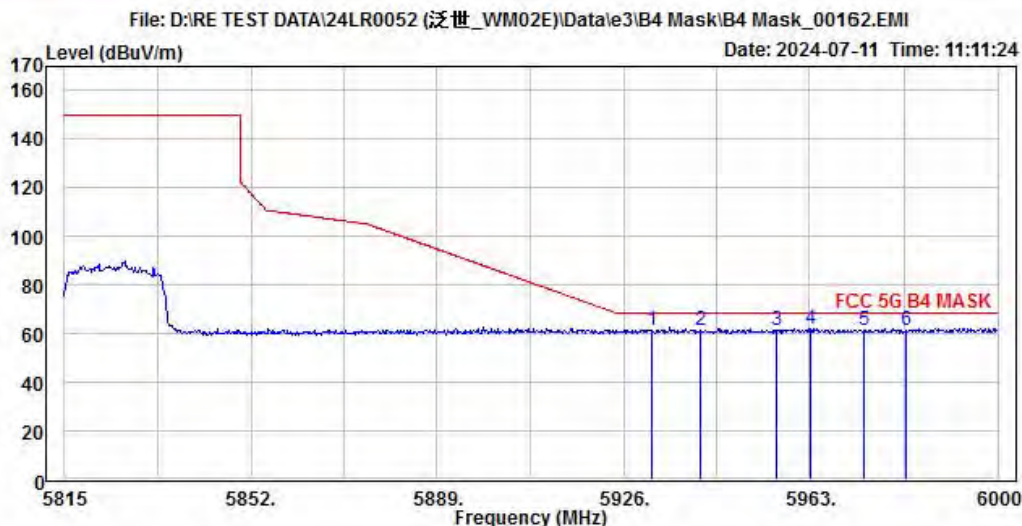

Condition: limit\FCC\FCC 5G B4 MASK.csv 3m factor\966 3117 H 1-18G.csv Horizontal
: RBW:1000kHz VBW:3000kHz SWT:Auto DET:Positive
EUT : WM02E
Mode : Wifi 5G Mask B4 802.11HE20 High Ch
Note :

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	5931.735	53.19	8.31	61.50	68.20	-6.70	Horizontal
2	5941.170	53.22	8.30	61.52	68.20	-6.68	Horizontal
3	5956.340	53.30	8.30	61.60	68.20	-6.60	Horizontal
4 PP	5963.185	53.72	8.32	62.04	68.20	-6.16	Horizontal
5	5973.360	53.35	8.34	61.69	68.20	-6.51	Horizontal
6	5981.685	53.34	8.36	61.70	68.20	-6.50	Horizontal

10. Transmission in the Absence of Data

10.1. Standard Applicable

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

10.2. Result:

Pass, the device is compliance with 802.11 a/ b/g/n ac standard, the short control signal is appear during no transmission period.

11. Antenna Requirement

11.1. Standard Applicable

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

11.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is below table, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Antenna Designation:

	Antenna Type	Brand	Model	Peak Gain (dBi)	Frequency Range (MHz)	Connector Type
1	Dipole	Fanstel	ANT036	2.91	5150-5850	RP.SMA.J
2	Chip	One Wave	7030	5.40	5150-5850	N/A
3	PCB	Fanstel	F Type	0.14	5150-5850	N/A

12. TPC and DFS Measurement

12.1. TPC: Standard Applicable

According to §15.407(h)(1), Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

12.2. DFS: Standard Applicable

According to §15.407(h)(2), Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection.

13.2.1. Limit

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Slave	Client(without radar detection)	Client(with radar detection)
Non-occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required
U-NII Detection Band-width	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Slave	Client(without radar detection)	Client(with radar detection)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes

Refer to KDB Number: 905462 APPENDIX B COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5.25-5.35 GHz AND 5.47-5.725 GHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION.

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

Table 4: DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 80% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: The instant that the <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> begins is as follows: - For the Short Pulse Radar Test Signals this instant is the end of the <i>Burst</i>. - For the Frequency Hopping radar Test Signal, this instant is the end of the last radar <i>Burst</i> generated. - For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the <i>Radar Waveform</i>. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Radar Test Waveforms
Short Pulse Radar

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right), \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. For Short Pulse Radar Type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms

Long Pulse Radar

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Frequency Hopping Radar


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm: 3


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

13.2.2. Test Setup


Setup for Master with injection at the Master

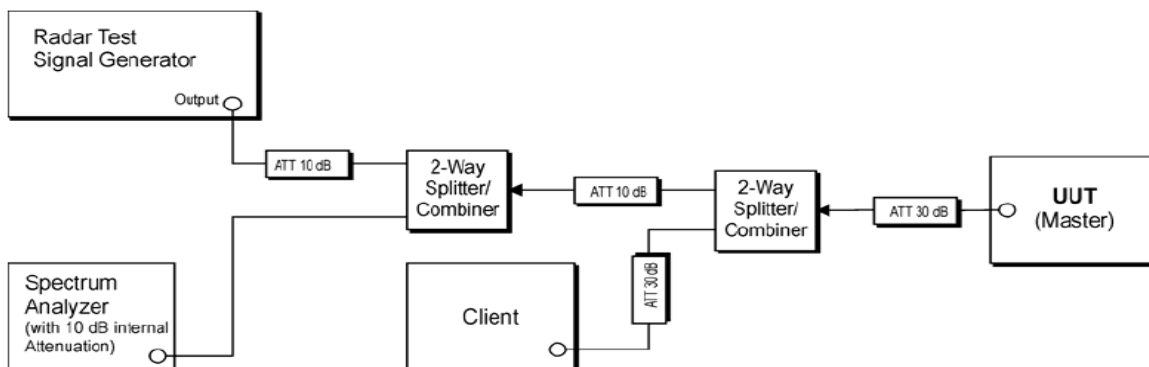

Setup for Client with injection at the Master

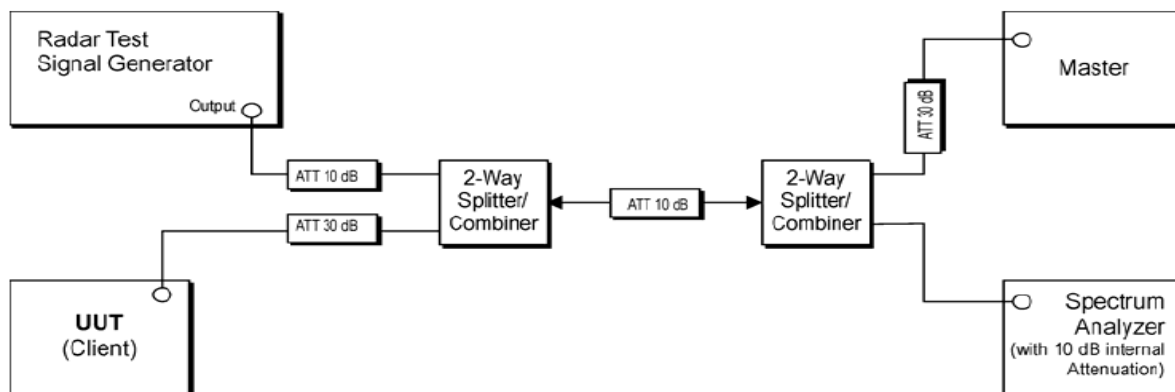

Setup for Client with injection at the Client

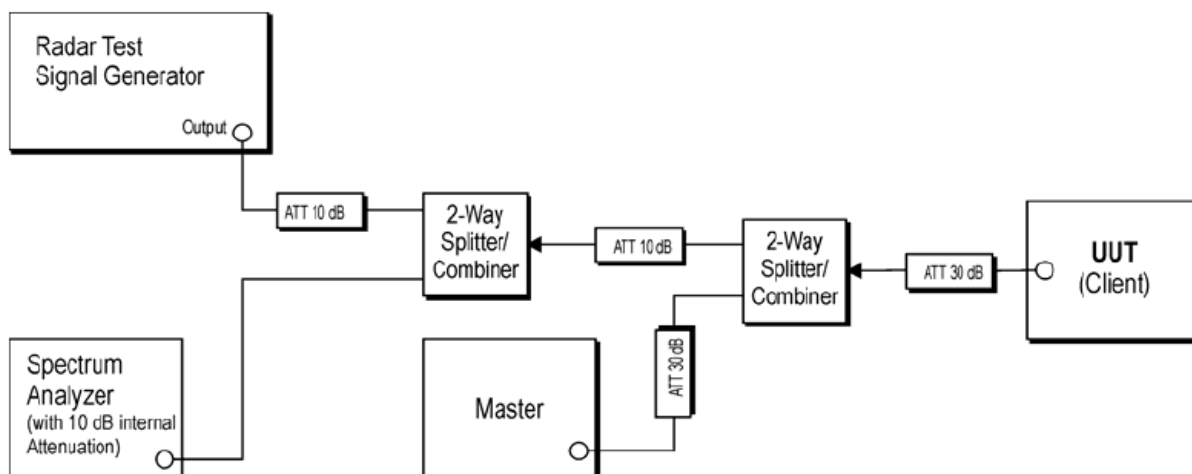

Note: device under test are configured with AP as IP based by streaming MPEG video, 30 frames per seconds

12.3. Test Equipment Used:

Location Conducted	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conducted (DFS)	AP Router	Synology	RT1900ac	15B0N3N369502	NA	NA
Conducted (DFS)	USB Adapter	D-Link	DWA-182	QBYS1D8000073	NA	NA
Conducted (DFS)	Direction Coupler	Krytar	1821S	1461	NA	NA
Conducted (DFS)	Splitter	Mini-Circuits	ZN2PD-63-S	UU97201111	NA	NA
Conducted (DFS)	Attenuator	Woken	Watt-65m3502	11051601	NA	NA
Conducted (DFS)	Cable	Draka	NA	NA	NA	NA
Conducted (TS8997)	Wideband Radio Comm. Tester	R&S	CMW500	168811	09/13/2023	09/13/2024
Conducted (TS8997)	UP/DOWN converter	R&S	CMW-Z800A	100566	09/13/2023	09/13/2024
Conducted (TS8997)	Signal Generator	R&S	SMB100A	183701	09/14/2023	09/14/2024
Conducted (TS8997)	Vector Signal Generator	R&S	SMM100A	101908	09/13/2023	09/13/2024
Conducted (TS8997)	Signal analyzer 40GHz	R&S	FSV40	101884	09/13/2023	09/13/2024
Conducted (TS8997)	OSP150 extension unit CAM-BUS	R&S	OSP150	101107	09/15/2023	09/15/2024
Conducted (TS8997)	Test Software	R&S	EMC32 Ver: 12.00.00	NA	NA	NA

12.3.1. Description of EUT :

EUT operates over the 5250-5350MHz and 5470-5725MHz ranges and EUT is a slave device (client equipment) w/o radar detection and DFS capability.

The EUT utilizes the 802.11n architecture, with a nominal channel bandwidth of 80MHz WLAN traffic is generated by streaming the mpeg file from the master to slave in full monitor video mode using the media player.

The rated output power of the master unit is >23dBm(EIRP).therefore the required interference threshold level is -64dBm. The master device as employed for the applicable DFS test is router whose FCC ID= YOR-RT1900AC for Synology

12.4. Test results

Applicability of DFS requirements during normal operation

Requirement	Operational Mode: Client(without radar detection)	
	Test Result	Remark
Non-occupancy Period	No transmission in 30mins. (test results), pass (Remark)	Pass
DFS Detection Threshold	N/A	N/A
Channel Closing Transmission Time	Less than 200ms, Refer to next page for plots.	Pass
Channel Move Time	Less than 10s, Refer to next page for plots.	Pass
U-NII Detection Bandwidth	N/A	N/A

Input Level to Master AP= -64dBm

DFS In-Service Monitoring (5500 MHz;20 MHz)

Measurement Summary

DUT Frequency (MHz)	Radar Type No.	Type of Measurement value	Overall Result
5500.000000	0	First of all Transmitt Test	---
5500.000000	0	Channel Move Time	PASS
5500.000000	0	Channel Closing Transmission Time	PASS
5500.000000	0	Non-occupancy period	PASS

(continuation of the "Measurement Summary" table from column 4 ...)

DUT Frequency (MHz)	Overall Comment
5500.000000	not performed / not finished
5500.000000	
5500.000000	
5500.000000	

Channel Move Time Detailed Result

DUT Frequency (MHz)	Radar Type No.	CMT Tx Time (s)	CMT Limit (s)	CMT Result	CMT Comment
5500.000000	0	4.030	10.000	PASS	Tx Time value is last trailing edge found within sweep. See Note 1.

Channel Closing Transmission Time Detailed Results

DUT Frequency (MHz)	Radar Type No.	CCTT Type of Value	CCTT No. of Pulses found	CCTT Tx Time (ms)
5500.000000	0	first 200 ms	35	5.964
5500.000000	0	remaining 10.0 second(s) period	38	18.136

(continuation of the "Channel Closing Transmission Time Detailed Results" table from column 5 ...)

DUT Frequency (MHz)	CCTT Tx Time Limit (ms)	CCTT Result	CCTT Comment
5500.000000	200.000	PASS	See Note 1.
5500.000000	60.000	PASS	See Note 1.


Non-occupancy period Detailed Results

DUT Frequency (MHz)	Radar Type No.	NOP No. of Pulses found	NOP No. of Pulses Limit	NOP Tx Time (s)	NOP Tx Time Limit (s)	NOP Result
5500.000000	0	0	0	0.000	0.000	PASS


Transmitting Test Detailed Results

DUT Frequency (MHz)	Tx-Test Result	Tx-Test Comment
5500.000000	---	not performed / not finished


Channel Move Time

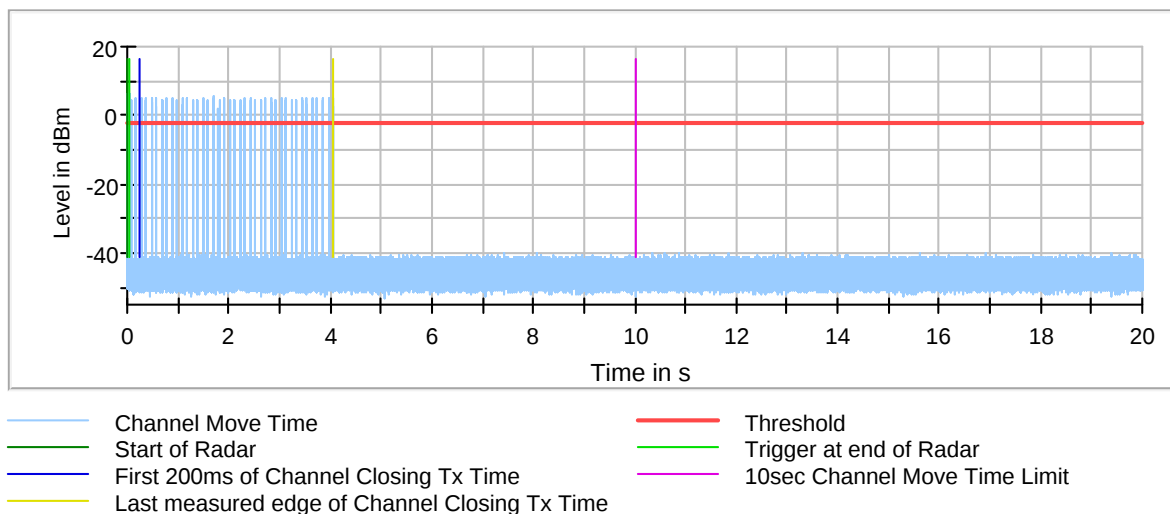

Channel Move Time first 200ms

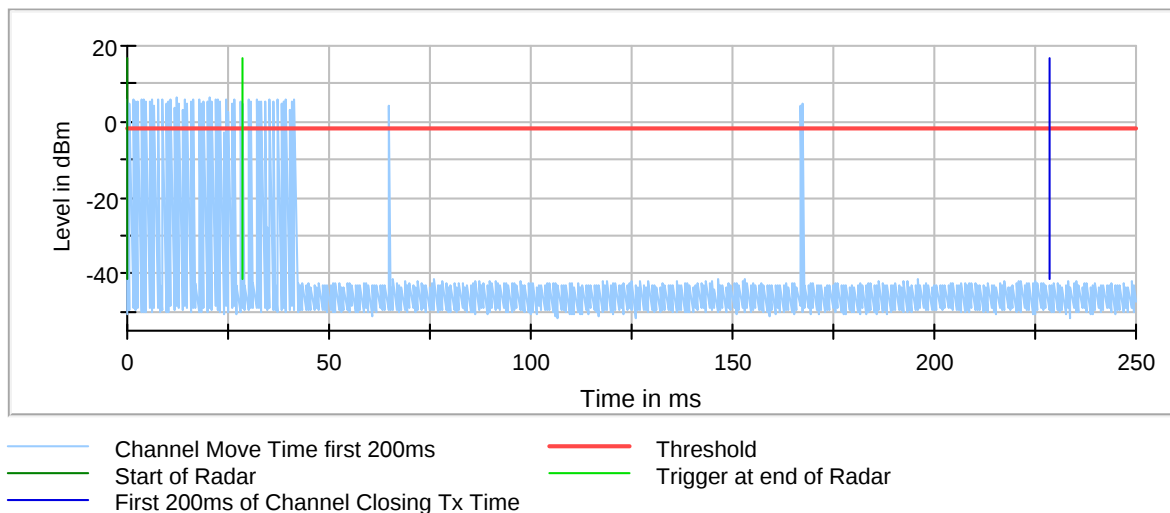

Non-occupancy period

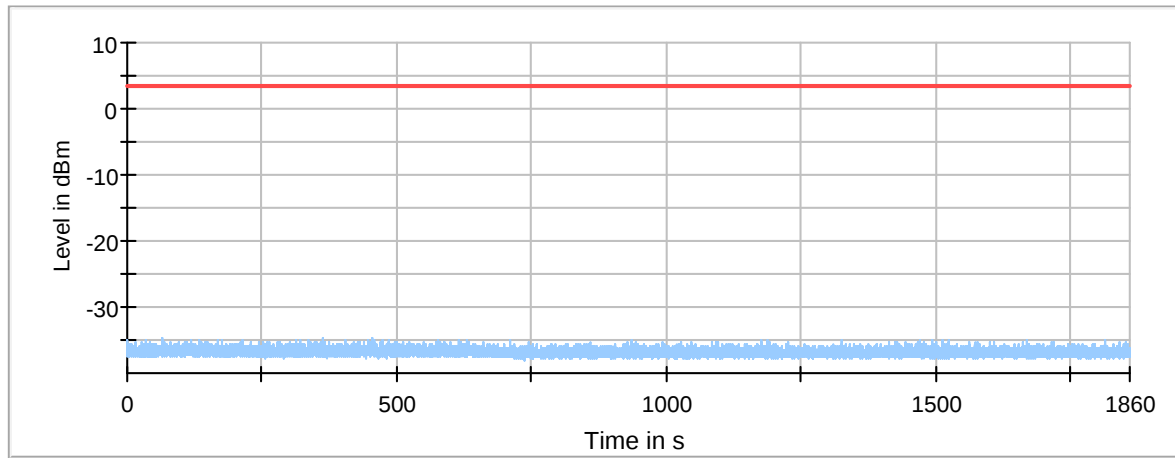

— Non-occupancy period — Threshold