

FCC TEST REPORT
FOR
Matsunichi Communication Holdings R&D (Shenzhen) Co., Ltd.

Mobile Hard Drive
Model No.: DM253

Prepared for : Matsunichi Communication Holdings R&D (Shenzhen) Co., Ltd.
Address : 43B/F, INTERNAL CHAMBER OF COMMERCE TOWER,
FUHUA RD3 CBD, FUTIAN DISTRICT, SHENZHEN, CHINA
Tel: (86) 755-88315408
Fax: (86) 755-88313194

Prepared By : Anbotek Compliance Laboratory Limited
Address : 2F, Langfeng Building, Kefa Road North, Hi-tech Industrial Park,
Nanshan District, Shenzhen 518057, China
Tel: (86) 755-26014771
Fax: (86) 755-26014772

Report Number : 201007686F
Date of Test : Jul. 12~14, 2010
Date of Report : Jul. 16, 2010

TABLE OF CONTENTS

Description

	Page
Test Report	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Description of Test Facility	5
1.3. Measurement Uncertainty	5
2. POWER LINE CONDUCTED MEASUREMENT	6
2.1. Test Equipment	6
2.2. Block Diagram of Test Setup	6
2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15 Class B)	6
2.4. Configuration of EUT on Measurement.....	6
2.5. Operating Condition of EUT.....	7
2.6. Test Procedure.....	7
2.7. Power Line Conducted Emission Measurement Results.....	7
3. RADIATED EMISSION MEASUREMENT.....	10
3.1. Test Equipment	10
3.2. Block Diagram of Test Setup	10
3.3. Radiated Emission Limit (Subpart B Class B)	11
3.4. EUT Configuration on Measurement	11
3.5. Operating Condition of EUT	11
3.6. Test Procedure	11
3.7. Radiated Emission Measurement Results	12
4. PHOTOGRAPH.....	15
4.1. Photo of Power Line Conducted Emission Test.....	15
4.2. Photo of Radiated Emission Test	15

APPENDIX I (Photos of EUT) (3 Pages)

TEST REPORT

Applicant : Matsunichi Communication Holdings R&D (Shenzhen) Co., Ltd.
Manufacturer : Goldland Electronics (Shenzhen) Co., Ltd.
EUT : Mobile Hard Drive
Model No. : DM253
Rating : DC 5V via USB Port
Trade Mark : Matsunichi

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart B 15.107&15.109-2007 & ANSI C63.4-2009


The device described above is tested by Anbotek Compliance Laboratory Limited To determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited Is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited


Date of Test : Jul. 12~14, 2010



Prepared by : Junle xu
(Engineer)



Reviewer : Cao. Xiang
(Project Manager)



Approved & Authorized Signer : Tom. Chen
(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : Mobile Hard Drive
Model Number : DM253
Test Power Supply : AC 120V, 60Hz hqt'RE
Notebook PC : Manufacturer: IBM
M/N: 2373
S/N: 99-OL5HH
CE , FCC: DOC
Applicant : Matsunichi Communication Holdings R&D (Shenzhen) Co., Ltd.
Address : 43B/F, INTERNAL CHAMBER OF COMMERCE TOWER, FUHUA RD3 CBD, FUTIAN DISTRICT, SHENZHEN, CHINA
Manufacturer : Goldland Electronics (Shenzhen) Co., Ltd.
Address : Matsunichi Hi-Tech Bld, South of Chuangjing Street, Lanzhu Road, Longgang Industrial Zone, Shenzhen, China
Date of Sample received : Jul. 10, 2010
Date of Test : Jul. 12~14, 2010

1.2. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 607248

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 607248, November 12, 2008.

IC-Registration No.: 8058A

Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, November 12, 2008.

Test Location

All Emissions tests were performed

Anbotek Compliance Laboratory Limited. at 2F, Langfeng Building, Kefa Road North, Hi-tech Industrial Park, Nanshan District, Shenzhen 518057, China

1.3. Measurement Uncertainty

Radiation Uncertainty : $Ur = 4.3\text{dB}$

Conduction Uncertainty : $Uc = 2.7\text{dB}$

2. POWER LINE CONDUCTED MEASUREMENT

2.1. Test Equipment


The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2009	1 Year
2.	Artificial Mains	Rohde & Schwarz	ENV216	10055	Nov. 12, 2009	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	N/A	N/A
4.	EMI Test Software	R/S	N/A	N/A	N/A	N/A
5.	Coaxial cable	ANBOTEK	N/A	N/A	Nov. 05, 2009	1 Year

2.2. Block Diagram of Test Setup

2.2.1. Block diagram of connection between the EUT and simulators

2.3.1.1. For Data Communicate Mode.

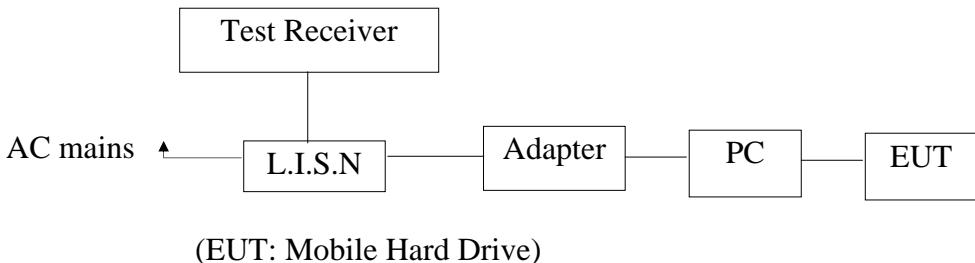

2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15

Class B)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.4. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission

Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Mobile Hard Drive
Model Number : DM253
Applicant : Matsunichi Communication Holdings R&D (Shenzhen) Co., Ltd.

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown as Section 2.2.
- 2.5.2. Turn on the power of all equipment.
- 2.5.3. Let the EUT work in test mode (Data Communicate) and measure it.

2.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2009 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 2.7.

2.7. Power Line Conducted Emission Measurement Results

PASS.


The frequency range from 150KHz to 30 MHz is investigated.

The test curves Please refer the following pages.

CONDUCTED EMISSION TEST DATA

EUT: Mobile Hard Drive M/N: DM253
 Operating Condition: Data Communicate
 Test Site: 1# Shielded Room
 Operator: Juice.Xu
 Test Specification: AC 120V/60Hz ± 10%
 Comment: Live Line
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

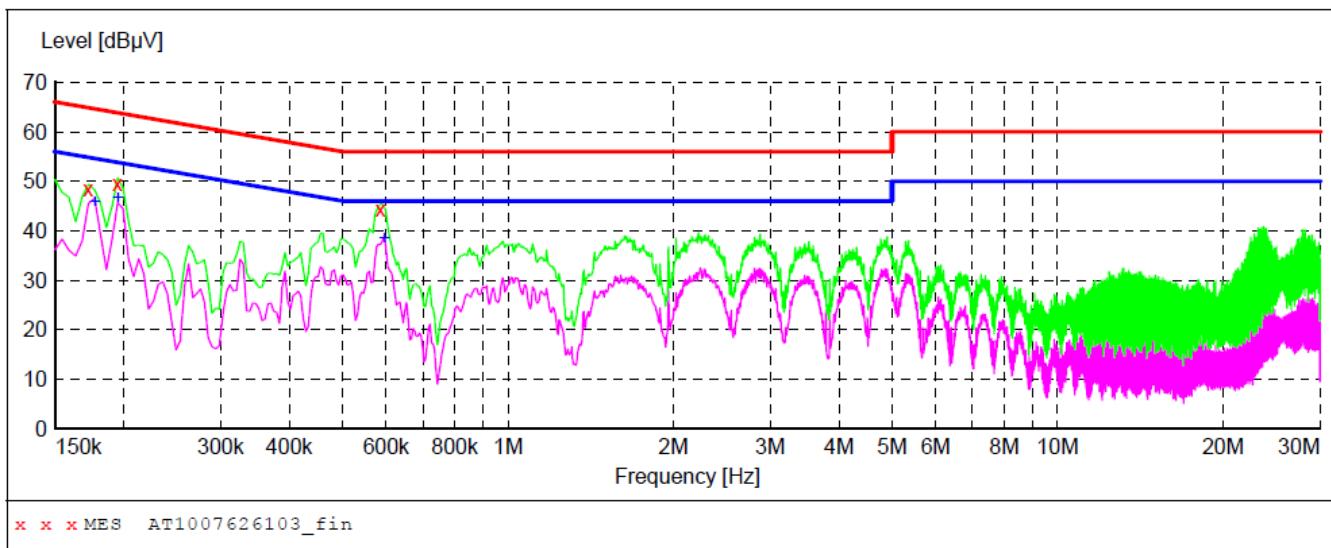**MEASUREMENT RESULT: "AT1007626103_fin"**

7/13/2010 9:49PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.172500	48.40	10.9	65	16.4	QP	L1	GND
0.195000	49.40	10.7	64	14.4	QP	L1	GND
0.586500	44.20	9.9	56	11.8	QP	L1	GND

MEASUREMENT RESULT: "AT1007626103_fin2"


7/13/2010 9:49PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.177000	46.00	10.8	55	8.6	AV	L1	GND
0.195000	46.80	10.7	54	7.0	AV	L1	GND
0.595500	38.50	9.9	46	7.5	AV	L1	GND

CONDUCTED EMISSION TEST DATA

EUT: Mobile Hard Drive M/N: DM253
 Operating Condition: Data Communicate
 Test Site: 1# Shielded Room
 Operator: Juice.Xu
 Test Specification: AC 120V/60Hz ± 10%
 Comment: Neutral Line
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

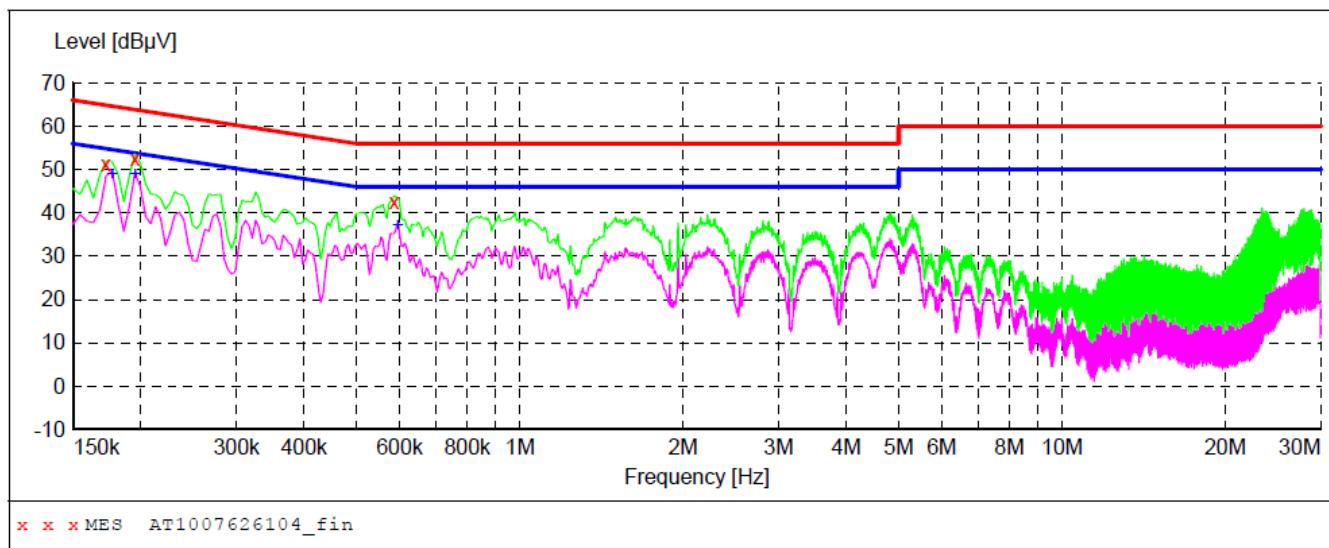**MEASUREMENT RESULT: "AT1007626104_fin"**

7/13/2010 9:46PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.172500	51.30	10.9	65	13.5	QP	N	GND
0.195000	52.30	10.7	64	11.5	QP	N	GND
0.586500	42.50	9.9	56	13.5	QP	N	GND

MEASUREMENT RESULT: "AT1007626104_fin2"

7/13/2010 9:46PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.177000	49.20	10.8	55	5.4	AV	N	GND
0.195000	49.10	10.7	54	4.7	AV	N	GND
0.595500	37.30	9.9	46	8.7	AV	N	GND

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment

The following test equipments are used during the radiated emission measurement:

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	SHURPLE	ESPI	101604	Nov. 12, 2009	1 Year
2.	Bilog Antenna	Schwarzbeck	VULB9163	100015	Nov. 12, 2009	1 Year
3.	Pre-amplifier	Compliance Direction	PAP-0203	22008	Nov. 12, 2009	1 Year
4.	EMI Test Software	SHURPLE	N/A	N/A	N/A	N/A
5.	Coaxial cable	ANBOTEK	N/A	N/A	N/A	N/A

3.2. Block Diagram of Test Setup

3.2.1. Block diagram of connection between the EUT and simulators


3.2.1.1. For Data Communicate Mode.



(EUT: Mobile Hard Drive)

3.2.2. Anechoic Chamber Test Setup Diagram

ANTENNA TOWER

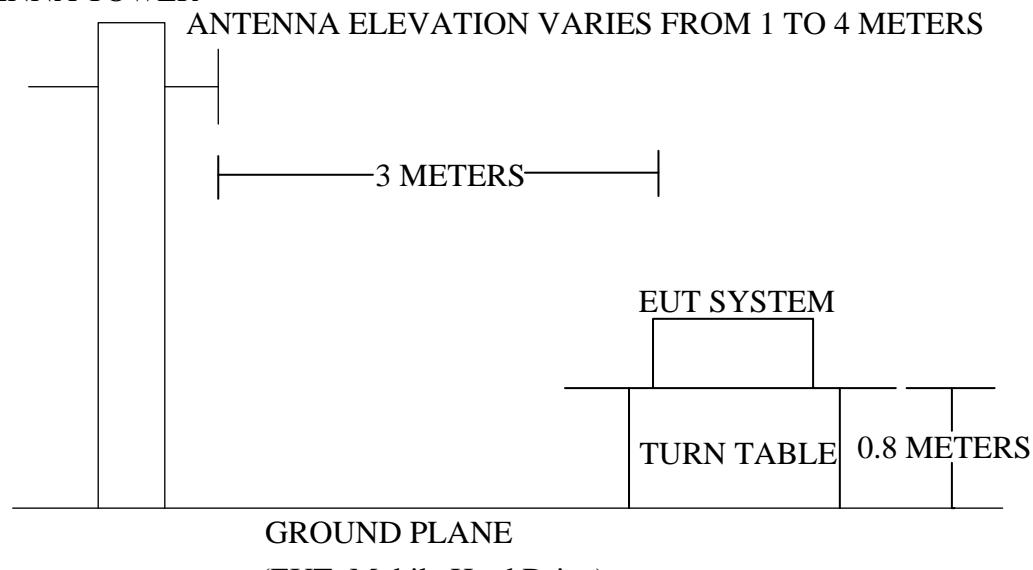

3.3. Radiated Emission Limit (Subpart B Class B)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0

Remark : (1) Emission level (dB) μ V = 20 log Emission level μ V/m
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Measurement

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

EUT : Mobile Hard Drive
 Model Number : DM253
 Applicant : Matsunichi Communication Holdings R&D (Shenzhen) Co., Ltd.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2.
 3.5.2. Let the EUT work in test mode (Data Communicate) and measure it.

3.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (Trilog Broadband Antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009 on radiated emission measurement.

The bandwidth of the EMI test receiver (ESPI) is set at 120kHz.

The frequency range from 30MHz to 1000MHz is checked.

The test mode (Data Communicate) is tested in chamber and all the test results are listed in Section 3.7.

3.7. Radiated Emission Measurement Results

PASS.

The test curves Please refer the following pages.


Remarks: All measurements were carried out in peak mode. As long as the values stay under the limit line 6dB, No QP measurement are carried out.

**Anbotek Compliance Laboratory Limited**

2/F, Langfeng Building, Kefa Road North, Hi-tech Industrial
Park, Nanshan District, Shenzhen 518057, China

Tel: (86)755-26066365
Fax: (86)755-26014772
Http://www.anbotek.com

Job No.:	AT1007626F	Polarization:	Horizontal
Standard:	(RE)FCC Part 15_class B_3m	Power Source:	DC 5V via USB Port
Test item:	Radiation Test	Date:	2010/07/13
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	20:38:40
EUT:	Mobile Hard Drive	Test By:	Juice.Xu
Model:	DM253	Distance:	3m
Note:	Data Communicate Mode		

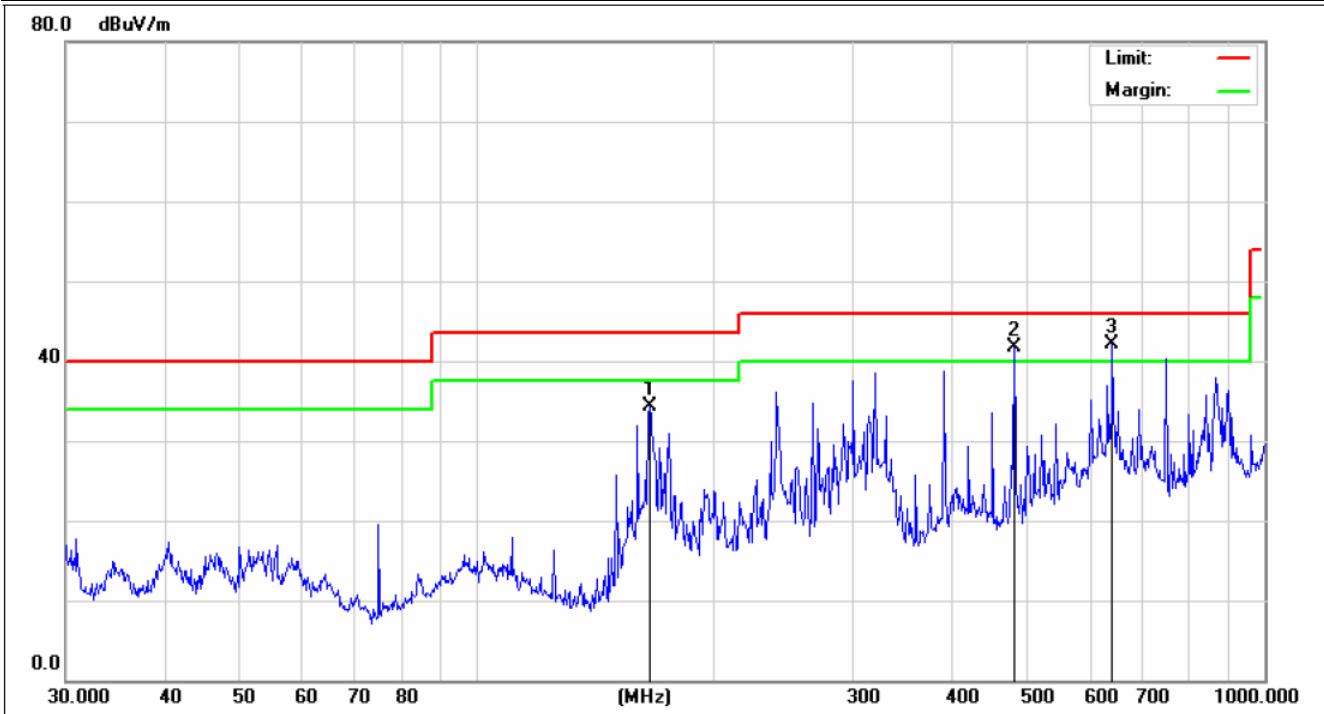


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Remark
1	165.4866	60.62	-26.30	34.32	43.50	-9.18	QP
2	480.5276	58.63	-16.90	41.73	46.00	-4.27	QP
3	640.6109	55.33	-13.15	42.18	46.00	-3.82	QP


Anbotek Compliance Laboratory Limited

2/F, Langfeng Building, Kefa Road North, Hi-tech Industrial Park, Nanshan District, Shenzhen 518057, China

 Tel: (86)755-26066365
 Fax: (86)755-26014772
 Http://www.anbotek.com

Job No.:	AT1007626F	Polarization:	Vertical
Standard:	(RE)FCC Part 15_class B_3m	Power Source:	DC 5V via USB Port
Test item:	Radiation Test	Date:	2010/07/13
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	20:33:39
EUT:	Mobile Hard Drive	Test By:	Juice.Xu
Model:	DM253	Distance:	3m
Note:	Data Communicate Mode		

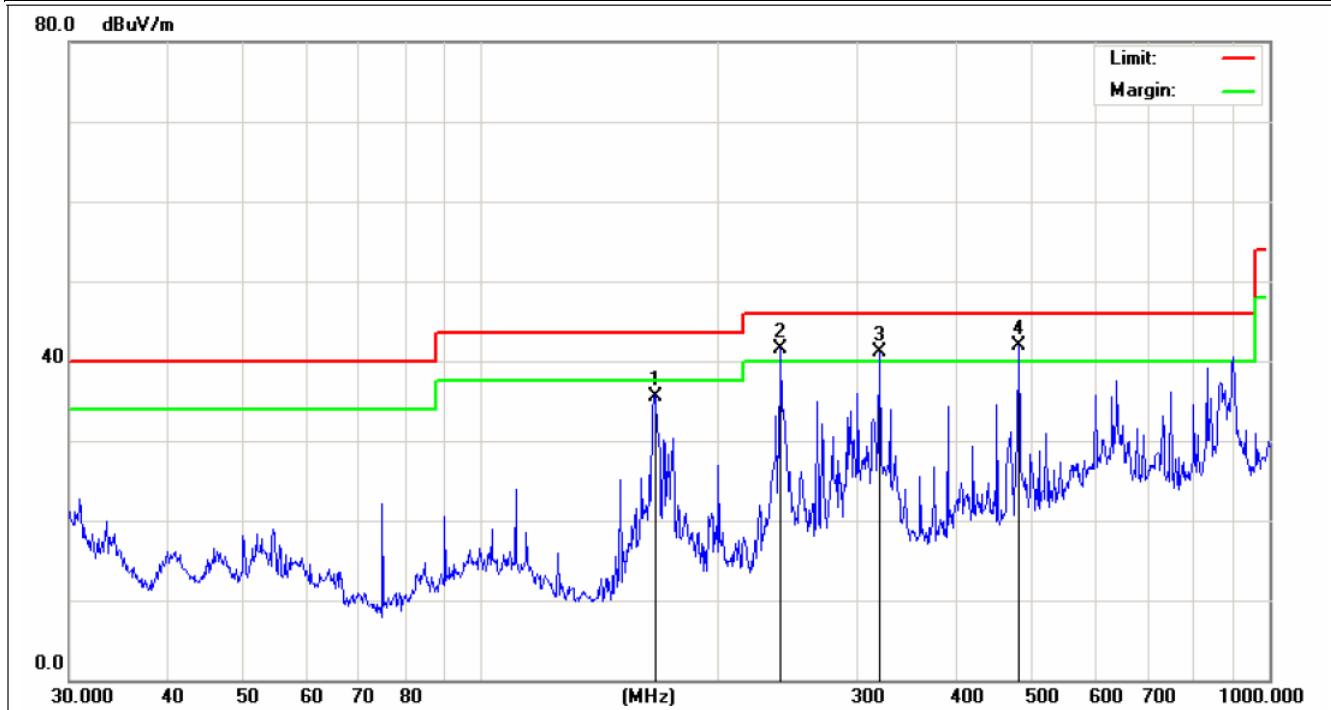

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Remark
1	166.0680	61.80	-26.28	35.52	43.50	-7.98	QP
2	239.9874	64.13	-22.60	41.53	46.00	-4.47	QP
3	319.9370	61.86	-20.76	41.10	46.00	-4.90	QP
4	480.5276	58.73	-16.90	41.83	46.00	-4.17	QP