


TEST REPORT

Applicant Name : AudioCodes Ltd.
Address : 1 Hayarden Street, Airport City, Lod, Israel.
Report Number : RA230421-21249E-RF-00A
FCC ID: XAK-RXPAD

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Touch Console device
Model No.: RX-PAD
Multiple Model(s) No.: N/A
Trade Mark:  audiocodes
Date Received: 2023/04/21
Report Date: 2023/05/30

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Roger Ling

Roger Ling
EMC Engineer

Approved By:

Candy Li

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" .

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "**". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MPE-BASED EXEMPTION	13
FCC §15.203 – ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP	15
TEST PROCEDURE	15
FACTOR & MARGIN CALCULATION	16
TEST DATA	16
FCC §15.205, §15.209 & §15.247(D) – RADIATED EMISSIONS	21
APPLICABLE STANDARD	21
EUT SETUP	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	22
TEST PROCEDURE	22
FACTOR & MARGIN CALCULATION	22
TEST DATA	22
FCC §15.247(A) (1)-CHANNEL SEPARATION TEST	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32

FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	34
FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST.....	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST DATA	35
FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST DATA	36
FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(D) & RSS-247 § 5.5 - BAND EDGES TESTING	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38
APPENDIX	39
APPENDIX A: 20DBEMISSION BANDWIDTH	39
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	45
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	51
APPENDIX D: CARRIER FREQUENCY SEPARATION	57
APPENDIX E: TIME OF OCCUPANCY.....	60
APPENDIX F: NUMBER OF HOPPING CHANNELS	70
APPENDIX G: BAND EDGE MEASUREMENTS	73

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230421-21249E-RF-00A	Original Report	2023-05-30

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Bluetooth: 2402-2480MHz
Maximum conducted Peak output power	Bluetooth: 2.88dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	2.46dBi (provided by the applicant)
Voltage Range	DC12V from adapter or DC 48V from PoE
Test Sample serial number	24YB-1 (Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.06dB
	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
	18GHz - 26.5GHz	5.16dB
	26.5GHz - 40GHz	4.64dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

“SecureCRT*” exercise software was used and the power level is 9*. The power level was provided by the manufacturer.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Tenda	Router	F3	171263330120212106
GOSPELL	PoE	G0720-480	Unknown
Kuantech	Adapter	KSASB0241200200D5	KSASB0241200200D5NSK
DELL	Notebook	Latitude	11429208685
Unknown	U disk	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Undetachable DC Cable	1.0	EUT	Adapter
Un-shielding Detachable RJ45 Cable	6.0	EUT	Router
Un-shielding Detachable RJ45 Cable	2.0	EUT	PoE
Un-shielding Detachable USB Cable	1.0	EUT	Notebook

Block Diagram of Test Setup

Adapter:
For Conducted Emissions:

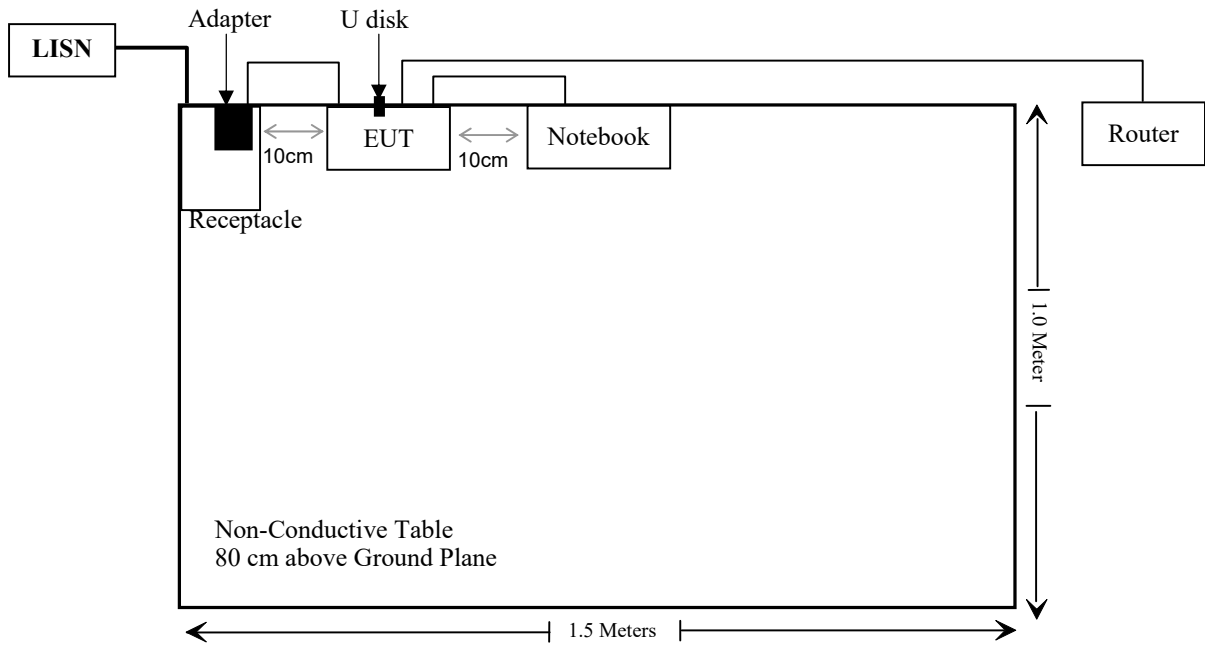


For Radiated Emissions:

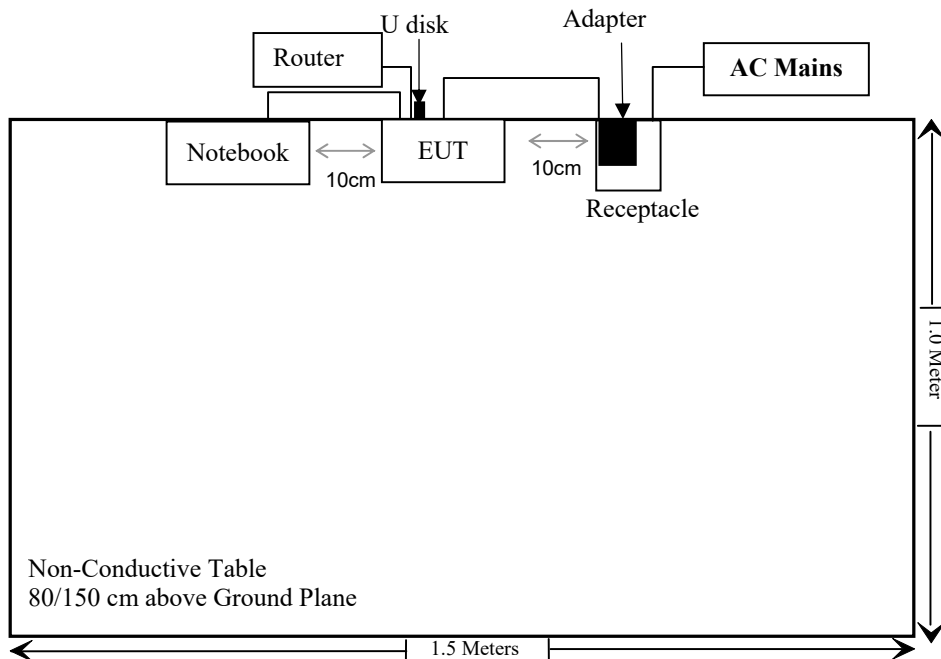


Note: the support table edge was flush with the center of turntable

PoE
For conducted emission:

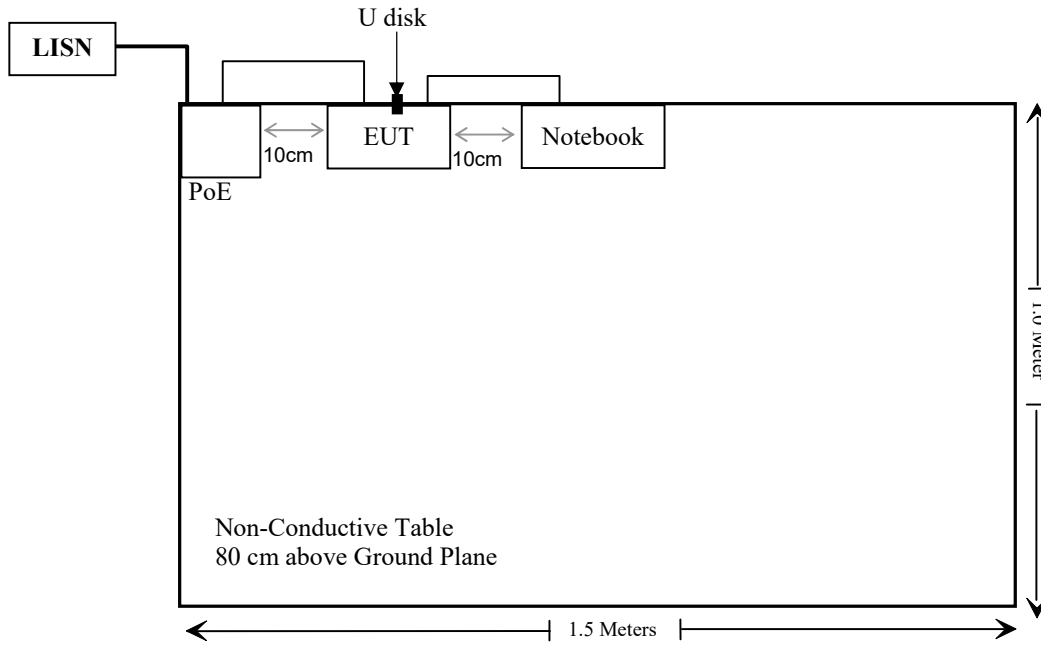

For Radiated Emissions:

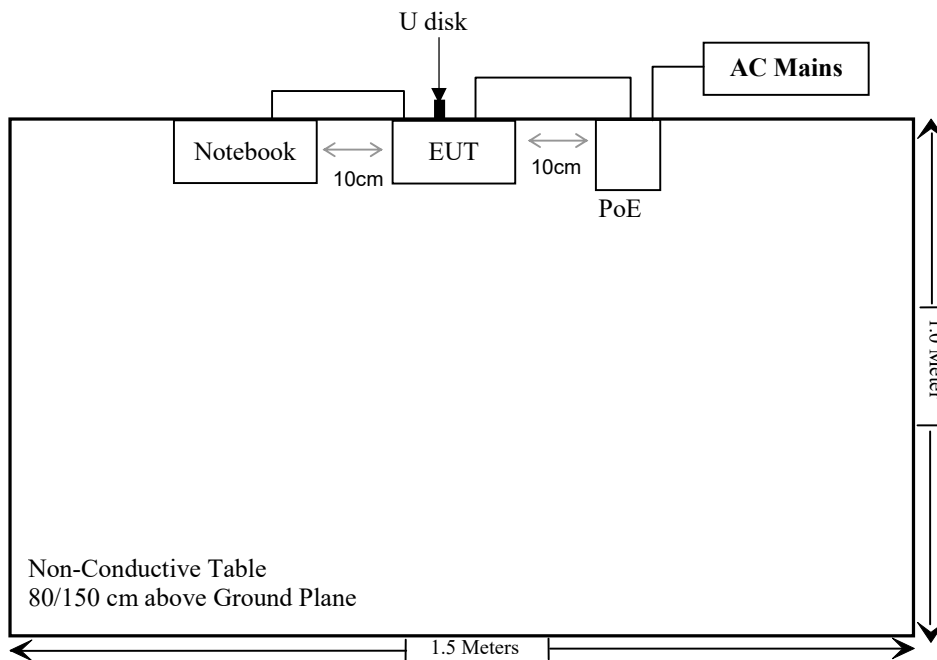

Note: the support table edge was flush with the center of turntable

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) & §2.1091	MPE-BASED EXEMPTION	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2022/11/25	2023/11/24
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2022/11/25	2023/11/24
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2022/12/07	2023/12/06
Unknown	RF Coaxial Cable	No.17	N0350	2022/11/25	2023/11/24
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2022/12/26	2025/12/25
Radiated Emission Test Software:e3 191218 (V9)					
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.15	N600	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.16	N650	2022/11/25	2023/11/24
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2022/11/25	2023/11/24

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2022/11/25	2023/11/24
Tonscend	RF Control Unit	JS0806-2	19G8060182	2022/10/24	2023/10/23
WEINSCHEL	10dB Attenuator	5324	AU 3842	2022/11/25	2023/11/24

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MPE-BASED EXEMPTION

Applicable Standard

According to subpart 1.1307 (b) (3) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

Result

Mode	Frequency (MHz)	Tune up conducted power	Antenna Gain		ERP		Evaluation Distance (m)	ERP Limit (W)
		(dBm)	(dBi)	(dBd)	(dBm)	(W)		
Bluetooth	2402-2480	3.0	2.46	0.31	3.31	0.002	0.2	0.768
BLE	2402-2480	1.0	2.46	0.31	1.31	0.001	0.2	0.768
2.4G Wi-Fi	2412-2462	21.0	2.46	0.31	21.31	0.135	0.2	0.768
5G Wi-Fi	5150-5250	16.0	2.94	0.79	16.79	0.048	0.2	0.768
	5250-5350	16.0	2.94	0.79	16.79	0.048	0.2	0.768
	5470-5725	13.0	2.94	0.79	13.79	0.024	0.2	0.768
	5725-5850	15.0	2.94	0.79	15.79	0.038	0.2	0.768

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.

2. The Bluetooth/BLE/Wi-Fi can't simultaneous transmitting.

3. 0dBd=2.15dBi

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached, the antenna gain is 2.46dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

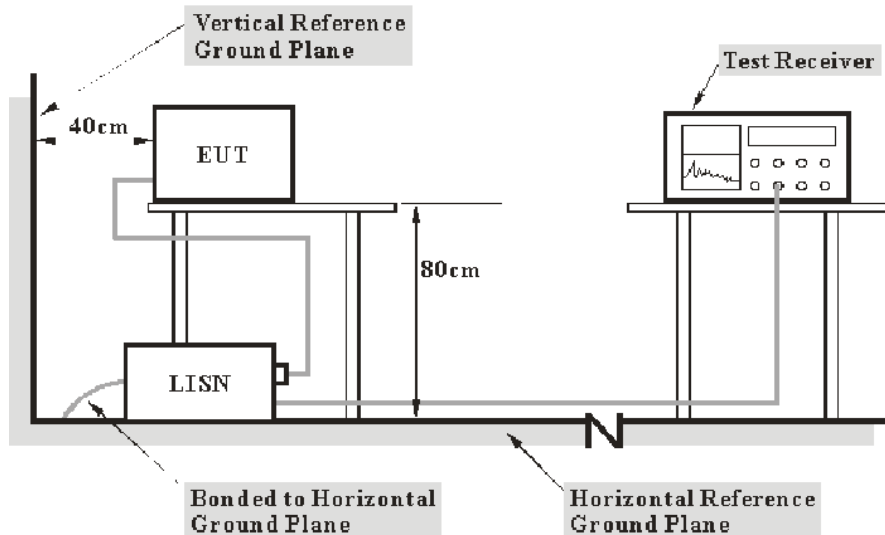

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Margin Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{level} - \text{Limit} \\ \text{Level} &= \text{Read level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	23 °C
Relative Humidity:	49 %
ATM Pressure:	101 kPa

The testing was performed by Jerry Wu on 2023-05-19.

EUT operation mode: Transmitting (the worst case is GFSK Mode, Low channel)

Powered by Adapter


AC 120V/60 Hz, Line

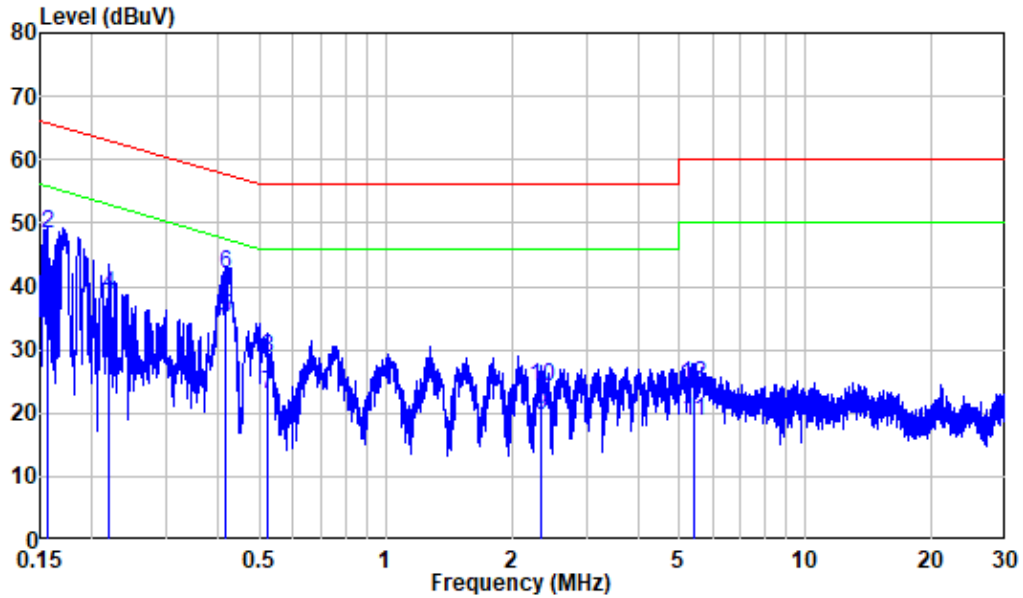

Site : Shielding Room
 Condition: Line
 Job No. : RA230421-21249E-RF
 Mode : BT Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.156	10.37	25.28	35.65	55.65	-20.00	Average
2	0.156	10.37	37.98	48.35	65.65	-17.30	QP
3	0.219	10.31	17.86	28.17	52.85	-24.68	Average
4	0.219	10.31	28.43	38.74	62.85	-24.11	QP
5	0.417	10.51	24.40	34.91	47.51	-12.60	Average
6	0.417	10.51	31.56	42.07	57.51	-15.44	QP
7	0.521	10.58	12.45	23.03	46.00	-22.97	Average
8	0.521	10.58	18.23	28.81	56.00	-27.19	QP
9	2.348	10.43	9.23	19.66	46.00	-26.34	Average
10	2.348	10.43	13.79	24.22	56.00	-31.78	QP
11	5.401	10.56	8.27	18.83	50.00	-31.17	Average
12	5.401	10.56	13.76	24.32	60.00	-35.68	QP

AC 120V/60 Hz, Neutral

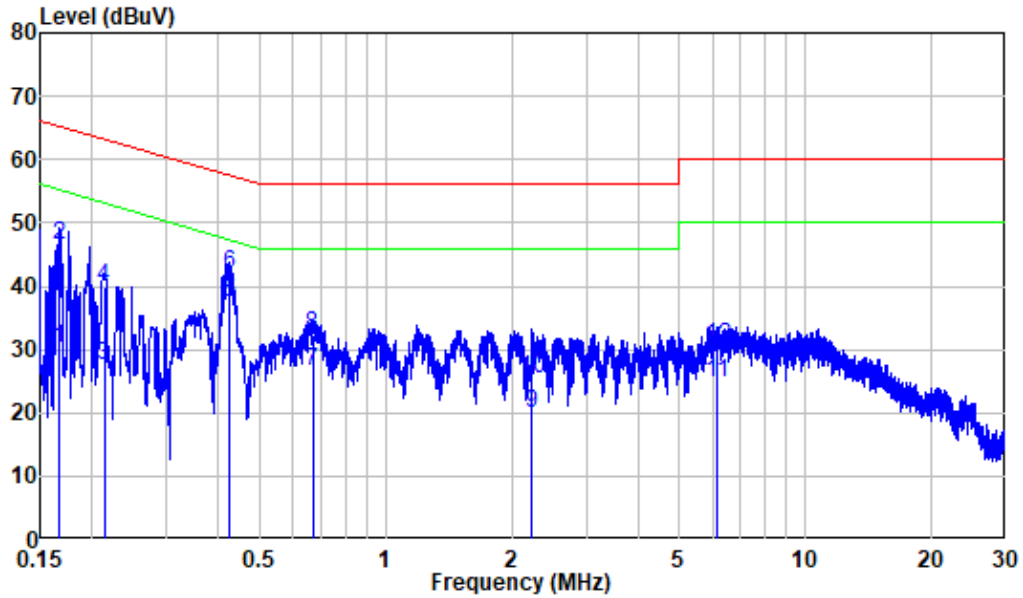


Site : Shielding Room
 Condition: Neutral
 Job No. : RA230421-21249E-RF
 Mode : BT Transmitting
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.167	10.28	19.84	30.12	55.09	-24.97	Average
2	0.167	10.28	36.11	46.39	65.09	-18.70	QP
3	0.213	10.30	17.21	27.51	53.08	-25.57	Average
4	0.213	10.30	29.48	39.78	63.08	-23.30	QP
5	0.422	10.43	27.13	37.56	47.40	-9.84	Average
6	0.422	10.43	31.66	42.09	57.40	-15.31	QP
7	0.669	10.47	16.23	26.70	46.00	-19.30	Average
8	0.669	10.47	21.71	32.18	56.00	-23.82	QP
9	2.216	10.50	9.41	19.91	46.00	-26.09	Average
10	2.216	10.50	14.76	25.26	56.00	-30.74	QP
11	6.129	10.51	14.17	24.68	50.00	-25.32	Average
12	6.129	10.51	20.01	30.52	60.00	-29.48	QP

Powered by PoE


AC 120V/60 Hz, Line

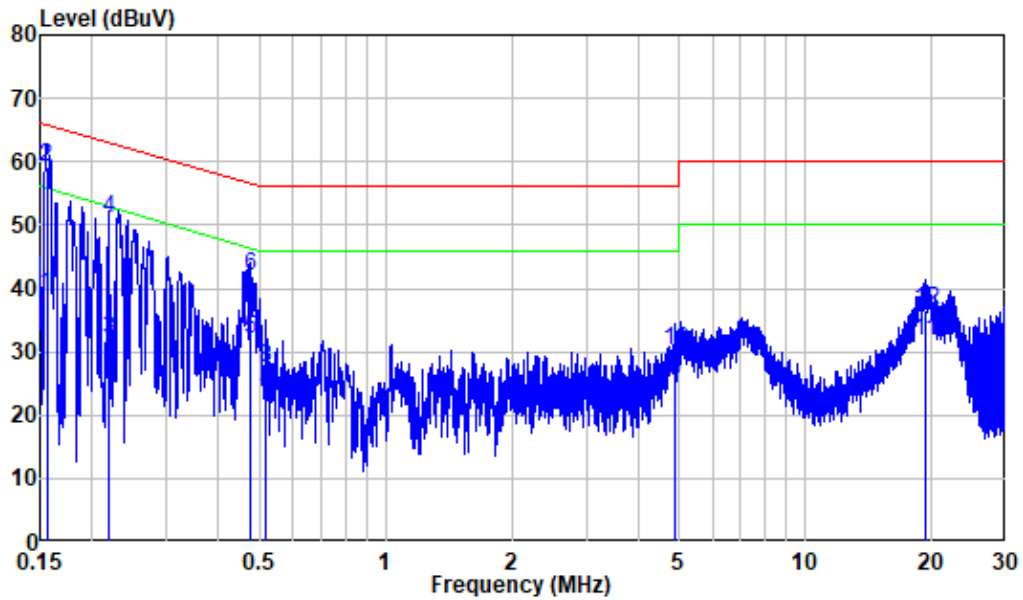

Site : Shielding Room
 Condition: Line
 Job No. : RA230421-21249E-RF
 Mode : BT Transmitting
 Note : POE
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.156	10.37	28.72	39.09	55.69	-16.60	Average
2	0.156	10.37	48.73	59.10	65.69	-6.59	QP
3	0.218	10.31	21.67	31.98	52.88	-20.90	Average
4	0.218	10.31	40.68	50.99	62.88	-11.89	QP
5	0.475	10.55	21.38	31.93	46.43	-14.50	Average
6	0.475	10.55	31.39	41.94	56.43	-14.49	QP
7	0.517	10.58	11.40	21.98	46.00	-24.02	Average
8	0.517	10.58	16.84	27.42	56.00	-28.58	QP
9	4.893	10.55	14.73	25.28	46.00	-20.72	Average
10	4.893	10.55	19.67	30.22	56.00	-25.78	QP
11	19.313	10.30	21.26	31.56	50.00	-18.44	Average
12	19.313	10.30	26.37	36.67	60.00	-23.33	QP

AC 120V/60 Hz, Neutral

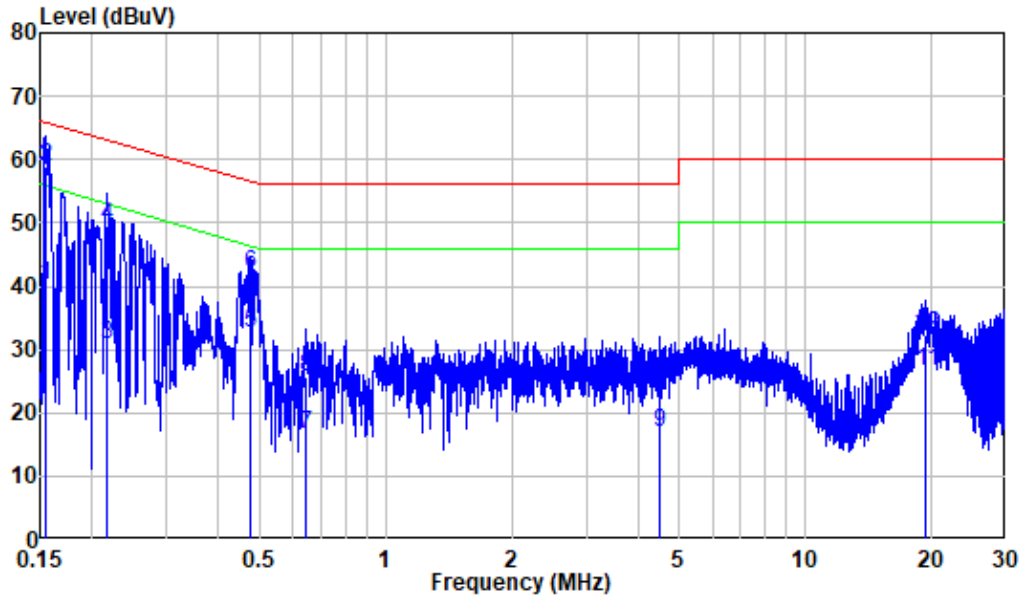

Site : Shielding Room
 Condition: Neutral
 Job No. : RA230421-21249E-RF
 Mode : BT Transmitting
 Note : POE
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.154	10.27	29.83	40.10	55.77	-15.67	Average
2	0.154	10.27	48.67	58.94	65.77	-6.83	QP
3	0.216	10.30	20.54	30.84	52.97	-22.13	Average
4	0.216	10.30	39.22	49.52	62.97	-13.45	QP
5	0.474	10.45	22.03	32.48	46.44	-13.96	Average
6	0.474	10.45	31.37	41.82	56.44	-14.62	QP
7	0.646	10.47	6.00	16.47	46.00	-29.53	Average
8	0.646	10.47	15.08	25.55	56.00	-30.45	QP
9	4.513	10.53	6.32	16.85	46.00	-29.15	Average
10	4.513	10.53	14.34	24.87	56.00	-31.13	QP
11	19.351	10.21	16.32	26.53	50.00	-23.47	Average
12	19.351	10.21	22.00	32.21	60.00	-27.79	QP


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

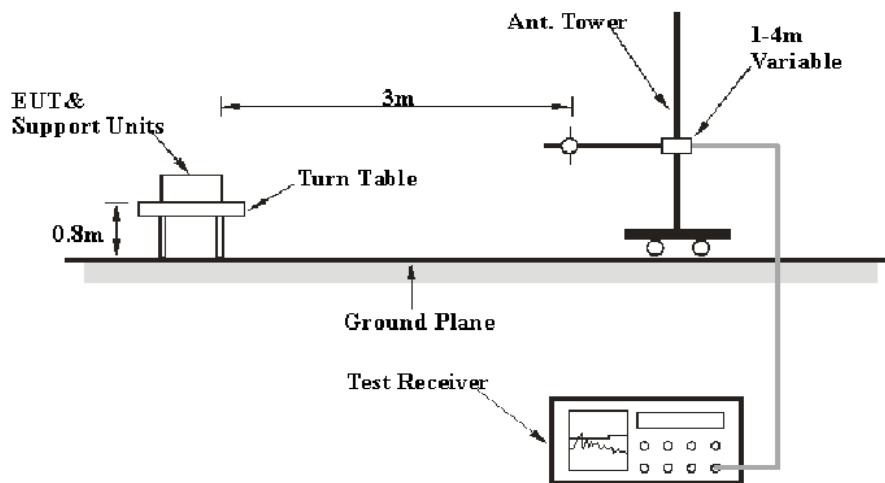

Above 1GHz:

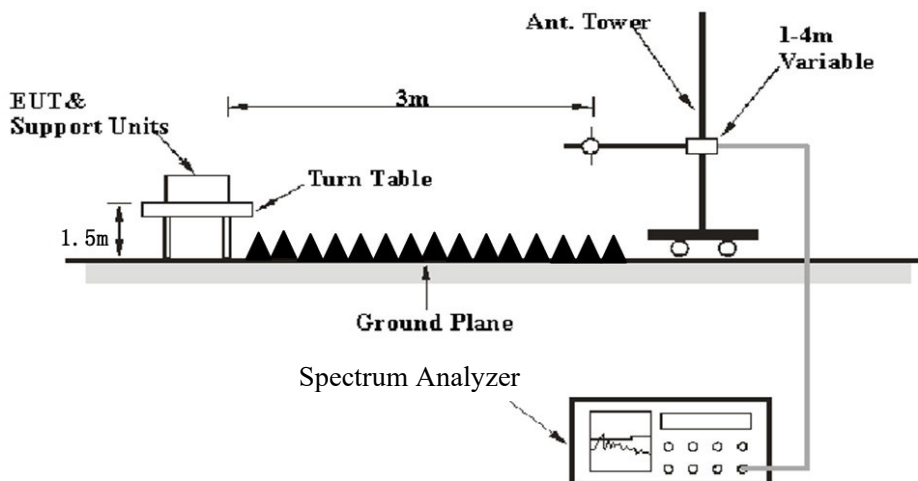

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK

For average measurement:

Use the duty cycle factor correction factor method per 15.35(c).

Duty cycle=On time/100milliseconds, On time= $N1*L1+N2*L2+\dots+Nn-1*Ln-1+Nn*Ln$,

Where N1 is number of type 1 pulses, L1 is length of type 1 pulse, etc.

Average Emission Level=Peak Emission Level+20*log(Duty cycle)

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin/Over Limit} &= \text{Corrected Amplitude/Level-Limit} \\ \text{Corrected Amplitude/Level} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	23~25.6 °C
Relative Humidity:	51~55%
ATM Pressure:	101 kPa

The testing was performed by Jason Liu on 2023-05-20 for below 1GHz and Jimi Zheng on 2023-05-14 for above 1GHz.


EUT operation mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axes of orientation was recorded)

30MHz-1GHz: (the worst case is GFSK Mode, Low channel)

Note: When the test result of Peak was more than 6dB below the limit of QP, just the Peak value was recorded.

Powered by Adapter


Horizontal:

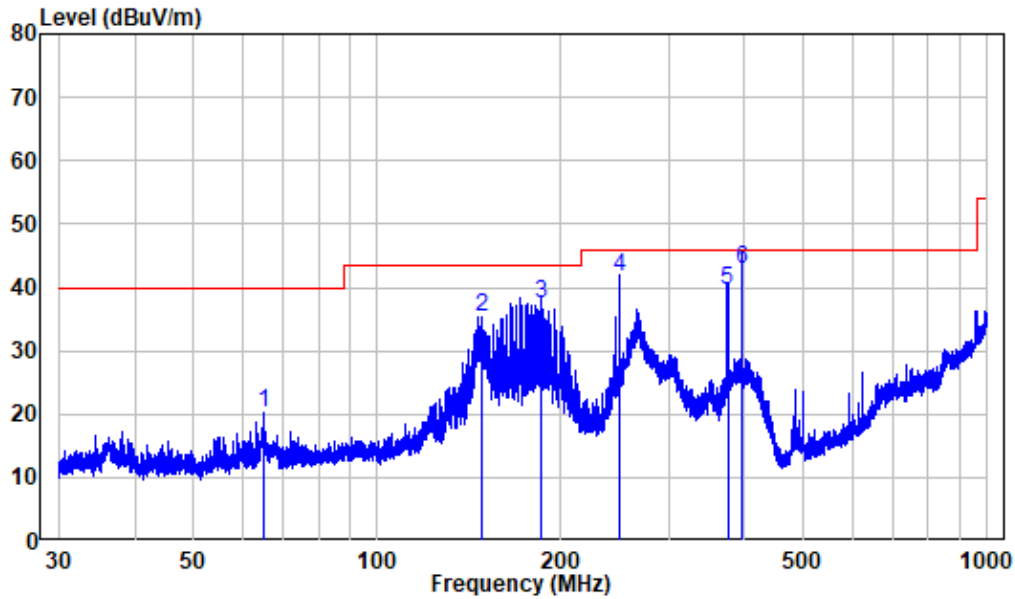

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : RA230421-21249E-RF
 Test Mode: BT Transmitting
 Note : Adapter

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	65.315	-13.77	33.92	20.15	40.00	-19.85	Peak
2	147.857	-10.38	45.71	35.33	43.50	-8.17	Peak
3	184.895	-10.28	47.61	37.33	43.50	-6.17	QP
4	249.972	-12.54	54.30	41.76	46.00	-4.24	QP
5	375.116	-11.18	50.87	39.69	46.00	-6.31	QP
6	396.068	-11.90	54.70	42.80	46.00	-3.20	QP

Vertical

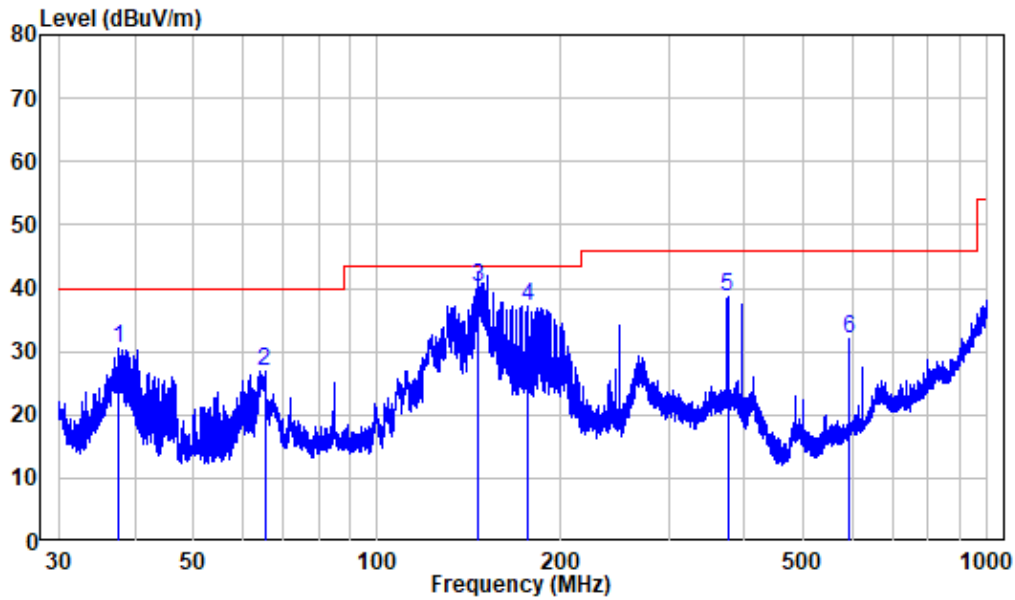


Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA230421-21249E-RF
 Test Mode: BT Transmitting
 Note : Adapter

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	37.647	-14.43	44.88	30.45	40.00	-9.55	Peak
2	65.343	-13.77	40.68	26.91	40.00	-13.09	Peak
3	146.566	-10.44	50.50	40.06	43.50	-3.44	QP
4	176.888	-10.37	47.47	37.10	43.50	-6.40	Peak
5	375.116	-11.18	49.82	38.64	46.00	-7.36	Peak
6	594.090	-10.04	41.89	31.85	46.00	-14.15	Peak

Powered by PoE


Horizontal:

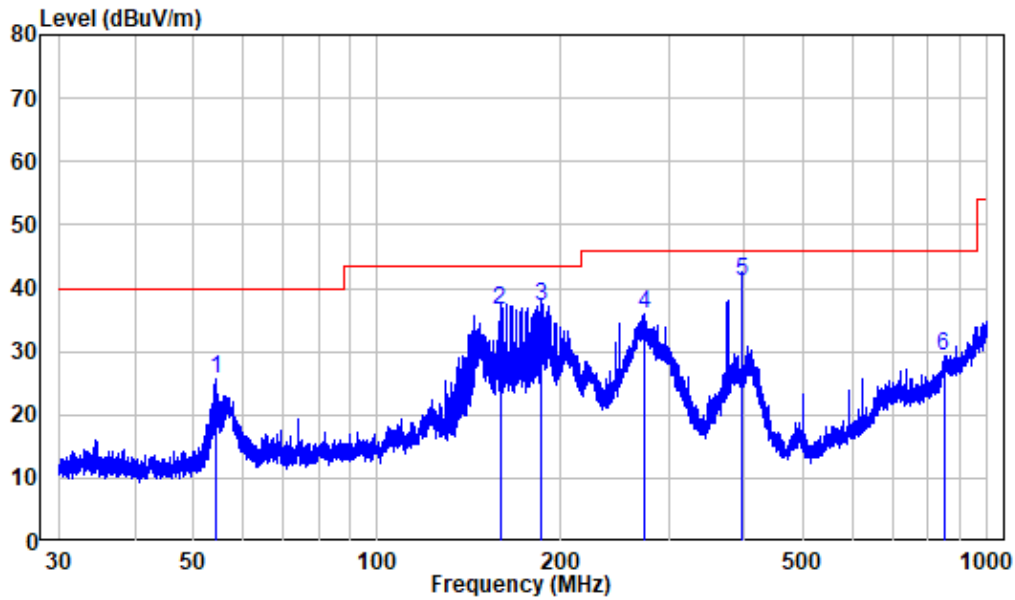

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : RA230421-21249E-RF
 Test Mode: BT Transmitting
 Note : POE

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	54.380	-14.14	39.69	25.55	40.00	-14.45	Peak
2	158.877	-10.30	46.91	36.61	43.50	-6.89	QP
3	184.895	-10.28	47.32	37.04	43.50	-6.46	QP
4	273.714	-14.92	50.89	35.97	46.00	-10.03	Peak
5	396.068	-11.90	53.00	41.10	46.00	-4.90	QP
6	848.428	-2.74	32.04	29.30	46.00	-16.70	Peak

Vertical

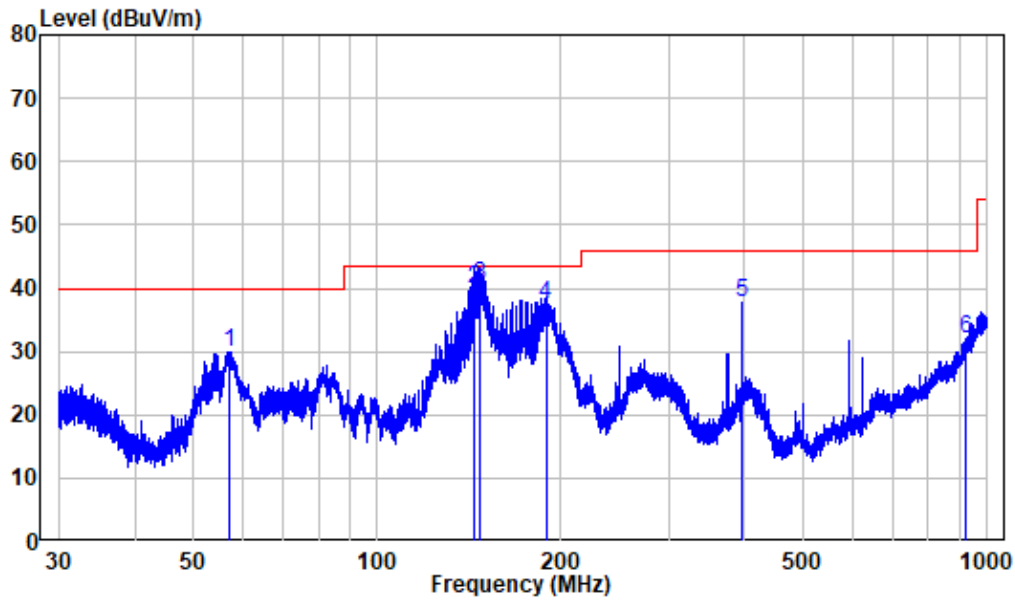

Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA230421-21249E-RF
 Test Mode: BT Transmitting
 Note : POE

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	57.191	-14.04	44.00	29.96	40.00	-10.04	Peak
2	144.461	-10.51	50.40	39.89	43.50	-3.61	QP
3	146.823	-10.42	50.81	40.39	43.50	-3.11	QP
4	188.909	-10.31	47.70	37.39	43.50	-6.11	QP
5	396.068	-11.90	49.55	37.65	46.00	-8.35	Peak
6	920.900	0.08	31.90	31.98	46.00	-14.02	Peak

Above 1GHz: (worst case is GFSK Mode, powered by adapter)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Factor (dB/m)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	PK/Ave		Height (m)	Polar (H/V)				
Low Channel 2402MHz									
2327.08	65.45	PK	273	2	H	-10.55	54.90	74	-19.10
2319.24	65.52	PK	125	2.4	V	-10.46	55.06	74	-18.94
2390	65.60	PK	183	1.5	H	-10.70	54.90	74	-19.10
2390	65.76	PK	250	1.3	V	-10.70	55.06	74	-18.94
4804	59.93	PK	245	1	H	-6.11	53.82	74	-20.18
4804	59.86	PK	91	1	V	-6.11	53.75	74	-20.25
Middle Channel 2441MHz									
4882	59.89	PK	241	1.8	H	-5.90	53.99	74	-20.01
4882	59.65	PK	144	1.8	V	-5.90	53.75	74	-20.25
High Channel 2480MHz									
2483.5	66.86	PK	326	1.9	H	-10.55	56.31	74	-17.69
2483.5	66.54	PK	232	1.5	V	-10.55	55.99	74	-18.01
2492.7	67.48	PK	312	2	H	-10.48	57.00	74	-17.00
2498.36	67.01	PK	273	1.1	V	-10.43	56.58	74	-17.42
4960	59.20	PK	345	1.2	H	-5.47	53.73	74	-20.27
4960	59.07	PK	338	1.2	V	-5.47	53.60	74	-20.40

Field Strength of Average							
Frequency (MHz)	Peak Measurement @3m (dB μ V/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dB μ V/m)	FCC Part 15.247		
					Limit (dB μ V/m)	Margin (dB)	Comment
Low Channel(2402MHz)							
2327.08	54.90	H	-24.84	30.06	54	-23.94	Bandedge
2319.24	55.06	V	-24.84	30.22	54	-23.78	Bandedge
2390	54.90	H	-24.84	30.06	54	-23.94	Bandedge
2390	55.06	V	-24.84	30.22	54	-23.78	Bandedge
4804	53.82	H	-24.84	28.98	54	-25.02	Harmonic
4804	53.75	V	-24.84	28.91	54	-25.09	Harmonic
Middle Channel(2441MHz)							
4882	53.99	H	-24.84	29.15	54	-24.85	Harmonic
4882	53.75	V	-24.84	28.91	54	-25.09	Harmonic
High Channel(2480MHz)							
2483.5	56.31	H	-24.84	31.47	54	-22.53	Bandedge
2483.5	55.99	V	-24.84	31.15	54	-22.85	Bandedge
2492.7	57.00	H	-24.84	32.16	54	-21.84	Bandedge
2498.36	56.58	V	-24.84	31.74	54	-22.26	Bandedge
4960	53.73	H	-24.84	28.89	54	-25.11	Harmonic
4960	53.60	V	-24.84	28.76	54	-25.24	Harmonic

Note:

Absolute Level = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

Average level= Peak level+ Duty Cycle Correction Factor


The other spurious emission which is in the noise floor level was not recorded.

Worst case duty cycle:

Duty cycle = Ton/100ms = 2.8625*2/100=0.05725

Duty Cycle Correction Factor = 20lg (Duty cycle) = 20lg0.05725 = -24.84

Duty cycle

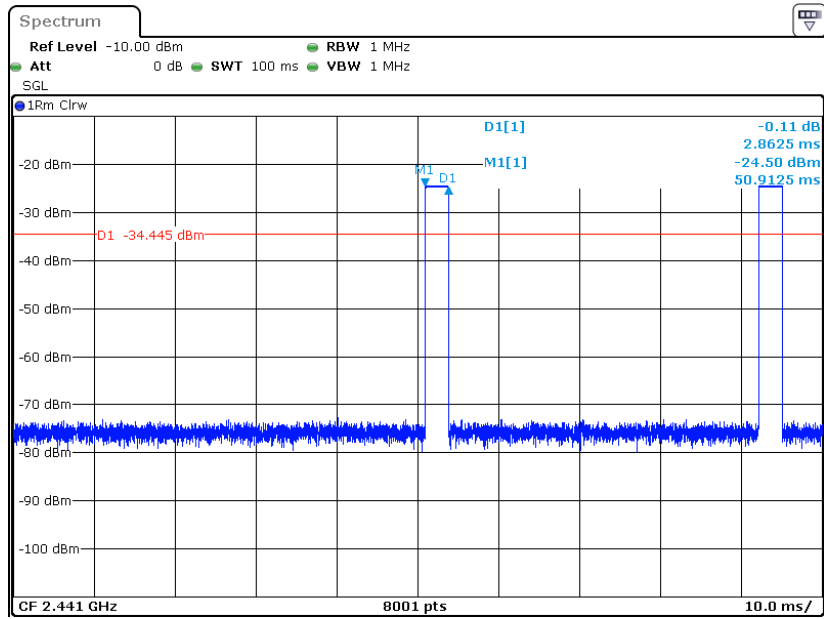


Date: 14.MAY.2023 19:57:15


1-18GHz

Pre-scan, Middle Channel (worst case)

Horizontal:

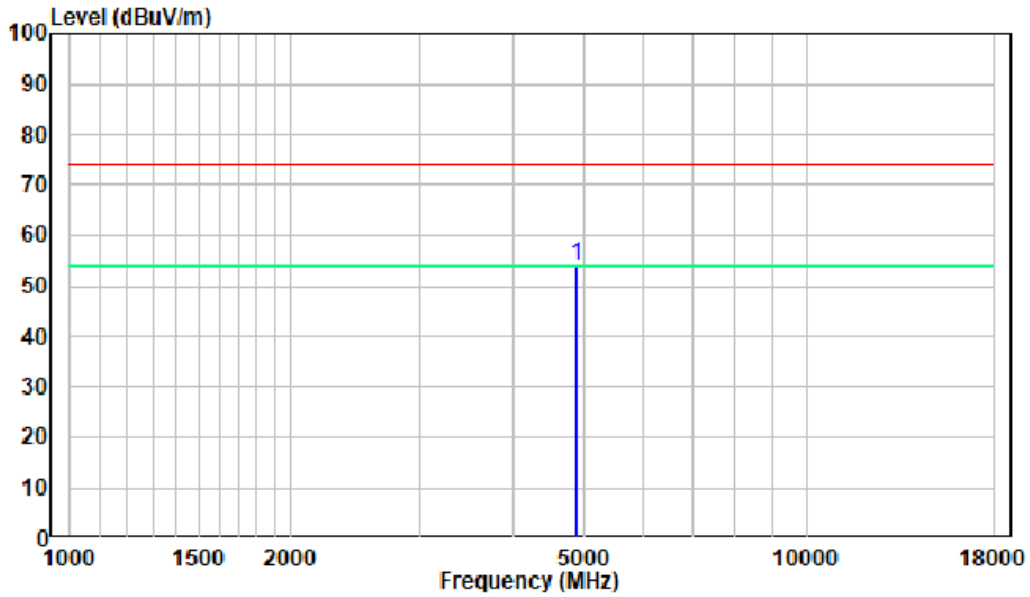


Vertical:

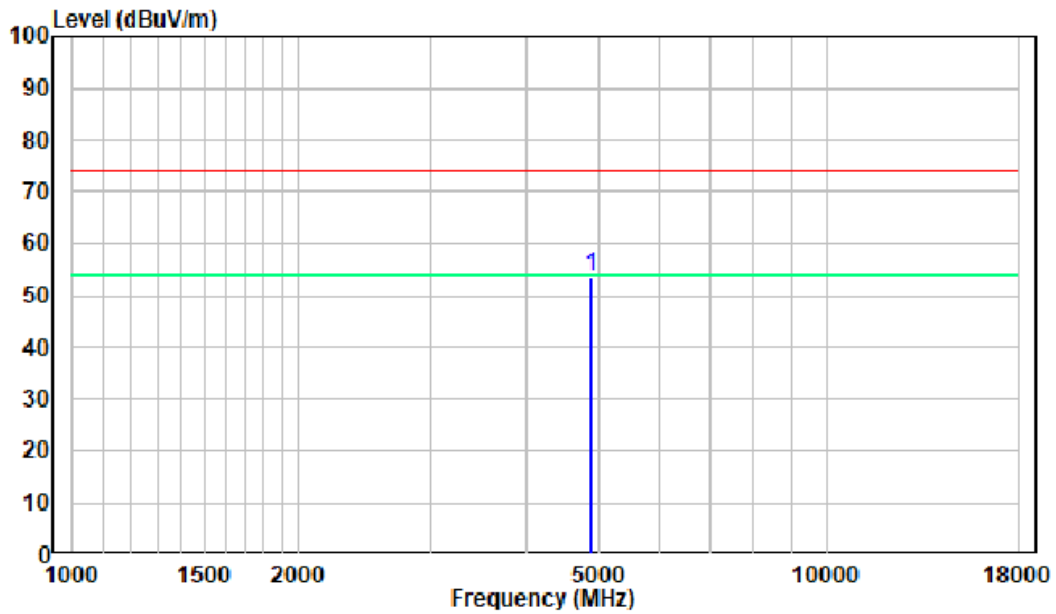


18-25GHz

Pre-scan, Middle Channel (worst case)

Horizontal:

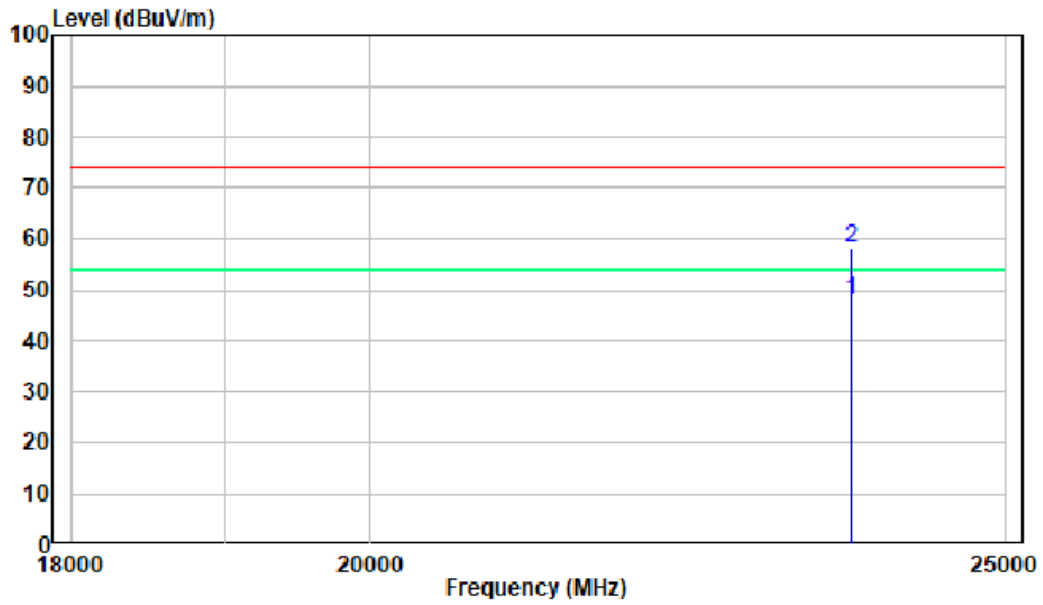

Vertical:

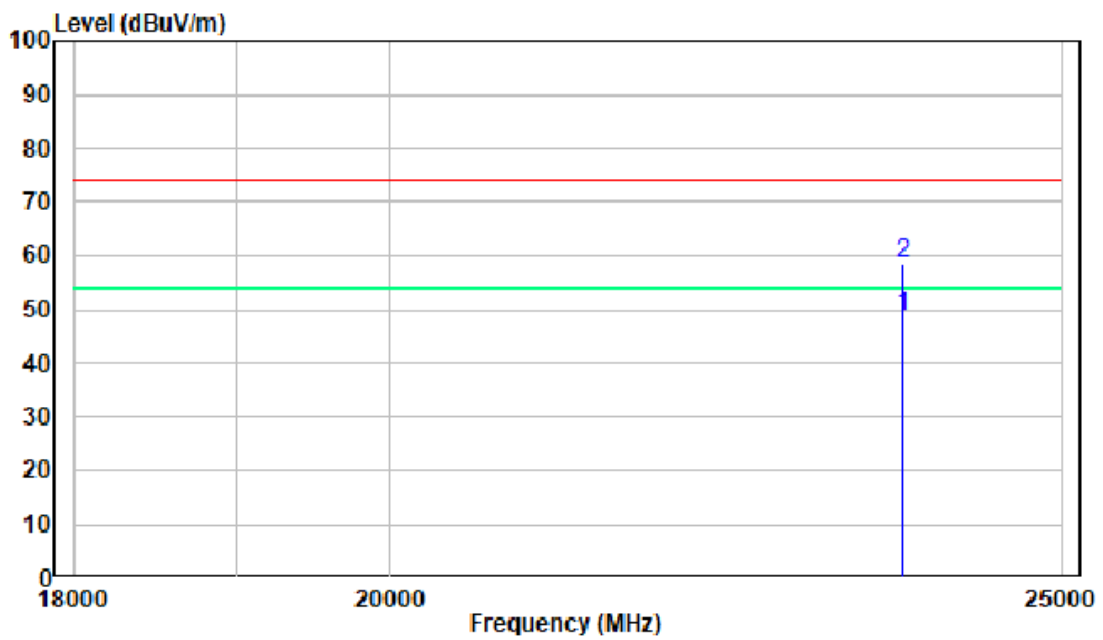

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST


Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.2

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

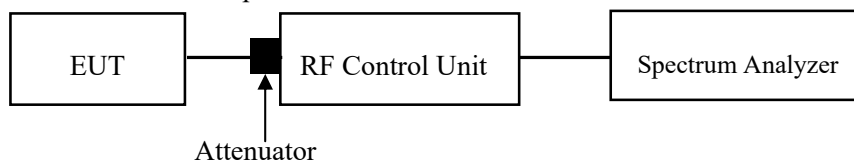

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang on 2023-05-17.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 7.8.7 & Clause 6.9.2

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

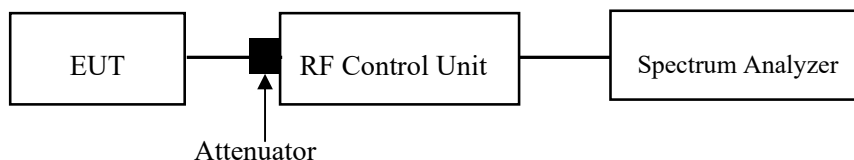

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang on 2023-05-17.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST


Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.3

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

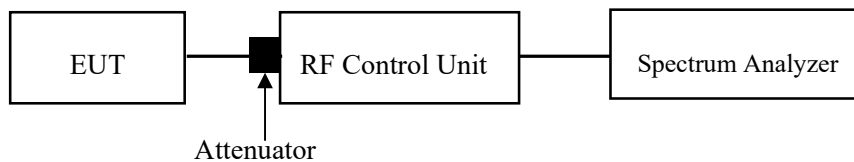

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang on 2023-05-17.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)


Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.4

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

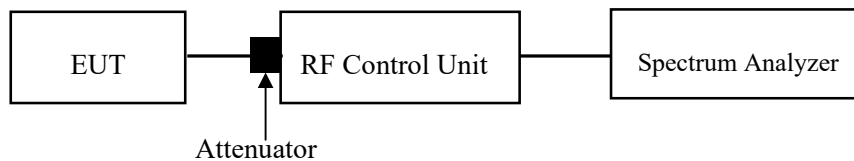

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang on 2023-05-17.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT


Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.5

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

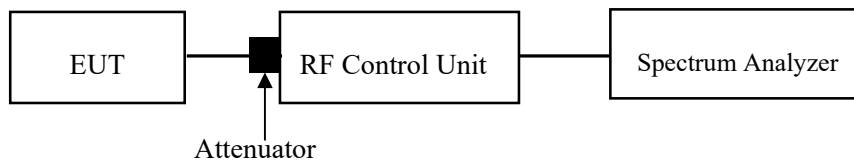

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang on 2023-05-17.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(d) & RSS-247 § 5.5 - BAND EDGES TESTING


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 7.8.6 & Clause 6.10

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

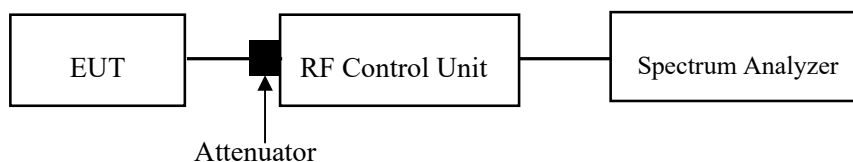

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	101.0 kPa

The testing was performed by Jacob Huang on 2023-05-17.


EUT operation mode: Transmitting



Test Result: Compliant. Please refer to the Appendix.



APPENDIX**Appendix A: 20dB Emission Bandwidth****Test Result**



Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]
DH1	Ant1	2402	0.88	2401.52	2402.40
		2441	0.88	2440.53	2441.41
		2480	0.88	2479.53	2480.41
2DH1	Ant1	2402	1.31	2401.30	2402.62
		2441	1.31	2440.31	2441.62
		2480	1.31	2479.31	2480.62
3DH1	Ant1	2402	1.26	2401.35	2402.61
		2441	1.26	2440.35	2441.61
		2480	1.26	2479.35	2480.62


Test Graphs

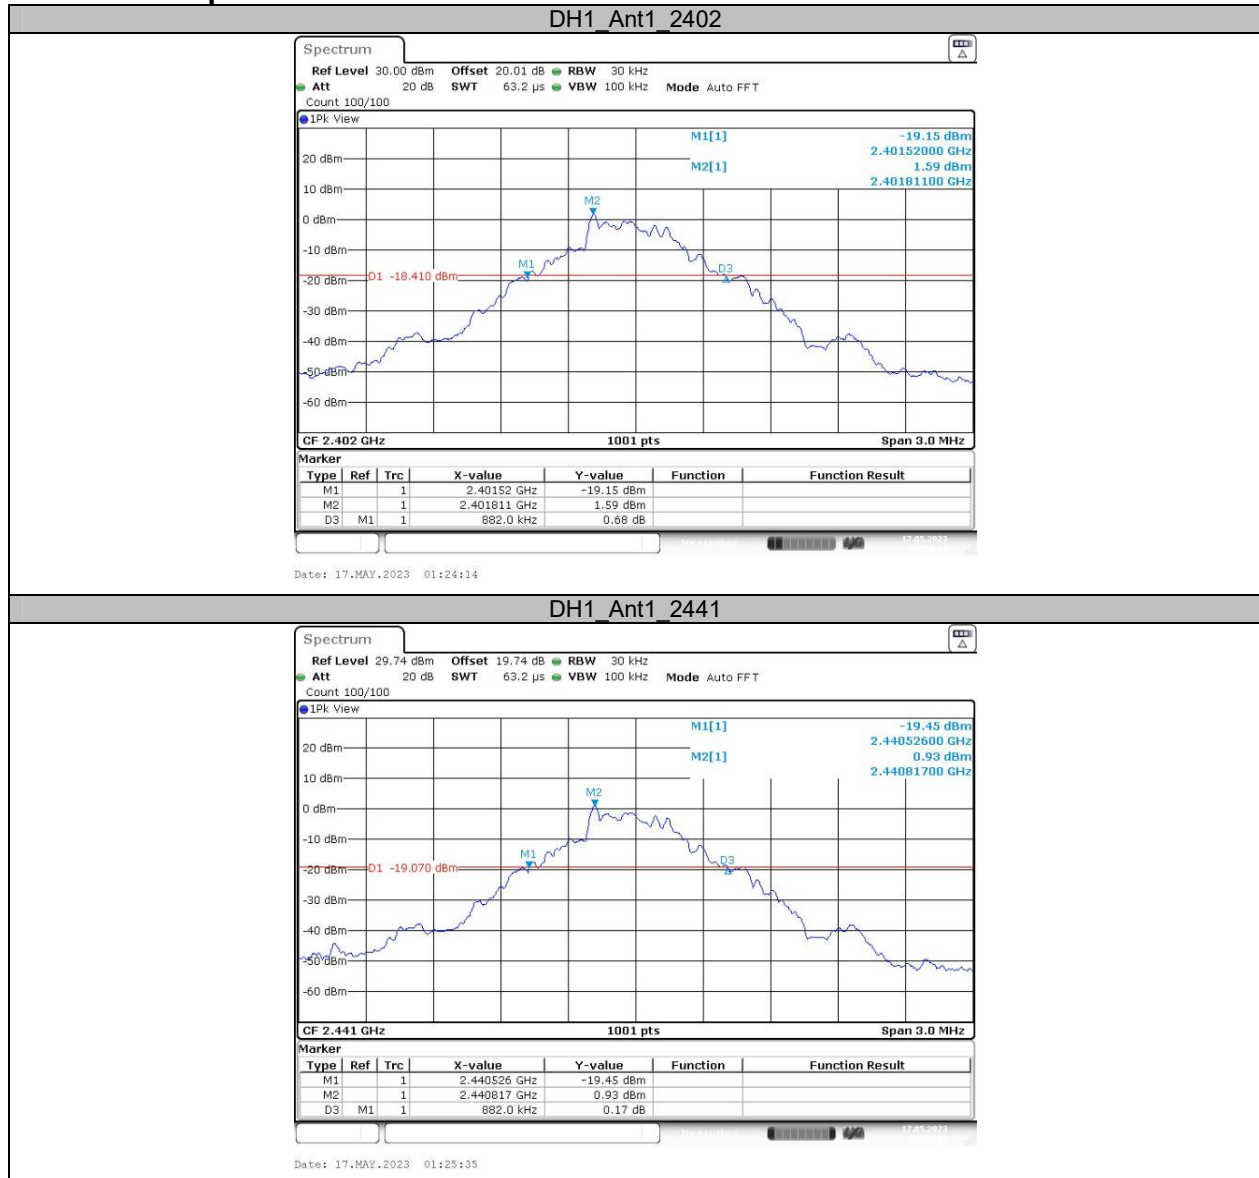

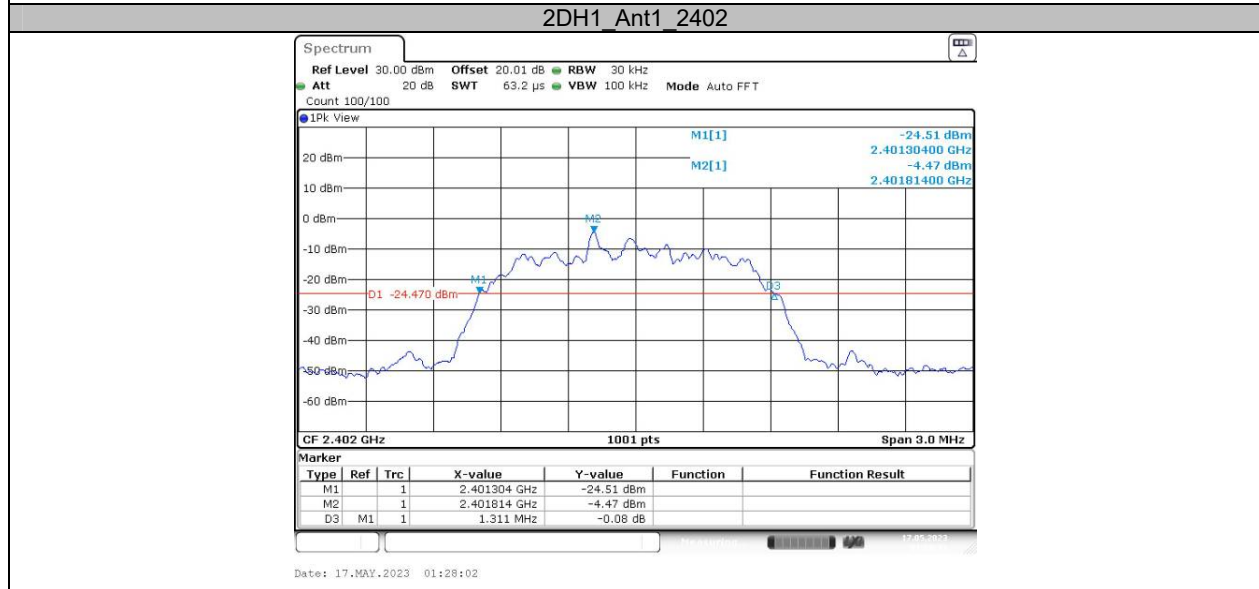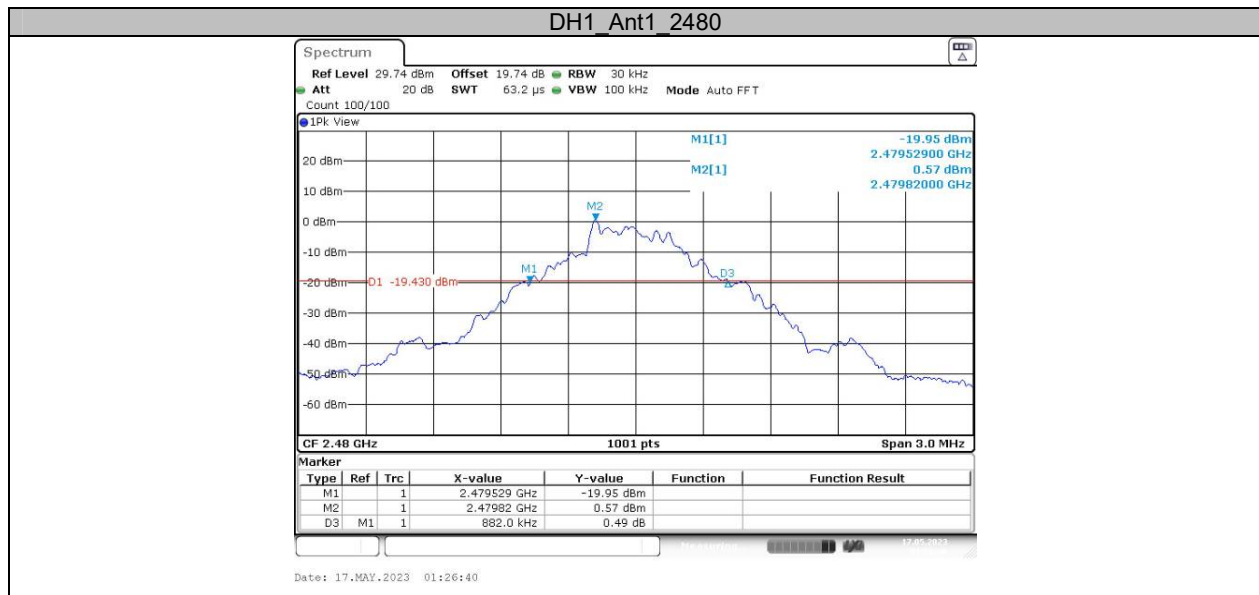

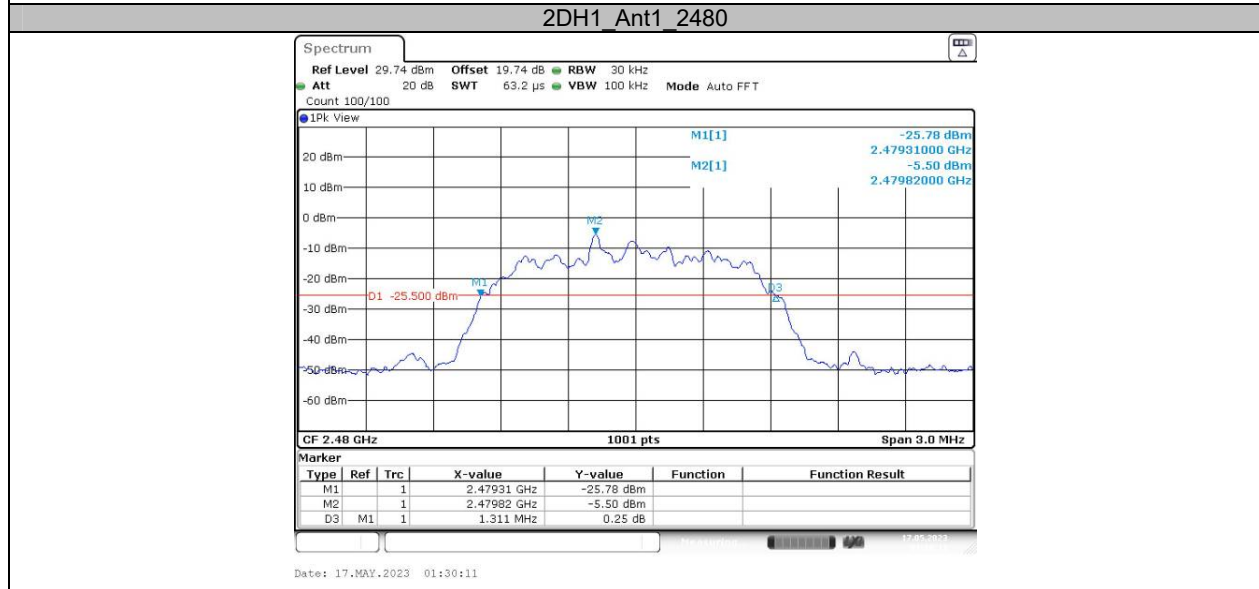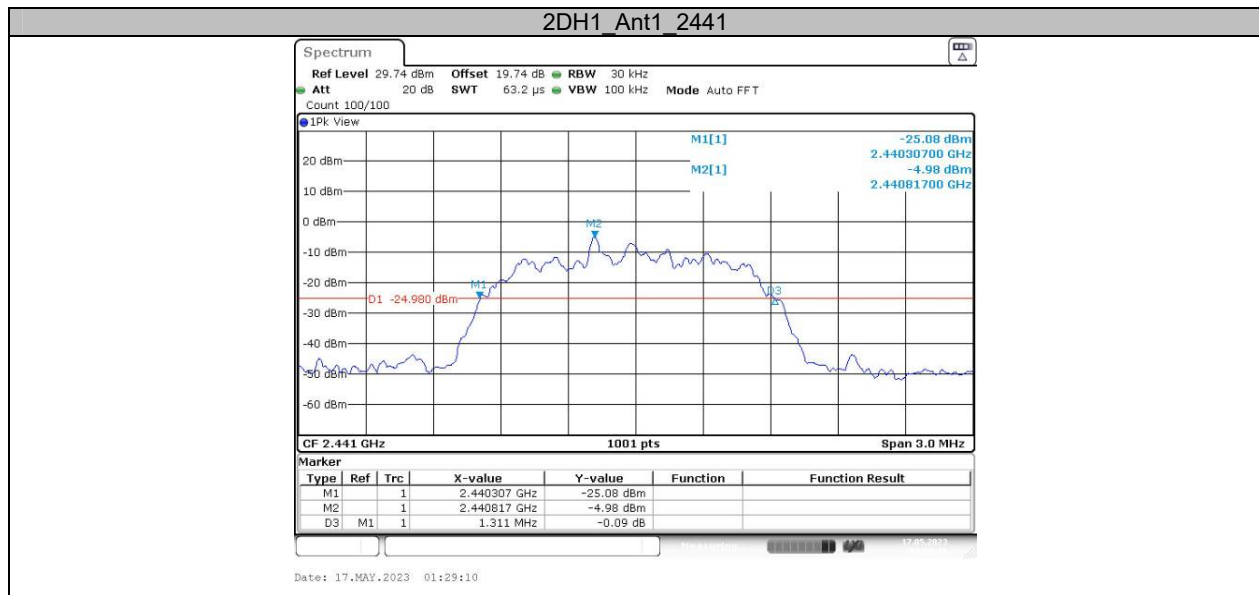

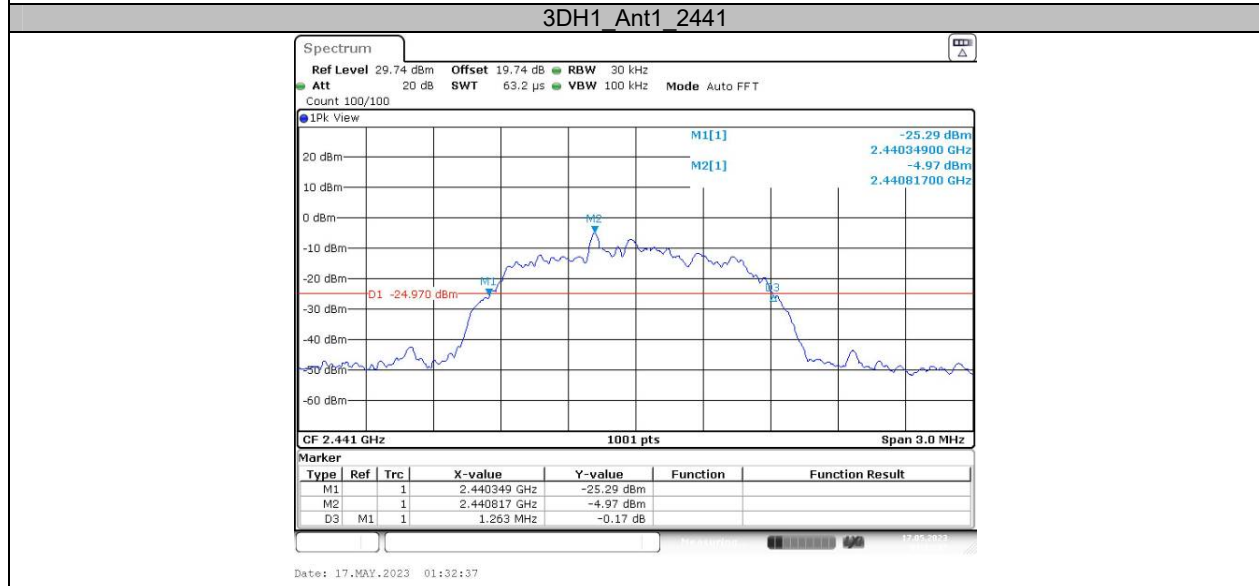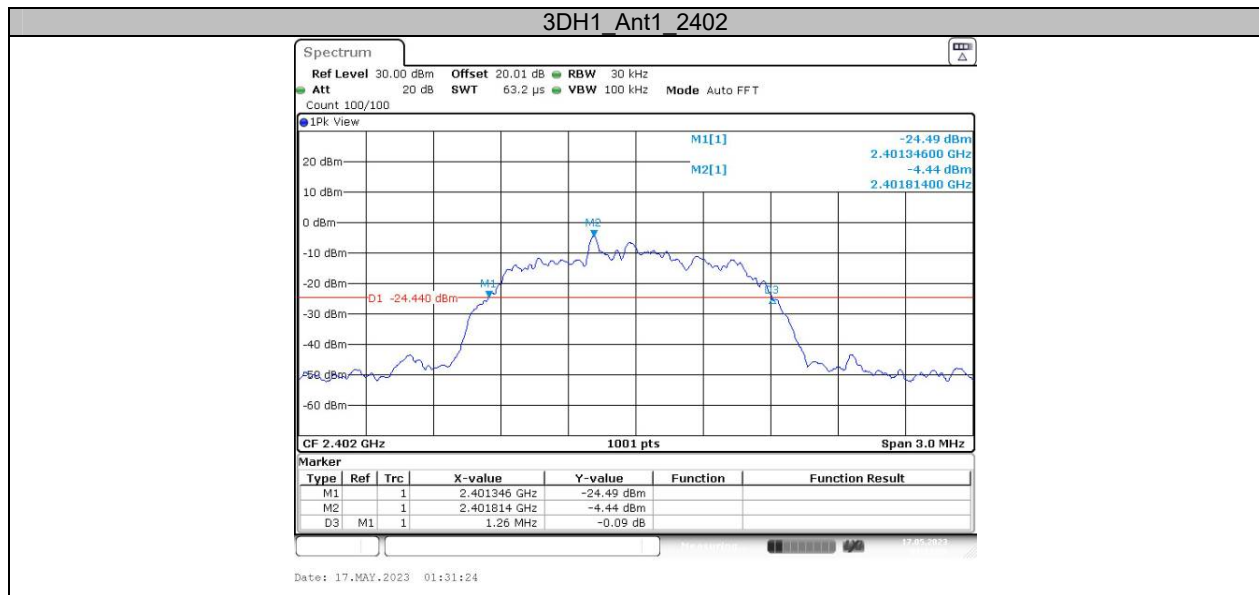


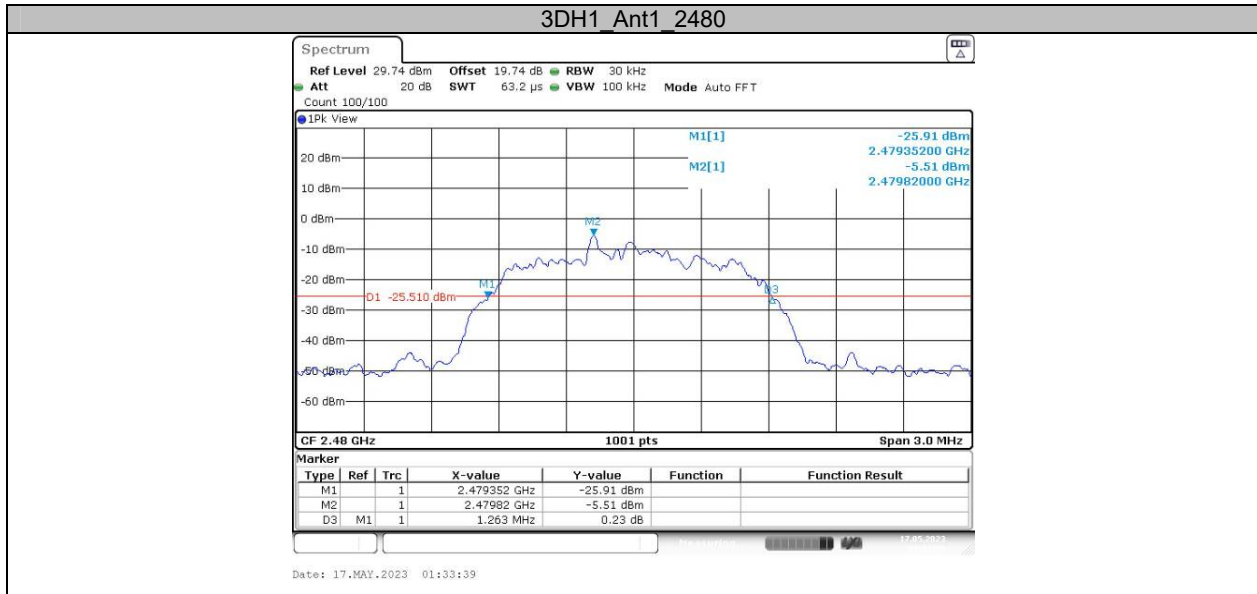




Appendix B: Occupied Channel Bandwidth**Test Result**



Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
DH1	Ant1	2402	0.905	2401.526	2402.432
		2441	0.911	2440.526	2441.438
		2480	0.908	2479.532	2480.441
2DH1	Ant1	2402	1.196	2401.365	2402.560
		2441	1.199	2440.368	2441.566
		2480	1.196	2479.374	2480.569
3DH1	Ant1	2402	1.181	2401.389	2402.569
		2441	1.184	2440.392	2441.575
		2480	1.184	2479.395	2480.578


Test Graphs

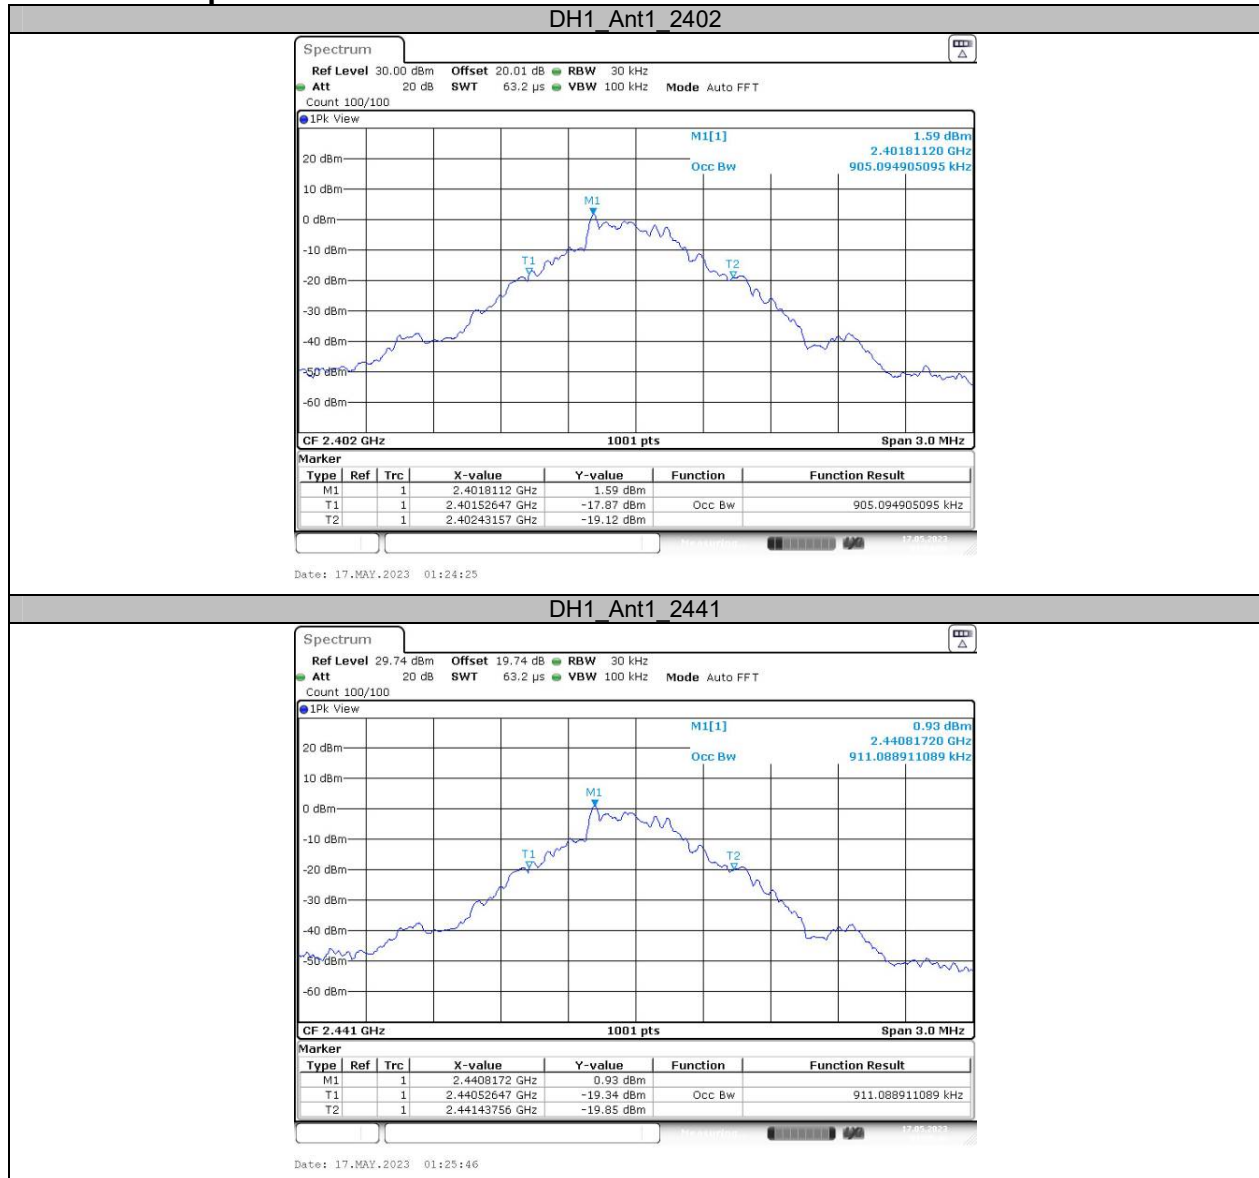

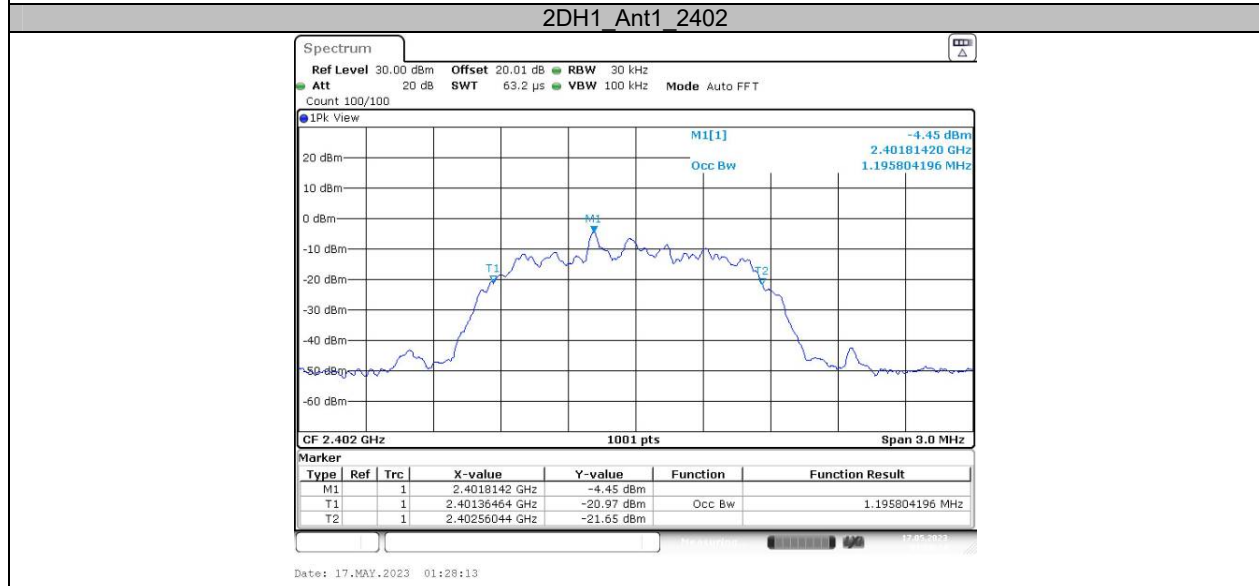

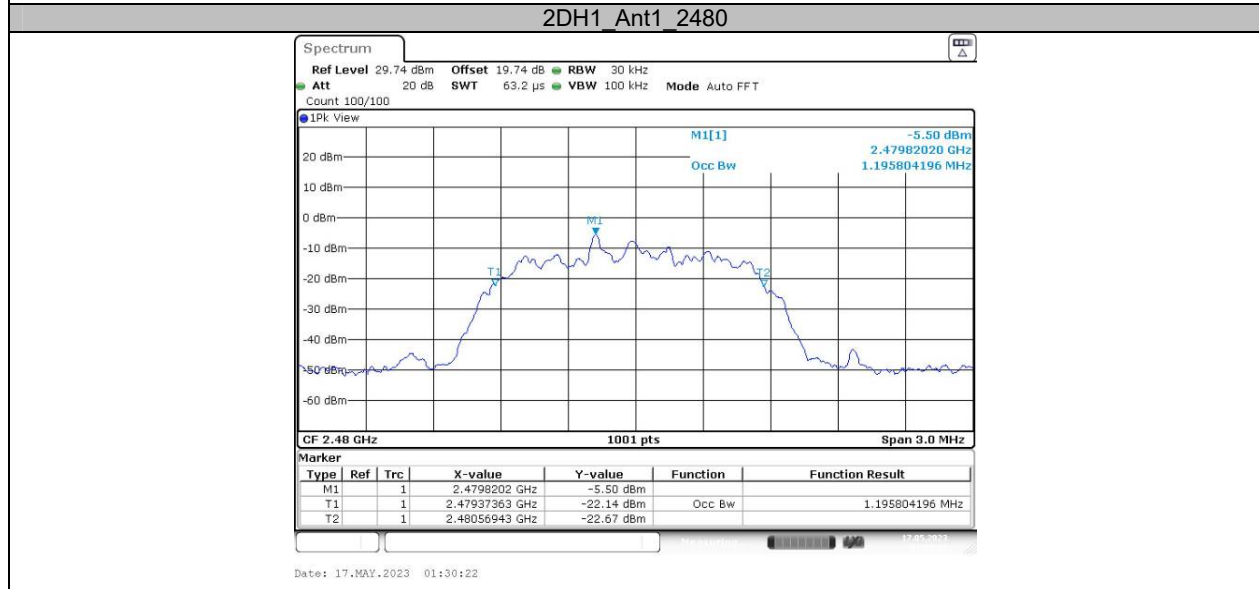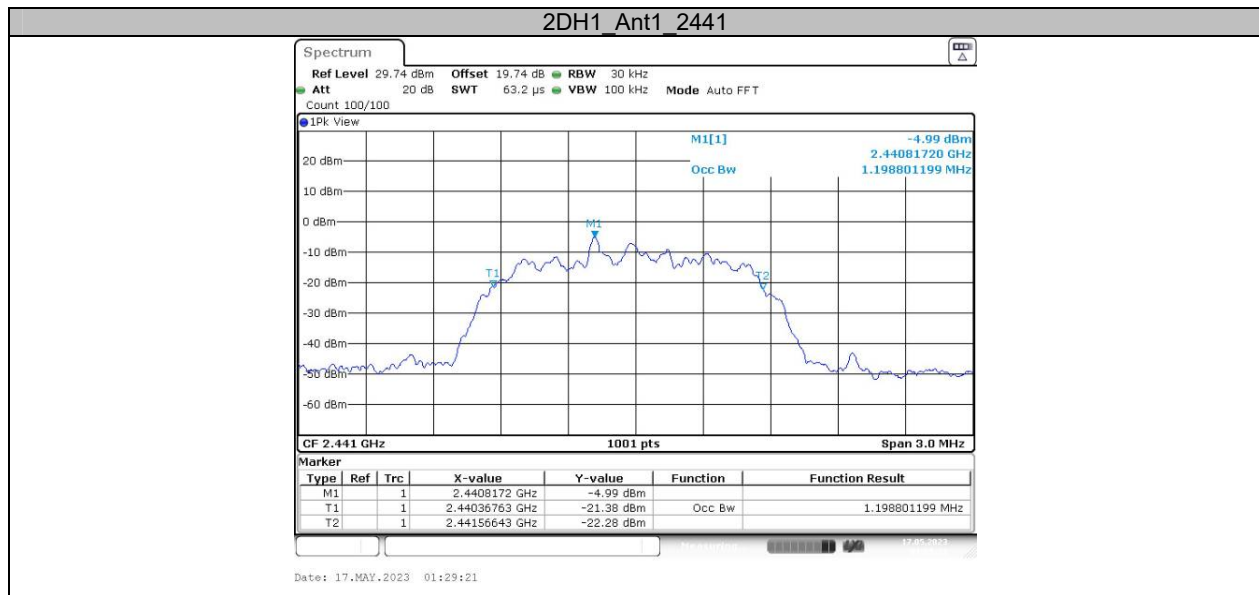

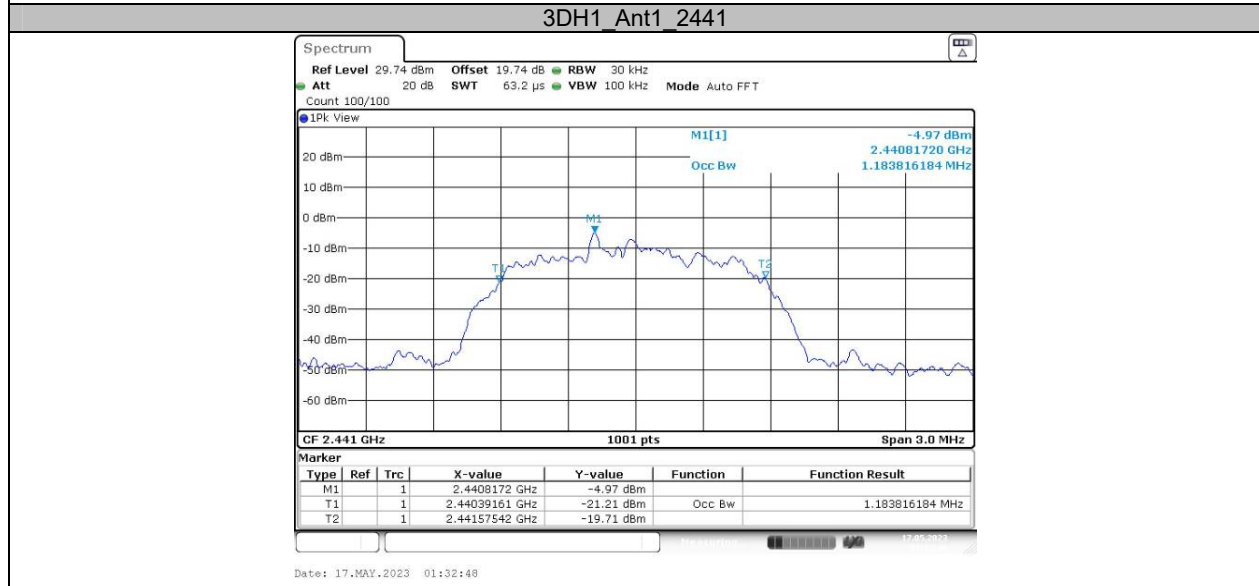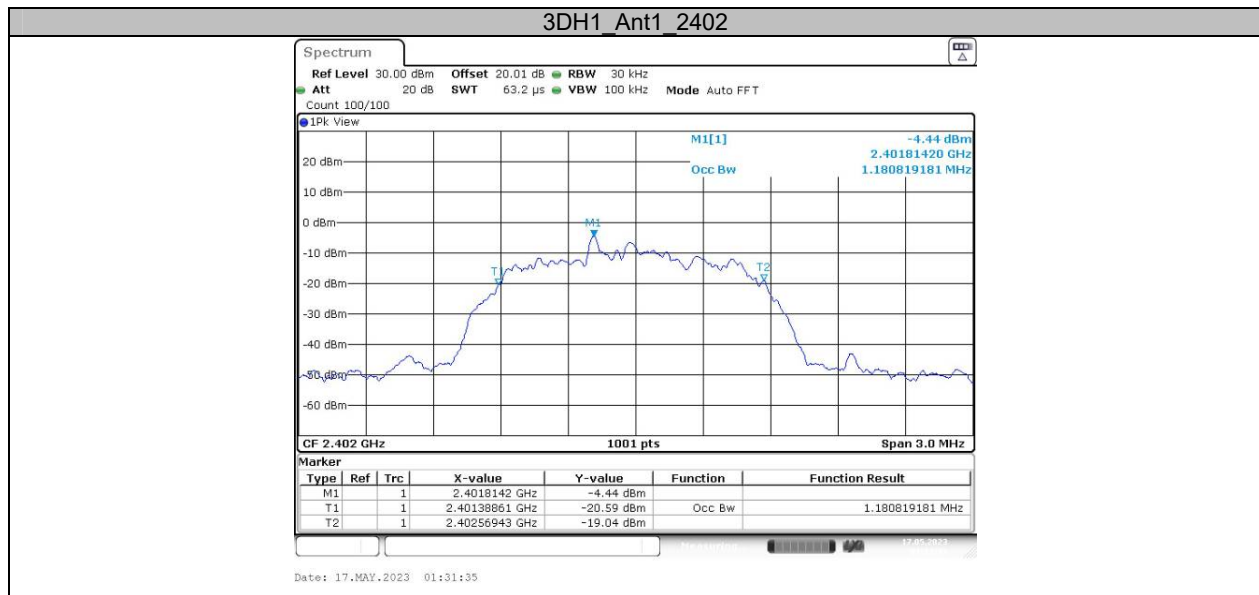



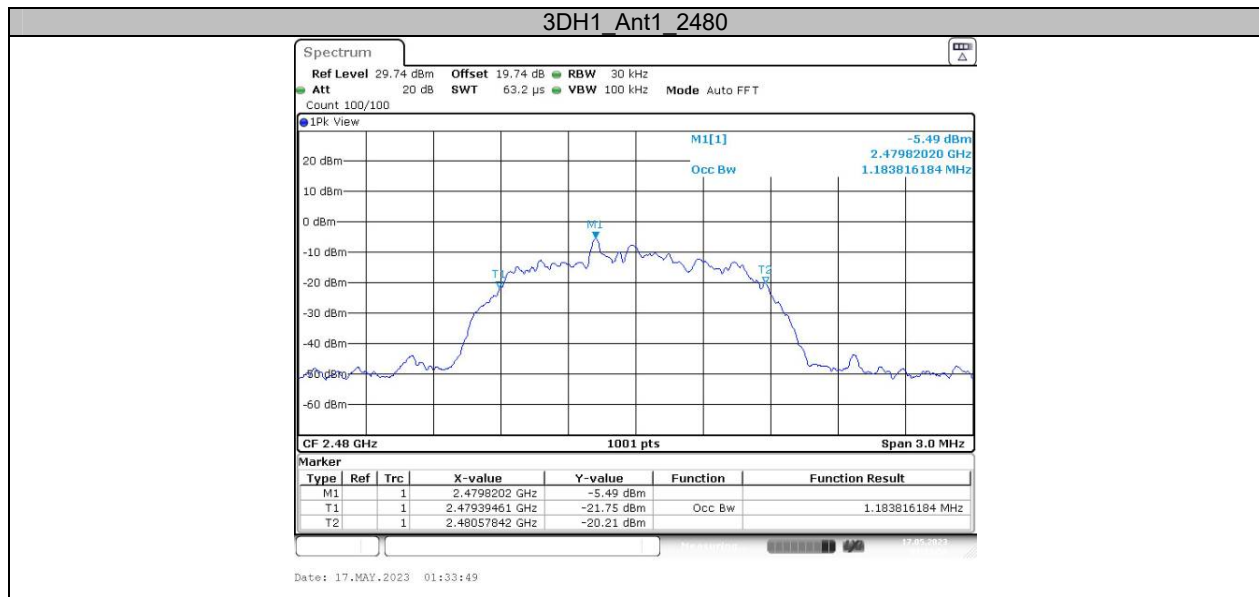




Appendix C: Maximum conducted output power**Test Result**



Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
DH1	Ant1	2402	2.88	≤20.97	PASS
		2441	2.27	≤20.97	PASS
		2480	1.90	≤20.97	PASS
2DH1	Ant1	2402	-0.86	≤20.97	PASS
		2441	-1.47	≤20.97	PASS
		2480	-2.02	≤20.97	PASS
3DH1	Ant1	2402	-0.83	≤20.97	PASS
		2441	-1.11	≤20.97	PASS
		2480	-1.82	≤20.97	PASS


Test Graphs

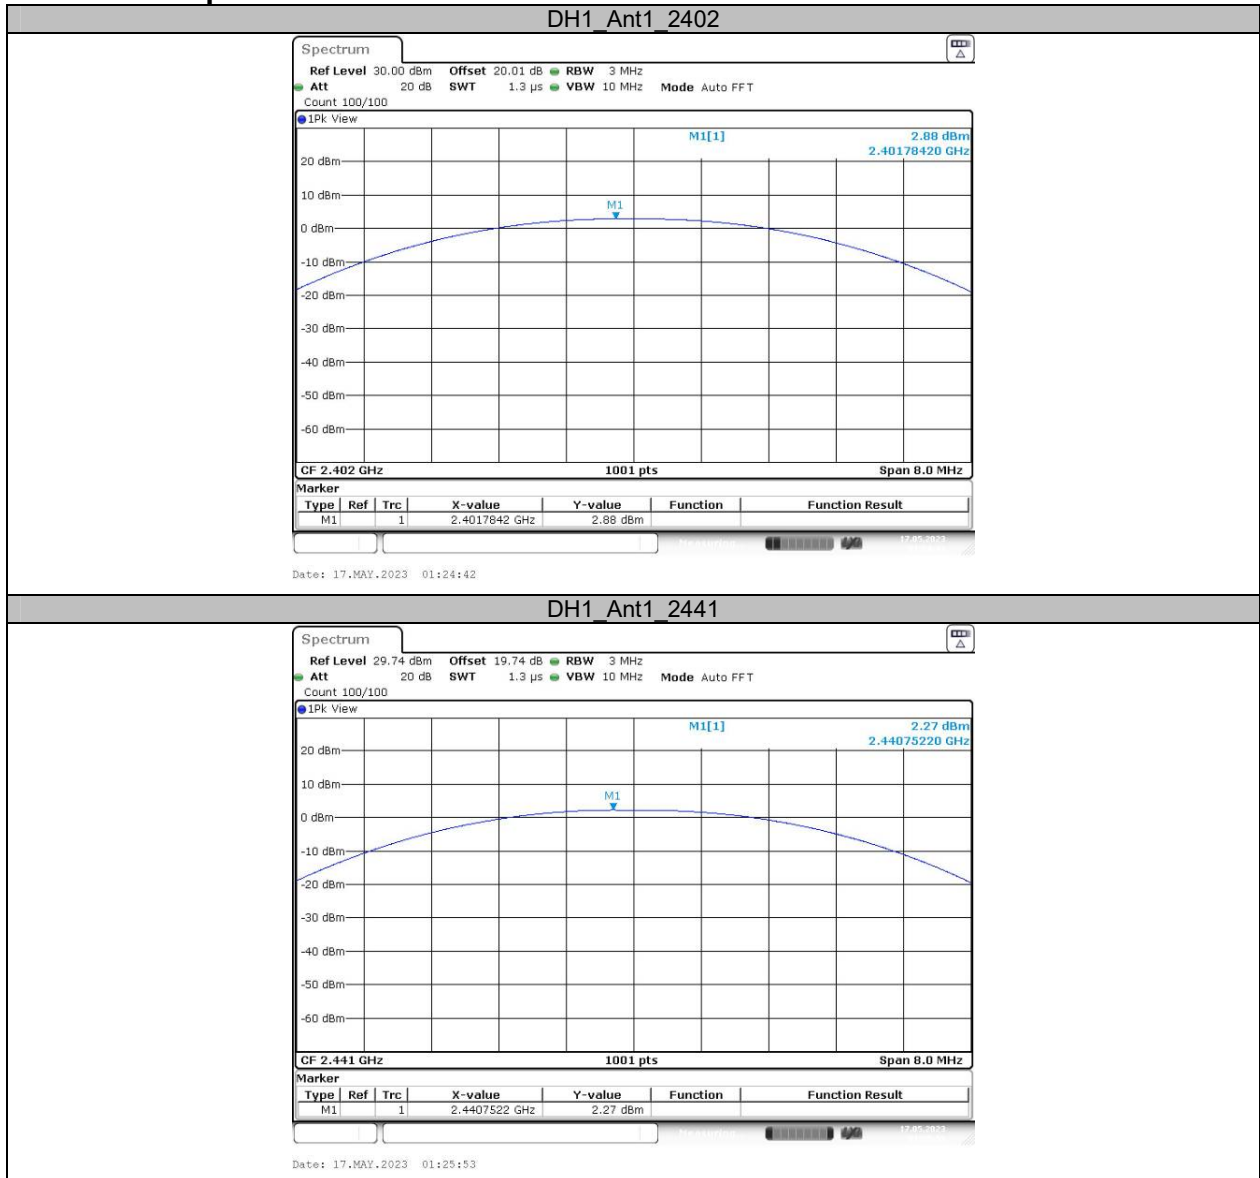

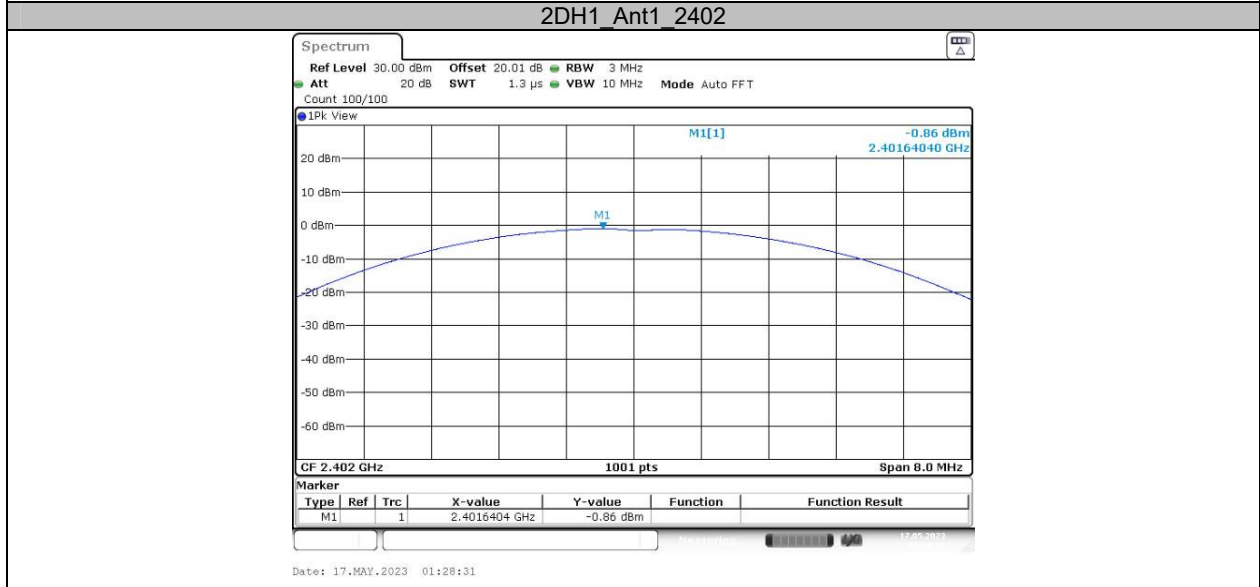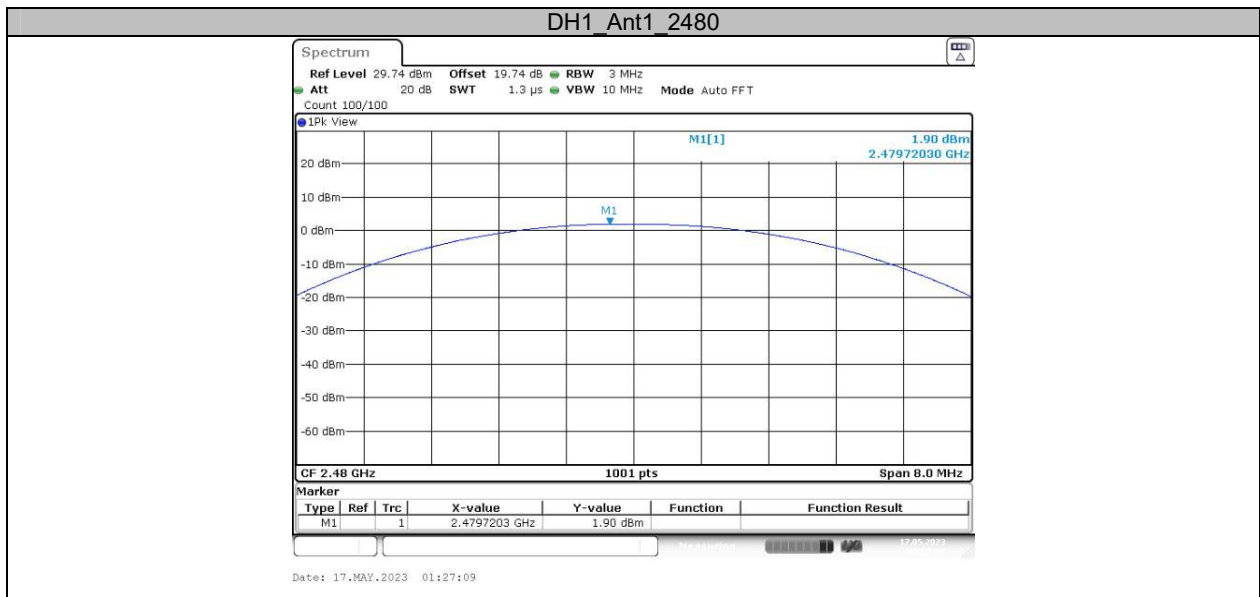

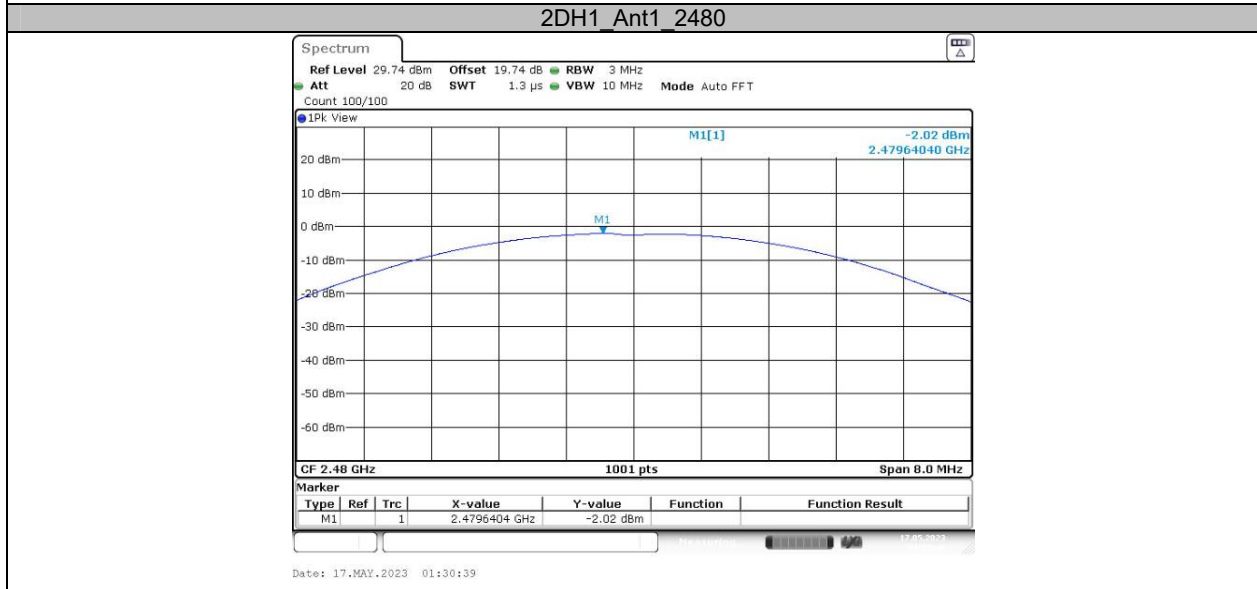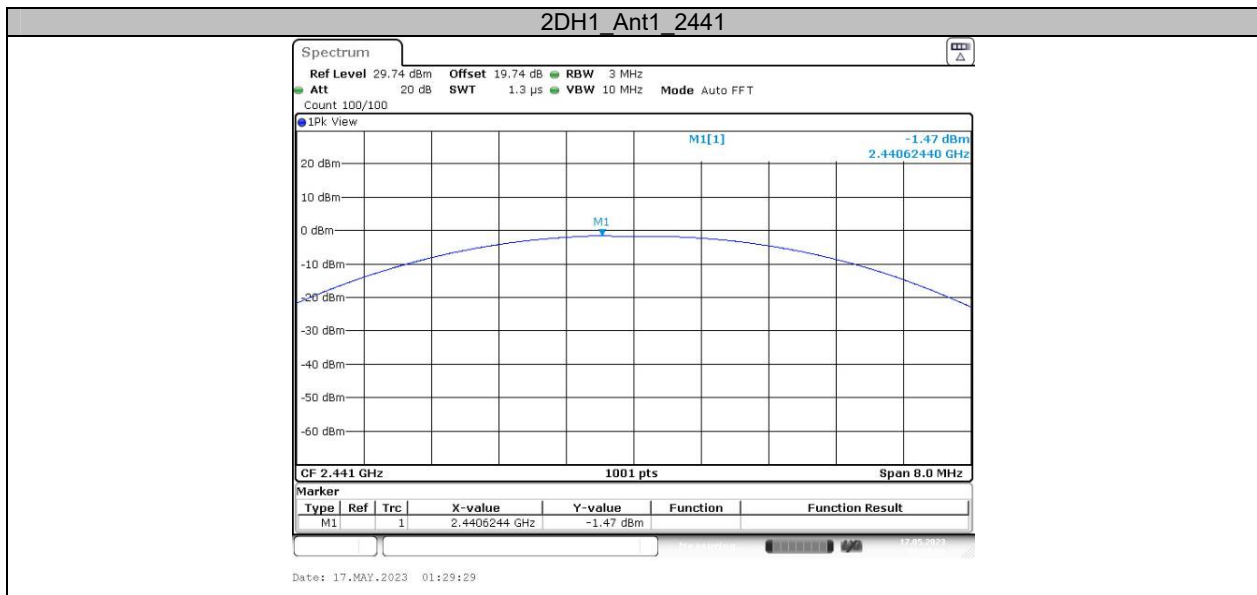

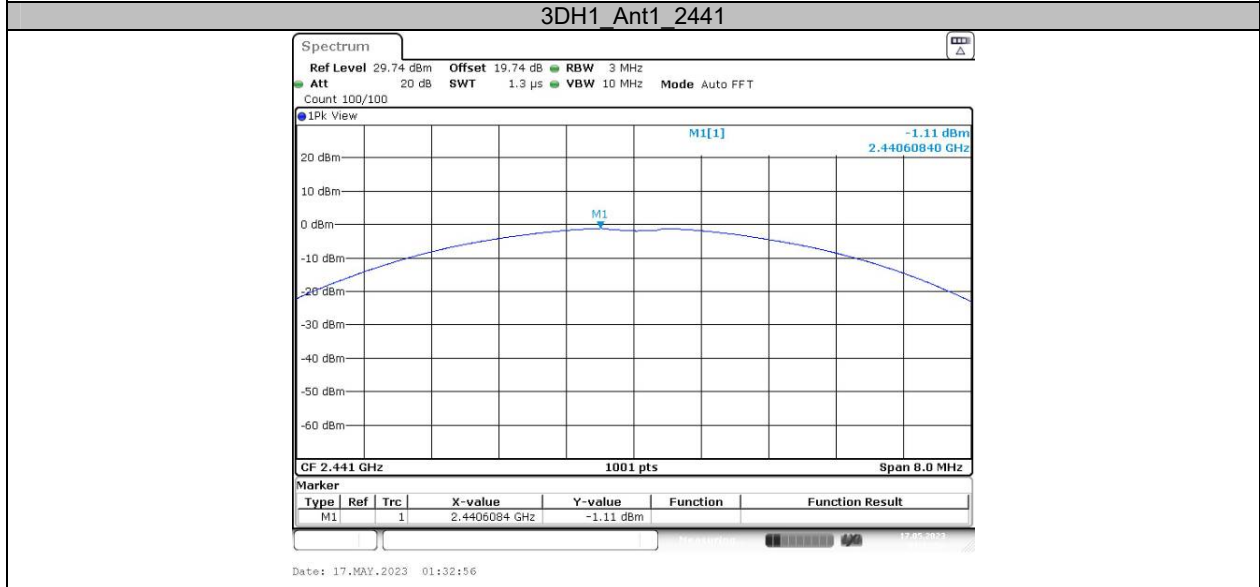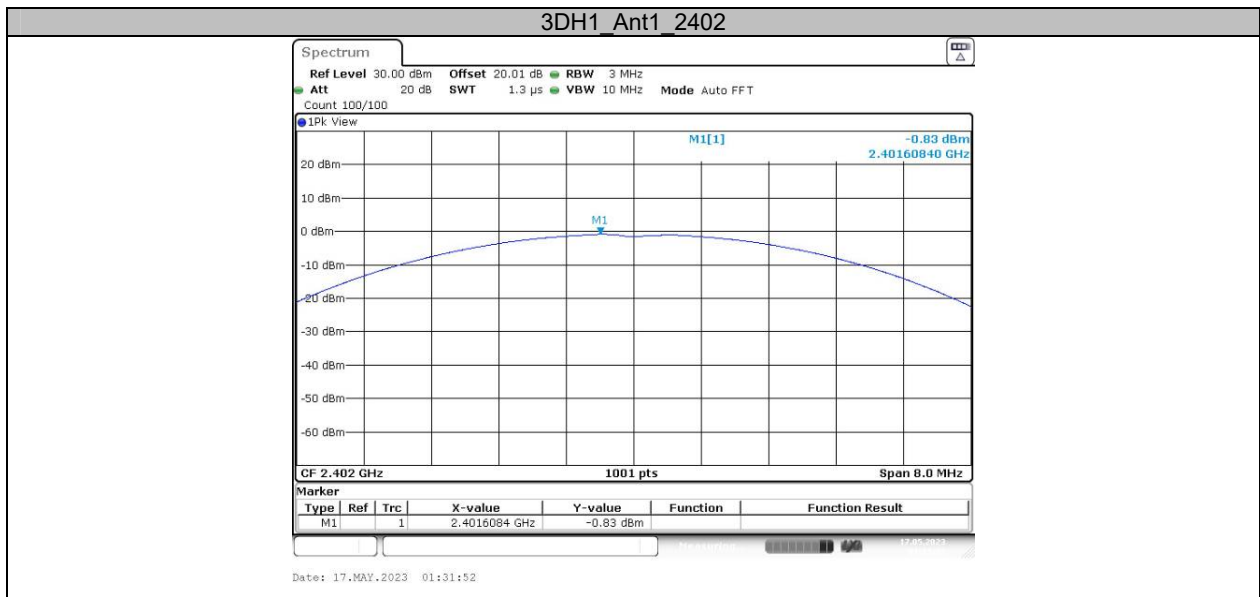

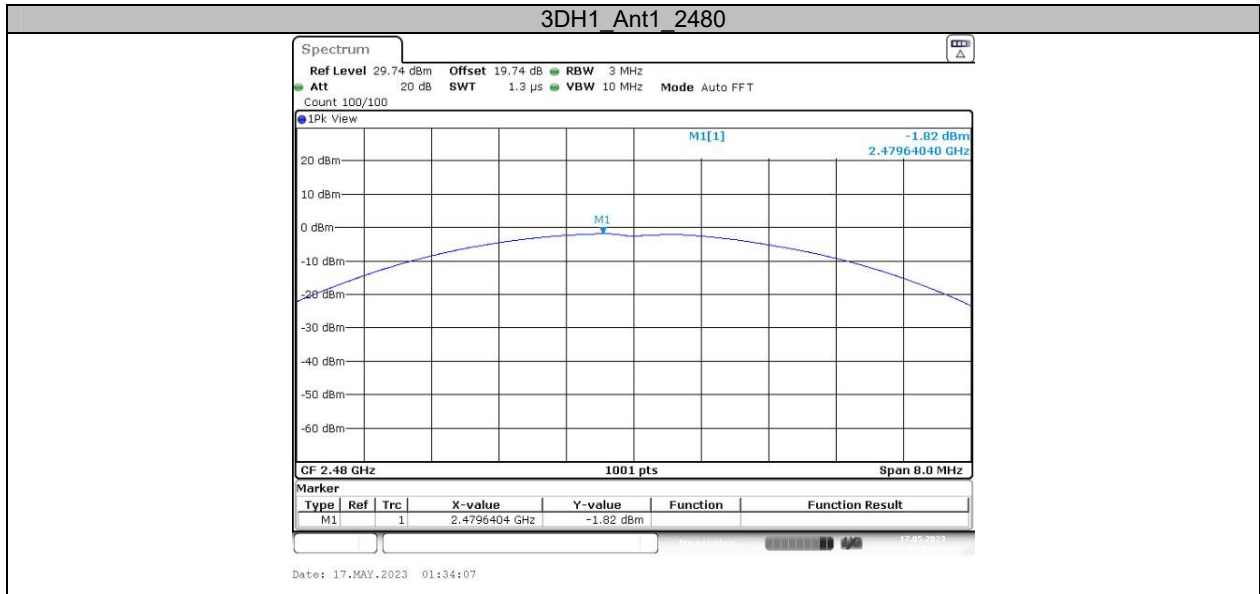


Appendix D: Carrier frequency separation**Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.000	≥ 0.587	PASS
2DH1	Ant1	Hop	1.003	≥ 0.873	PASS
3DH1	Ant1	Hop	1.003	≥ 0.840	PASS

Test Graphs



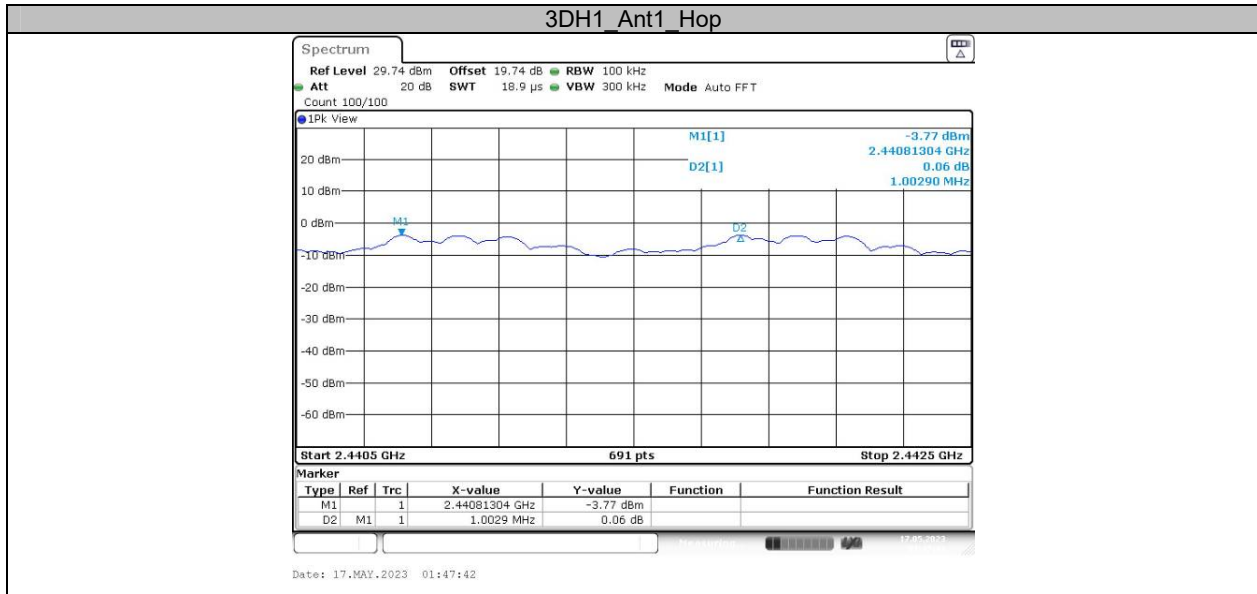

Appendix E: Time of occupancy**Test Result**


Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.38	320	0.122	≤0.4	PASS
DH3	Ant1	Hop	1.64	150	0.246	≤0.4	PASS
DH5	Ant1	Hop	2.89	120	0.346	≤0.4	PASS
2DH1	Ant1	Hop	0.39	320	0.125	≤0.4	PASS
2DH3	Ant1	Hop	1.64	140	0.230	≤0.4	PASS
2DH5	Ant1	Hop	2.89	110	0.318	≤0.4	PASS
3DH1	Ant1	Hop	0.39	330	0.129	≤0.4	PASS
3DH3	Ant1	Hop	1.64	180	0.295	≤0.4	PASS
3DH5	Ant1	Hop	2.89	120	0.347	≤0.4	PASS


Note 1: A period time= $0.4 \times 79 = 31.6(S)$, Result=BurstWidth*Totalhops



Note 2: Totalhops=Hopping Number in $3.16s \times 10$


Note 3: Hopping Number in $3.16s = \text{Total of highest signals in } 3.16s(\text{Second high signals were other channel})$


Test Graphs

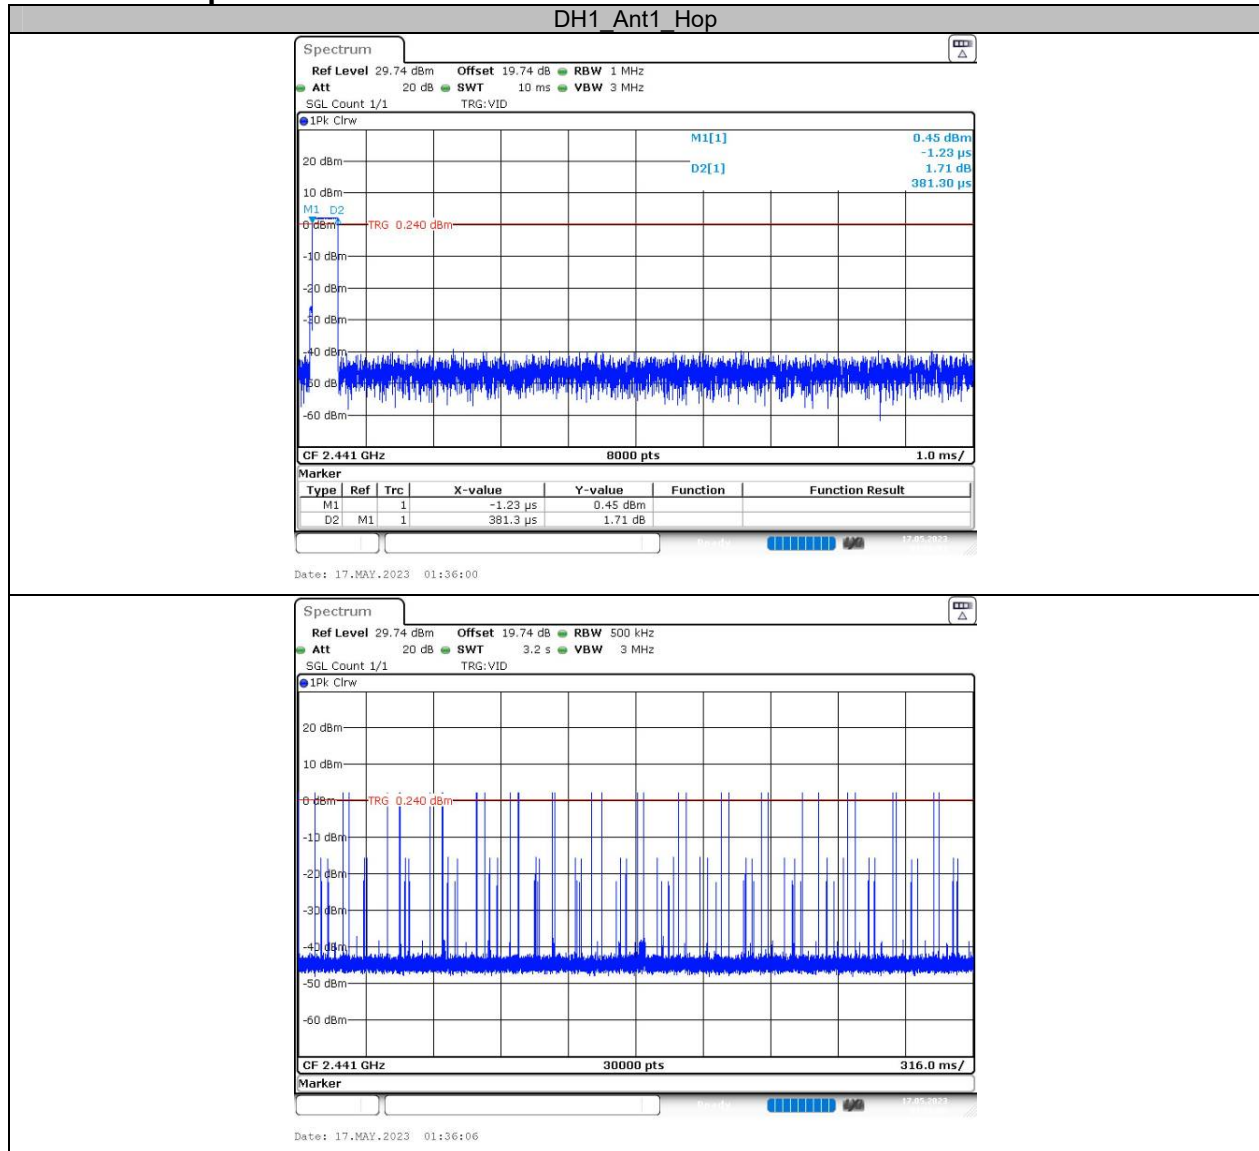


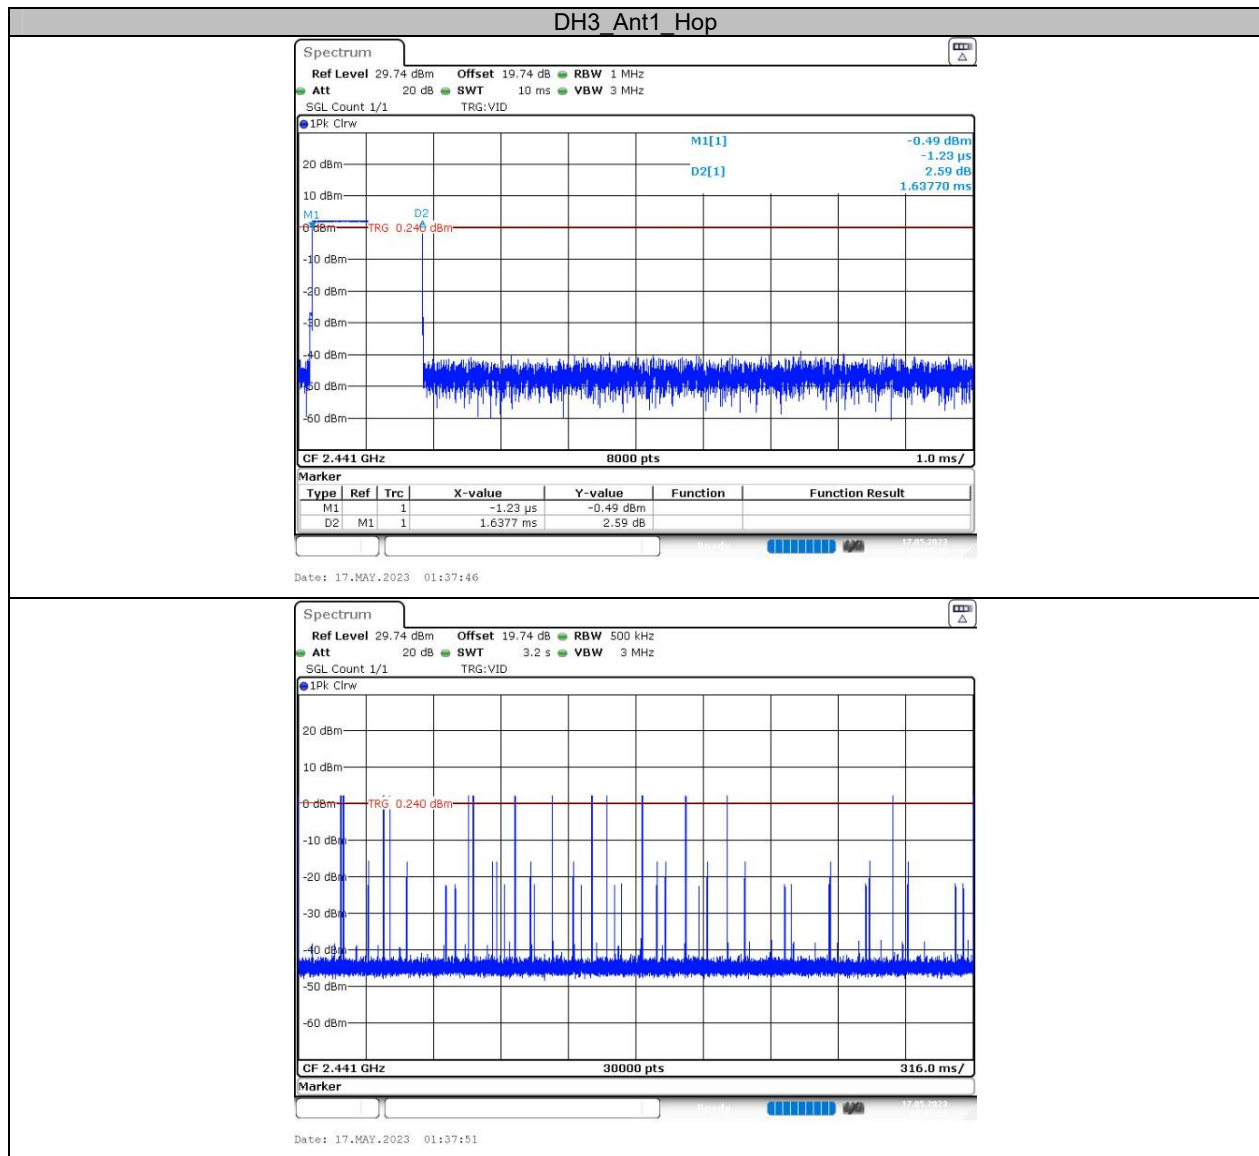


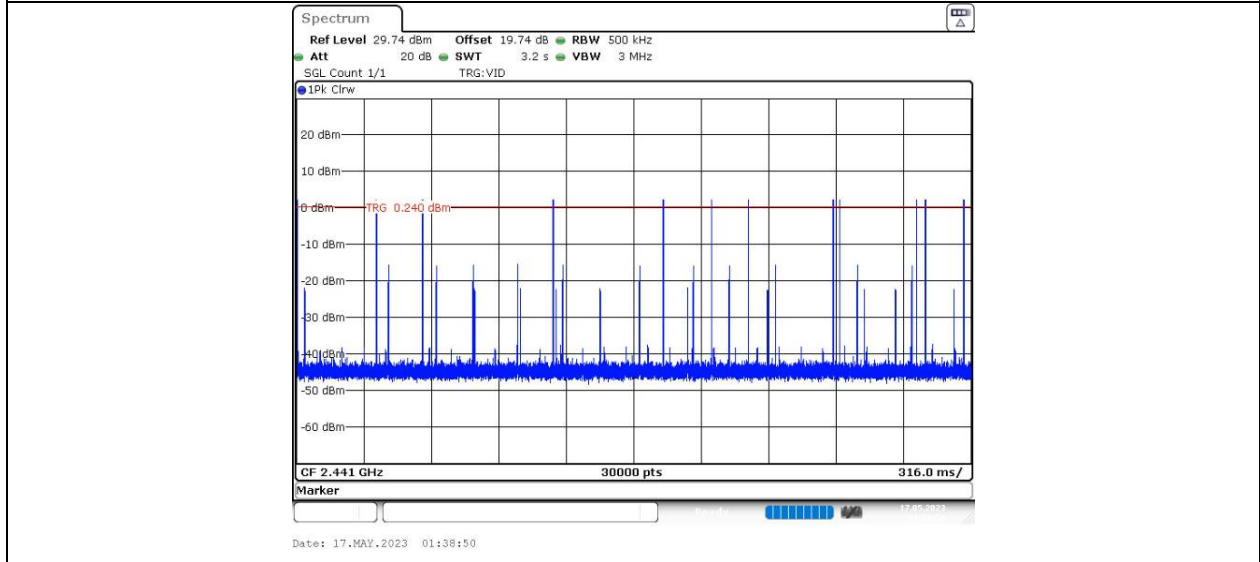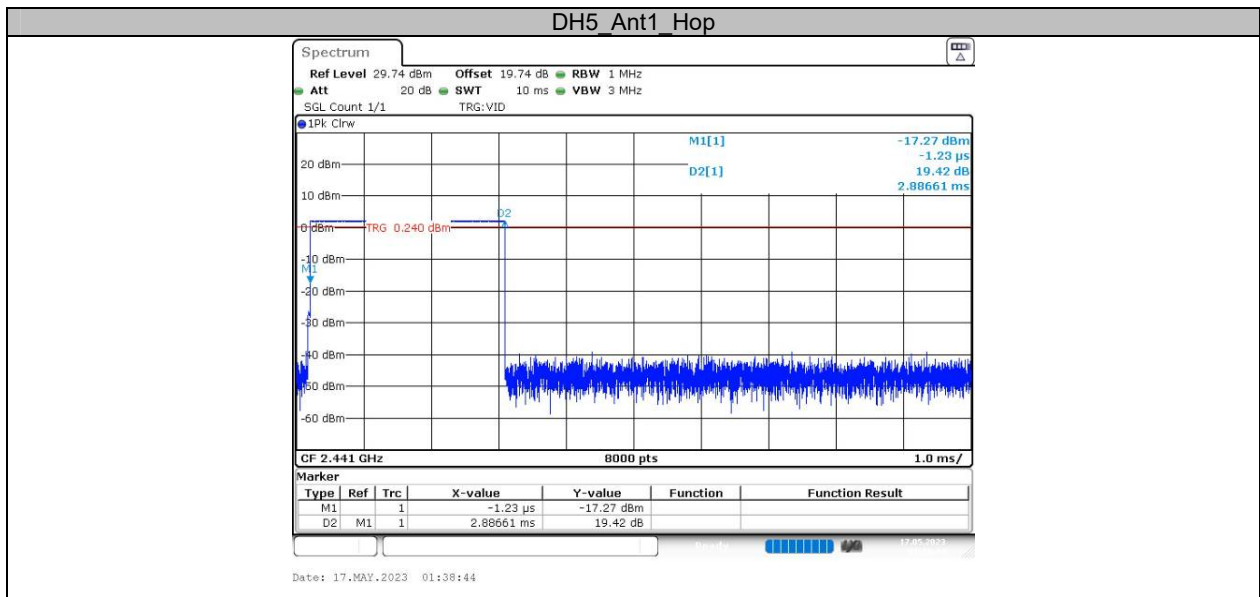


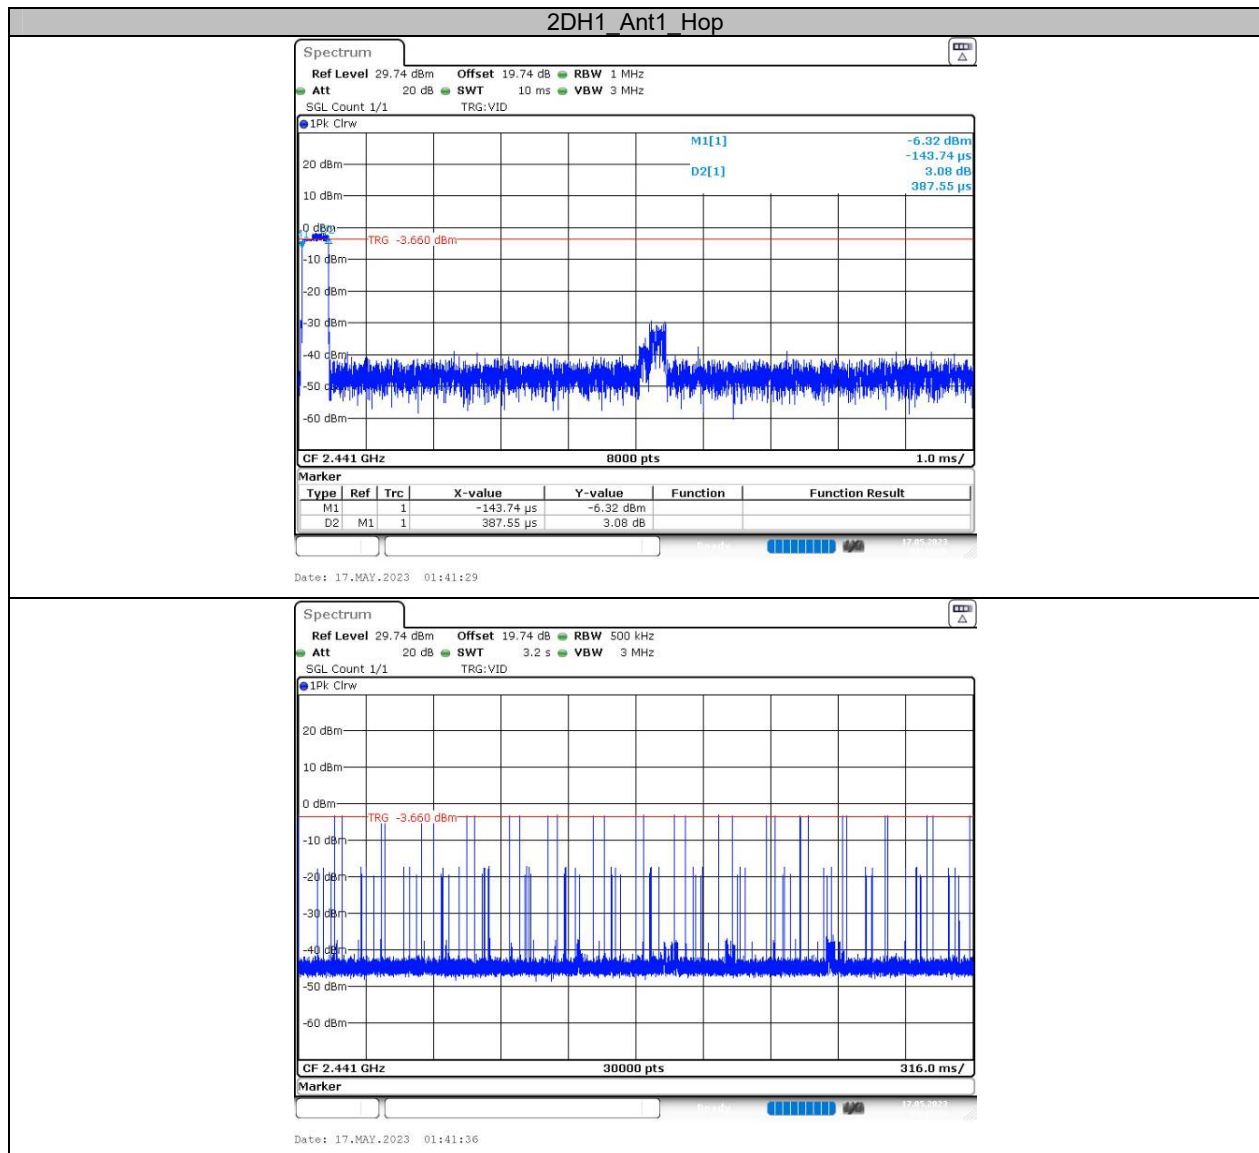


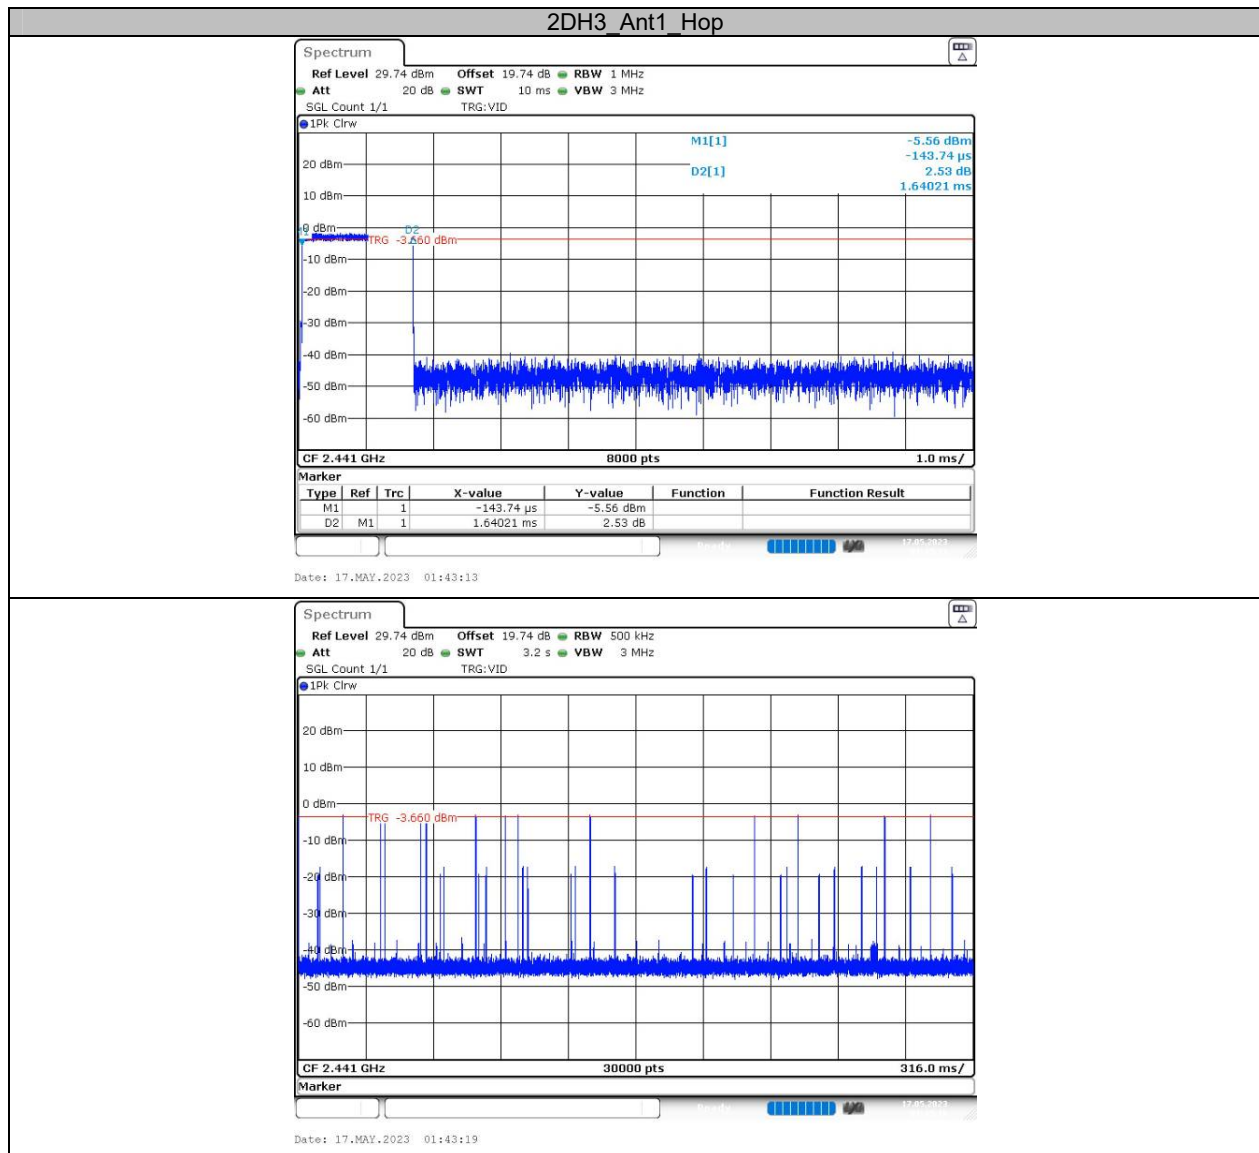

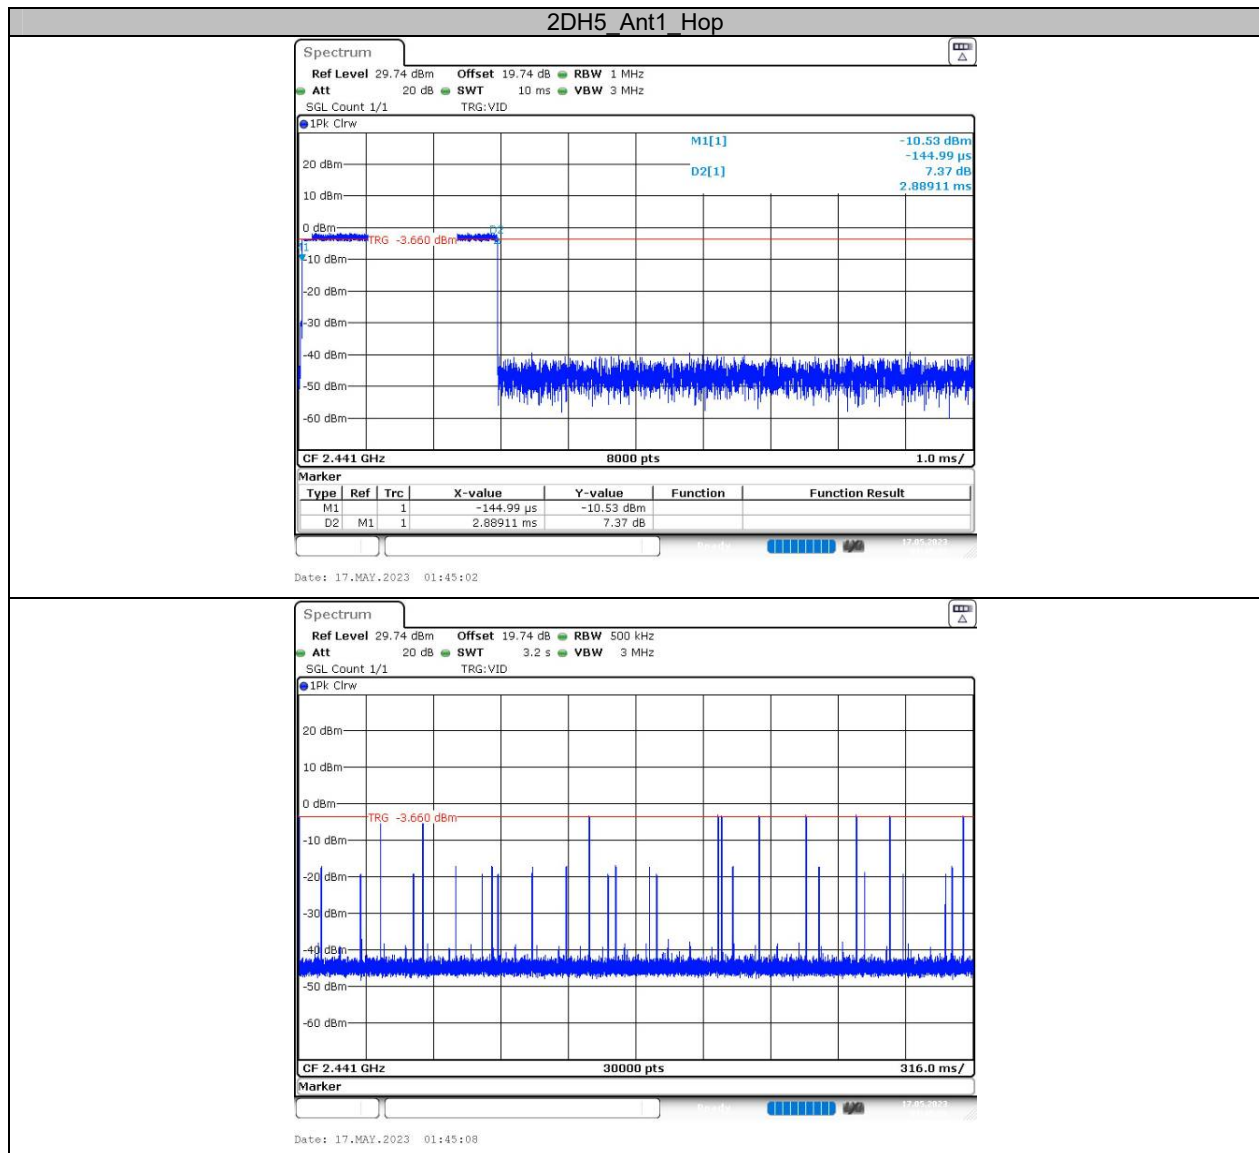

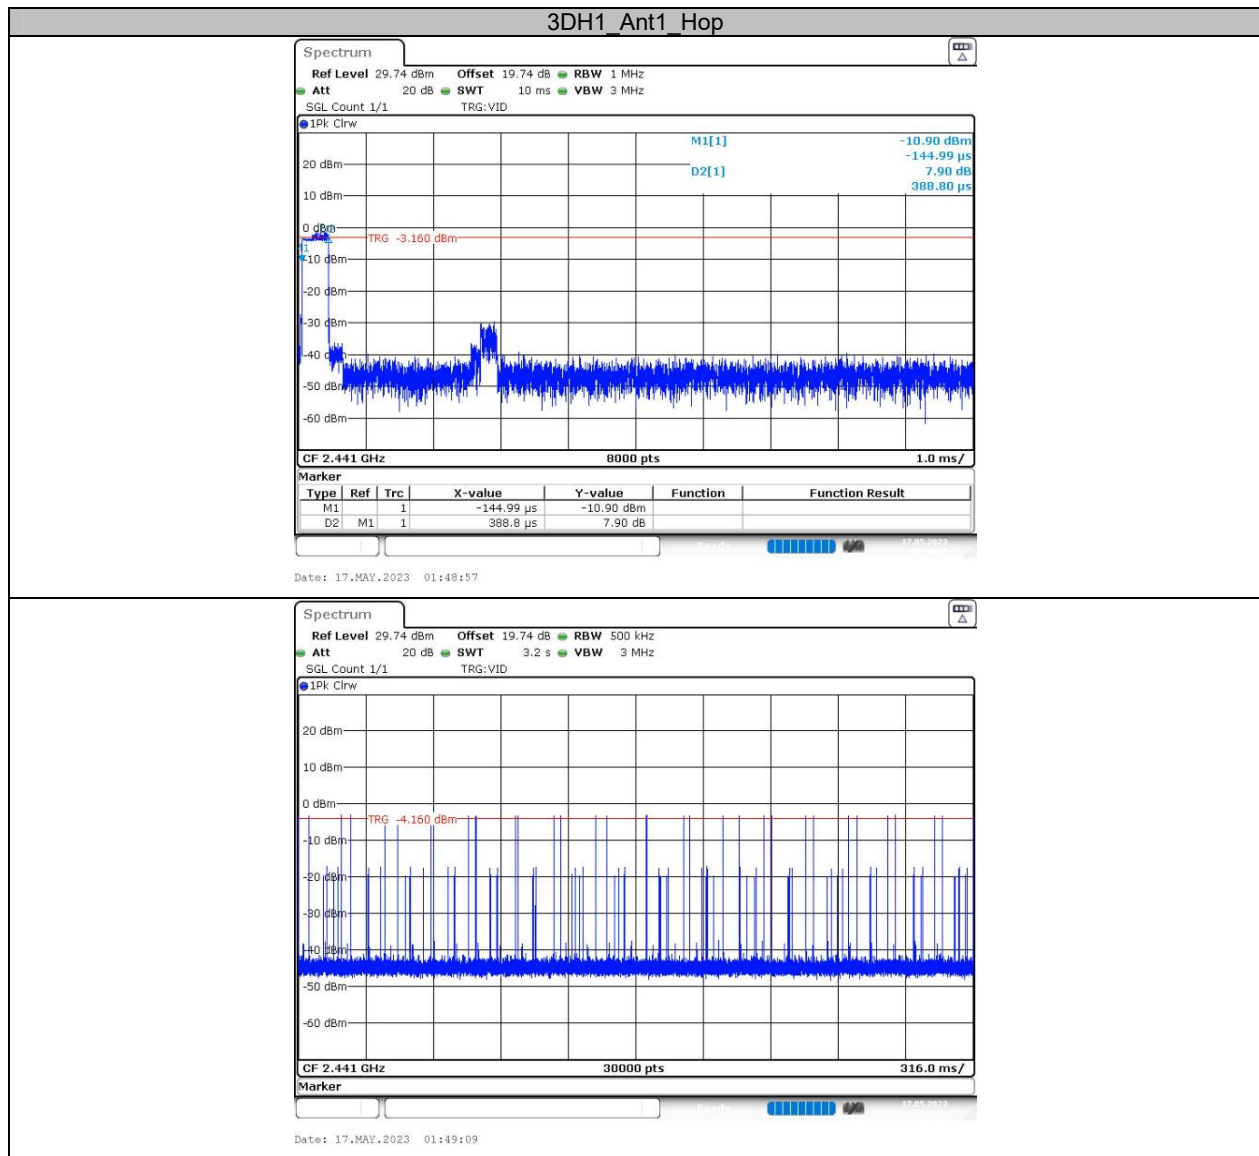

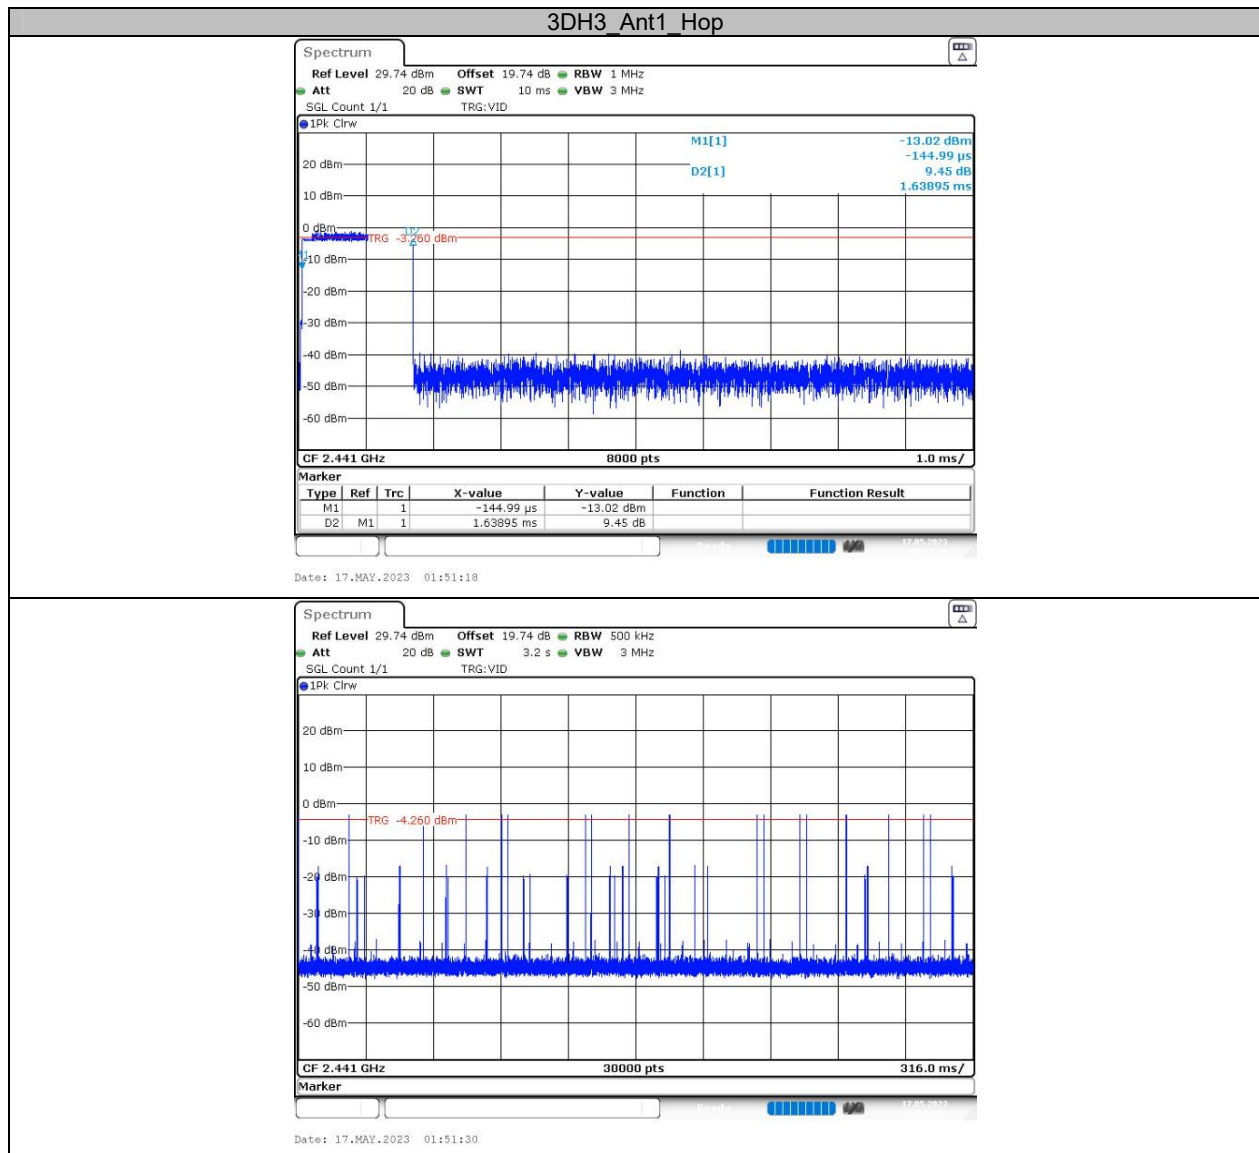


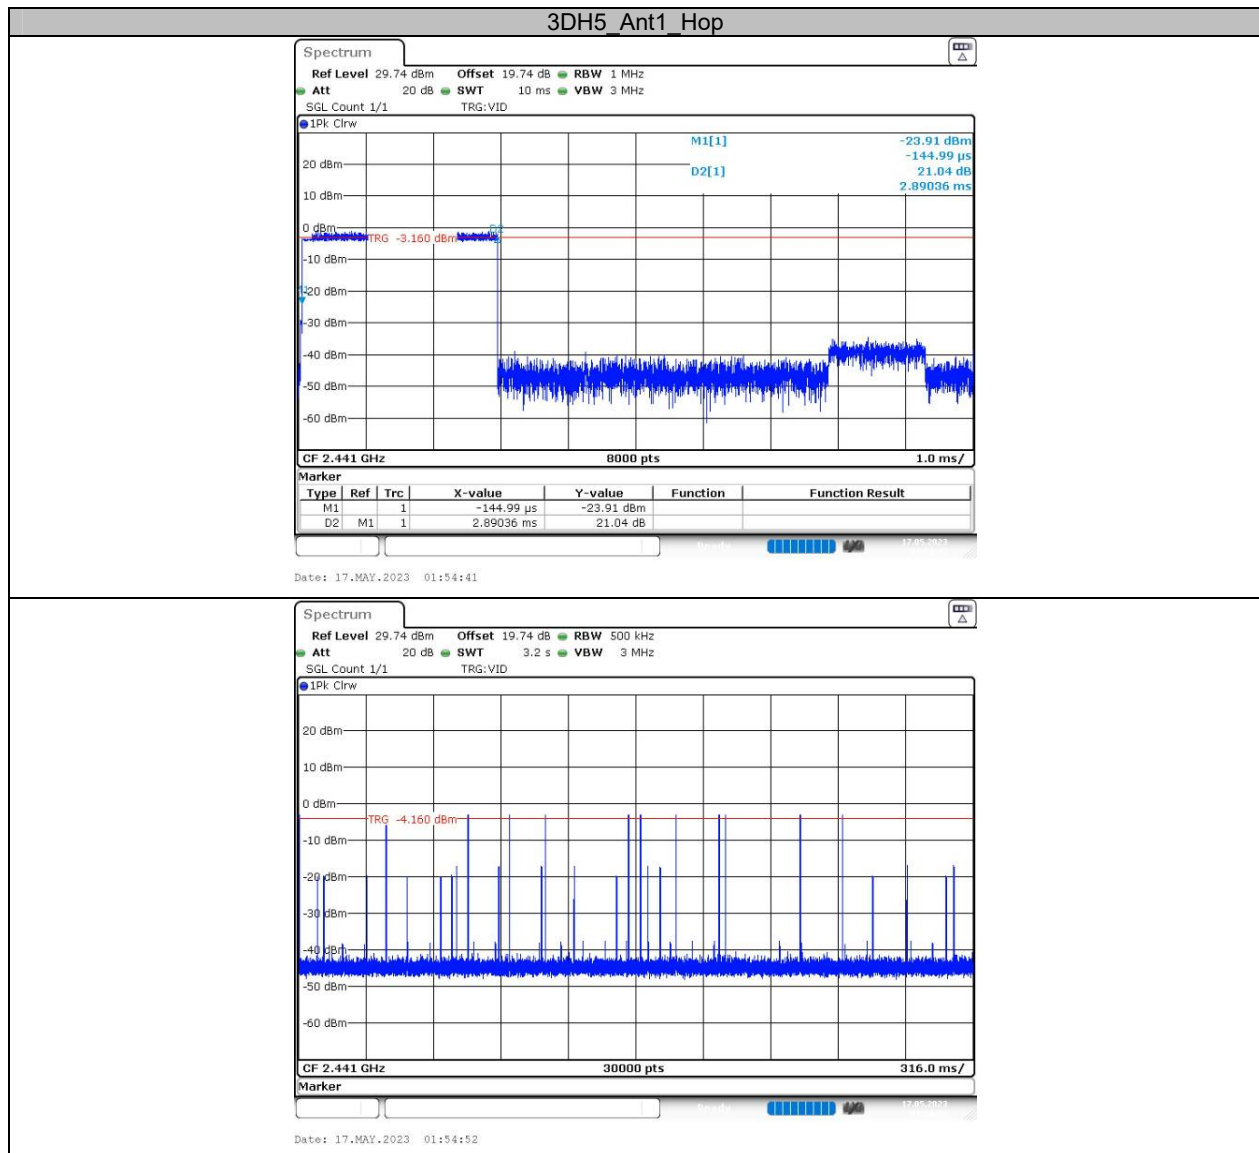


Appendix F: Number of hopping channels**Test Result**

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	≥15	PASS
2DH1	Ant1	Hop	79	≥15	PASS
3DH1	Ant1	Hop	79	≥15	PASS


Test Graphs


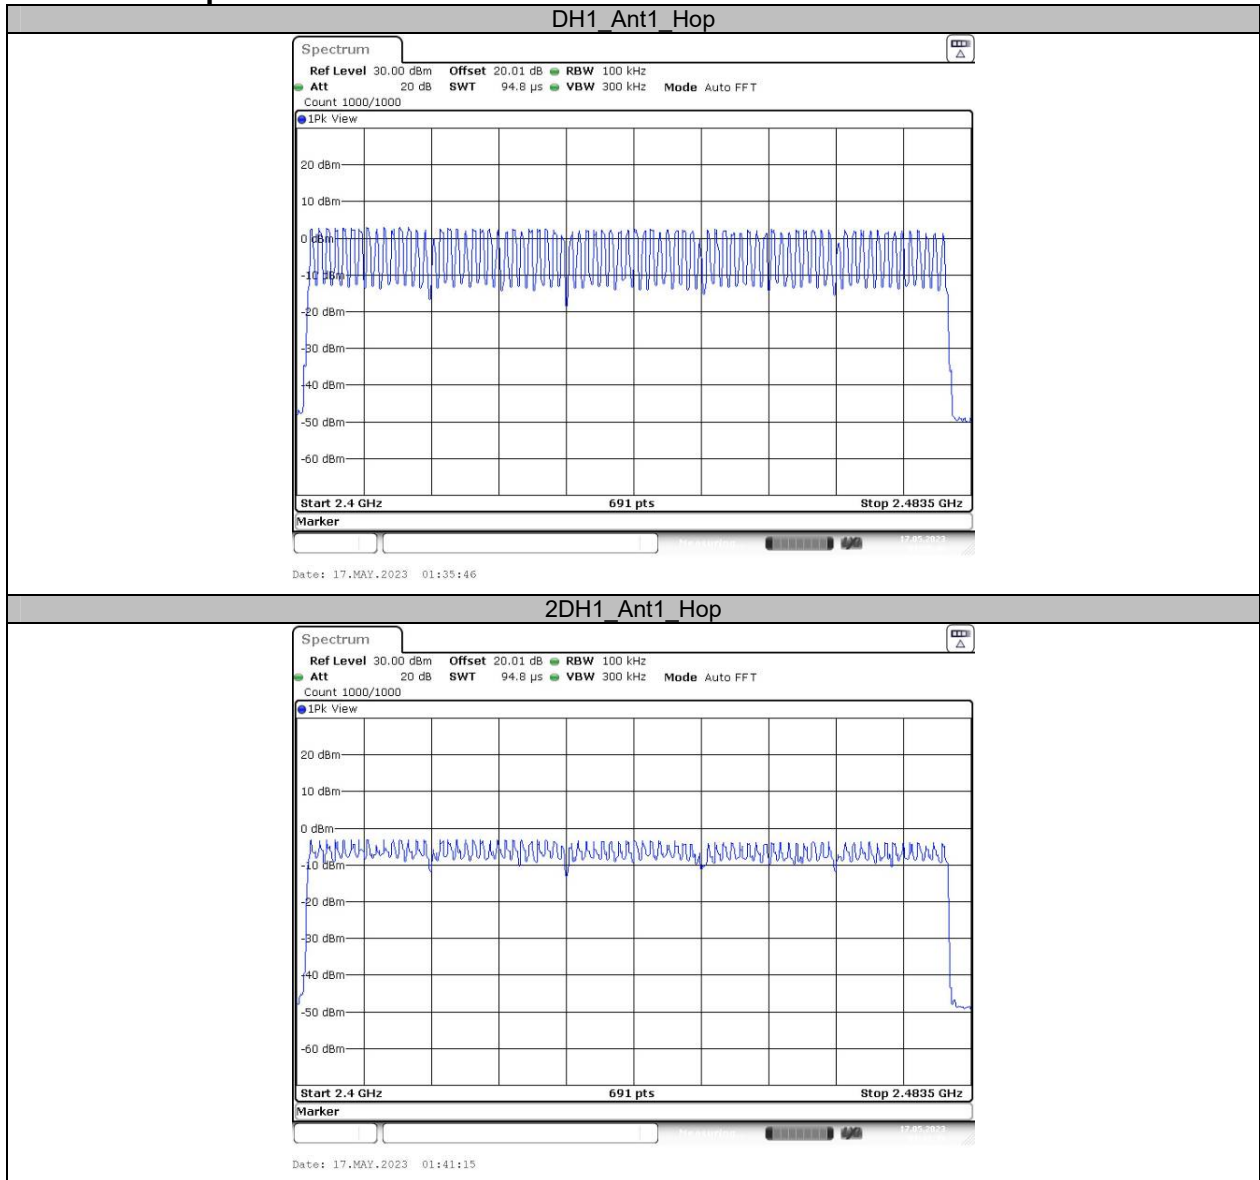



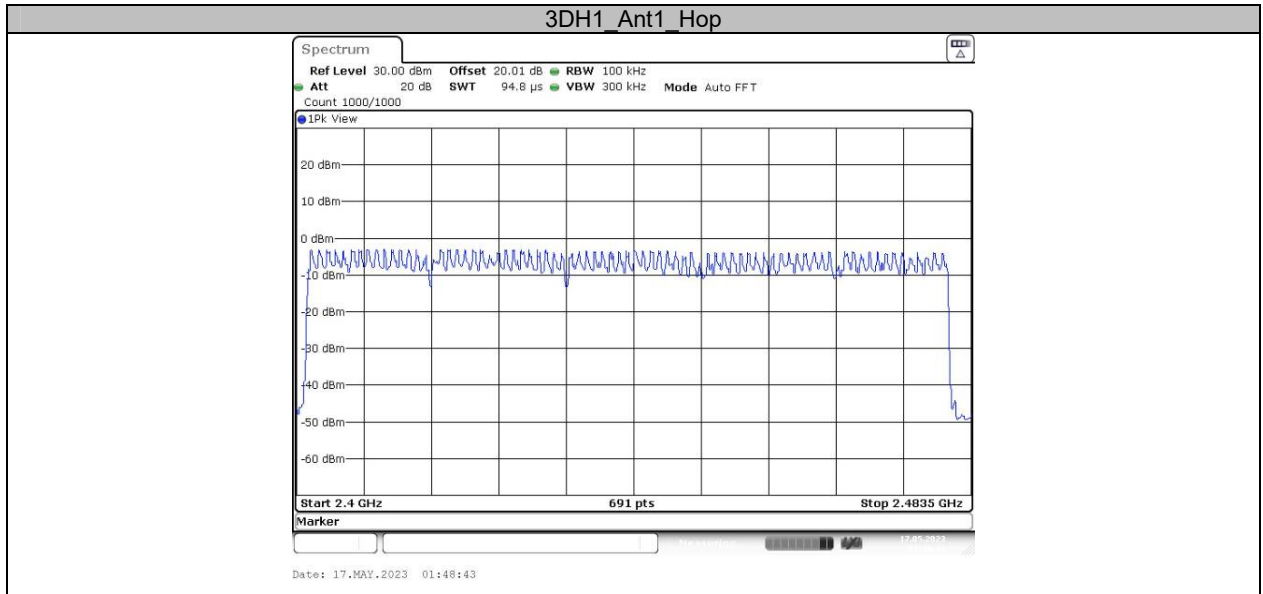




Appendix G: Band edge measurements



Test Graphs


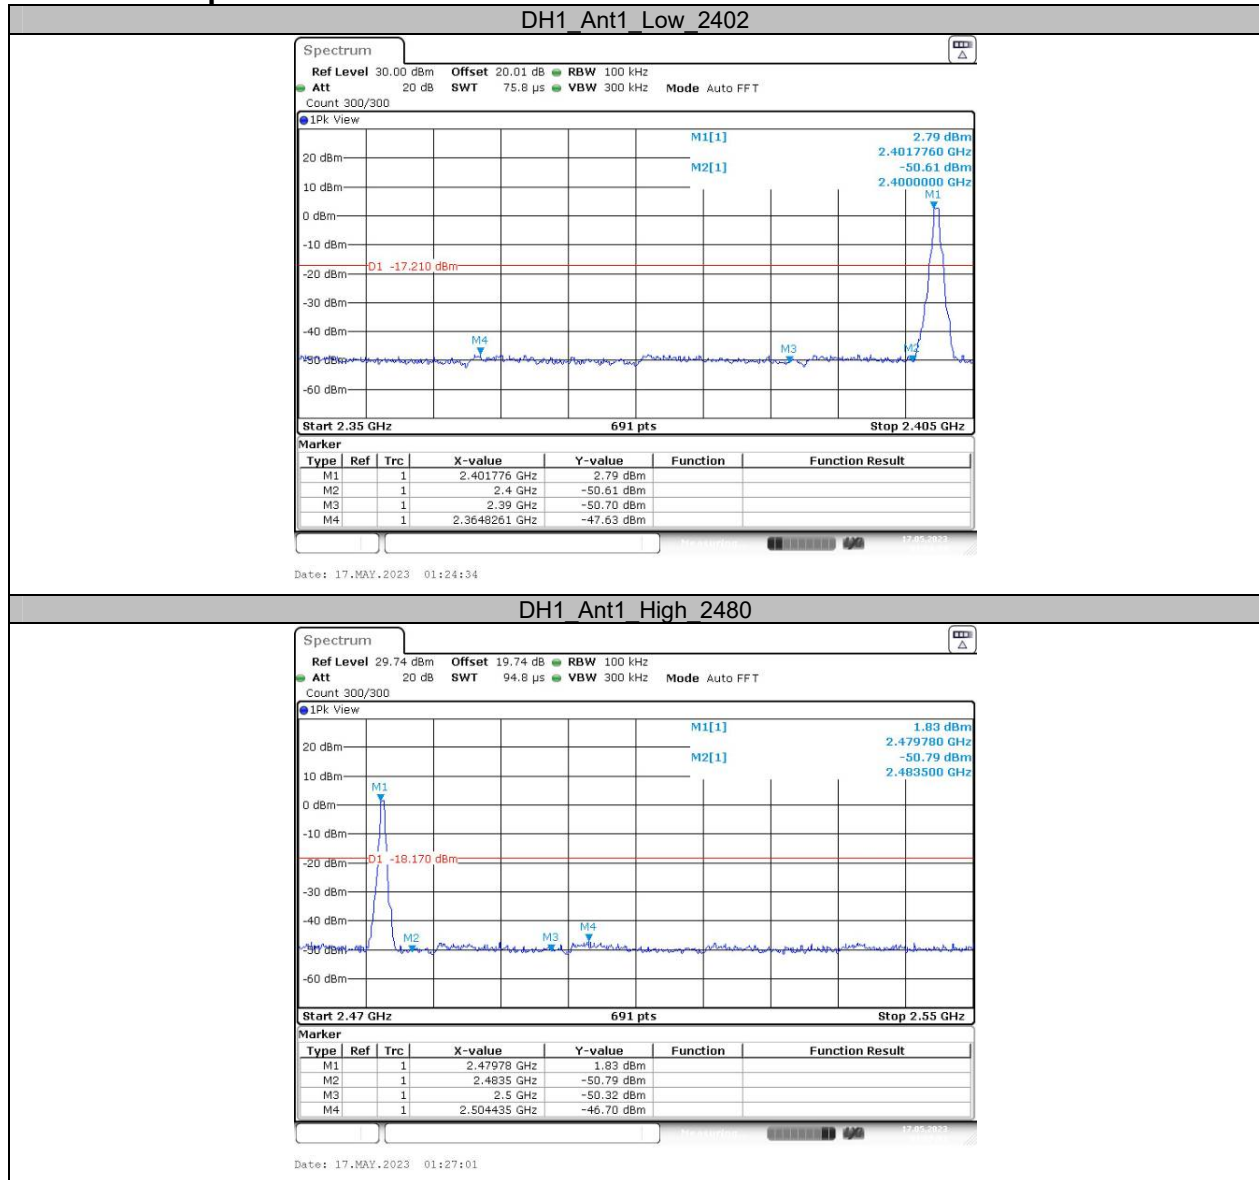


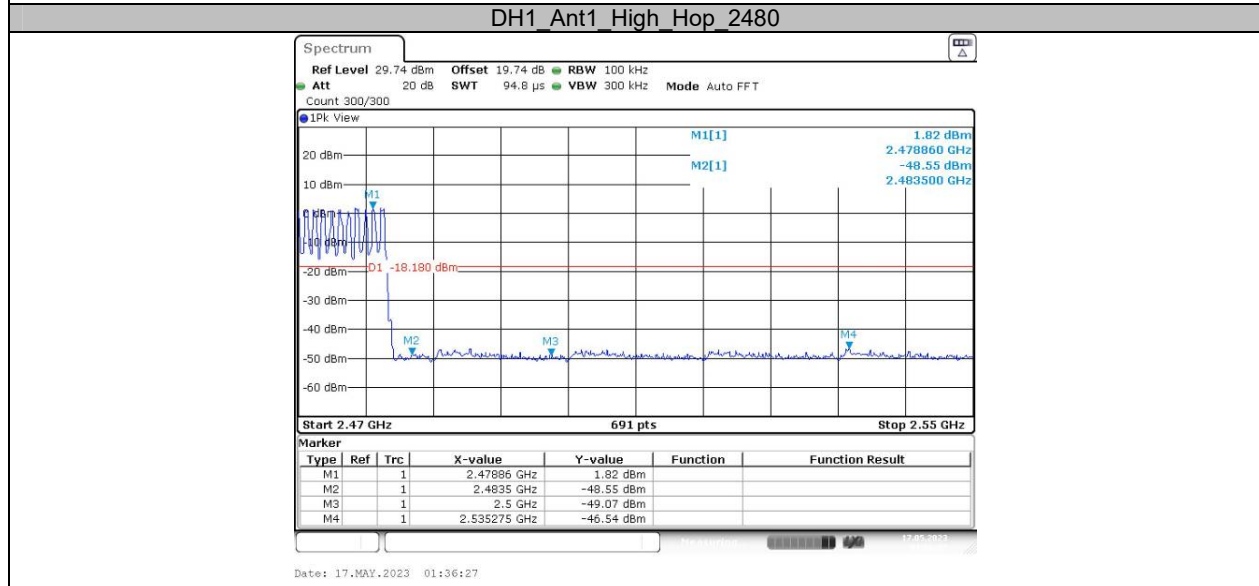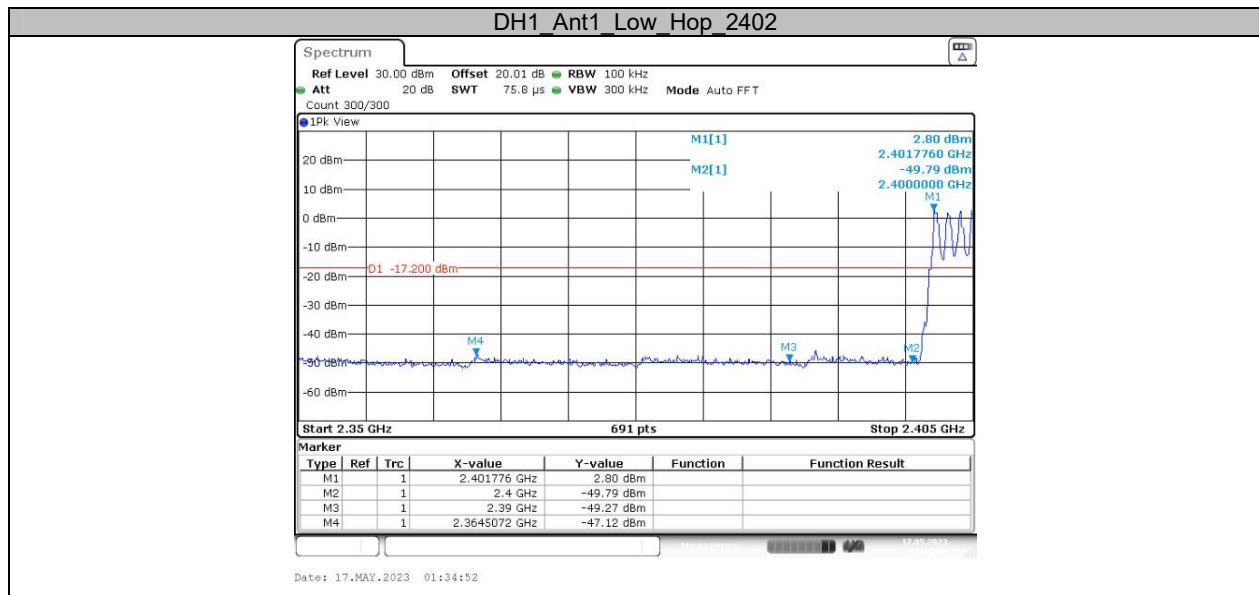

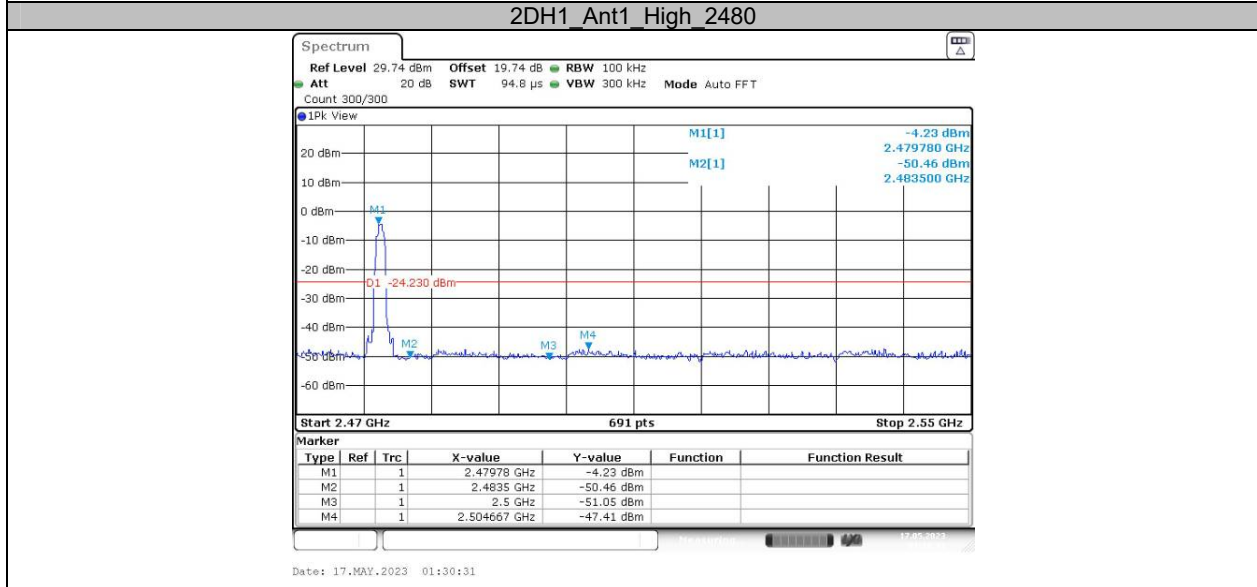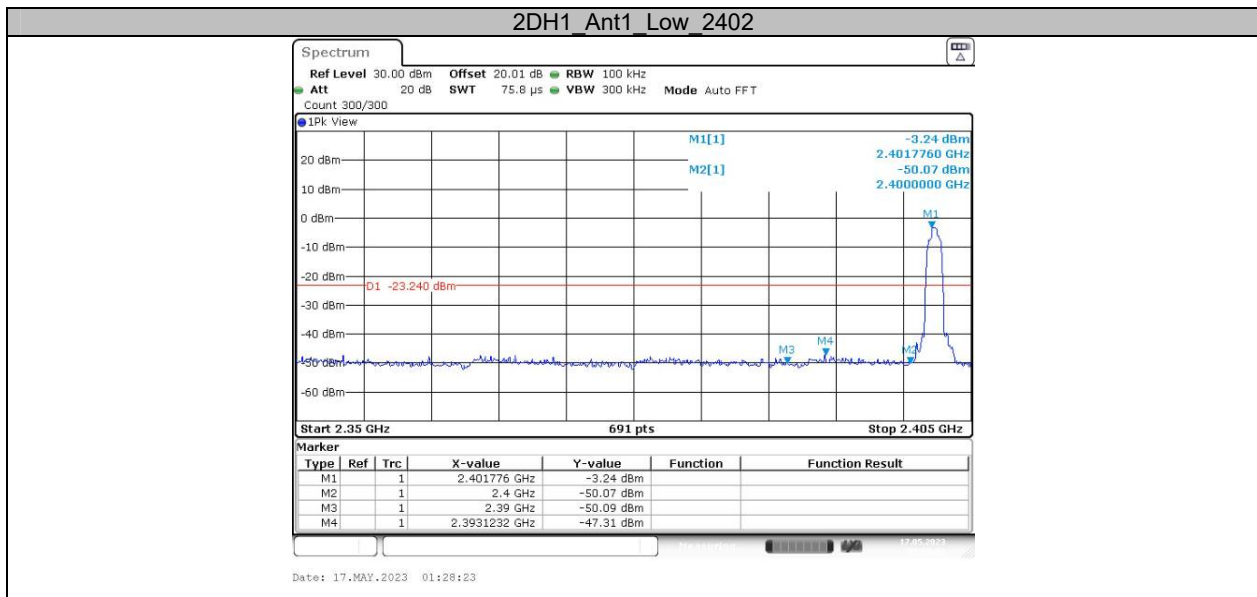

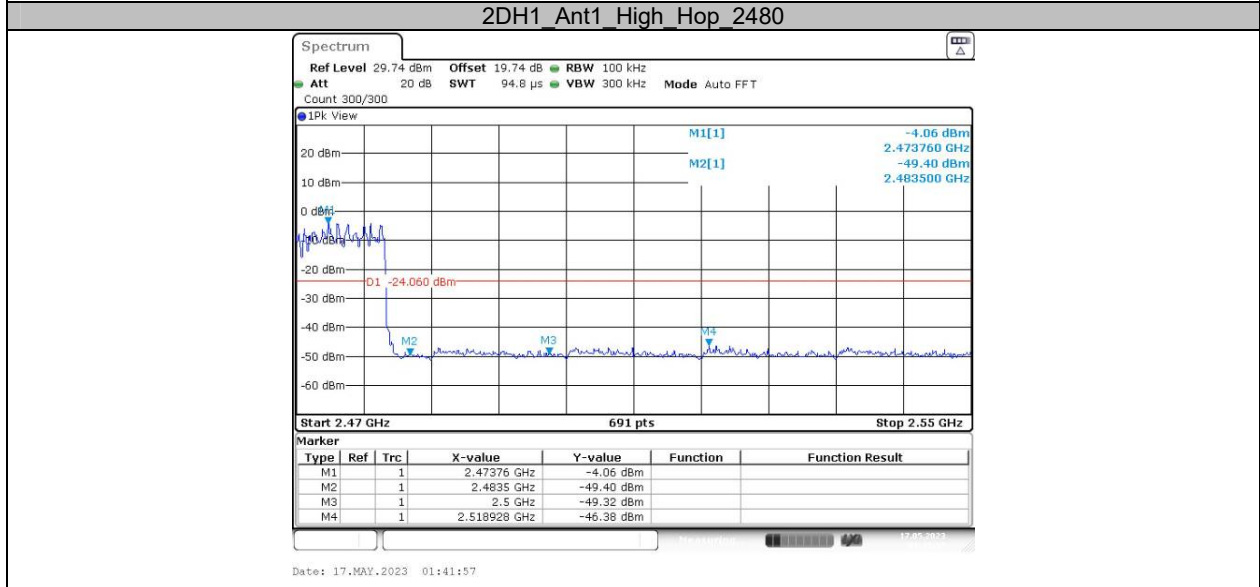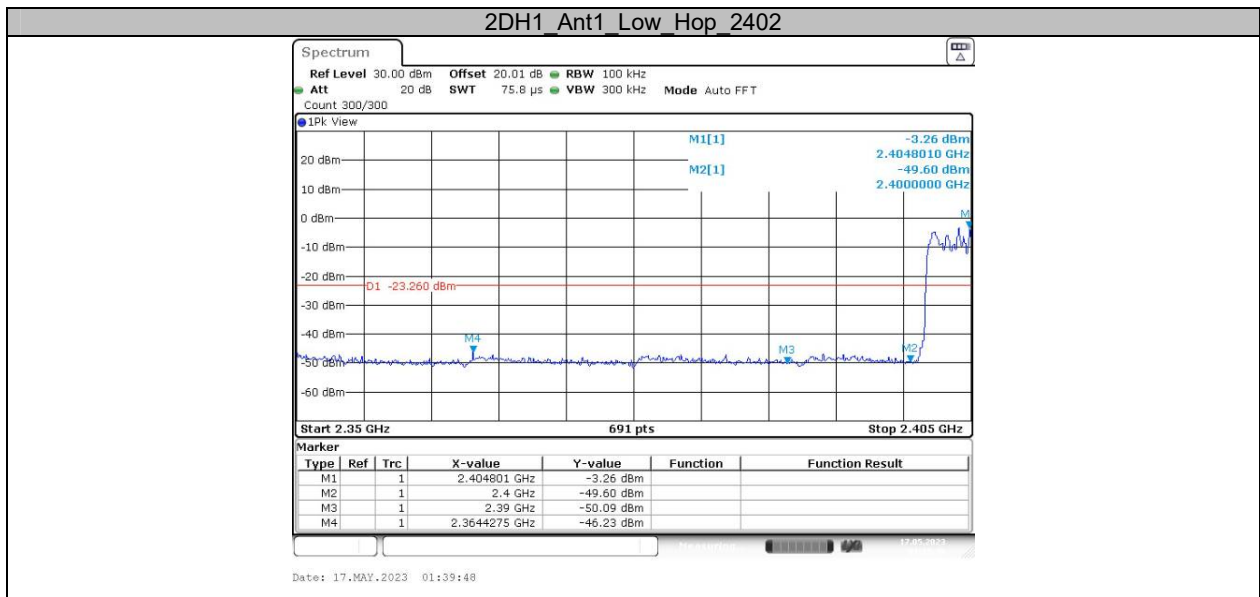

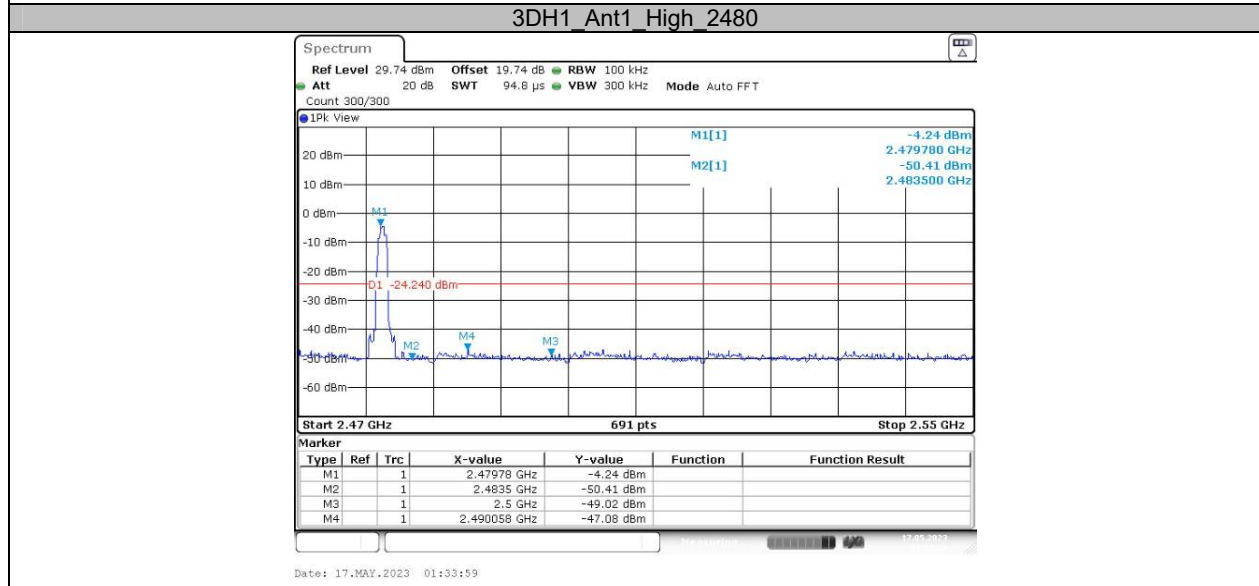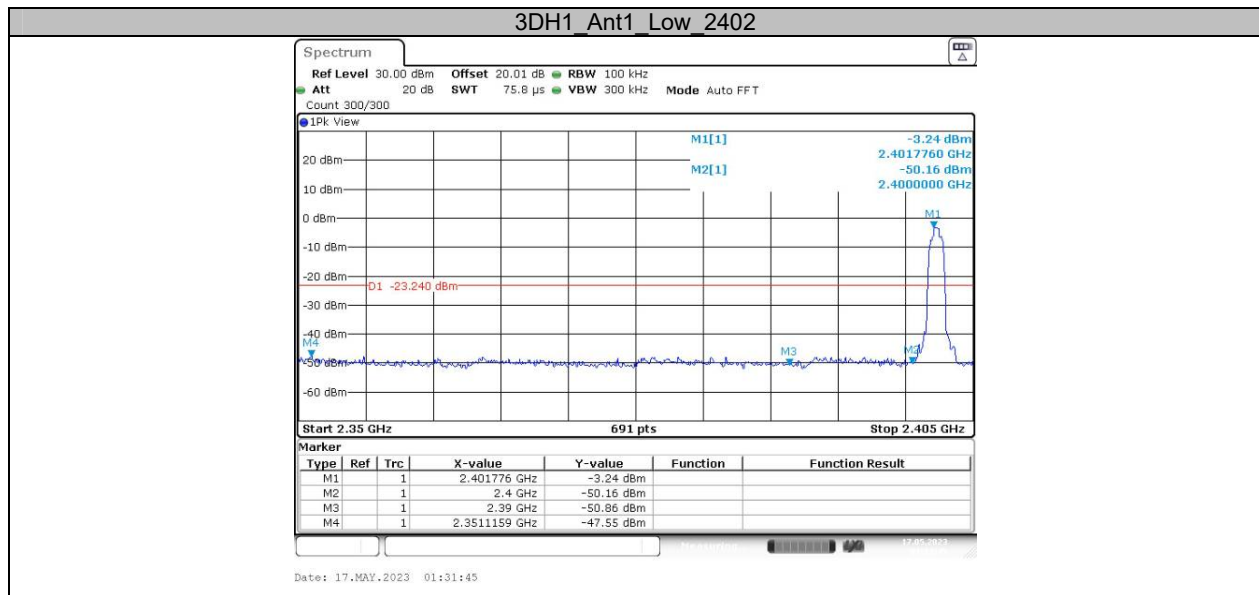

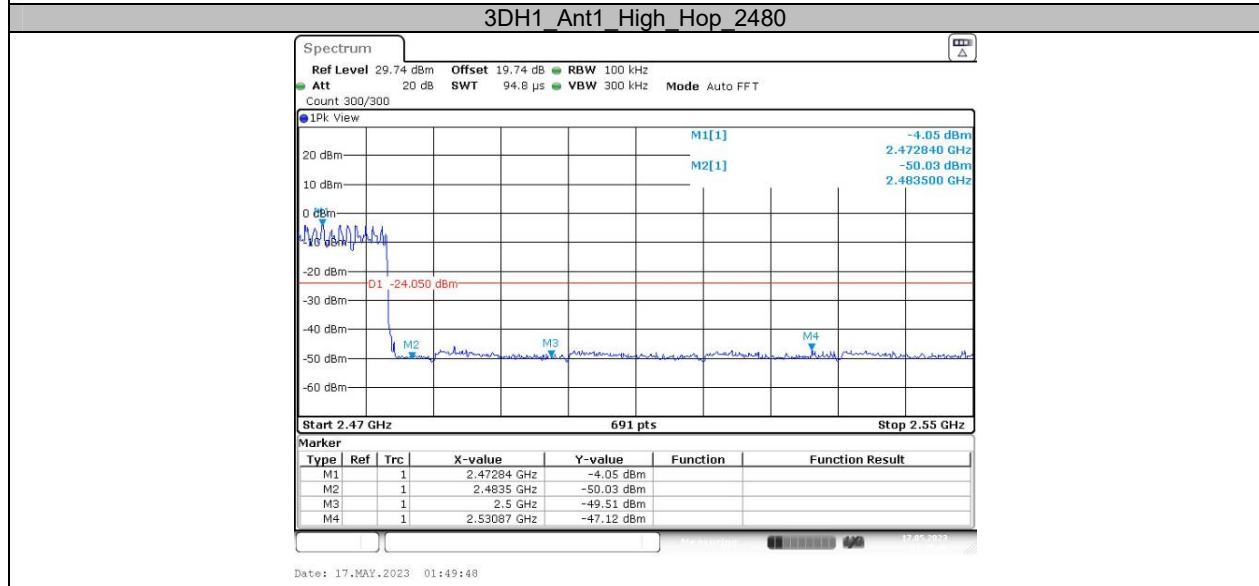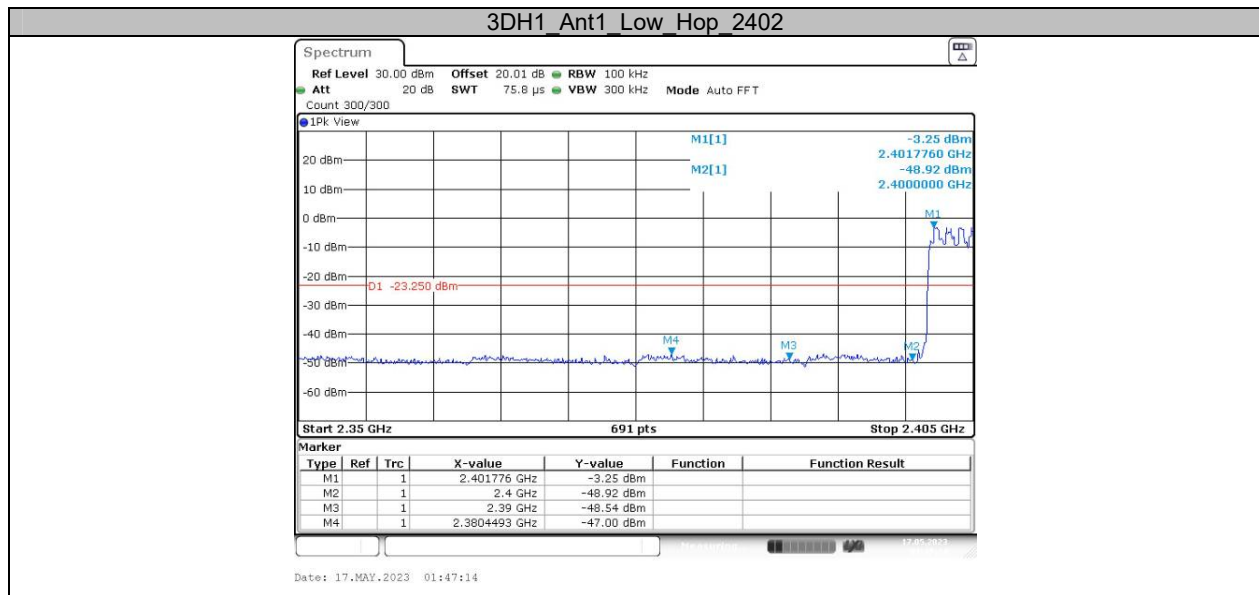

***** END OF REPORT *****