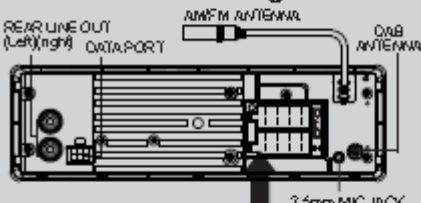




		<h1>RM1902</h1>	
<p>Radio BT DAB+ Frequency Range: DAB: 174.928 - 239.2MHz FM : 87.5 - 108MHz AM : 522 - 1620KHz USB Output : 5V = 1A Loudspeakers : 4 - 8 Ohms Power supply : DC12V = 15A Negative Earth</p>		<h3>Connectors and Signals</h3> 	
<p>THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES AND REGULATIONS. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: 1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND 2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.</p>		<p>Switch the FUSE location to change the ACC & B+ Pin out/location on the ISO connector</p> 	
<p>CE  FC </p> <p> 14R - 05 16293</p>		<p>Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice #050 dated June 28, 2007.</p>	
<p>AAMP Global, 25 Woolmer Trading Est. Woolmer Way, Bordon, Hampshire United Kingdom, GU35 9QE</p>		<p>CAN IC ES-3(B)/NM B-3(B) FCC ID X90 RM1902 IC:10901A, RM1902</p>	