

Testing Report

Customer Name: LINAK A/S


Product Name: BA002

Sample Model: BA002

Reference Standard: *GB/T 9410-2008; ANSI/IEEE Std 149-1979*

Issue Date: 2022.8.11

Antenna diagram

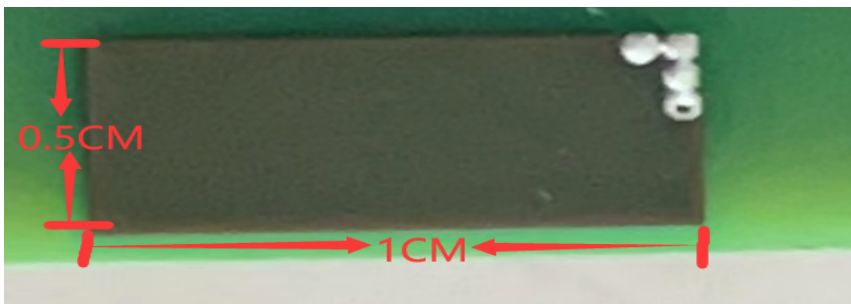

| | |
|------------------|-----------------|
| Engineer: Jeremy | Date: 2022.8.10 |
| Auditor: Eason | Date: 2022.8.11 |
| Approver: Aaron | Date: 2022.8.11 |



Version

| Version No. | Date | Description | Formulate | Approval |
|-------------|-----------|-------------------------------|-----------|----------|
| A0 | 2022.8.11 | For the first time, formulate | Jeremy | Eason |
| | | | | |
| | | | | |

Contents

1.General Information3

 1.1 General information of testing institutions3

 1.2 Testing principle 3

 1.3 Test equipment4

 1.4 Test environment4

 1.5 Statement 4

2.Sample Information 5

 2.1 Client information5

 2.2 Description of EUT(S)5

 2.3 EUT appearance6

 2.4 DUT setup photo of free space OTA testing 6

3.Test Results 7

 3.1 Test standard 7

 3.2 Test uncertainty7

 3.3 Test data 8

 3.3.1 S11 parameters8

 3.3.2 VSWR8

 3.3.3 Typical free space efficiency and gain 8

 3.3.4 Typical free space radiation pattern9

 (The following is blank) 10


1.General Information

1.1 General information of testing institutions

| | |
|------------------|---|
| Name | Shenzhen RFI-LAB Communication Technology Co., Ltd. |
| Address | 10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ |
| Tel | 13631623357 |
| E-mail | liss@tech-now.com |
| Equipment | All the equipment used in the report is fixed in 10/F A, Lingyun Bld, Liufang Rd, Baoan District, SZ |

1.2 Testing principle

睿班 RFI-LAB Multi-Probe OTA Measurement System

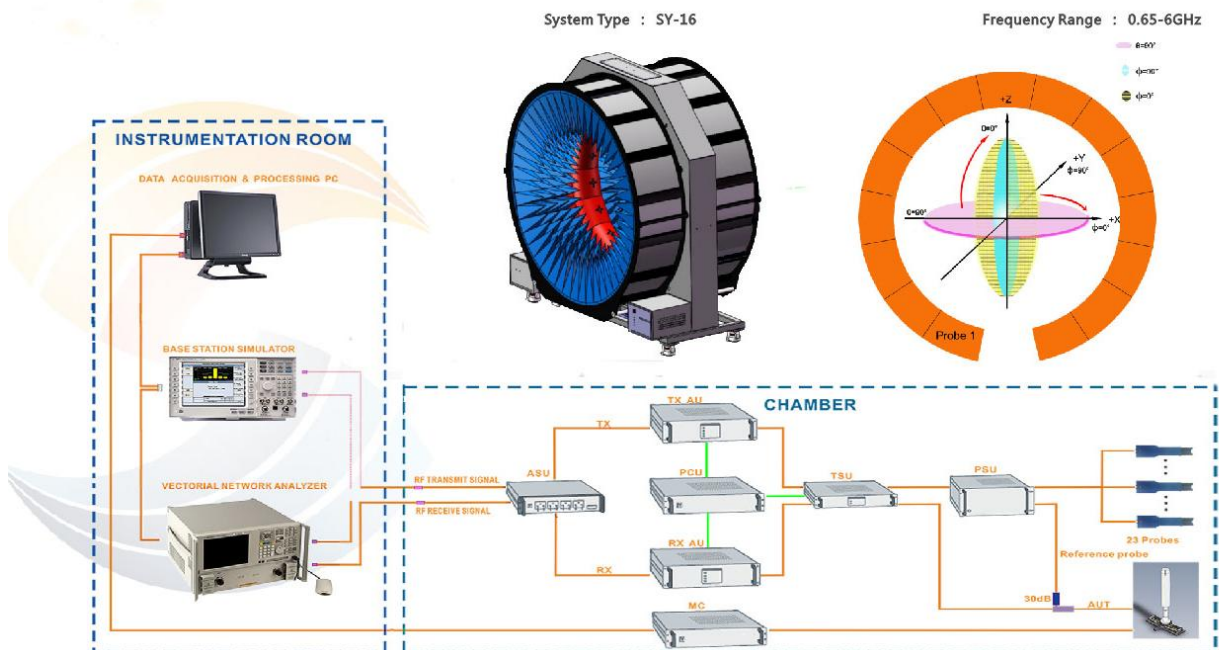

1.3 Test equipment

| Equipment | Model No. | Serial No. | Manufacturer | Calibration date | Next calibration date |
|----------------------------|-----------|----------------|--------------|------------------|-----------------------|
| 16 probe microwave chamber | 3*3*2.5 | RFI-LAB-RF-A00 | SUNYIELD | 2021.3.15 | 2023.3.14 |
| Network Analyzer | E5071C | RFI-LAB-RF-A02 | Agilent | 2022.4.29 | 2023.4.28 |
| Network Analyzer | E5071C | RFI-LAB-RF-C02 | KEYSIGHT | 2022.4.29 | 2023.4.28 |

1.4 Test environment

| | |
|-------------|-----------|
| Temperature | 23.7°C |
| Humidity | 59%RH |
| Pressure | 100.15kPa |

1.5 Statement

- (1) The test results in the report are only applicable to the tested samples and the tested samples work under the environment described in the report.
- (2) Only Shenzhen RFI-LAB Communication Technology Co., Ltd. have the right to modify the report, and the modification information shall be annotated in the revision form.
- (3) Any objection to this report shall be raised within 30 days after formal confirmation of the report.
- (4) This report is invalid if there is any evidence that the sample information provided is falsified.
- (5) The report is invalid without the signature of the auditor and approver.

2.Sample Information

2.1 Client information

| | |
|-----------------|---|
| Name | LINAK A/S |
| Address | Smedevænget 8, Guderup, DK-6430 Nordborg, Denmark |
| Contacts | Helen su |
| Tel | 13823229457 |
| E-mail | Helensu94@gmail.com |

2.2 Description of EUT(S)


| | |
|------------------------|---|
| Product Name | BA002 |
| Sample Model | BA002 |
| Size | / |
| Serial No. | / |
| Test Item | VSWR; Gain; Efficiency; Radiation pattern |
| Frequency Range | 2400-2500MHz |
| Received Date | 2022.8.10 |
| Test Date | 2022.8.10 |
| Remark | / |

2.3 EUT appearance




2.4 DUT setup photo of free space OTA testing

Planform

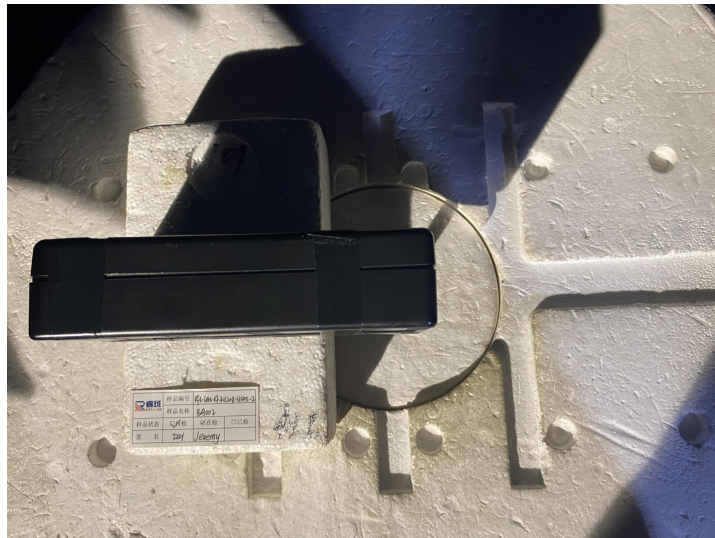

Front view

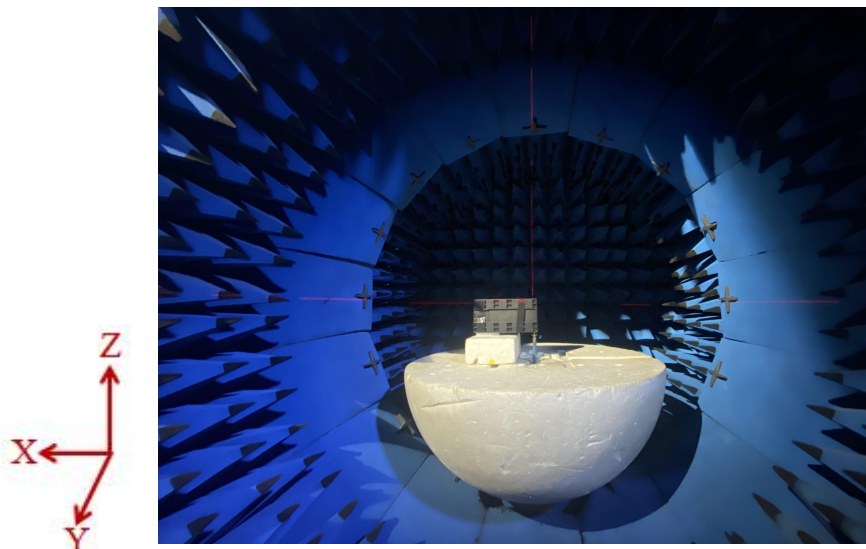

3. Test Results

3.1 Test standard

| Name | Parameter | Method | Standard no. |
|------------------------------|----------------------|--|------------------------|
| Mobile communication antenna | VSWR | Generic specification for antennas used in the mobile communications | GB/T 9410-2008 |
| | Antenna gain | | |
| | Radiation pattern | | |
| Antenna | Radiation efficiency | IEEE Standard Test Procedures for Antennas | ANSI/IEEE Std 149-1979 |


3.2 Test uncertainty

The uncertainty was calculated on the basis of the GUM published by ISO, using the inclusion factor of $K=2$ and the 95% confidence level to express the extended uncertainty.

| Item | Uncertainty |
|----------------------|------------------|
| VSWR | ± 0.3 |
| Antenna gain | $\pm 1\text{dB}$ |
| Radiation efficiency | $\pm 10\%$ |

3.3 Test data

3.3.1 S11 parameters

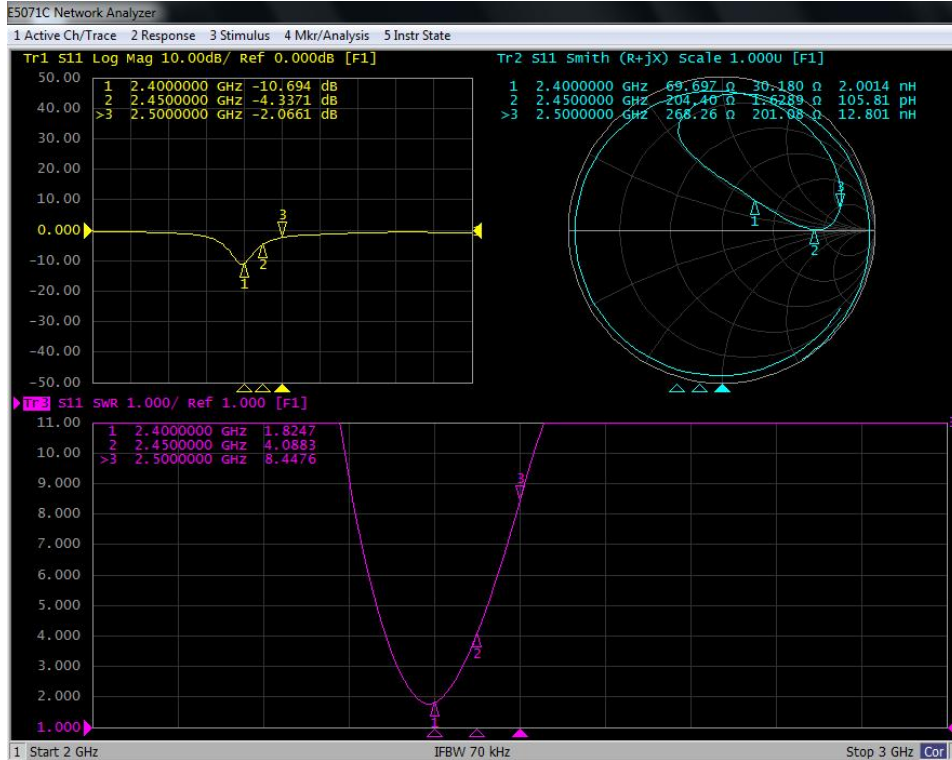

3.3.2 VSWR

| Frequency/MHz | 2400 | 2450 | 2500 |
|---------------|--------|--------|--------|
| VSWR | 1.8247 | 4.0883 | 8.4476 |


3.3.3 Typical free space efficiency and gain

| Frequency/MHz | 2400 | 2410 | 2420 | 2430 | 2440 | 2450 | 2460 | 2470 | 2480 | 2490 | 2500 |
|---------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Peak Gain/dBi | -1.5 | -1.4 | -1.55 | -1.43 | -1.69 | -1.52 | -1.55 | -1.65 | -1.85 | -1.72 | -1.98 |
| Efficiency/% | 16.02 | 16.07 | 15.67 | 15.70 | 14.96 | 15.33 | 15.24 | 14.97 | 14.55 | 14.86 | 14.46 |

3.3.4 Typical free space radiation pattern


(1) 2400-2500MHz X-Z Plane:

V Phi=0

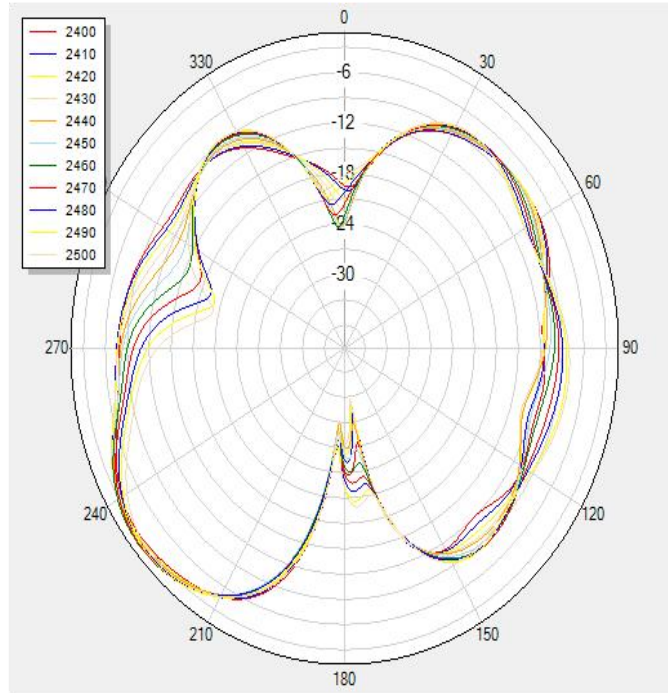


(2) 2400-2500MHz Y-Z Plane:

V Phi=90

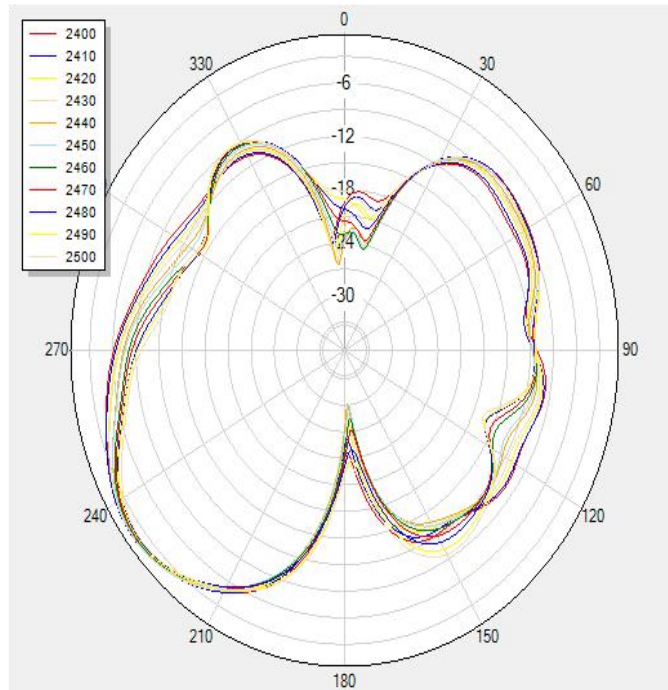


(3) 2400-2500MHz X-Y Plane:

H Theta=90

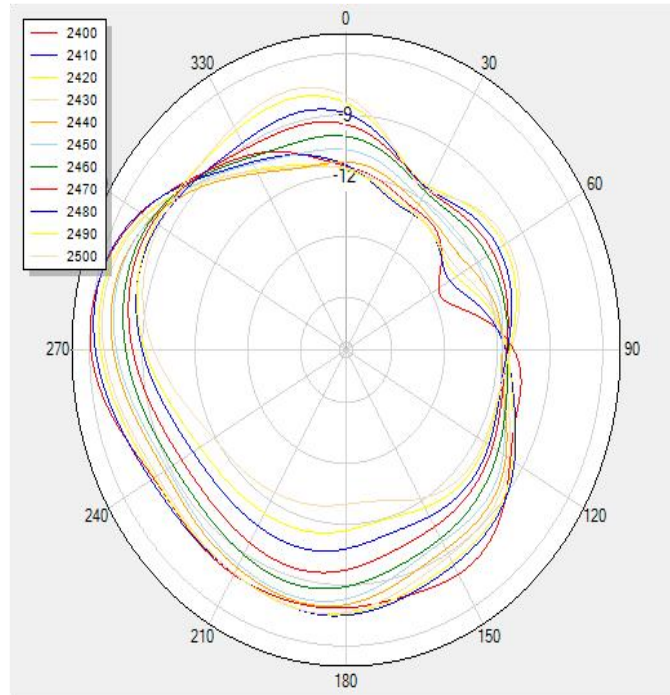

(4) Typical Free Space 3D Radiation Pattern at 2.45GHz:

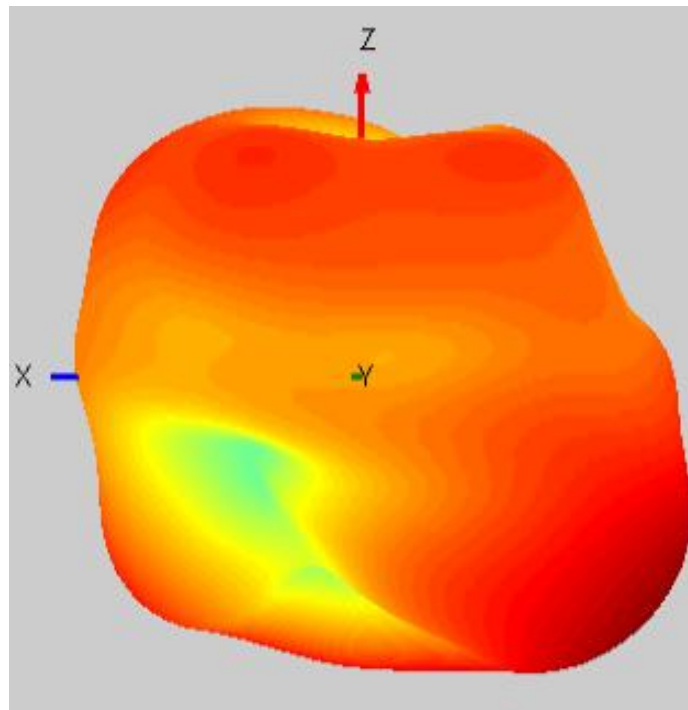

End

(The following is blank)