

# RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant : SUNGALE ELECTRONICS (SHENZHEN) CO., LTD.  
Address : No.1302-1306, Dahong High-Tech Park, No. 6-18, Xinhe Road, Xinqiao, Shajing, Baoan district, Shenzhen, China  
Manufacturer /Factory : SUNGALE ELECTRONICS (SHENZHEN) CO., LTD.  
Address : No.1302-1306, Dahong High-Tech Park, No. 6-18, Xinhe Road, Xinqiao, Shajing, Baoan district, Shenzhen, China  
E.U.T. : SMART POWER OUTLET  
Brand Name : N/A  
Model No. : DPS1101S (For more models and model difference refer to section 1)  
FCC ID : XBI11012106  
Measurement Standard : FCC PART 15.247  
Date of Receiver : December 18, 2017  
Date of Test : December 18, 2017 to December 28, 2017  
Date of Report : April 20, 2018

This Test Report is Issued Under the Authority of :

Prepared by



Knight Wen / Engineer

Approved & Authorized Signer



Iori Fan / Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.



## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST .....	5
1.2 RELATED SUBMITTAL(S) / GRANT (S) .....	8
1.3 TEST METHODOLOGY .....	8
1.4 EQUIPMENT MODIFICATIONS .....	8
1.5 SUPPORT DEVICE .....	8
1.6 TEST FACILITY AND LOCATION .....	9
1.7 SUMMARY OF TEST RESULTS.....	10
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>11</b>
2.1 EUT CONFIGURATION .....	11
2.2 SPECIAL ACCESSORIES .....	11
2.3 DESCRIPTION OF TEST MODES .....	11
2.4 EUT EXERCISE .....	11
<b>3. CONDUCTED EMISSIONS TEST .....</b>	<b>12</b>
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	12
3.2 TEST CONDITION.....	12
3.3 MEASUREMENT RESULTS .....	12
<b>4. MAX. CONDUCTED OUTPUT POWER.....</b>	<b>15</b>
4.1 MEASUREMENT PROCEDURE .....	15
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	15
4.3 MEASUREMENT RESULTS .....	15
<b>5. 6DB BANDWIDTH.....</b>	<b>17</b>
5.1 MEASUREMENT PROCEDURE .....	17
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	17
5.3 MEASUREMENT RESULTS .....	17
<b>6. POWER SPECTRAL DENSITY .....</b>	<b>24</b>
6.1 MEASUREMENT PROCEDURE .....	24
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	24
6.3 MEASUREMENT RESULTS .....	24
<b>7. BAND EDGE AND CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>31</b>
7.1 REQUIREMENT AND MEASUREMENT PROCEDURE.....	31
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	31
7.3 MEASUREMENT RESULTS .....	31



---

<b>8. RADIATED SPURIOUS EMISSIONS AND RESTRICTED BANDS.....</b>	<b>38</b>
8.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	38
8.2 MEASUREMENT PROCEDURE .....	39
8.3 LIMIT .....	40
8.4 MEASUREMENT RESULTS .....	40
<b>9. ANTENNA APPLICATION .....</b>	<b>44</b>
9.1 ANTENNA REQUIREMENT.....	44
9.2 MEASUREMENT RESULTS .....	44
<b>10. TEST EQUIPMENT LIST.....</b>	<b>45</b>



## Revision History of This Test Report

Report Number	Description	Issued Date
NTC1712214FV00	Initial Issue	2018-04-20

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test

Product Name : SMART POWER OUTLET

Main Model Name : DPS1101S

Additional Model Name : DPS1101S,DPS1103S,DPS1105S,DPS1106S,DPS1201S, DPS1301S,DPS1501S,DPS1601S, DPS1701S,DPS1801S, DPS2110D,DPS3101D,DPS3201D,DPS5108D,DPS6331D, DPS7103D,DPS,8301D,DPS9012D,C138,C158,C170.C231,C380, C510,C762,C810,SW110S,SW120S,SW130S,SW150S,SW160S, KS-602,KS-602S,KS-501,KS-603,KS-604,SW209D,SW210D, SW310D,SW730D,SW510D,SW610D,SW780D,SW910D,SW920T, SW930T,SW911T,SW950T,SW960T,SW970T, EBE-QPZ04, LB101,LB103,LB105,LB210,LB211,LB300,LC210,LC220,LC205, LC310,LC320,LC500,LC60,LL100,LL200,LL300,LL400,LL500, LL600,LL700, SC-BIPC-1001,SC-BIPC-1008, SC-BIPC-2001, SC-BIPC-2008,SC-BIPC-3001,SC-BIPC-3008,SC-VDBC-1001, SC-VDBC-1008,SC-VDBC-2001,SC-VDBC-2008,SC-VDBC-3001, SC-VDBC-3008,SC-RIPC-1001,SC-RIPC-1008,SC-RIPC-2001, SC-RIPC-2008,SC-RIPC-3001,SC-RIPC-3008,SC-CIPC-966,SL001, SL003,SL005,SL006,SL007,SL008,SL009,SC2000,SC3000, SC1500,SC500,SC1750,SC1250,SH600,SH700,SH800,SH900, SH12A03,SH12A05,SH12A20,SH12A30,SH12A50,SH12A60, WSD1101,SL1,WSD1128,WSD1221,WSD1286,WSD1601, WSD1613,LSD101,LSD103,LSD201,LSD203,LSD301,LSD303, THS200,THS201,THS203,THS300,THS301,THS303,THS400, LLS500,LLS501,LLS502,LLS503,LLS505,LLS600,LLS601, WTSD6100,WTSD6107,WTSD6109,WTSD6211,WTSD6216, WTSD6623,WTSD6236,MSD7131,MSD7136,MSD7139,MSD7200, MSD7208,MSD7625,MSD7629,SH501,PSD210, PSD211,PSD220, PSD230

Model difference : These models have the same circuit schematic, construction, PCB Layout and critical components. Their difference in model number due to trading purpose.

Brand Name : N/A

Power Supply : AC 120V/10A 60Hz

Test voltage : AC 120V/60Hz

Note : According to the model difference, all tests were performed on model DPS1101S.

---

### Technical parameters

Frequency Range	: 2412-2462MHz for 802.11b/g/n(HT20)
Modulation	: CCK, DQPSK, DBPSK for 802.11 b OFDM for 802.11 g/n(HT20)
Number of Channel	: 11 for 802.11b/g/n(HT20)
Channel space	: 5MHz
Date Rate	: 802.11b:1~11Mbps, 802.11g:6~54Mbps 802.11n: 6.5~72.2Mbps
Hardware version	: VER 0
Software version	: 1.0.0
Antenna Type	: PIFA Antenna
Antenna Gain	: 3dBi

**WIFI Channel List**

<b>802.11 b/g/n(HT20)</b>	
<b>Channel</b>	<b>Frequency MHz</b>
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

**Note:** According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency see below:

<b>802.11b/g/n(HT20)</b>	
<b>Channel</b>	<b>Frequency MHz</b>
1	2412
6	2437
11	2462

<b>Test SW version</b>	<b>ESP Series Modules FCC &amp; CE Test Tool V2.2.3</b>
------------------------	---

## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **XBI11012106** filing to comply with Section 15.247 of the FCC Part 15(2016), Subpart C Rule.

## 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

## 1.4 Equipment Modifications

Not available for this EUT intended for grant.

## 1.5 Support Device

Notebook PC : Manufacturer: Lenovo  
Model: TP00067A  
P/N: SL10G10768  
S/N: PF-0DS3YC 15/12  
CE, FCC: DOC  
Adapter : Manufacturer: Lenovo  
Model: ADLX65NLC3A  
I/P: AC 100-240V 50-60Hz, 1.8A  
O/P: DC 20V 3.25A



## 1.6 Test Facility and Location

Site Description

- EMC Lab : Listed by CNAS, August 14, 2015  
The certificate is valid until August 13, 2018  
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01  
The Certificate Registration Number is L5795.
- Listed by A2LA, November 01, 2017  
The certificate is valid until December 31, 2019  
The Laboratory has been assessed and proved to be in compliance with ISO17025  
The Certificate Registration Number is 4429.01
- Listed by FCC, November 06, 2017  
The Designation Number is CN1214  
Test Firm Registration Number: 907417
- Listed by Industry Canada, June 08, 2017  
The Certificate Registration Number. Is 46405-9743
- Name of Firm : Dongguan Nore Testing Center Co., Ltd.  
(Dongguan NTC Co., Ltd.)
- Site Location : Building D, Gaosheng Science & Technology Park,  
Zhouxi Longxi Road, Nancheng District, Dongguan  
City, Guangdong Province, China

### 1.7 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.207 (a)	AC Power Conducted Emission	±1.06dB	Compliant
§15.247(b)(3)	Max. Conducted Output Power	±1.06dB	Compliant
§15.247(a)(2)	6dB Bandwidth	±1.42 x10 <sup>-4</sup> %	Compliant
§15.247(e)	Power Spectral Density	±1.06dB	Compliance
§15.247(d)	Band Edge and Conducted Spurious Emissions	±1.70dB	Compliance
§15.247(d),§15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	±3.70dB	Compliance
§15.203	Antenna Requirement	N/A	Compliance

---

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 Special Accessories

Not available for this EUT intended for grant.

### 2.3 Description of test modes


The EUT has been tested under continuous operating condition. Test program used to control the EUT staying in continuous transmitting mode. The Lowest, middle and highest channel were chosen for testing, and modulation type CCK, DQPSK, DBPSK, OFDM and all data rate were tested. But only the worst case data is shown in this report.

### 2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

### 3. Conducted Emissions Test

#### 3.1 Test SET-UP (Block Diagram of Configuration)

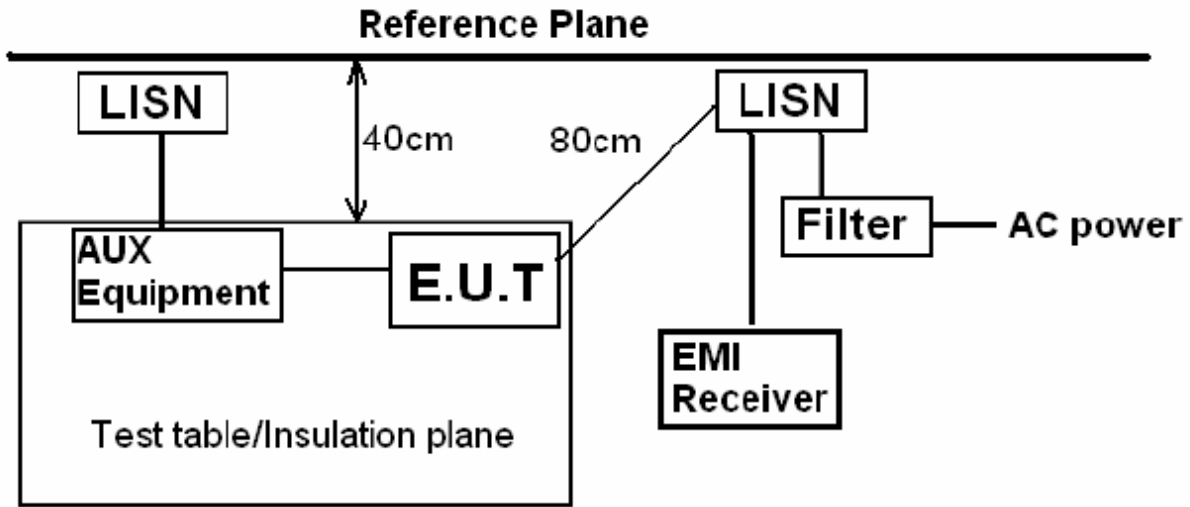

#### 3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150 KHz ~ 30 MHz

Detector: RBW 9 KHz, VBW 30 KHz

Operation Mode: WIFI Mode

#### 3.3 Measurement Results


Please refer to following the plots of the worst case (802.11b High Channel).



Dongguan NTC Co., Ltd.  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Conducted Emission Measurement

File :DPS1101S Data :#4 Date: 2017-12-27 Time: 13:38:56

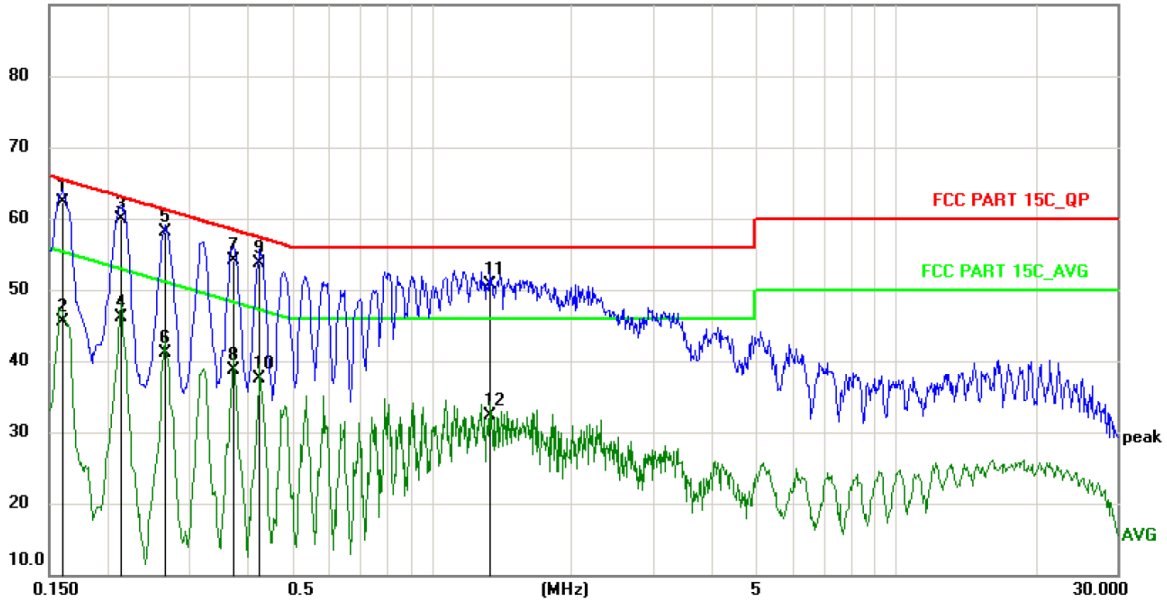

Site Phase: **L1** Temperature: 26  
 Limit: FCC PART 15C\_QP Power: AC120V/60Hz Humidity: 53 %  
 EUT: SMART POWER OUTLET  
 M/N: DPS1101S  
 Mode: TX  
 Note: 802.11b High

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1607	51.60	10.80	62.40	65.43	-3.03	QP	
2		0.1607	34.80	10.80	45.60	55.43	-9.83	AVG	
3		0.2139	49.20	10.80	60.00	63.05	-3.05	QP	
4		0.2139	35.40	10.80	46.20	53.05	-6.85	AVG	
5		0.2660	47.30	10.80	58.10	61.24	-3.14	QP	
6		0.2660	30.30	10.80	41.10	51.24	-10.14	AVG	
7		0.3738	43.30	10.80	54.10	58.42	-4.32	QP	
8		0.3738	27.90	10.80	38.70	48.42	-9.72	AVG	
9		0.4259	42.90	10.80	53.70	57.33	-3.63	QP	
10		0.4259	26.70	10.80	37.50	47.33	-9.83	AVG	
11		1.3340	40.00	10.80	50.80	56.00	-5.20	QP	
12		1.3340	21.40	10.80	32.20	46.00	-13.80	AVG	






Dongguan NTC Co., Ltd.  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

**Conducted Emission Measurement**

File :DPS1101S Data :#3 Date: 2017-12-27 Time: 13:45:02

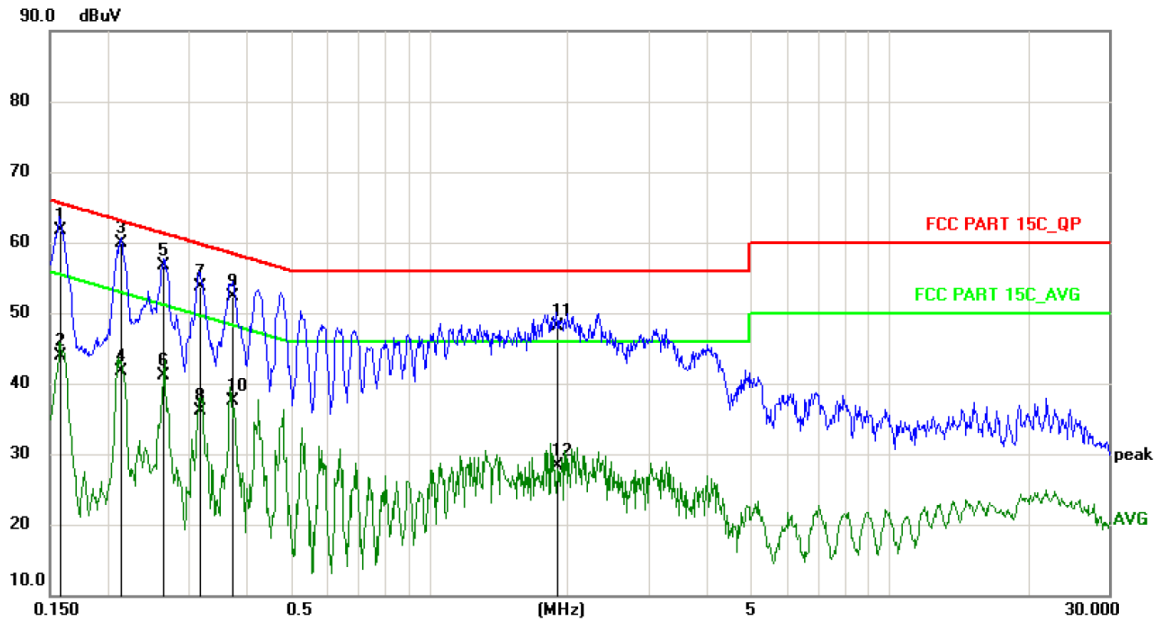

Site: Phase: **N** Temperature: 26  
 Limit: FCC PART 15C\_QP Power: AC120V/60Hz Humidity: 53 %  
 EUT: SMART POWER OUTLET  
 M/N: DPS1101S  
 Mode: TX  
 Note: 802.11b High

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	50.90	10.80	61.70	65.57	-3.87	QP	
2		0.1580	33.10	10.80	43.90	55.57	-11.67	AVG	
3	*	0.2139	49.20	10.80	60.00	63.05	-3.05	QP	
4		0.2139	31.00	10.80	41.80	53.05	-11.25	AVG	
5		0.2644	45.90	10.80	56.70	61.29	-4.59	QP	
6		0.2644	30.40	10.80	41.20	51.29	-10.09	AVG	
7		0.3180	43.00	10.80	53.80	59.76	-5.96	QP	
8		0.3180	25.30	10.80	36.10	49.76	-13.66	AVG	
9		0.3738	41.60	10.80	52.40	58.42	-6.02	QP	
10		0.3738	26.70	10.80	37.50	48.42	-10.92	AVG	
11		1.8900	37.30	10.80	48.10	56.00	-7.90	QP	
12		1.8900	17.60	10.80	28.40	46.00	-17.60	AVG	

## 4. Max. Conducted Output Power


### 4.1 Measurement Procedure

Maximum Conducted Output power at Antenna Terminals, FCC Rules 15.247(b)(3):

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

### 4.2 Test SET-UP (Block Diagram of Configuration)



### 4.3 Measurement Results

**Pass**

Please refer to following table and plots.



Temperature :	22 °C	Humidity :	53%
Test By:	Sance	Test Date :	December 21, 2017
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	Peak Output Power dBm	Limit dBm
IEEE 802.11b Mode (CCK, Antenna Gain=3 dBi)			
Low Channel: 2412	1	15.67	30
Middle Channel: 2437	1	15.83	30
High Channel: 2462	1	15.92	30
IEEE 802.11g Mode (OFDM, Antenna Gain=3 dBi)			
Low Channel: 2412	6	13.96	30
Middle Channel: 2437	6	14.30	30
High Channel: 2462	6	14.19	30
IEEE 802.11n(HT20) Mode (OFDM, Antenna Gain=3 dBi)			
Low Channel: 2412	6.5	13.92	30
Middle Channel: 2437	6.5	14.35	30
High Channel: 2462	6.5	14.53	30

Note: CCK was the worst case of the 802.11b

## 5. 6dB Bandwidth


### 5.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v04):

1. For 6dB bandwidth, Set the RBW = 100KHz.
2. Set the VBW  $\geq 3 \times$  RBW
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.2 Test SET-UP (Block Diagram of Configuration)



### 5.3 Measurement Results

**Pass**


Please refer to following table and plots.

Temperature :	22 °C	Humidity : 53 %	
Test By:	Sance	Test Date : December 21, 2017	
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	6dB Bandwidth MHz	Limit
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	8.17	>500KHz
Middle Channel: 2437	1	8.17	>500KHz
High Channel: 2462	1	8.17	>500KHz
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	16.49	>500KHz
Middle Channel: 2437	6	16.58	>500KHz
High Channel: 2462	6	16.49	>500KHz
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	17.74	>500KHz
Middle Channel: 2437	6.5	17.64	>500KHz
High Channel: 2462	6.5	17.74	>500KHz

Note: CCK was the worst case of the 802.11b




### 802.11b Low Channel

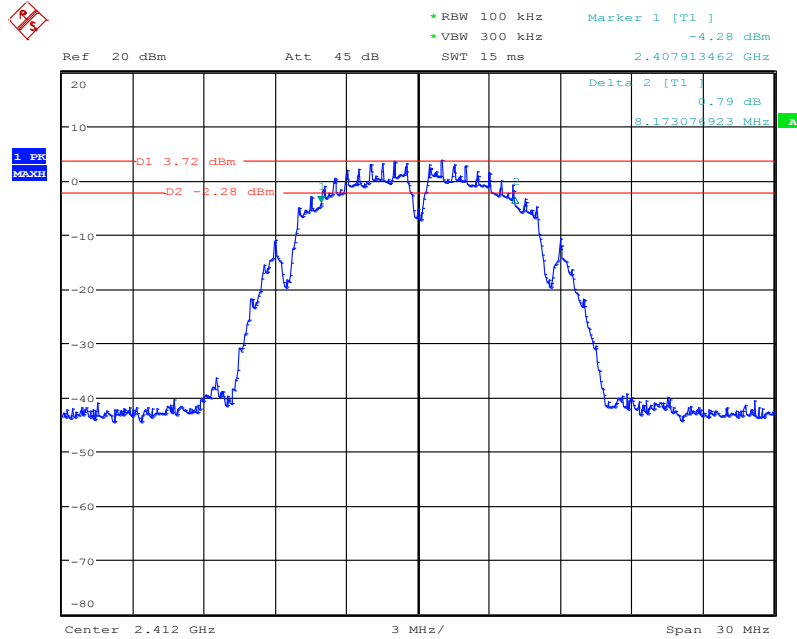


Date: 21.DEC.2017 14:32:51

### 802.11b Middle Channel

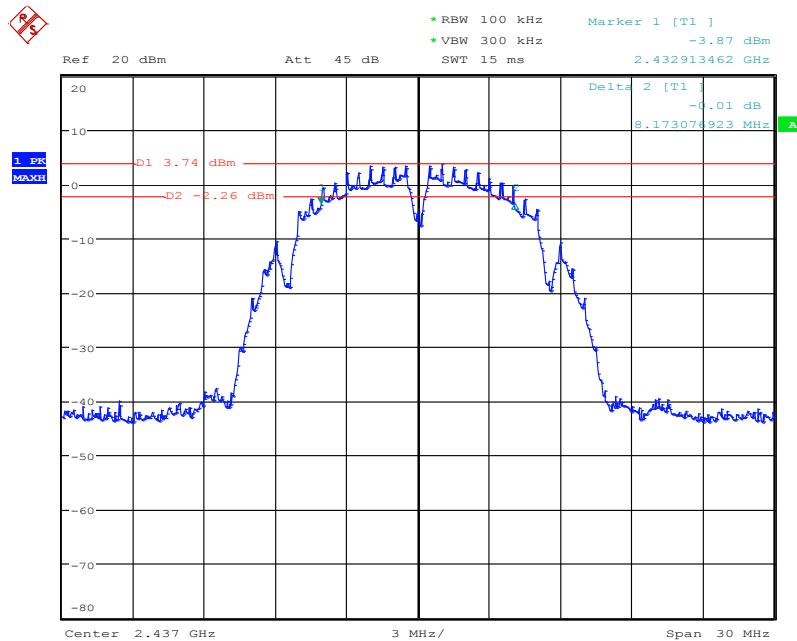


Date: 21.DEC.2017 14:33:54

### 802.11b High Channel

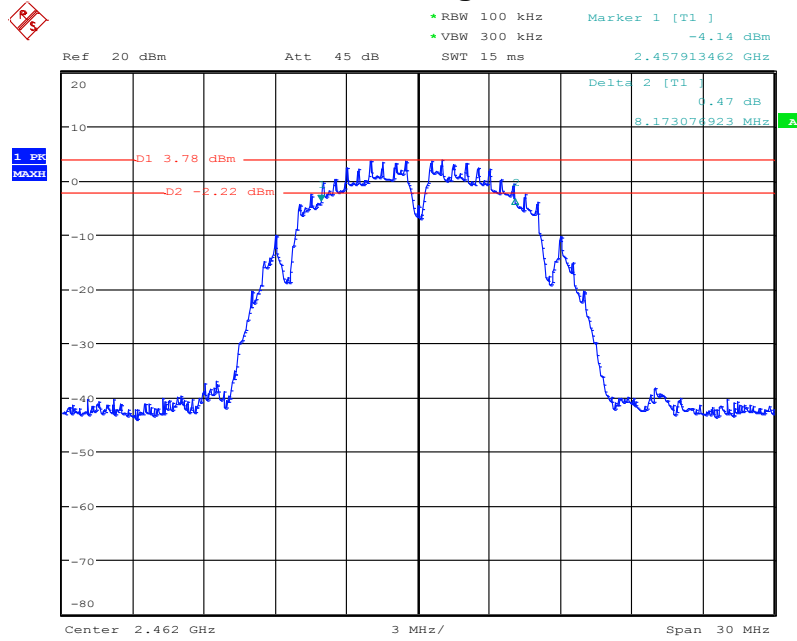


Date: 21.DEC.2017 14:34:37

### 802.11g Low Channel

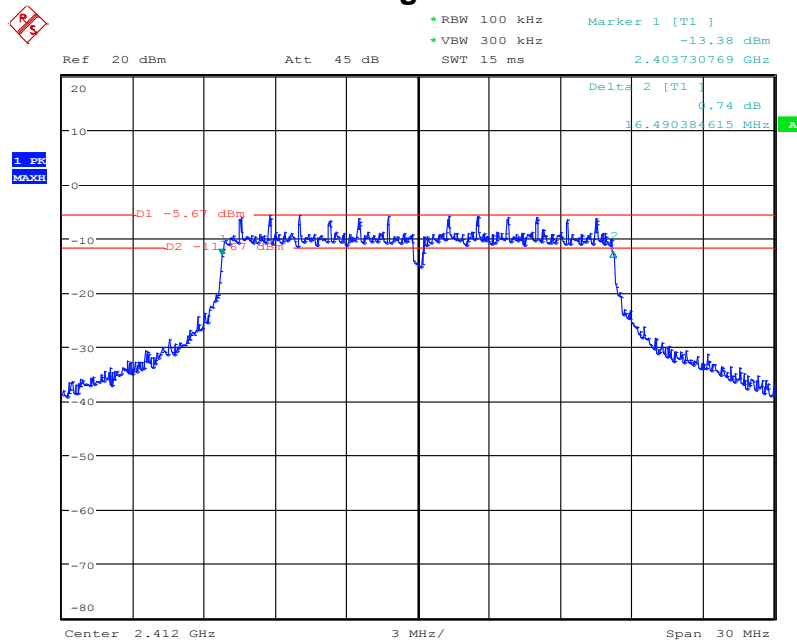


Date: 21.DEC.2017 14:36:01


### 802.11g Middle Channel

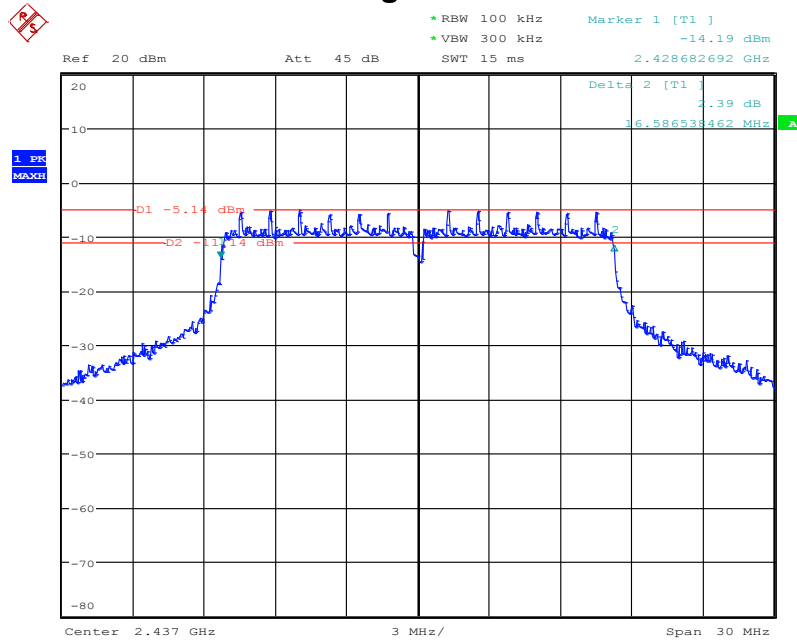

### 802.11g High Channel

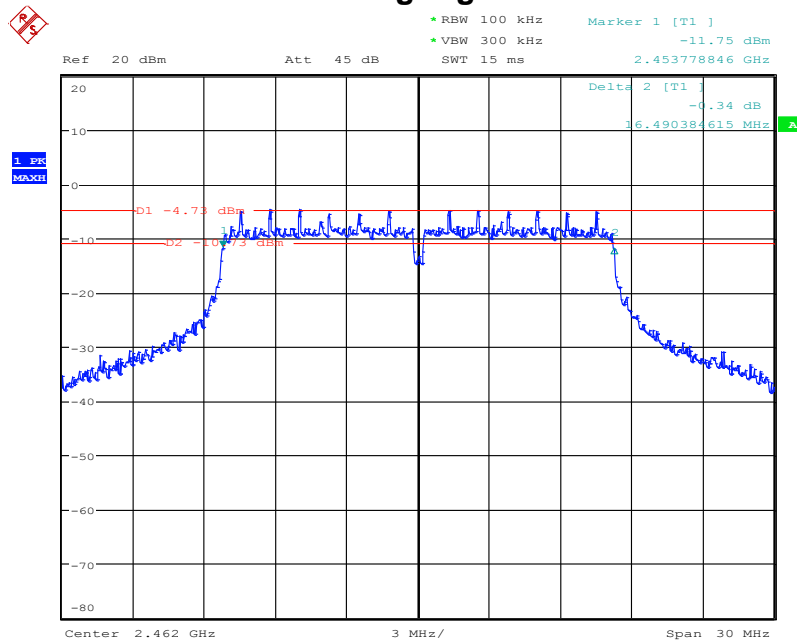


### 802.11n(HT20) Low Channel

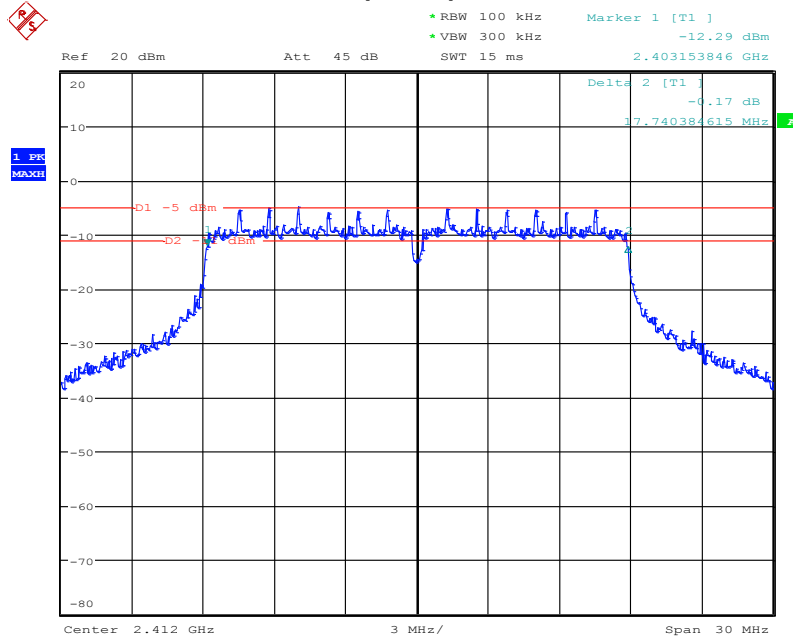


Date: 21.DEC.2017 14:39:01

### 802.11n(HT20) Middle Channel

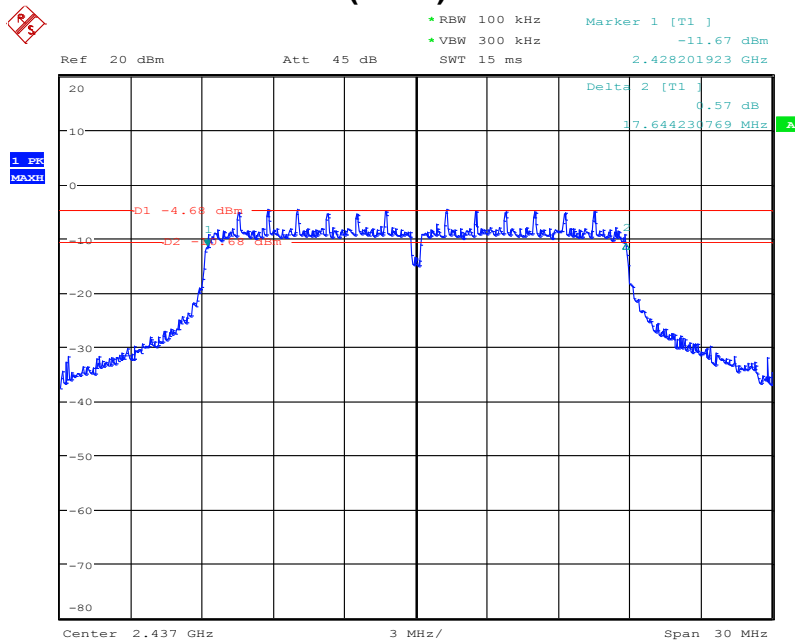

Date: 21.DEC.2017 14:40:01

### 802.11n(HT20) High Channel

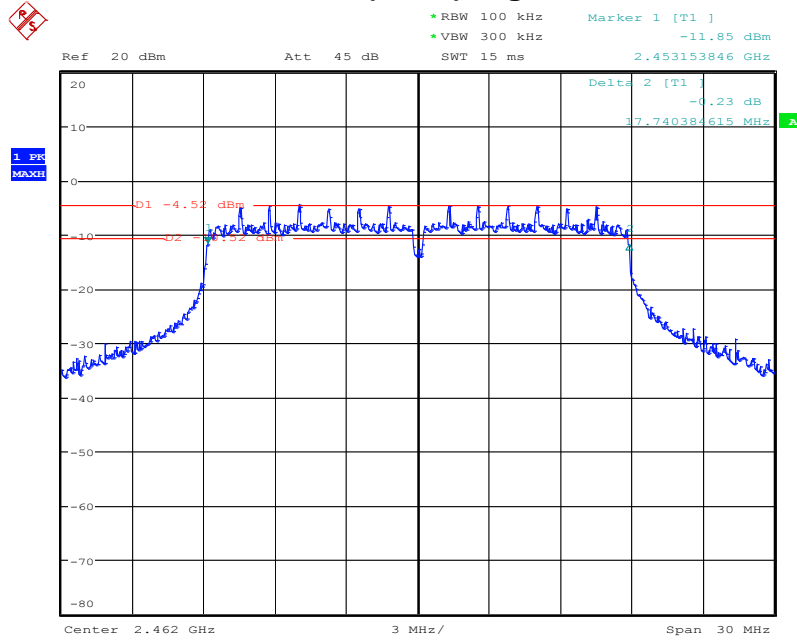

Date: 21.DEC.2017 14:41:15



## 6. Power Spectral Density


### 6.1 Measurement Procedure

The Power Spectral Density, FCC Rule 15.247(e):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v04):

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ KHz}$
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.2 Test SET-UP (Block Diagram of Configuration)



### 6.3 Measurement Results


**Pass**

Please refer to following table and plots.

Temperature :	22 °C	Humidity :	53 %
Test By:	Sance	Test Date :	December 21, 2017
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	PSD dBm/3kHz	Limit dBm/3kHz
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	-16.56	8
Middle Channel: 2437	1	-14.91	8
High Channel: 2462	1	-15.31	8
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	-19.90	8
Middle Channel: 2437	6	-20.07	8
High Channel: 2462	6	-19.21	8
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	-20.53	8
Middle Channel: 2437	6.5	-20.36	8
High Channel: 2462	6.5	-19.72	8


Note: CCK was the worst case of the 802.11b

### 802.11b Low Channel

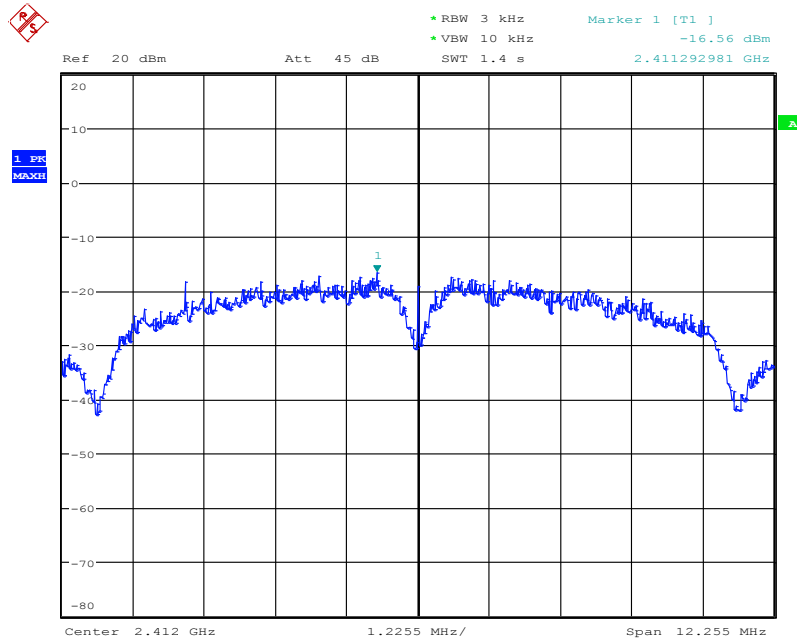


Date: 21.DEC.2017 14:42:17

### 802.11b Middle Channel

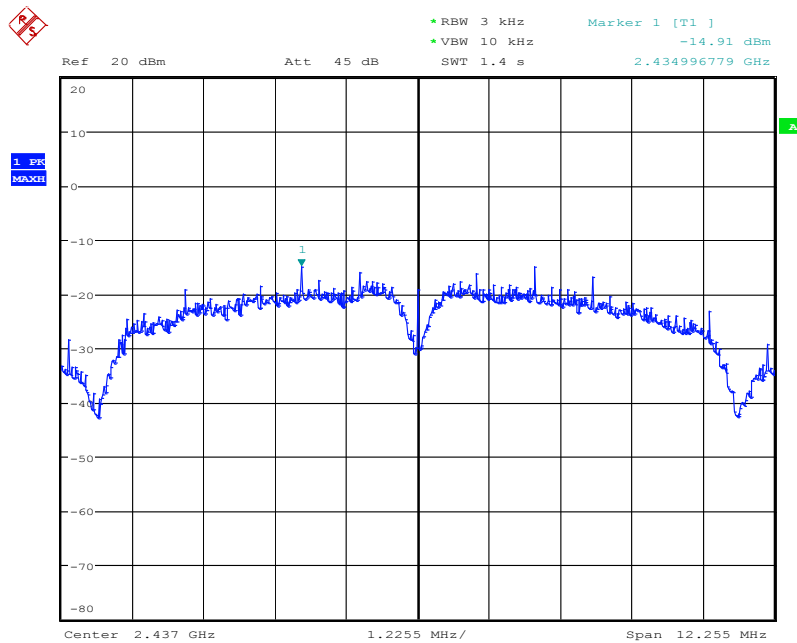


Date: 21.DEC.2017 14:42:52

### 802.11b High Channel

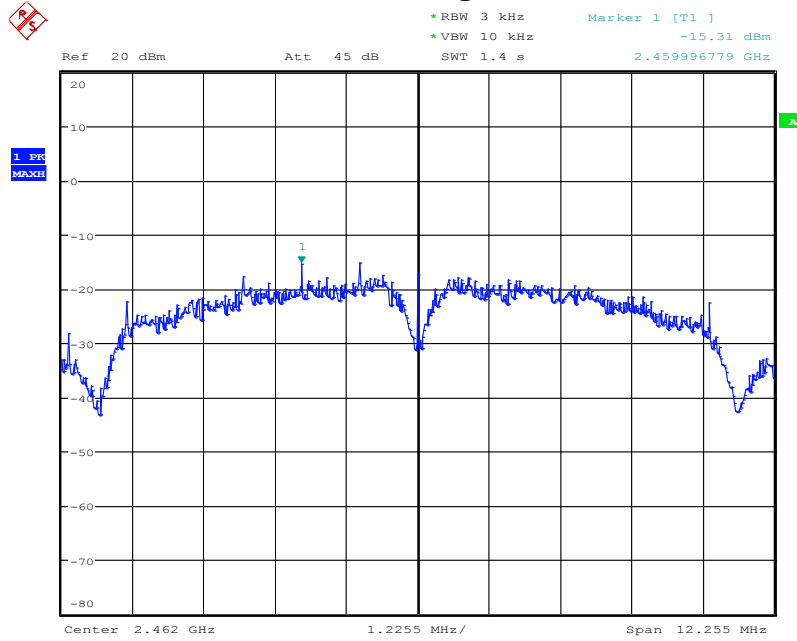


Date: 21.DEC.2017 14:43:23

### 802.11g Low Channel

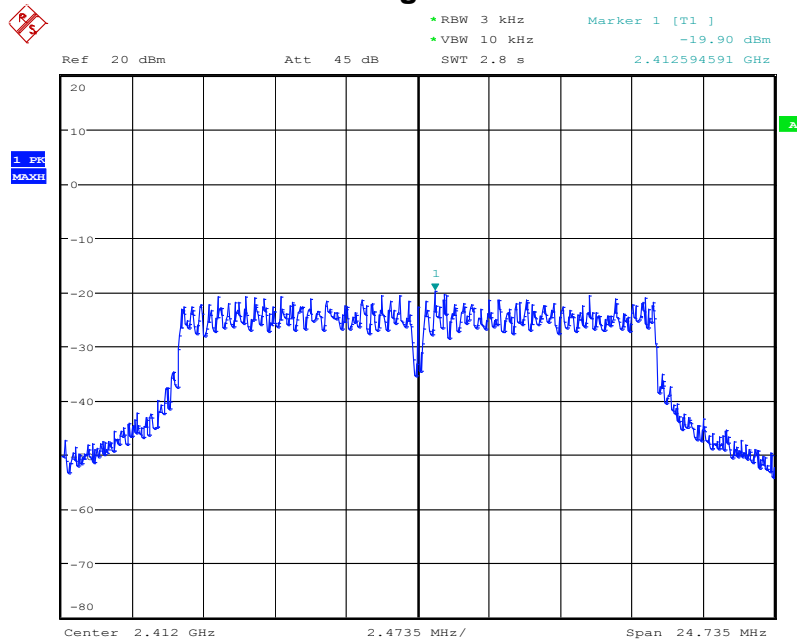


Date: 21.DEC.2017 14:43:55

### 802.11g Middle Channel

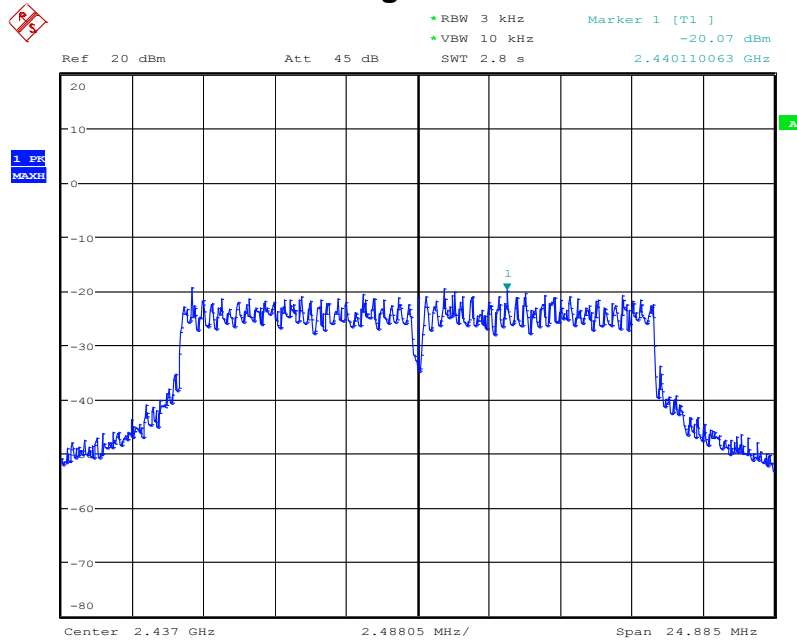


Date: 21.DEC.2017 14:44:18

### 802.11g High Channel

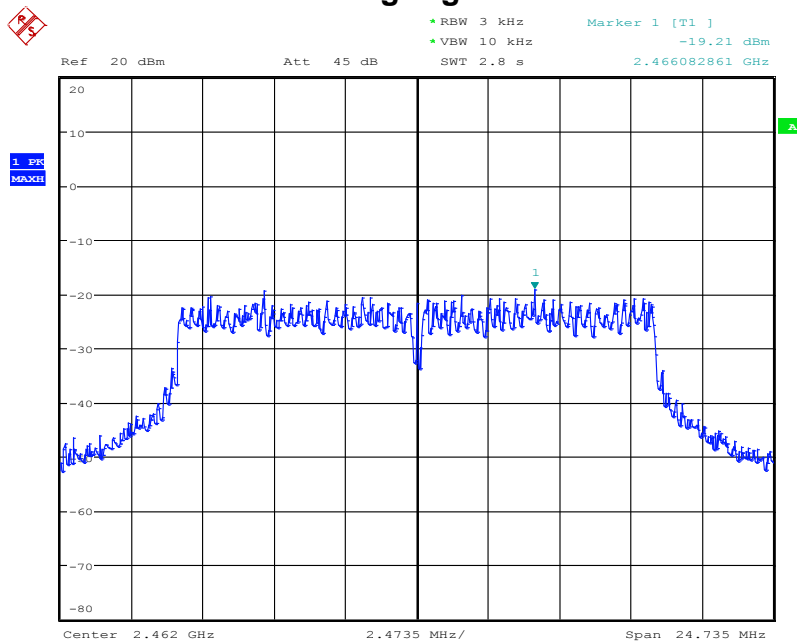


Date: 21.DEC.2017 14:44:42

### 802.11n(HT20) Low Channel

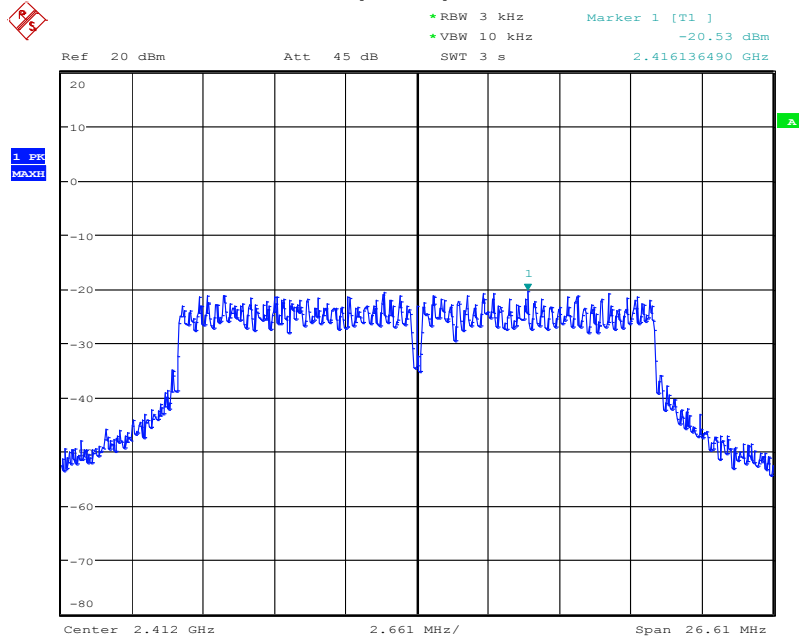


Date: 21.DEC.2017 14:45:21

### 802.11n(HT20) Middle Channel

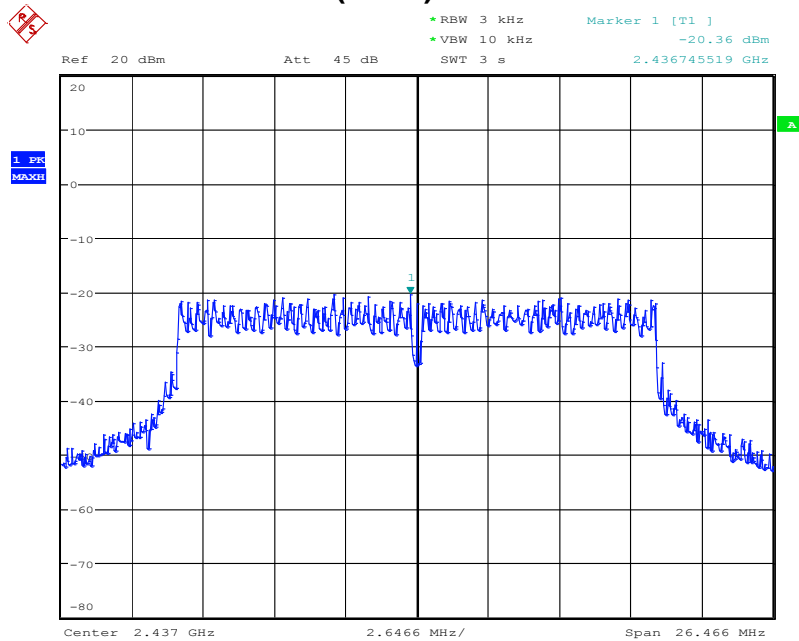

Date: 21.DEC.2017 14:45:51

### 802.11n(HT20) High Channel

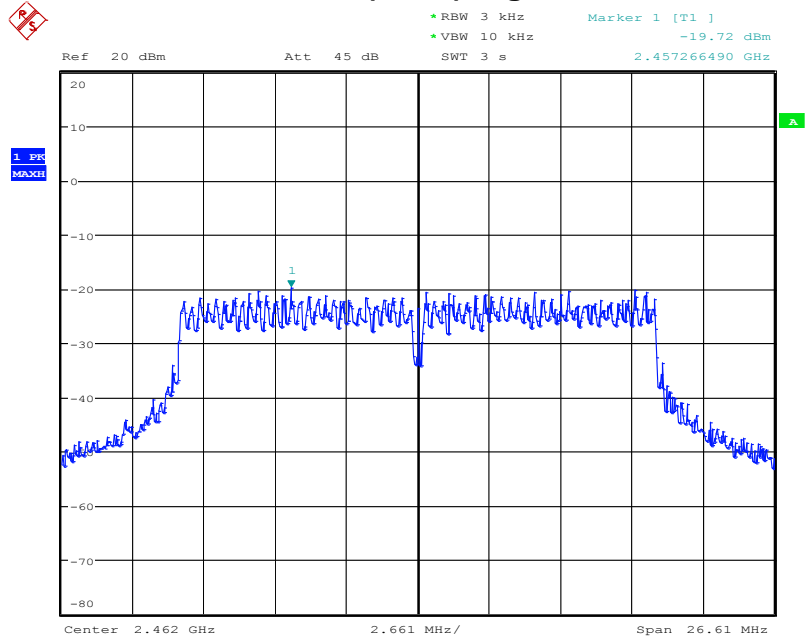

Date: 21.DEC.2017 14:46:13

## 7. Band Edge and Conducted Spurious Emissions

### 7.1 Requirement and Measurement Procedure

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below.

A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

### 7.2 Test SET-UP (Block Diagram of Configuration)



### 7.3 Measurement Results

The test plots and table showed all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband. Please refer to below plots.






Spurious Emission in restricted band:

Operation Mode: TX                      Test Date : December 21, 2017  
 Frequency Range: Above 1GHz        Temperature : 24 °C  
 Test Result: PASS                      Humidity : 47 %  
 Measured Distance: 3m                Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Fact or (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
<b>The worst case:</b>										
<b>Test Mode: 802.11b</b>										
2399.000	H	50.52	37.25	0.13	50.65	37.38	74.00	54.00	-23.35	-16.62
2399.000	V	48.77	34.13	0.13	48.90	34.26	74.00	54.00	-25.10	-19.74
2483.500	H	51.40	37.85	0.35	51.75	38.20	74.00	54.00	-22.25	-15.80
2483.500	V	48.40	39.65	0.35	48.75	40.00	74.00	54.00	-25.25	-14.00


- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
  - (3) Measurement uncertainty : ±3.7dB

### Band Edge 802.11b Low Channel

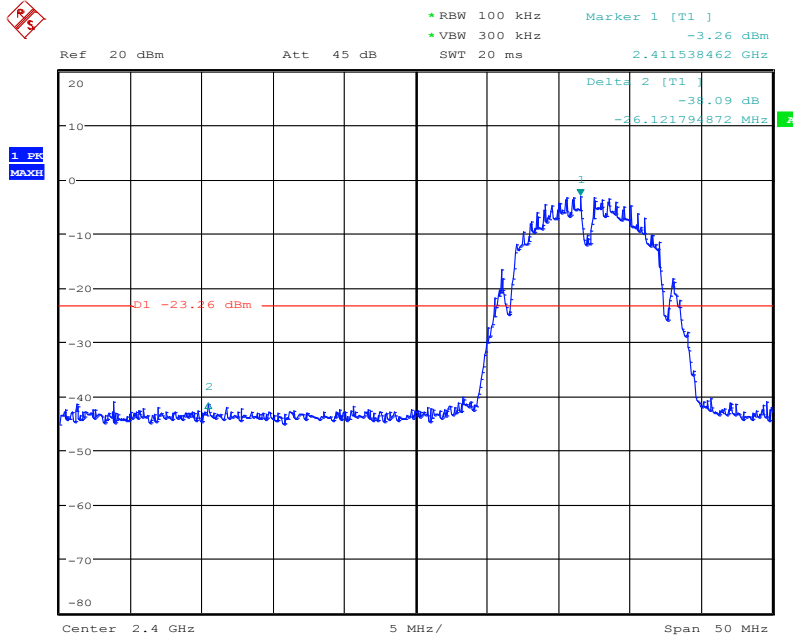


Date: 21.DEC.2017 14:47:11

### 802.11b High Channel

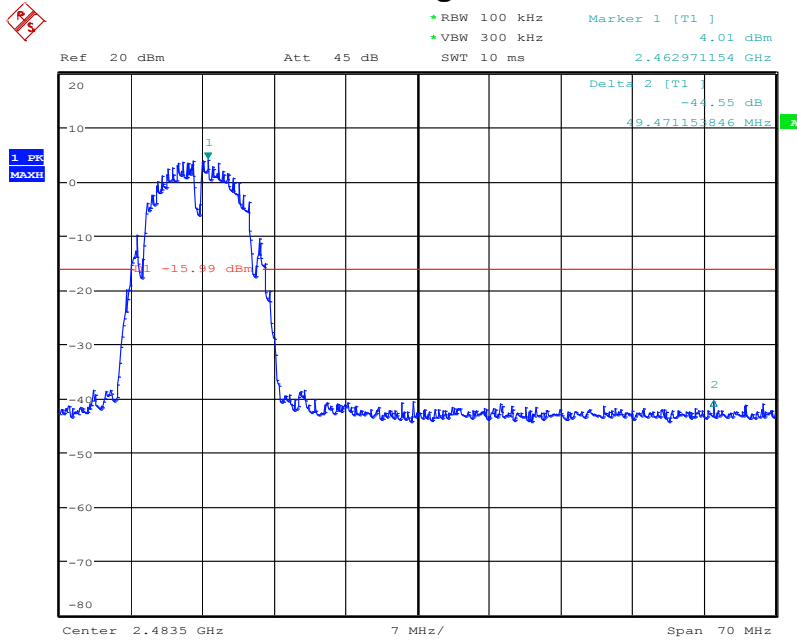


Date: 21.DEC.2017 14:52:47

### 802.11g Low Channel

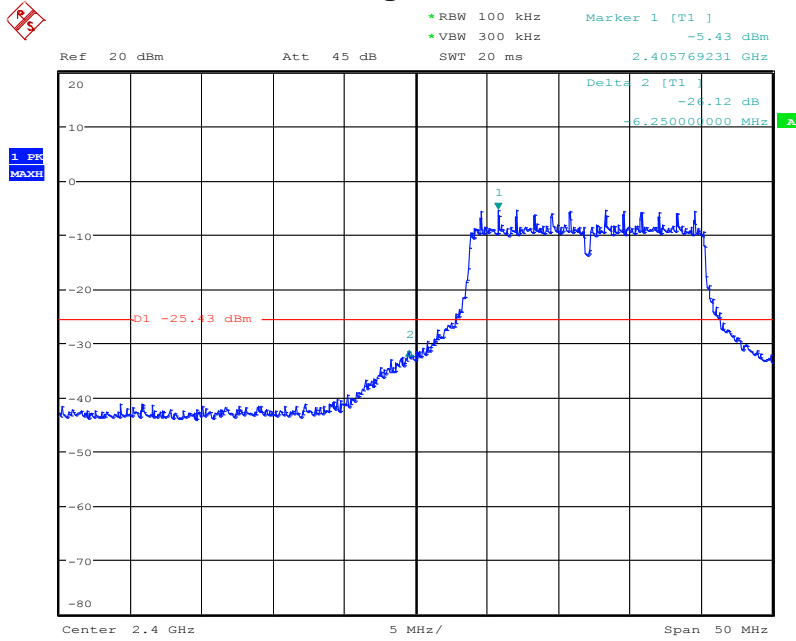


Date: 21.DEC.2017 14:49:06

### 802.11g High Channel

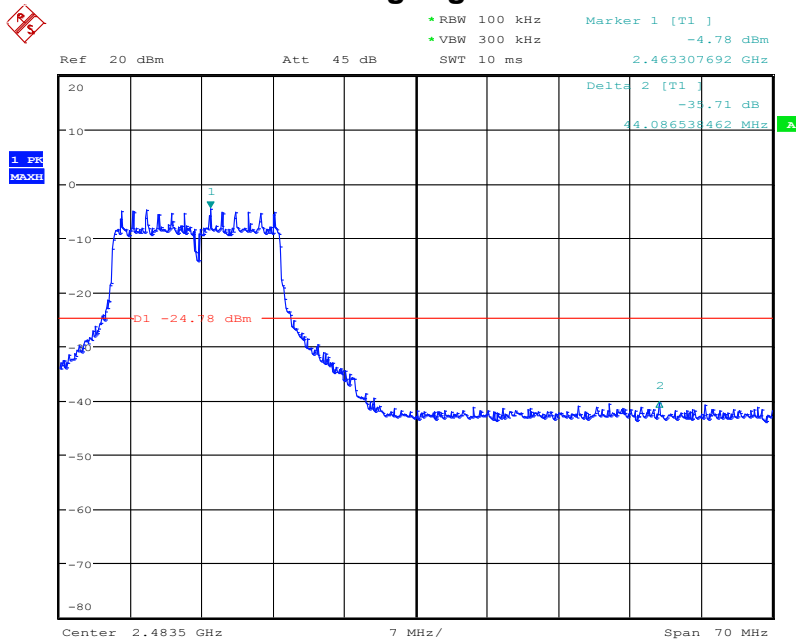


Date: 21.DEC.2017 14:51:48

### 802.11n(HT20) Low Channel

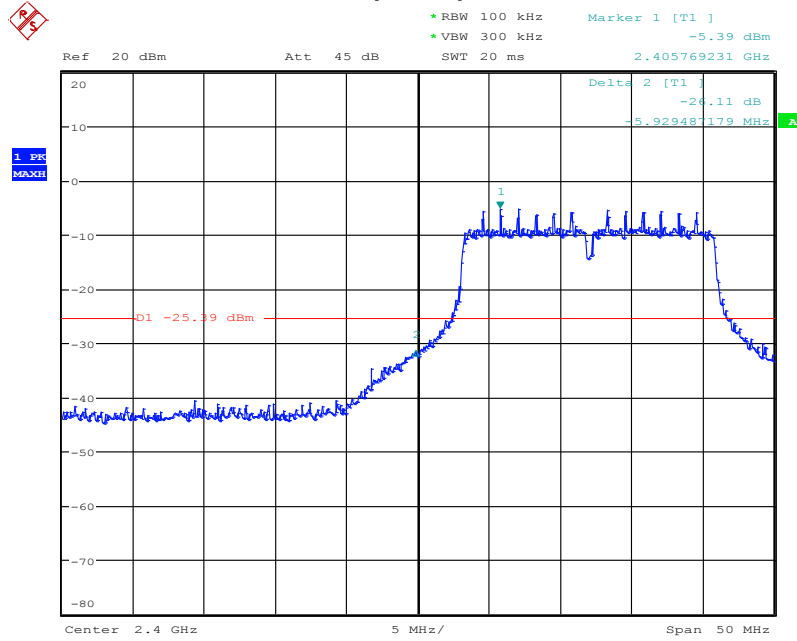


Date: 21.DEC.2017 14:49:56

### 802.11n(HT20) High Channel

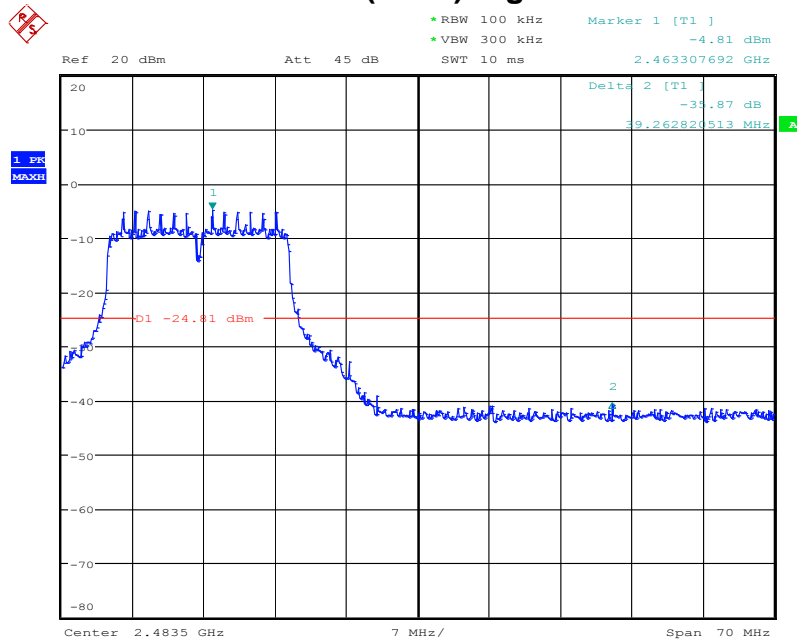


Date: 21.DEC.2017 14:50:40

### Conducted Spurious Emissions The worst case: 802.11b Low Channel

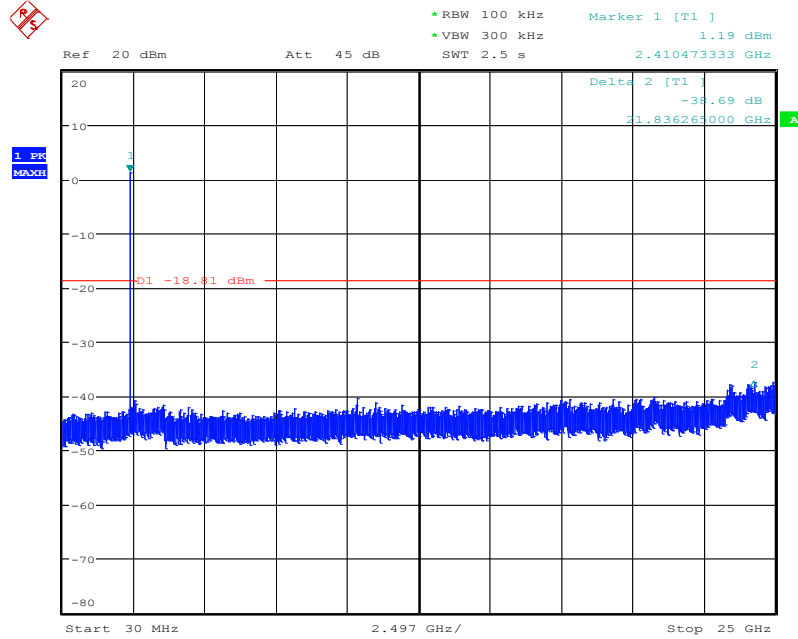


Date: 21.DEC.2017 14:53:30

### Middle Channel

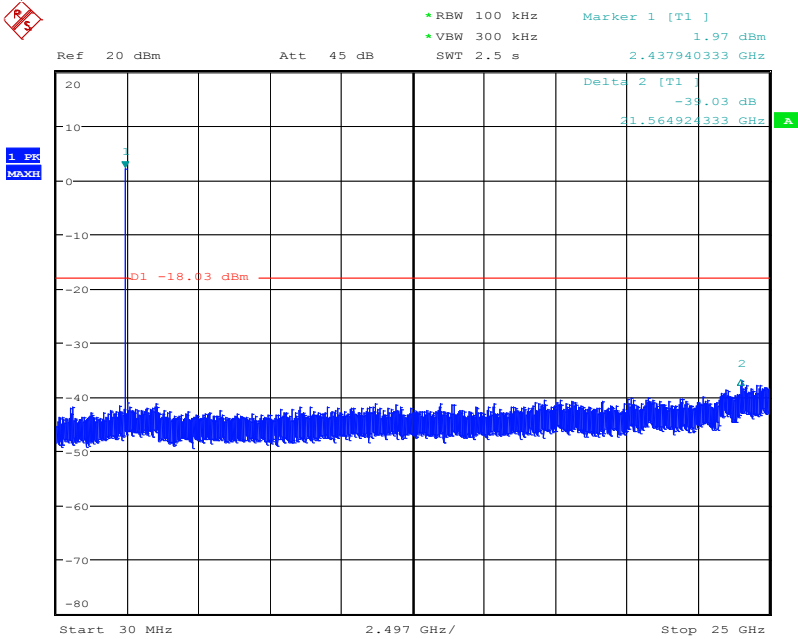

Date: 21.DEC.2017 14:54:06

### High Channel

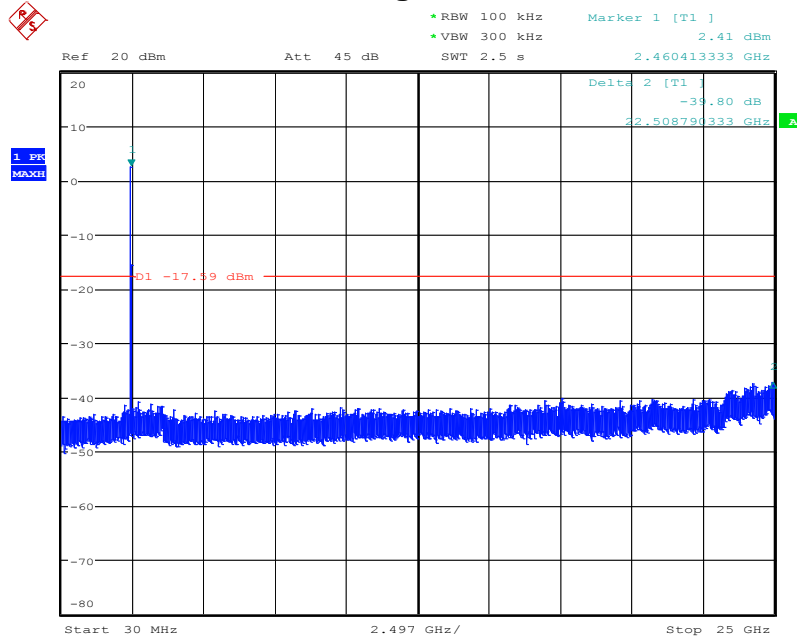


Date: 21.DEC.2017 14:54:39

**Note: Sweep points=30001pts**


## 8. Radiated Spurious Emissions and Restricted Bands

### 8.1 Test SET-UP (Block Diagram of Configuration)

#### 8.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

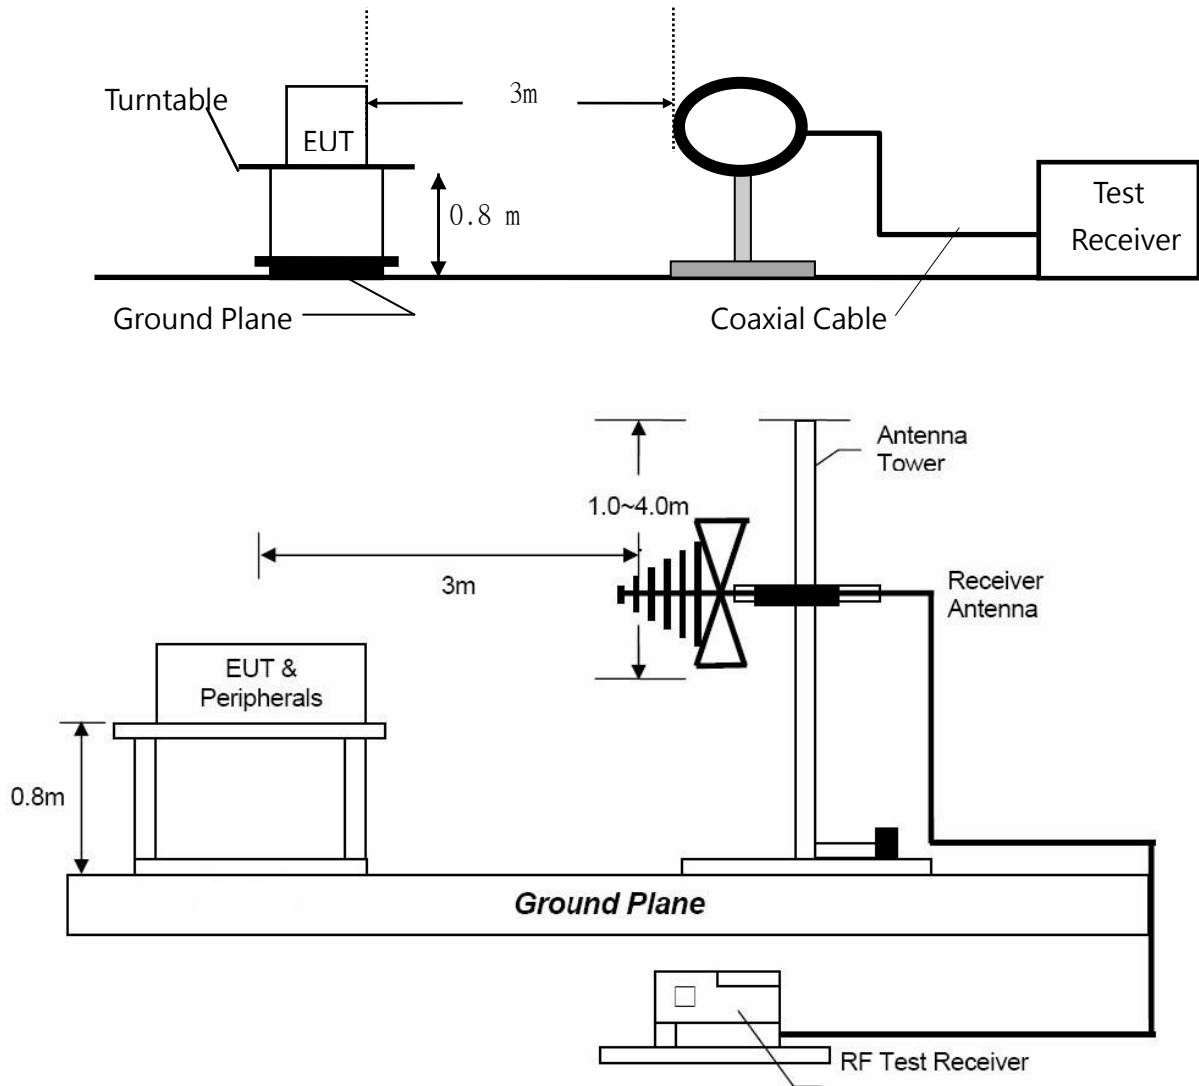

### 8.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

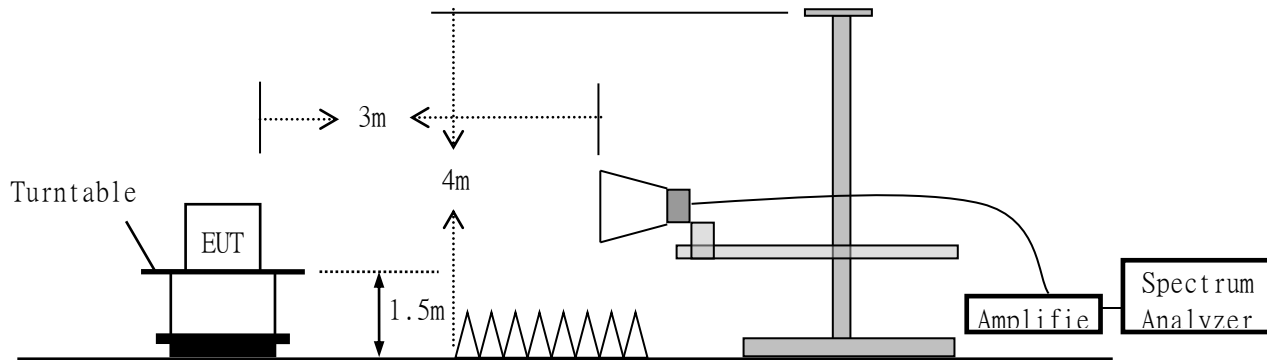

### 8.2 Measurement Procedure

- Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:  
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.



During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

### 8.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		V/m
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark : (1) Emission level (dB)  $V = 20 \log$  Emission level V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
  - (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
  - (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
  - (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

### 8.4 Measurement Results

Please refer to following plots of the worst case (802.11b High Channel))



Dongguan NTC Co., Ltd.  
 Tel: +86-769-22022444 Fax: +86-769-22022799  
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

**Radiated Emission Measurement**

File :DPS1101S Data :#2 Date: 2017-12-28 Time: 8:51:18



Site: Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Part 15C\_Class B\_3M Power: AC120V/60Hz Humidity: 47 %  
 EUT: SMART POWER OUTLET Distance: 3m  
 M/N: DPS1101S  
 Mode: TX  
 Note: 802.11b High

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		80.4400	43.34	-16.04	27.30	40.00	-12.70			QP	
2		116.3300	49.85	-13.25	36.60	43.50	-6.90			QP	
3	*	191.0200	52.04	-13.54	38.50	43.50	-5.00			QP	
4		257.9500	47.17	-11.47	35.70	46.00	-10.30			QP	
5		299.6600	46.97	-10.47	36.50	46.00	-9.50			QP	
6		353.0100	43.51	-9.11	34.40	46.00	-11.60			QP	

\*:Maximum data x:Over limit !:over margin (Reference Only)

**Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.**



Dongguan NTC Co., Ltd.  
 Tel:+86-769-22022444 Fax:+86-769-22022799  
 Web: <http://www.ntc-c.com>

**Radiated Emission Measurement**

File :DPS1101S Data :#1 Date: 2017-12-28 Time: 8:58:23



Site Polarization: **Vertical** Temperature: 26  
 Limit: FCC Part 15C\_Class B\_3M Power: AC120V/60Hz Humidity: 47 %  
 EUT: SMART POWER OUTLET Distance: 3m  
 M/N: DPS1101S  
 Mode: TX  
 Note: 802.11b High

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	30.0000	46.40	-15.90	30.50	40.00	-9.50	QP		
2		112.4500	48.48	-16.08	32.40	43.50	-11.10	QP		
3		149.3100	48.62	-18.52	30.10	43.50	-13.40	QP		
4		256.9800	47.51	-13.51	34.00	46.00	-12.00	QP		
5		338.4600	44.84	-11.34	33.50	46.00	-12.50	QP		
6		482.0200	45.06	-9.16	35.90	46.00	-10.10	QP		

\*:Maximum data x:Over limit !:over margin <Reference Only

**Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.**



Test Mode: The worst case: Test Date : December 21, 2017  
 802.11b  
 Frequency Range: Above 1GHz Temperature : 24°C  
 Test Result: PASS Humidity : 47 %  
 Measured Distance: 3m Test By: Sance

Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
<b>Operation Mode: TX Mode (Low)</b>										
4824	V	48.10	33.27	6.38	54.48	39.65	74.00	54.00	-19.52	-14.35
7236	V	46.42	31.30	10.48	56.90	41.78	74.00	54.00	-17.10	-12.22
---										
4824	H	51.36	36.58	6.38	57.74	42.96	74.00	54.00	-16.26	-11.04
7236	H	46.89	31.55	10.48	57.37	42.03	74.00	54.00	-16.63	-11.97
---										
<b>Operation Mode: TX Mode (Mid)</b>										
4874	V	47.48	33.60	6.56	54.04	40.16	74.00	54.00	-19.96	-13.84
7311	V	46.44	31.20	10.53	56.97	41.73	74.00	54.00	-17.03	-12.27
---										
4874	H	52.93	38.36	6.56	59.49	44.92	74.00	54.00	-14.51	-9.08
7311	H	46.10	31.13	10.53	56.63	41.66	74.00	54.00	-17.37	-12.34
---										
<b>Operation Mode: TX Mode (High)</b>										
4924	V	48.00	33.84	6.76	54.76	40.60	74.00	54.00	-19.24	-13.40
7386	V	46.31	31.04	10.57	56.88	41.61	74.00	54.00	-17.12	-12.39
---										
4924	H	55.50	40.59	6.76	62.26	47.35	74.00	54.00	-11.74	-6.65
7386	H	45.34	31.18	10.57	55.91	41.75	74.00	54.00	-18.09	-12.25
---										

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level + Factor
  - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
  - (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
  - (5) Measurement uncertainty : ±3.7dB.
  - (6) Horn antenna used for the emission over 1000MHz.

---

## 9. Antenna Application

### 9.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 9.2 Measurement Results

The antenna is PIFA Antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 3dBi, So, the antenna is consider meet the requirement.

## 10. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Mar. 14, 2017	Mar. 13, 2018
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Mar. 15, 2017	Mar. 14, 2018
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Mar. 14, 2017	Mar. 13, 2018
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Mar. 14, 2017	Mar. 13, 2018
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Apr. 25, 2017	Apr. 25, 2018
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Mar. 14, 2017	Mar. 13, 2018
Horn Antenna	Schwarzbeck	BBHA9170	9170-242	15GHz~40GHz	Mar. 14, 2017	Mar. 13, 2018
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Mar. 15, 2017	Mar. 14, 2018
RF Cable	Huber+Suhner	SF-104	N/A	9KHz~40GHz	Apr. 25, 2017	Apr. 24, 2018
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Apr. 25, 2017	Apr. 24, 2018
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Apr. 25, 2017	Apr. 24, 2018
Spectrum Analyzer	Rohde & Schwarz	FSV40	101003	10Hz~40GHz	Apr. 06, 2017	Apr. 05, 2018
Pre-Amplifier	EMCI	EMC 184045	980102	18GHz~40GHz	Nov. 03, 2017	Nov. 02, 2018
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Apr. 25, 2017	Apr. 24, 2018
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Mar. 14, 2017	Mar. 13, 2018
Temporary antenna connector	TESCOM	SS402	N/A	9KHz-25GHz	N/A	N/A
Power Meter	Anritsu	ML2495A	1139001	100k-65GHz	Nov. 03, 2017	Nov. 02, 2018
Power Sensor	Anritsu	MA2411B	100345	300M-40GHz	Nov. 03, 2017	Nov. 02, 2018

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---