



Test Report

Product Name : Wireless Alarm Controller
Model No. : WAC-110
FCC ID. : XBTWAC-110

Applicant : United Integrated Services Co., Ltd
Address : 5F, No.3, LANE 7 PAOKAO ROAD HSINTIEN 23144,
TAIPEI HSIEN, TAIWAN

Date of Receipt : Jan. 10, 2009
Issued Date : Mar. 20, 2009
Report No. : 091164R-RFUSP07V01
Version : V1.0

The Test Results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issued Date: Mar. 20, 2009

Report No. : 091164R-RFUSP07V01



Product Name : Wireless Alarm Controller

Applicant : United Integrated Services Co., Ltd

Address : 5F, No.3, LANE 7 PAOKAO ROAD HSINTIEN 23144, TAIPEI HSIEN,
TAIWAN

Manufacturer : United Integrated Services Co., Ltd

Model No. : WAC-110

FCC ID. : XBTWAC-110

Rated Voltage : AC 120V/60Hz

Working Voltage : AC 120V/60Hz

Trade Name : UIS

Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2008
ANSI C63.4: 2003



Test Result : Complied

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Anita Chou
(Senior Engineering Adm. Specialist / Anita Chou)



Tested By : Dino Chen
(Engineer / Dino Chen)

Approved By : Vincent Lin
(Manager / Vincent Lin)



TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description.....	4
1.2. Operation Description	6
1.3. Tested System Details	7
1.4. Configuration of Test System.....	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
2. Conducted Emission.....	9
2.1. Test Equipment.....	9
2.2. Test Setup	9
2.3. Limits.....	10
2.4. Test Procedure	10
2.5. Uncertainty	10
2.6. Test Result of Conducted Emission.....	11
3. Radiated Emission.....	13
3.1. Test Equipment.....	13
3.2. Test Setup	14
3.3. Limits.....	15
3.4. Test Procedure	16
3.5. Uncertainty	16
3.6. Test Result of Radiated Emission.....	17
4. Band Edge.....	22
4.1. Test Equipment.....	22
4.2. Test Setup	23
4.3. Limit	23
4.4. Test Procedure	24
4.5. Uncertainty	24
4.6. Test Result of Band Edge	25
5. Duty Cycle	30
5.1. Test Equipment.....	30
5.2. Test Setup	30
5.3. Uncertainty	30
5.4. Test Result of Duty Cycle	31
6. EMI Reduction Method During Compliance Testing.....	33

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Wireless Alarm Controller
Trade Name	UIS
FCC ID.	XBTWAC-110
Model No.	WAC-110
Frequency Range	2401 – 2481MHz
Type of Modulation	GFSK
Number of Channels	81
Channel Control	Auto
Antenna Type	Printed on PCB
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	UIS	N/A	-5.12 dBi for 2.4 GHz

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2401 MHz	Channel 22:	2422 MHz	Channel 43:	2443 MHz	Channel 64:	2464 MHz
Channel 2:	2402 MHz	Channel 23:	2423 MHz	Channel 44:	2444 MHz	Channel 65:	2465 MHz
Channel 3:	2403 MHz	Channel 24:	2424 MHz	Channel 45:	2445 MHz	Channel 66:	2466 MHz
Channel 4:	2404 MHz	Channel 25:	2425 MHz	Channel 46:	2446 MHz	Channel 67:	2467 MHz
Channel 5:	2405 MHz	Channel 26:	2426 MHz	Channel 47:	2447 MHz	Channel 68:	2468 MHz
Channel 6:	2406 MHz	Channel 27:	2427 MHz	Channel 48:	2448 MHz	Channel 69:	2469 MHz
Channel 7:	2407 MHz	Channel 28:	2428 MHz	Channel 49:	2449 MHz	Channel 70:	2470 MHz
Channel 8:	2408 MHz	Channel 29:	2429 MHz	Channel 50:	2450 MHz	Channel 71:	2471 MHz
Channel 9:	2409 MHz	Channel 30:	2430 MHz	Channel 51:	2451 MHz	Channel 72:	2472 MHz
Channel 10:	2410 MHz	Channel 31:	2431 MHz	Channel 52:	2452 MHz	Channel 73:	2473 MHz
Channel 11:	2411 MHz	Channel 32:	2432 MHz	Channel 53:	2453 MHz	Channel 74:	2474 MHz
Channel 12:	2412 MHz	Channel 33:	2433 MHz	Channel 54:	2454 MHz	Channel 75:	2475 MHz
Channel 13:	2413 MHz	Channel 34:	2434 MHz	Channel 55:	2455 MHz	Channel 76:	2476 MHz
Channel 14:	2414 MHz	Channel 35:	2435 MHz	Channel 56:	2456 MHz	Channel 77:	2477 MHz
Channel 15:	2415 MHz	Channel 36:	2436 MHz	Channel 57:	2457 MHz	Channel 78:	2478 MHz
Channel 16:	2416 MHz	Channel 37:	2437 MHz	Channel 58:	2458 MHz	Channel 79:	2479 MHz
Channel 17:	2417 MHz	Channel 38:	2438 MHz	Channel 59:	2459 MHz	Channel 80:	2480 MHz
Channel 18:	2418 MHz	Channel 39:	2439 MHz	Channel 60:	2460 MHz	Channel 81:	2481 MHz
Channel 19:	2419 MHz	Channel 40:	2440 MHz	Channel 61:	2461 MHz		
Channel 20:	2420 MHz	Channel 41:	2441 MHz	Channel 62:	2462 MHz		
Channel 21:	2421 MHz	Channel 42:	2442 MHz	Channel 63:	2463 MHz		

Note:

1. The EUT is a Wireless Alarm Controller with a built-in 2.4GHz transceiver
2. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

EMI Test Mode	Mode 1: Transmitter
---------------	---------------------

1.2. Operation Description

The EUT is a Wireless Alarm Controller with a built-in 2.4GHz transceiver. The EUT operation frequency is 2.401GHz-2.481GHz. The signals modulated GFSK are transmitted from the Printed on the PCB of the EUT.

1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
N/A	N/A	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
N/A	N/A

1.4. Configuration of Test System



1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4
- (2) Provides the power source, start continuous transmit
- (3) Verify that the EUT works correctly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation’s Web Site : <http://tw.quietek.com/modules/myalbum/>
 The address and introduction of Quietek Corporation’s laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on
 Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Registration Number: 92195



Accreditation on NVLAP
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation
 Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
 Lin-Kou Shiang, Taipei,
 Taiwan, R.O.C.
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : service@quietek.com

FCC Accreditation Number: TW1014



2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2008	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2008	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2008	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2008	
5	No.1 Shielded Room			N/A	

Note: All instruments are calibrated every one year.

2.2. Test Setup

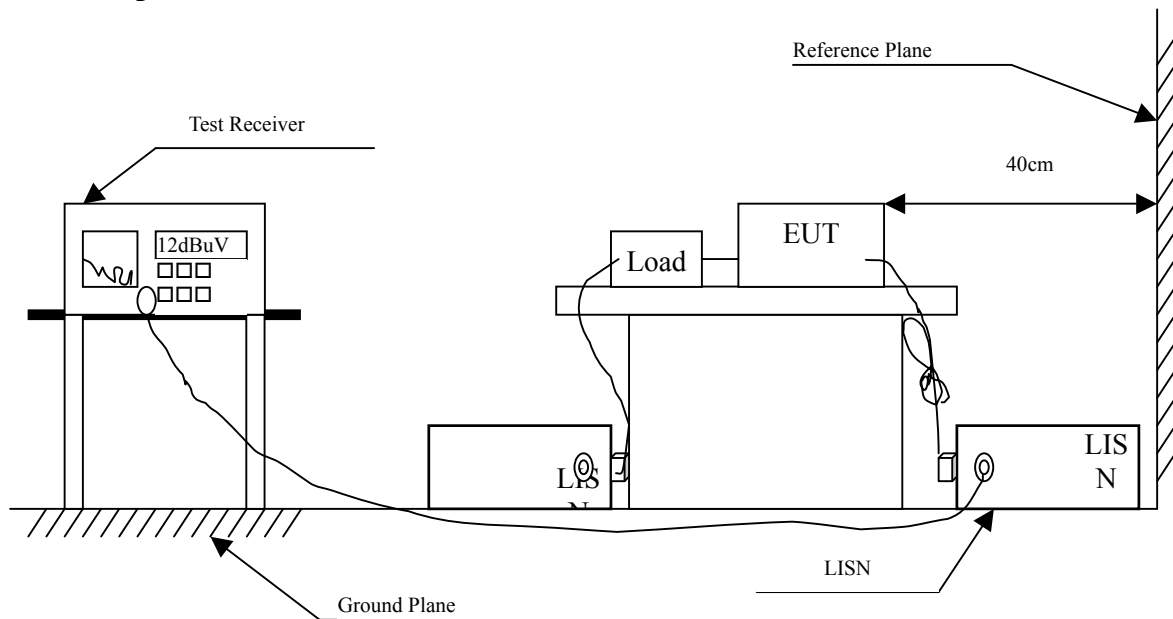

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : Wireless Alarm Controller
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
LINE 1					
Quasi-Peak					
0.740	9.638	-0.290	9.348	-46.652	56.000
0.982	9.670	-0.630	9.040	-46.960	56.000
3.033	9.690	-0.370	9.320	-46.680	56.000
6.634	9.740	0.920	10.660	-49.340	60.000
13.748	9.940	1.810	11.750	-48.250	60.000
24.732	10.130	3.540	13.670	-46.330	60.000
Average					
0.740	9.638	-4.630	5.008	-40.992	46.000
0.982	9.670	-4.920	4.750	-41.250	46.000
3.033	9.690	-4.850	4.840	-41.160	46.000
6.634	9.740	-3.580	6.160	-43.840	50.000
13.748	9.940	-2.860	7.080	-42.920	50.000
24.732	10.130	-1.330	8.800	-41.200	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Wireless Alarm Controller
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
LINE 2					
Quasi-Peak					
0.779	9.670	12.420	22.090	-33.910	56.000
0.998	9.670	11.120	20.790	-35.210	56.000
3.021	9.690	-0.310	9.380	-46.620	56.000
4.517	9.700	0.190	9.890	-46.110	56.000
7.568	9.770	1.890	11.660	-48.340	60.000
16.201	10.000	1.900	11.900	-48.100	60.000
Average					
0.779	9.670	4.130	13.800	-32.200	46.000
0.998	9.670	3.030	12.700	-33.300	46.000
3.021	9.690	-4.600	5.090	-40.910	46.000
4.517	9.700	-4.150	5.550	-40.450	46.000
7.568	9.770	-2.660	7.110	-42.890	50.000
16.201	10.000	-2.820	7.180	-42.820	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Radiated Emission

3.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1		Test Receiver	R & S	ESVS 10 / 834468/003	May, 2008
		Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2008
		Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2008
		Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Sep., 2008
<input type="checkbox"/> Site # 2		Test Receiver	R & S	ESCS 30 / 836858 / 022	May, 2008
		Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2008
		Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2008
		Bilog Antenna	SCHAFFNER	CBL6112B / 2705	May, 2008
		Horn Antenna	ETS	3115 / 0005-6160	Sep., 2008
		Pre-Amplifier	QTK	QTK-AMP-01/ 0001	May, 2008
<input checked="" type="checkbox"/> Site # 3	X	Test Receiver	R & S	ESI 26 / 838786/004	May, 2008
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2008
	X	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2008
	X	Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2008
	X	Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2008
	X	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2008
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2008
	X	Pre-Amplifier	HP	8449B / 3008A01123	July, 2008


- Note:
1. All equipments are calibrated every one year.
 2. Test equipments marked by "X" are used to measure the final test results.

3.2. Test Setup

Below 1GHz

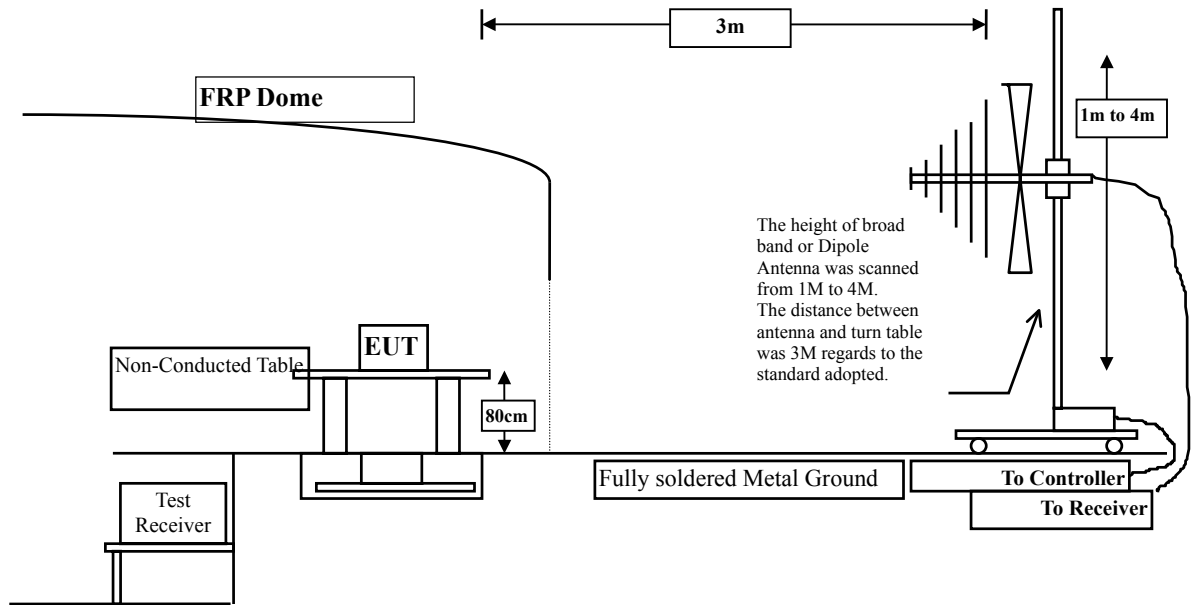

Above 1GHz

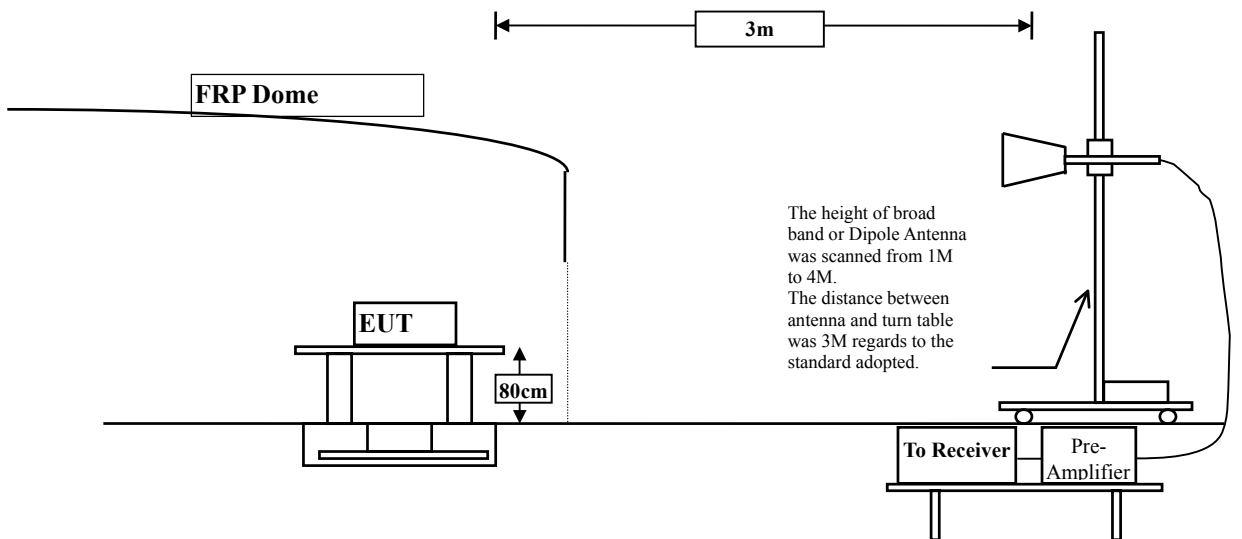

3.3. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBuV/m @3m)	(uV/m @3m)	(dBuV/m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
 2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured on the Final Measurement.

The measurement frequency range from 30MHz - 10th Harmonic of fundamental was investigated.

3.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

3.6. Test Result of Radiated Emission

Product : Wireless Alarm Controller
 Test Item : Fundamental Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2401,2441,2481 MHz)

Peak Detector

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
2401.000	-2.323	85.050	82.727	-31.273	114.000
2441.000	-2.128	84.190	82.061	-31.939	114.000
2481.000	-1.946	86.200	84.253	-29.747	114.000
Vertical					
2401.000	-2.323	85.990	83.667	-30.333	114.000
2441.000	-2.128	84.600	82.471	-31.529	114.000
2481.000	-1.946	86.450	84.503	-29.497	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
2401.000	--	--	--	--	94.000
2441.000	--	--	--	--	94.000
2481.000	--	--	--	--	94.000
Vertical					
2401.000	--	--	--	--	94.000
2441.000	--	--	--	--	94.000
2481.000	--	--	--	--	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

Product : Wireless Alarm Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2401 MHz)

Peak Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m
Horizontal					
4802.000	3.657	46.430	50.087	-23.913	74.000
7203.000	9.348	35.480	44.828	-29.172	74.000
9604.000	11.839	34.840	46.680	-27.320	74.000
Vertical					
4802.000	3.657	57.760	61.417	-12.583	74.000
7203.000	9.348	34.860	44.208	-29.792	74.000
9604.000	11.839	33.990	45.830	-28.170	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Emission Level = Reading Level + Correct Factor.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
--	--	--	--	--	54.000
Vertical					
4802.000	61.417	-20.000	41.417	-12.583	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Alarm Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441 MHz)

Peak Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m
Horizontal					
4882.000	3.921	51.960	55.881	-18.119	74.000
7323.000	9.657	34.020	43.677	-30.323	74.000
9764.000	11.798	35.500	47.298	-26.702	74.000
Vertical					
4882.000	3.921	53.440	57.361	-16.639	74.000
7323.000	9.657	33.960	43.617	-30.383	74.000
9764.000	11.798	36.140	47.938	-26.062	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Emission Level = Reading Level + Correct Factor.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
4882.000	55.881	-20.000	35.881	-18.119	54.000
Vertical					
4882.000	57.361	-20.000	37.361	-16.639	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Alarm Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2481MHz)

Peak Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m
Horizontal					
4962.000	4.203	46.850	51.054	-22.946	74.000
7443.000	9.956	33.300	43.257	-30.743	74.000
9924.000	11.858	35.400	47.257	-26.743	74.000
Vertical					
4962.000	4.203	59.300	63.504	-10.496	74.000
7443.000	9.956	34.030	43.987	-30.013	74.000
9924.000	11.858	35.700	47.557	-26.443	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Emission Level = Reading Level + Correct Factor.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
--	--	--	--	--	54.000
Vertical					
4962.000	63.504	-20.000	43.504	-10.496	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Alarm Controller
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level	dB	dBuV/m
	dB	dBuV	dBuV/m		
Horizontal					
181.320	-12.696	39.685	26.989	-16.511	43.500
365.620	-1.817	39.001	37.184	-8.816	46.000
472.320	0.180	25.947	26.127	-19.873	46.000
606.180	4.154	26.587	30.741	-15.259	46.000
837.040	4.723	26.358	31.081	-14.919	46.000
970.900	6.442	22.641	29.083	-24.917	54.000
Vertical					
181.320	-10.056	39.574	29.518	-13.982	43.500
365.620	-2.667	37.541	34.874	-11.126	46.000
515.000	-1.596	24.941	23.345	-22.655	46.000
689.600	2.094	21.278	23.372	-22.628	46.000
844.800	2.790	21.357	24.147	-21.853	46.000
967.200	7.550	20.557	28.108	-25.892	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “█” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

4. Band Edge

4.1. Test Equipment

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Test Receiver	R & S	ESI 26 / 838786/004	May, 2008
X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2008
X	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2008
X	Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2008
X	Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2008
X	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2008
X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2008
X	Pre-Amplifier	HP	8449B / 3008A01123	July, 2008


OATS No.3

- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by “X” are used to measure the final test results.

4.2. Test Setup

RF Radiated Measurement:

Above 1GHz

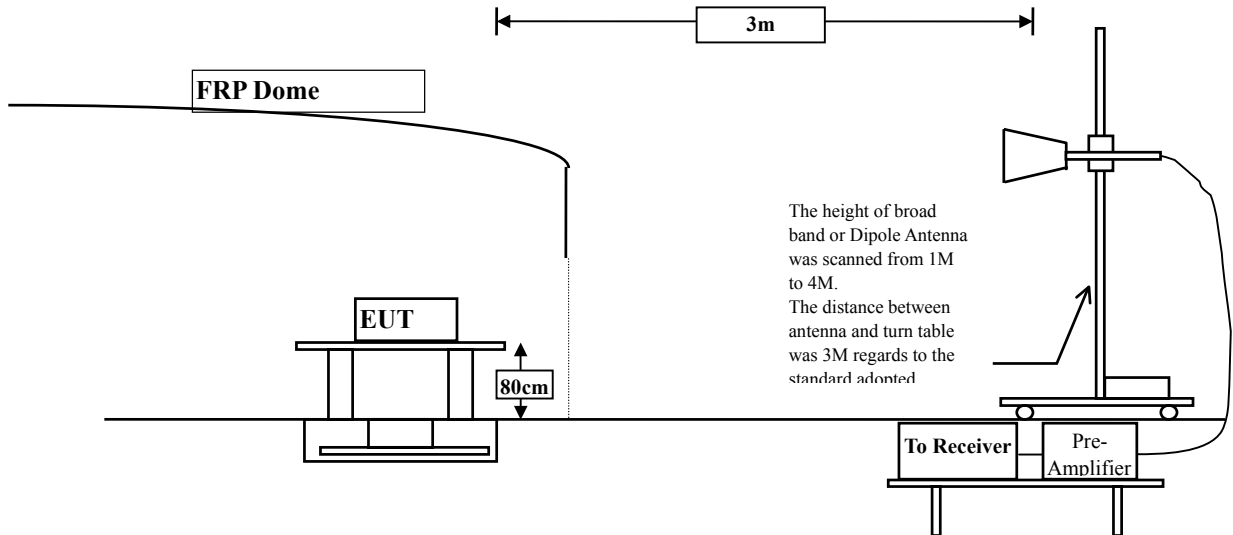

4.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2003 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

4.5. Uncertainty

Conducted is ± 1.27 dB

Radiated is ± 3.9 dB


4.6. Test Result of Band Edge

Product : Wireless Alarm Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2401 MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Result
01(Peak)	2390.000	-2.378	49.394	47.017	74.000	Pass

Figure Channel 01: Horizontal (Peak)

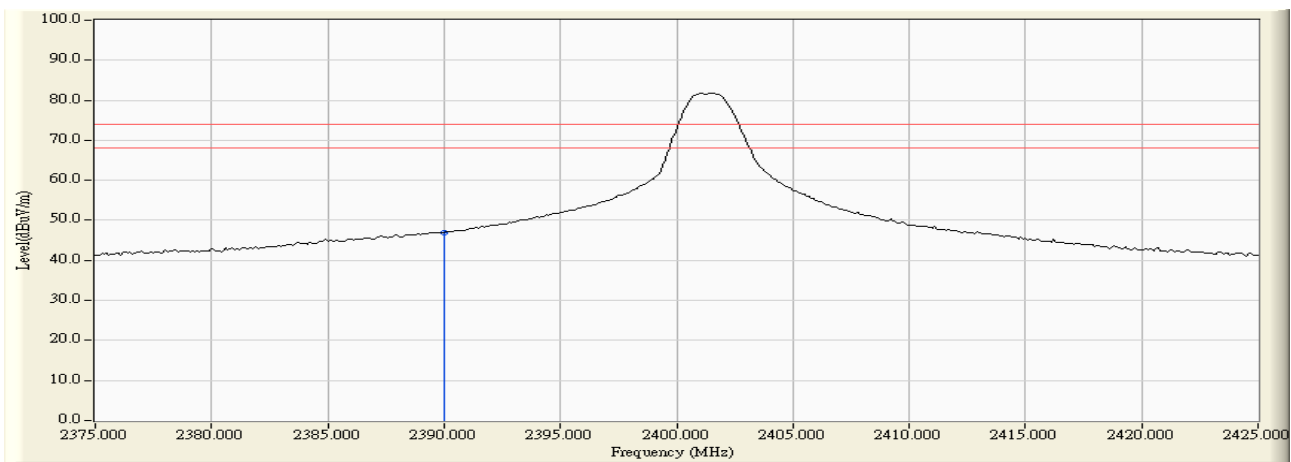

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. “ * ”, means this data is the worst emission level.
4. Measurement Level = Reading Level + Correct Factor.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Factor	Measurement Level	Margin	Limit	Result
MHz	dBuV/m	dB	dBuV/m	dB	dBuV/m	Pass
Horizontal						
--	--	--	--	--	54.000	Pass

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Marker Delta Method(Low band)

Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2401	-2.323	85.050	82.727	Peak
Vertical	2401	-2.323	85.990	83.667	Peak

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Band Edge Test Data


Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	Δ (dB)	Band Edge Field Strength (dBuV/m)	Detector
Horizontal	2400	82.727	22.317	60.41	Peak
Horizontal	2400	---	---	40.41	Average
Vertical	2400	83.667	22.317	61.35	Peak
Vertical	2400	---	---	41.35	Average

Note:

1. The Marker Delta Method is refer to FCC DA 00-705.
2. The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

$$\text{Band Edge field Strength} = F - \Delta$$

F = Fundamental field Strength (Peak or Average)
 Δ = Conducted Band Edge Delta (Peak or Average)
3. AVG Measurement=Peak Measurement + Duty Cycle.
4. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

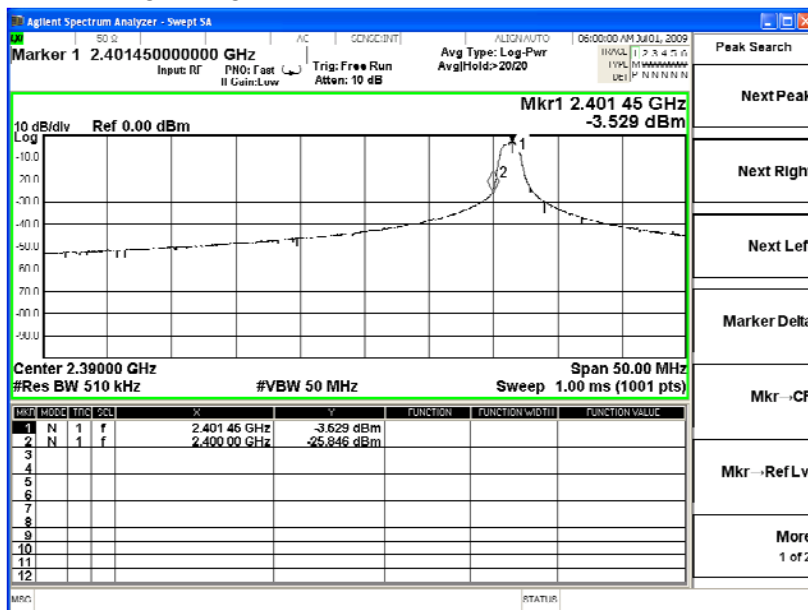


Product : Wireless Alarm Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2401 MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Result
01(Peak)	2390.000	-2.378	41.433	39.056	74.000	Pass

Figure Channel 01: Vertical (Peak)

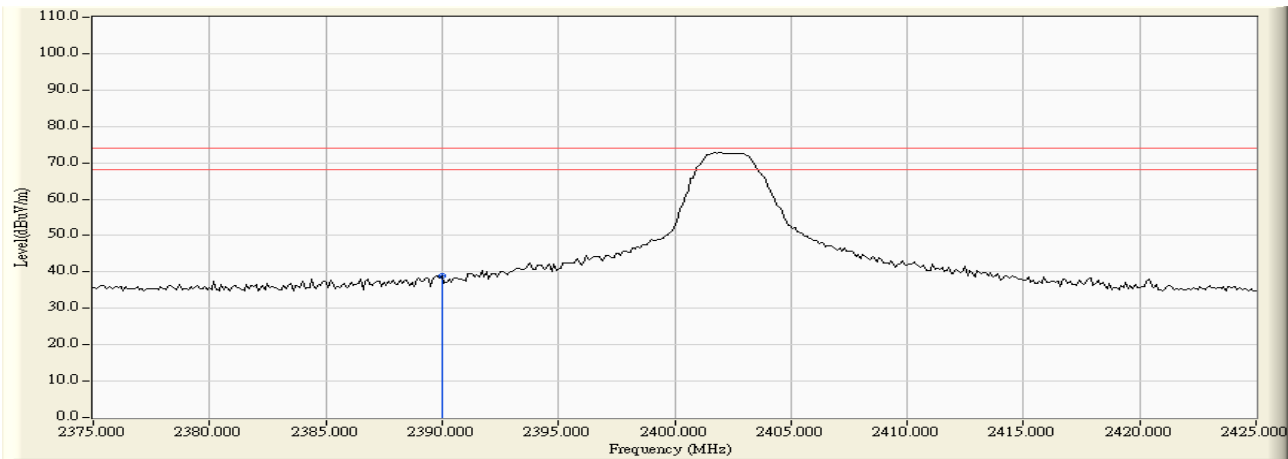

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. “ * ”, means this data is the worst emission level.
4. Measurement Level = Reading Level + Correct Factor.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m	Result Pass
Vertical	--	--	--	--	54.000	Pass

Note:


1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Alarm Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2481 MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Result
81(Peak)	2483.500	-1.937	68.087	66.150	74.000	Pass

Figure Channel 81: Horizontal(Peak)

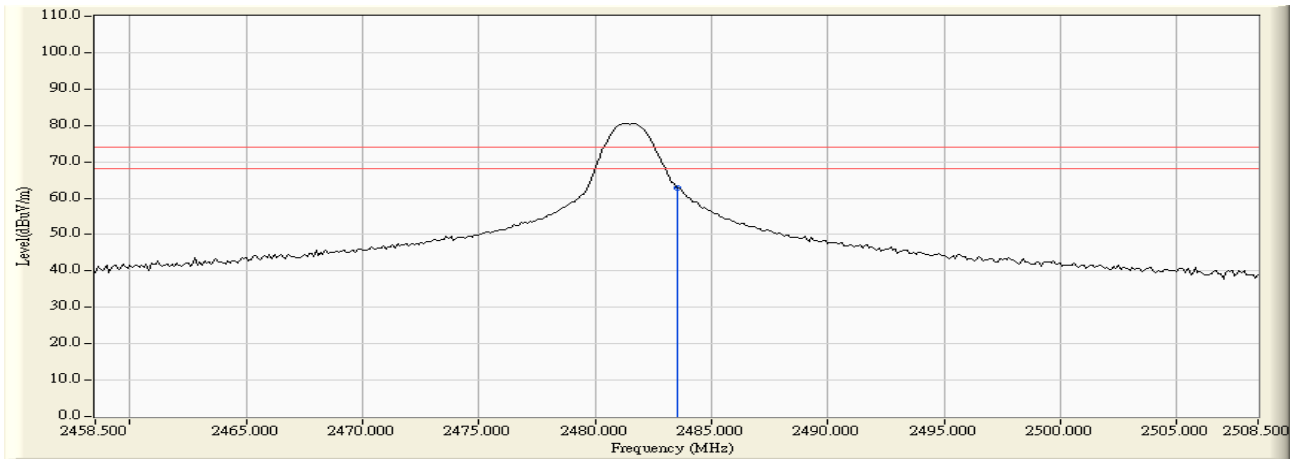

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. “ * ”, means this data is the worst emission level.
4. Measurement Level = Reading Level + Correct Factor.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m	Result Pass
Horizontal						
2483.500	62.910	-20.000	42.910	-11.090	54.000	Pass

Note:


1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Alarm Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2481 MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBUV)	Emission Level (dBUV/m)	Peak Limit (dBUV/m)	Result
81(Peak)	2483.500	-1.937	58.195	56.258	74.000	Pass

Figure Channel 81: Vertical(Peak)

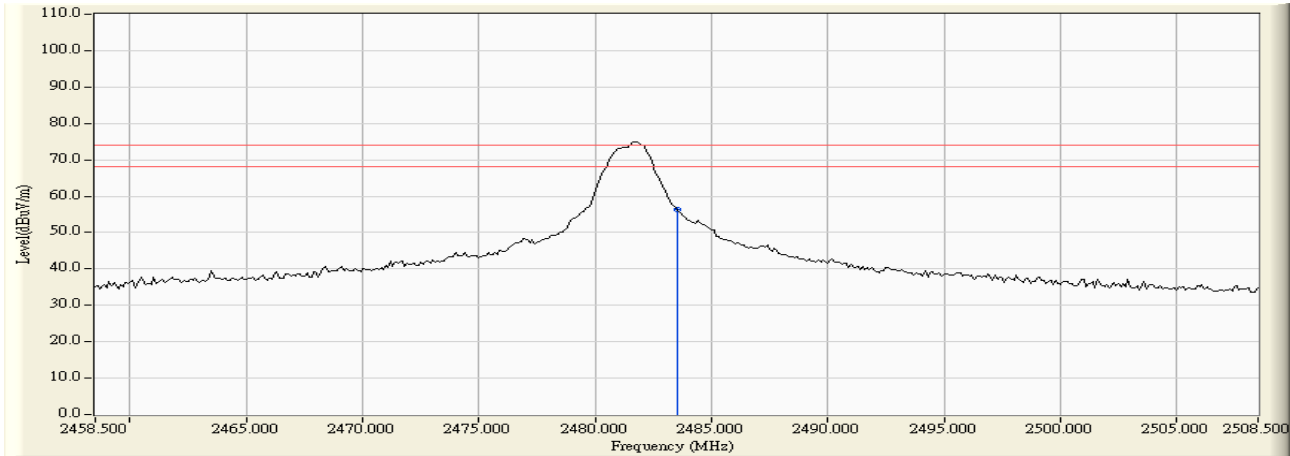

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. “ * ”, means this data is the worst emission level.
4. Measurement Level = Reading Level + Correct Factor.

Average Detector:

Frequency MHz	Peak Measurement dBUV/m	Duty Cycle Factor dB	Measurement Level dBUV/m	Margin dB	Limit dBUV/m	Result Pass
Vertical 2483.500	56.258	-20.000	36.258	-17.742	54.000	Pass

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

5. Duty Cycle


5.1. Test Equipment

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	R&S	FSP40 / 100339	Jun, 2009

- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by “X” are used to measure the final test results.

5.2. Test Setup

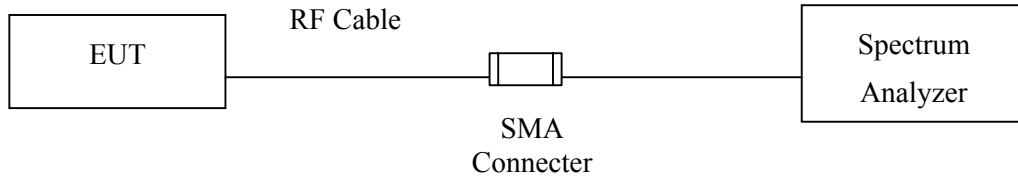


5.3. Uncertainty


± 150Hz

5.4. Test Result of Duty Cycle

Product : Wireless Alarm Controller
 Test Item : Duty Cycle Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

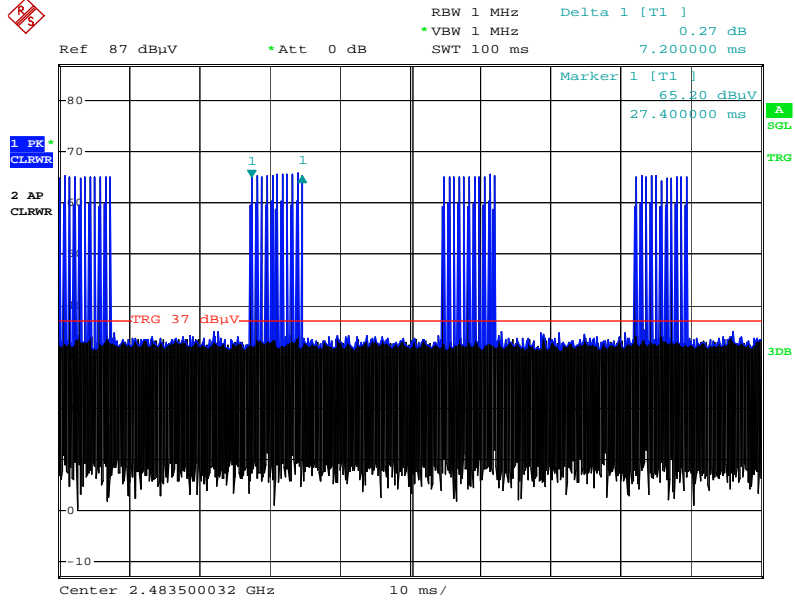

Date: 20.JAN.2009 09:07:49

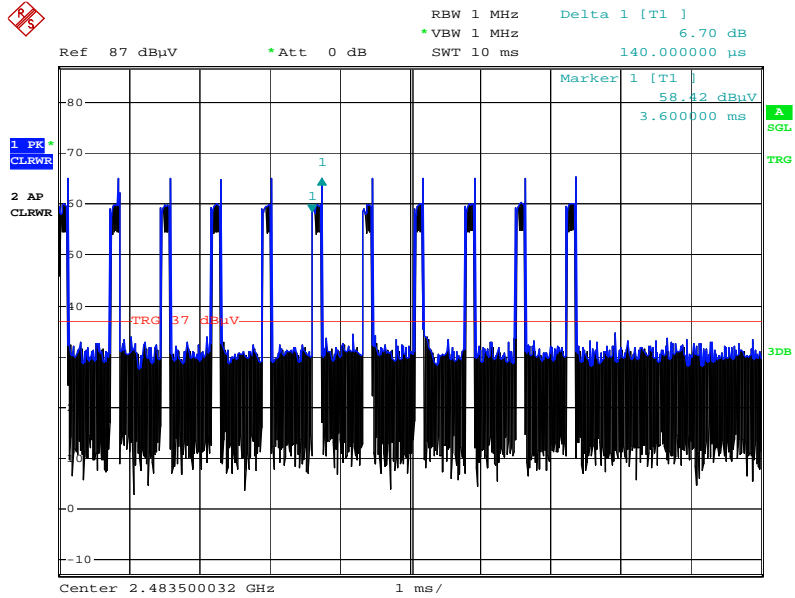

Date: 20.JAN.2009 09:08:33

Time on of 100ms= $140\mu\text{s} * 11 = 1.54 \text{ ms (1 cycle) } * 4 = 6.160\text{ms}$

Duty Cycle= $6.160\text{ms} / 100\text{ms} = 0.0616$

Duty Cycle correction factor= $20 \text{ LOG } 0.0616 = -24.208 \text{ dB}$

Duty Cycle correction factor	-20.00	dB
-------------------------------------	---------------	-----------

Remark:

1. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.