



Test Report

Product Name : Wireless Lock Controller
Model No. : WLC-110
FCC ID. : XBT-WLC110

Applicant : United Integrated Services Co.,Ltd
Address : 5F NO 3 LANE 7 PAOKAO ROAD HSINTIEN 23144
TAIPEI HSIEN TAIWAN

Date of Receipt : Jan. 10, 2009
Issued Date : Mar. 05, 2009
Report No. : 091162R-RFUSP07V01
Version : V1.0

The Test Results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issued Date: Mar. 05, 2009

Report No. : 091162R-RFUSP07V01



Product Name : Wireless Lock Controller

Applicant : United Integrated Services Co.,Ltd

Address : 5F NO 3 LANE 7 PAOKAO ROAD HSINTIEN 23144 TAIPEI HSIEN
TAIWAN

Manufacturer : United Integrated Services Co.,Ltd

Model No. : WLC-110

FCC ID. : XBTWLC-110

Rated Voltage : DC 12V

Working Voltage : DC 12V

Trade Name : UIS

Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2008
ANSI C63.4: 2003

Test Result : Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Genie Chang
(Senior Adm. Specialist / Genie Chang)



Tested By : Dino Chen
(Engineer / Dino Chen)

Approved By : [Signature]
(Manager / Vincent Lin)



TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description.....	4
1.2. Operation Description	6
1.3. Tested System Details	7
1.4. Configuration of Test System.....	7
1.5. EUT Exercise Software	8
1.6. Test Facility	9
2. Conducted Emission.....	10
2.1. Test Equipment.....	10
2.2. Test Setup	10
2.3. Limits.....	10
2.4. Test Procedure	11
2.5. Uncertainty	11
2.6. Test Result of Conducted Emission.....	12
3. Radiated Emission.....	14
3.1. Test Equipment.....	14
3.2. Test Setup	15
3.3. Limits.....	16
3.4. Test Procedure	17
3.5. Uncertainty	17
3.6. Test Result of Radiated Emission.....	18
4. Band Edge.....	23
4.1. Test Equipment.....	23
4.2. Test Setup	24
4.3. Limit	24
4.4. Test Procedure	25
4.5. Uncertainty	25
4.6. Test Result of Band Edge	26
5. Duty Cycle	32
5.1. Test Equipment.....	32
5.2. Test Setup	32
5.3. Uncertainty	32
5.4. Test Result of Duty Cycle	33
6. EMI Reduction Method During Compliance Testing.....	35
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name : Wireless Lock Controller
Trade Name : UIS
FCC ID. : XBT-WLC110
Model No. : WLC-110
Frequency Range : 2401 – 2481MHz
Type of Modulation : GFSK
Number of Channels : 81
Channel Control : Auto
Antenna Type : Printed on PCB
Antenna Gain : Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	UIS	N/A	-5.35 dBi for 2.4 GHz

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2401 MHz	Channel 22:	2422 MHz	Channel 43:	2443 MHz	Channel 64:	2464 MHz
Channel 2:	2402 MHz	Channel 23:	2423 MHz	Channel 44:	2444 MHz	Channel 65:	2465 MHz
Channel 3:	2403 MHz	Channel 24:	2424 MHz	Channel 45:	2445 MHz	Channel 66:	2466 MHz
Channel 4:	2404 MHz	Channel 25:	2425 MHz	Channel 46:	2446 MHz	Channel 67:	2467 MHz
Channel 5:	2405 MHz	Channel 26:	2426 MHz	Channel 47:	2447 MHz	Channel 68:	2468 MHz
Channel 6:	2406 MHz	Channel 27:	2427 MHz	Channel 48:	2448 MHz	Channel 69:	2469 MHz
Channel 7:	2407 MHz	Channel 28:	2428 MHz	Channel 49:	2449 MHz	Channel 70:	2470 MHz
Channel 8:	2408 MHz	Channel 29:	2429 MHz	Channel 50:	2450 MHz	Channel 71:	2471 MHz
Channel 9:	2409 MHz	Channel 30:	2430 MHz	Channel 51:	2451 MHz	Channel 72:	2472 MHz
Channel 10:	2410 MHz	Channel 31:	2431 MHz	Channel 52:	2452 MHz	Channel 73:	2473 MHz
Channel 11:	2411 MHz	Channel 32:	2432 MHz	Channel 53:	2453 MHz	Channel 74:	2474 MHz
Channel 12:	2412 MHz	Channel 33:	2433 MHz	Channel 54:	2454 MHz	Channel 75:	2475 MHz
Channel 13:	2413 MHz	Channel 34:	2434 MHz	Channel 55:	2455 MHz	Channel 76:	2476 MHz
Channel 14:	2414 MHz	Channel 35:	2435 MHz	Channel 56:	2456 MHz	Channel 77:	2477 MHz
Channel 15:	2415 MHz	Channel 36:	2436 MHz	Channel 57:	2457 MHz	Channel 78:	2478 MHz
Channel 16:	2416 MHz	Channel 37:	2437 MHz	Channel 58:	2458 MHz	Channel 79:	2479 MHz
Channel 17:	2417 MHz	Channel 38:	2438 MHz	Channel 59:	2459 MHz	Channel 80:	2480 MHz
Channel 18:	2418 MHz	Channel 39:	2439 MHz	Channel 60:	2460 MHz	Channel 81:	2481 MHz
Channel 19:	2419 MHz	Channel 40:	2440 MHz	Channel 61:	2461 MHz		
Channel 20:	2420 MHz	Channel 41:	2441 MHz	Channel 62:	2462 MHz		
Channel 21:	2421 MHz	Channel 42:	2442 MHz	Channel 63:	2463 MHz		

Note:

1. The EUT is a Wireless Lock Controller with a built-in 2.4GHz transceiver
2. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

EMI Test Mode	Mode 1: Transmitter
---------------	---------------------

1.2. Operation Description

The EUT is a Wireless Lock Controller with a built-in 2.4GHz transceiver. The EUT operation frequency is 2.401GHz-2.481GHz. The signals modulated GFSK are transmitted from the Printed Antenna of the EUT.

1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

For Conducted Emission


	Product	Manufacturer	Model No.	Serial No.	Power Cord
1.	DC Power Supply	Agilent	E3646A	MY40003414	Non-Shielded, 1.8m

	Signal Cable Type	Signal cable Description
A.	DC Power Cable	Non-Shielded, 0.6m

1.4. Configuration of Test System



For Conducted Emission

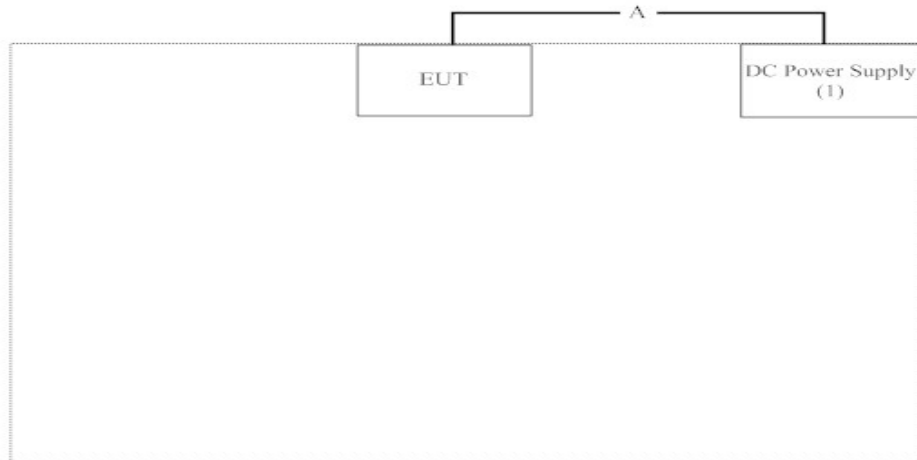

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4
- (2) Provides the power source, start continuous transmit
- (3) Verify that the EUT works correctly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: File on
 Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Registration Number: 92195



Accreditation on NVLAP
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation

Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
 Lin-Kou Shiang, Taipei,
 Taiwan, R.O.C.
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : service@quietek.com

FCC Accreditation Number: TW1014



2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2008	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2008	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2008	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2008	
5	No.1 Shielded Room			N/A	

Note: All instruments are calibrated every one year.

2.2. Test Setup

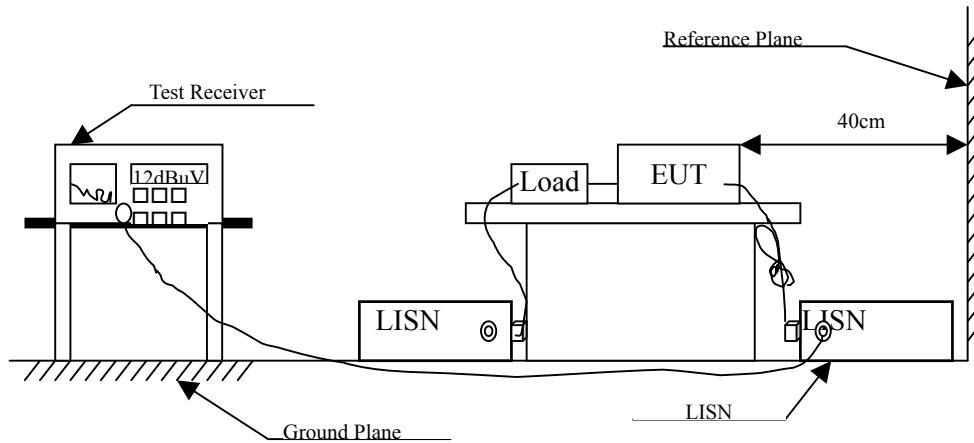

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : Wireless Lock Controller
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.158	9.756	25.530	35.286	-30.485	65.771
0.689	9.630	21.640	31.270	-24.730	56.000
4.869	9.700	31.710	41.410	-14.590	56.000
22.080	9.879	17.730	27.609	-32.391	60.000
23.951	10.050	31.350	41.400	-18.600	60.000
29.939	10.220	24.020	34.240	-25.760	60.000
Average					
0.158	9.756	2.130	11.886	-43.885	55.771
0.689	9.630	15.220	24.850	-21.150	46.000
4.869	9.700	27.070	36.770	-9.230	46.000
22.080	9.879	15.310	25.189	-24.811	50.000
23.951	10.050	26.400	36.450	-13.550	50.000
29.939	10.220	22.140	32.360	-17.640	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Wireless Lock Controller
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmitter (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 2					
Quasi-Peak					
0.154	9.760	26.430	36.191	-29.695	65.886
0.177	9.736	21.140	30.876	-34.353	65.229
0.677	9.650	24.690	34.340	-21.660	56.000
1.263	9.670	11.350	21.020	-34.980	56.000
4.873	9.700	29.750	39.450	-16.550	56.000
23.951	10.060	31.510	41.570	-18.430	60.000
Average					
0.154	9.760	2.680	12.441	-43.445	55.886
0.177	9.736	0.610	10.346	-44.279	54.625
0.677	9.650	15.610	25.260	-20.740	46.000
1.263	9.670	3.650	13.320	-32.680	46.000
4.873	9.700	24.170	33.870	-12.130	46.000
23.951	10.060	27.220	37.280	-12.720	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Radiated Emission

3.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1		Test Receiver	R & S	ESVS 10 / 834468/003	May, 2008
		Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2008
		Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2008
		Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Sep., 2008
<input type="checkbox"/> Site # 2		Test Receiver	R & S	ESCS 30 / 836858 / 022	May, 2008
		Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2008
		Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2008
		Bilog Antenna	SCHAFFNER	CBL6112B / 2705	May, 2008
		Horn Antenna	ETS	3115 / 0005-6160	Sep., 2008
		Pre-Amplifier	QTK	QTK-AMP-01/ 0001	May, 2008
<input checked="" type="checkbox"/> Site # 3	X	Test Receiver	R & S	ESI 26 / 838786/004	May, 2008
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2008
	X	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2008
	X	Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2008
	X	Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2008
	X	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2008
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2008
	X	Pre-Amplifier	HP	8449B / 3008A01123	July, 2008


- Note:
1. All equipments are calibrated every one year.
 2. Test equipments marked by "X" are used to measure the final test results.

3.2. Test Setup

Below 1GHz

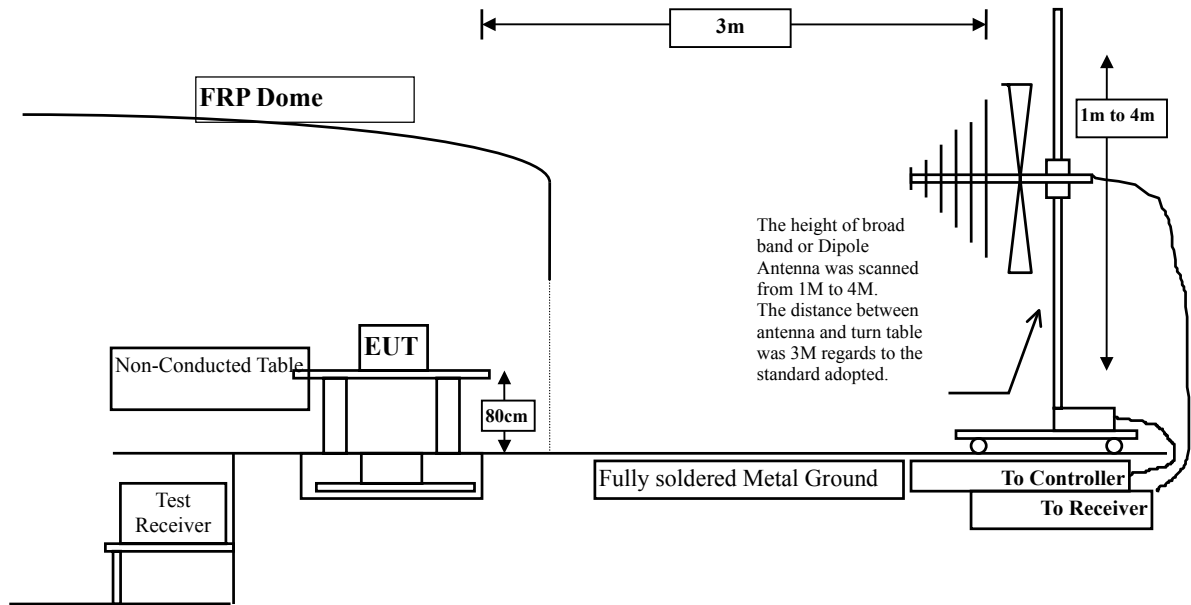

Above 1GHz

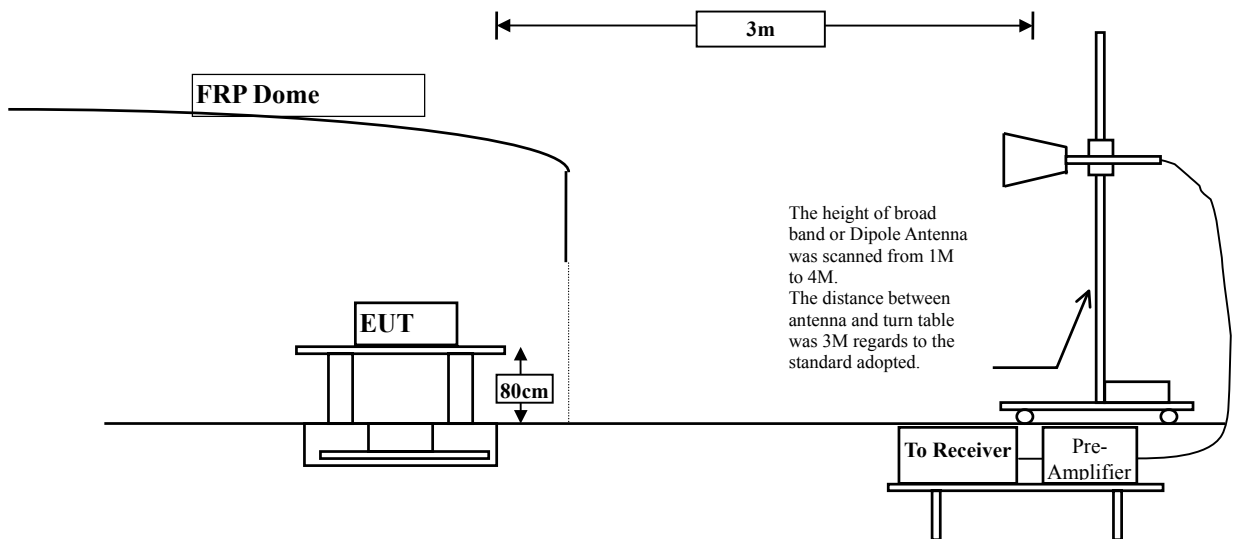

3.3. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBuV/m @3m)	(uV/m @3m)	(dBuV/m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
 2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured on the Final Measurement.

The measurement frequency range from 30MHz - 10th Harmonic of fundamental was investigated.

3.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

3.6. Test Result of Radiated Emission

Product : Wireless Lock Controller
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmitter (2401,2441,2481 MHz)

Peak Detector

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
2401.000	-6.727	88.920	82.193	-31.807	114.000
2441.000	-6.584	87.320	80.736	-33.264	114.000
2481.000	-6.471	84.380	77.908	-36.092	114.000
Vertical					
2401.000	-6.727	86.590	79.863	-34.137	114.000
2441.000	-6.584	87.310	80.726	-33.274	114.000
2481.000	-6.471	88.100	81.628	-32.372	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
2401.000	--	--	--	--	94.000
2441.000	--	--	--	--	94.000
2481.000	--	--	--	--	94.000
Vertical					
2401.000	--	--	--	--	94.000
2441.000	--	--	--	--	94.000
2481.000	--	--	--	--	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Lock Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2401 MHz)

Peak Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m
Horizontal					
4802.000	-0.321	58.040	57.719	-16.281	74.000
7203.000	3.216	46.580	49.796	-24.204	74.000
9604.000	5.707	41.450	47.157	-26.843	74.000
Vertical					
4802.000	-0.321	51.000	50.679	-23.321	74.000
7203.000	3.216	46.580	49.796	-24.204	74.000
9604.000	5.707	41.060	46.767	-27.233	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Emission Level = Reading Level + Correct Factor.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
4802	57.719	-20.000	37.719	-16.281	54.000
Vertical					
--	--	--	--	--	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Lock Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441 MHz)

Peak Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m
Horizontal					
4882.000	0.082	53.820	53.902	-20.098	74.000
7323.000	3.340	45.410	48.750	-25.250	74.000
9764.000	6.265	40.310	46.575	-27.425	74.000
Vertical					
4882.000	0.082	51.790	51.872	-22.128	74.000
7323.000	3.340	48.260	51.600	-22.400	74.000
9764.000	6.265	40.370	46.635	-27.365	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Emission Level = Reading Level + Correct Factor.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
--	--	--	--	--	54.000
Vertical					
--	--	--	--	--	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Lock Controller
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2481MHz)

Peak Detector:

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m
Horizontal					
4962.000	0.618	53.300	53.918	-20.082	74.000
7443.000	3.939	47.640	51.580	-22.420	74.000
9924.000	6.461	39.680	46.140	-27.860	74.000
Vertical					
4962.000	0.618	53.720	54.338	-19.662	74.000
7443.000	3.939	49.560	53.500	-20.500	74.000
9924.000	6.461	41.200	47.660	-26.340	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz °
3. Emission Level = Reading Level + Correct Factor.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
--	--	--	--	--	54.000
Vertical					
4962	54.338	-20.000	34.338	-19.662	54.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Lock Controller
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2441 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
181.320	-12.696	33.882	21.186	-22.314	43.500
365.620	-1.817	34.003	32.186	-13.814	46.000
544.100	2.992	24.116	27.108	-18.892	46.000
615.880	2.732	23.768	26.500	-19.500	46.000
829.280	6.015	21.214	27.229	-18.771	46.000
949.560	6.178	20.667	26.845	-19.155	46.000
Vertical					
181.320	-10.056	33.882	23.826	-19.674	43.500
365.620	-2.667	34.249	31.582	-14.418	46.000
544.100	-1.208	24.116	22.908	-23.092	46.000
629.460	-4.201	26.722	22.521	-23.479	46.000
823.460	3.169	21.733	24.902	-21.098	46.000
970.900	6.782	22.740	29.522	-24.478	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

4. Band Edge

4.1. Test Equipment

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Test Receiver	R & S	ESI 26 / 838786/004	May, 2008
X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2008
X	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2008
X	Horn Antenna	Schwarzbeck	BBHA9120D / 305, 306	July, 2008
X	Horn Antenna	Schwarzbeck	BBHA9170 / 208, 209	July, 2008
X	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2008
X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2008
X	Pre-Amplifier	HP	8449B / 3008A01123	July, 2008


OATS No.3

- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by “X” are used to measure the final test results.

4.2. Test Setup

RF Radiated Measurement:

Above 1GHz

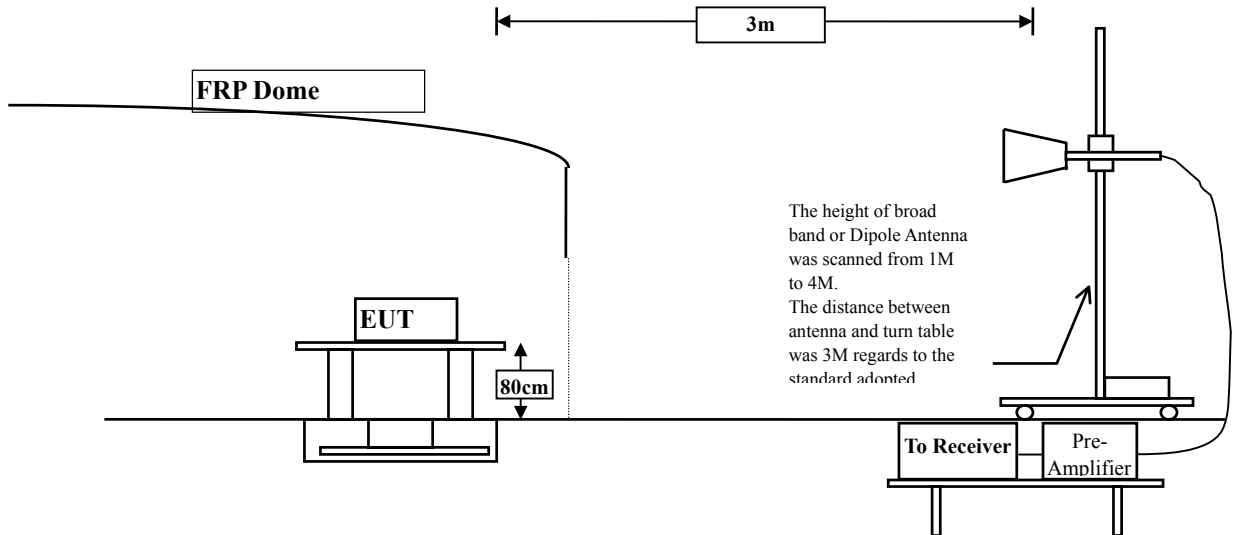

4.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2003 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

4.5. Uncertainty

Conducted is ± 1.27 dB

Radiated is ± 3.9 dB


4.6. Test Result of Band Edge

Product : Wireless Lock Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2401 MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Result
01(Peak)	2390.000	-2.378	48.964	46.587	74.000	Pass

Figure Channel 01: Horizontal (Peak)

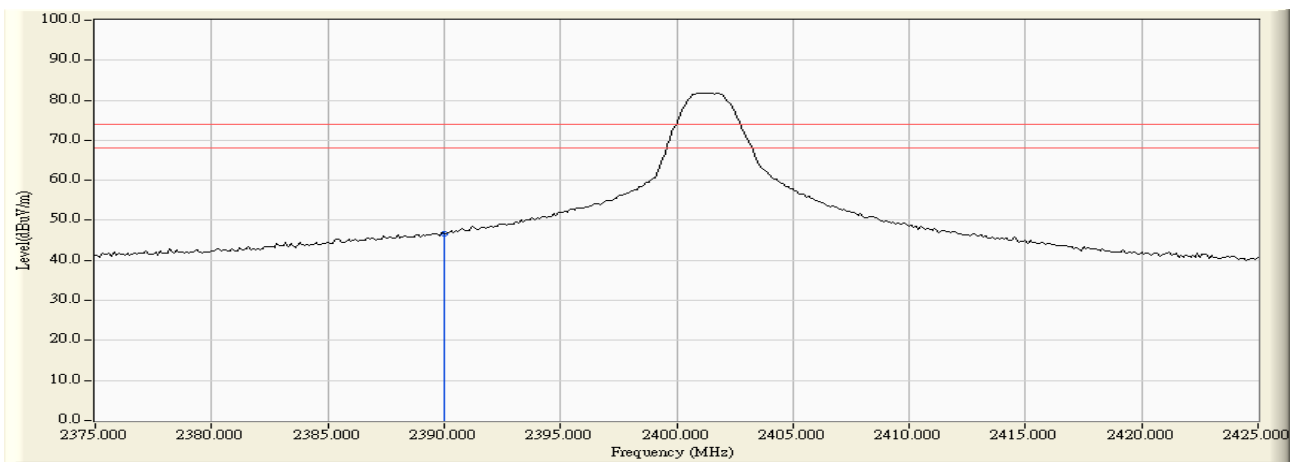

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. “ * ”, means this data is the worst emission level.
4. Measurement Level = Reading Level + Correct Factor.

Average Detector:

Frequency	Peak Measurement	Duty Cycle Factor	Measurement Level	Margin	Limit	Result
MHz	dBuV/m	dB	dBuV/m	dB	dBuV/m	Pass
Horizontal						
--	--	--	--	--	54.000	Pass

Note:


1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Lock Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2401 MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Result
01(Peak)	2390.000	-2.378	48.964	43.291	74.000	Pass

Figure Channel 01: Vertical (Peak)

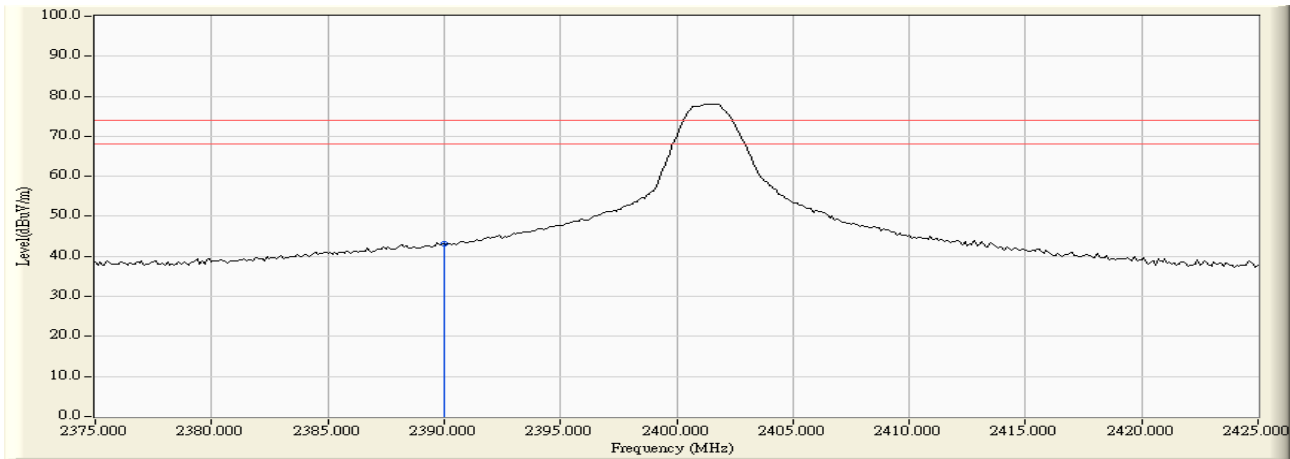

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. “ * ”, means this data is the worst emission level.
4. Measurement Level = Reading Level + Correct Factor.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m	Result Pass
--	--	--	--	--	54.000	Pass

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Lock Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2401 MHz)

Marker Delta Method (Low band)

Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2401.000	-6.727	88.920	82.193	Peak
Vertical	2401.000	-6.727	86.590	79.863	Peak

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Band Edge Test Data


Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	Δ (dB)	Band Edge Field Strength (dBuV/m)	Detector
Horizontal	2400	82.193	24.024	58.169	Peak
Horizontal	2400	---	---	38.169	Average
Vertical	2400	79.863	24.024	55.839	Peak
Vertical	2400	---	---	35.839	Average

Note:

- The Marker Delta Method is refer to FCC DA 00-705.
- The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

$$\text{Band Edge field Strength} = F - \Delta$$

F = Fundamental field Strength (Peak or Average)
 Δ = Conducted Band Edge Delta (Peak or Average)
- AVG Measurement=Peak Measurement + Duty Cycle.
- If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

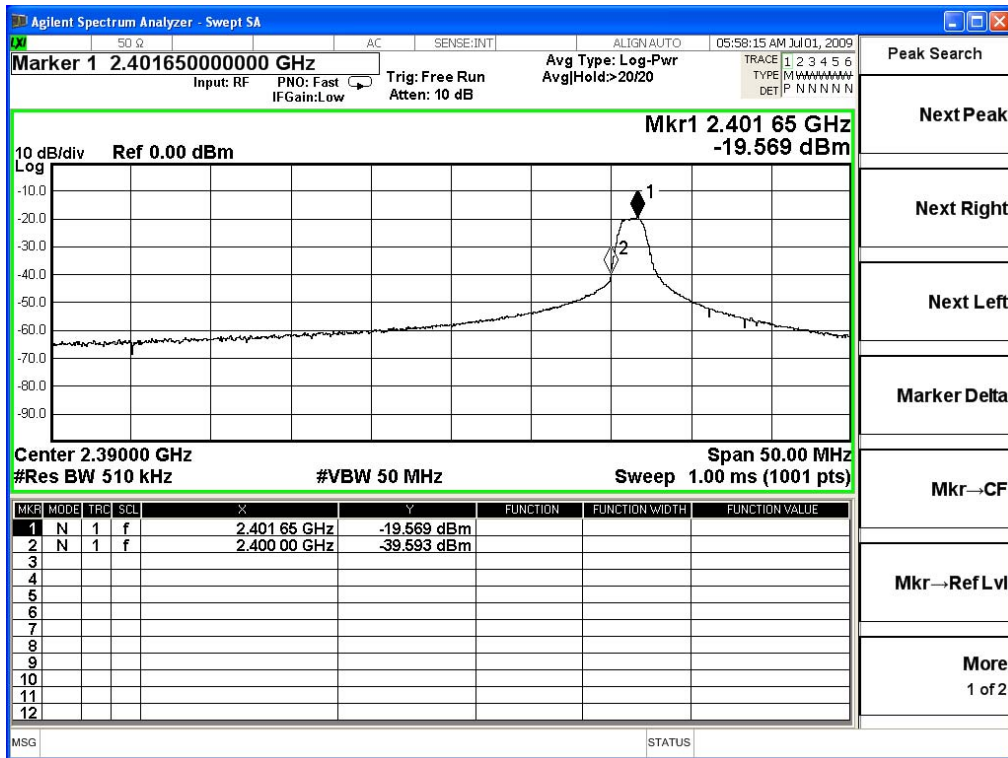


Product : Wireless Lock Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2481 MHz)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Result
81(Peak)	2483.500	-1.937	64.215	62.278	74.000	Pass

Figure Channel 81: Horizontal(Peak)

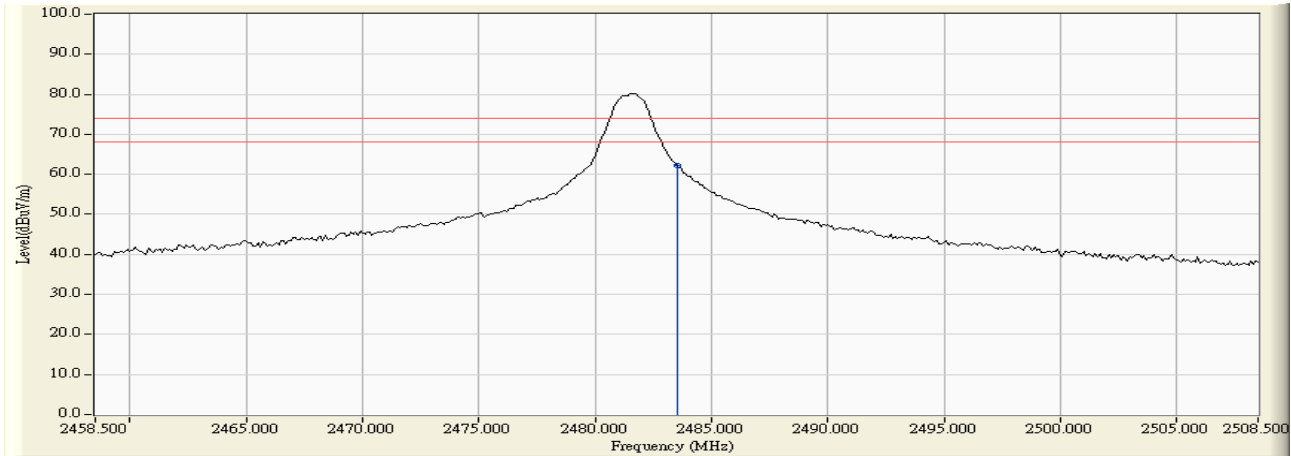

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. “ * ”, means this data is the worst emission level.
4. Measurement Level = Reading Level + Correct Factor.

Average Detector:

Frequency (MHz)	Peak Measurement (dBuV/m)	Duty Cycle Factor (dB)	Measurement Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Result
-----------------	---------------------------	------------------------	----------------------------	-------------	----------------	--------

Horizontal

2483.5	62.278	-20.000	42.278	-11.722	54.000	Pass
--------	--------	---------	--------	---------	--------	------

Note:


1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Wireless Lock Controller
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter (2481 MHz)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBUV)	Emission Level (dBUV/m)	Peak Limit (dBUV/m)	Result
81(Peak)	2483.500	-1.937	64.424	62.487	74.000	Pass

Figure Channel 81: Vertical(Peak)

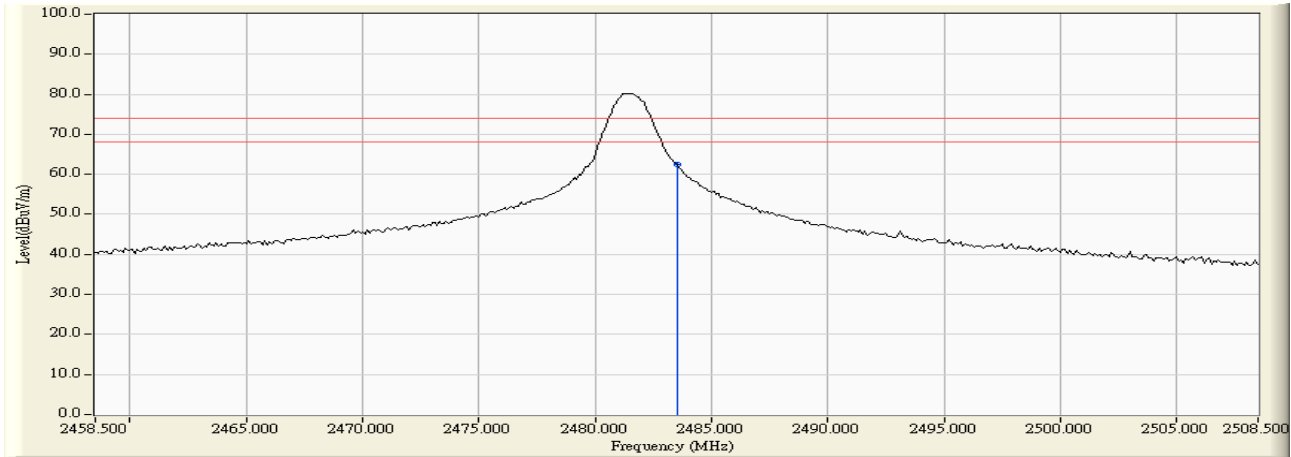

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. “ * ”, means this data is the worst emission level.
4. Measurement Level = Reading Level + Correct Factor.

Average Detector:

Frequency	Peak	Duty Cycle	Measurement	Margin	Limit	Result
MHz	Measurement	Factor	Level	dB	dBUV/m	Pass
	dBUV/m	dB	dBUV/m			

Vertical

2483.5	62.487	-20.000	42.487	-11.513	54.000	Pass
--------	--------	---------	--------	---------	--------	------

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle
2. The Duty Cycle is refer to section 5.
3. If Duty Cycle is smaller than -20dB,based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.
4. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

5. Duty Cycle


5.1. Test Equipment

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	R&S	FSP40 / 100339	Jun, 2008

- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by “X” are used to measure the final test results.

5.2. Test Setup

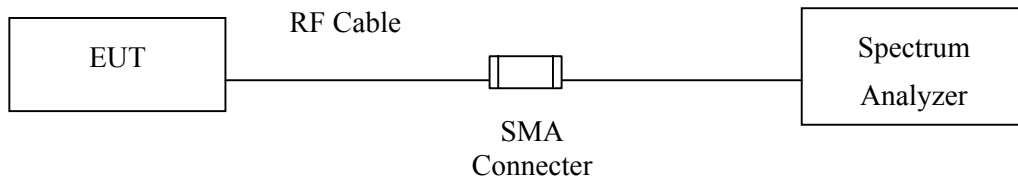


5.3. Uncertainty


± 150Hz

5.4. Test Result of Duty Cycle

Product : Wireless Lock Controller
 Test Item : Duty Cycle Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmitter

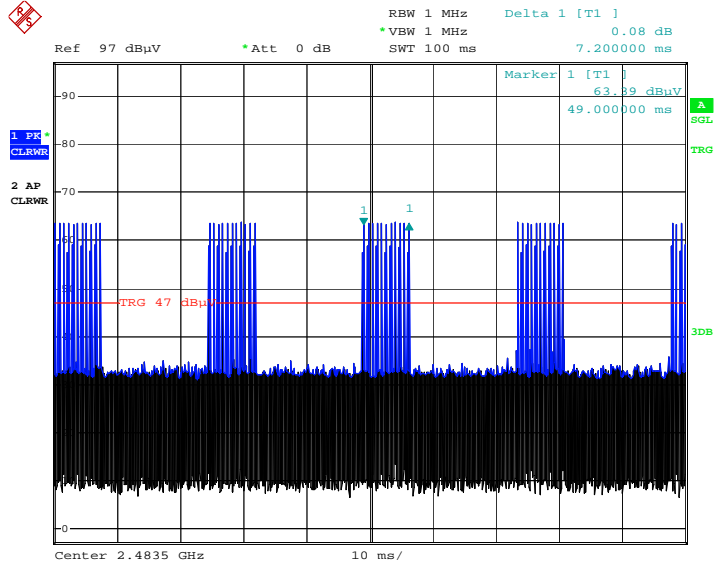

Date: 19.JAN.2009 22:02:38

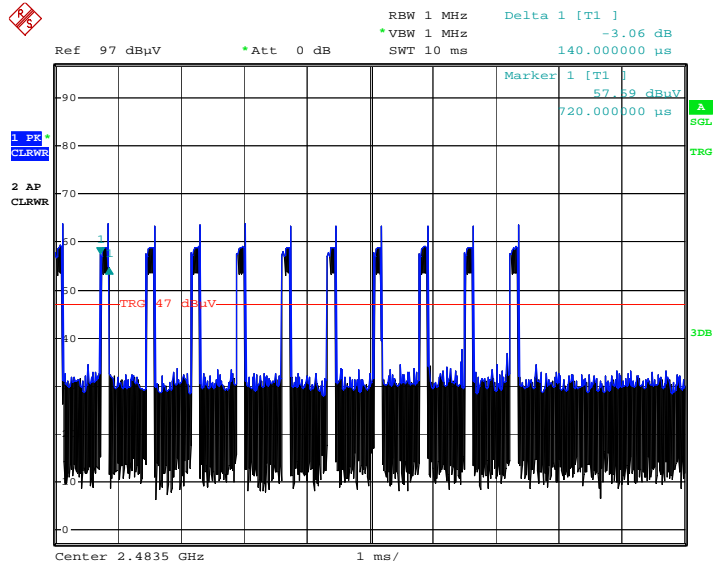

Date: 19.JAN.2009 22:04:20

$$1 \text{ Cycle} = 140\mu\text{s} * 11 = 1.54 \text{ ms}$$

$$(1.54\text{ms} * 4) + (140\mu\text{s} * 3) = 6.58\text{ms}$$

$$\text{Duty Cycle} = 6.58\text{ms} / 100\text{ms} = 0.0658$$

$$\text{Duty Cycle correction factor} = 20 \text{ LOG } 0.0658 = -23.635 \text{ dB}$$

Duty Cycle correction factor	-20.00	dB
-------------------------------------	---------------	-----------

Remark:

1. If Duty Cycle is smaller than -20dB, based on FCC part15 the duty cycle correction factor is -20dB for calculating average emission.

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.