

FCC TEST REPORT (15.407)

REPORT NO.: RF981120H03-1

MODEL NO.: C2104001

RECEIVED: Nov. 20, 2009

TESTED: Dec. 11 to 28, 2009

ISSUED: Dec. 30, 2009

APPLICANT: Ubee Interactive Corp.

ADDRESS: 6F-9, No.38, Taiyuan St. Jhubei City
Hsinchu County 302, Taiwan.

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 76 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	9
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3.4	DESCRIPTION OF SUPPORT UNITS	14
3.5	CONFIGURATION OF SYSTEM UNDER TEST	14
4.	TEST TYPES AND RESULTS	15
4.1	CONDUCTED EMISSION MEASUREMENT	15
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	15
4.1.2	TEST INSTRUMENTS	15
4.1.3	TEST PROCEDURES	16
4.1.4	DEVIATION FROM TEST STANDARD	16
4.1.5	TEST SETUP	17
4.1.6	EUT OPERATING CONDITIONS	17
4.1.7	TEST RESULTS	18
4.2	RADIATED EMISSION MEASUREMENT	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	20
4.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	21
4.2.3	TEST INSTRUMENTS	22
4.2.4	TEST PROCEDURES	23
4.2.5	DEVIATION FROM TEST STANDARD	23
4.2.6	TEST SETUP	24
4.2.7	EUT OPERATING CONDITION	24
4.2.8	TEST RESULTS	25
4.3	PEAK TRANSMIT POWER MEASUREMENT	46
4.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	46
4.3.2	TEST INSTRUMENTS	46
4.3.3	TEST PROCEDURE	47
4.3.4	DEVIATION FROM TEST STANDARD	47
4.3.5	TEST SETUP	47
4.3.6	EUT OPERATING CONDITIONS	47
4.3.7	TEST RESULTS	48
4.4	PEAK POWER EXCURSION MEASUREMENT	54
4.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	54
4.4.2	TEST INSTRUMENTS	54
4.4.3	TEST PROCEDURE	55
4.4.4	DEVIATION FROM TEST STANDARD	55
4.4.5	TEST SETUP	55
4.4.6	EUT OPERATING CONDITIONS	55
4.4.7	TEST RESULTS	56
4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	59



4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	59
4.5.2	TEST INSTRUMENTS	59
4.5.3	TEST PROCEDURES	60
4.5.4	DEVIATION FROM TEST STANDARD	60
4.5.5	TEST SETUP	60
4.5.6	EUT OPERATING CONDITIONS	60
4.5.7	TEST RESULTS	61
4.6	FREQUENCY STABILITY	64
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	64
4.6.2	TEST INSTRUMENTS	64
4.6.3	TEST PROCEDURE	64
4.6.4	DEVIATION FROM TEST STANDARD	65
4.6.5	TEST SETUP	65
4.6.6	EUT OPERATING CONDITION	65
4.6.7	TEST RESULTS	66
4.7	ANTENNA PORT OUTPUT SPECTRUM PLOTS	67
4.7.1	TEST INSTRUMENTS	67
4.7.2	TEST PROCEDURE	67
4.7.3	EUT OPERATING CONDITION	67
4.7.4	TEST RESULTS	68
5.	INFORMATION ON THE TESTING LABORATORIES	75
6.	APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	76

1. CERTIFICATION

PRODUCT: BCM 43224 WiFi Card
BRAND NAME: Ubee
MODEL NO.: C2104001
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: Dec. 11 to 28, 2009
APPLICANT: Ubee Interactive Corp.
STANDARDS: FCC Part 15, Subpart E (Section 15.407),
ANSI C63.4-2003

The above equipment (Model: C2104001) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** Dec. 30, 2009
(Midoli Peng, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** Dec. 30, 2009
(Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** Dec. 30, 2009
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

[For 802.11a](#)

APPLIED STANDARD: FCC Part 15, Subpart E (Section 15.407)			
Standard Section	Test Type	Result	Remark
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.16dB at 0.737MHz
15.407(b/1/2/3)(b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -0.9dB at 5150.00MHz
15.407(a/1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RP-SMA not a standard connector.

NOTE:

1. The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.25GHz. For the 2400 ~ 2483.5MHz and 5.725~5.850GHz RF parameters was recorded in another test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	BCM 43224 WiFi Card
MODEL NO.	C2104001
FCC ID	XCNC2104001
POWER SUPPLY	DC 3.3V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11a/g: 54/48/36/24/18/12/9/6Mbps 802.11b: 11/5.5/2/1Mbps Draft 802.11n (20MHz): 130 / 117 / 104 / 78 / 52 / 39 / 26 / 13 / 65 / 58.5 / 52 / 39 / 26 / 19.5 / 13 / 6.5Mbps Draft 802.11n (40MHz): 270 / 243 / 216 / 162 / 108 / 81 / 54 / 27 / 135 / 121.5 / 108 / 81 / 54 / 40.5 / 27 / 13.5Mbps
FREQUENCY RANGE	For 15.407 802.11a: 5.18 ~ 5.24GHz
	For 15.247 802.11b & 802.11g: 2412 ~ 2462MHz 802.11a: 5.745 ~ 5.825GHz
	For 15.407 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
NUMBER OF CHANNEL	For 15.247(2.4GHz) 11 for 802.11b, 802.11g, 802.11n (20MHz)
	For 15.247(5GHz) 5 for 802.11a, 802.11n (20MHz)
	2 for 802.11n (40MHz)

MAXIMUM OUTPUT POWER	For 15.407 802.11a: 21.9mW 802.11n (20MHz): 24.1mW 802.11n (40MHz): 37.0mW For 15.247(2.4GHz) 802.11b: 85.1mW 802.11g: 557.3mW 802.11n (20MHz): 526.2mW For 15.247(5GHz) 802.11a: 314.4mW 802.11n (20MHz): 318.3mW 802.11n (40MHz): 252.4mW
ANTENNA TYPE	Please see note 1
ANTENNA CONNECTOR	Please see note 1
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. There are two antennas provided to this EUT, please refer to the following table:

Chain	Antenna Gain		Antenna Type	Connector
	For 2.4GHz Gain (dBi)	For 5GHz Gain (dBi)		
Chain (0)	1.79	3.97	Dipole	RP-SMA
Chain (1)	1.79	3.97	Dipole	RP-SMA

- The EUT incorporates a MIMO function with 802.11n. Physically, the EUT provides two completed transmitters and two completed receivers.
- The EUT is 2 * 2 spatial MIMO (2Tx & 2Rx) without beam forming function. The antenna configurations are two transmitter antennas and two receiver antennas, as there are 2 Dipole antennas. Spatial multiplexing modes for simultaneous transmission using 2 antennas, and for simultaneous receiver using 2 antennas. The 11b legacy mode is limited to single transmitter only.
- The EUT complies with 802.11n standards and backwards compatible with 802. 11a, 802.11b, 802.11g products.
- The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 5150MHz ~ 5250MHz bands:

Four channels are provided for 802.11a and 802.11n (20MHz):

CHANNEL	FREQUENCY
36	5180 MHz
40	5200 MHz
44	5220 MHz
48	5240 MHz

Two channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

ANTENNA COMBINATION MODE:

COMBINATION MODE	OPERATION MODE	TX CHAIN(0)	TX CHAIN(1)
A	802.11 a	√	√
B	802.11n(20MHz) for MCS0~7	√	
C	802.11n(20MHz) for MCS8~15	√	√
D	802.11n(40MHz) for MCS0~7	√	
E	802.11n(40MHz) for MCS8~15	√	√

Note:

1. The above information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.
2. Mode A, C and E the worst modes, were selected as representative mode for the report.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11n (40MHz)	38 to 46	46	OFDM	BPSK	13	E

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11n (40MHz)	38 to 46	46	OFDM	BPSK	13	E

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6	A
802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	13	C
802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	27	E

ANTENNA PORT OUTPUT SPECTRUM PLOTS:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11a	36 to 48	36, 48	OFDM	BPSK	6	A
802.11n (20MHz)	36 to 48	36, 48	OFDM	BPSK	13	C
802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	27	E

✂ After verification, conducted out band emission as show worst chain in report by investigations.

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	TX COMBINATION
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6	A
802.11n (20MHz)	36 to 48	36, 40, 48	OFDM	BPSK	13	C
802.11n (40MHz)	38 to 46	38, 46	OFDM	BPSK	27	E

※ After verification, bandwidth as show worst chain in report by investigations.

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER(SYSTEM)	TESTED BY
RE\geq1G	14deg. C, 68%RH, 1021 hPa	120Vac, 60Hz	Wen Yu
RE<1G	14deg. C, 68%RH, 1021 hPa	120Vac, 60Hz	Frank Liu
PLC	20deg. C, 58%RH, 1012 hPa	120Vac, 60Hz	Leo Peng
APCM	253deg. C, 54%RH, 1012 hPa	120Vac, 60Hz	Wen Yu

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a BCM 43224 WiFi Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP19L	CN-OHC416-70166-5C A-0448	PIW632500516610
2	TEST TOOL	Ubee	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

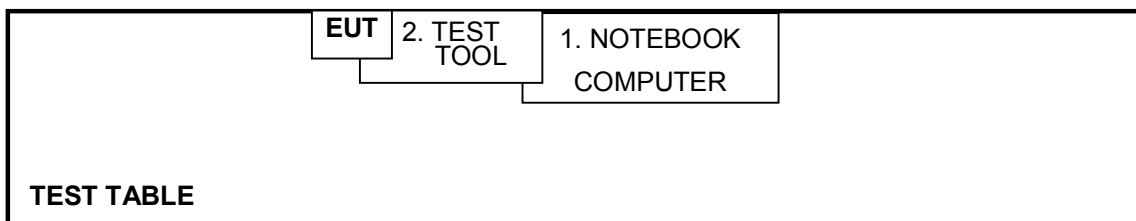

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 05, 2009	Mar. 04, 2010
Line-Impedance Stabilization Network (for EUT)	KNW-407	8-1395-12	May 04, 2009	May 03, 2010
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 08, 2009	June 07, 2010
RF Cable (JYEBAO)	5DFB	COACAB-001	Dec 14, 2009	Dec 13, 2010
50 ohms Terminator	50	3	Oct. 28, 2009	Oct. 27, 2010
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs
- b. provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

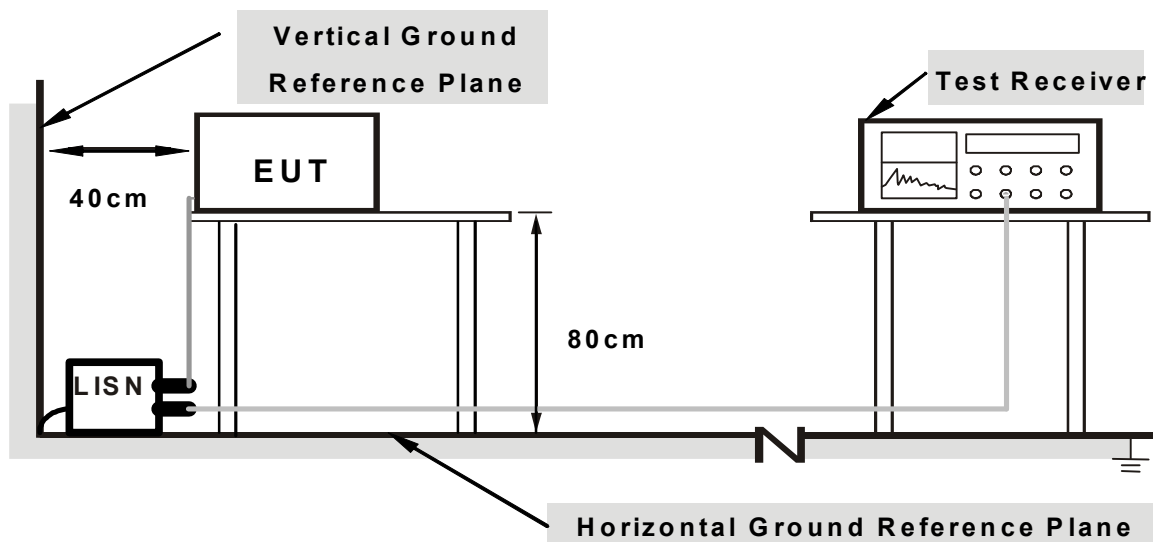

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (Notebook Computer) which placed on a testing table.
2. The communication partner run test program “BCM Tool” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


4.1.7 TEST RESULTS

802.11n(40MHz) OFDM MODULATION:

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.213	0.18	52.20	46.70	52.38	46.88	63.11	53.11	-10.73	-6.23
2	0.633	0.10	40.89	40.72	40.99	40.82	56.00	46.00	-15.01	-5.18
3	0.949	0.09	39.41	39.21	39.50	39.30	56.00	46.00	-16.50	-6.70
4	1.582	0.10	38.35	37.78	38.45	37.88	56.00	46.00	-17.55	-8.12
5	1.896	0.11	38.03	36.99	38.14	37.10	56.00	46.00	-17.86	-8.90
6	4.953	0.23	38.90	37.80	39.13	38.03	56.00	46.00	-16.87	-7.97


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

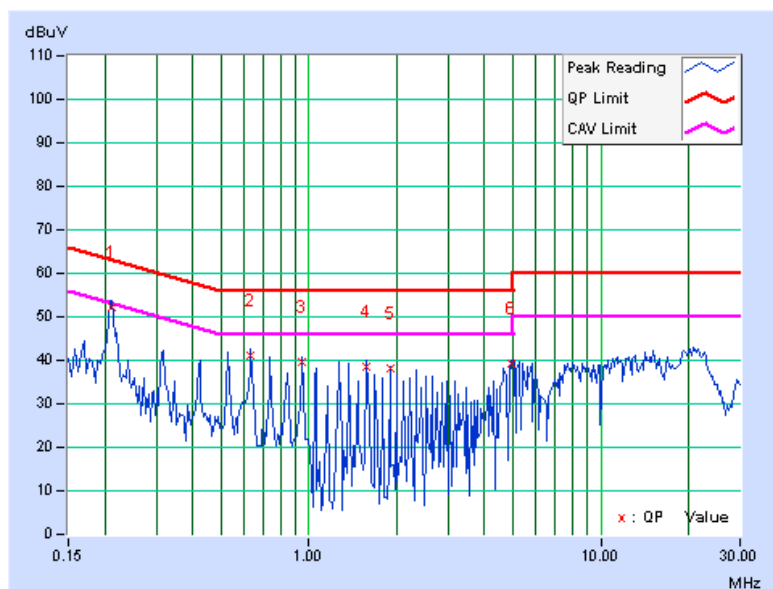

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.526	0.12	42.73	42.45	42.85	42.57	56.00	46.00	-13.15	-3.43
2	0.527	0.12	42.77	42.61	42.89	42.73	56.00	46.00	-13.11	-3.27
3	0.634	0.12	41.98	41.21	42.10	41.33	56.00	46.00	-13.90	-4.67
4	0.737	0.11	43.75	42.73	43.86	42.84	56.00	46.00	-12.14	-3.16
5	1.371	0.12	42.33	41.86	42.45	41.98	56.00	46.00	-13.55	-4.02
6	2.320	0.15	41.20	38.34	41.35	38.49	56.00	46.00	-14.65	-7.51

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

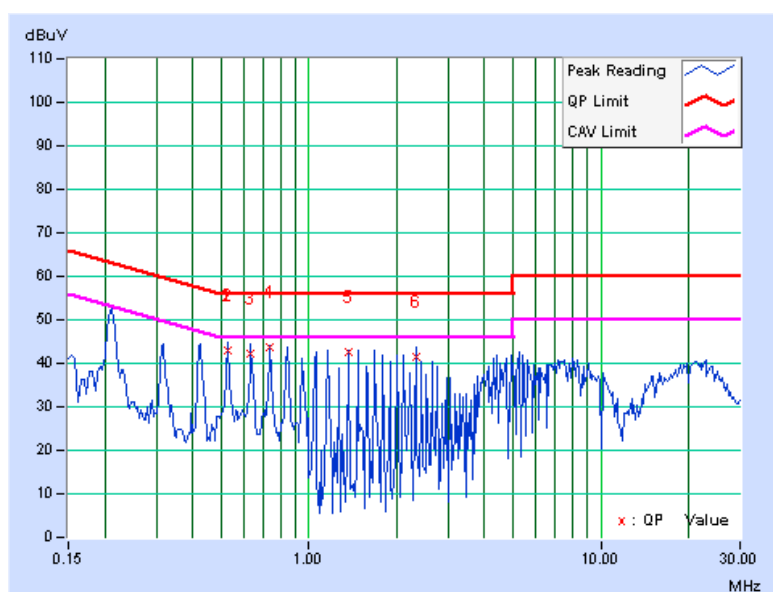

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m) *note 3
5150~5250	-27	68.3
5250~5350	-27	68.3
5470~5725	-27	68.3
5725~5825	-27 *note 1	68.3
	-17 *note 2	78.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



A D T

4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	Apr. 24 , 2009	Apr. 23 , 2010
HP Pre_Amplifier	8449B	3008A01923	Nov. 02, 2009	Nov. 01, 2010
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Aug. 28, 2009	Aug. 28, 2010
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	April 29, 2009	April 28, 2010
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 18, 2009	Dec. 17, 2010
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2009	Jan. 21, 2010
RF Switches	EMH-011	08009	Sep. 26, 2009	Sep. 25, 2010
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 14, 2009	Aug. 13, 2010
RF Cable	8D	STCCAB-001	Sep. 26, 2009	Sep. 25, 2010
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

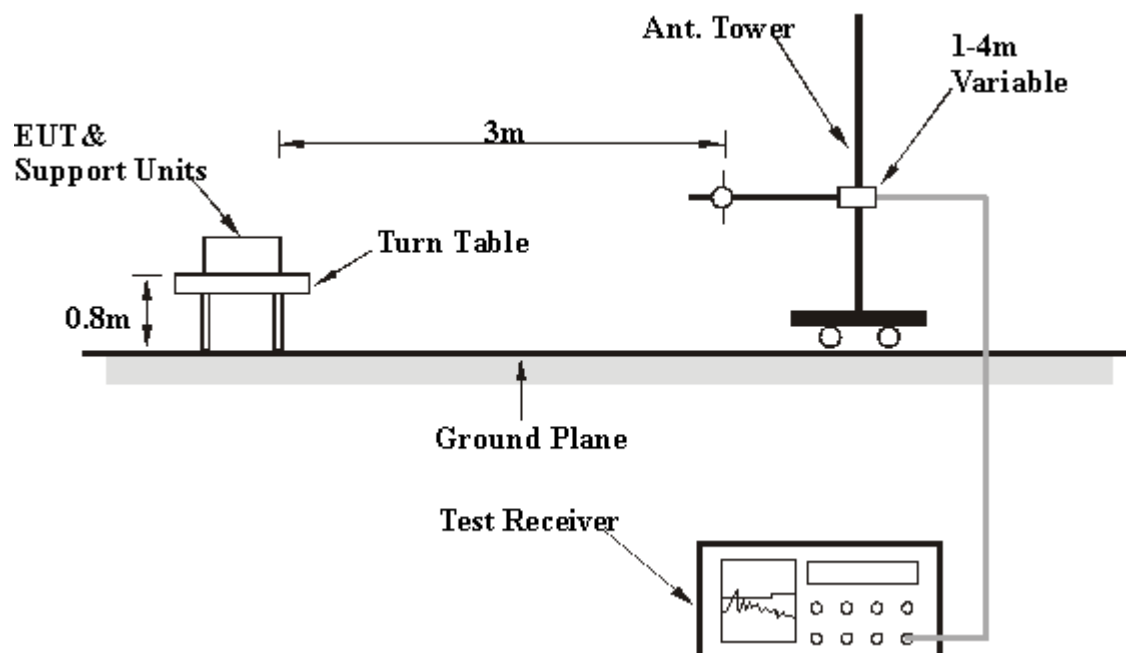

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA : 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH 1021 hPa	TESTED BY	Frank Liu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	75.39	25.2 QP	40.0	-14.9	1.14 H	130	13.61	11.54
2	241.67	28.3 QP	46.0	-17.7	1.25 H	91	14.92	13.39
3	398.83	32.4 QP	46.0	-13.7	1.11 H	146	13.84	18.51
4	500.00	41.4 QP	46.0	-4.6	1.58 H	14	20.08	21.31
5	750.00	36.1 QP	46.0	-9.9	1.00 H	321	10.37	25.71
6	1000.00	48.4 QP	54.0	-5.6	1.58 H	0	19.35	29.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.54	32.5 QP	40.0	-7.5	1.00 V	326	19.50	13.01
2	75.43	37.0 QP	40.0	-3.0	1.00 V	167	25.42	11.54
3	118.04	28.6 QP	43.5	-14.9	1.00 V	291	16.83	11.75
4	138.48	36.3 QP	43.5	-7.2	1.11 V	44	22.35	13.92
5	550.00	39.9 QP	46.0	-6.1	1.00 V	0	17.34	22.60
6	750.00	39.5 QP	46.0	-6.5	1.00 V	342	13.77	25.71
7	1000.00	50.6 QP	54.0	-3.4	1.00 V	0	21.56	29.04

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

ABOVE 1GHz WORST-CASE DATA

802.11a OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 68%RH 1021 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	52.2 PK	74.0	-21.8	1.25 H	25	15.80	36.41
2	5150.00	40.9 AV	54.0	-13.1	1.25 H	25	4.46	36.41
3	*5180.00	98.7 PK			1.25 H	25	62.26	36.44
4	*5180.00	89.0 AV			1.25 H	25	52.56	36.44
5	#10360.00	51.9 PK	68.3	-16.5	1.08 H	275	5.95	45.90
6	15540.00	54.0 PK	74.0	-20.0	1.24 H	283	8.36	45.61
7	15540.00	41.8 AV	54.0	-12.3	1.24 H	283	-3.86	45.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.3 PK	74.0	-6.7	1.07 V	74	30.88	36.41
2	5150.00	51.1 AV	54.0	-2.9	1.07 V	74	14.72	36.41
3	*5180.00	113.9 PK			1.07 V	71	77.46	36.44
4	*5180.00	103.0 AV			1.07 V	71	66.56	36.44
5	#10360.00	52.5 PK	68.3	-15.8	1.17 V	334	6.64	45.90
6	15540.00	54.2 PK	74.0	-19.8	1.10 V	69	8.57	45.61
7	15540.00	41.8 AV	54.0	-12.2	1.10 V	69	-3.83	45.61

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “ # “: The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 68%RH 1021 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	98.9 PK			1.25 H	22	62.44	36.46
2	*5200.00	89.2 AV			1.25 H	22	52.74	36.46
3	#10400.00	51.9 PK	68.3	-16.4	1.11 H	286	5.93	45.97
4	15600.00	54.1 PK	74.0	-19.9	1.27 H	293	8.50	45.58
5	15600.00	41.8 AV	54.0	-12.2	1.27 H	293	-3.79	45.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	111.2 PK			1.09 V	219	74.74	36.46
2	*5200.00	101.4 AV			1.09 V	219	64.94	36.46
3	#10400.00	52.8 PK	68.3	-15.5	1.19 V	341	6.81	45.97
4	15600.00	54.3 PK	74.0	-19.7	1.15 V	78	8.68	45.58
5	15600.00	41.8 AV	54.0	-12.2	1.15 V	78	-3.75	45.58

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 68%RH 1021 hPa	TESTED BY	Wen Yu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	98.7 PK			1.25 H	28	62.20	36.50
2	*5240.00	89.0 AV			1.25 H	28	52.50	36.50
3	5350.00	51.2 PK	74.0	-22.8	1.25 H	28	14.56	36.61
4	5350.00	38.6 AV	54.0	-15.4	1.25 H	28	1.96	36.61
5	#10480.00	51.9 PK	68.3	-16.4	1.09 H	261	5.81	46.11
6	15720.00	54.2 PK	74.0	-19.8	1.28 H	288	8.66	45.52
7	15720.00	41.9 AV	54.0	-12.1	1.28 H	288	-3.66	45.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	112.5 PK			1.07 V	60	76.00	36.50
2	*5240.00	100.2 AV			1.07 V	60	63.70	36.50
3	5350.00	56.9 PK	74.0	-17.1	1.16 V	116	20.33	36.61
4	5350.00	44.1 AV	54.0	-9.9	1.16 V	116	7.50	36.61
5	#10480.00	52.8 PK	68.3	-15.5	1.21 V	355	6.70	46.11
6	15720.00	54.4 PK	74.0	-19.7	1.17 V	56	8.83	45.52
7	15720.00	42.0 AV	54.0	-12.0	1.17 V	56	-3.56	45.52

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



RESTRICTED BANDEDGE (802.11a MODE, CH36, HORIZONTAL)

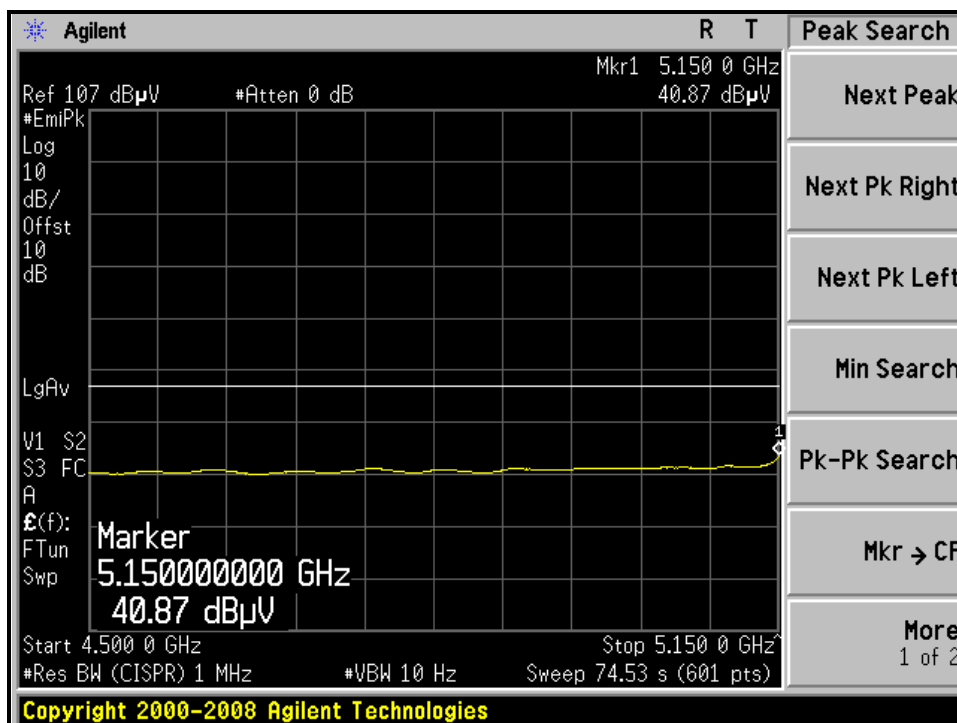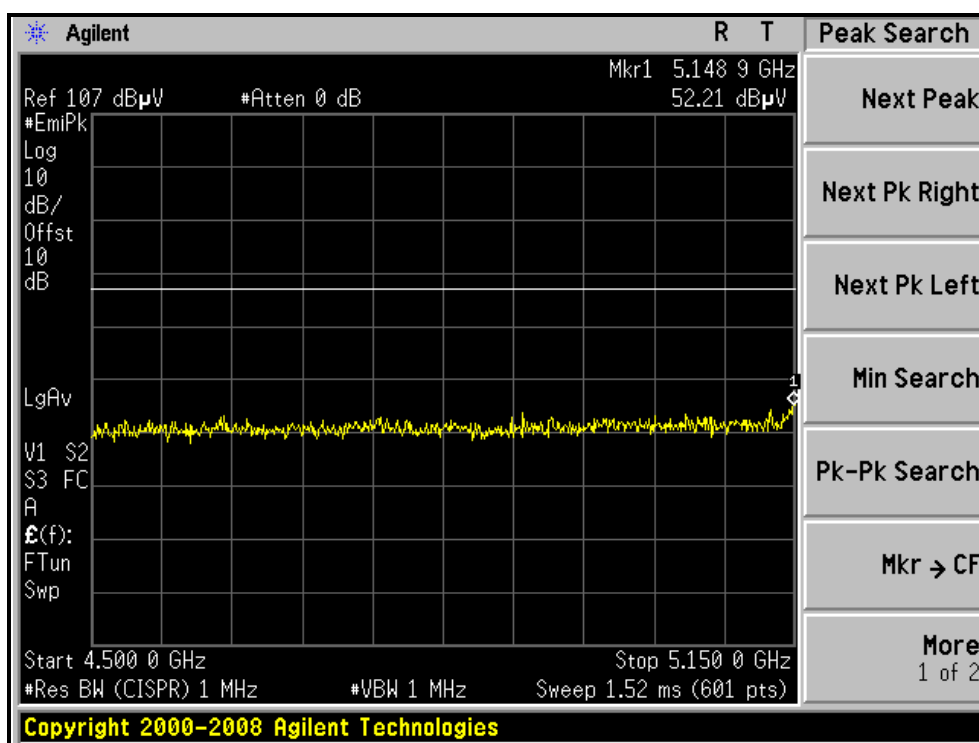



RESTRICTED BANDEDGE (802.11a MODE, CH36, VERTICAL)

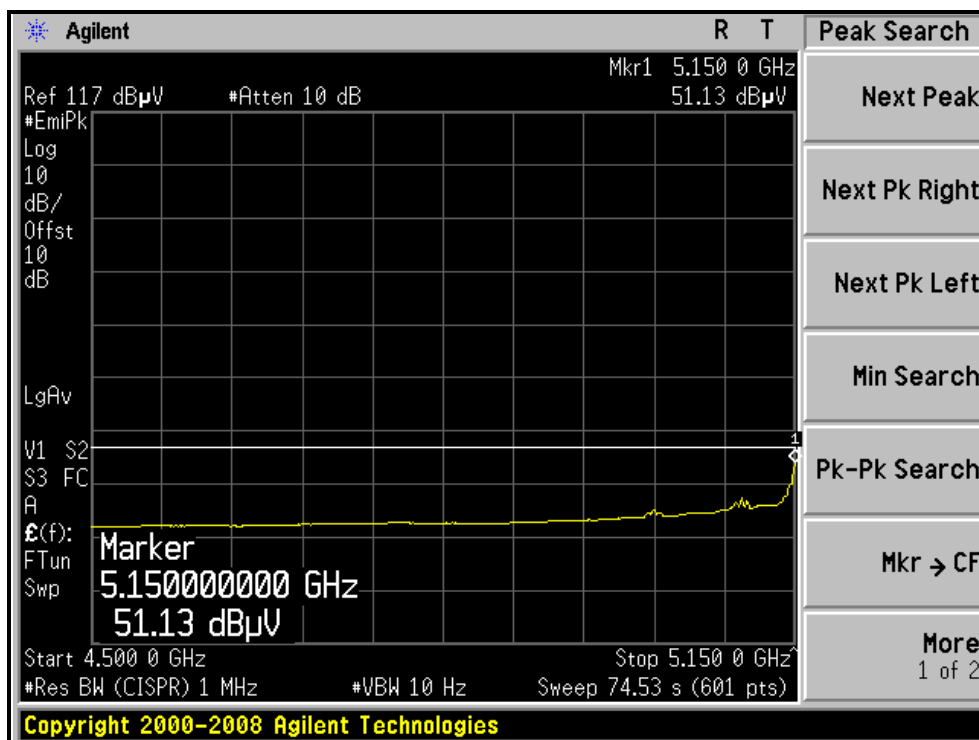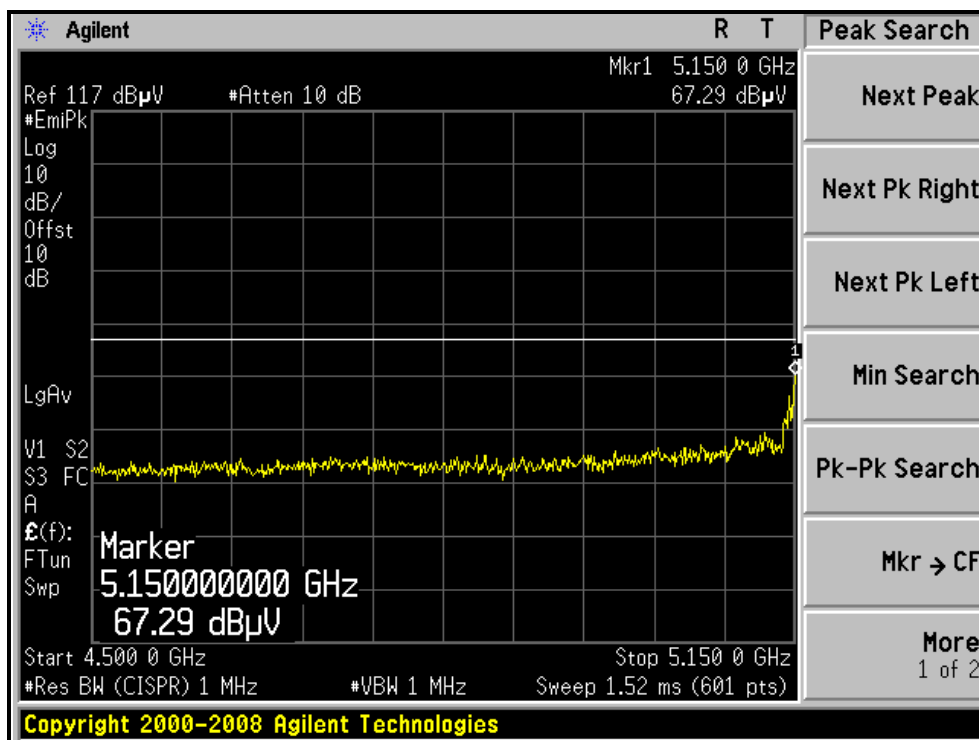

RESTRICTED BANDEDGE (802.11a MODE, CH48, HORIZONTAL)

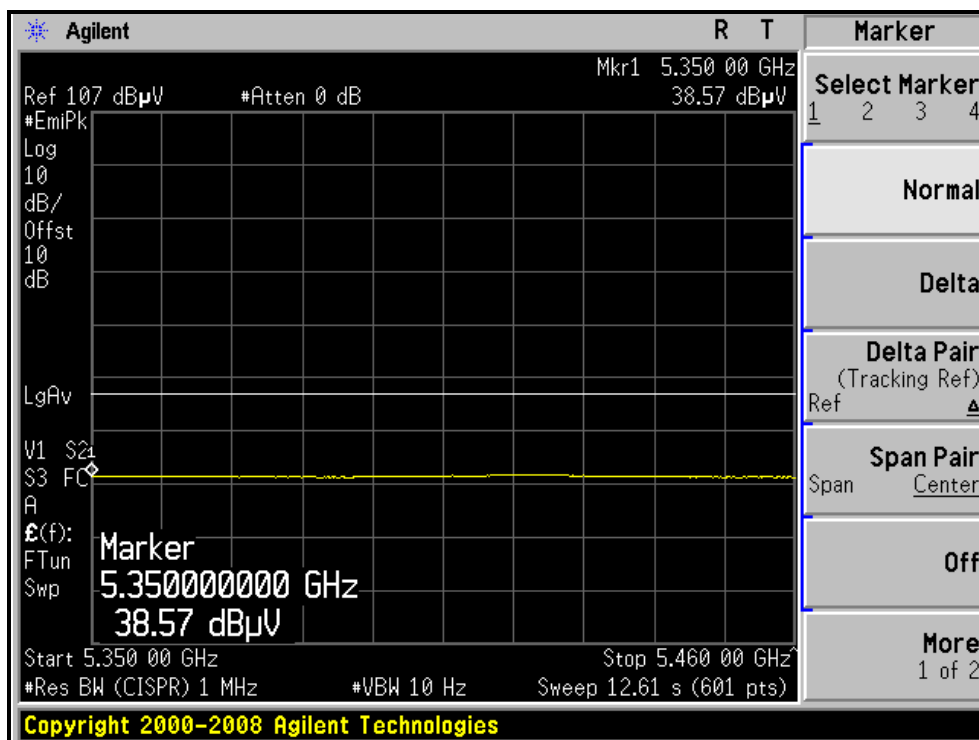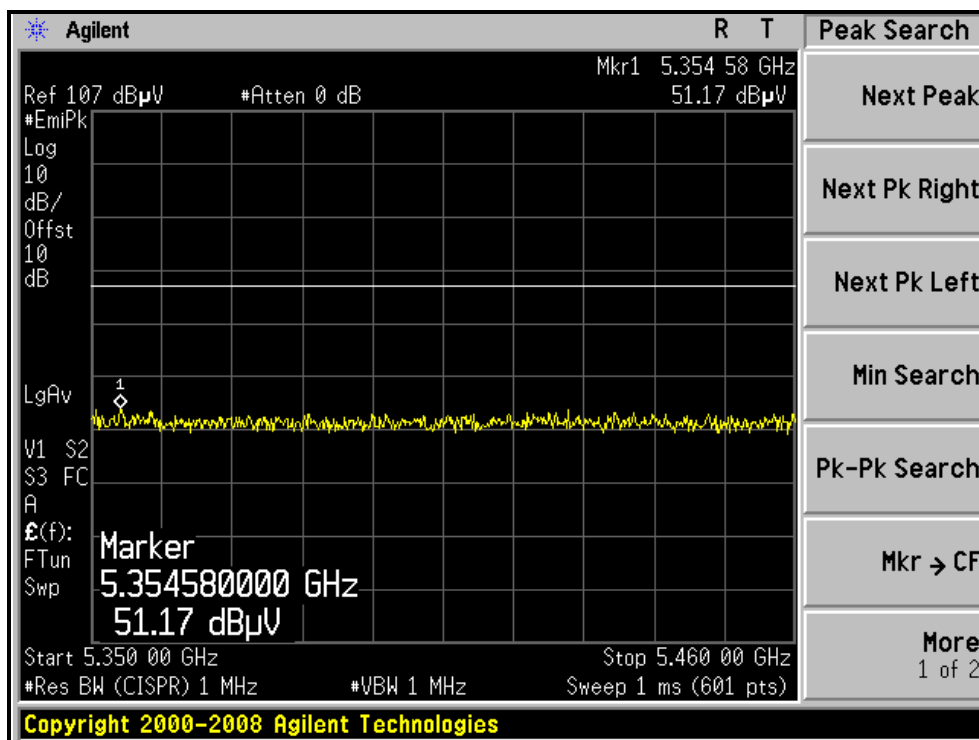

RESTRICTED BANDEDGE (802.11a MODE, CH48, VERTICAL)

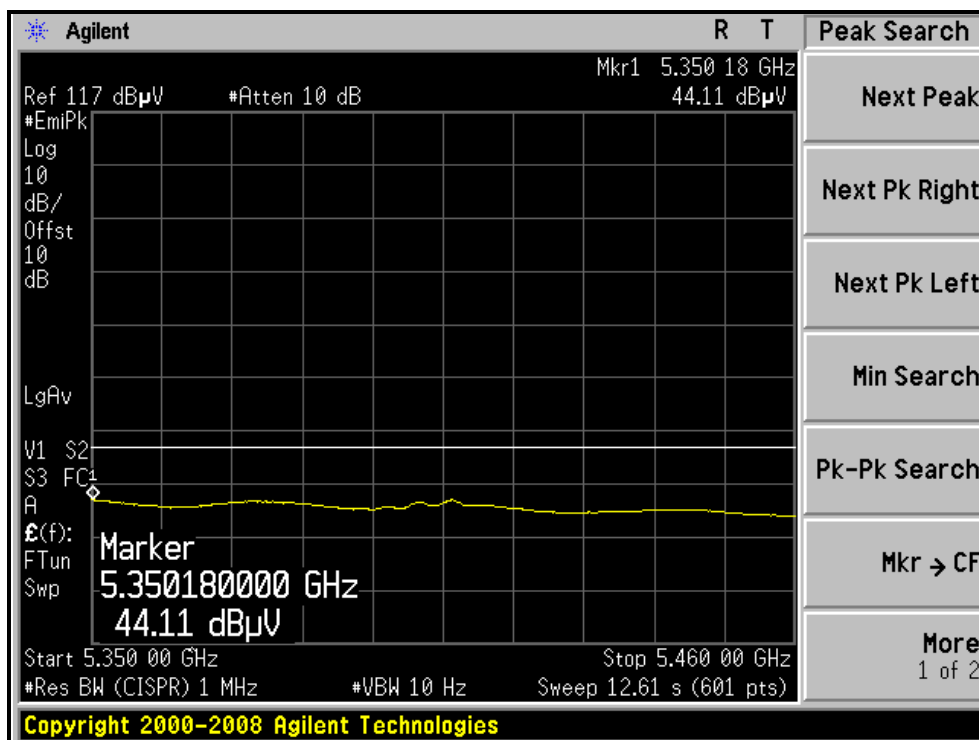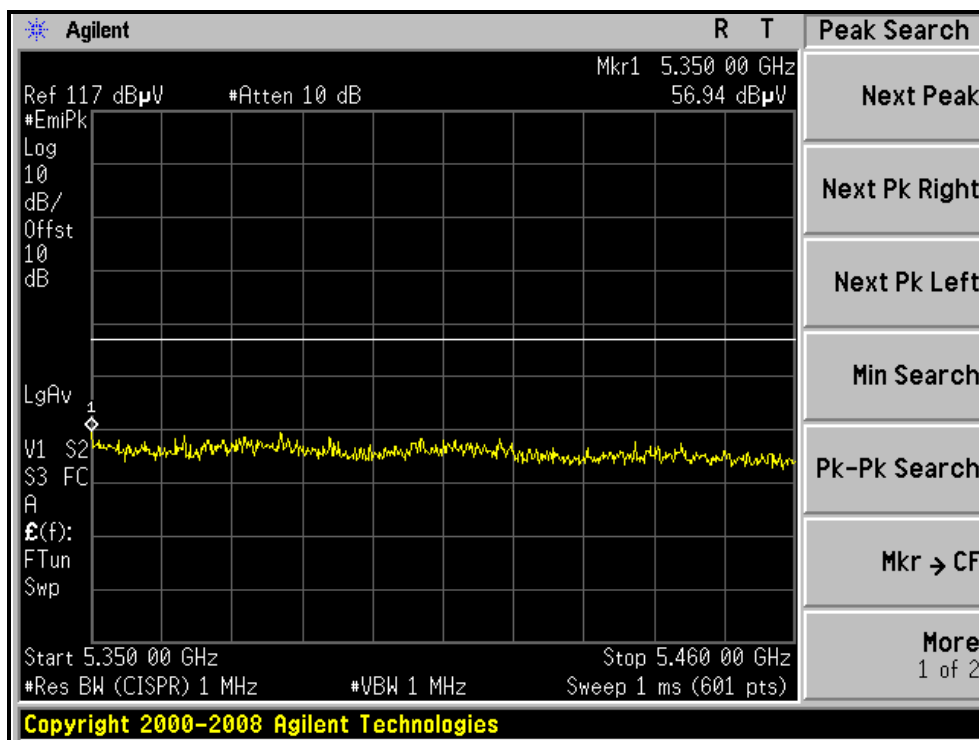

802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 36	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 68%RH 1021 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	52.4 PK	74.0	-21.6	1.26 H	20	15.95	36.41
2	5150.00	40.4 AV	54.0	-13.6	1.26 H	20	3.99	36.41
3	*5180.00	97.3 PK			1.26 H	20	60.86	36.44
4	*5180.00	85.1 AV			1.26 H	20	48.66	36.44
5	#10360.00	52.5 PK	68.3	-15.8	1.05 H	247	6.57	45.90
6	15540.00	54.3 PK	74.0	-19.7	1.29 H	274	8.65	45.61
7	15540.00	44.0 AV	54.0	-10.0	1.29 H	274	-1.65	45.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.6 PK	74.0	-5.4	1.19 V	64	32.17	36.41
2	5150.00	51.2 AV	54.0	-2.8	1.19 V	64	14.75	36.41
3	*5180.00	109.4 PK			1.19 V	64	72.96	36.44
4	*5180.00	96.0 AV			1.19 V	64	59.56	36.44
5	#10360.00	52.9 PK	68.3	-15.4	1.20 V	346	6.98	45.90
6	15540.00	54.4 PK	74.0	-19.6	1.15 V	83	8.80	45.61
7	15540.00	42.2 AV	54.0	-11.8	1.15 V	83	-3.43	45.61

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.
 6. “#”:The radiated frequency is out the restricted band.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 40	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 68%RH 1021 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	96.4 PK			1.22 H	61	59.94	36.46
2	*5200.00	84.0 AV			1.22 H	61	47.54	36.46
3	#10400.00	52.5 PK	68.3	-15.8	1.00 H	258	6.54	45.97
4	15600.00	54.3 PK	74.0	-19.7	1.31 H	265	8.75	45.58
5	15600.00	44.0 AV	54.0	-10.0	1.31 H	265	-1.61	45.58
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	110.3 PK			1.22 V	261	73.84	36.46
2	*5200.00	97.9 AV			1.22 V	261	61.44	36.46
3	#10400.00	52.9 PK	68.3	-15.4	1.22 V	348	6.96	45.97
4	15600.00	54.6 PK	74.0	-19.4	1.13 V	63	9.00	45.58
5	15600.00	42.3 AV	54.0	-11.7	1.13 V	63	-3.27	45.58

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency is out the restricted band.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 48	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 68%RH 1021 hPa	TESTED BY	Wen Yu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	97.7 PK			1.26 H	28	61.20	36.50
2	*5240.00	85.1 AV			1.26 H	28	48.60	36.50
3	5350.00	50.8 PK	74.0	-23.2	1.26 H	28	14.22	36.61
4	5350.00	38.7 AV	54.0	-15.4	1.26 H	28	2.04	36.61
5	#10480.00	52.6 PK	68.3	-15.7	1.05 H	238	6.45	46.11
6	15720.00	54.5 PK	74.0	-19.5	1.35 H	271	8.96	45.52
7	15720.00	44.1 AV	54.0	-9.9	1.35 H	271	-1.46	45.52
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	109.2 PK			1.16 V	146	72.70	36.50
2	*5240.00	95.4 AV			1.16 V	146	58.90	36.50
3	5350.00	55.3 PK	74.0	-18.7	1.16 V	93	18.68	36.61
4	5350.00	43.4 AV	54.0	-10.6	1.16 V	93	6.80	36.61
5	#10480.00	52.9 PK	68.3	-15.4	1.24 V	345	6.78	46.11
6	15720.00	54.6 PK	74.0	-19.4	1.17 V	65	9.11	45.52
7	15720.00	42.4 AV	54.0	-11.6	1.17 V	65	-3.10	45.52

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH36, HORIZONTAL)

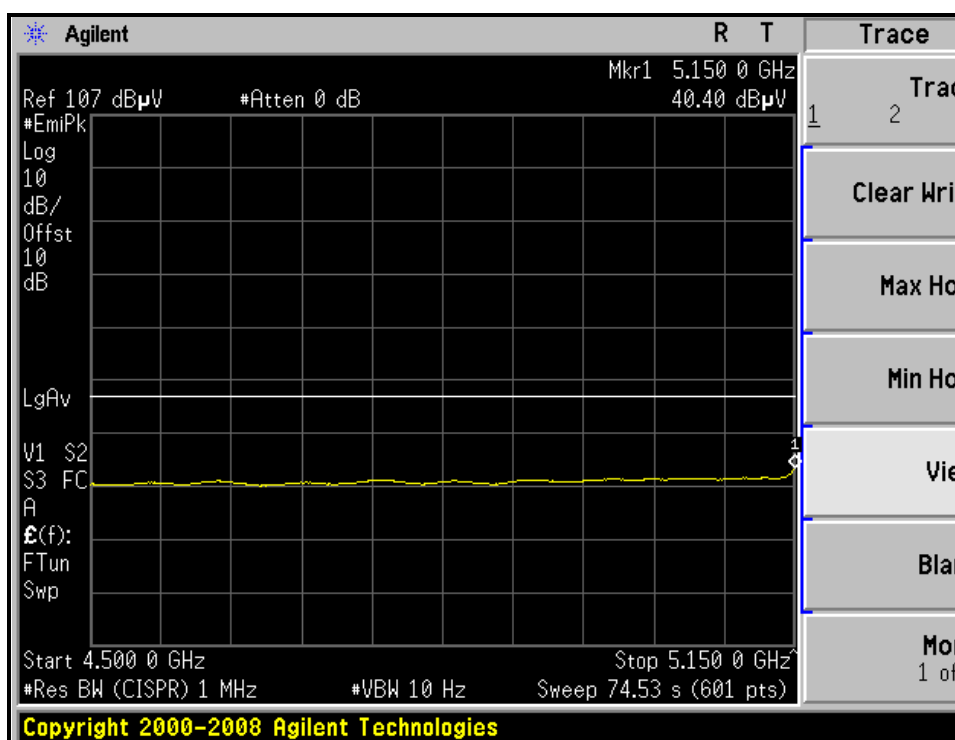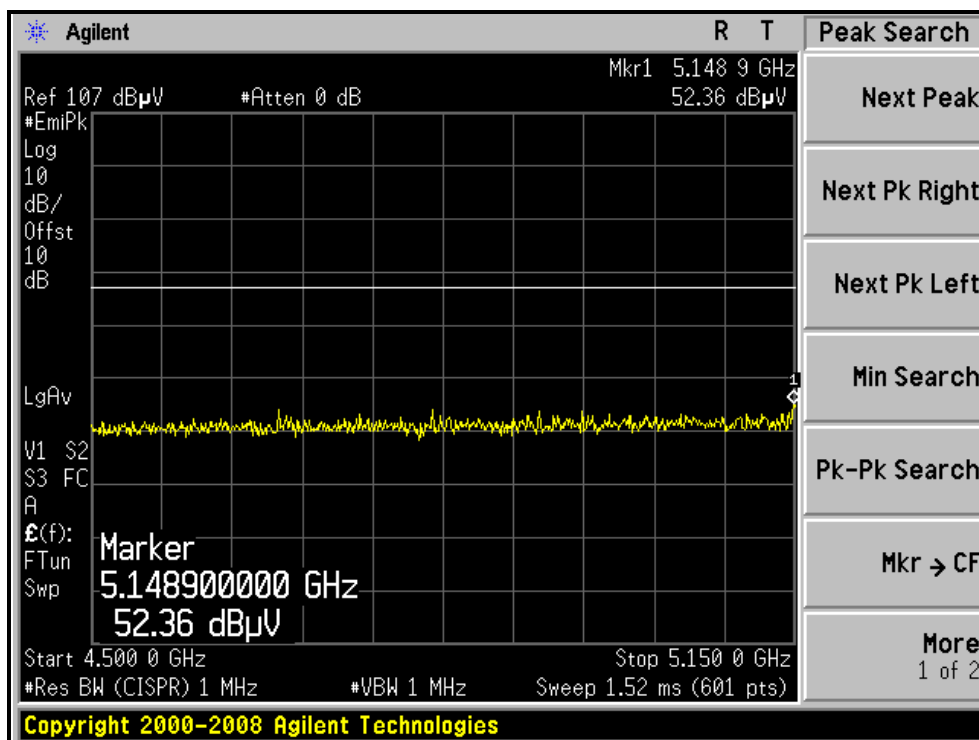



RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH36, VERTICAL)

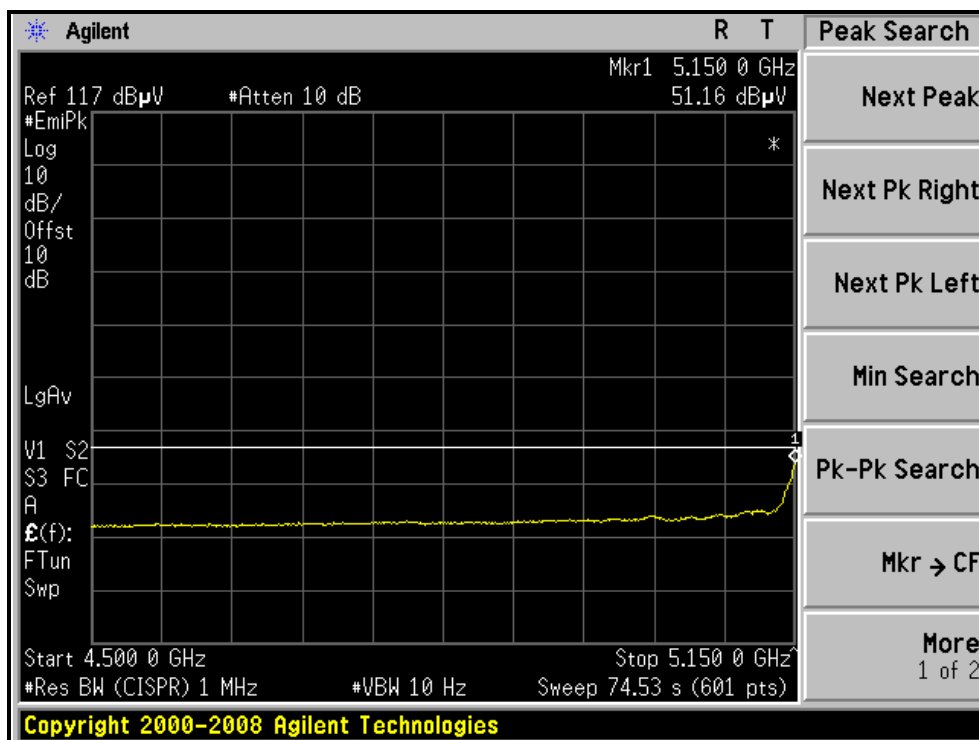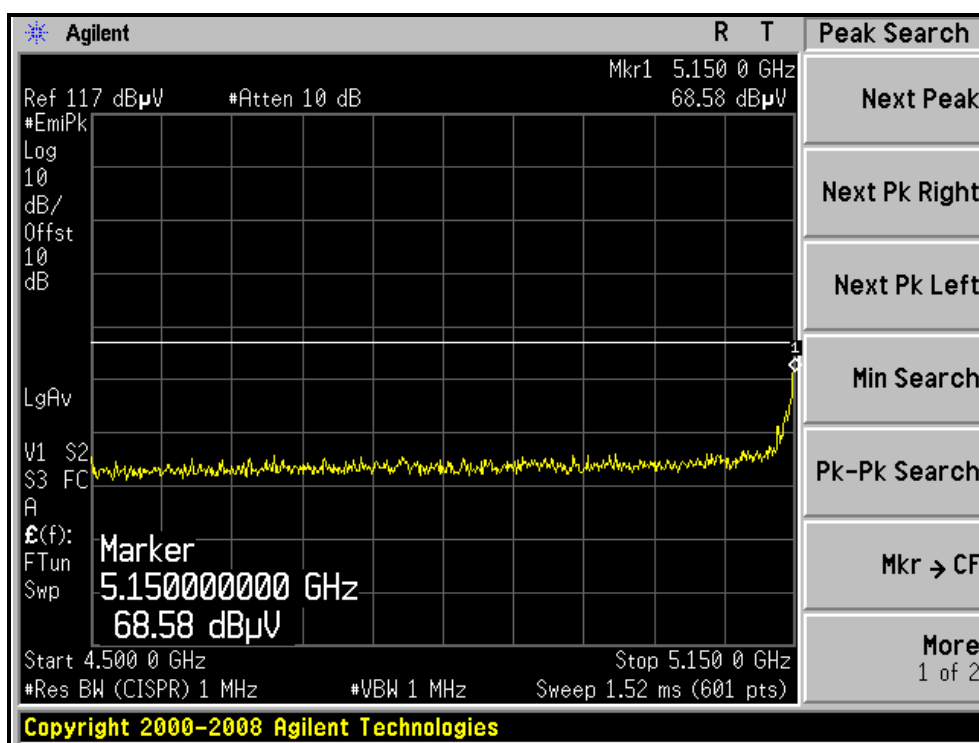

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH48, HORIZONTAL)

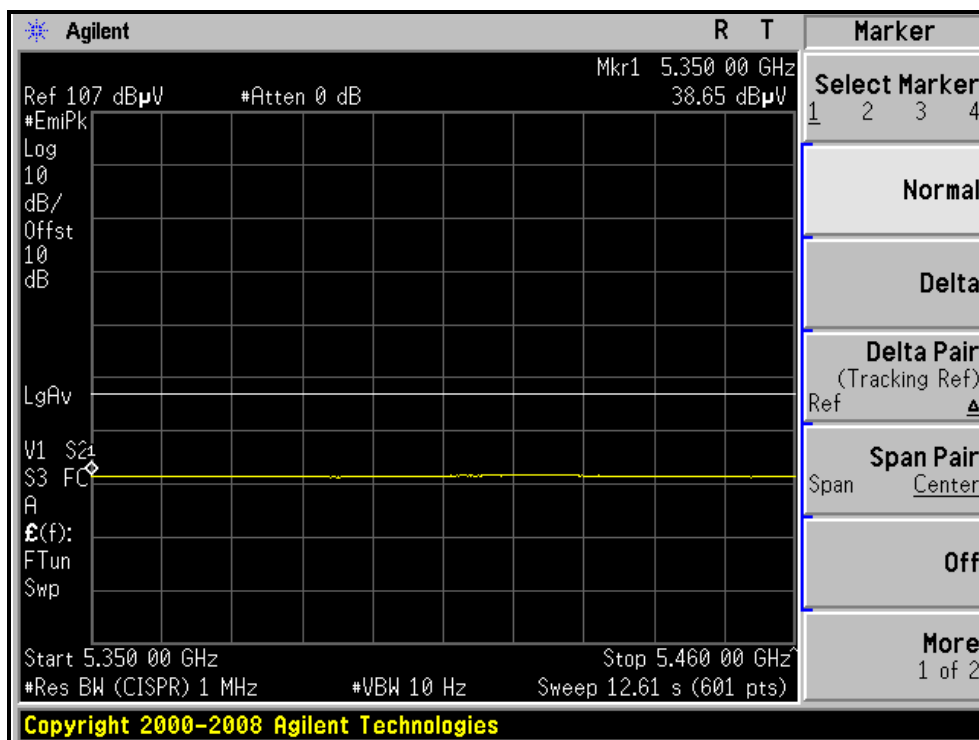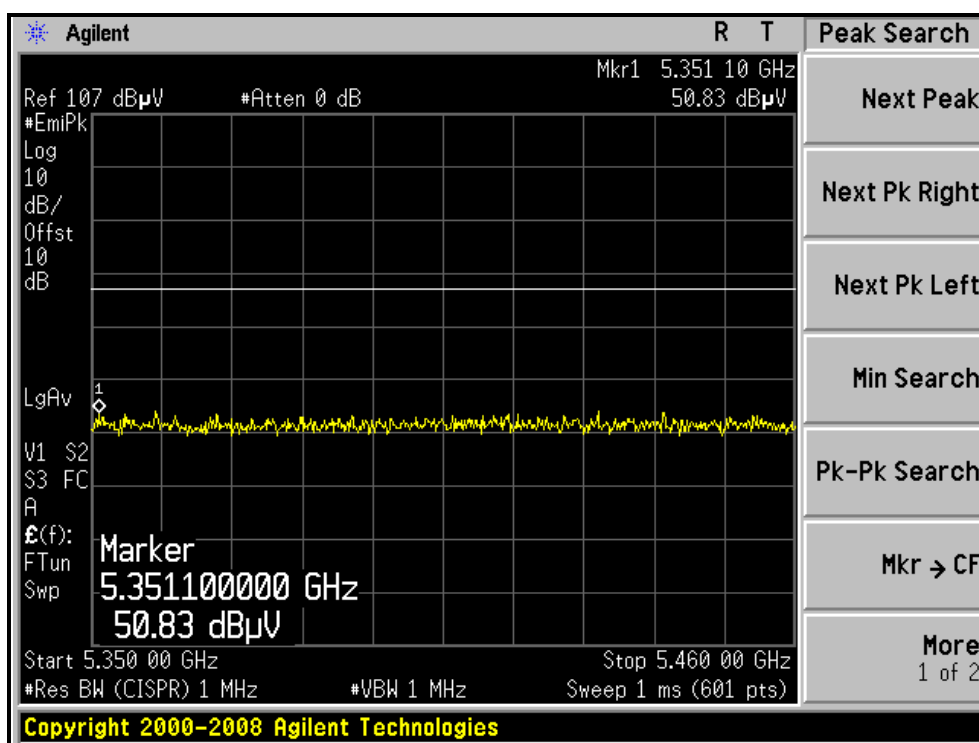

RESTRICTED BANDEDGE (802.11n (20MHz) MODE,CH48, VERTICAL)

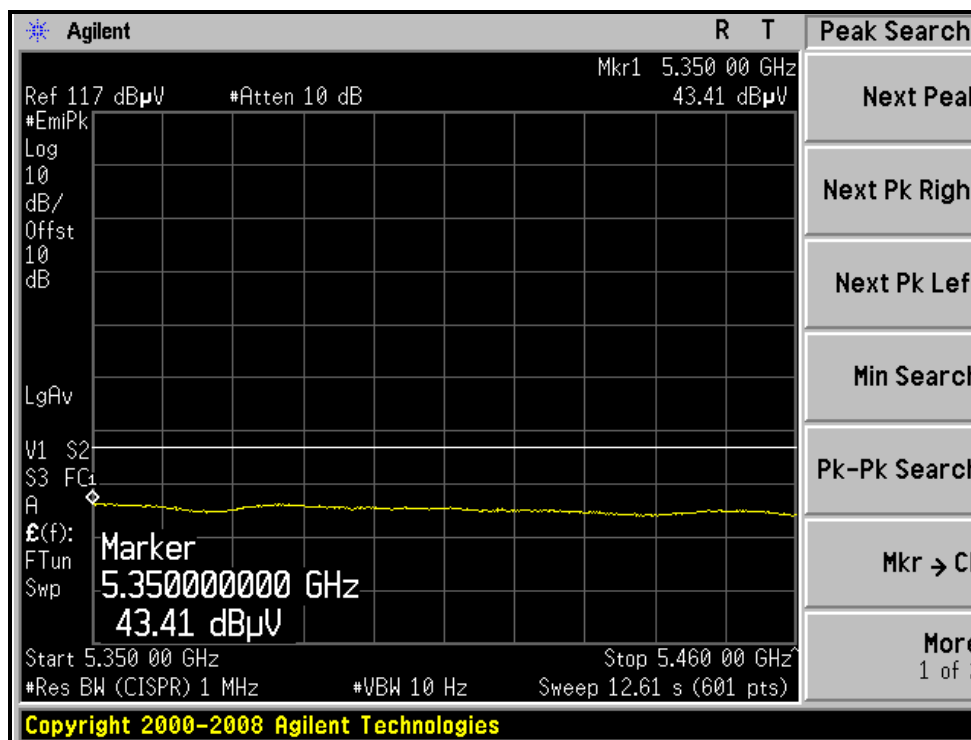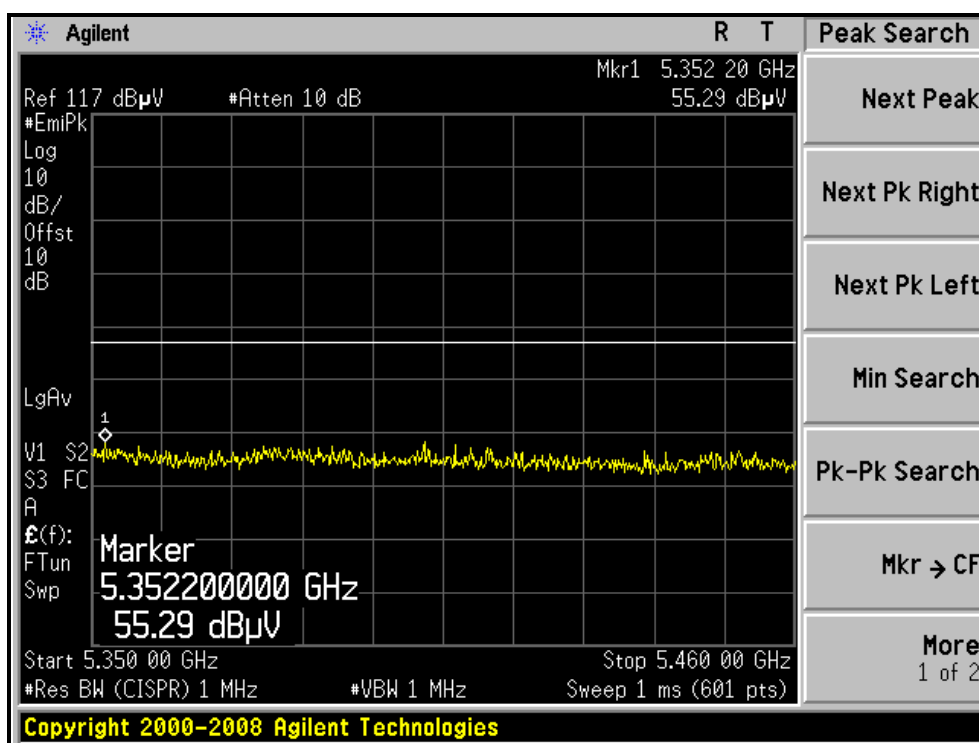



A D T

802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 38	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 68%RH 1021 hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	52.5 PK	74.0	-21.5	1.25 H	39	16.08	36.41
2	5150.00	39.3 AV	54.0	-14.7	1.25 H	39	2.93	36.41
3	*5190.00	90.9 PK			1.25 H	39	54.45	36.45
4	*5190.00	76.6 AV			1.25 H	39	40.15	36.45
5	#10380.00	52.7 PK	68.3	-15.6	1.00 H	209	6.76	45.93
6	15570.00	54.5 PK	74.0	-19.5	1.40 H	258	8.87	45.59
7	15570.00	44.0 AV	54.0	-10.0	1.40 H	258	-1.57	45.59
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.8 PK	74.0	-6.3	1.30 V	110	31.34	36.41
2	5150.00	53.1 AV	54.0	-0.9	1.30 V	110	16.65	36.41
3	*5190.00	105.5 PK			1.15 V	78	69.05	36.45
4	*5190.00	90.8 AV			1.15 V	78	54.35	36.45
5	#10380.00	53.1 PK	68.3	-15.2	1.30 V	315	7.18	45.93
6	15570.00	54.6 PK	74.0	-19.4	1.19 V	78	9.02	45.59
7	15570.00	42.4 AV	54.0	-11.6	1.19 V	78	-3.19	45.59

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.





A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 46	FREQUENCY RANGE	1 ~ 40GHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 68%RH 1021 hPa	TESTED BY	Wen Yu



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	94.1 PK			1.24 H	39	57.61	36.49
2	*5230.00	79.8 AV			1.24 H	39	43.31	36.49
3	5350.00	50.9 PK	74.0	-23.1	1.24 H	39	14.29	36.61
4	5350.00	38.4 AV	54.0	-15.6	1.24 H	39	1.82	36.61
5	#10460.00	52.8 PK	68.3	-15.5	1.00 H	211	6.69	46.08
6	15690.00	54.6 PK	74.0	-19.4	1.36 H	249	9.05	45.53
7	15690.00	44.2 AV	54.0	-9.8	1.36 H	249	-1.36	45.53
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	109.2 PK			1.24 V	73	72.71	36.49
2	*5230.00	94.3 AV			1.24 V	73	57.81	36.49
3	5372.73	59.3 PK	74.0	-14.7	1.25 V	58	22.65	36.63
4	5372.73	46.5 AV	54.0	-7.5	1.25 V	58	9.83	36.63
5	#10460.00	53.2 PK	68.3	-15.1	1.31 V	312	7.08	46.08
6	15690.00	54.8 PK	74.0	-19.2	1.20 V	66	9.25	45.53
7	15690.00	42.5 AV	54.0	-11.5	1.20 V	66	-2.99	45.53

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * “: Fundamental frequency.
6. “#”:The radiated frequency is out the restricted band.



RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH38, HORIZONTAL)

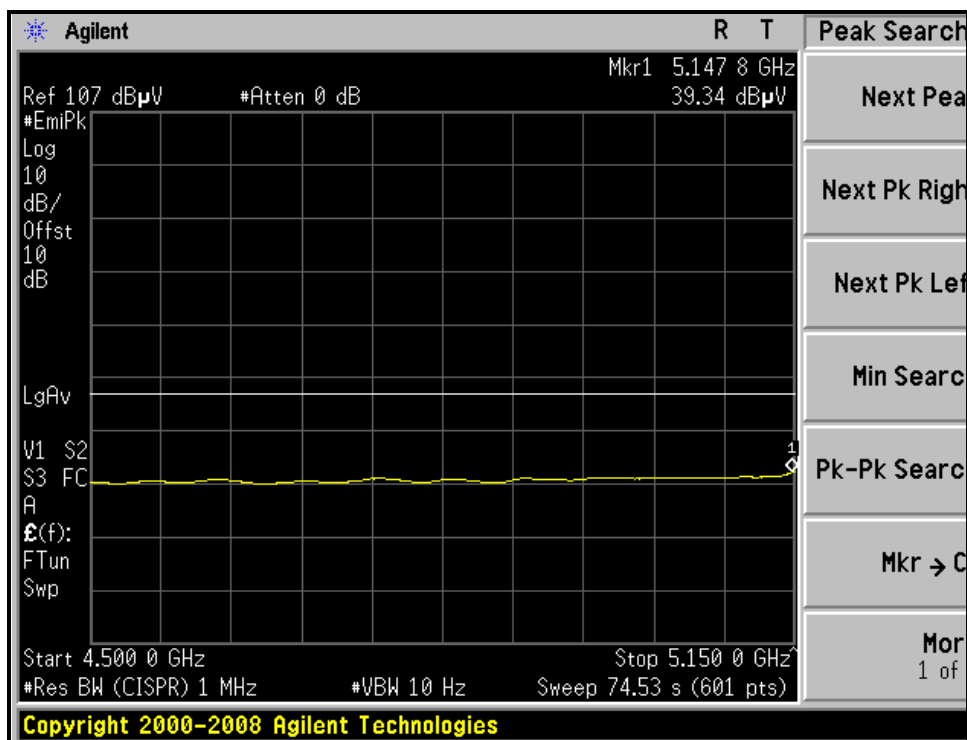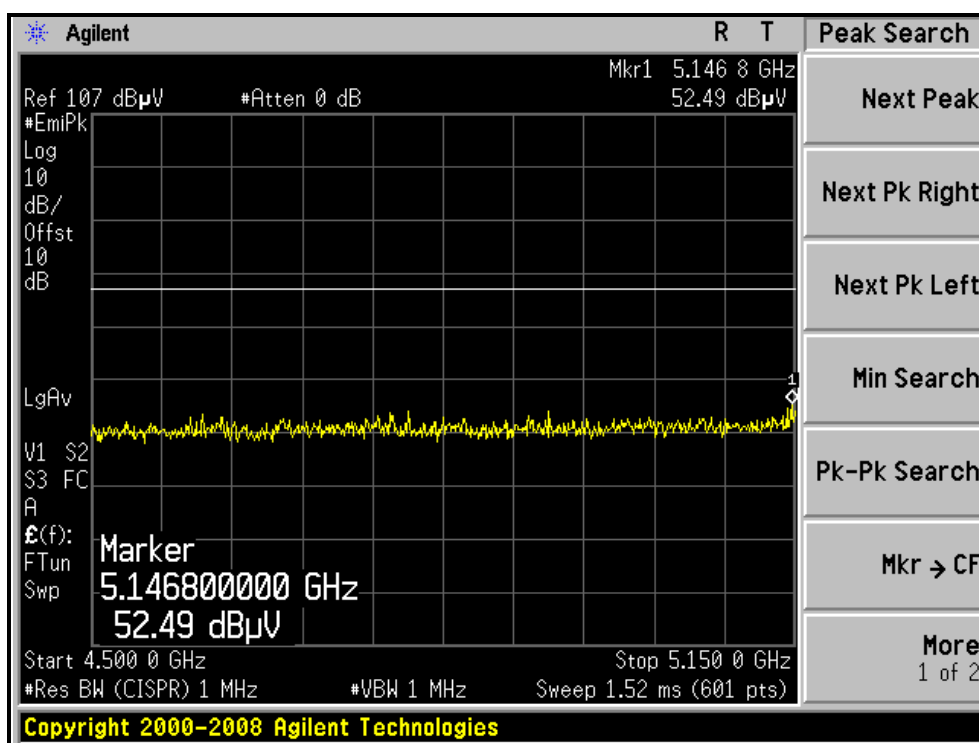



RESTRICTED BANDEDGE (802.11n (40MHz) MODE,CH38, VERTICAL)

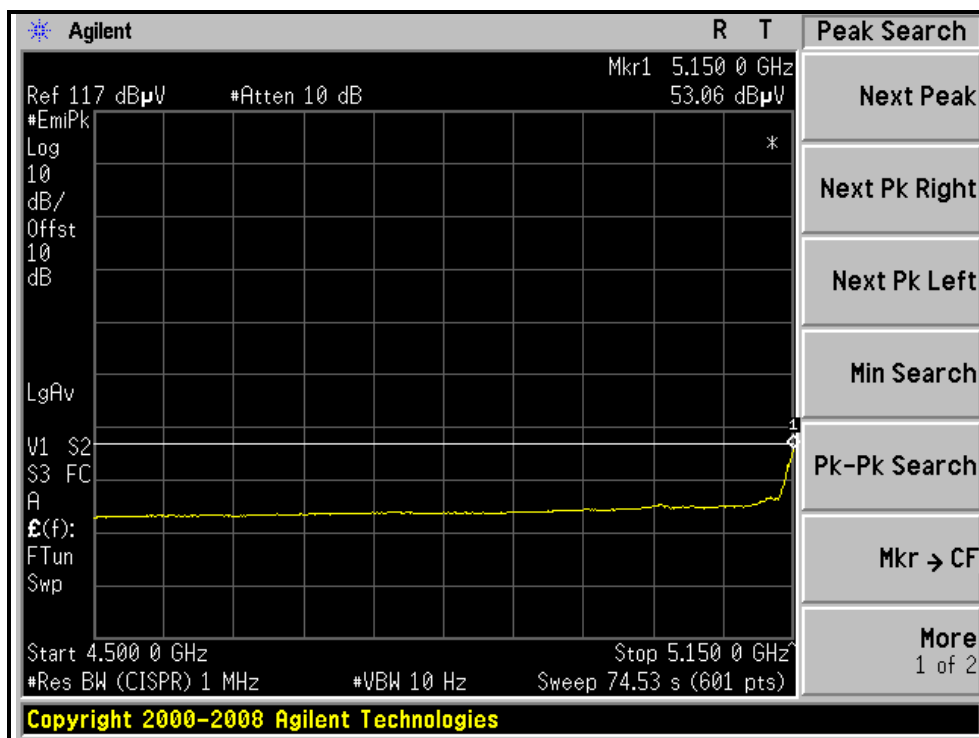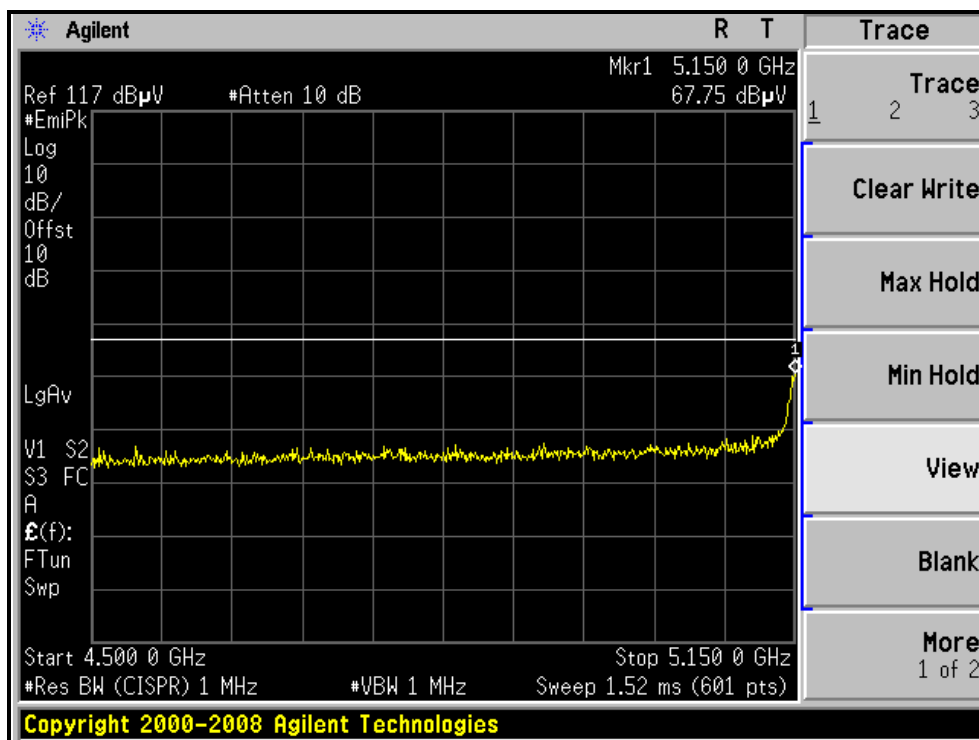

RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH46, HORIZONTAL)

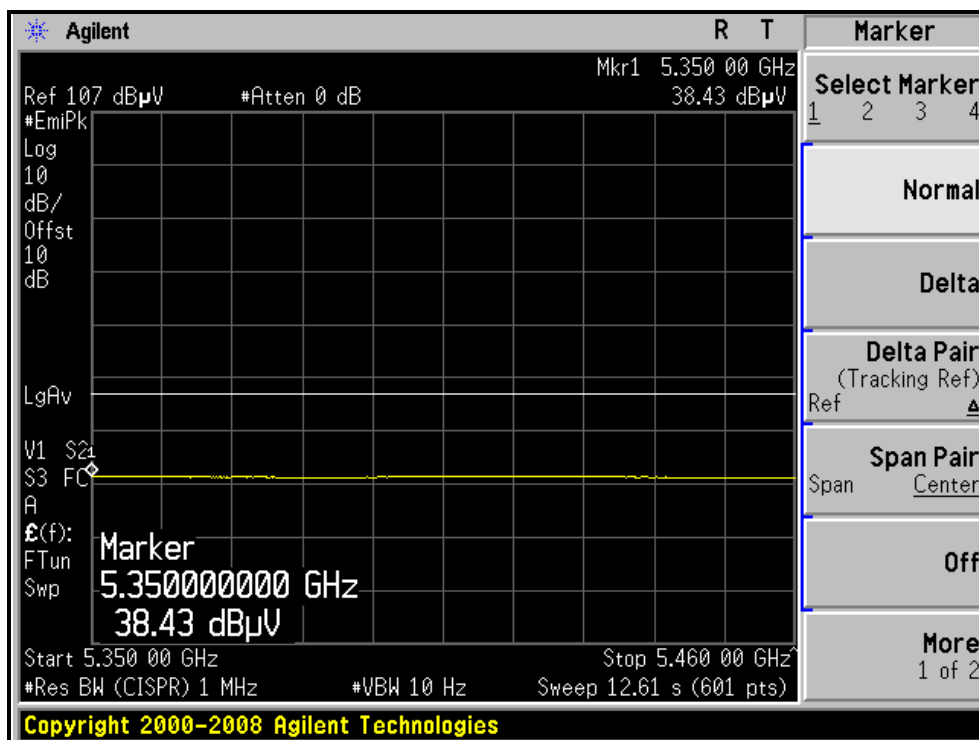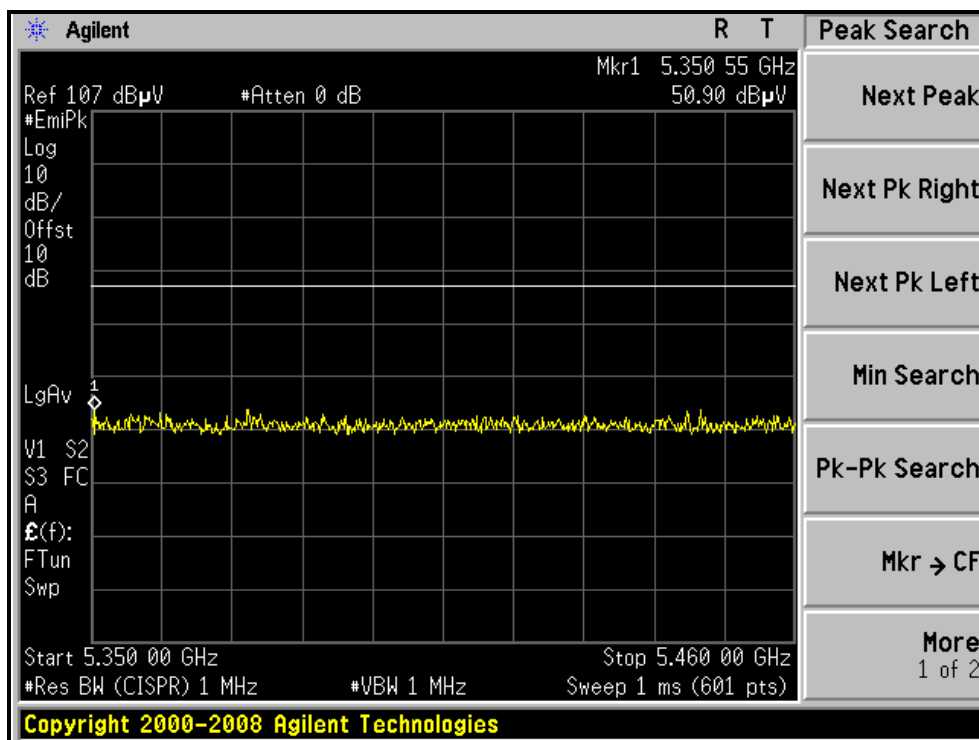

RESTRICTED BANDEDGE (802.11n (40MHz) MODE, CH46, VERTICAL)

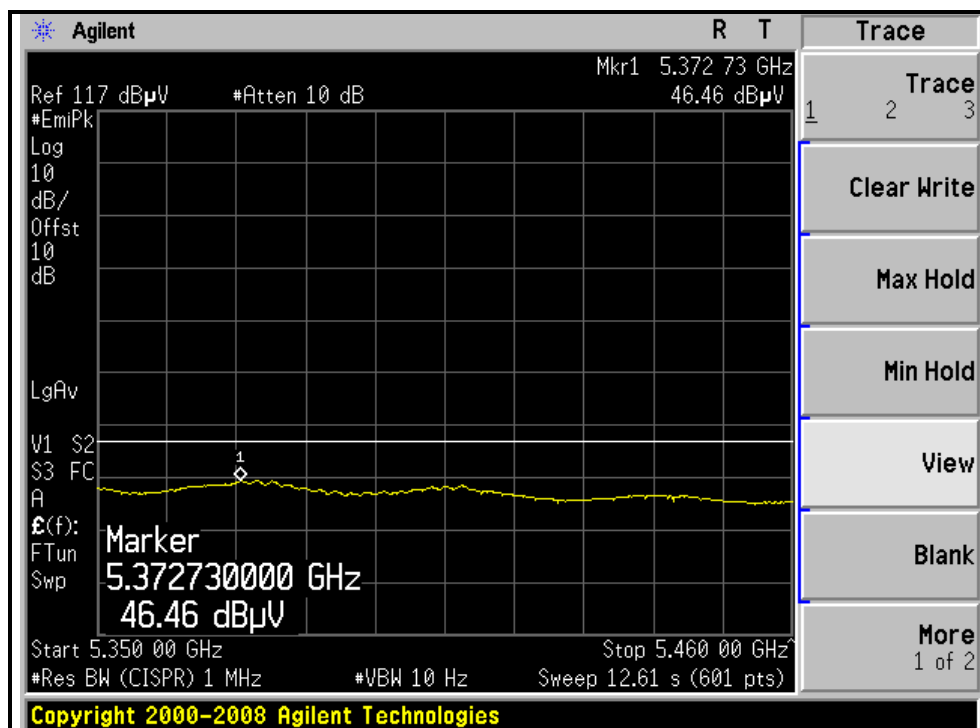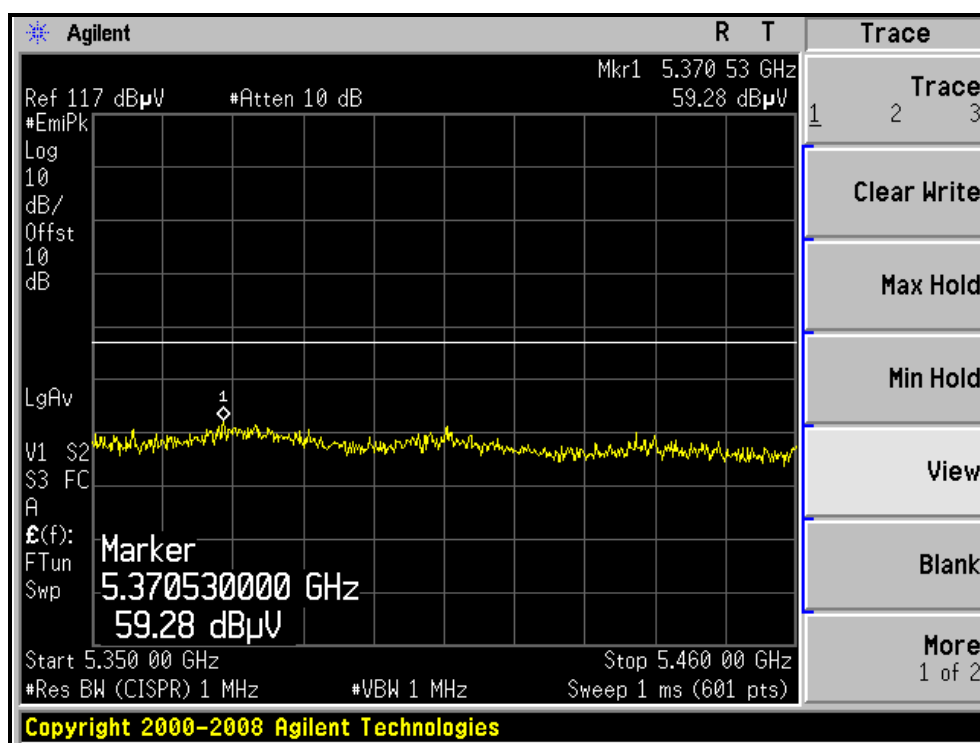



A D T

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST SPECTRUM ANALYZER	U3772	160100280	Sep. 21, 2009	Sep. 20, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 300kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

NOTE:


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


4.3.7 TEST RESULTS

802.11a OFDM MODULATION:


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (dBm)	TOTAL PEAK POWER (mW)	PEAK POWER LIMIT(dBm))	26dBc Occupied Bandwidth (MHz)	PASS/ FAIL
		Chain 0	Chain 1					
36	5180	10.4	10.4	13.4	21.9	17.0	19.25	PASS
40	5200	10.0	10.2	13.1	20.5	17.0	19.25	PASS
48	5240	9.9	10.6	13.3	21.3	17.0	19.42	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.

Peak Power Output:
For Chain (1) :CH48

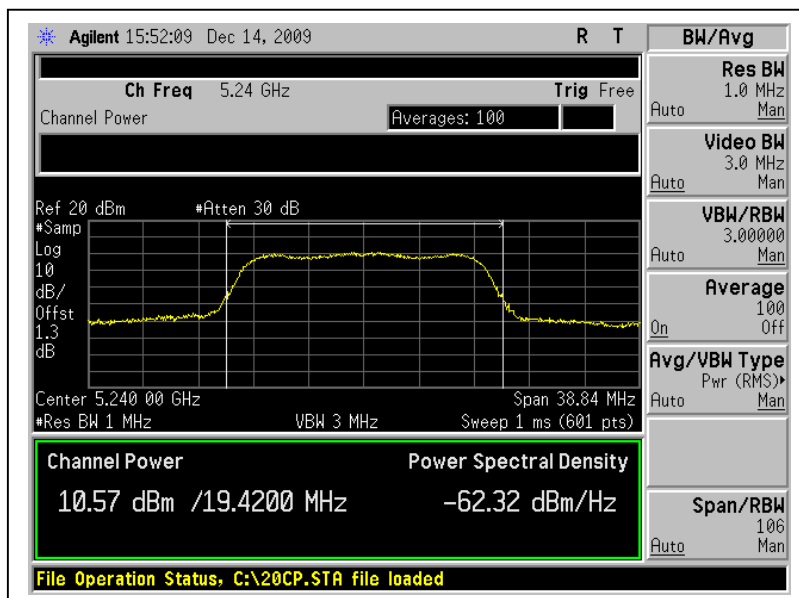

26dB Occupied Bandwidth:
CH36

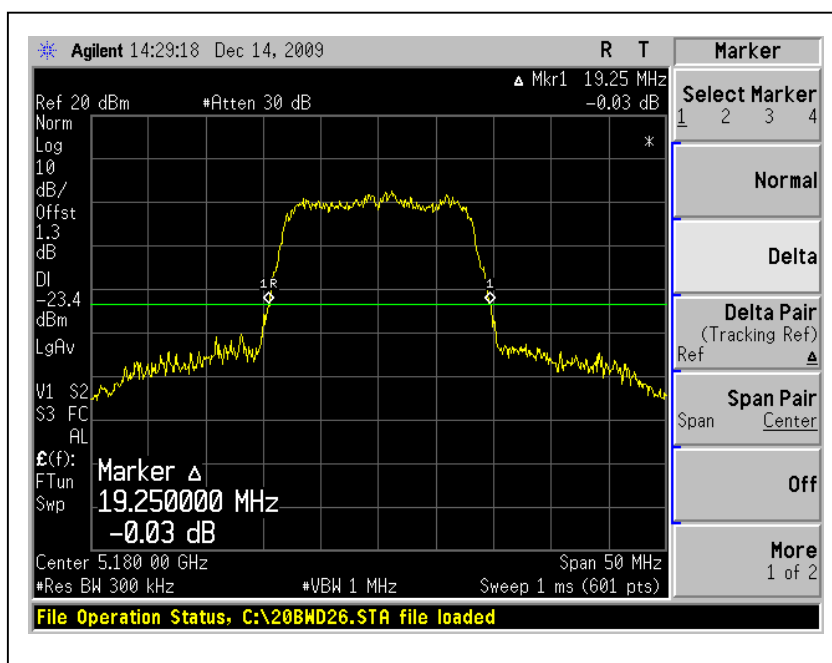


802.11n (20MHz) OFDM modulation:


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (dBm)	TOTAL PEAK POWER (mW)	PEAK POWER LIMIT(dBm))	26dBc Occupied Bandwidth (MHz)	PASS/ FAIL
		Chain 0	Chain 1					
36	5180	10.7	10.9	13.8	24.1	17.00	19.58	PASS
40	5200	10.4	10.8	13.6	23.0	17.00	19.58	PASS
48	5240	10.1	10.6	13.4	21.7	17.00	19.58	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.

Peak Power Output:
For Chain (1) :CH36

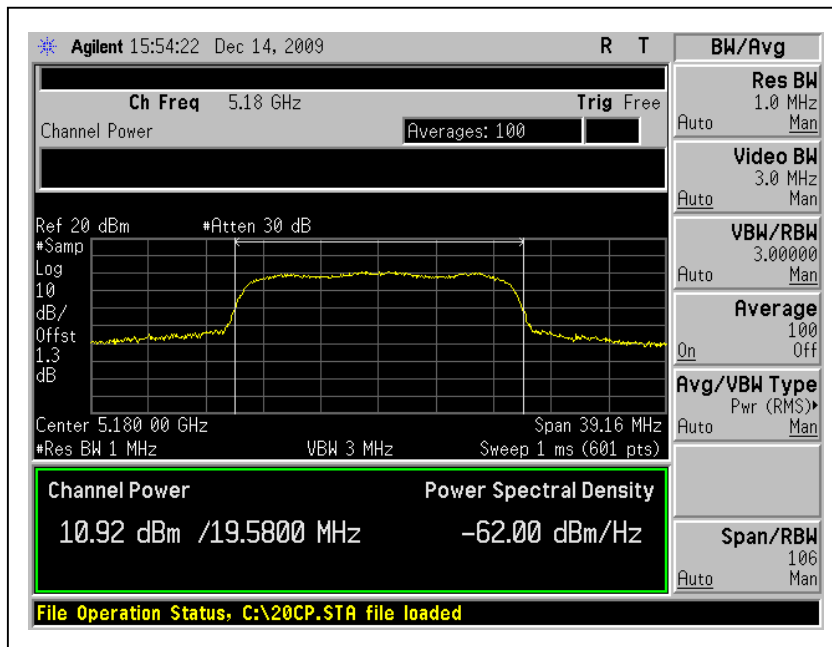

26dB Occupied Bandwidth:
CH36

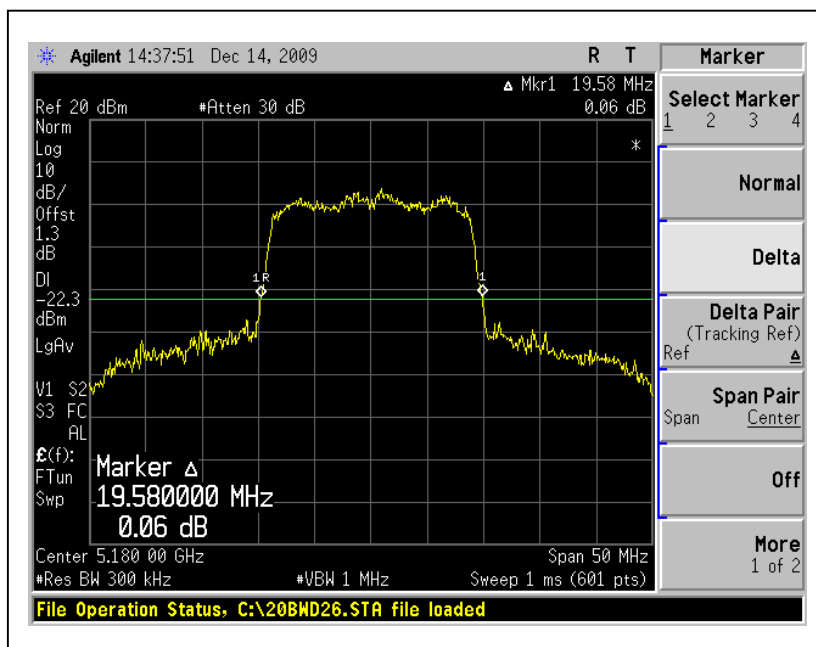


802.11n (40MHz) OFDM MODULATION:


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)		TOTAL PEAK POWER (dBm)	TOTAL PEAK POWER (mW)	PEAK POWER LIMIT (dBm)	26dBc Occupied Bandwidth (MHz)	PASS/ FAIL
		Chain 0	Chain 1					
38	5190	9.3	9.4	12.4	17.2	17.00	39	PASS
46	5230	12.2	13.1	15.7	37.0	17.00	39	PASS

NOTE: The 26dBc Occupied Bandwidth plot, please refer to the following pages.

Peak Power Output:
For Chain (1) :CH46

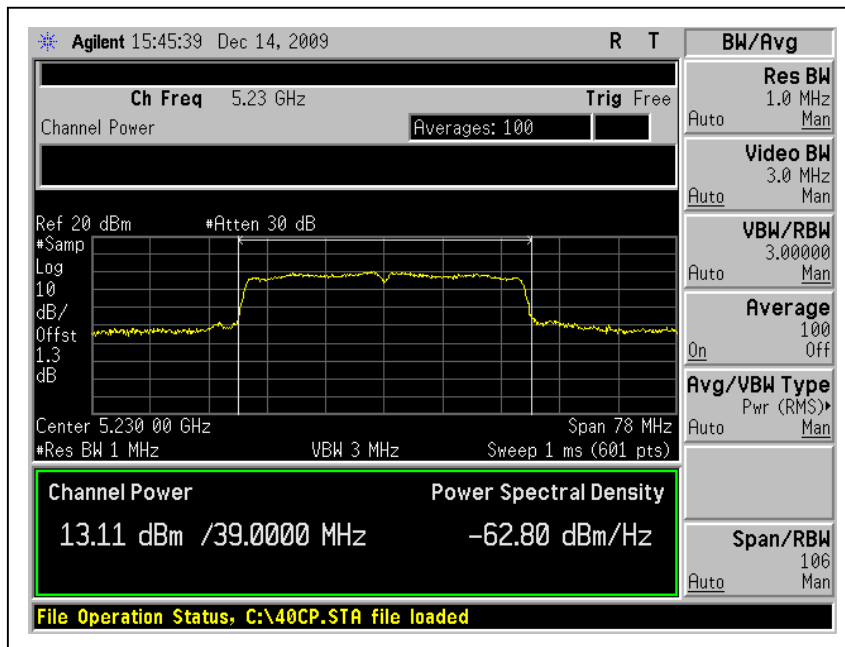

26dB Occupied Bandwidth:
CH38

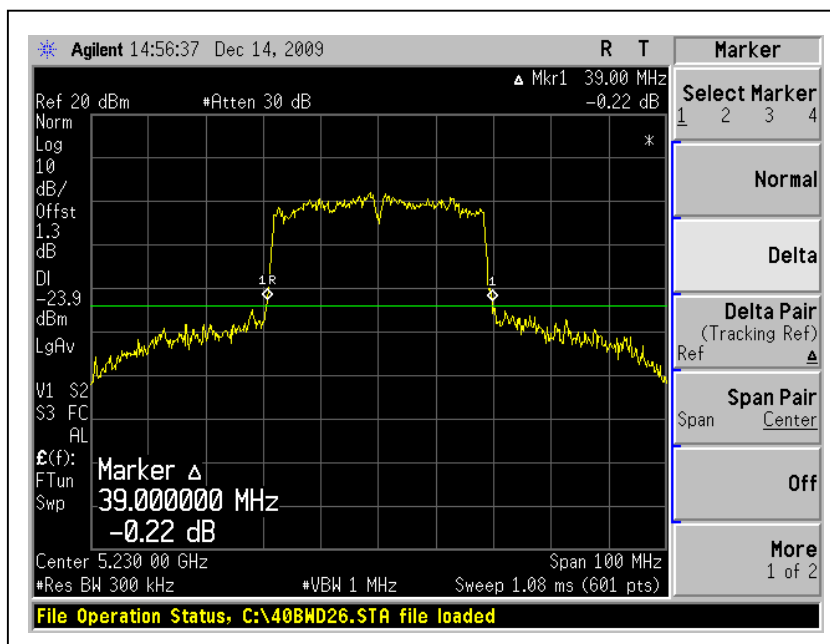



A D T

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Frequency Band	Limit
5.15 – 5.25 GHz	13dB
5.25 – 5.35 GHz	13dB
5.47 – 5.725GHz	13dB
5.725 – 5.825 GHz	13dB

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST SPECTRUM ANALYZER	U3772	160100280	Sep. 21, 2009	Sep. 20, 2010

NOTE:

- 1.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=300KHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.4.7 TEST RESULTS

802.11a OFDM modulation

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
36	5180	9.08	13	PASS
40	5200	8.57	13	PASS
48	5240	9.82	13	PASS


CH48

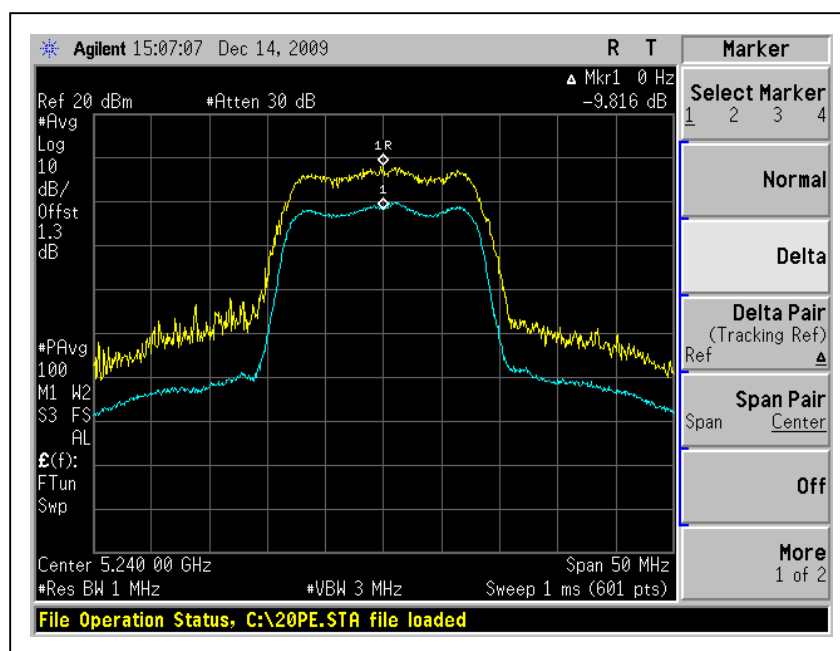

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
36	5180	9.08	13	PASS
40	5200	9.27	13	PASS
48	5240	8.43	13	PASS


CH40

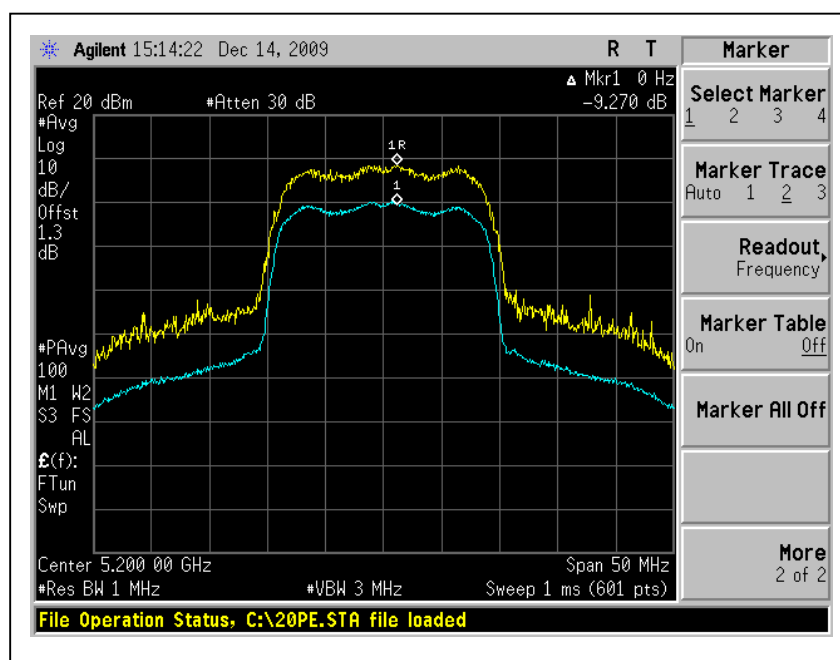

802.11n (40MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK to AVERAGE EXCURSION LIMIT (dB)	PASS/FAIL
38	5190	9.03	13	PASS
46	5230	8.27	13	PASS

CH38

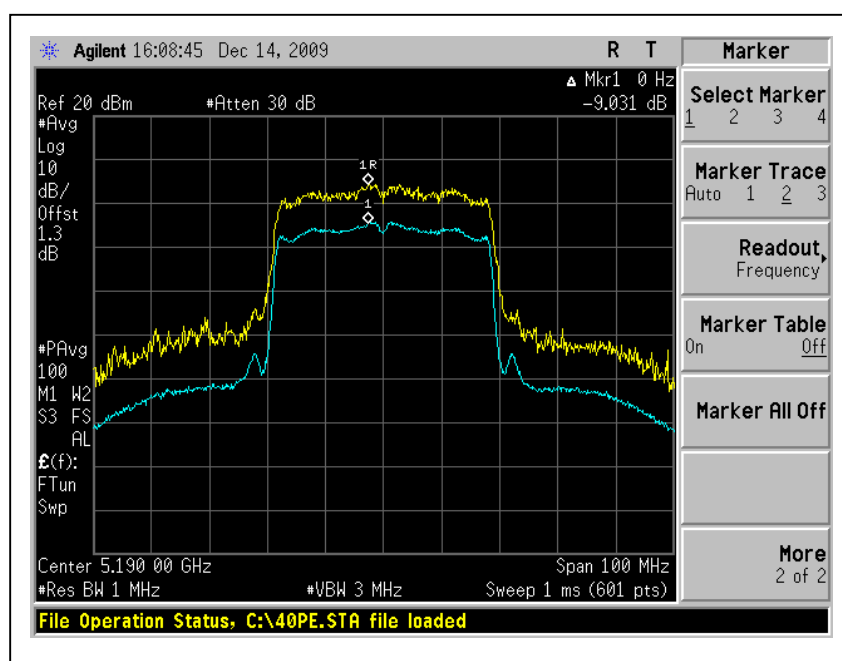

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 – 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ADVANTEST SPECTRUM ANALYZER	U3772	160100280	Sep. 21, 2009	Sep. 20, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS


Same as 4.3.6

4.5.7 TEST RESULTS

802.11a OFDM modulation

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)		TOTAL OUTPUT POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
		Chain (0)	Chain(1)			
36	5180	0.8	0.5	3.7	4	PASS
40	5200	0.4	0.4	3.4	4	PASS
48	5240	0.3	0.9	3.6	4	PASS


For Chain (1) : CH48

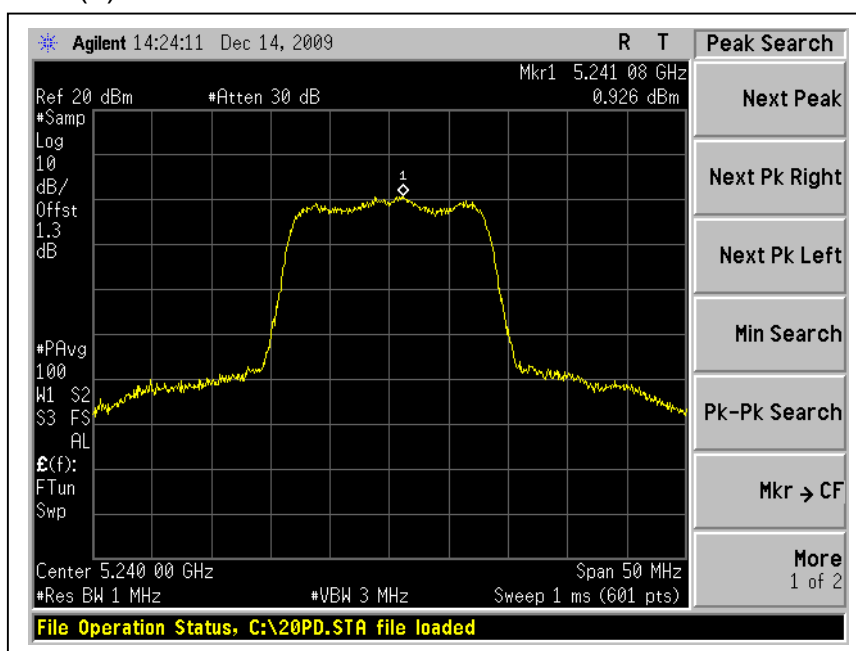

802.11n (20MHz) OFDM MODULATION:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)		TOTAL OUTPUT POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
		Chain (0)	Chain(1)			
36	5180	0.6	0.8	3.7	4	PASS
40	5200	0.2	0.5	3.4	4	PASS
48	5240	0.2	0.1	3.2	4	PASS


For Chain (1) : CH36

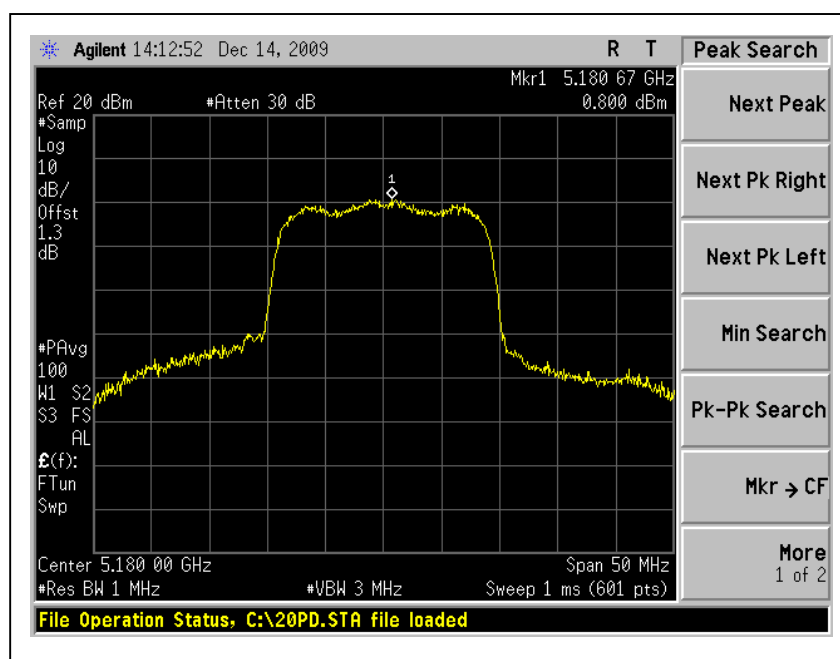

802.11n (40MHz) OFDM modulation:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)		TOTAL OUTPUT POWER DENSITY (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
		Chain (0)	Chain(1)			
38	5190	-3.5	-3.7	-0.6	4	PASS
46	5230	-0.6	0.6	3.1	4	PASS

For Chain (1) : CH46

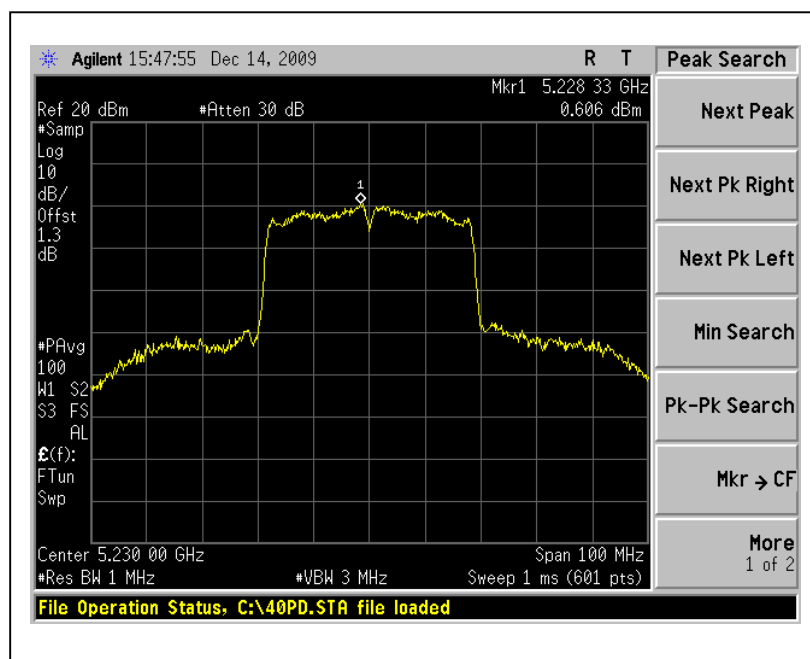

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.02\%$ of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 03, 2009	Aug. 02, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

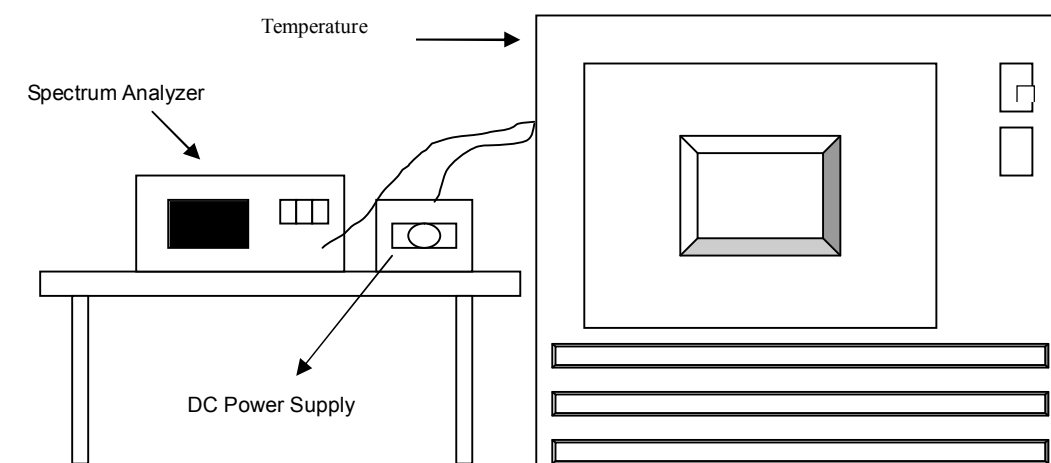

4.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.6.7 TEST RESULTS

Operating frequency: 5180MHz				Limit : $\pm 0.02\%$			
Temp. (°C)	Power supply (VAC)	2 minute		5 minute		10 minute	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	138	5180.0255	0.000492	5180.0285	0.000550	5180.0269	0.000519
	120	5180.0267	0.000515	5180.0297	0.000573	5180.0285	0.000550
	102	5180.0285	0.000550	5180.0285	0.000550	5180.0279	0.000539
40	138	5180.0344	0.000664	5180.0376	0.000726	5180.0385	0.000743
	120	5180.0356	0.000687	5180.0374	0.000722	5180.0387	0.000747
	102	5180.0675	0.001303	5180.0381	0.000736	5180.0397	0.000766
30	138	5180.032	0.000618	5180.0097	0.000187	5180.0115	0.000222
	120	5180.035	0.000676	5180.0096	0.000185	5180.0116	0.000224
	102	5180.045	0.000869	5180.0097	0.000187	5180.0121	0.000234
20	138	5179.992	0.000154	5179.9885	0.000222	5179.9855	0.000280
	120	5179.991	0.000174	5179.9888	0.000216	5179.9845	0.000299
	102	5179.9913	0.000168	5179.9881	0.000230	5179.9863	0.000264
10	138	5180.0277	0.000535	5180.0243	0.000469	5180.0257	0.000496
	120	5180.0285	0.000550	5180.0251	0.000485	5180.0268	0.000517
	102	5180.0276	0.000533	5180.0256	0.000494	5180.0277	0.000535
0	138	5180.0196	0.000378	5180.0112	0.000216	5180.0125	0.000241
	120	5180.0197	0.000380	5180.0113	0.000218	5180.0126	0.000243
	102	5180.0194	0.000375	5180.0117	0.000226	5180.0127	0.000245
-10	138	5180.0142	0.000274	5180.0096	0.000185	5180.0169	0.000326
	120	5180.0145	0.000280	5180.0099	0.000191	5180.0171	0.000330
	102	5180.0146	0.000282	5180.0097	0.000187	5180.0174	0.000336
-20	138	5180.0246	0.000475	5180.0185	0.000357	5180.0196	0.000378
	120	5180.0252	0.000486	5180.0186	0.000359	5180.0194	0.000375
	102	5180.0256	0.000494	5180.0189	0.000365	5180.0199	0.000384
-30	138	5179.9763	0.000458	5179.9975	0.000048	5179.9974	0.000050
	120	5179.9756	0.000471	5179.9976	0.000046	5179.9972	0.000054
	102	5179.9758	0.000467	5179.9978	0.000042	5179.9971	0.000056



A D T

4.7 ANTENNA PORT OUTPUT SPECTRUM PLOTS

4.7.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 03, 2009	Aug. 02, 2010

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW of spectrum analyzer to 1MHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded.

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


4.7.4 TEST RESULTS

For 5.15 to 5.35GHz band:


The spectrum plots (Peak RBW=1MHz, VBW=3MHz) are attached on the following pages.

802.11a OFDM modulation


CH 36

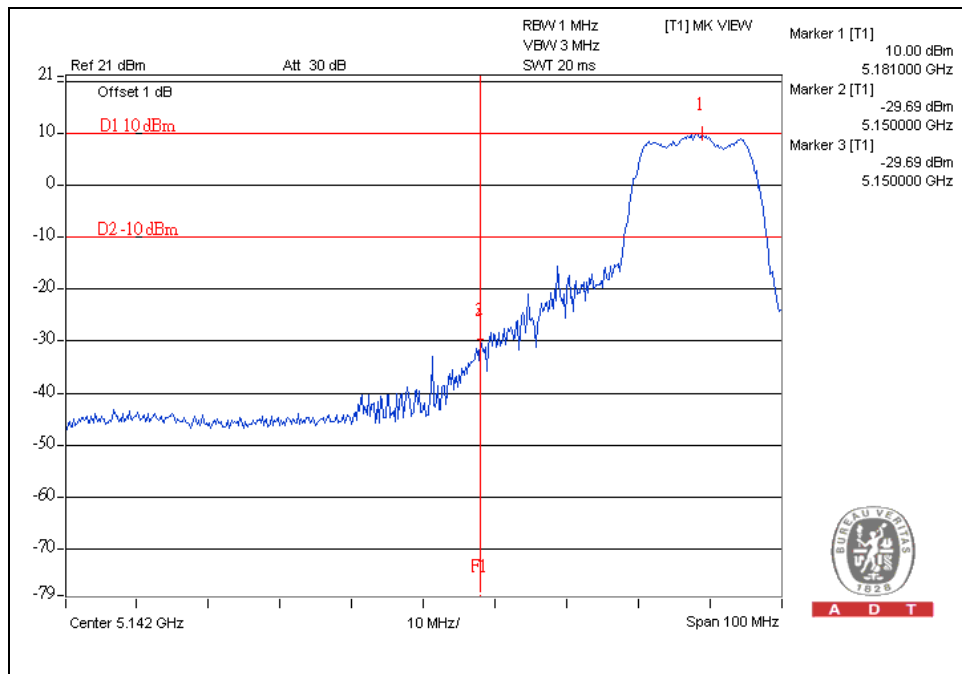

CH 48

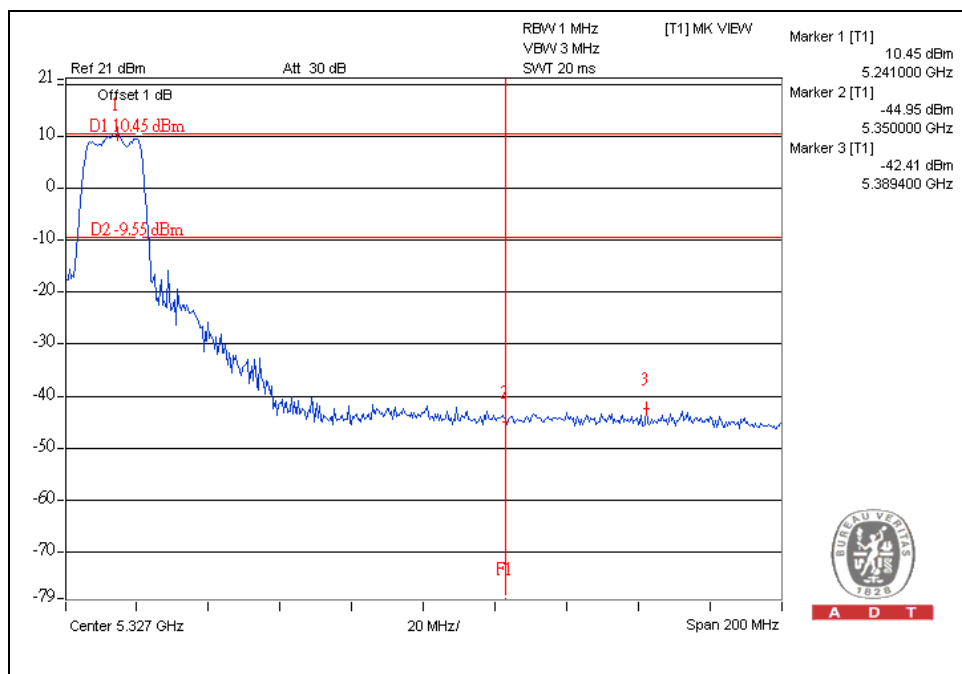


CH 36

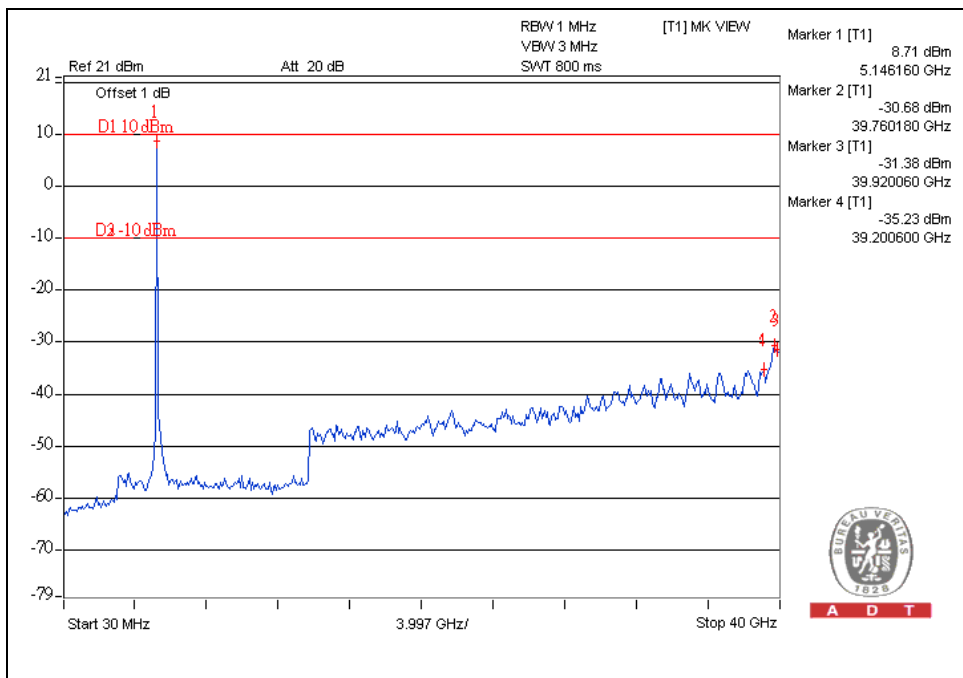

A D T


CH 48

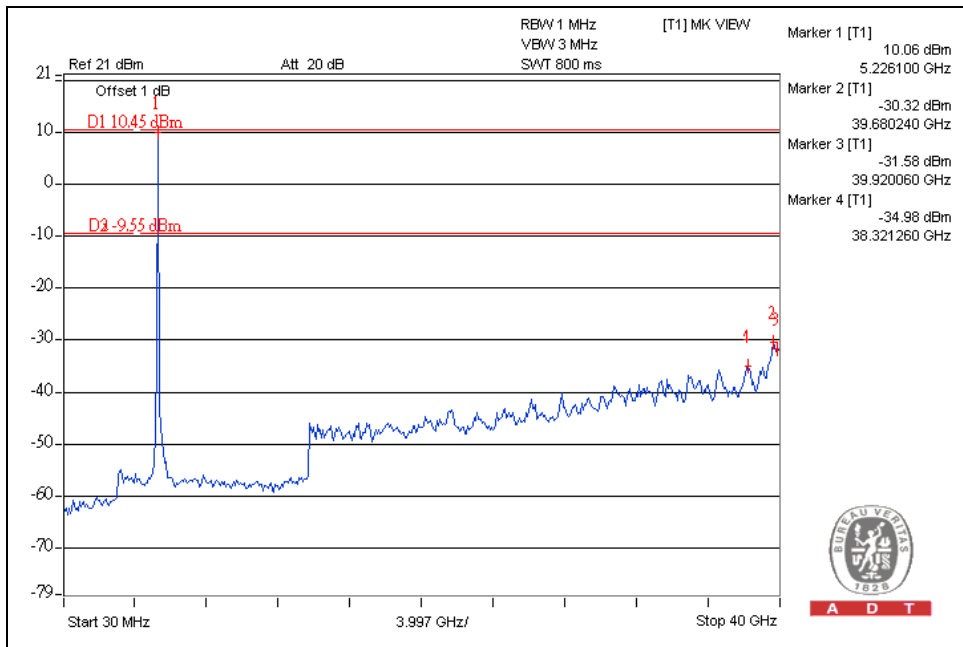


A D T

802.11n (20MHz) OFDM MODULATION:


CH36

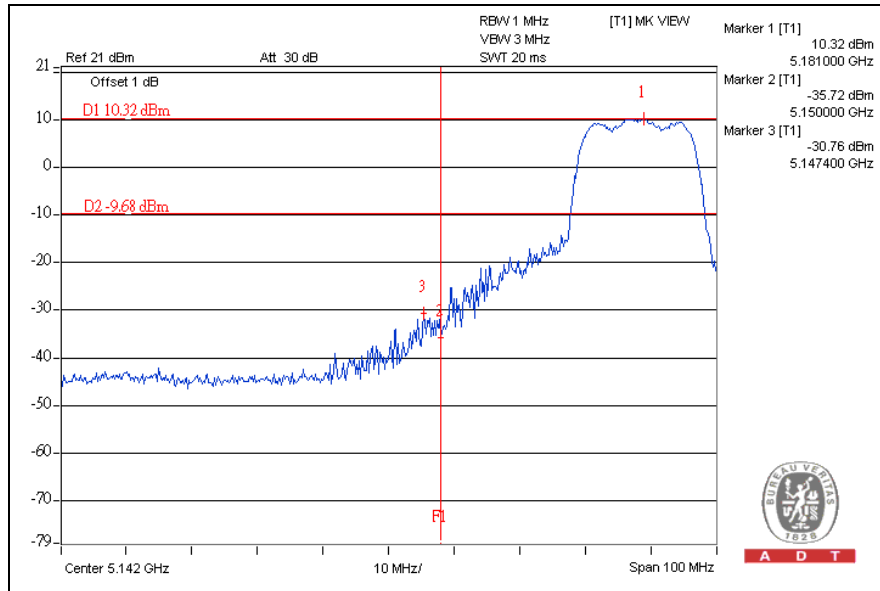


CH48

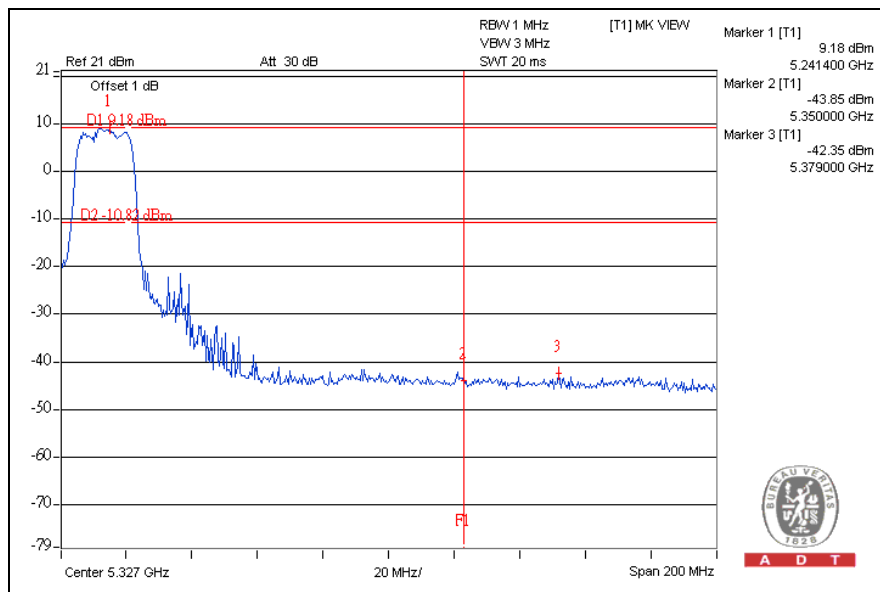

CH36

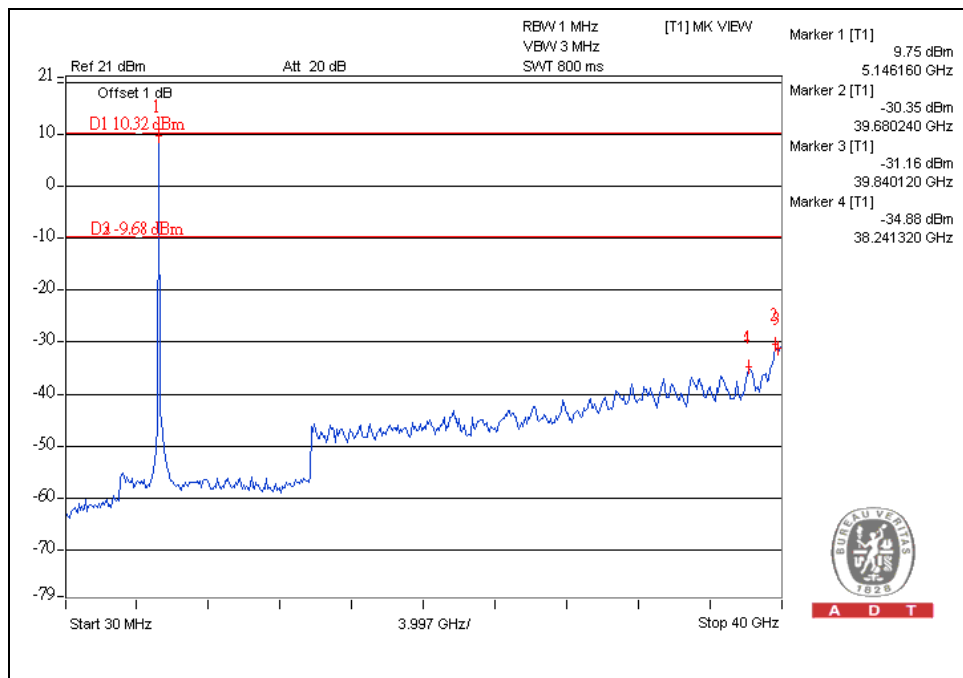


CH48

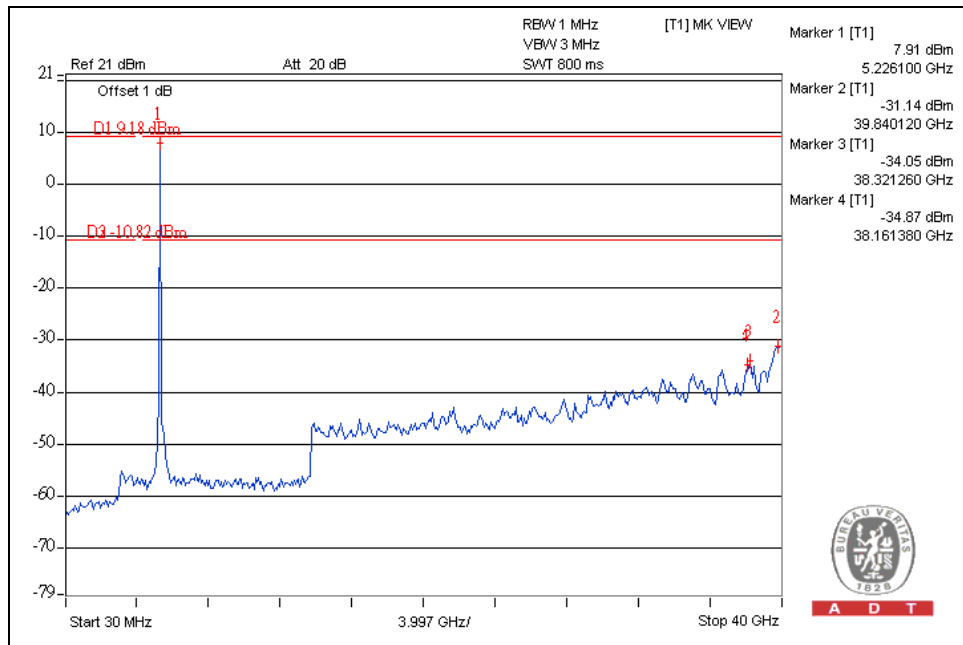


802.11n (40MHz) OFDM MODULATION:


CH38

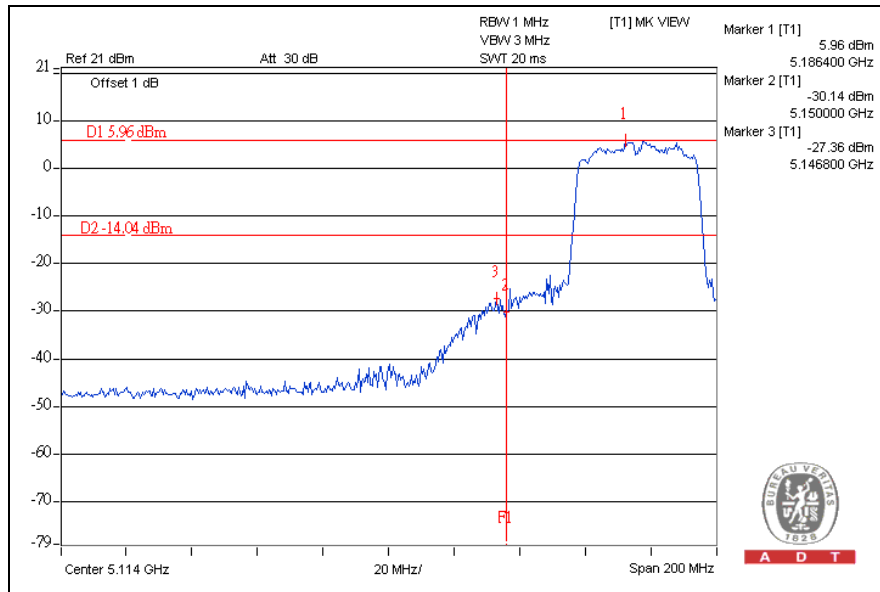


CH46

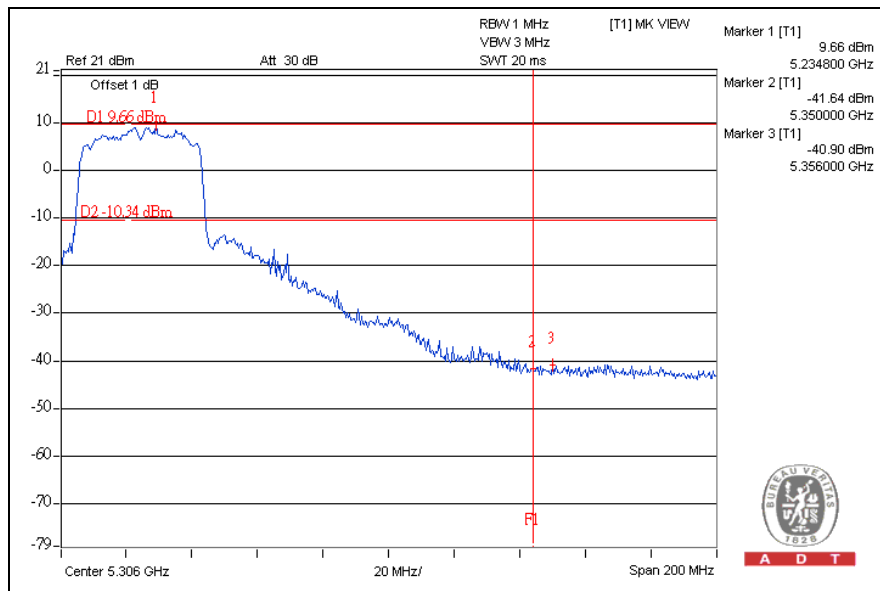

CH38

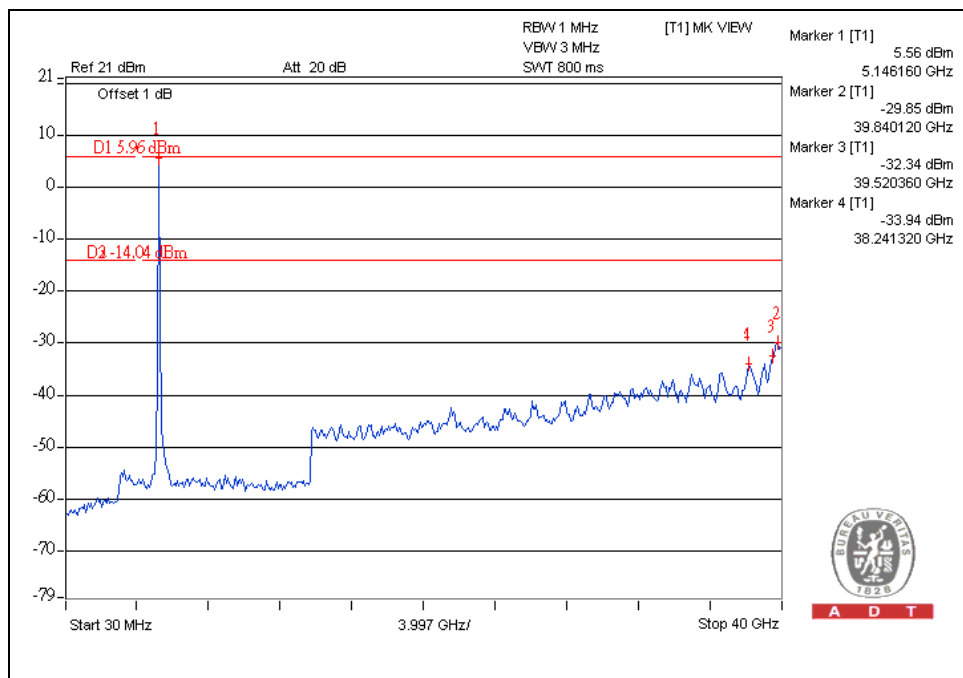

CH46

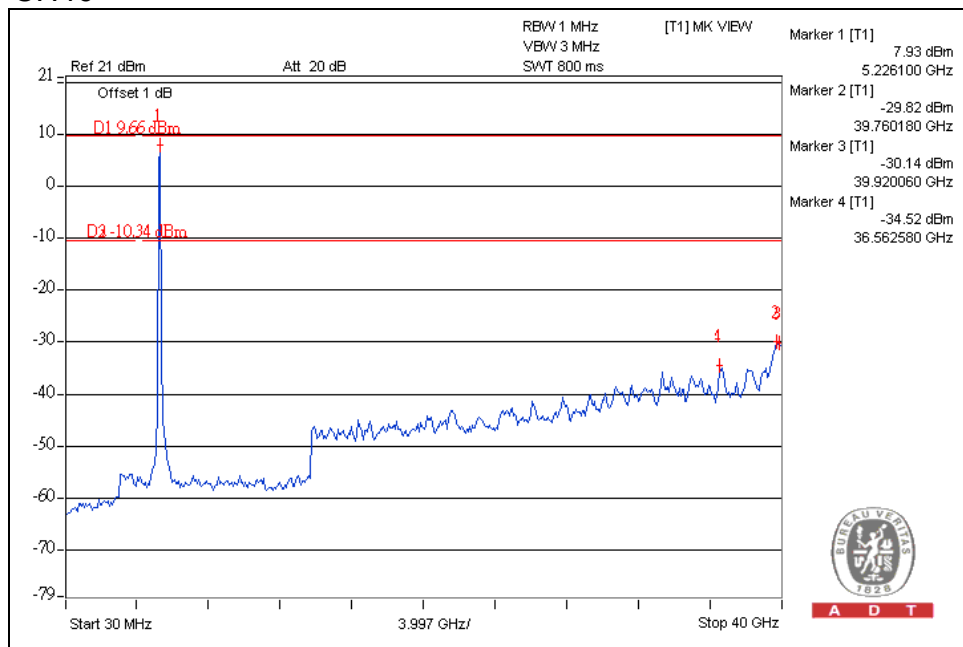

5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025:

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:
www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



A D T

6.APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---