



REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
0	N/A		2009.07.31	First Release	Longli
1	N/A		2009.10.31	Update label content and material	Longli
2	N/A		2009.11.05	Update to UL logo	Longli
3	N/A		2009.11.06	add "FCC ID: XCNDW3600 "	Longli
4	N/A		2009.11.10	Update label content	Longli

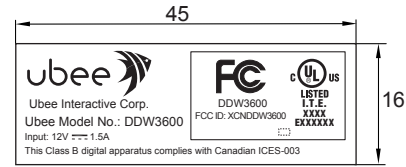

Scale:1/1

NOTES:

- 1.SURFACE MATERIAL: #50 Mylar + 25# PET(matte, printable)
BACKGROUND COLOR: white
- 2.ADHESIVE NO.: ACRYLIC
- 3.PRINTING COLOR: Black
- 4.When label is adhesived on housing smooth face(material PC) after it is tested under test condition 60°C 90%R.H. 72hrs,it must be fine.
- 5.Package style: Reel
- 6.Stick position please refer to page 5.

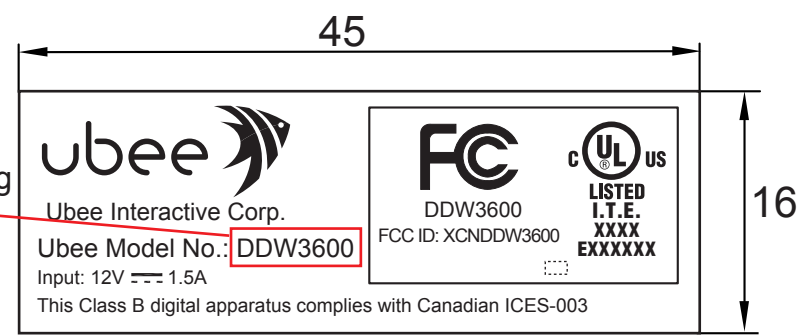






Scale:2/1



Vendor Code

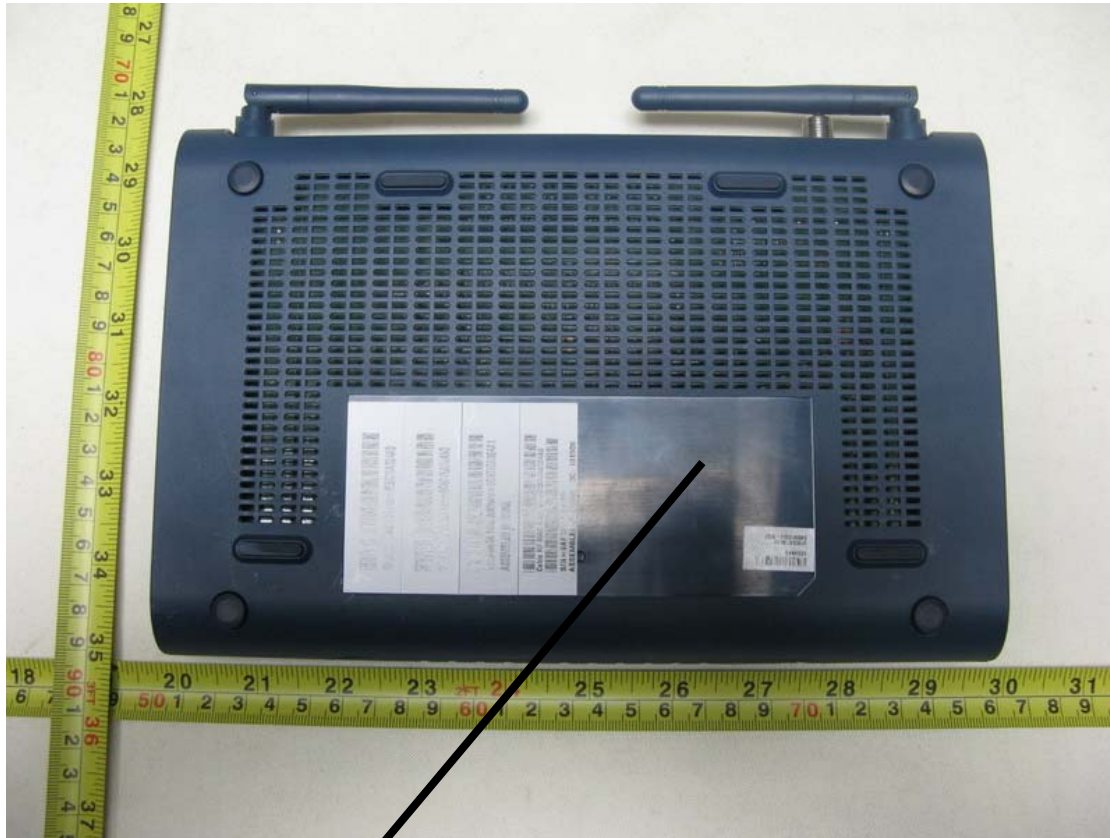MATERIAL (SPEC.)		SCALE	FOXCONN HON HAI PRECISION IND. CO., LTD. CNSBG																																																																														
FINISH		SHEET 1/1																																																																															
Select <table border="1"> <thead> <tr> <th>Dim.</th> <th>Tol.</th> <th>A</th> <th>B</th> <th>C</th> <th>EPS</th> <th>EPE</th> <th>BAG</th> <th>CTN</th> <th>Label</th> <th>UNIT</th> </tr> </thead> <tbody> <tr> <td>0~6</td> <td></td> <td>0.05</td> <td>0.05</td> <td>0.10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>MM</td> </tr> <tr> <td>6~30</td> <td></td> <td>0.10</td> <td>0.15</td> <td>0.20</td> <td>0.50</td> <td>0.50</td> <td>3.00</td> <td></td> <td></td> <td></td> </tr> <tr> <td>30~120</td> <td></td> <td>0.15</td> <td>0.20</td> <td>0.30</td> <td>0.50</td> <td>0.50</td> <td>5.00</td> <td>2.00</td> <td>0.25</td> <td></td> </tr> <tr> <td>120~300</td> <td></td> <td>0.20</td> <td>0.30</td> <td>0.40</td> <td>1.00</td> <td>1.00</td> <td>10.00</td> <td>3.00</td> <td>0.30</td> <td></td> </tr> <tr> <td>300~450</td> <td></td> <td>0.25</td> <td>0.40</td> <td>0.50</td> <td>2.00</td> <td>2.00</td> <td>15.00</td> <td>5.00</td> <td>0.50</td> <td></td> </tr> <tr> <td>450~600</td> <td></td> <td>0.30</td> <td>0.50</td> <td>0.60</td> <td>3.00</td> <td>3.00</td> <td>20.00</td> <td>5.00</td> <td>0.80</td> <td></td> </tr> </tbody> </table>		Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	Label	UNIT	0~6		0.05	0.05	0.10						MM	6~30		0.10	0.15	0.20	0.50	0.50	3.00				30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25		120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30		300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50		450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80		UNIT	PART NAME	
Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	Label	UNIT																																																																							
0~6		0.05	0.05	0.10						MM																																																																							
6~30		0.10	0.15	0.20	0.50	0.50	3.00																																																																										
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25																																																																								
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30																																																																								
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50																																																																								
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80																																																																								
DRAFT TOLERANCE ±0.2°		SIZE A4	MODEL U10C047.00	PART NO. 500.00936.005	DESIGNED Longli Sun																																																																												
CRITICAL DIM. MARK *			CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED Sunny Wu																																																																												



 <p>Ubee Interactive Corp. Ubee Model No.: DDW3600 Input 12V  1.5A This Class B digital apparatus complies with Canadian IC ES-003</p>	 <p>DDW3600 FCC ID: XCNDW3600</p>  <p>LISTED I.T.E. XXXX EXXXXXX</p>
--	--