



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Ubee Interactive
Applicant Address	10F-1, No. 5, Taiyuan 1st St. Jhubei City, Hsinchu County 302, Taiwan, R.O.C.
FCC ID	XCNDDW36C

Product Name	Wireless Cable Modem
Brand Name	Ubee Interactive
Model No.	DDW36C
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Received Date	Jun. 18, 2014
Final Test Date	Aug. 20, 2014
Operating Mode	Master

Statement

Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes.....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	11
3.9. EUT Operation during Test	12
3.10. Duty Cycle.....	12
3.11. Test Configurations	13
4. TEST RESULT	17
4.1. AC Power Line Conducted Emissions Measurement.....	17
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	21
4.3. Maximum Conducted Output Power Measurement.....	42
4.4. Power Spectral Density Measurement	47
4.5. Radiated Emissions Measurement	61
4.6. Band Edge Emissions Measurement	102
4.7. Frequency Stability Measurement	116
4.8. Antenna Requirements	118
5. LIST OF MEASURING EQUIPMENTS	119
6. MEASUREMENT UNCERTAINTY.....	121
APPENDIX A. TEST PHOTOS	A1 ~ A5
APPENDIX B. MAXIMUM PERMISSIBLE EXPOSURE	B1 ~ B3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR470106AC	Rev. 01	Initial issue of report	Sep. 11, 2014

1. CERTIFICATE OF COMPLIANCE

Product Name : Wireless Cable Modem
Brand Name : Ubee Interactive
Model No. : DDW36C
Applicant : Ubee Interactive
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jun. 18, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	18.47 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	0.02 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.01 dB
4.5	15.407(b)	Radiated Emissions	Complies	3.03 dB
4.6	15.407(b)	Band Edge Emissions	Complies	0.03 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11a/n/ac

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From Internal Power
Modulation	see the below table for IEEE 802.11a/n/ac
Data Modulation	For 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	For 802.11a: OFDM (6/9/12/18/24/36/48/54) For 802.11n/ac: see the below table
Frequency Range	5250 ~ 5350MHz / 5470 ~ 5725MHz
Channel Number	15 for 20MHz bandwidth ; 7 for 40MHz bandwidth 3 for 80MHz bandwidth
Channel Band Width (99%)	<p><For Non-Beamforming Mode></p> <p>Band 2:</p> <p>802.11ac MCS0/Nss1 (VHT20): 18.08 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.80 MHz ; 802.11a: 17.28 MHz</p> <p>Band 3:</p> <p>802.11ac MCS0/Nss1 (VHT20): 18.08 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.80 MHz ; 802.11a: 17.28 MHz</p> <p><For Beamforming Mode></p> <p>Band 2:</p> <p>802.11ac MCS0/Nss1 (VHT20): 18.08 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.16 MHz</p> <p>Band 3:</p> <p>802.11ac MCS0/Nss1 (VHT20): 17.92 MHz ; 802.11ac MCS0/Nss1 (VHT40): 36.48 MHz ; 802.11ac MCS0/Nss1 (VHT80): 76.80 MHz</p>

Maximum Conducted Output Power	<p><For Non-Beamforming Mode></p> <p>Band 2:</p> <p>802.11ac MCS0/Nss1 (VHT20): 19.87 dBm ; 802.11ac MCS0/Nss1 (VHT40): 21.76 dBm ; 802.11ac MCS0/Nss1 (VHT80): 20.35 dBm ; 802.11a: 19.02 dBm</p> <p>Band 3:</p> <p>802.11ac MCS0/Nss1 (VHT20): 21.29 dBm ; 802.11ac MCS0/Nss1 (VHT40): 23.04 dBm ; 802.11ac MCS0/Nss1 (VHT80): 23.98 dBm ; 802.11a: 21.28 dBm</p> <p><For Beamforming Mode></p> <p>Band 2:</p> <p>802.11ac MCS0/Nss1 (VHT20): 19.94 dBm ; 802.11ac MCS0/Nss1 (VHT40): 20.72 dBm ; 802.11ac MCS0/Nss1 (VHT80): 20.60 dBm</p> <p>Band 3:</p> <p>802.11ac MCS0/Nss1 (VHT20): 20.88 dBm ; 802.11ac MCS0/Nss1 (VHT40): 20.85 dBm ; 802.11ac MCS0/Nss1 (VHT80): 20.76 dBm</p>
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
TPC Function	<input checked="" type="checkbox"/> With TPC	<input type="checkbox"/> Without TPC
Weather Band (5600~5650MHz)	<input checked="" type="checkbox"/> With 5600~5650MHz	<input type="checkbox"/> Without 5600~5650MHz
Beamforming Function	<input checked="" type="checkbox"/> With beamforming for 802.11n/ac in 5GHz.	<input type="checkbox"/> Without beamforming

Antenna and Band width

Antenna	Three (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23
802.11ac (VHT20)	3	MCS 0-9/Nss1-3
802.11ac (VHT40)	3	MCS 0-9/Nss1-3
802.11ac (VHT80)	3	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT support HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). The EUT supports VHT20, VHT40 and VHT80 in 5GHz.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

3.2. Accessories

N/A

3.3. Table for Filed Antenna


Ant.	Brand	P/N	Antenna Type	Connector	5GHz Gain (dBi)	
					Band 2	Band 3
1	M.gear	C107-511135-A	PCB Antenna	I-PEX	4.3	4.4
2	M.gear	C107-511136-A	PCB Antenna	I-PEX	4.3	4.5
3	M.gear	C107-511137-A	PCB Antenna	I-PEX	4.4	4.0

Note: The EUT has three antennas.

For IEEE 802.11a/n/ac mode (3TX/3RX):

Ant. 1, Ant. 2 and Ant. 3 can be used as transmitting/receiving antenna.

Ant. 1, Ant. 2 and Ant. 3 could transmit/receive simultaneously.

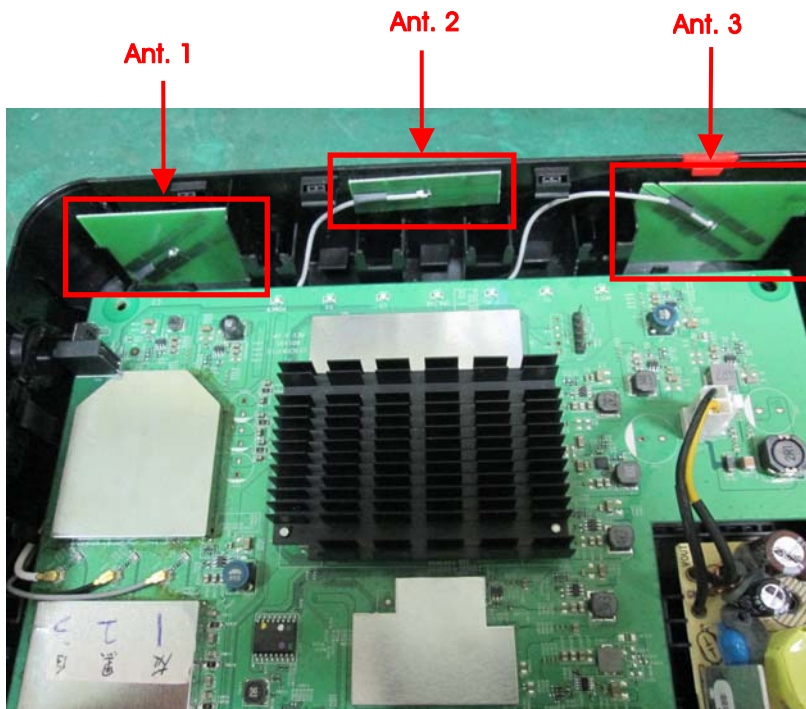

3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140.

For 40MHz bandwidth systems, use Channel 54, 62, 102, 110, 118, 126, 134.

For 80MHz bandwidth systems, use Channel 58, 106, 122.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5250~5350 MHz Band 2	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
	58	5290 MHz	-	-
5470~5725 MHz Band 3	100	5500 MHz	120	5600 MHz
	102	5510 MHz	122	5610 MHz
	104	5520 MHz	124	5620 MHz
	106	5530 MHz	126	5630 MHz
	108	5540 MHz	128	5640 MHz
	110	5550 MHz	132	5660 MHz
	112	5560 MHz	134	5670 MHz
	116	5580 MHz	136	5680 MHz
	118	5590 MHz	140	5700 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	CTX		-	-	-
Max. Conducted Output Power	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/116/140	1+2+3
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/134	1+2+3
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106/122	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/116/140	1+2+3
Power Spectral Density	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/116/140	1+2+3
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/134	1+2+3
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106/122	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/116/140	1+2+3
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/116/140	1+2+3
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/134	1+2+3
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106/122	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/116/140	1+2+3
Radiated Emission Below 1GHz	CTX		-	-	-
Radiated Emission Above 1GHz	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/116/140	1+2+3
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/134	1+2+3
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106/122	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/116/140	1+2+3
Band Edge Emission	11ac VHT20	Band 2-3	MCS0/Nss1	52/60/64/100/116/140	1+2+3
	11ac VHT40	Band 2-3	MCS0/Nss1	54/62/102/110/134	1+2+3
	11ac VHT80	Band 2-3	MCS0/Nss1	58/106/122	1+2+3
	11a/BPSK	Band 2-3	6Mbps	52/60/64/100/116/140	1+2+3
Frequency Stability	Un-modulation		-	60/100/122	1+2+3

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation.

Note 2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac in 5GHz.

Beamforming mode and non-beamforming mode have been tested and recorded in this test report.

The following test modes were performed for all tests:

For Conducted Emission test:

Mode 1. EUT Standing - CTX

For Radiated Emission test <Below 1GHz>:

Mode 1. EUT Standing - CTX

For Radiated Emission test <Above 1GHz>:

Mode 1. EUT Standing - CTX

3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

For Test Site No: 03CH01-CB <Below 1GHz>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

For Test Site No: 03CH01-CB <Above 1GHz>

<For Non-Beamforming Mode>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

<For Beamforming Mode>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
Notebook	DELL	E6220	DoC
WLAN ac Dongle	Netgear	A6200	PY312200200

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Non-Beamforming Mode>

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS					
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
MCS0/Nss1 VHT20	58	58	56	44	58	60

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS				
Frequency	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz
MCS0/Nss1 VHT40	64	60	44	58	66

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS		
Frequency	5290 MHz	5530 MHz	5610 MHz
MCS0/Nss1 VHT80	60	40	72

Power Parameters of IEEE 802.11a

Test Software Version	DOS					
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
802.11a	54	54	54	54	58	60

<For Beamforming Mode>

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT20

Test Software Version	DOS					
Frequency	5260 MHz	5300 MHz	5320 MHz	5500 MHz	5580 MHz	5700 MHz
MCS0/Nss1 VHT20	55	52	58	55	56	58

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT40

Test Software Version	DOS				
Frequency	5270 MHz	5310 MHz	5510 MHz	5550 MHz	5670 MHz
MCS0/Nss1 VHT40	60	60	44	54	55

Power Parameters of IEEE 802.11ac MCS0/Nss1 VHT80

Test Software Version	DOS		
Frequency	5290 MHz	5530 MHz	5610 MHz
MCS0/Nss1 VHT80	61	40	57

3.9. EUT Operation during Test

<For Non-Beamforming Mode>

The EUT was programmed to be in continuously transmitting mode.

<For Beamforming Mode>

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by Wireless AP and transmit duty cycle no less 98%

3.10. Duty Cycle

<For Non-Beamforming Mode>


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	2.046	2.064	99.13%	0.04	0.01
802.11ac MCS0/Nss1 VHT40	1.878	1.908	98.43%	0.07	0.01
802.11ac MCS0/Nss1 VHT80	0.908	0.936	97.01%	0.13	1.10
802.11a	0.448	0.475	94.32%	0.25	2.23

<For Beamforming Mode>

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	3.660	3.765	97.21%	0.12	0.27
802.11ac MCS0/Nss1 VHT40	4.490	4.610	97.40%	0.11	0.22
802.11ac MCS0/Nss1 VHT80	5.010	5.090	98.43%	0.07	0.01

3.11. Test Configurations


3.11.1. AC Power Line Conduction Emissions Test Configuration

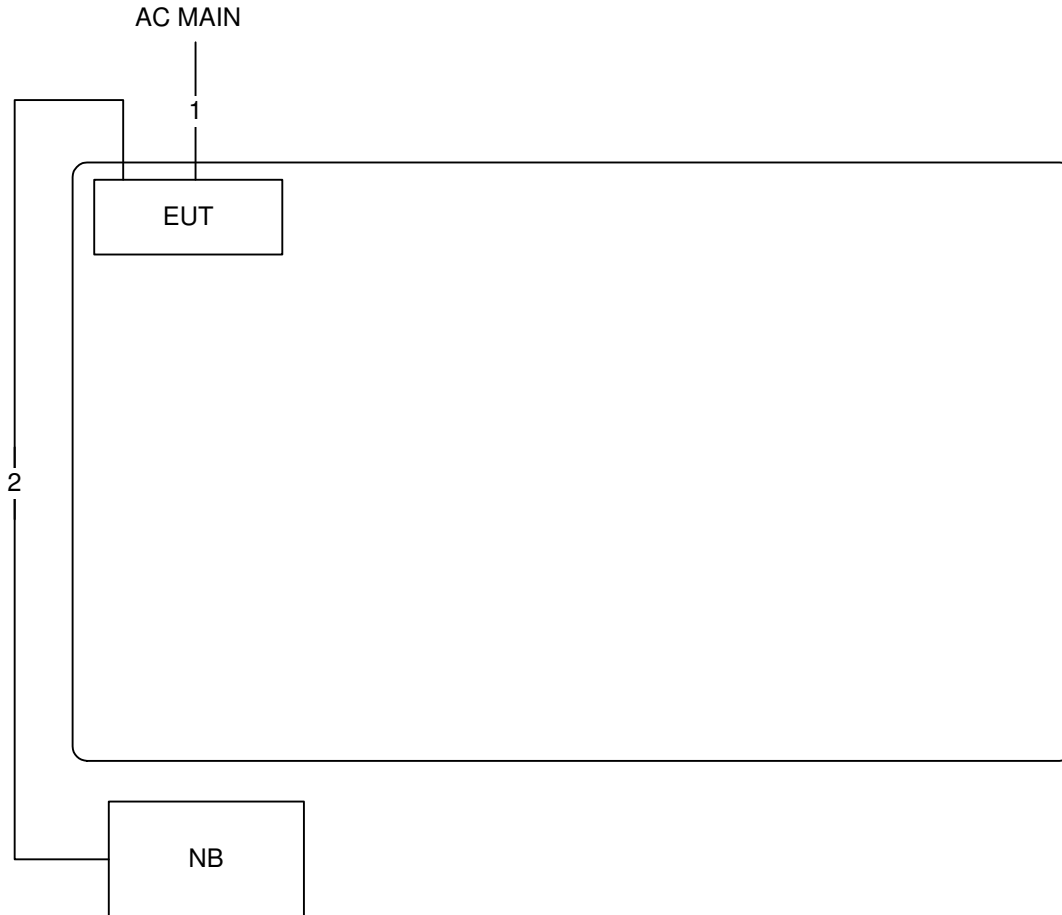

Item	Connection	Shielded	Length (m)
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m


3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

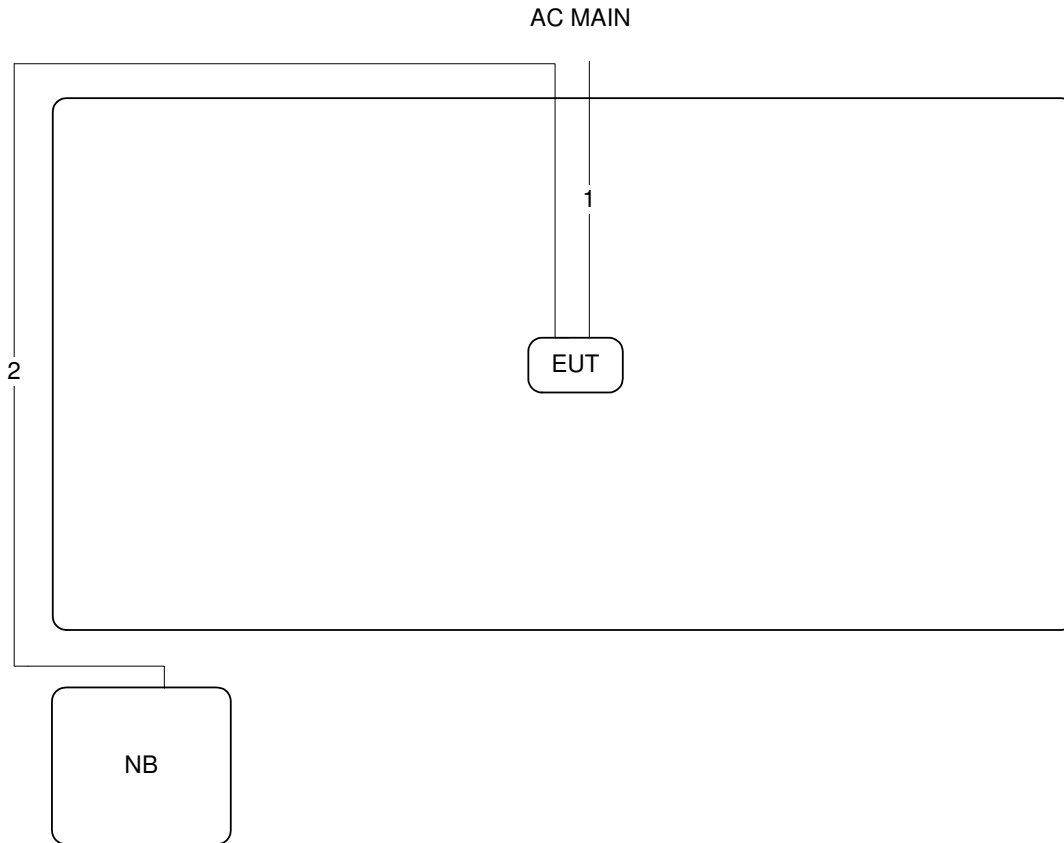


Item	Connection	Shielded	Length (m)
1	Power Cable	No	1.5m
2	RJ-45 Cable	No	10m

Test Configuration: above 1GHz
 <For Non-Beamforming Mode>

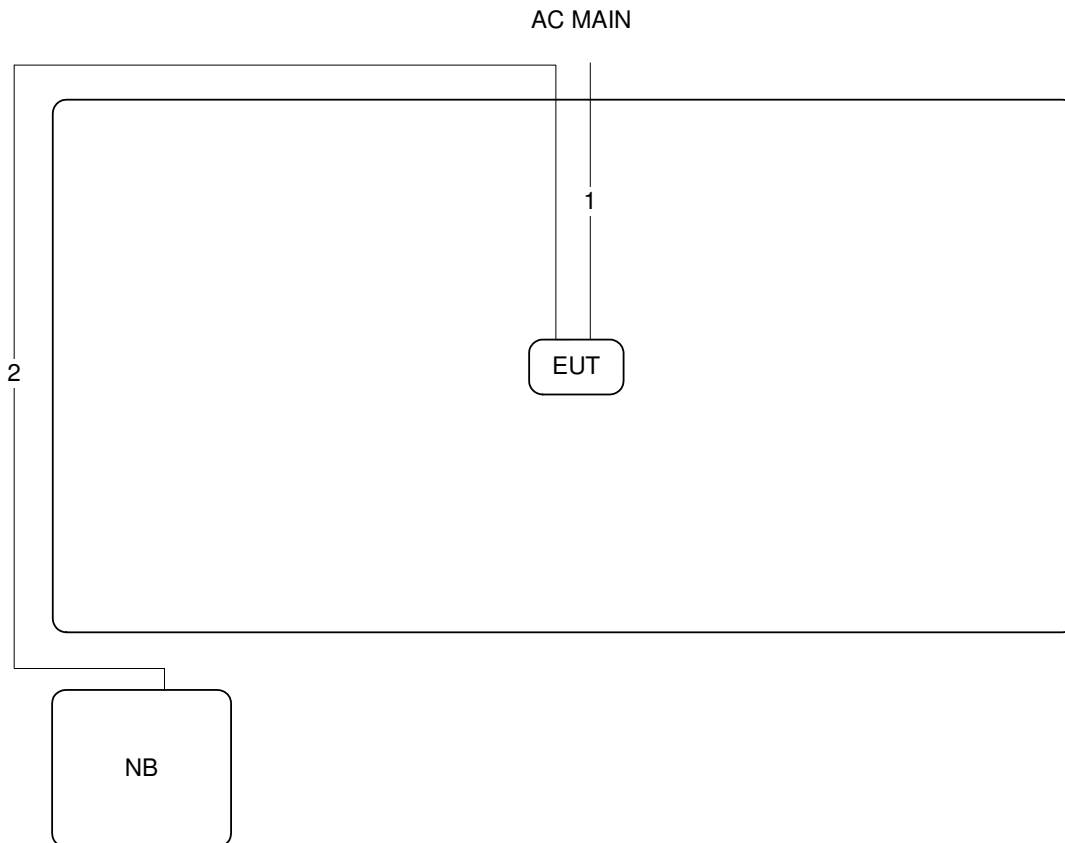

Item	Connection	Shielded	Length (m)
1	Power Cable	No	1.5m
2	RJ-45 Cable	No	10m

<For Beamforming Mode>

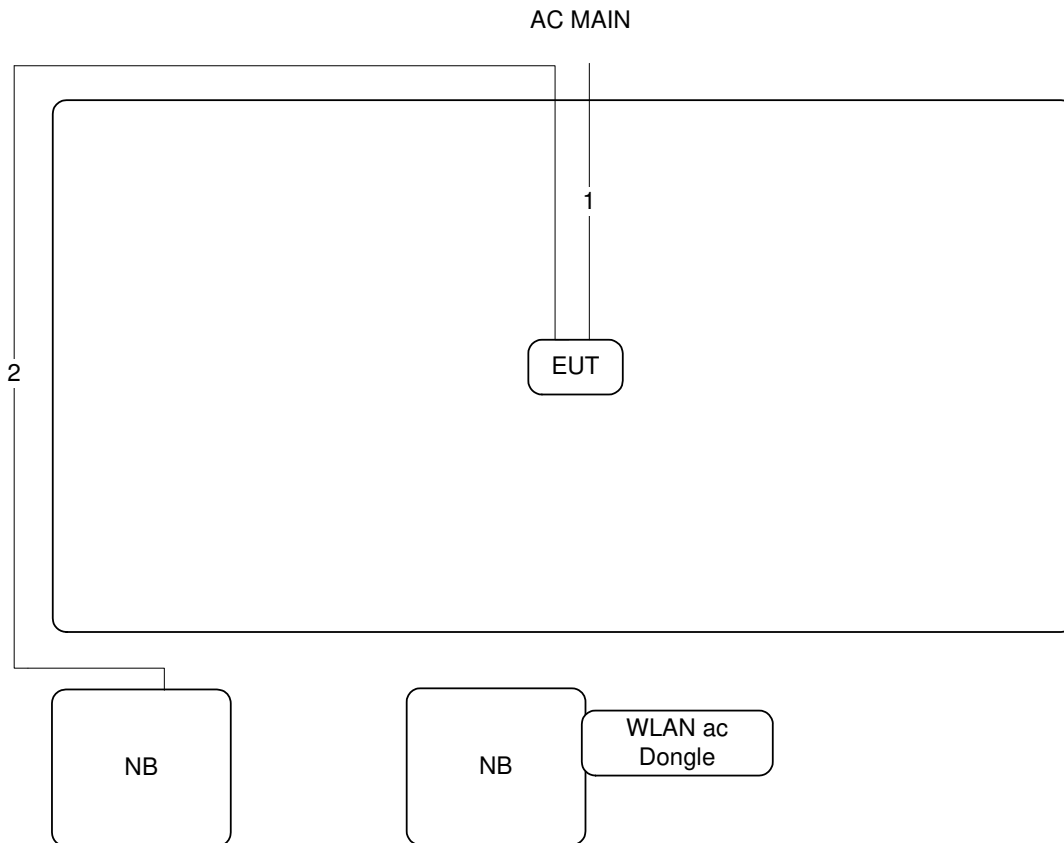

Item	Connection	Shielded	Length (m)
1	Power Cable	No	1.5m
2	RJ-45 Cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

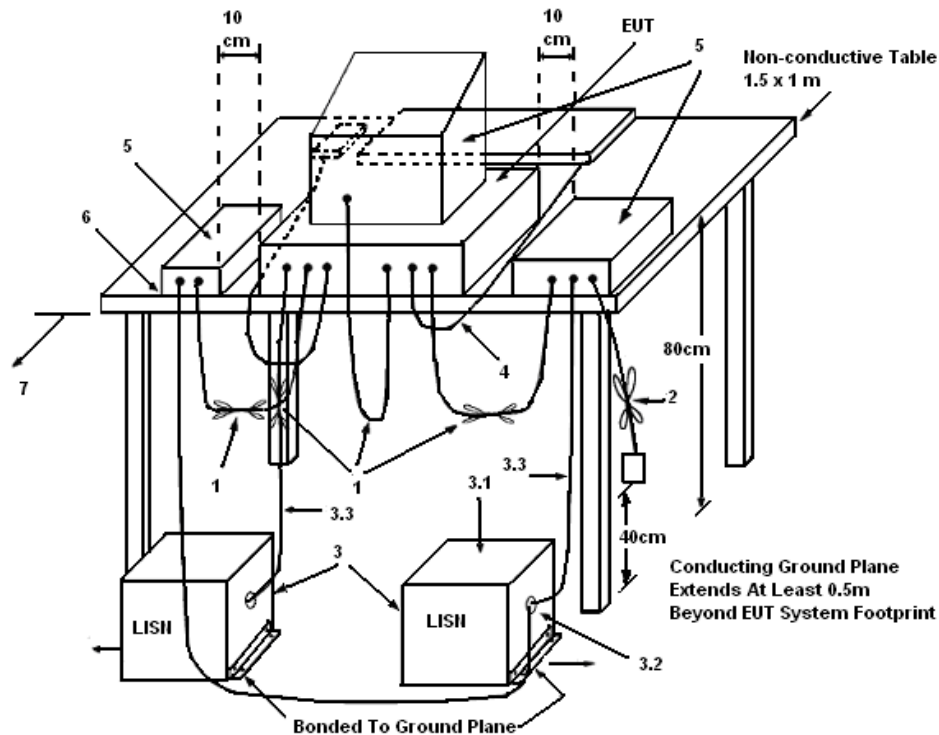

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Line
Configuration	CTX	Test Mode	Mode 1

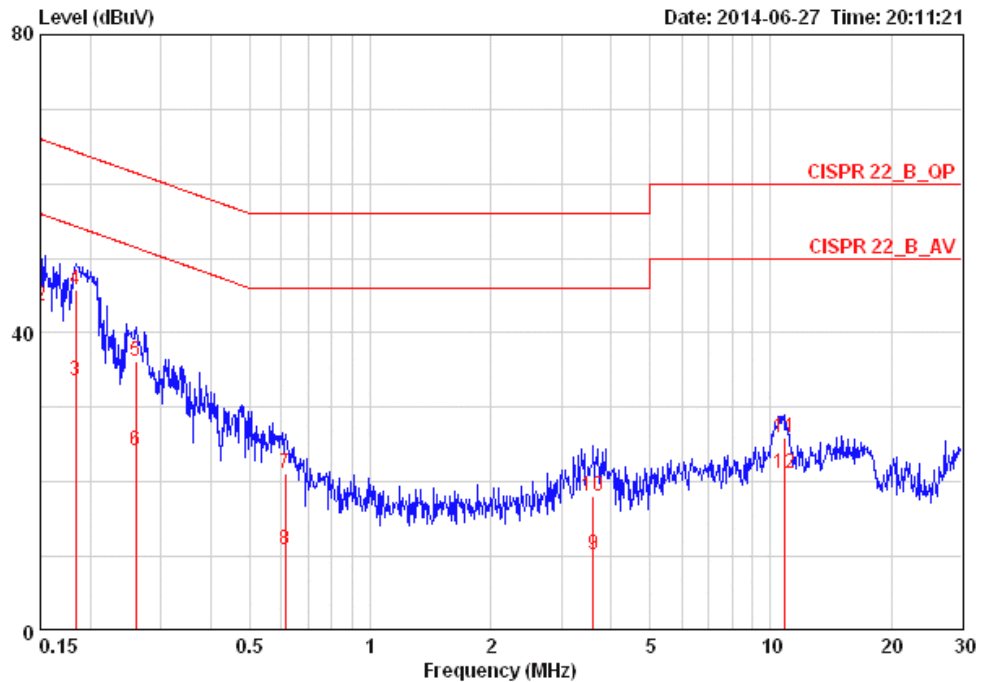

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.15000	32.54	-23.46	56.00	0.08	32.30	0.16	LINE	AVERAGE
2	0.15000	43.56	-22.44	66.00	0.08	43.32	0.16	LINE	QP
3	0.18346	33.56	-20.76	54.33	0.08	33.32	0.16	LINE	AVERAGE
4	0.18346	45.85	-18.47	64.33	0.08	45.61	0.16	LINE	QP
5	0.26026	36.16	-25.26	61.42	0.08	35.91	0.17	LINE	QP
6	0.26026	24.24	-27.18	51.42	0.08	23.99	0.17	LINE	AVERAGE
7	0.61400	21.05	-34.95	56.00	0.08	20.78	0.19	LINE	QP
8	0.61400	10.95	-35.05	46.00	0.08	10.68	0.19	LINE	AVERAGE
9	3.603	10.35	-35.65	46.00	0.14	9.91	0.29	LINE	AVERAGE
10	3.603	18.17	-37.83	56.00	0.14	17.73	0.29	LINE	QP
11	10.790	25.94	-34.06	60.00	0.27	25.28	0.39	LINE	QP
12	10.790	21.14	-28.86	50.00	0.27	20.48	0.39	LINE	AVERAGE

Temperature	24°C	Humidity	54%
Test Engineer	Parody Lin	Phase	Neutral
Configuration	CTX	Test Mode	Mode 1

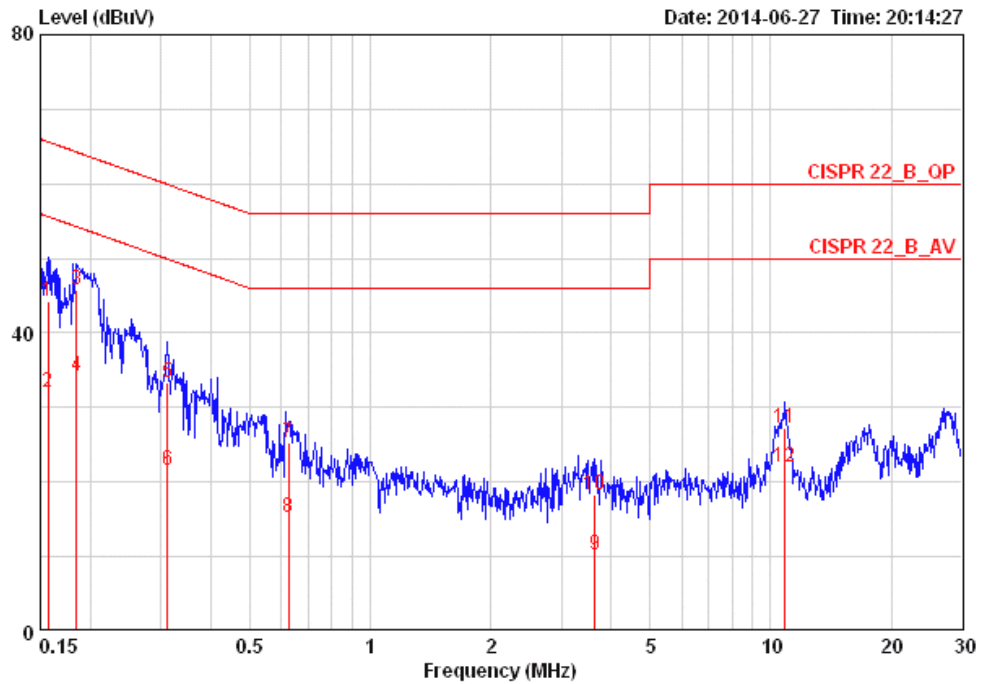

	Freq	Level	Over Limit	Limit Line	LISN Factor	Read Level	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dB	dBuV	dB		
1	0.15650	44.15	-21.50	65.65	0.08	43.91	0.16	NEUTRAL	QP
2	0.15650	32.13	-23.52	55.65	0.08	31.89	0.16	NEUTRAL	AVERAGE
3	0.18443	45.77	-18.51	64.28	0.08	45.53	0.16	NEUTRAL	QP
4	0.18443	34.31	-19.97	54.28	0.08	34.07	0.16	NEUTRAL	AVERAGE
5	0.31163	33.38	-26.55	59.93	0.09	33.12	0.17	NEUTRAL	QP
6	0.31163	21.68	-28.25	49.93	0.09	21.42	0.17	NEUTRAL	AVERAGE
7	0.62383	25.32	-30.68	56.00	0.09	25.04	0.19	NEUTRAL	QP
8	0.62383	15.25	-30.75	46.00	0.09	14.97	0.19	NEUTRAL	AVERAGE
9	3.642	10.33	-35.67	46.00	0.15	9.88	0.29	NEUTRAL	AVERAGE
10	3.642	18.32	-37.68	56.00	0.15	17.87	0.29	NEUTRAL	QP
11	10.847	27.28	-32.72	60.00	0.27	26.62	0.39	NEUTRAL	QP
12	10.847	22.00	-28.00	50.00	0.27	21.34	0.39	NEUTRAL	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

4.2.1. Limit

No restriction limits.

4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.2.3. Test Procedures

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.2.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	20.32	18.08
60	5300 MHz	20.48	18.08
64	5320 MHz	20.48	18.08
100	5500 MHz	20.16	17.92
116	5580 MHz	30.32	18.08
140	5700 MHz	20.48	18.08

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
54	5270 MHz	39.04	36.48
62	5310 MHz	39.04	36.48
102	5510 MHz	38.72	36.48
110	5550 MHz	39.36	36.48
134	5670 MHz	39.36	36.48

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
58	5290 MHz	81.28	76.80
106	5530 MHz	81.92	76.80
122	5610 MHz	82.56	76.80

Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Configurations	IEEE 802.11a

Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	20.32	17.28
60	5300 MHz	20.32	17.28
64	5320 MHz	20.48	17.28
100	5500 MHz	20.32	17.12
116	5580 MHz	20.16	17.28
140	5700 MHz	20.32	17.28

<For Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
52	5260 MHz	20.48	17.92
60	5300 MHz	20.32	17.92
64	5320 MHz	20.48	18.08
100	5500 MHz	20.48	17.92
116	5580 MHz	20.64	17.92
140	5700 MHz	20.48	17.92

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
54	5270 MHz	39.04	36.48
62	5310 MHz	39.04	36.48
102	5510 MHz	39.04	36.48
110	5550 MHz	39.36	36.48
134	5670 MHz	39.68	36.48

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
58	5290 MHz	81.92	76.16
106	5530 MHz	81.92	76.80
122	5610 MHz	81.92	76.80


<For Non-Beamforming Mode>

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz

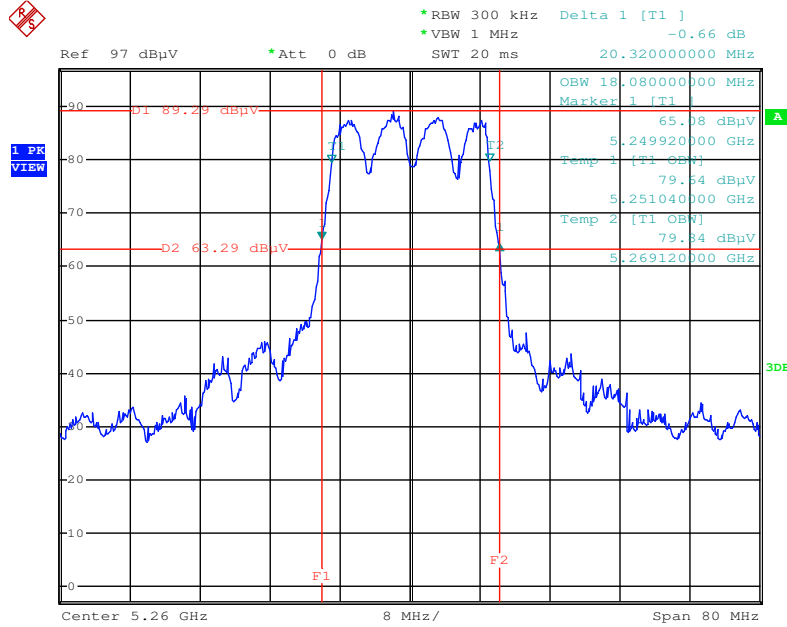


Date: 20.AUG.2014 17:52:59

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz

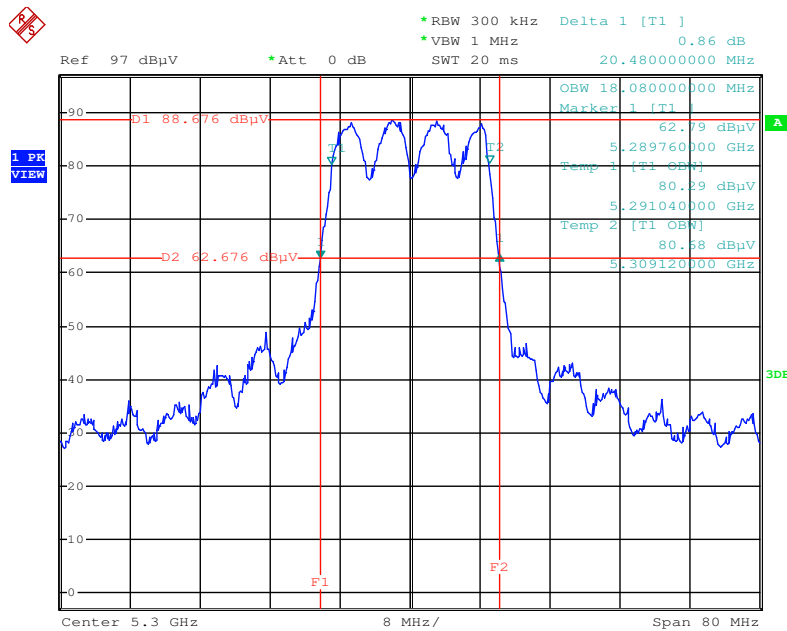


Date: 20.AUG.2014 17:55:11

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5320 MHz

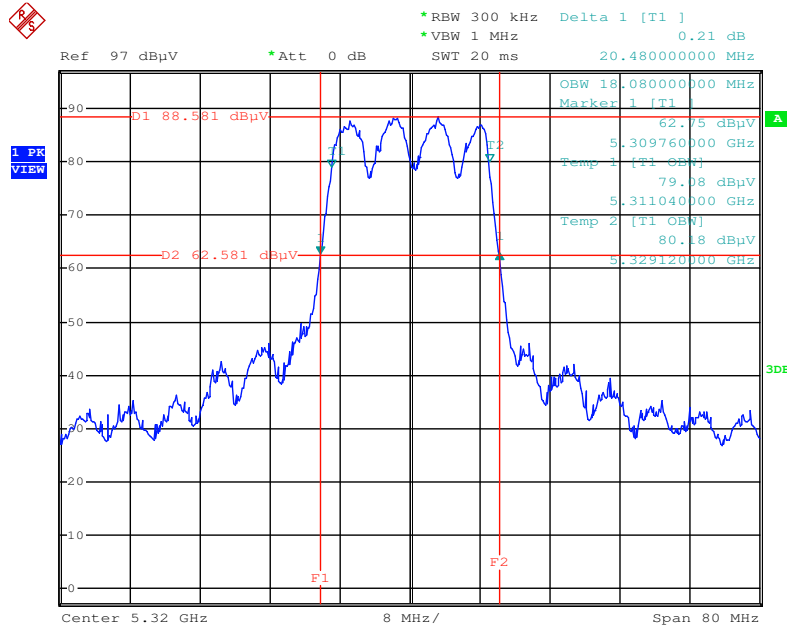


Date: 20.AUG.2014 17:56:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5500 MHz

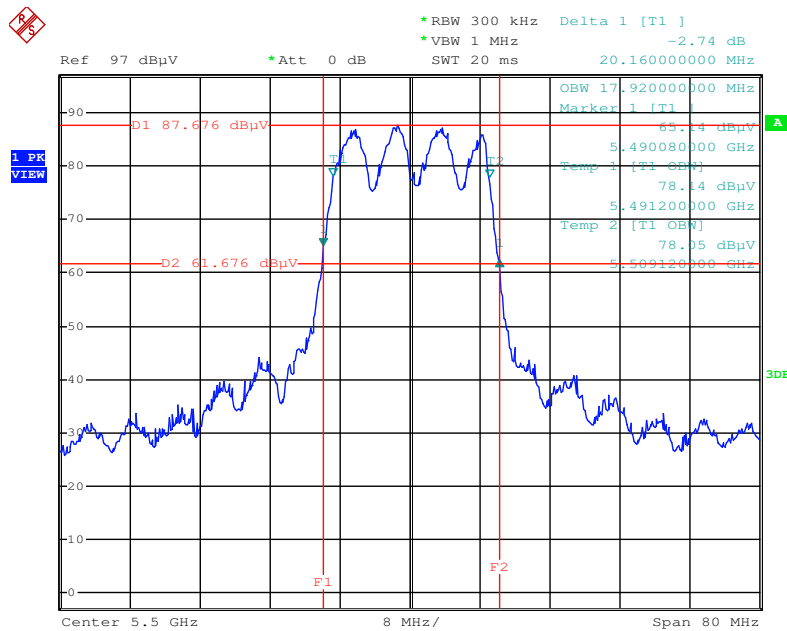


Date: 20.AUG.2014 17:58:28

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz

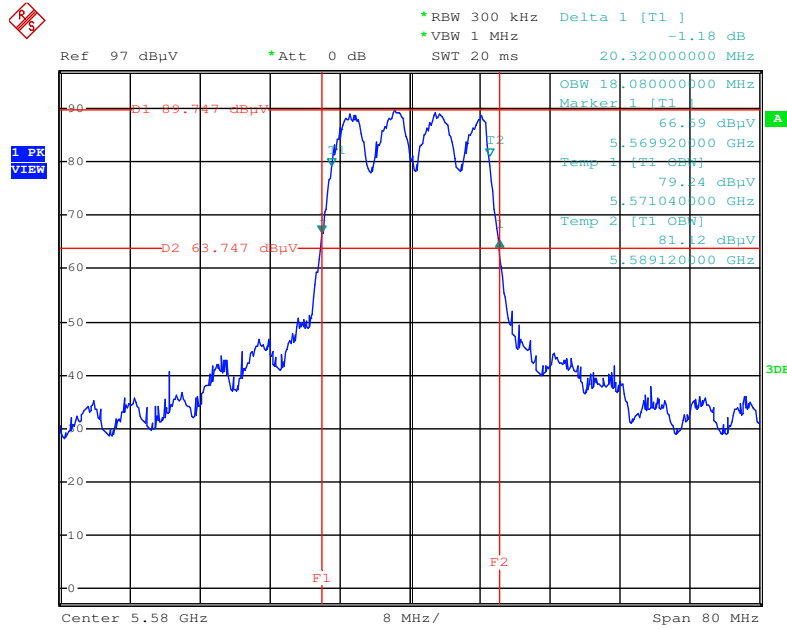


Date: 20.AUG.2014 17:59:40

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5700 MHz

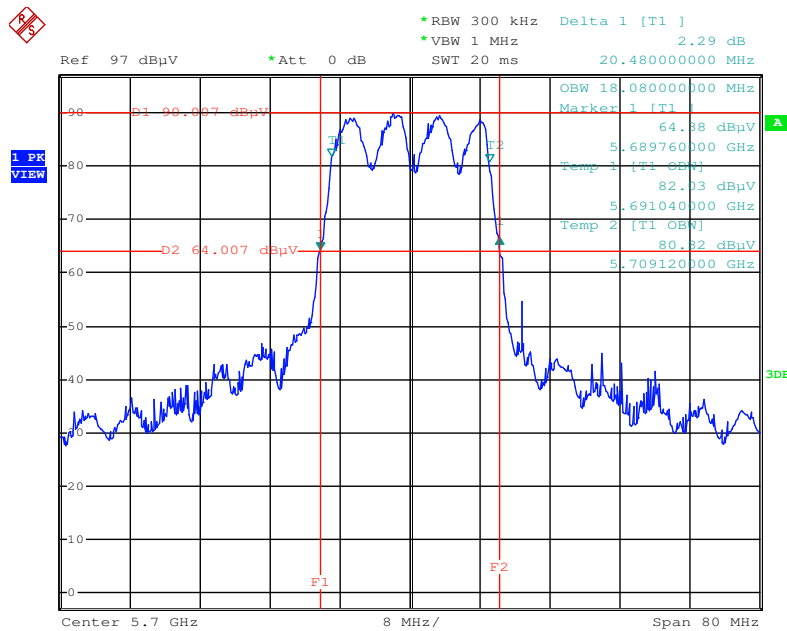


Date: 20.AUG.2014 18:00:54

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5270 MHz

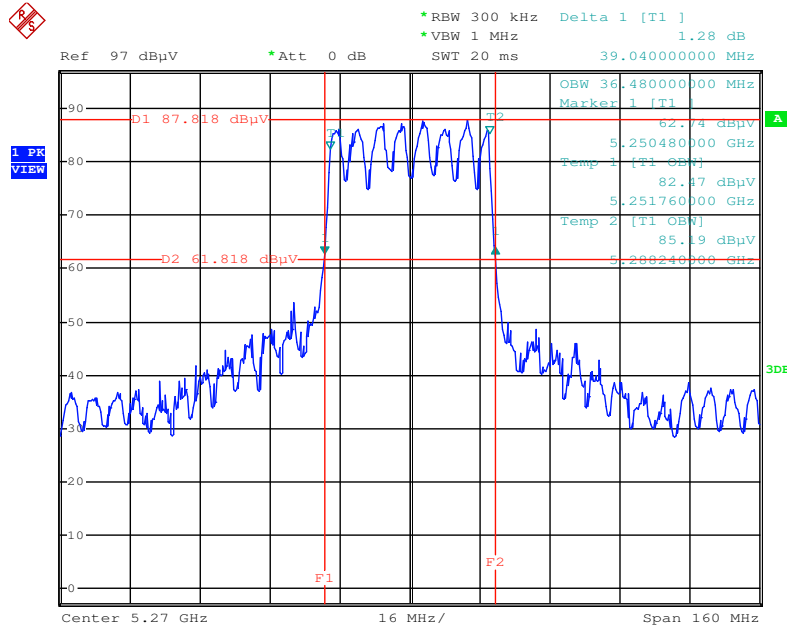


Date: 20.AUG.2014 18:02:29

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5310 MHz

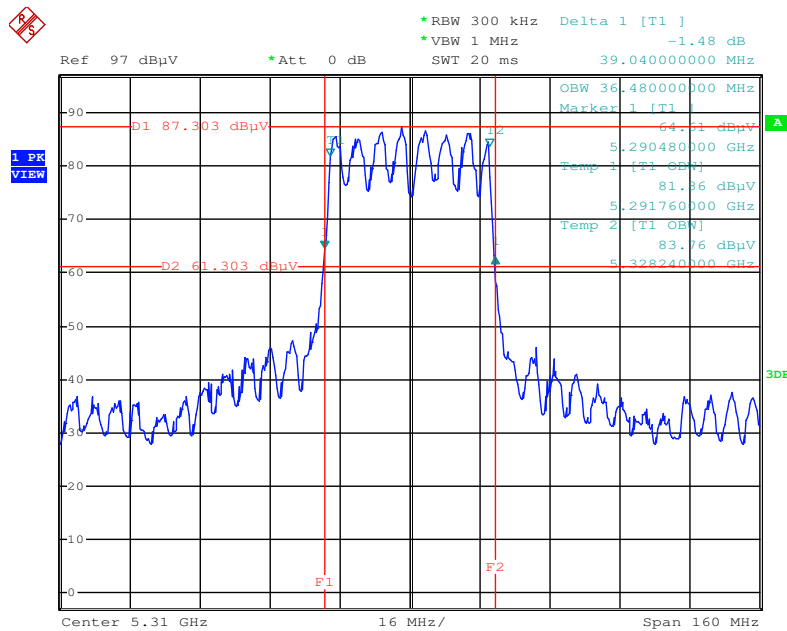


Date: 20.AUG.2014 18:04:45

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5510 MHz

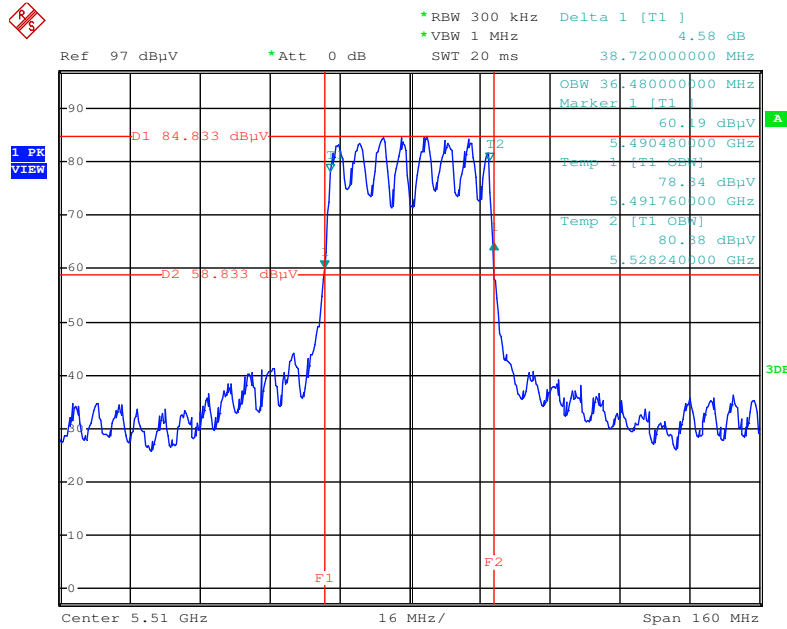


Date: 20.AUG.2014 18:06:42

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5550 MHz

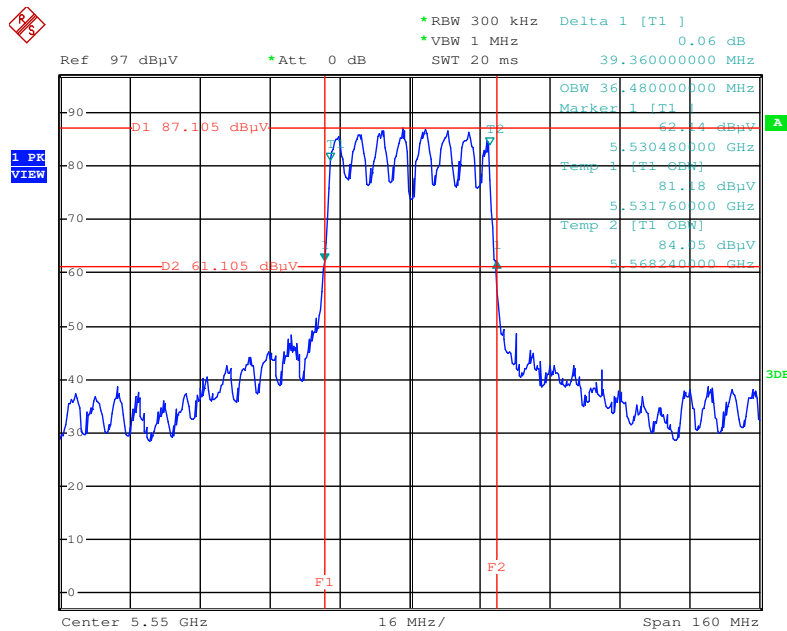


Date: 20.AUG.2014 18:08:16

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5670 MHz

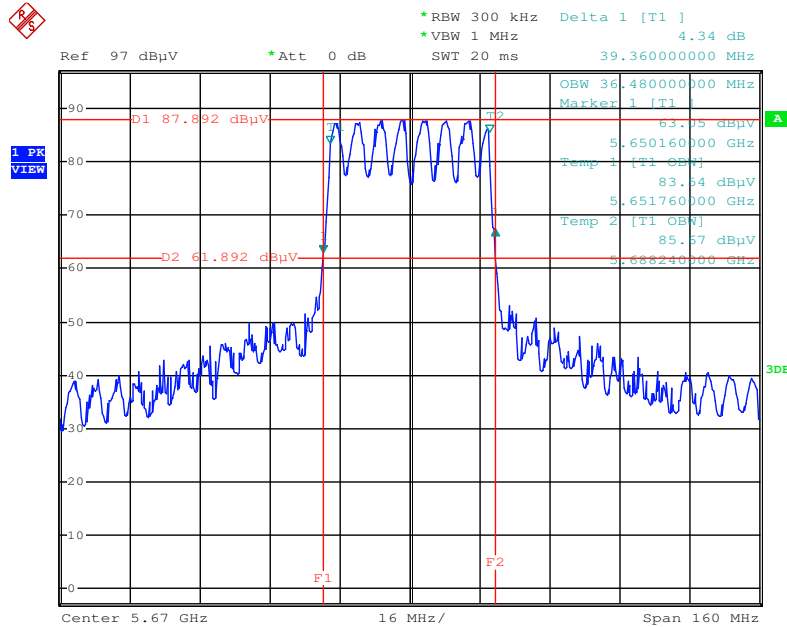


Date: 20.AUG.2014 18:09:58

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5290 MHz

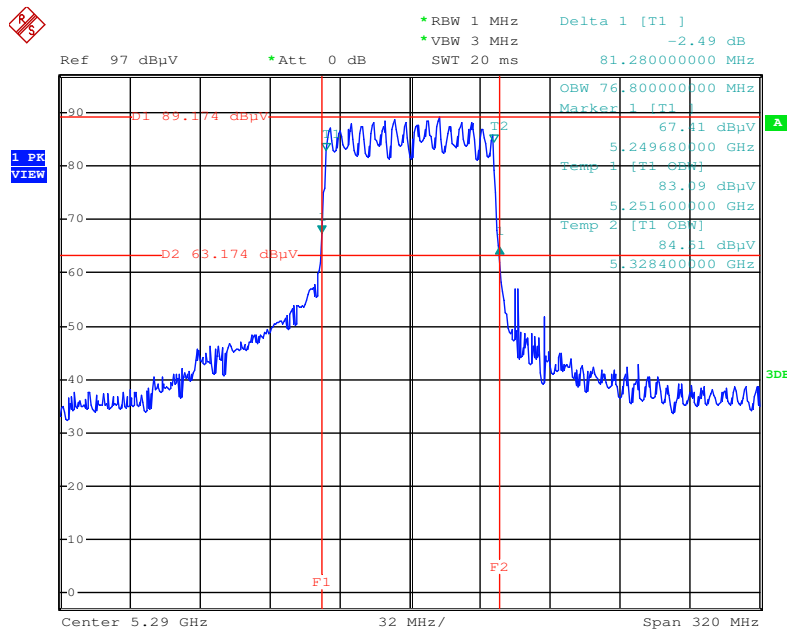


Date: 20.AUG.2014 18:11:57

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5530 MHz

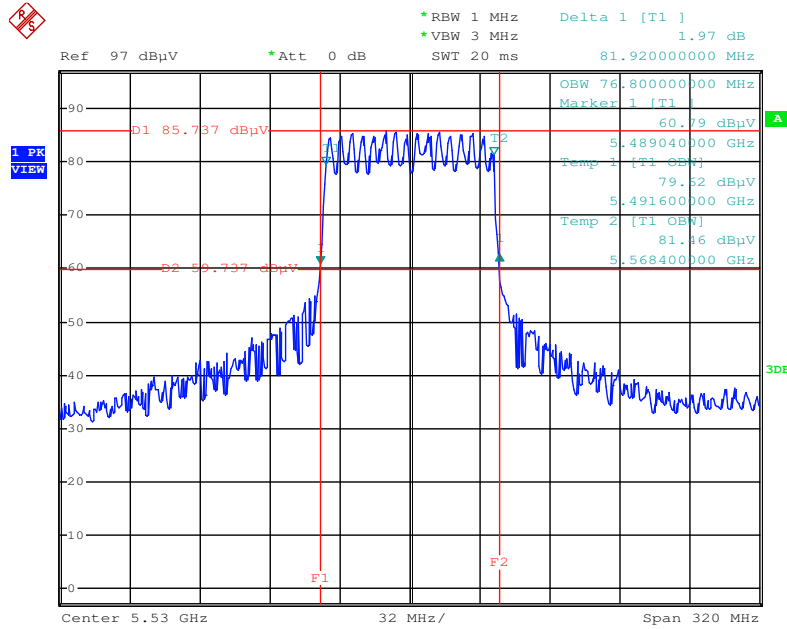


Date: 20.AUG.2014 18:13:42

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5610 MHz

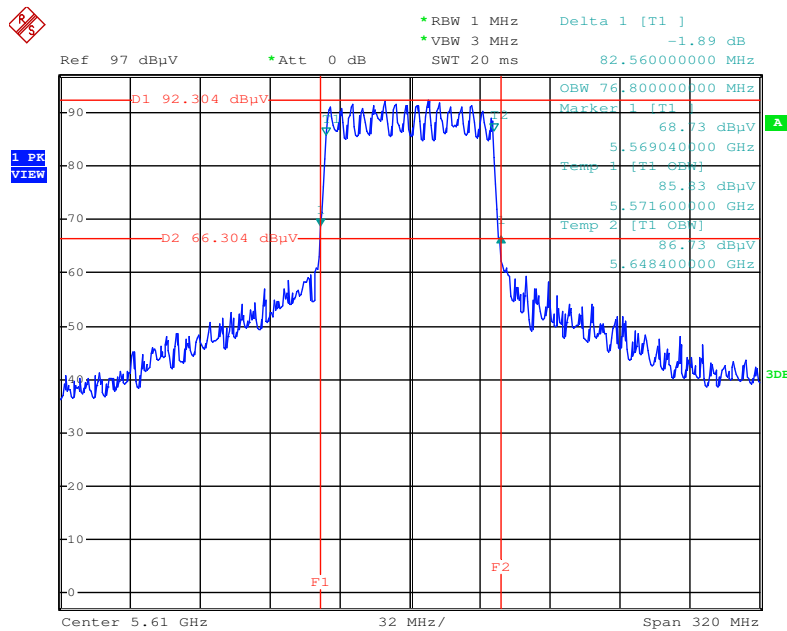


Date: 20.AUG.2014 18:15:22

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a /
Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz**

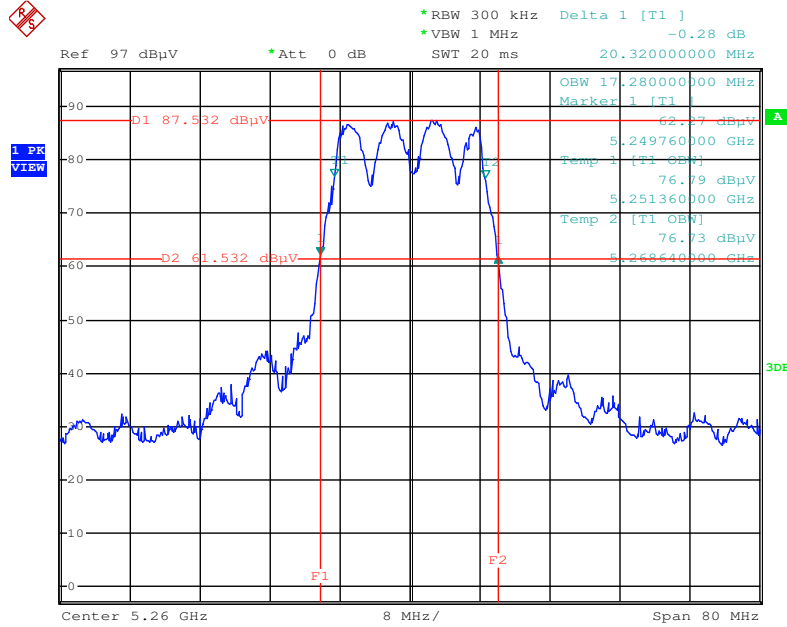


Date: 20.AUG.2014 17:41:45

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a /
Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz**

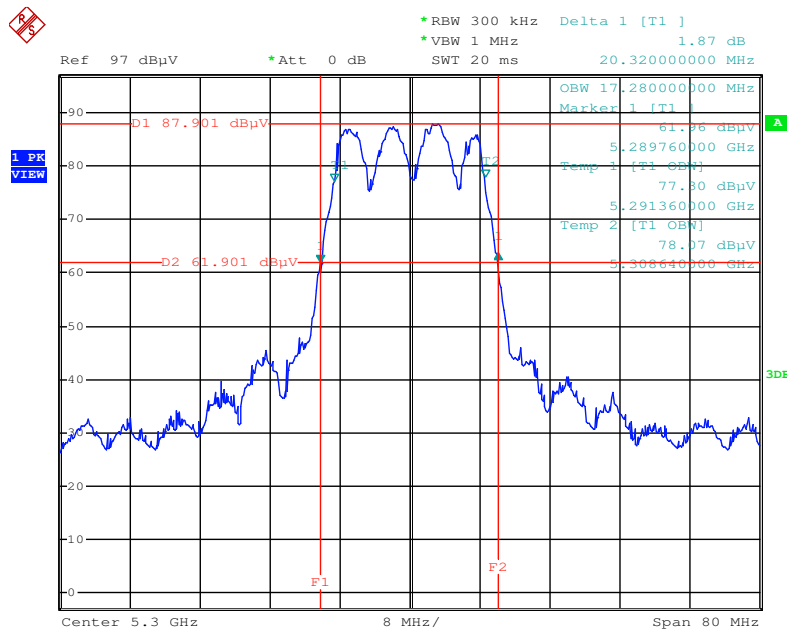


Date: 20.AUG.2014 17:45:07

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a /
Ant. 1 + Ant. 2 + Ant. 3 / 5320 MHz**

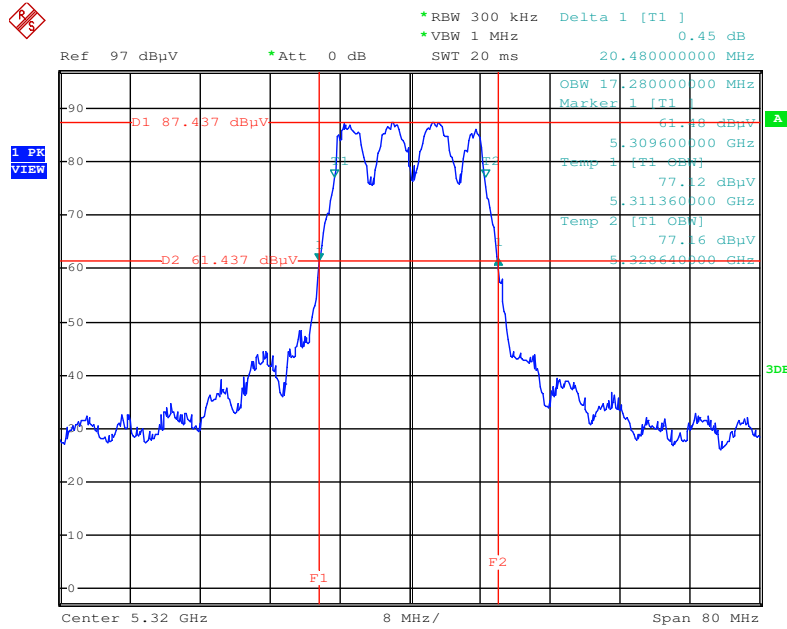


Date: 20.AUG.2014 17:46:24

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a /
Ant. 1 + Ant. 2 + Ant. 3 / 5500 MHz**

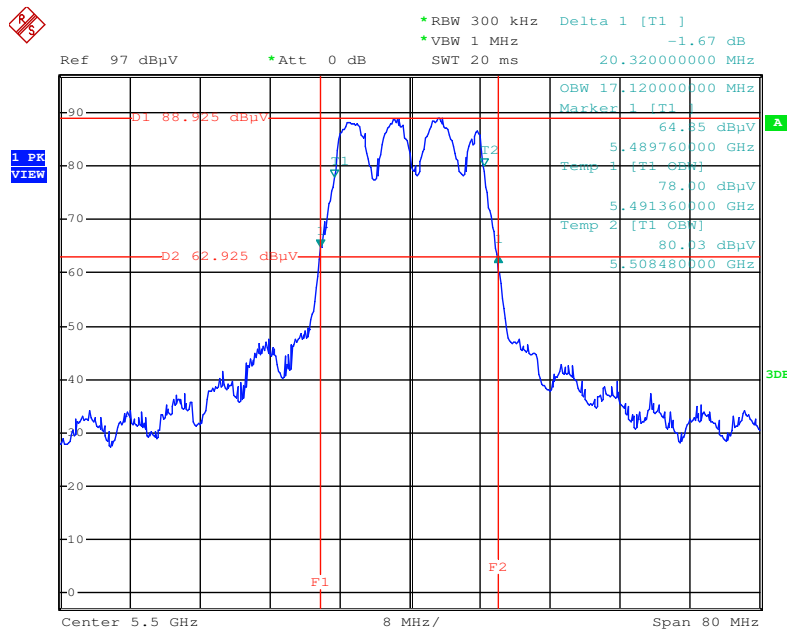


Date: 20.AUG.2014 17:47:48

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a /
Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz**

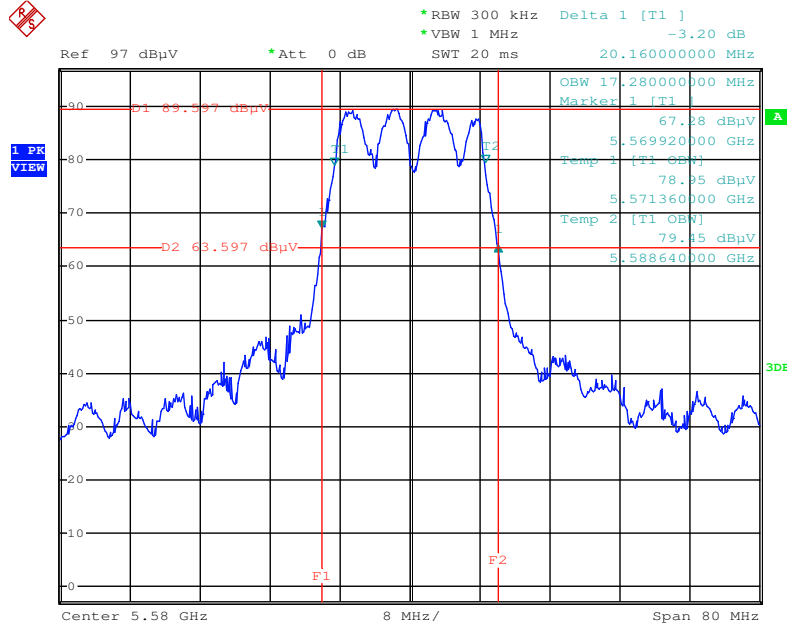

Date: 20.AUG.2014 17:49:55


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a /
Ant. 1 + Ant. 2 + Ant. 3 / 5700 MHz**

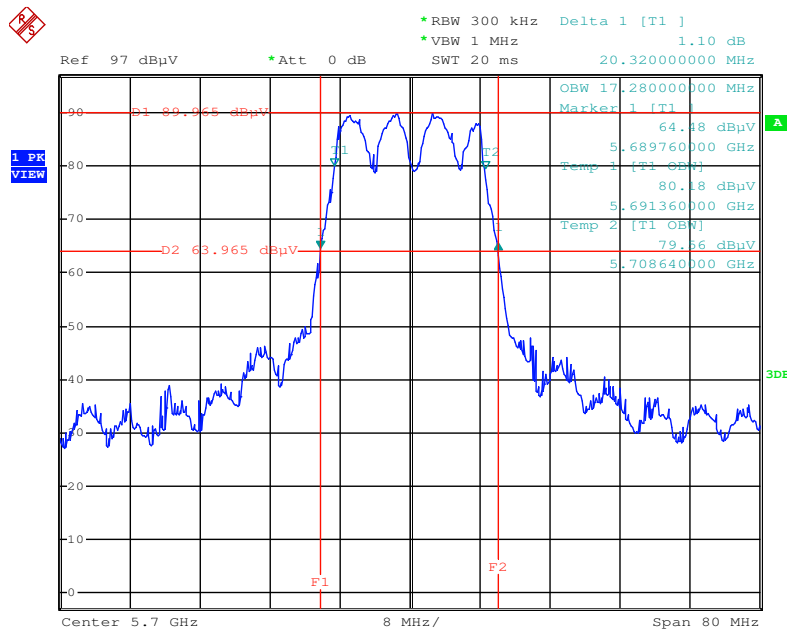

Date: 20.AUG.2014 17:51:10


<For Beamforming Mode>

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz

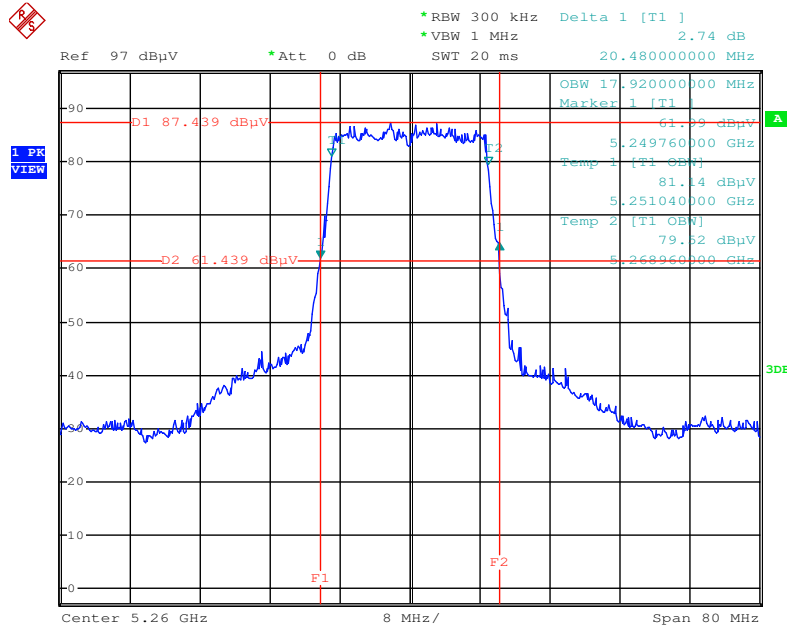


Date: 20.AUG.2014 19:30:59

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz

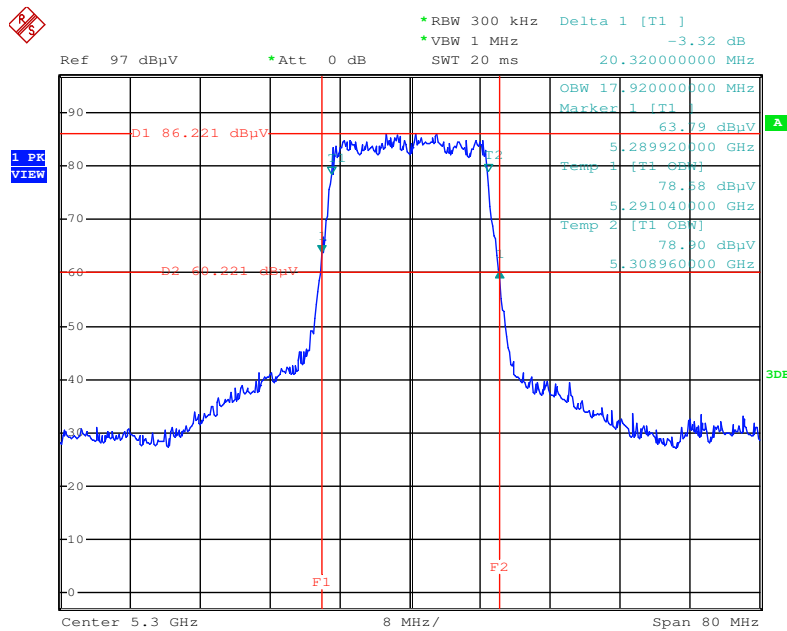


Date: 20.AUG.2014 19:32:25

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5320 MHz

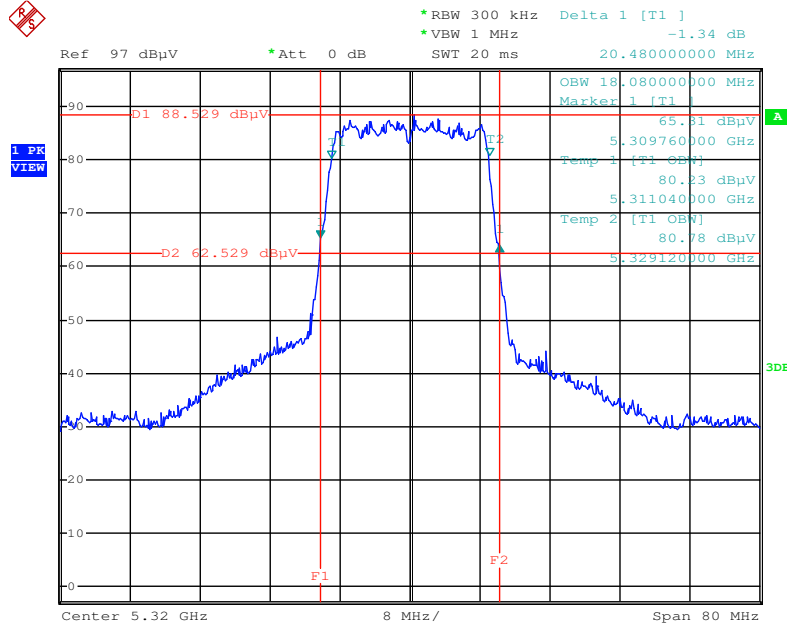


Date: 20.AUG.2014 19:33:41

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5500 MHz

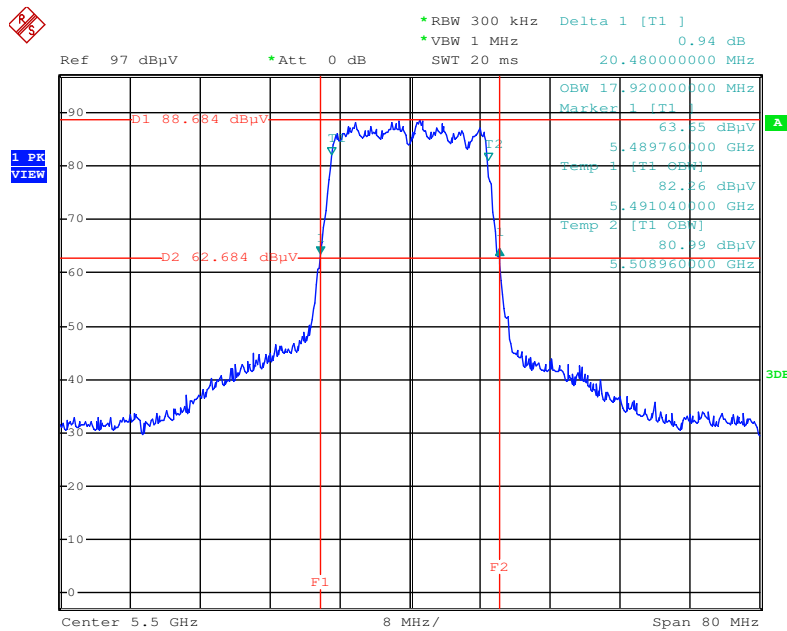


Date: 20.AUG.2014 19:35:08

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz

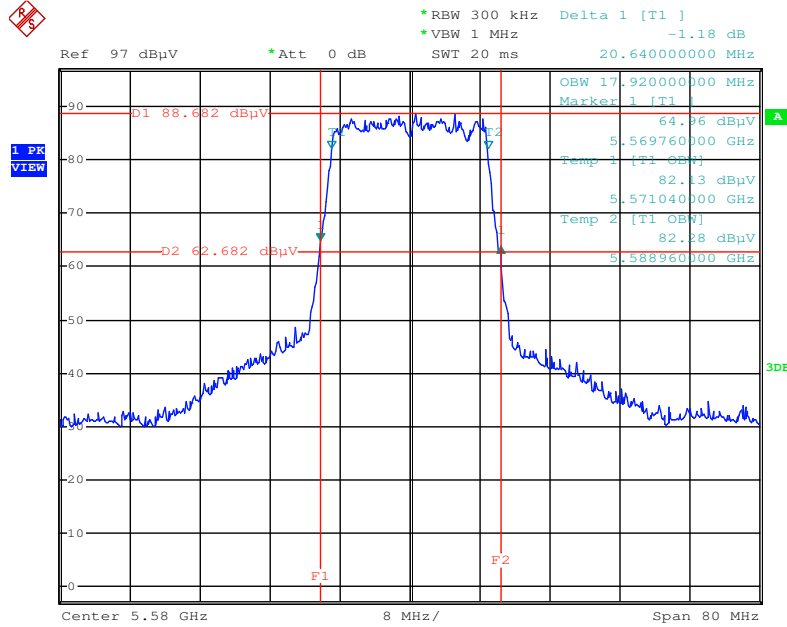


Date: 20.AUG.2014 19:36:18

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5700 MHz

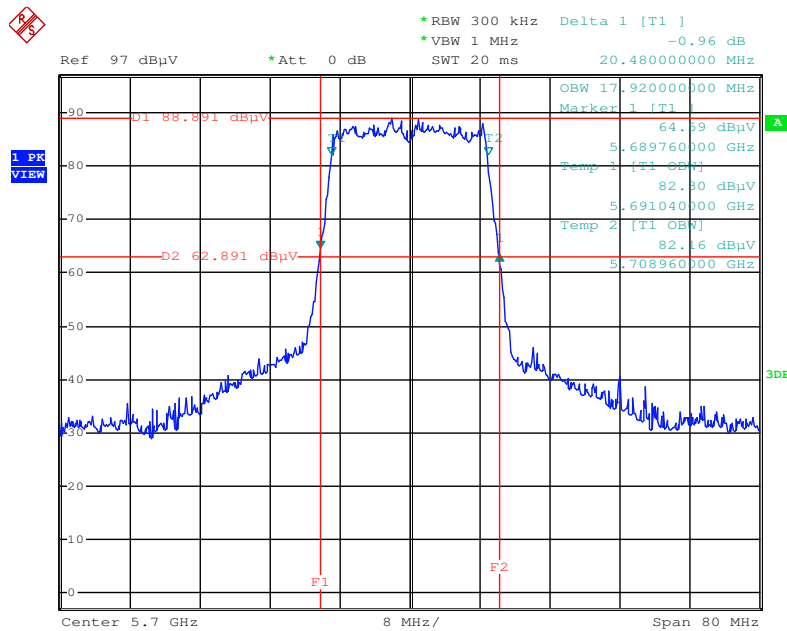


Date: 20.AUG.2014 19:37:44

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5270 MHz

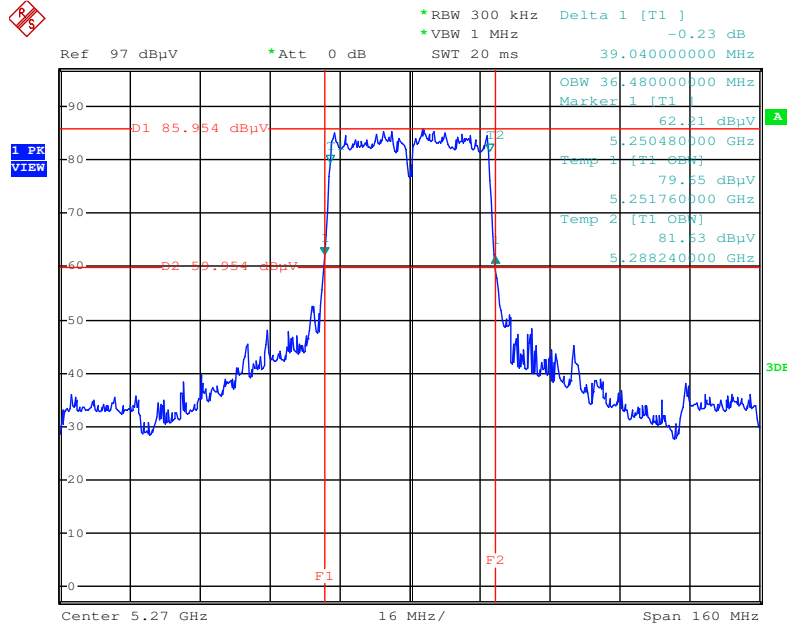


Date: 20.AUG.2014 19:39:28

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5310 MHz

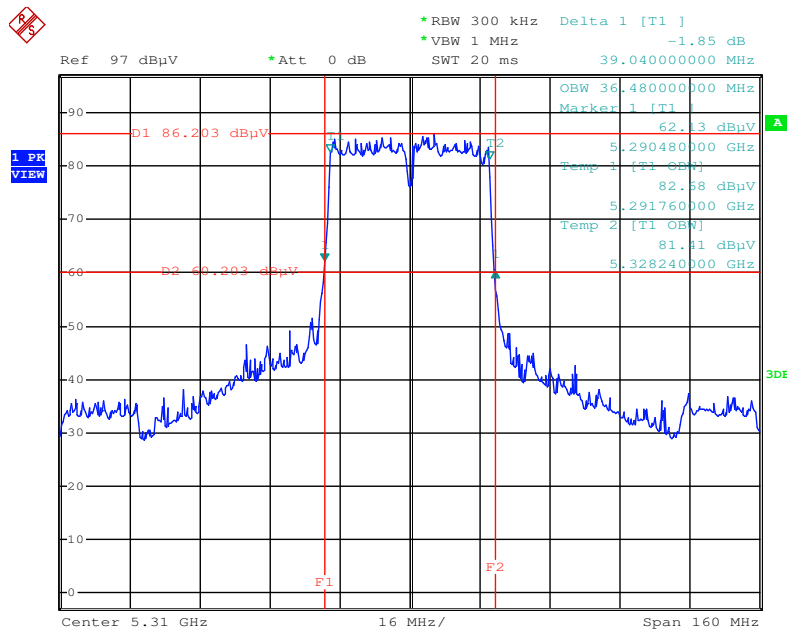


Date: 20.AUG.2014 19:40:38

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5510 MHz

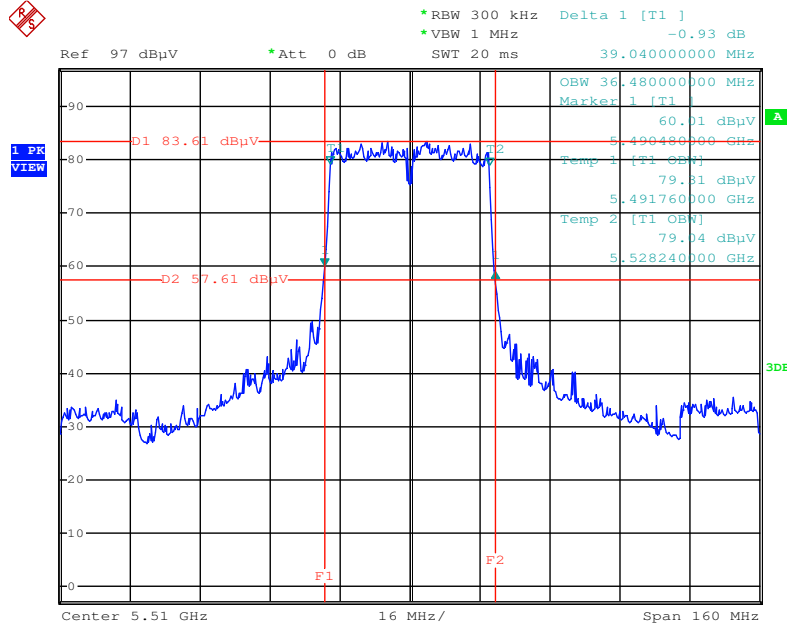


Date: 20.AUG.2014 19:41:56

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5550 MHz

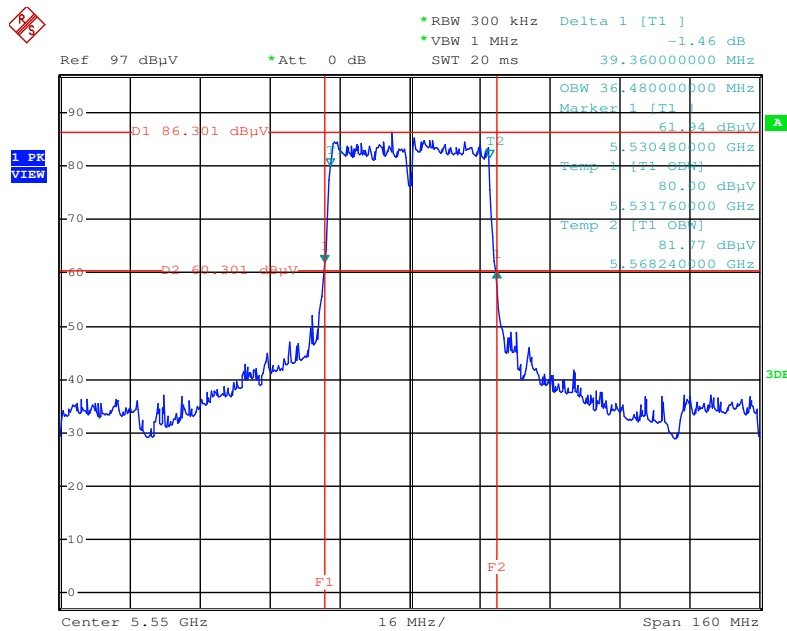


Date: 20.AUG.2014 19:43:10

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5670 MHz

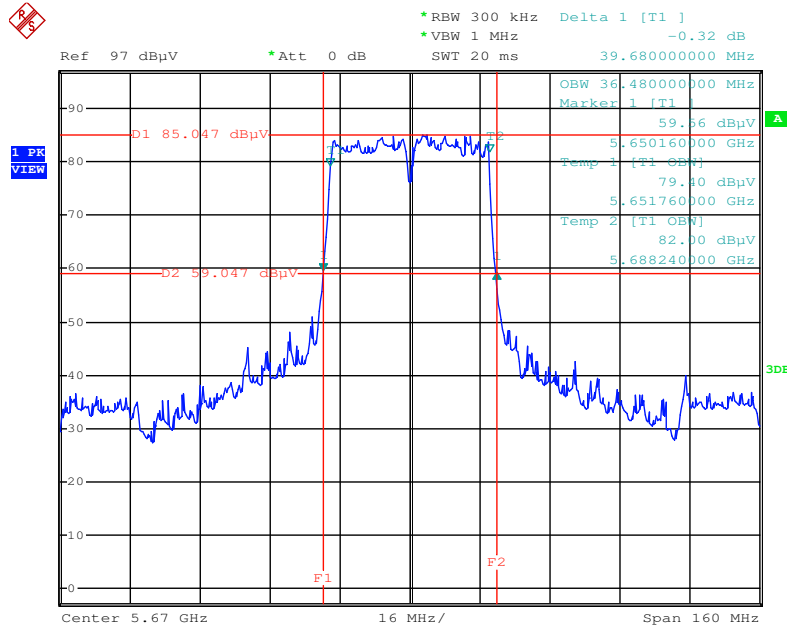


Date: 20.AUG.2014 19:44:27

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5290 MHz

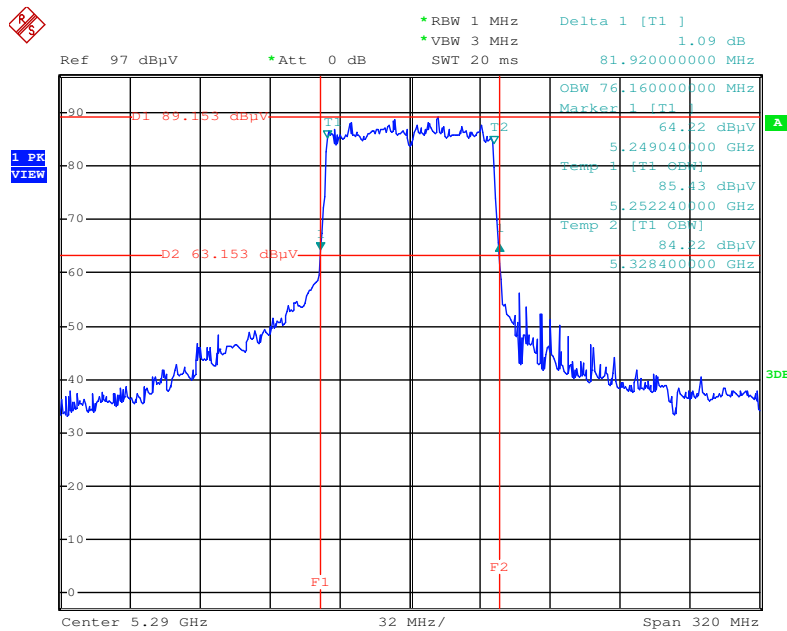


Date: 20.AUG.2014 19:46:33

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5530 MHz

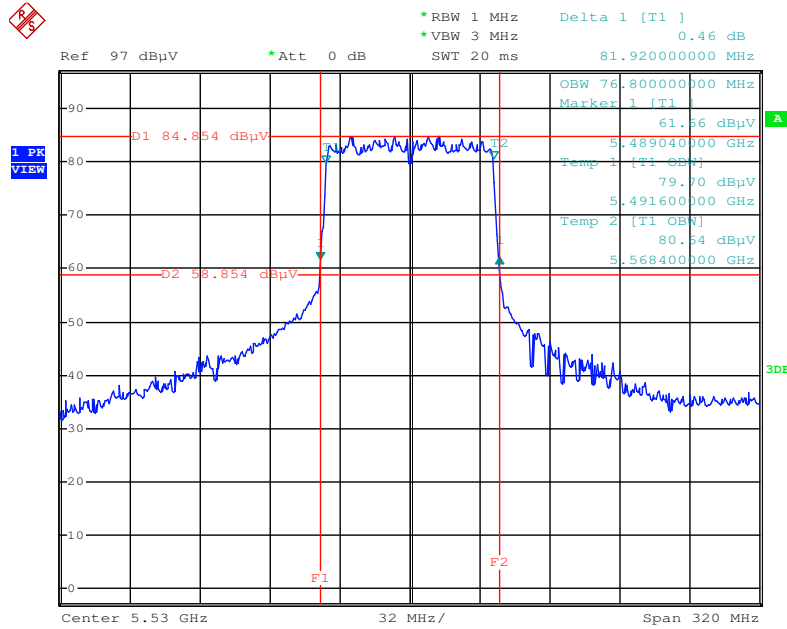

Date: 20.AUG.2014 19:47:55

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5610 MHz

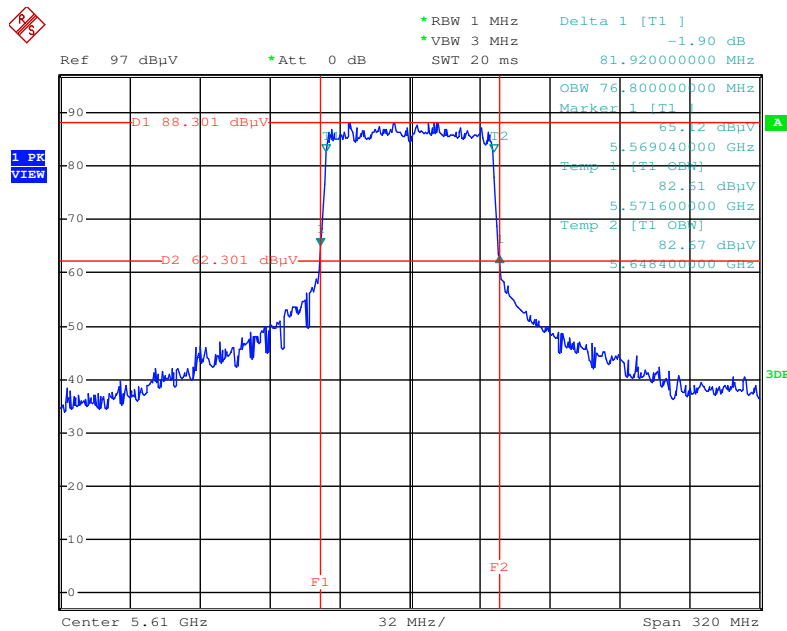

Date: 20.AUG.2014 19:50:47

4.3. Maximum Conducted Output Power Measurement

4.3.1. Limit

For the 5.25-5.35 GHz and 5.470-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or $11 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems were performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.3.4. Test Setup Layout



4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Maximum Conducted Output Power

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac
Test Date	Aug. 20, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
52	5260 MHz	14.53	15.25	15.47	19.87	24.00	Complies
60	5300 MHz	14.58	15.11	15.55	19.87	24.00	Complies
64	5320 MHz	14.05	14.77	15.19	19.47	24.00	Complies
100	5500 MHz	13.06	14.02	13.87	18.44	24.00	Complies
116	5580 MHz	16.35	16.62	16.21	21.17	24.00	Complies
140	5700 MHz	16.51	16.51	16.55	21.29	24.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
54	5270 MHz	16.56	17.37	17.01	21.76	24.00	Complies
62	5310 MHz	15.36	16.25	16.16	20.71	24.00	Complies
102	5510 MHz	13.42	14.38	14.31	18.83	24.00	Complies
110	5550 MHz	16.81	17.02	16.91	21.69	24.00	Complies
134	5670 MHz	18.31	18.28	18.21	23.04	24.00	Complies

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
58	5290 MHz	15.16	15.51	16.01	20.35	24.00	Complies
106	5530 MHz	11.85	12.68	13.22	17.39	24.00	Complies
122	5610 MHz	19.31	18.88	19.41	23.98	24.00	Complies

Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Configurations	IEEE 802.11a
Test Date	Aug. 20, 2014		

Configuration IEEE 802.11a

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
52	5260 MHz	13.63	14.11	14.61	18.91	24.00	Complies
60	5300 MHz	13.74	14.05	14.88	19.02	24.00	Complies
64	5320 MHz	13.72	14.09	14.79	18.99	24.00	Complies
100	5500 MHz	15.66	15.76	15.85	20.53	24.00	Complies
116	5580 MHz	16.42	16.62	16.48	21.28	24.00	Complies
140	5700 MHz	16.46	16.63	16.44	21.28	24.00	Complies

<For Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac
Test Date	Aug. 20, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
52	5260 MHz	13.92	14.48	14.87	19.21	20.90	Complies
60	5300 MHz	13.18	13.41	14.34	18.44	20.90	Complies
64	5320 MHz	14.66	15.27	15.52	19.94	20.90	Complies
100	5500 MHz	15.81	16.08	16.15	20.79	20.92	Complies
116	5580 MHz	15.86	16.17	16.16	20.84	20.92	Complies
140	5700 MHz	16.05	16.25	16.01	20.88	20.92	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{NS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.10\text{dBi} > 6\text{dBi}, \text{ so Band 2 Limit} = 24 - (9.10 - 6) = 20.90\text{dBm}$$

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{NS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.08\text{dBi} > 6\text{dBi}, \text{ so Band 3 Limit} = 24 - (9.10 - 6) = 20.92\text{dBm}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
54	5270 MHz	15.44	16.28	16.08	20.72	20.90	Complies
62	5310 MHz	15.36	16.25	16.16	20.71	20.90	Complies
102	5510 MHz	13.42	14.38	14.31	18.83	20.92	Complies
110	5550 MHz	15.95	16.17	16.12	20.85	20.92	Complies
134	5670 MHz	15.98	16.01	15.99	20.76	20.92	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{NS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.10\text{dBi} > 6\text{dBi}, \text{ so Band 2 Limit} = 24 - (9.10 - 6) = 20.90\text{dBm}$$

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{NS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.08\text{dBi} > 6\text{dBi}, \text{ so Band 3 Limit} = 24 - (9.10 - 6) = 20.92\text{dBm}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80

Channel	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Ant. 1	Ant. 2	Ant. 3	Total		
58	5290 MHz	15.52	15.75	16.18	20.60	20.90	Complies
106	5530 MHz	11.85	12.68	13.22	17.39	20.92	Complies
122	5610 MHz	15.84	15.87	16.25	20.76	20.92	Complies

Note:

$$\text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.10\text{dBi} > 6\text{dBi}, \text{ so Band 2 Limit} = 24 - (9.10 - 6) = 20.90\text{dBm}$$

$$\text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.08\text{dBi} > 6\text{dBi}, \text{ so Band 3 Limit} = 24 - (9.10 - 6) = 20.92\text{dBm}$$

4.4. Power Spectral Density Measurement

4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.25-5.35 GHz	11
5.470-5.725 GHz	11

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

4.4.4. Test Setup Layout

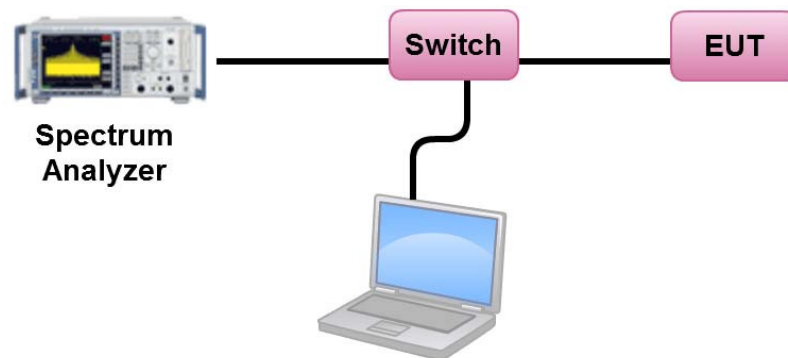

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Power Spectral Density

<For Non-Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac
Test Date	Aug. 20, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	6.64	7.90	Complies
60	5300 MHz	6.50	7.90	Complies
64	5320 MHz	6.04	7.90	Complies
100	5500 MHz	5.05	7.92	Complies
116	5580 MHz	7.77	7.92	Complies
140	5700 MHz	7.91	7.92	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 9.10\text{dBi} > 6\text{dBi}, \text{ so Band 2 Limit} = 11 - (9.10 - 6) = 7.90\text{dBm/MHz}$$

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 9.08\text{dBi} > 6\text{dBi}, \text{ so Band 3 Limit} = 11 - (9.08 - 6) = 7.92\text{dBm/MHz}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270 MHz	5.56	7.90	Complies
62	5310 MHz	4.45	7.90	Complies
102	5510 MHz	2.38	7.92	Complies
110	5550 MHz	5.29	7.92	Complies
134	5670 MHz	6.66	7.92	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 9.10\text{dBi} > 6\text{dBi}, \text{ so Band 2 Limit} = 11 - (9.10 - 6) = 7.90\text{dBm/MHz}$$

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} G_{j,k} \right\}^2}{N_{ANT}} \right] = 9.08\text{dBi} > 6\text{dBi}, \text{ so Band 3 Limit} = 11 - (9.08 - 6) = 7.92\text{dBm/MHz}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58	5290 MHz	0.91	7.90	Complies
106	5530 MHz	-2.04	7.92	Complies
122	5610 MHz	4.48	7.92	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.10 \text{dBi} > 6 \text{dBi}, \text{ so Band 2 Limit} = 11 - (9.10 - 6) = 7.90 \text{dBm/MHz}$$

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.08 \text{dBi} > 6 \text{dBi}, \text{ so Band 3 Limit} = 11 - (9.08 - 6) = 7.92 \text{dBm/MHz}$$

Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Configurations	IEEE 802.11a
Test Date	Aug. 20, 2014		

Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	5.52	7.90	Complies
60	5300 MHz	5.71	7.90	Complies
64	5320 MHz	5.56	7.90	Complies
100	5500 MHz	7.17	7.92	Complies
116	5580 MHz	7.88	7.92	Complies
140	5700 MHz	7.84	7.92	Complies

Note:

$$\text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.10\text{dBi} > 6\text{dBi}, \text{ so Band 2 Limit} = 11 - (9.10 - 6) = 7.90\text{dBm/MHz}$$

$$\text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.08\text{dBi} > 6\text{dBi}, \text{ so Band 3 Limit} = 11 - (9.08 - 6) = 7.92\text{dBm/MHz}$$

<For Beamforming Mode>

Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Configurations	IEEE 802.11ac
Test Date	Aug. 20, 2014		

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
52	5260 MHz	5.91	7.90	Complies
60	5300 MHz	4.99	7.90	Complies
64	5320 MHz	6.49	7.90	Complies
100	5500 MHz	7.60	7.92	Complies
116	5580 MHz	7.37	7.92	Complies
140	5700 MHz	7.43	7.92	Complies

Note:

$$\text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.10\text{dBi} > 6\text{dBi}, \text{ so Band 2 Limit} = 11 - (9.10 - 6) = 7.90\text{dBm/MHz}$$

$$\text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.08\text{dBi} > 6\text{dBi}, \text{ so Band 3 Limit} = 11 - (9.08 - 6) = 7.92\text{dBm/MHz}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
54	5270 MHz	4.30	7.90	Complies
62	5310 MHz	4.45	7.90	Complies
102	5510 MHz	2.38	7.92	Complies
110	5550 MHz	4.33	7.92	Complies
134	5670 MHz	4.45	7.92	Complies

Note:

$$\text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.10\text{dBi} > 6\text{dBi}, \text{ so Band 2 Limit} = 11 - (9.10 - 6) = 7.90\text{dBm/MHz}$$

$$\text{DirectionalGain} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.08\text{dBi} > 6\text{dBi}, \text{ so Band 3 Limit} = 11 - (9.08 - 6) = 7.92\text{dBm/MHz}$$

Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3

Channel	Frequency	Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
58	5290 MHz	1.24	7.90	Complies
106	5530 MHz	-2.04	7.92	Complies
122	5610 MHz	1.38	7.92	Complies

Note:

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \frac{\sum_{k=1}^{N_{ANT}} G_{j,k}}{N_{ANT}} \right\}^2}{N_{ANT}} \right] = 9.10 \text{dBi} > 6 \text{dBi}, \text{ so Band 2 Limit} = 11 - (9.10 - 6) = 7.90 \text{dBm/MHz}$$


$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \frac{\sum_{k=1}^{N_{ANT}} G_{j,k}}{N_{ANT}} \right\}^2}{N_{ANT}} \right] = 9.08 \text{dBi} > 6 \text{dBi}, \text{ so Band 3 Limit} = 11 - (9.08 - 6) = 7.92 \text{dBm/MHz}$$

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

<For Non-Beamforming Mode>


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5260 MHz

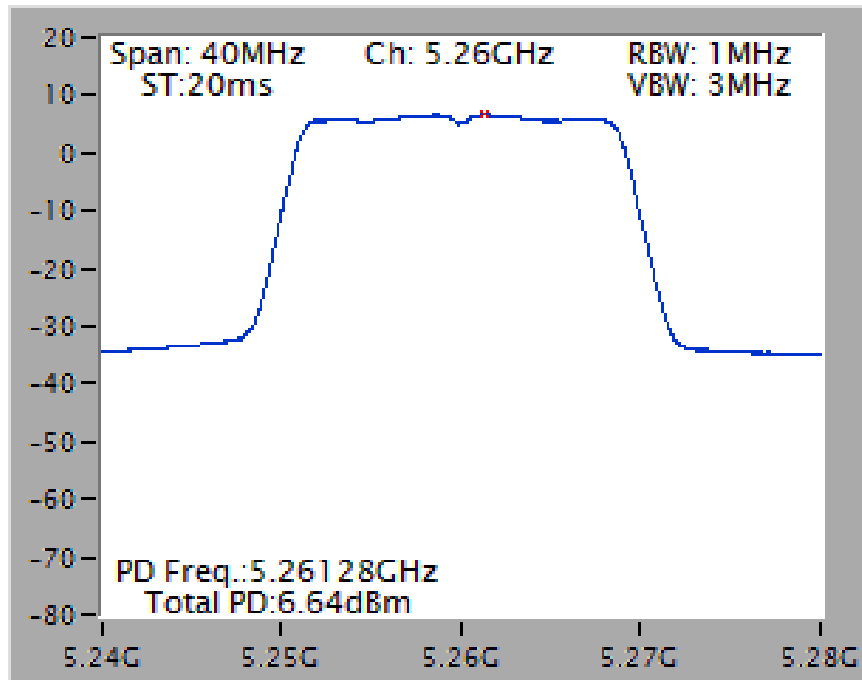


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5700 MHz

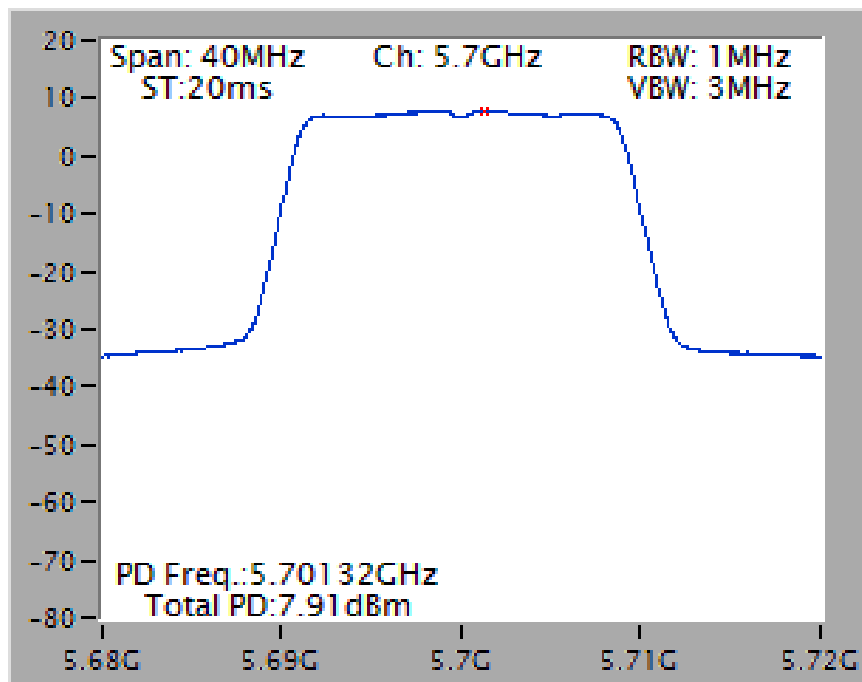


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5270 MHz

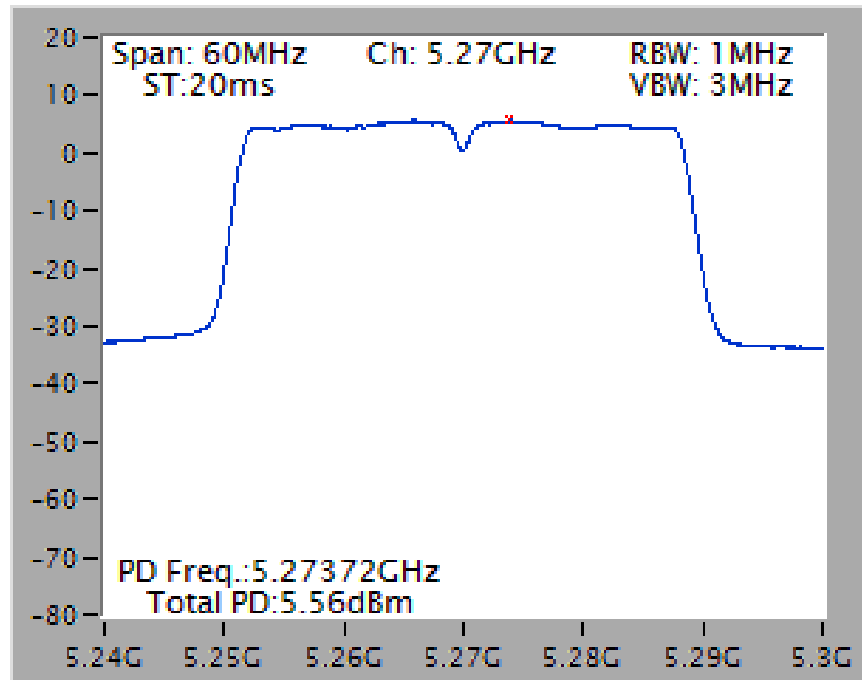


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5670 MHz

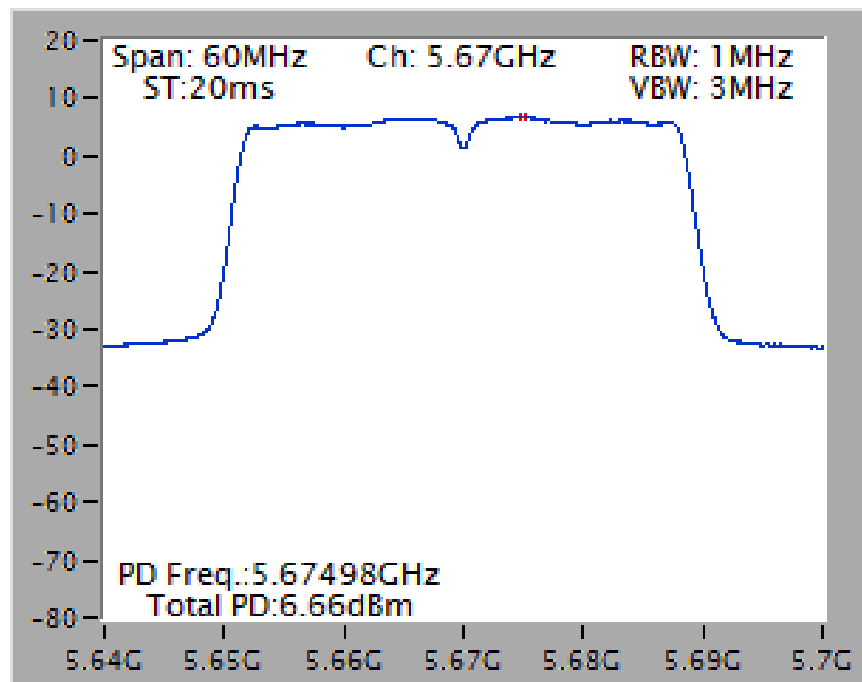


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5290 MHz

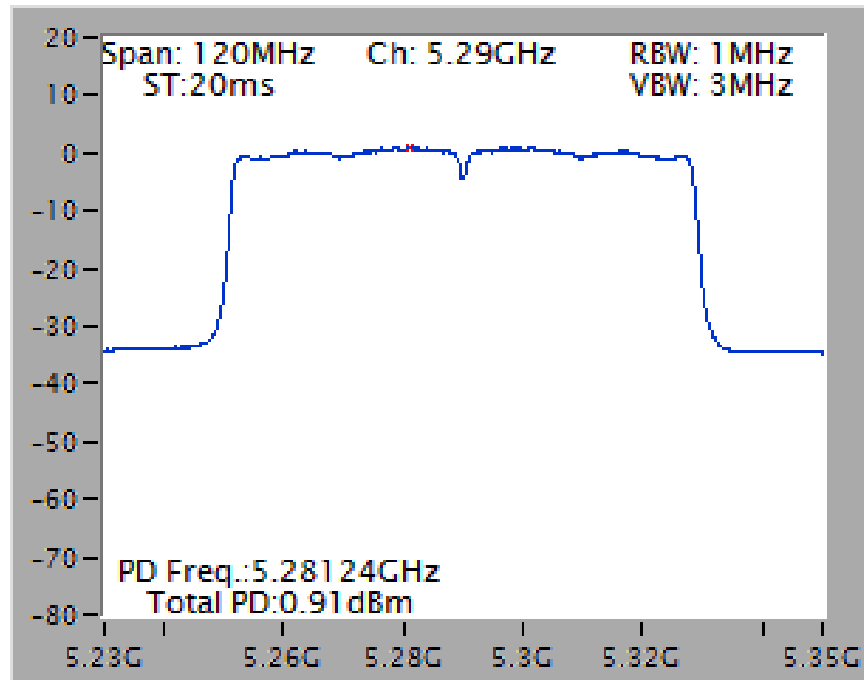


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5610 MHz

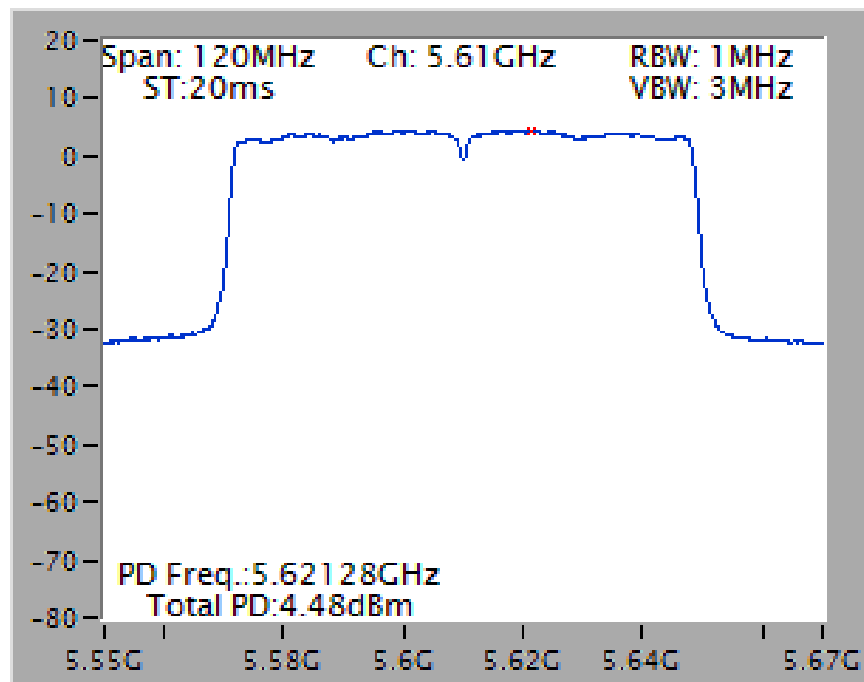

Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5300 MHz

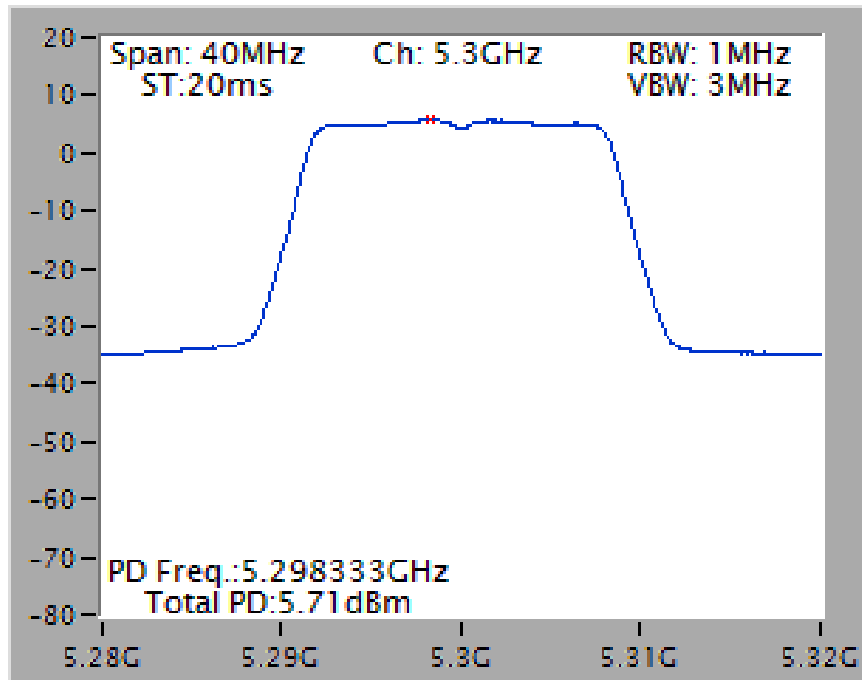


Power Density Plot on Configuration IEEE 802.11a / Ant. 1 + Ant. 2 + Ant. 3 / 5580 MHz

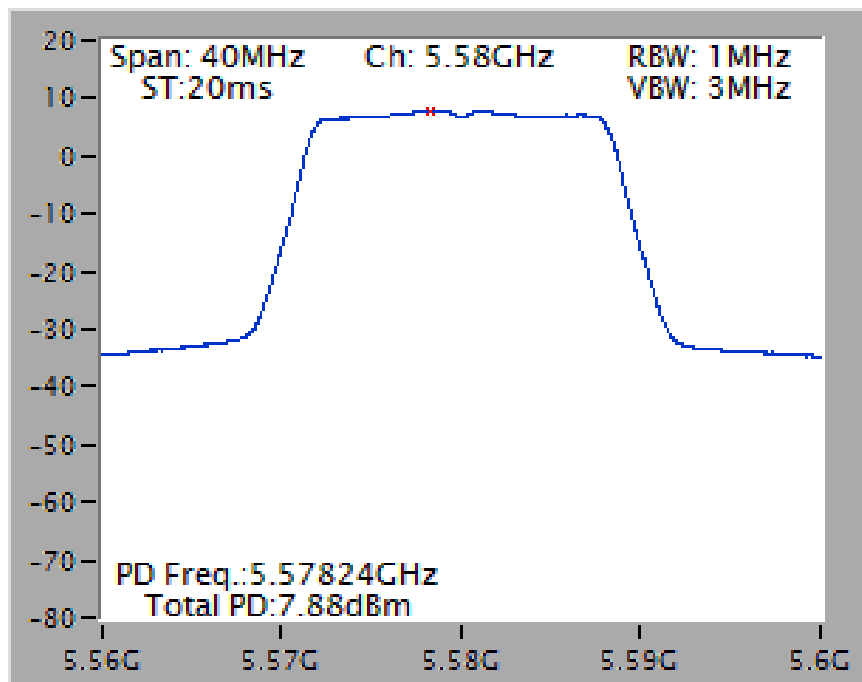


<For Beamforming Mode>


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5320 MHz

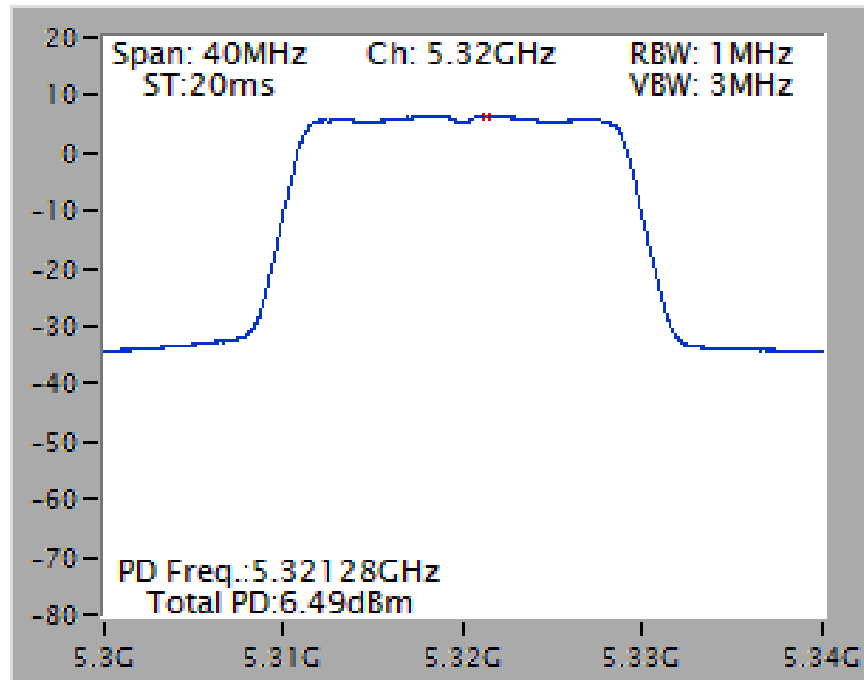


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Ant. 1 + Ant. 2 + Ant. 3 / 5500 MHz

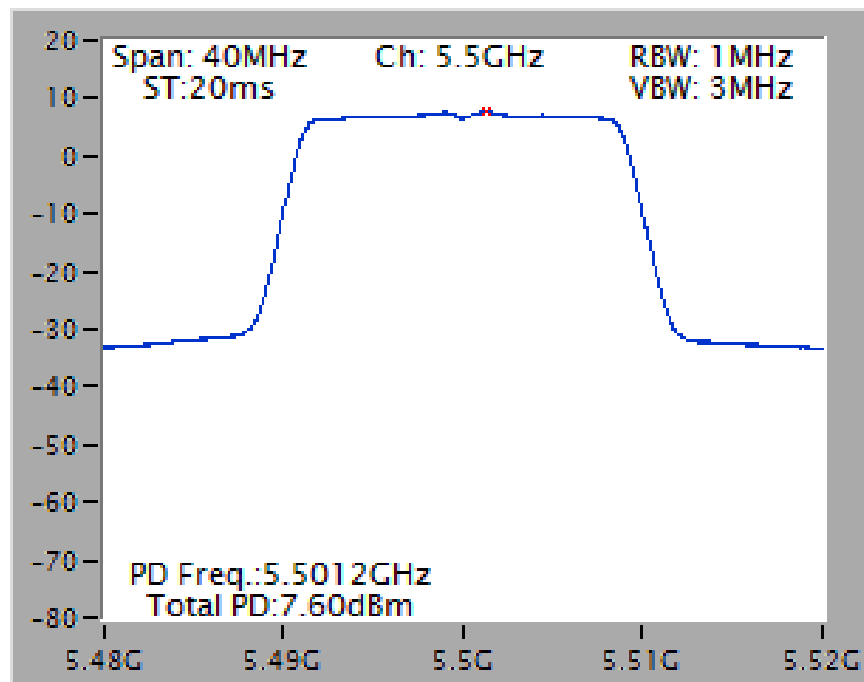


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5310 MHz

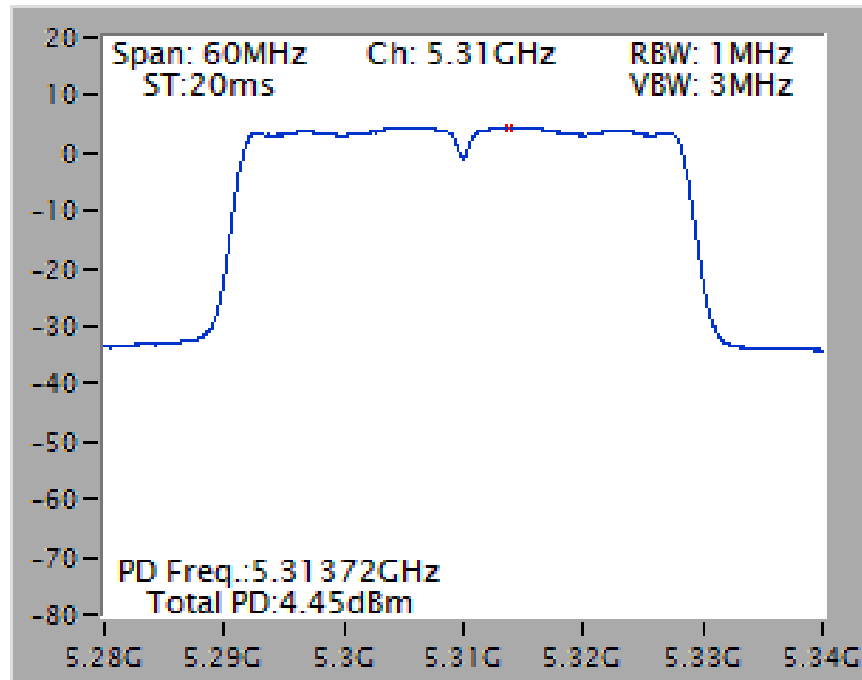


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Ant. 1 + Ant. 2 + Ant. 3 / 5670 MHz

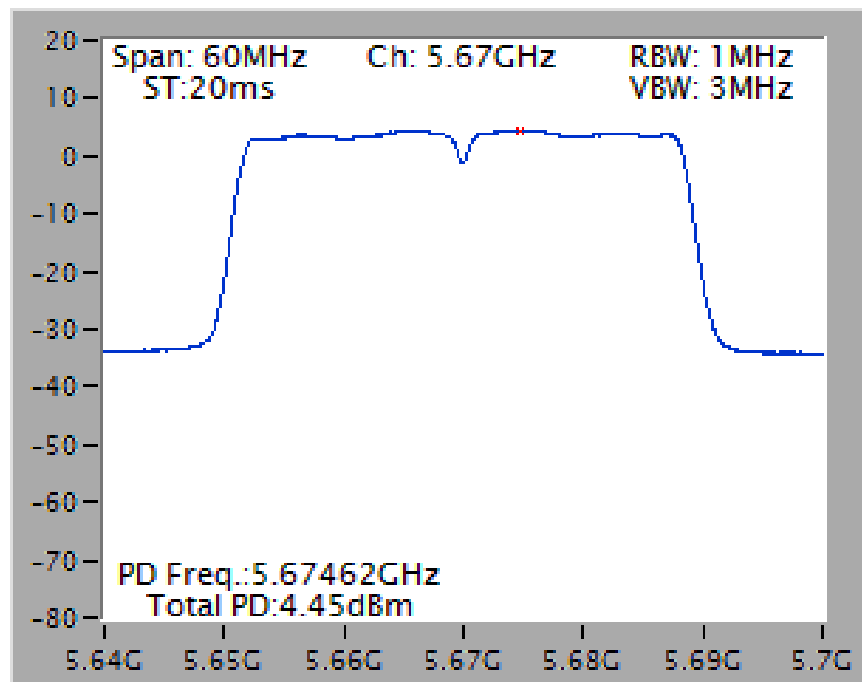

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5290 MHz

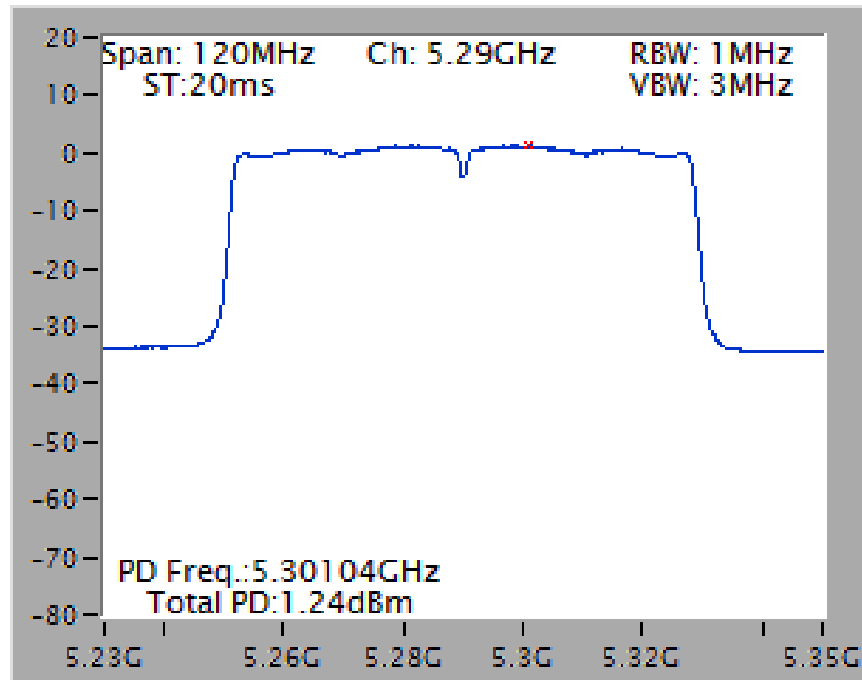

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Ant. 1 + Ant. 2 + Ant. 3 / 5610 MHz

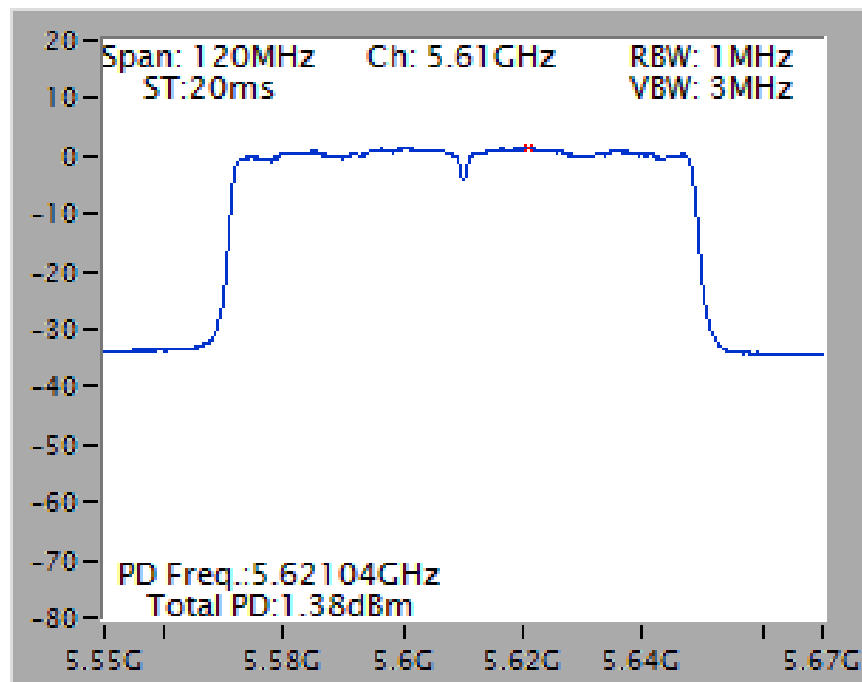

4.5. Radiated Emissions Measurement

4.5.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

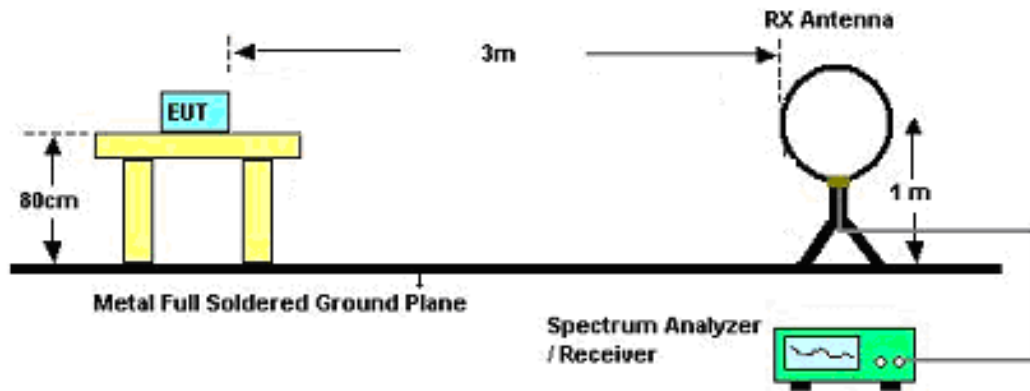

For Radiated Emissions: 30MHz~1GHz

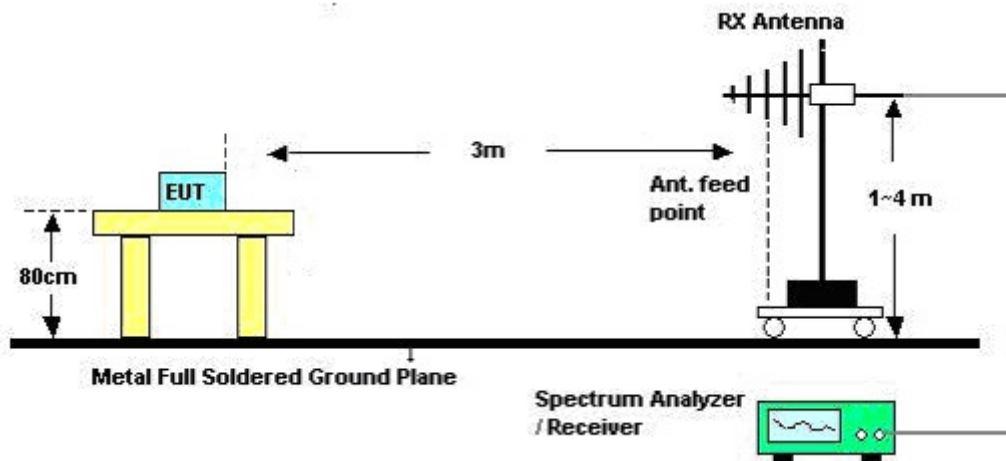

For Radiated Emissions: Above 1GHz

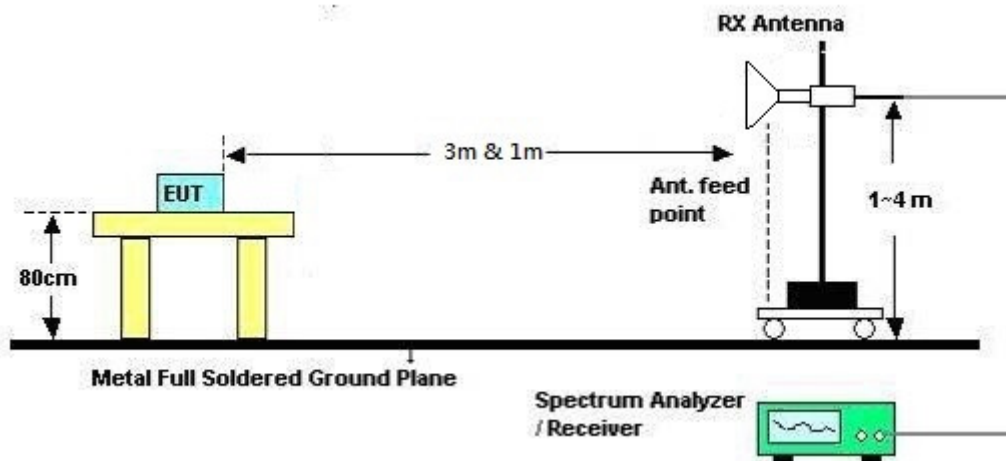

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	CTX
Test Date	Jul. 01, 2014	Test Mode	Mode 1

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24°C	Humidity	61%
Test Engineer	Magic Lai	Configurations	CTX
Test Mode	Mode 1		

Horizontal

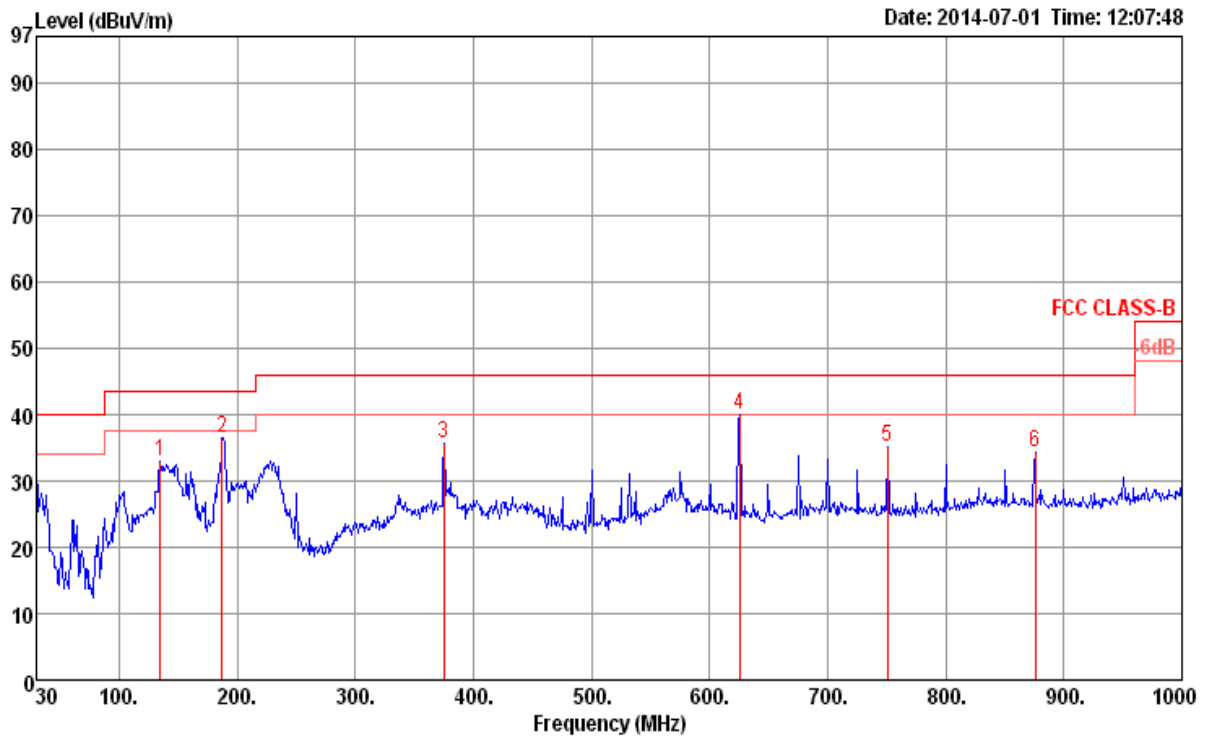

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	134.76	32.91	43.50	-10.59	46.64	1.40	12.30	27.43	Peak	100	0	HORIZONTAL
2	187.14	36.38	43.50	-7.12	50.23	1.60	11.71	27.16	Peak	100	0	HORIZONTAL
3	375.32	35.69	46.00	-10.31	45.52	2.20	15.40	27.43	Peak	100	0	HORIZONTAL
4	625.58	39.91	46.00	-6.09	46.23	2.90	18.85	28.07	Peak	100	0	HORIZONTAL
5	750.71	35.02	46.00	-10.98	40.19	3.20	19.43	27.80	Peak	100	0	HORIZONTAL
6	875.84	34.36	46.00	-11.64	38.00	3.46	20.35	27.45	Peak	100	0	HORIZONTAL

Vertical

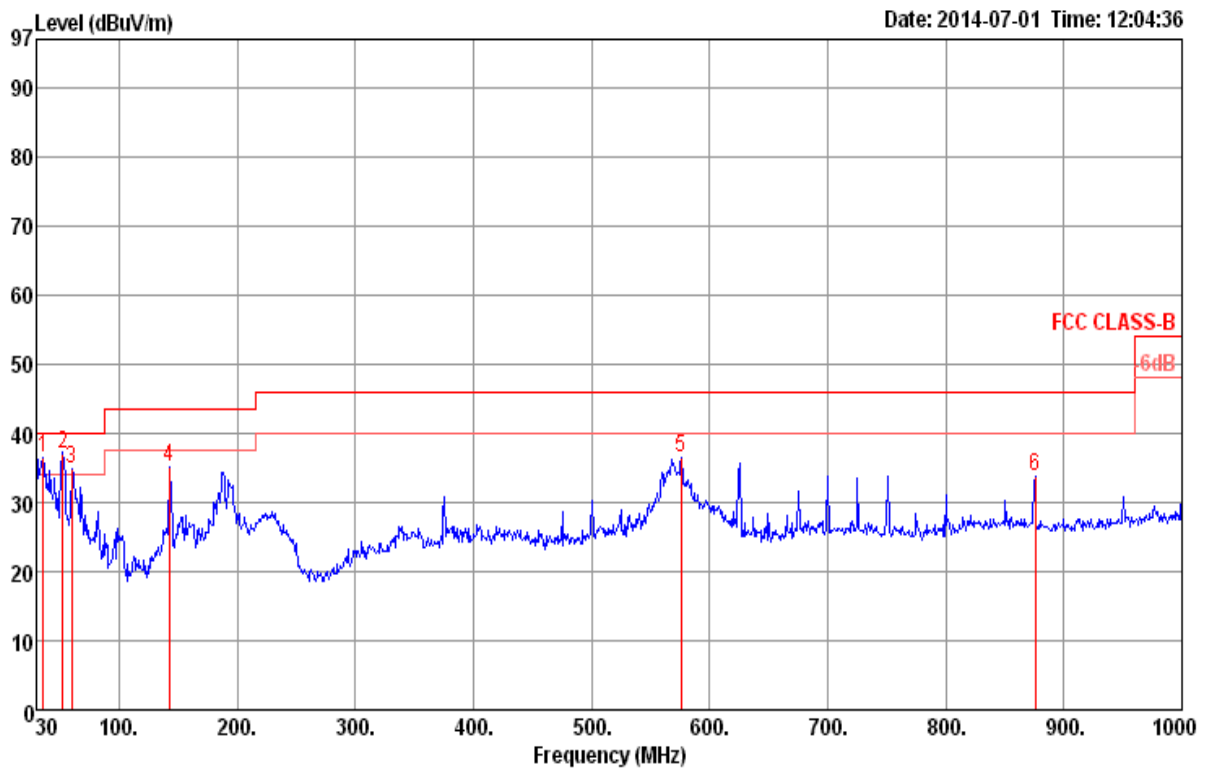

	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos			
Freq	Line	Limit	Level	Loss	Factor	Factor	Remark		Pol/Phase		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	35.82	36.38	40.00	-3.62	48.00	0.69	15.49	27.80	Peak	400	0 VERTICAL
2	52.31	36.97	40.00	-3.03	55.72	0.86	8.18	27.79	Peak	400	0 VERTICAL
3	60.07	34.94	40.00	-5.06	55.02	0.91	6.77	27.76	Peak	400	0 VERTICAL
4	142.52	35.14	43.50	-8.36	48.89	1.43	12.21	27.39	Peak	400	0 VERTICAL
5	576.11	36.61	46.00	-9.39	43.42	2.80	18.49	28.10	Peak	400	0 VERTICAL
6	875.84	33.79	46.00	-12.21	37.43	3.46	20.35	27.45	Peak	400	0 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~40GHz)

<For Non-Beamforming Mode>

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15792.70	43.39	54.00	-10.61	31.99	7.94	38.47	35.01	HORIZONTAL	100	245 Average
2	15793.00	56.04	74.00	-17.96	44.64	7.94	38.47	35.01	HORIZONTAL	100	245 Peak

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15767.10	57.39	74.00	-16.61	45.97	7.93	38.48	34.99	VERTICAL	100	344 Peak
2	15799.40	43.56	54.00	-10.44	32.17	7.95	38.45	35.01	VERTICAL	100	344 Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15913.70	44.60	54.00	-9.40	33.37	7.98	38.37	35.12	HORIZONTAL	100	247	Average
2	15919.40	57.87	74.00	-16.13	46.64	7.99	38.36	35.12	HORIZONTAL	100	247	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15917.40	44.77	54.00	-9.23	33.54	7.98	38.37	35.12	VERTICAL	100	289	Average
2	15923.00	57.25	74.00	-16.75	46.02	7.99	38.36	35.12	VERTICAL	100	289	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10618.00	39.77	54.00	-14.23	29.89	6.60	38.38	35.10	HORIZONTAL	100	235	Average
2	10629.50	52.88	74.00	-21.12	42.98	6.60	38.38	35.08	HORIZONTAL	100	235	Peak
3	15935.10	44.46	54.00	-9.54	33.27	7.99	38.34	35.14	HORIZONTAL	100	171	Average
4	15944.20	57.30	74.00	-16.70	46.11	7.99	38.34	35.14	HORIZONTAL	100	171	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10631.10	39.90	54.00	-14.10	30.02	6.59	38.37	35.08	VERTICAL	100	169	Average
2	10653.10	52.61	74.00	-21.39	42.72	6.58	38.37	35.06	VERTICAL	100	169	Peak
3	15935.70	44.57	54.00	-9.43	33.38	7.99	38.34	35.14	VERTICAL	100	100	Average
4	15973.20	57.17	74.00	-16.83	46.02	8.00	38.31	35.16	VERTICAL	100	100	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10983.40	39.60	54.00	-14.40	29.64	6.47	38.30	34.81	HORIZONTAL	100	297	Average
2	11014.70	52.36	74.00	-21.64	42.40	6.47	38.30	34.81	HORIZONTAL	100	297	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10982.90	39.69	54.00	-14.31	29.75	6.47	38.30	34.83	VERTICAL	100	222	Average
2	10992.80	52.06	74.00	-21.94	42.11	6.46	38.30	34.81	VERTICAL	100	222	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 116 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11154.70	51.94	74.00	-22.06	41.90	6.55	38.30	34.81	HORIZONTAL	100	276	Peak
2	11160.60	40.18	54.00	-13.82	30.13	6.56	38.30	34.81	HORIZONTAL	100	276	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11162.60	40.21	54.00	-13.79	30.16	6.56	38.30	34.81	VERTICAL	100	60	Average
2	11181.30	52.94	74.00	-21.06	42.88	6.57	38.30	34.81	VERTICAL	100	60	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11402.60	40.96	54.00	-13.04	30.79	6.69	38.30	34.82	HORIZONTAL	100	36	Average
2	11414.40	53.43	74.00	-20.57	43.25	6.70	38.30	34.82	HORIZONTAL	100	36	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11386.00	40.38	54.00	-13.62	30.22	6.68	38.30	34.82	VERTICAL	100	316	Average
2	11423.30	53.03	74.00	-20.97	42.85	6.70	38.30	34.82	VERTICAL	100	316	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15794.20	43.59	54.00	-10.41	32.19	7.94	38.47	35.01	HORIZONTAL	100	330	Average
2	15815.90	56.18	74.00	-17.82	44.82	7.95	38.44	35.03	HORIZONTAL	100	330	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15789.00	43.68	54.00	-10.32	32.28	7.94	38.47	35.01	VERTICAL	100	359	Average
2	15825.00	56.21	74.00	-17.79	44.85	7.95	38.44	35.03	VERTICAL	100	359	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15911.90	44.72	54.00	-9.28	33.49	7.98	38.37	35.12	HORIZONTAL	100	311	Average
2	15938.30	57.42	74.00	-16.58	46.23	7.99	38.34	35.14	HORIZONTAL	100	311	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15932.90	57.20	74.00	-16.80	45.99	7.99	38.36	35.14	VERTICAL	100	274	Peak
2	15934.90	44.49	54.00	-9.51	33.30	7.99	38.34	35.14	VERTICAL	100	274	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11025.10	39.48	54.00	-14.52	29.51	6.48	38.30	34.81	HORIZONTAL	100	147	Average
2	11036.00	52.35	74.00	-21.65	42.38	6.48	38.30	34.81	HORIZONTAL	100	147	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10998.80	39.59	54.00	-14.41	29.64	6.46	38.30	34.81	VERTICAL	100	330	Average
2	11035.10	52.47	74.00	-21.53	42.50	6.48	38.30	34.81	VERTICAL	100	330	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 110 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11080.00	40.24	54.00	-13.76	30.24	6.51	38.30	34.81	HORIZONTAL	100	261	Average
2	11108.90	52.39	74.00	-21.61	42.37	6.53	38.30	34.81	HORIZONTAL	100	261	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11079.50	39.99	54.00	-14.01	29.99	6.51	38.30	34.81	VERTICAL	100	187	Average
2	11111.10	52.66	74.00	-21.34	42.64	6.53	38.30	34.81	VERTICAL	100	187	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 134 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11228.80	52.65	74.00	-21.35	42.56	6.60	38.30	34.81	HORIZONTAL	100	204	Peak
2	11242.70	39.86	54.00	-14.14	29.77	6.61	38.30	34.82	HORIZONTAL	100	204	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11209.10	52.07	74.00	-21.93	41.99	6.59	38.30	34.81	VERTICAL	100	158	Peak
2	11244.20	39.91	54.00	-14.09	29.82	6.61	38.30	34.82	VERTICAL	100	158	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15850.80	56.39	74.00	-17.61	45.07	7.96	38.41	35.05	HORIZONTAL	100	276	Peak
2	15861.90	43.95	54.00	-10.05	32.65	7.96	38.41	35.07	HORIZONTAL	100	276	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15858.20	44.00	54.00	-10.00	32.70	7.96	38.41	35.07	VERTICAL	100	11	Average
2	15872.10	56.61	74.00	-17.39	45.31	7.97	38.40	35.07	VERTICAL	100	11	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 106 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11072.20	40.00	54.00	-14.00	30.01	6.50	38.30	34.81	HORIZONTAL	100	277	Average
2	11084.40	52.88	74.00	-21.12	42.88	6.51	38.30	34.81	HORIZONTAL	100	277	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11079.80	52.62	74.00	-21.38	42.62	6.51	38.30	34.81	VERTICAL	100	144	Peak
2	11085.00	39.98	54.00	-14.02	29.98	6.51	38.30	34.81	VERTICAL	100	144	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 122 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11221.00	52.84	74.00	-21.16	42.76	6.59	38.30	34.81	HORIZONTAL	100	323	Peak
2	11226.92	40.22	54.00	-13.78	30.13	6.60	38.30	34.81	HORIZONTAL	100	323	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11222.56	40.10	54.00	-13.90	30.02	6.59	38.30	34.81	VERTICAL	100	41	Average
2	11229.56	53.15	74.00	-20.85	43.06	6.60	38.30	34.81	VERTICAL	100	41	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 52 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15770.90	43.74	54.00	-10.26	32.32	7.93	38.48	34.99	HORIZONTAL	100	23	Average
2	15789.40	56.67	74.00	-17.33	45.27	7.94	38.47	35.01	HORIZONTAL	100	23	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15787.50	43.42	54.00	-10.58	32.02	7.94	38.47	35.01	VERTICAL	100	89	Average
2	15790.00	55.66	74.00	-18.34	44.26	7.94	38.47	35.01	VERTICAL	100	89	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 60 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15911.00	56.71	74.00	-17.29	45.48	7.98	38.37	35.12	HORIZONTAL	100	245	Peak
2	15924.20	44.54	54.00	-9.46	33.31	7.99	38.36	35.12	HORIZONTAL	100	245	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15911.80	56.92	74.00	-17.08	45.69	7.98	38.37	35.12	VERTICAL	100	55	Peak
2	15917.80	44.63	54.00	-9.37	33.40	7.99	38.36	35.12	VERTICAL	100	55	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10624.20	39.72	54.00	-14.28	29.84	6.60	38.38	35.10	HORIZONTAL	100	149	Average
2	10655.40	52.30	74.00	-21.70	42.41	6.58	38.37	35.06	HORIZONTAL	100	149	Peak
3	15942.90	44.52	54.00	-9.48	33.33	7.99	38.34	35.14	HORIZONTAL	100	13	Average
4	15947.40	57.54	74.00	-16.46	46.35	7.99	38.34	35.14	HORIZONTAL	100	13	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10615.50	39.60	54.00	-14.40	29.72	6.60	38.38	35.10	VERTICAL	100	123	Average
2	10638.20	53.12	74.00	-20.88	43.24	6.59	38.37	35.08	VERTICAL	100	123	Peak
3	15936.60	44.72	54.00	-9.28	33.53	7.99	38.34	35.14	VERTICAL	100	265	Average
4	15937.70	56.51	74.00	-17.49	45.32	7.99	38.34	35.14	VERTICAL	100	265	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 100 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10979.40	52.18	74.00	-21.82	42.24	6.47	38.30	34.83	HORIZONTAL	100	231	Peak
2	11006.80	39.74	54.00	-14.26	29.78	6.47	38.30	34.81	HORIZONTAL	100	231	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10988.80	52.94	74.00	-21.06	42.99	6.46	38.30	34.81	VERTICAL	100	24	Peak
2	10997.70	39.98	54.00	-14.02	30.03	6.46	38.30	34.81	VERTICAL	100	24	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 116 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11139.30	39.56	54.00	-14.44	29.53	6.54	38.30	34.81	HORIZONTAL	100	68	Average
2	11144.50	52.21	74.00	-21.79	42.17	6.55	38.30	34.81	HORIZONTAL	100	68	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11167.70	52.64	74.00	-21.36	42.59	6.56	38.30	34.81	VERTICAL	100	152	Peak
2	11183.70	39.71	54.00	-14.29	29.65	6.57	38.30	34.81	VERTICAL	100	152	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11396.40	40.55	54.00	-13.45	30.38	6.69	38.30	34.82	HORIZONTAL	100	286	Average
2	11408.80	52.45	74.00	-21.55	42.28	6.69	38.30	34.82	HORIZONTAL	100	286	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11395.10	53.35	74.00	-20.65	43.19	6.68	38.30	34.82	VERTICAL	100	348	Peak
2	11399.90	40.61	54.00	-13.39	30.44	6.69	38.30	34.82	VERTICAL	100	348	Average

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Beamforming Mode>

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	cm	deg	
1	15787.76	55.37	74.00	-18.63	43.97	7.94	38.47	35.01	HORIZONTAL	100	109	Peak
2	15789.32	42.23	54.00	-11.77	30.83	7.94	38.47	35.01	HORIZONTAL	685	109	Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	cm	deg	
1	15774.08	55.76	74.00	-18.24	44.34	7.93	38.48	34.99	VERTICAL	100	355	Peak
2	15790.00	42.40	54.00	-11.60	31.00	7.94	38.47	35.01	VERTICAL	100	355	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10592.88	38.96	54.00	-15.04	29.09	6.61	38.38	35.12	HORIZONTAL	100	202	Average
2	10598.64	52.07	74.00	-21.93	42.21	6.60	38.38	35.12	HORIZONTAL	100	202	Peak
3	15893.24	54.70	74.00	-19.30	43.44	7.97	38.38	35.09	HORIZONTAL	100	343	Peak
4	15905.84	41.71	54.00	-12.29	30.48	7.98	38.37	35.12	HORIZONTAL	100	343	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10591.92	38.94	54.00	-15.06	29.07	6.61	38.38	35.12	VERTICAL	100	169	Average
2	10597.28	52.42	74.00	-21.58	42.56	6.60	38.38	35.12	VERTICAL	100	169	Peak
3	15890.44	42.98	54.00	-11.02	31.72	7.97	38.38	35.09	VERTICAL	100	250	Average
4	15900.16	54.69	74.00	-19.31	43.43	7.97	38.38	35.09	VERTICAL	100	250	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10634.40	38.89	54.00	-15.11	29.01	6.59	38.37	35.08	HORIZONTAL	100	157	Average
2	10645.28	51.73	74.00	-22.27	41.85	6.59	38.37	35.08	HORIZONTAL	100	157	Peak
3	15952.40	41.58	54.00	-12.42	30.39	8.00	38.33	35.14	HORIZONTAL	100	255	Average
4	15952.84	54.91	74.00	-19.09	43.72	8.00	38.33	35.14	HORIZONTAL	100	255	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10640.76	51.93	74.00	-22.07	42.05	6.59	38.37	35.08	VERTICAL	100	214	Peak
2	10645.44	38.78	54.00	-15.22	28.90	6.59	38.37	35.08	VERTICAL	100	214	Average
3	15955.80	43.71	54.00	-10.29	32.54	8.00	38.33	35.16	VERTICAL	100	3	Average
4	15965.40	54.43	74.00	-19.57	43.26	8.00	38.33	35.16	VERTICAL	100	3	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10994.76	51.84	74.00	-22.16	41.89	6.46	38.30	34.81	HORIZONTAL	100	80	Peak
2	11000.08	39.06	54.00	-14.94	29.11	6.46	38.30	34.81	HORIZONTAL	100	80	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10997.16	38.49	54.00	-15.51	28.54	6.46	38.30	34.81	VERTICAL	100	3	Average
2	11008.52	52.16	74.00	-21.84	42.20	6.47	38.30	34.81	VERTICAL	100	3	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 116 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11160.24	41.55	54.00	-12.45	31.50	6.56	38.30	34.81	HORIZONTAL	100	31	Average
2	11164.36	53.23	74.00	-20.77	43.18	6.56	38.30	34.81	HORIZONTAL	100	31	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11159.12	39.60	54.00	-14.40	29.55	6.56	38.30	34.81	VERTICAL	100	356	Average
2	11160.04	53.23	74.00	-20.77	43.18	6.56	38.30	34.81	VERTICAL	100	356	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11396.28	51.68	74.00	-22.32	41.51	6.69	38.30	34.82	HORIZONTAL	100	237	Peak
2	11396.76	39.05	54.00	-14.95	28.88	6.69	38.30	34.82	HORIZONTAL	100	237	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11402.16	39.46	54.00	-14.54	29.29	6.69	38.30	34.82	VERTICAL	100	349	Average
2	11406.12	51.69	74.00	-22.31	41.52	6.69	38.30	34.82	VERTICAL	100	349	Peak



Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10537.16	52.08	74.00	-21.92	42.22	6.63	38.39	35.16	HORIZONTAL	100	349	Peak
2	10539.56	39.12	54.00	-14.88	29.26	6.63	38.39	35.16	HORIZONTAL	100	349	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10530.48	39.03	54.00	-14.97	29.17	6.63	38.39	35.16	VERTICAL	8995	20	Average
2	10547.76	52.21	74.00	-21.79	42.36	6.62	38.39	35.16	VERTICAL	100	20	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10610.16	52.12	74.00	-21.88	42.24	6.60	38.38	35.10	HORIZONTAL	100	4	Peak
2	10613.80	39.06	54.00	-14.94	29.18	6.60	38.38	35.10	HORIZONTAL	100	4	Average
3	15920.36	42.24	54.00	-11.76	31.01	7.99	38.36	35.12	HORIZONTAL	100	129	Average
4	15921.88	55.31	74.00	-18.69	44.08	7.99	38.36	35.12	HORIZONTAL	100	129	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10616.80	39.01	54.00	-14.99	29.13	6.60	38.38	35.10	VERTICAL	100	17	Average
2	10621.92	53.29	74.00	-20.71	43.41	6.60	38.38	35.10	VERTICAL	100	17	Peak
3	15926.84	55.61	74.00	-18.39	44.38	7.99	38.36	35.12	VERTICAL	100	341	Peak
4	15926.84	42.61	54.00	-11.39	31.38	7.99	38.36	35.12	VERTICAL	100	341	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11015.88	39.72	54.00	-14.28	29.76	6.47	38.30	34.81	HORIZONTAL	100	28	Average
2	11021.92	51.96	74.00	-22.04	41.99	6.48	38.30	34.81	HORIZONTAL	100	28	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11021.32	51.64	74.00	-22.36	41.68	6.47	38.30	34.81	VERTICAL	100	20	Peak
2	11029.88	38.72	54.00	-15.28	28.75	6.48	38.30	34.81	VERTICAL	100	20	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 110 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	cm	deg	
1	11103.04	52.18	74.00	-21.82	42.17	6.52	38.30	34.81	HORIZONTAL	100	7	Peak
2	11109.08	39.06	54.00	-14.94	29.04	6.53	38.30	34.81	HORIZONTAL	100	7	Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	cm	deg	
1	11105.08	52.31	74.00	-21.69	42.30	6.52	38.30	34.81	VERTICAL	100	76	Peak
2	11110.00	39.80	54.00	-14.20	29.78	6.53	38.30	34.81	VERTICAL	100	76	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 134 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11339.40	38.77	54.00	-15.23	28.64	6.65	38.30	34.82	HORIZONTAL	100	309	Average
2	11348.56	51.42	74.00	-22.58	41.28	6.66	38.30	34.82	HORIZONTAL	100	309	Peak

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11105.08	52.31	74.00	-21.69	42.30	6.52	38.30	34.81	VERTICAL	100	76	Peak
2	11110.00	39.80	54.00	-14.20	29.78	6.53	38.30	34.81	VERTICAL	100	76	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	cm	deg	
1	15864.80	55.36	74.00	-18.64	44.06	7.96	38.41	35.07	HORIZONTAL	100	261	Peak
2	15866.24	41.92	54.00	-12.08	30.62	7.96	38.41	35.07	HORIZONTAL	100	261	Average

Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Pol/Phase	cm	deg	
1	15860.48	54.95	74.00	-19.05	43.65	7.96	38.41	35.07	VERTICAL	100	264	Peak
2	15868.44	42.29	54.00	-11.71	30.99	7.97	38.40	35.07	VERTICAL	100	264	Average

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 106 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11055.20	51.84	74.00	-22.16	41.86	6.49	38.30	34.81	HORIZONTAL	100	266	Peak
2	11059.44	38.67	54.00	-15.33	28.68	6.50	38.30	34.81	HORIZONTAL	100	266	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11064.36	37.86	54.00	-16.14	27.87	6.50	38.30	34.81	VERTICAL	100	255	Average
2	11066.08	50.90	74.00	-23.10	40.91	6.50	38.30	34.81	VERTICAL	100	255	Peak

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 122 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11216.92	52.69	74.00	-21.31	42.61	6.59	38.30	34.81	HORIZONTAL	100	109	Peak
2	11220.72	38.88	54.00	-15.12	28.80	6.59	38.30	34.81	HORIZONTAL	100	109	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	11210.24	52.00	74.00	-22.00	41.92	6.59	38.30	34.81	VERTICAL	100	105	Peak
2	11217.88	39.27	54.00	-14.73	29.19	6.59	38.30	34.81	VERTICAL	100	105	Average

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

<For Non-Beamforming Mode>

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 08, 2014		

Channel 52

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5256.00	114.66			111.58	4.40	33.30	34.62	VERTICAL	100	277 Peak
2	5261.00	105.23			102.10	4.42	33.33	34.62	VERTICAL	100	277 Average
3	5421.00	53.97	54.00	-0.03	50.50	4.52	33.57	34.62	VERTICAL	100	277 Average
4	5422.00	64.36	74.00	-9.64	60.89	4.52	33.57	34.62	VERTICAL	100	277 Peak

Item 1, 2 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5300.80	105.53			102.33	4.44	33.38	34.62	VERTICAL	100	277 Average
2	5301.20	115.82			112.62	4.44	33.38	34.62	VERTICAL	100	277 Peak
3	5376.00	63.99	74.00	-10.01	60.64	4.48	33.49	34.62	VERTICAL	100	277 Peak
4	5381.00	53.58	54.00	-0.42	50.20	4.49	33.51	34.62	VERTICAL	100	277 Average

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5316.40	115.53			112.29	4.45	33.41	34.62	VERTICAL	100	280 Peak
2	5321.20	105.61			102.37	4.45	33.41	34.62	VERTICAL	100	280 Average
3	5396.00	64.25	74.00	-9.75	60.83	4.50	33.54	34.62	VERTICAL	100	280 Peak
4	5401.20	53.53	54.00	-0.47	50.11	4.50	33.54	34.62	VERTICAL	100	280 Average

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 08, 2014		

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5419.20	53.94	54.00	-0.06	50.47	4.52	33.57	34.62	VERTICAL	122	44	Average
2	5424.40	65.07	74.00	-8.93	61.60	4.52	33.57	34.62	VERTICAL	122	44	Peak
3	5470.00	61.89	68.20	-6.31	58.31	4.55	33.65	34.62	VERTICAL	122	44	Peak
4	5498.80	115.41			111.76	4.57	33.70	34.62	VERTICAL	122	44	Peak
5	5499.20	105.41			101.76	4.57	33.70	34.62	VERTICAL	122	44	Average

Item 4, 5 are the fundamental frequency at 5500 MHz.

Channel 116

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5579.00	119.43			115.54	4.62	33.91	34.64	VERTICAL	112	81	Peak
2	5579.00	110.30			106.41	4.62	33.91	34.64	VERTICAL	112	81	Average
3	5744.00	67.93	68.20	-0.27	63.45	4.73	34.42	34.67	VERTICAL	112	81	Peak

Item 1, 2 are the fundamental frequency at 5580 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5700.80	115.97			111.60	4.71	34.32	34.66	VERTICAL	100	282	Peak
2	5700.80	105.94			101.57	4.71	34.32	34.66	VERTICAL	100	282	Average
3	5725.00	68.16	68.20	-0.04	63.74	4.72	34.37	34.67	VERTICAL	100	282	Peak

Item 1, 2 are the fundamental frequency at 5700 MHz.

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Channel 54

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5266.00	114.67			111.54	4.42	33.33	34.62	VERTICAL	100	276 Peak
2	5266.00	103.37			100.24	4.42	33.33	34.62	VERTICAL	100	276 Average
3	5356.00	64.44	74.00	-9.56	61.13	4.47	33.46	34.62	VERTICAL	100	276 Peak
4	5356.00	53.69	54.00	-0.31	50.38	4.47	33.46	34.62	VERTICAL	100	276 Average

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5316.00	101.98			98.74	4.45	33.41	34.62	VERTICAL	100	276 Average
2	5326.20	113.00			109.76	4.45	33.41	34.62	VERTICAL	100	276 Peak
3	5350.00	67.00	74.00	-7.00	63.69	4.47	33.46	34.62	VERTICAL	100	276 Peak
4	5350.60	53.54	54.00	-0.46	50.23	4.47	33.46	34.62	VERTICAL	100	276 Average

Item 1, 2 are the fundamental frequency at 5310 MHz.

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5424.00	64.42	74.00	-9.58	60.95	4.52	33.57	34.62	VERTICAL	121	41	Peak
2	5434.20	52.62	54.00	-1.38	49.12	4.53	33.59	34.62	VERTICAL	121	41	Average
3	5468.80	68.30	74.00	-5.70	64.72	4.55	33.65	34.62	VERTICAL	121	41	Peak
4	5469.40	53.73	54.00	-0.27	50.15	4.55	33.65	34.62	VERTICAL	121	41	Average
5	5514.20	112.99			109.29	4.58	33.75	34.63	VERTICAL	121	41	Peak
6	5514.20	101.56			97.86	4.58	33.75	34.63	VERTICAL	121	41	Average

Item 5, 6 are the fundamental frequency at 5510 MHz.

Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5459.40	63.77	74.00	-10.23	60.23	4.54	33.62	34.62	VERTICAL	120	42	Peak
2	5459.40	52.23	54.00	-1.77	48.69	4.54	33.62	34.62	VERTICAL	120	42	Average
3	5464.00	53.88	54.00	-0.12	50.30	4.55	33.65	34.62	VERTICAL	120	42	Average
4	5468.20	67.45	74.00	-6.55	63.87	4.55	33.65	34.62	VERTICAL	120	42	Peak
5	5554.20	116.42			112.60	4.60	33.86	34.64	VERTICAL	120	42	Peak
6	5554.20	104.89			101.07	4.60	33.86	34.64	VERTICAL	120	42	Average

Item 5, 6 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5665.00	114.42			110.24	4.67	34.17	34.66	VERTICAL	100	332	Peak
2	5665.00	104.45			100.27	4.67	34.17	34.66	VERTICAL	100	332	Average
3	5746.00	68.10	68.20	-0.10	63.62	4.73	34.42	34.67	VERTICAL	100	332	Peak

Item 1, 2 are the fundamental frequency at 5670 MHz.

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106, 122 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Channel 58

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5281.00	109.49			106.33	4.43	33.35	34.62	VERTICAL	100	282	Peak
2	5281.00	97.77			94.61	4.43	33.35	34.62	VERTICAL	100	282	Average
3	5350.00	70.97	74.00	-3.03	67.66	4.47	33.46	34.62	VERTICAL	100	282	Peak
4	5351.00	53.61	54.00	-0.39	50.30	4.47	33.46	34.62	VERTICAL	100	282	Average

Item 1, 2 are the fundamental frequency at 5290 MHz.

Channel 106

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5454.00	65.72	74.00	-8.28	62.18	4.54	33.62	34.62	VERTICAL	122	44	Peak
2	5459.00	53.67	54.00	-0.33	50.13	4.54	33.62	34.62	VERTICAL	122	44	Average
3	5469.00	67.51	68.20	-0.69	63.93	4.55	33.65	34.62	VERTICAL	122	44	Peak
4	5539.00	109.33			105.57	4.59	33.80	34.63	VERTICAL	122	44	Peak
5	5539.00	99.22			95.46	4.59	33.80	34.63	VERTICAL	122	44	Average

Item 4, 5 are the fundamental frequency at 5530 MHz.

Channel 122

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5617.00	102.86			98.80	4.65	34.06	34.65	VERTICAL	100	246	Average
2	5618.00	112.91			108.85	4.65	34.06	34.65	VERTICAL	100	246	Peak
3	5725.00	67.81	68.20	-0.39	63.39	4.72	34.37	34.67	VERTICAL	100	246	Peak

Item 1, 2 are the fundamental frequency at 5610 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 52, 60, 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 08, 2014		

Channel 52

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5256.00	113.97			110.89	4.40	33.30	34.62	VERTICAL	100	283	Peak
2	5256.00	104.11			101.03	4.40	33.30	34.62	VERTICAL	100	283	Average
3	5421.00	64.09	74.00	-9.91	60.62	4.52	33.57	34.62	VERTICAL	100	283	Peak
4	5422.00	53.65	54.00	-0.35	50.18	4.52	33.57	34.62	VERTICAL	100	283	Average

Item 1, 2 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5296.00	114.11			110.91	4.44	33.38	34.62	VERTICAL	100	281	Peak
2	5296.00	104.11			100.91	4.44	33.38	34.62	VERTICAL	100	281	Average
3	5382.00	64.34	74.00	-9.66	60.96	4.49	33.51	34.62	VERTICAL	100	281	Peak
4	5462.00	53.63	54.00	-0.37	50.09	4.54	33.62	34.62	VERTICAL	100	281	Average

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5316.00	114.26			111.02	4.45	33.41	34.62	VERTICAL	100	280	Peak
2	5316.40	104.22			100.98	4.45	33.41	34.62	VERTICAL	100	280	Average
3	5402.00	64.75	74.00	-9.25	61.33	4.50	33.54	34.62	VERTICAL	100	280	Peak
4	5402.00	53.65	54.00	-0.35	50.23	4.50	33.54	34.62	VERTICAL	100	280	Average

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 100, 116, 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 08, 2014		

Channel 100

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5418.40	65.05	74.00	-8.95	61.58	4.52	33.57	34.62	VERTICAL	100	51	Peak
2	5418.80	53.97	54.00	-0.03	50.50	4.52	33.57	34.62	VERTICAL	100	51	Average
3	5458.80	62.33	74.00	-11.67	58.79	4.54	33.62	34.62	VERTICAL	100	51	Peak
4	5467.60	49.78	54.00	-4.22	46.20	4.55	33.65	34.62	VERTICAL	100	51	Average
5	5498.40	116.13			112.48	4.57	33.70	34.62	VERTICAL	100	51	Peak
6	5498.40	105.95			102.30	4.57	33.70	34.62	VERTICAL	100	51	Average

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 116

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5579.00	118.84			114.95	4.62	33.91	34.64	VERTICAL	107	42	Peak
2	5579.00	108.20			104.31	4.62	33.91	34.64	VERTICAL	107	42	Average
3	5738.00	68.15	68.20	-0.05	63.67	4.73	34.42	34.67	VERTICAL	107	42	Peak

Item 1, 2 are the fundamental frequency at 5580 MHz.

Channel 140

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5698.80	116.16			111.85	4.70	34.27	34.66	VERTICAL	100	25	Peak
2	5699.20	106.77			102.46	4.70	34.27	34.66	VERTICAL	100	25	Average
3	5727.00	68.10	68.20	-0.10	63.68	4.72	34.37	34.67	VERTICAL	100	25	Peak

Item 1, 2 are the fundamental frequency at 5700 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

<For Beamforming Mode>

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Channel 52

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5257.00	104.84			101.76	4.40	33.30	34.62	VERTICAL	100	282	Average
2	5261.00	116.06			112.93	4.42	33.33	34.62	VERTICAL	100	282	Peak
3	5423.00	53.74	54.00	-0.26	50.27	4.52	33.57	34.62	VERTICAL	100	282	Average
4	5426.00	64.79	74.00	-9.21	61.32	4.52	33.57	34.62	VERTICAL	100	282	Peak

Item 1, 2 are the fundamental frequency at 5260 MHz.

Channel 60

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5307.14	109.32			106.12	4.44	33.38	34.62	VERTICAL	100	276	Peak
2	5307.14	103.32			100.12	4.44	33.38	34.62	VERTICAL	100	276	Average
3	5467.30	64.86	74.00	-9.14	61.28	4.55	33.65	34.62	VERTICAL	100	276	Peak
4	5468.32	53.80	54.00	-0.20	50.22	4.55	33.65	34.62	VERTICAL	100	276	Average

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5317.00	103.50			100.26	4.45	33.41	34.62	VERTICAL	100	286	Average
2	5321.00	114.96			111.72	4.45	33.41	34.62	VERTICAL	100	286	Peak
3	5472.00	64.65	74.00	-9.35	61.07	4.55	33.65	34.62	VERTICAL	100	286	Peak
4	5472.00	53.55	54.00	-0.45	49.97	4.55	33.65	34.62	VERTICAL	100	286	Average

Item 1, 2 are the fundamental frequency at 5320 MHz.

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 100, 116, 140 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Channel 100

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5412.00	58.28	74.00	-15.72	54.81	4.52	33.57	34.62	VERTICAL	100	42	Peak
2	5412.00	53.43	54.00	-0.57	49.96	4.52	33.57	34.62	VERTICAL	100	42	Average
3	5467.00	49.83	54.00	-4.17	46.25	4.55	33.65	34.62	VERTICAL	100	42	Average
4	5468.00	55.02	74.00	-18.98	51.44	4.55	33.65	34.62	VERTICAL	100	42	Peak
5	5492.00	112.06			108.45	4.56	33.67	34.62	VERTICAL	100	42	Peak
6	5492.00	104.55			100.94	4.56	33.67	34.62	VERTICAL	100	42	Average
7	5737.00	48.90	54.00	-5.10	44.42	4.73	34.42	34.67	VERTICAL	100	42	Average
8	5738.00	55.97	74.00	-18.03	51.49	4.73	34.42	34.67	VERTICAL	100	42	Peak

Item 5, 6 are the fundamental frequency at 5500 MHz.

Channel 116

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5582.00	119.12			115.17	4.63	33.96	34.64	VERTICAL	100	43	Peak
2	5583.00	107.54			103.59	4.63	33.96	34.64	VERTICAL	100	43	Average
3	5738.50	55.92	68.20	-12.28	51.44	4.73	34.42	34.67	VERTICAL	100	43	Average
4	5739.00	67.36	68.20	-0.84	62.88	4.73	34.42	34.67	VERTICAL	100	43	Peak

Item 1, 2 are the fundamental frequency at 5580 MHz.

Channel 140

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5699.00	117.15			112.84	4.70	34.27	34.66	VERTICAL	100	79	Peak
2	5699.00	105.82			101.51	4.70	34.27	34.66	VERTICAL	100	79	Average
3	5730.00	68.02	68.20	-0.18	63.60	4.72	34.37	34.67	VERTICAL	100	79	Peak
4	5852.00	54.77	68.20	-13.43	49.94	4.80	34.73	34.70	VERTICAL	100	79	Average

Item 1, 2 are the fundamental frequency at 5700 MHz.



Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Channel 54

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5257.00	104.92			101.84	4.40	33.30	34.62	VERTICAL	100	281	Average
2	5259.00	116.30			113.17	4.42	33.33	34.62	VERTICAL	100	281	Peak
3	5426.00	65.21	74.00	-8.79	61.74	4.52	33.57	34.62	VERTICAL	100	281	Peak
4	5426.00	53.71	54.00	-0.29	50.24	4.52	33.57	34.62	VERTICAL	100	281	Average

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5305.00	103.19			99.99	4.44	33.38	34.62	VERTICAL	100	276	Average
2	5308.00	114.37			111.17	4.44	33.38	34.62	VERTICAL	100	276	Peak
3	5350.00	68.04	74.00	-5.96	64.73	4.47	33.46	34.62	VERTICAL	100	276	Peak
4	5474.00	53.81	54.00	-0.19	50.23	4.55	33.65	34.62	VERTICAL	100	276	Average

Item 1, 2 are the fundamental frequency at 5310 MHz.

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 102, 110, 134 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Channel 102

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5432.00	64.90	74.00	-9.10	61.40	4.53	33.59	34.62	VERTICAL	109	29	Peak
2	5433.00	53.55	54.00	-0.45	50.05	4.53	33.59	34.62	VERTICAL	109	29	Average
3	5462.00	65.14	68.20	-3.06	61.60	4.54	33.62	34.62	VERTICAL	109	29	Average
4	5512.00	105.85			102.21	4.57	33.70	34.63	VERTICAL	109	29	Average
5	5513.00	116.74			113.10	4.57	33.70	34.63	VERTICAL	109	29	Average

Item 4, 5 are the fundamental frequency at 5510 MHz.

Channel 110

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5456.00	53.27	54.00	-0.73	49.73	4.54	33.62	34.62	VERTICAL	122	48	Average
2	5458.00	65.29	74.00	-8.71	61.75	4.54	33.62	34.62	VERTICAL	122	48	Peak
3	5467.00	68.00	68.20	-0.20	64.42	4.55	33.65	34.62	VERTICAL	122	48	Peak
4	5544.00	105.77			102.01	4.59	33.80	34.63	VERTICAL	122	48	Average
5	5545.00	117.11			113.35	4.59	33.80	34.63	VERTICAL	122	48	Peak
6	5728.00	64.43	68.20	-3.77	60.01	4.72	34.37	34.67	VERTICAL	122	48	Peak

Item 4, 5 are the fundamental frequency at 5550 MHz.

Channel 134

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5665.00	115.85			111.67	4.67	34.17	34.66	VERTICAL	116	32	Peak
2	5665.00	103.91			99.73	4.67	34.17	34.66	VERTICAL	116	32	Average
3	5729.00	68.09	68.20	-0.11	63.67	4.72	34.37	34.67	VERTICAL	116	32	Peak

Item 1, 2 are the fundamental frequency at 5670 MHz.

Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58, 106, 122 / Ant. 1 + Ant. 2 + Ant. 3
Test Date	Aug. 09, 2014		

Channel 58

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	58.02	74.00	-15.98	55.16	4.34	33.14	34.62	VERTICAL	100	266	Peak
2	5150.00	46.22	54.00	-7.78	43.36	4.34	33.14	34.62	VERTICAL	100	266	Average
3	5299.00	111.41			108.21	4.44	33.38	34.62	VERTICAL	100	266	Peak
4	5300.00	100.35			97.15	4.44	33.38	34.62	VERTICAL	100	266	Average
5	5350.00	53.80	54.00	-0.20	50.49	4.47	33.46	34.62	VERTICAL	100	266	Average
6	5356.00	67.79	74.00	-6.21	64.48	4.47	33.46	34.62	VERTICAL	100	266	Peak

Item 3, 4 are the fundamental frequency at 5290 MHz.

Channel 106

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5455.00	67.06	74.00	-6.94	63.52	4.54	33.62	34.62	VERTICAL	122	44	Peak
2	5458.00	53.49	54.00	-0.51	49.95	4.54	33.62	34.62	VERTICAL	122	44	Average
3	5469.00	67.85	68.20	-0.35	64.27	4.55	33.65	34.62	VERTICAL	122	44	Peak
4	5494.00	99.67			96.06	4.56	33.67	34.62	VERTICAL	122	44	Average
5	5505.00	111.22			107.58	4.57	33.70	34.63	VERTICAL	122	44	Peak

Item 4, 5 are the fundamental frequency at 5530 MHz.

Channel 122

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Pol/Phase	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5599.00	103.65			99.64	4.64	34.01	34.64	VERTICAL	100	81	Average
2	5619.00	114.71			110.65	4.65	34.06	34.65	VERTICAL	100	81	Peak
3	5737.00	67.77	68.20	-0.43	63.29	4.73	34.42	34.67	VERTICAL	100	81	Peak

Item 1, 2 are the fundamental frequency at 5610 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

4.7. Frequency Stability Measurement

4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be ± 20 ppm maximum for the 5 GHz band (IEEE 802.11n specification).

4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than ± 20 ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is $0^\circ\text{C} \sim 40^\circ\text{C}$.

4.7.4. Test Setup Layout

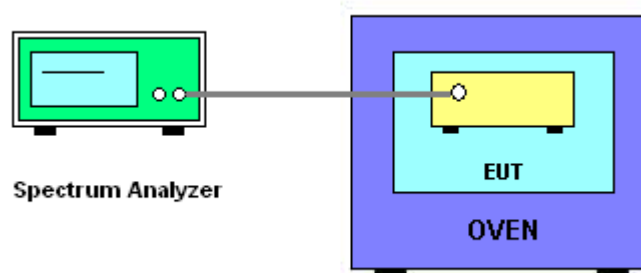

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.7.7. Test Result of Frequency Stability

Temperature	26°C	Humidity	63%
Test Engineer	Serway Li	Test Date	Aug. 20, 2014

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)	
	5300 MHz	5500 MHz
(V)		
126.5	5299.9620	5499.9620
110	5299.9622	5499.9622
93.5	5299.9622	5499.9622
Max. Deviation (MHz)	0.038000	0.038000
Max. Deviation (ppm)	7.17	6.91

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)	
	5300 MHz	5500 MHz
(°C)		
0	5299.9620	5499.9620
10	5299.9620	5499.9620
20	5299.9622	5499.9622
30	5299.9628	5499.9628
40	5299.9634	5499.9634
Max. Deviation (MHz)	0.038000	0.038000
Max. Deviation (ppm)	7.1698	6.91

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 23, 2014	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112B	2928	30MHz ~ 2GHz	Dec. 27, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Dec. 17, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 12, 2013	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100019	9kHz~40GHz	Dec. 02, 2013	Radiation (03CH01-CB)
EMI Test Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8GHz	Dec. 12, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%