

FCC Test Report

Report No.: RF190218E06-1

FCC ID: XCNUBC1319

Test Model: UBC1319

Received Date: Feb. 18, 2019

Test Date: Feb. 26 to Apr. 10, 2019

Issued Date: May 03, 2019

Applicant: Ubee Interactive Corp.

Address: 10F-1, No. 5, Taiyuan 1st St. Jhubei Ci, Hsinchu County 302, Taiwan ,
R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standard	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement.....	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedure	20
4.1.4 Deviation from Test Standard	21
4.1.5 Test Setup.....	21
4.1.6 EUT Operating Condition	22
4.1.7 Test Results	23
4.2 Conducted Emission Measurement	43
4.2.1 Limits of Conducted Emission Measurement	43
4.2.2 Test Instruments	43
4.2.3 Test Procedure	44
4.2.4 Deviation from Test Standard	44
4.2.5 Test Setup.....	44
4.2.6 EUT Operating Condition	44
4.2.7 Test Results	45
4.3 Transmit Power Measurement	47
4.3.1 Limits of Transmit Power Measurement	47
4.3.2 Test Setup.....	48
4.3.3 Test Instruments	48
4.3.4 Test Procedure	48
4.3.5 Deviation from Test Standard	48
4.3.6 EUT Operating Condition	48
4.3.7 Test Results	49
4.4 Occupied Bandwidth Measurement	51
4.4.1 Test Setup.....	51
4.4.2 Test Instruments	51
4.4.3 Test Procedure	51
4.4.4 Test Results	52
4.5 Peak Power Spectral Density Measurement	58
4.5.1 Limits of Peak Power Spectral Density Measurement	58
4.5.2 Test Setup.....	58
4.5.3 Test Instruments	58
4.5.4 Test Procedure	58
4.5.5 Deviation from Test Standard	59
4.5.6 EUT Operating Condition	59
4.5.7 Test Results	60
4.6 Frequency Stability Measurement	64
4.6.1 Limits of Frequency Stability Measurement	64

4.6.2	Test Setup.....	64
4.6.3	Test Instruments	64
4.6.4	Test Procedure	64
4.6.5	Deviation from Test Standard	64
4.6.6	EUT Operating Condition	64
4.6.7	Test Results	65
4.7	6dB Bandwidth Measurement.....	66
4.7.1	Limits of 6dB Bandwidth Measurement.....	66
4.7.2	Test Setup.....	66
4.7.3	Test Instruments	66
4.7.4	Test Procedure	66
4.7.5	Deviation from Test Standard	66
4.7.6	EUT Operating Condition	66
4.7.7	Test Results	67
5	Pictures of Test Arrangements.....	69
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band).....	70
	Appendix – Information of the Testing Laboratories	73

Release Control Record

Issue No.	Description	Date Issued
RF190218E06-1	Original release.	May 03, 2019

1 Certificate of Conformity

Product: DOCSIS 3.0 Wireless eMTA

Brand: Ubee

Test Model: UBC1319

Applicant: Ubee Interactive Corp.

Test Date: Feb. 26 to Apr. 10, 2019

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Phoenix Huang , **Date:** May 03, 2019
Phoenix Huang / Specialist

Approved by : May Chen , **Date:** May 03, 2019
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -19.53dB at 14.19922MHz.
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit. Minimum passing margin is -0.1dB at 11570.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-Pex not a standard connector.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.9 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	4.9 dB
	18GHz ~ 40GHz	5.2 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	DOCSIS 3.0 Wireless eMTA
Brand	Ubee
Test Model	UBC1319
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20: 11 802.11n (HT40), VHT40: 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.412 ~ 2.462GHz CDD Mode: 631.707mW Beamforming Mode: 622.563mW 5.18 ~ 5.24GHz CDD Mode: 447.454mW Beamforming Mode: 446.405mW 5.745 ~ 5.825GHz CDD Mode: 788.288mW Beamforming Mode: 454.004mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1 Base top x 1
Data Cable Supplied	NA

Note:

1. The EUT has below radios as following table:

Radio 1	Radio 2
WLAN (2.4GHz)	WLAN (5GHz)

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a power adapter as following table:

Brand	Model No.	Spec.
LEADER ELECTRONICS INC	MU30AY120250-A1	AC Input: 100-240V, 0.8A, 50/60Hz DC Output: 12V, 2.5A DC Output cable: 1.8m, Unshielded

4. The antennas provided to the EUT, please refer to the following table:

Antenna No	Transmitter Circuit	Antenna Net Gain (dBi)	Frequency Range (GHz)	Antenna Type	Connector Type	Cable Length (mm)
1	5GHz: Chain 0	2.93	5.15~5.25	Dipole	i-Pex	71
		2.5	5.25~5.35			
		2.04	5.47~5.725			
		2.04	5.725~5.85			
2	2.4GHz: Chain 2 5GHz: Chain 1	1.67	2.4~2.4825	Dipole	i-Pex	132
		1.99	5.15~5.25			
		3.2	5.25~5.35			
		2.99	5.47~5.725			
3	2.4GHz: Chain 1 5GHz: Chain 2	3.17	5.725~5.85	Dipole	i-Pex	110
		2.47	2.4~2.4825			
		4.22	5.15~5.25			
		3.52	5.25~5.35			
4	2.4GHz: Chain 0 5GHz: Chain 3	3.59	5.47~5.725	Dipole	i-Pex	90
		4.54	5.725~5.85			
		2.49	2.4~2.4825			
		3.82	5.15~5.25			
		2.88	5.25~5.35			
		3.64	5.47~5.725			
		3.64	5.725~5.85			

5. The EUT incorporates a MIMO function.

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	3TX	3RX
802.11g	3TX	3RX
802.11n (HT20)	3TX	3RX
802.11n (HT40)	3TX	3RX
VHT20	3TX	3RX
VHT40	3TX	3RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report.
6. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210 MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775 MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE \geq 1G	RE $<$ 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE \geq 1G**: Radiated Emission above 1GHz
RE $<$ 1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (VHT40)	5180-5240, 5745-5825	36 to 48, 149 to 165	151	OFDM	BPSK	13.5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (VHT40)	5180-5240, 5745-5825	36 to 48, 149 to 165	151	OFDM	BPSK	13.5

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3
Beamforming Mode (output power only)						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE \geq 1G	23deg. C, 68%RH	120Vac, 60Hz	Nelson Teng
	25deg. C, 65%RH	120Vac, 60Hz	Nelson Teng
RE $<$ 1G	21deg. C, 64%RH	120Vac, 60Hz	Weiwei Lo
PLC	24deg. C, 76%RH	120Vac, 60Hz	Andy
APCM	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11a: Duty cycle = $2.063 \text{ ms} / 2.092 \text{ ms} = 0.986$

802.11ac (VHT20): Duty cycle = $1.927 \text{ ms} / 1.958 \text{ ms} = 0.984$

802.11ac (VHT40): Duty cycle = $0.951 \text{ ms} / 0.987 \text{ ms} = 0.964$, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.16$

802.11ac (VHT80): Duty cycle = $0.46 \text{ ms} / 0.489 \text{ ms} = 0.941$, Duty factor = $10 \cdot \log(1/\text{Duty cycle}) = 0.27$

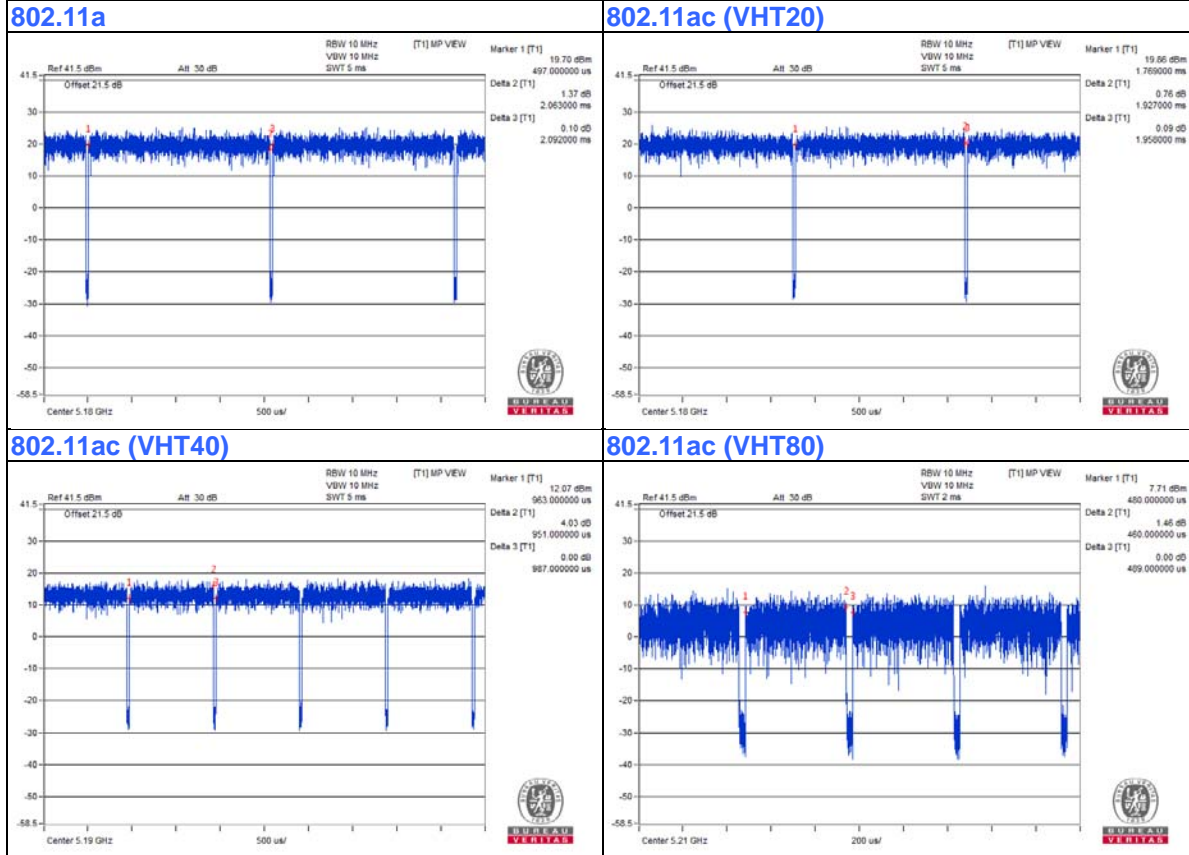

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Telephone	WONDER	WD-303	7C17KA 04011	NA	Provided by Lab
B.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
C.	iPod	Apple	MC749TA/A	CC4DN25WDFDM	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	0	Supplied by client
2.	RJ-11 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	Coaxial Cable	1	10	Yes	0	Provided by Lab
5.	USB Cable	1	0.1	Yes	0	Provided by Lab

3.4.1 Configuration of System under Test

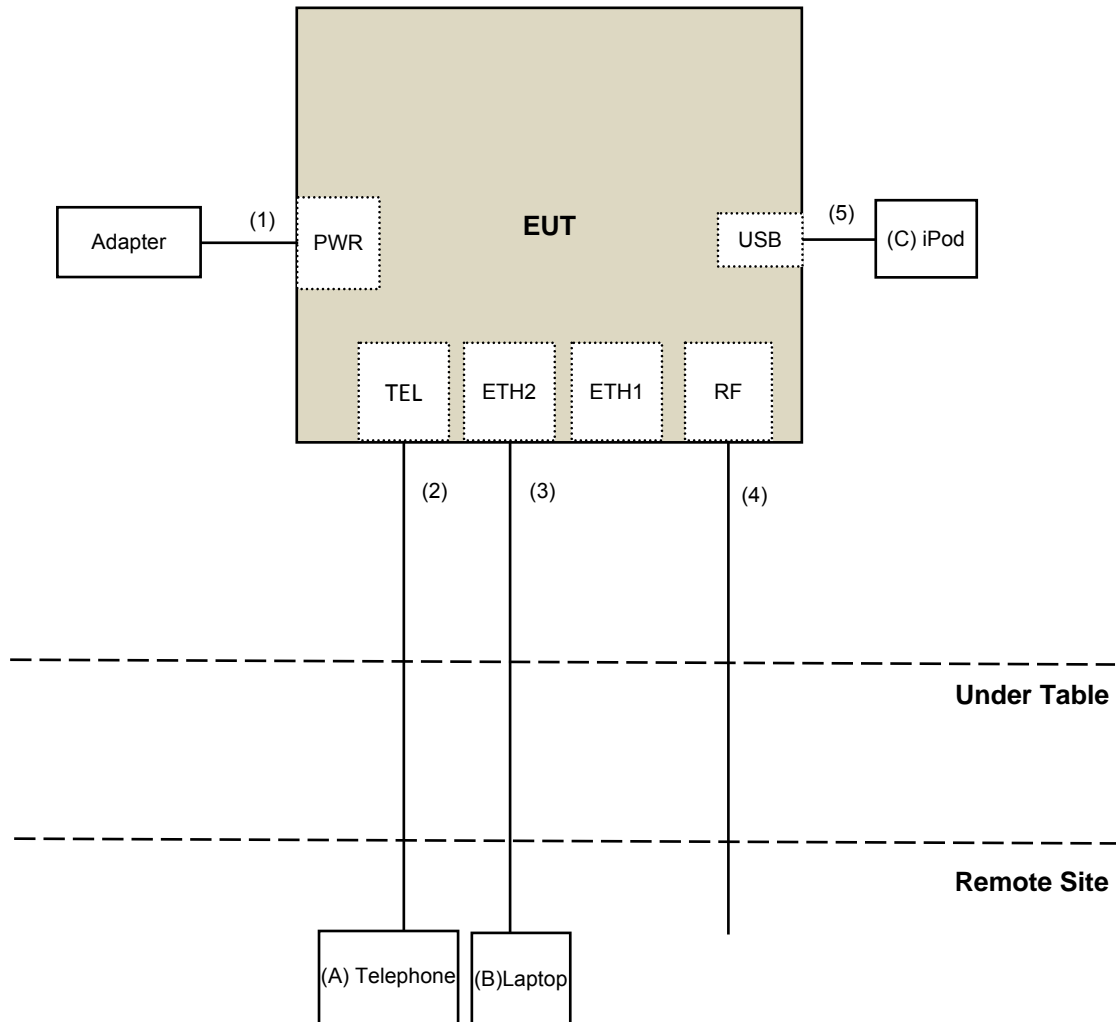

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBuV/m)	AV:54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK:105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK:122.2 (dBuV/m) ^{*4}
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

4.1.2 Test Instruments

For OOB test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCI	EMC12630SE	980385	Aug. 16, 2018	Aug. 15, 2019
RF Cable	EMC104-SM-SM-1200	160923	Jan. 28, 2019	Jan. 27, 2020
RF Cable	104 RF cable	131215	Jan. 10, 2019	Jan. 09, 2020
RF Cable	EMC104-SM-SM-6000	180418	May 07, 2018	May 06, 2019
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Feb. 26, 2019

For other test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Pre-Amplifier EMCI	EMC001340	980142	Jan. 25, 2019	Jan. 24, 2020
Loop Antenna Electro-Metrics	EM-6879	269	Sep. 07, 2018	Sep. 06, 2019
RF Cable	NA	LOOPCAB-001	Jan. 14, 2019	Jan. 13, 2020
RF Cable	NA	LOOPCAB-002	Jan. 14, 2019	Jan. 13, 2020
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 30, 2018	Oct. 29, 2019
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 22, 2018	Nov. 21, 2019
RF Cable	8D	966-4-1	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-2	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-3	Mar. 19, 2019	Mar. 18, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 27, 2018	Sep. 26, 2019
Horn Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCI	EMC12630SE	980385	Aug. 16, 2018	Aug. 15, 2019
RF Cable	EMC104-SM-SM-1200	160923	Jan. 28, 2019	Jan. 27, 2020
RF Cable	104 RF cable	131215	Jan. 10, 2019	Jan. 09, 2020
RF Cable	EMC104-SM-SM-6000	180418	May 07, 2018	May 06, 2019
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 20, 2018	June 19, 2019
Power meter Anritsu	ML2495A	1014008	May 09, 2018	May 08, 2019
Power sensor Anritsu	MA2411B	0917122	May 09, 2018	May 08, 2019
AC Power Source Extech Electronics	6205	1440452	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 09, 2019	Jan. 08, 2020
True RMS Clamp Meter FLUKE	325	31130711WS	May 22, 2018	May 21, 2019

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: Apr. 08 to 10, 2019

4.1.3 Test Procedure

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

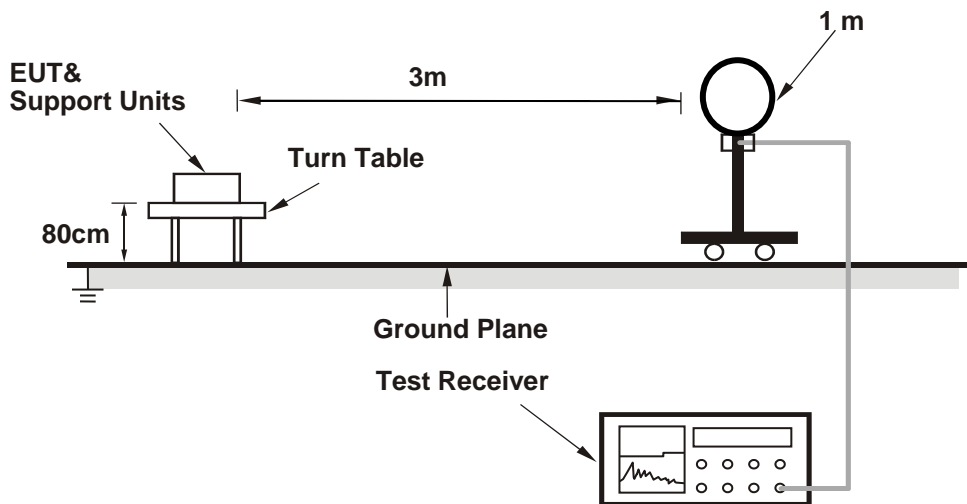

For Radiated emission 30MHz to 1GHz

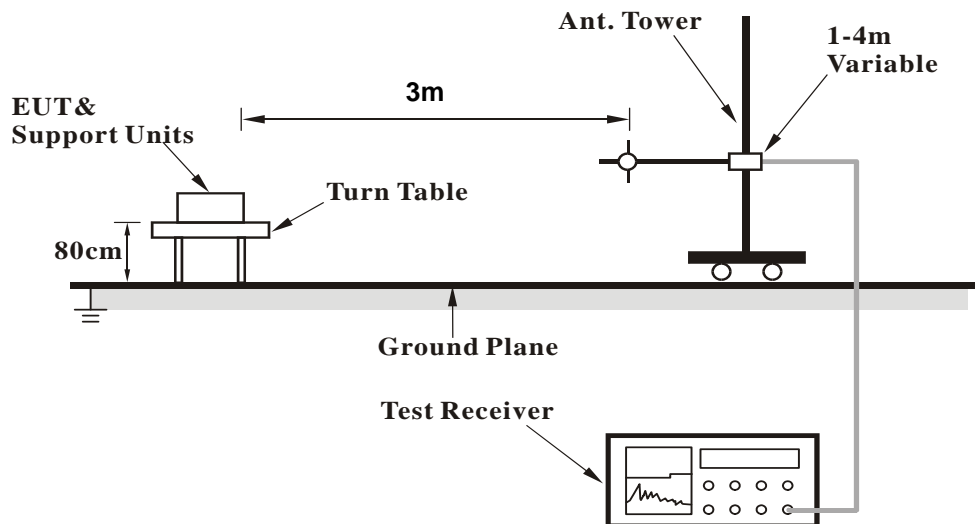

For Radiated emission above 1GHz

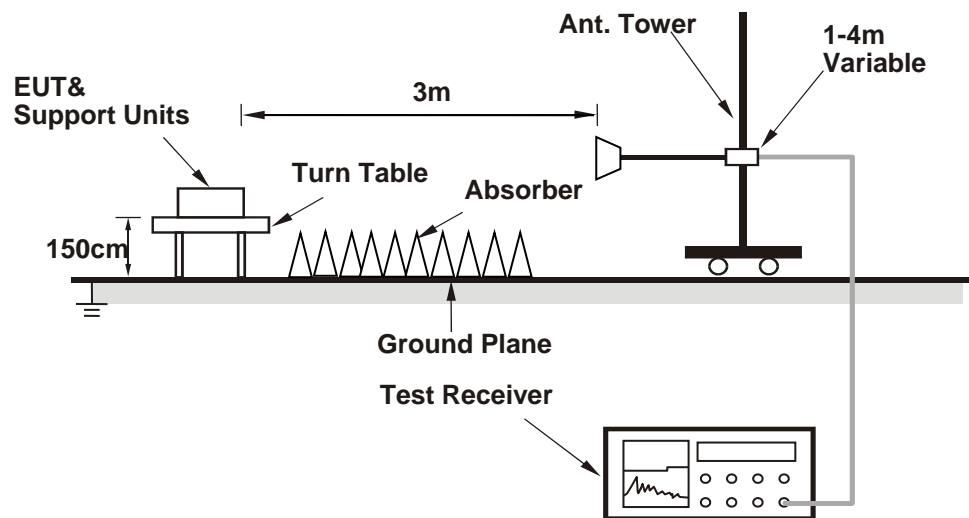

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- a. Connected the EUT with the Laptop which is placed on remote site.
- b. Controlling software (Mtool 3.0.0.6) has been activated to set the EUT under transmission condition continuously.

4.1.7 Test Results

CDD Mode

Above 1GHz Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.2 PK	74.0	-5.8	2.22 H	83	65.5	2.7
2	5150.00	53.5 AV	54.0	-0.5	2.22 H	83	50.8	2.7
3	*5180.00	115.9 PK			2.22 H	83	113.2	2.7
4	*5180.00	108.6 AV			2.22 H	83	105.9	2.7
5	#10360.00	61.0 PK	68.2	-7.2	1.21 H	222	48.4	12.6
6	15540.00	58.0 PK	74.0	-16.0	1.40 H	337	45.2	12.8
7	15540.00	46.5 AV	54.0	-7.5	1.40 H	337	33.7	12.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.7 PK	74.0	-8.3	1.70 V	119	63.0	2.7
2	5150.00	51.9 AV	54.0	-2.1	1.70 V	119	49.2	2.7
3	*5180.00	114.8 PK			1.70 V	119	112.1	2.7
4	*5180.00	105.8 AV			1.70 V	119	103.1	2.7
5	#10360.00	60.3 PK	68.2	-7.9	1.55 V	297	47.7	12.6
6	15540.00	57.0 PK	74.0	-17.0	3.77 V	262	44.2	12.8
7	15540.00	44.5 AV	54.0	-9.5	3.77 V	262	31.7	12.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	118.4 PK			2.07 H	68	115.7	2.7
2	*5200.00	110.4 AV			2.07 H	68	107.7	2.7
3	#10400.00	61.3 PK	68.2	-6.9	1.26 H	207	48.3	13.0
4	15600.00	57.6 PK	74.0	-16.4	1.34 H	332	44.8	12.8
5	15600.00	46.2 AV	54.0	-7.8	1.34 H	332	33.4	12.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	115.5 PK			1.72 V	104	112.8	2.7
2	*5200.00	107.6 AV			1.72 V	104	104.9	2.7
3	#10400.00	60.0 PK	68.2	-8.2	1.52 V	288	47.0	13.0
4	15600.00	56.4 PK	74.0	-17.6	3.79 V	270	43.6	12.8
5	15600.00	44.1 AV	54.0	-9.9	3.79 V	270	31.3	12.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.2 PK			2.11 H	84	115.9	2.3
2	*5240.00	110.3 AV			2.11 H	84	108.0	2.3
3	5350.00	54.9 PK	74.0	-19.1	2.09 H	79	52.3	2.6
4	5350.00	45.9 AV	54.0	-8.1	2.09 H	79	43.3	2.6
5	#10480.00	62.0 PK	68.2	-6.2	1.29 H	221	49.0	13.0
6	15720.00	58.1 PK	74.0	-15.9	1.36 H	319	46.1	12.0
7	15720.00	46.5 AV	54.0	-7.5	1.36 H	319	34.5	12.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.2 PK			1.74 V	106	112.9	2.3
2	*5240.00	107.3 AV			1.74 V	106	105.0	2.3
3	5350.00	51.8 PK	74.0	-22.2	1.74 V	106	49.2	2.6
4	5350.00	42.8 AV	54.0	-11.2	1.74 V	106	40.2	2.6
5	#10480.00	59.9 PK	68.2	-8.3	1.48 V	272	46.9	13.0
6	15720.00	56.0 PK	74.0	-18.0	3.79 V	274	44.0	12.0
7	15720.00	43.9 AV	54.0	-10.1	3.79 V	274	31.9	12.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5579.15	60.0 PK	68.2	-8.2	2.11 H	77	57.1	2.9
2	*5745.00	110.6 PK			2.12 H	52	107.3	3.3
3	*5745.00	103.0 AV			2.12 H	52	99.7	3.3
4	#5992.36	60.6 PK	68.2	-7.6	2.11 H	77	57.0	3.6
5	11490.00	65.6 PK	74.0	-8.4	1.37 H	341	52.3	13.3
6	11490.00	52.6 AV	54.0	-1.4	1.37 H	341	39.3	13.3
7	#17235.00	57.9 PK	68.2	-10.3	1.36 H	322	41.4	16.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.93	57.7 PK	68.2	-10.5	3.48 V	74	54.8	2.9
2	*5745.00	106.7 PK			2.88 V	97	103.4	3.3
3	*5745.00	98.7 AV			2.88 V	97	95.4	3.3
4	#5990.12	57.4 PK	68.2	-10.8	3.48 V	74	53.8	3.6
5	11490.00	67.8 PK	74.0	-6.2	1.42 V	87	54.5	13.3
6	11490.00	53.8 AV	54.0	-0.2	1.42 V	87	40.5	13.3
7	#17235.00	56.0 PK	68.2	-12.2	3.83 V	281	39.5	16.5

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5552.68	60.8 PK	68.2	-7.4	2.12 H	68	57.9	2.9
2	*5785.00	111.0 PK			2.18 H	57	107.6	3.4
3	*5785.00	103.3 AV			2.18 H	57	99.9	3.4
4	#5944.14	60.0 PK	68.2	-8.2	2.12 H	68	56.4	3.6
5	11570.00	65.4 PK	74.0	-8.6	1.36 H	216	52.4	13.0
6	11570.00	52.5 AV	54.0	-1.5	1.36 H	216	39.5	13.0
7	#17355.00	58.4 PK	68.2	-9.8	1.39 H	325	41.3	17.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5551.12	58.3 PK	68.2	-9.9	3.49 V	66	55.4	2.9
2	*5785.00	107.2 PK			2.86 V	94	103.8	3.4
3	*5785.00	98.9 AV			2.86 V	94	95.5	3.4
4	#5941.45	57.1 PK	68.2	-11.1	3.49 V	66	53.6	3.5
5	11570.00	67.9 PK	74.0	-6.1	1.48 V	94	54.9	13.0
6	11570.00	53.9 AV	54.0	-0.1	1.48 V	94	40.9	13.0
7	#17355.00	56.2 PK	68.2	-12.0	3.83 V	258	39.1	17.1

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5590.30	62.3 PK	68.2	-5.9	2.45 H	76	59.4	2.9
2	*5825.00	110.3 PK			2.12 H	48	106.7	3.6
3	*5825.00	102.8 AV			2.12 H	48	99.2	3.6
4	#5984.53	60.2 PK	68.2	-8.0	2.45 H	76	56.6	3.6
5	11650.00	65.9 PK	74.0	-8.1	1.20 H	212	53.0	12.9
6	11650.00	52.5 AV	54.0	-1.5	1.20 H	212	39.6	12.9
7	#17475.00	58.1 PK	68.2	-10.1	1.34 H	321	39.7	18.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5589.10	60.9 PK	68.2	-7.3	3.49 V	65	58.0	2.9
2	*5825.00	106.9 PK			2.85 V	110	103.3	3.6
3	*5825.00	98.9 AV			2.85 V	110	95.3	3.6
4	#5944.56	57.2 PK	68.2	-11.0	3.49 V	65	53.6	3.6
5	11650.00	68.0 PK	74.0	-6.0	1.46 V	77	55.1	12.9
6	11650.00	53.6 AV	54.0	-0.4	1.46 V	77	40.7	12.9
7	#17475.00	56.5 PK	68.2	-11.7	3.73 V	284	38.1	18.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	67.9 PK	74.0	-6.1	2.16 H	73	65.2	2.7
2	5150.00	53.2 AV	54.0	-0.8	2.16 H	73	50.5	2.7
3	*5180.00	116.2 PK			2.16 H	73	113.5	2.7
4	*5180.00	108.9 AV			2.16 H	73	106.2	2.7
5	#10360.00	62.0 PK	68.2	-6.2	1.31 H	214	49.4	12.6
6	15540.00	57.5 PK	74.0	-16.5	1.34 H	347	44.7	12.8
7	15540.00	45.9 AV	54.0	-8.1	1.34 H	347	33.1	12.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.4 PK	74.0	-7.6	1.70 V	113	63.7	2.7
2	5150.00	52.4 AV	54.0	-1.6	1.70 V	113	49.7	2.7
3	*5180.00	114.8 PK			1.70 V	113	112.1	2.7
4	*5180.00	105.7 AV			1.70 V	113	103.0	2.7
5	#10360.00	60.3 PK	68.2	-7.9	1.47 V	281	47.7	12.6
6	15540.00	56.8 PK	74.0	-17.2	3.77 V	283	44.0	12.8
7	15540.00	44.3 AV	54.0	-9.7	3.77 V	283	31.5	12.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	117.7 PK			2.10 H	76	115.0	2.7
2	*5200.00	110.8 AV			2.10 H	76	108.1	2.7
3	#10400.00	60.6 PK	68.2	-7.6	1.25 H	201	47.6	13.0
4	15600.00	57.4 PK	74.0	-16.6	1.35 H	324	44.6	12.8
5	15600.00	46.1 AV	54.0	-7.9	1.35 H	324	33.3	12.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	116.0 PK			1.72 V	89	113.3	2.7
2	*5200.00	107.9 AV			1.72 V	89	105.2	2.7
3	#10400.00	60.3 PK	68.2	-7.9	1.49 V	301	47.3	13.0
4	15600.00	55.9 PK	74.0	-18.1	3.80 V	257	43.1	12.8
5	15600.00	43.9 AV	54.0	-10.1	3.80 V	257	31.1	12.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.5 PK			2.10 H	76	116.2	2.3
2	*5240.00	110.4 AV			2.10 H	76	108.1	2.3
3	5395.67	55.2 PK	74.0	-18.8	2.08 H	76	52.5	2.7
4	5395.67	46.0 AV	54.0	-8.0	2.08 H	76	43.3	2.7
5	#10480.00	61.8 PK	68.2	-6.4	1.30 H	193	48.8	13.0
6	15720.00	57.6 PK	74.0	-16.4	1.29 H	328	45.6	12.0
7	15720.00	45.9 AV	54.0	-8.1	1.29 H	328	33.9	12.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.5 PK			1.75 V	117	113.2	2.3
2	*5240.00	107.4 AV			1.75 V	117	105.1	2.3
3	5350.00	51.9 PK	74.0	-22.1	1.75 V	117	49.3	2.6
4	5350.00	42.9 AV	54.0	-11.1	1.75 V	117	40.3	2.6
5	#10480.00	60.2 PK	68.2	-8.0	1.47 V	272	47.2	13.0
6	15720.00	56.0 PK	74.0	-18.0	3.74 V	280	44.0	12.0
7	15720.00	43.9 AV	54.0	-10.1	3.74 V	280	31.9	12.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5592.22	59.1 PK	68.2	-9.1	2.07 H	63	56.2	2.9
2	*5745.00	110.8 PK			2.13 H	60	107.5	3.3
3	*5745.00	103.2 AV			2.13 H	60	99.9	3.3
4	#5989.24	59.8 PK	68.2	-8.4	2.07 H	63	56.2	3.6
5	11490.00	63.9 PK	74.0	-10.1	1.26 H	222	50.6	13.3
6	11490.00	52.5 AV	54.0	-1.5	1.26 H	222	39.2	13.3
7	#17235.00	57.9 PK	68.2	-10.3	1.40 H	323	41.4	16.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5639.68	58.1 PK	68.2	-10.1	2.87 V	105	55.2	2.9
2	*5745.00	106.7 PK			2.83 V	86	103.4	3.3
3	*5745.00	98.6 AV			2.83 V	86	95.3	3.3
4	#5976.92	59.3 PK	68.2	-8.9	2.87 V	105	55.7	3.6
5	11490.00	67.4 PK	74.0	-6.6	1.50 V	86	54.1	13.3
6	11490.00	53.7 AV	54.0	-0.3	1.50 V	86	40.4	13.3
7	#17235.00	56.5 PK	68.2	-11.7	3.87 V	267	40.0	16.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5551.76	64.3 PK	68.2	-3.9	2.36 H	62	61.4	2.9
2	*5785.00	110.4 PK			2.09 H	60	107.0	3.4
3	*5785.00	103.1 AV			2.09 H	60	99.7	3.4
4	#5942.15	59.7 PK	68.2	-8.5	2.36 H	62	56.2	3.5
5	11570.00	64.3 PK	74.0	-9.7	1.21 H	209	51.3	13.0
6	11570.00	53.7 AV	54.0	-0.3	1.21 H	209	40.7	13.0
7	#17355.00	58.3 PK	68.2	-9.9	1.43 H	332	41.2	17.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.81	59.1 PK	68.2	-9.1	3.54 V	80	56.2	2.9
2	*5785.00	106.9 PK			2.88 V	102	103.5	3.4
3	*5785.00	99.0 AV			2.88 V	102	95.6	3.4
4	#6018.43	57.6 PK	68.2	-10.6	3.54 V	80	54.0	3.6
5	11570.00	67.2 PK	74.0	-6.8	1.53 V	84	54.2	13.0
6	11570.00	53.3 AV	54.0	-0.7	1.53 V	84	40.3	13.0
7	#17355.00	56.1 PK	68.2	-12.1	3.84 V	251	39.0	17.1

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5576.01	61.2 PK	68.2	-7.0	2.42 H	64	58.3	2.9
2	*5825.00	110.8 PK			2.17 H	54	107.2	3.6
3	*5825.00	103.5 AV			2.17 H	54	99.9	3.6
4	#5982.37	58.9 PK	68.2	-9.3	2.42 H	64	55.3	3.6
5	11650.00	63.9 PK	74.0	-10.1	1.20 H	215	51.0	12.9
6	11650.00	53.4 AV	54.0	-0.6	1.20 H	215	40.5	12.9
7	#17475.00	58.1 PK	68.2	-10.1	1.42 H	318	39.7	18.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5590.01	59.6 PK	68.2	-8.6	3.55 V	78	56.7	2.9
2	*5825.00	106.7 PK			2.92 V	107	103.1	3.6
3	*5825.00	98.6 AV			2.92 V	107	95.0	3.6
4	#5937.30	58.2 PK	68.2	-10.0	3.55 V	78	54.6	3.6
5	11650.00	67.5 PK	74.0	-6.5	1.51 V	92	54.6	12.9
6	11650.00	53.6 AV	54.0	-0.4	1.51 V	92	40.7	12.9
7	#17475.00	56.3 PK	68.2	-11.9	3.78 V	264	37.9	18.4

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.3 PK	74.0	-3.7	2.01 H	75	67.6	2.7
2	5150.00	53.5 AV	54.0	-0.5	2.01 H	75	50.8	2.7
3	*5190.00	111.5 PK			2.01 H	75	108.8	2.7
4	*5190.00	103.5 AV			2.01 H	75	100.8	2.7
5	5355.72	57.7 PK	74.0	-16.3	2.01 H	75	55.0	2.7
6	5355.72	48.1 AV	54.0	-5.9	2.01 H	75	45.4	2.7
7	#10380.00	57.5 PK	68.2	-10.7	1.34 H	182	44.7	12.8
8	15570.00	53.5 PK	74.0	-20.5	1.33 H	327	40.8	12.7
9	15570.00	41.8 AV	54.0	-12.2	1.33 H	327	29.1	12.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	66.8 PK	74.0	-7.2	3.48 V	55	64.1	2.7
2	5150.00	50.0 AV	54.0	-4.0	3.48 V	55	47.3	2.7
3	*5190.00	108.0 PK			3.48 V	55	105.3	2.7
4	*5190.00	100.0 AV			3.48 V	55	97.3	2.7
5	5350.00	54.3 PK	74.0	-19.7	3.48 V	55	51.7	2.6
6	5350.00	44.8 AV	54.0	-9.2	3.48 V	55	42.2	2.6
7	#10380.00	55.6 PK	68.2	-12.6	1.41 V	273	42.8	12.8
8	15570.00	52.1 PK	74.0	-21.9	3.77 V	266	39.4	12.7
9	15570.00	40.6 AV	54.0	-13.4	3.77 V	266	27.9	12.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5080.44	58.4 PK	74.0	-15.6	2.11 H	74	55.8	2.6
2	5080.44	49.8 AV	54.0	-4.2	2.11 H	74	47.2	2.6
3	*5230.00	113.5 PK			2.11 H	74	111.1	2.4
4	*5230.00	105.4 AV			2.11 H	74	103.0	2.4
5	5350.00	57.1 PK	74.0	-16.9	2.11 H	74	54.5	2.6
6	5350.00	46.2 AV	54.0	-7.8	2.11 H	74	43.6	2.6
7	5395.79	57.8 PK	74.0	-16.2	2.11 H	74	55.1	2.7
8	5395.79	49.3 AV	54.0	-4.7	2.11 H	74	46.6	2.7
9	#10460.00	57.5 PK	68.2	-10.7	1.29 H	176	44.5	13.0
10	15690.00	53.3 PK	74.0	-20.7	1.28 H	333	41.2	12.1
11	15690.00	41.5 AV	54.0	-12.5	1.28 H	333	29.4	12.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5080.44	55.3 PK	74.0	-18.7	3.44 V	77	52.7	2.6
2	5080.44	46.7 AV	54.0	-7.3	3.44 V	77	44.1	2.6
3	*5230.00	110.0 PK			3.44 V	77	107.6	2.4
4	*5230.00	101.9 AV			3.44 V	77	99.5	2.4
5	5350.00	53.8 PK	74.0	-20.2	3.44 V	77	51.2	2.6
6	5350.00	43.1 AV	54.0	-10.9	3.44 V	77	40.5	2.6
7	5395.79	54.7 PK	74.0	-19.3	3.44 V	77	52.0	2.7
8	5395.79	46.2 AV	54.0	-7.8	3.44 V	77	43.5	2.7
9	#10460.00	55.8 PK	68.2	-12.4	1.42 V	272	42.8	13.0
10	15690.00	51.8 PK	74.0	-22.2	3.76 V	254	39.7	12.1
11	15690.00	40.1 AV	54.0	-13.9	3.76 V	254	28.0	12.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5644.96	65.1 PK	68.2	-3.1	2.46 H	61	62.2	2.9
2	*5755.00	117.7 PK			2.46 H	61	114.4	3.3
3	*5755.00	109.0 AV			2.46 H	61	105.7	3.3
4	#5929.29	58.3 PK	68.2	-9.9	2.46 H	61	54.7	3.6
5	11510.00	63.9 PK	74.0	-10.1	1.29 H	222	50.6	13.3
6	11510.00	53.1 AV	54.0	-0.9	1.29 H	222	39.8	13.3
7	#17265.00	58.3 PK	68.2	-9.9	1.38 H	327	41.9	16.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5637.79	63.1 PK	68.2	-5.1	3.50 V	61	60.2	2.9
2	*5755.00	114.1 PK			3.50 V	61	110.8	3.3
3	*5755.00	104.9 AV			3.50 V	61	101.6	3.3
4	#5983.51	56.6 PK	68.2	-11.6	3.50 V	61	53.0	3.6
5	11510.00	66.5 PK	74.0	-7.5	1.57 V	92	53.2	13.3
6	11510.00	52.6 AV	54.0	-1.4	1.57 V	92	39.3	13.3
7	#17265.00	55.8 PK	68.2	-12.4	3.87 V	251	39.4	16.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5624.19	60.1 PK	68.2	-8.1	2.50 H	61	57.1	3.0
2	*5795.00	117.4 PK			2.50 H	61	114.0	3.4
3	*5795.00	108.7 AV			2.50 H	61	105.3	3.4
4	#5938.81	59.1 PK	68.2	-9.1	2.50 H	61	55.5	3.6
5	11590.00	63.9 PK	74.0	-10.1	1.34 H	217	51.0	12.9
6	11590.00	53.0 AV	54.0	-1.0	1.34 H	217	40.1	12.9
7	#17385.00	58.5 PK	68.2	-9.7	1.38 H	338	41.1	17.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5642.98	59.8 PK	68.2	-8.4	3.49 V	81	56.9	2.9
2	*5795.00	114.2 PK			3.49 V	81	110.8	3.4
3	*5795.00	105.0 AV			3.49 V	81	101.6	3.4
4	#5939.52	57.9 PK	68.2	-10.3	3.49 V	81	54.3	3.6
5	11590.00	66.7 PK	74.0	-7.3	1.62 V	91	53.8	12.9
6	11590.00	52.9 AV	54.0	-1.1	1.62 V	91	40.0	12.9
7	#17385.00	56.3 PK	68.2	-11.9	3.85 V	235	38.9	17.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5145.66	69.7 PK	74.0	-4.3	2.07 H	76	67.0	2.7
2	5145.66	53.7 AV	54.0	-0.3	2.07 H	76	51.0	2.7
3	5150.00	59.7 PK	74.0	-14.3	2.07 H	76	57.0	2.7
4	5150.00	49.8 AV	54.0	-4.2	2.07 H	76	47.1	2.7
5	*5210.00	108.5 PK			2.07 H	76	105.9	2.6
6	*5210.00	100.1 AV			2.07 H	76	97.5	2.6
7	5350.00	53.4 PK	74.0	-20.6	2.07 H	76	50.8	2.6
8	5350.00	43.2 AV	54.0	-10.8	2.07 H	76	40.6	2.6
9	5355.70	56.0 PK	74.0	-18.0	2.07 H	76	53.3	2.7
10	5355.70	46.3 AV	54.0	-7.7	2.07 H	76	43.6	2.7
11	#10420.00	57.1 PK	68.2	-11.1	1.36 H	173	44.1	13.0
12	15630.00	53.4 PK	74.0	-20.6	1.28 H	341	40.8	12.6
13	15630.00	41.6 AV	54.0	-12.4	1.28 H	341	29.0	12.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5145.66	66.6 PK	74.0	-7.4	3.47 V	75	63.9	2.7
2	5145.66	50.6 AV	54.0	-3.4	3.47 V	75	47.9	2.7
3	5150.00	56.6 PK	74.0	-17.4	3.47 V	75	53.9	2.7
4	5150.00	46.7 AV	54.0	-7.3	3.47 V	75	44.0	2.7
5	*5210.00	105.0 PK			3.47 V	75	102.4	2.6
6	*5210.00	96.6 AV			3.47 V	75	94.0	2.6
7	5350.00	50.3 PK	74.0	-23.7	3.47 V	75	47.7	2.6
8	5350.00	40.1 AV	54.0	-13.9	3.47 V	75	37.5	2.6
9	5355.70	52.9 PK	74.0	-21.1	3.47 V	75	50.2	2.7
10	5355.70	43.2 AV	54.0	-10.8	3.47 V	75	40.5	2.7
11	#10420.00	55.4 PK	68.2	-12.8	1.47 V	277	42.4	13.0
12	15630.00	52.7 PK	74.0	-21.3	3.83 V	258	40.1	12.6
13	15630.00	41.1 AV	54.0	-12.9	3.83 V	258	28.5	12.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.67	67.2 PK	68.2	-1.0	2.38 H	62	64.3	2.9
2	*5775.00	114.8 PK			2.38 H	62	111.5	3.3
3	*5775.00	106.3 AV			2.38 H	62	103.0	3.3
4	#5933.70	63.7 PK	68.2	-4.5	2.38 H	62	60.1	3.6
5	11550.00	62.1 PK	74.0	-11.9	1.32 H	215	49.1	13.0
6	11550.00	51.4 AV	54.0	-2.6	1.32 H	215	38.4	13.0
7	#17325.00	56.4 PK	68.2	-11.8	1.34 H	326	39.6	16.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.50	65.9 PK	68.2	-2.3	2.70 V	106	63.0	2.9
2	*5775.00	110.6 PK			2.70 V	106	107.3	3.3
3	*5775.00	101.1 AV			2.70 V	106	97.8	3.3
4	#5931.07	61.3 PK	68.2	-6.9	2.70 V	106	57.7	3.6
5	11550.00	67.4 PK	74.0	-6.6	1.62 V	87	54.4	13.0
6	11550.00	53.4 AV	54.0	-0.6	1.62 V	87	40.4	13.0
7	#17325.00	54.5 PK	68.2	-13.7	3.87 V	220	37.7	16.8

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- Margin value = Emission Level – Limit value
- The other emission levels were very low against the limit.
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data:

802.11ac (VHT40)


CHANNEL	TX Channel 151	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	87.81	30.1 QP	40.0	-9.9	2.00 H	38	48.4	-18.3
2	250.02	37.1 QP	46.0	-8.9	1.00 H	92	50.8	-13.7
3	360.02	33.1 QP	46.0	-12.9	1.00 H	63	43.7	-10.6
4	375.00	35.7 QP	46.0	-10.3	1.00 H	252	45.7	-10.0
5	503.99	32.5 QP	46.0	-13.5	2.00 H	343	39.2	-6.7
6	799.55	37.3 QP	46.0	-8.7	1.00 H	61	38.4	-1.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

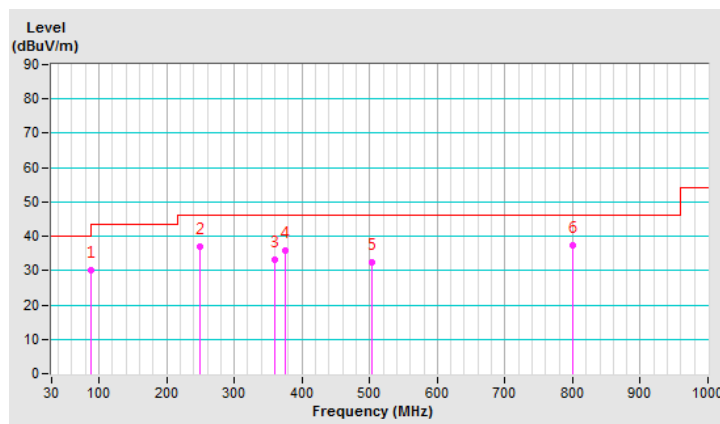


CHANNEL	TX Channel 151	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.37	34.4 QP	40.0	-5.6	1.00 V	360	48.1	-13.7
2	62.88	34.3 QP	40.0	-5.7	1.50 V	136	48.2	-13.9
3	250.02	35.2 QP	46.0	-10.8	1.00 V	4	48.9	-13.7
4	360.02	35.6 QP	46.0	-10.4	1.50 V	24	46.2	-10.6
5	625.02	36.4 QP	46.0	-9.6	1.00 V	300	40.4	-4.0
6	750.01	38.8 QP	46.0	-7.2	1.50 V	36	40.2	-1.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

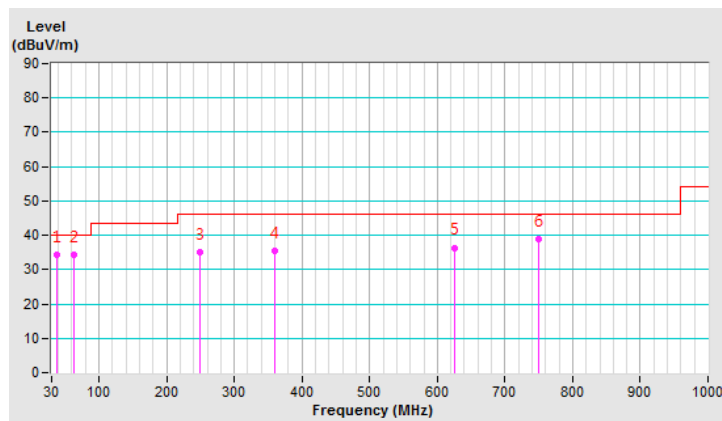

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2018	Oct. 23, 2019
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 22, 2018	Oct. 21, 2019
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 17, 2019	Mar. 16, 2020
50 ohms Terminator	N/A	3	Oct. 22, 2018	Oct. 21, 2019
RF Cable	5D-FB	COCCAB-001	Sep. 28, 2018	Sep. 27, 2019
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 14, 2019	Mar. 13, 2020
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: Apr. 08, 2019

4.2.3 Test Procedure


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

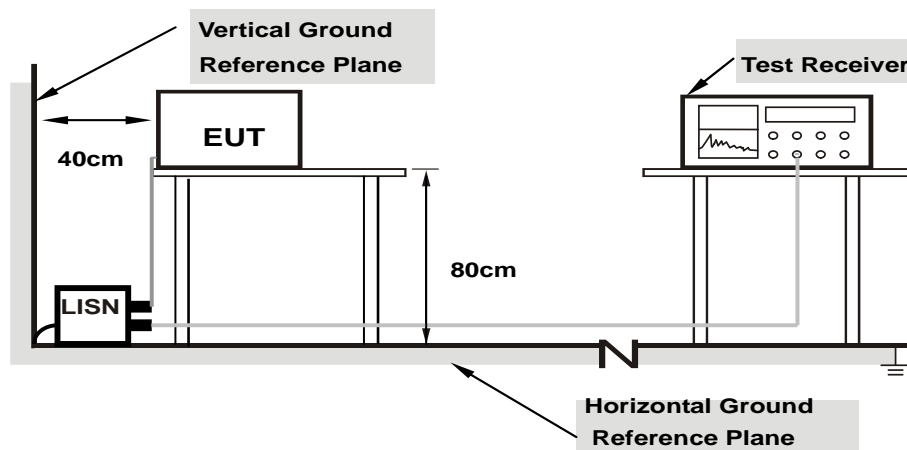

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15000	10.03	33.87	18.80	43.90	28.83	66.00	56.00	-22.10
2	0.20078	10.05	27.60	13.88	37.65	23.93	63.58	53.58	-25.93	-29.65
3	1.17969	10.14	17.60	10.85	27.74	20.99	56.00	46.00	-28.26	-25.01
4	8.14844	10.58	24.41	19.17	34.99	29.75	60.00	50.00	-25.01	-20.25
5	14.19922	10.98	25.13	19.49	36.11	30.47	60.00	50.00	-23.89	-19.53
6	21.37891	11.39	25.26	17.67	36.65	29.06	60.00	50.00	-23.35	-20.94

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

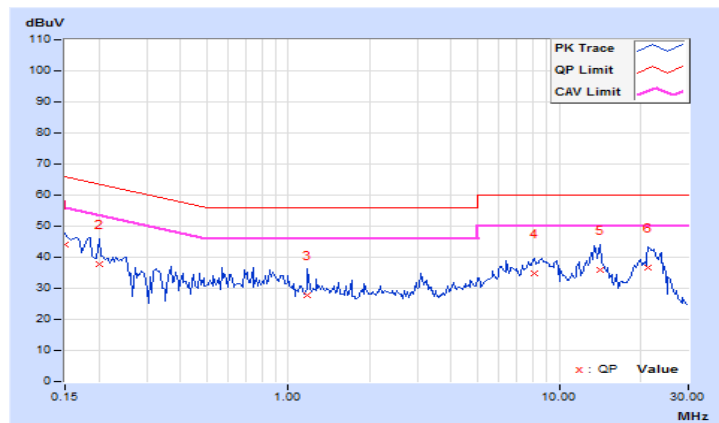


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.15391	9.94	29.80	15.62	39.74	25.56	65.79	55.79	-26.05
2	0.16562	9.94	30.59	17.03	40.53	26.97	65.18	55.18	-24.65	-28.21
3	0.25547	9.96	19.13	-14.66	29.09	-4.70	61.58	51.58	-32.49	-56.28
4	16.22656	10.91	13.70	8.16	24.61	19.07	60.00	50.00	-35.39	-30.93
5	17.69531	11.00	16.29	10.35	27.29	21.35	60.00	50.00	-32.71	-28.65
6	22.27344	11.18	23.61	16.81	34.79	27.99	60.00	50.00	-25.21	-22.01

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

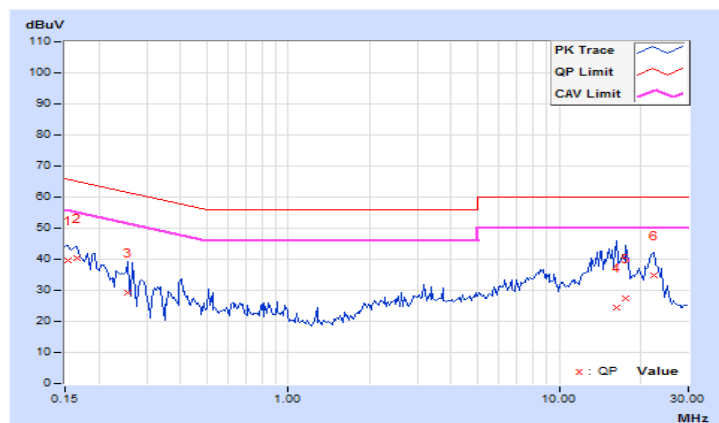

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3		√	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;


Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.


For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup

FOR POWER OUTPUT MEASUREMENT



FOR 26dB OCCUPIED BANDWIDTH



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

FOR POWER OUTPUT MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB OCCUPIED BANDWIDTH

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

CDD Mode

802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	19.67	20.17	19.83	19.77	387.678	25.88	30	Pass
40	5200	20.28	21.07	20.20	20.34	447.454	26.51	30	Pass
48	5240	19.70	21.11	20.31	20.47	441.275	26.45	30	Pass
149	5745	22.15	21.89	22.34	22.58	671.114	28.27	30	Pass
157	5785	22.15	21.82	21.97	22.54	652.985	28.15	30	Pass
165	5825	22.02	21.73	21.87	22.62	644.782	28.09	30	Pass

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	19.65	20.13	19.80	19.86	387.623	25.88	30	Pass
40	5200	20.12	21.03	20.03	20.65	446.405	26.50	30	Pass
48	5240	19.72	21.13	20.22	20.58	442.958	26.46	30	Pass
149	5745	22.14	21.78	22.37	22.77	676.161	28.30	30	Pass
157	5785	22.07	21.64	22.07	22.61	650.401	28.13	30	Pass
165	5825	21.97	21.63	22.04	22.63	646.131	28.10	30	Pass

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	16.51	17.53	16.48	16.84	194.164	22.88	30	Pass
46	5230	17.95	19.15	18.59	18.53	288.159	24.60	30	Pass
151	5755	22.36	23.24	22.94	23.19	788.288	28.97	30	Pass
159	5795	23.21	22.32	22.73	23.31	781.807	28.93	30	Pass

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	15.58	16.41	15.67	15.91	155.785	21.93	30	Pass
155	5775	22.08	21.20	21.98	22.21	617.364	27.91	30	Pass

Beamforming Mode

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	19.65	20.13	19.80	19.86	387.623	25.88	26.7	Pass
40	5200	20.12	21.03	20.03	20.65	446.405	26.50	26.7	Pass
48	5240	19.72	21.13	20.22	20.58	442.958	26.46	26.7	Pass
149	5745	20.36	20.06	20.52	20.90	445.781	26.49	26.59	Pass
157	5785	20.27	19.96	20.45	20.71	434.175	26.38	26.59	Pass
165	5825	20.22	19.93	20.31	20.87	433.176	26.37	26.59	Pass

- Note: 1. For U-NII-1 band: The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.3\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(9.3-6) = 26.7\text{dBm}$.
2. For U-NII-3 band: The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.41\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(9.41-6) = 26.59\text{dBm}$.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	16.51	17.53	16.48	16.84	194.164	22.88	26.7	Pass
46	5230	17.95	19.15	18.59	18.53	288.159	24.60	26.7	Pass
151	5755	20.33	20.22	20.46	20.86	446.163	26.49	26.59	Pass
159	5795	20.41	20.46	20.53	20.79	454.004	26.57	26.59	Pass

- Note: 1. For U-NII-1 band: The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.3\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(9.3-6) = 26.7\text{dBm}$.
2. For U-NII-3 band: The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.41\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(9.41-6) = 26.59\text{dBm}$.


802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	15.58	16.41	15.67	15.91	155.785	21.93	26.7	Pass
155	5775	20.52	19.90	20.32	20.63	433.702	26.37	26.59	Pass

- Note: 1. For U-NII-1 band: The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.3\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(9.3-6) = 26.7\text{dBm}$.
2. For U-NII-3 band: The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.41\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(9.41-6) = 26.59\text{dBm}$.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup

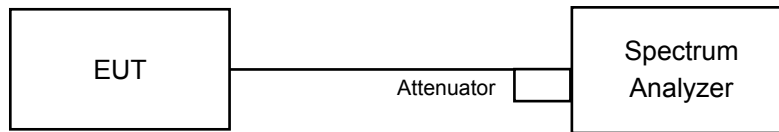

4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

4.4.4 Test Results

CDD Mode

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
36	5180	16.92	17.04	17.04	16.92
40	5200	17.04	16.92	17.16	17.04
48	5240	16.92	17.04	16.92	16.92
149	5745	18.12	17.52	17.40	18.48
157	5785	18.60	17.40	17.28	18.60
165	5825	18.60	17.64	17.88	18.24

802.11ac (VHT20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
36	5180	18.24	18.00	18.12	18.12
40	5200	18.12	18.00	18.00	18.12
48	5240	18.24	18.12	18.12	18.12
149	5745	18.84	18.48	18.36	19.32
157	5785	19.08	18.24	18.72	19.32
165	5825	19.44	18.60	18.48	19.32

802.11ac (VHT40)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
38	5190	36.72	36.96	36.72	36.72
46	5230	36.48	36.96	36.72	36.48
151	5755	38.16	37.68	37.20	38.88
159	5795	45.60	37.20	37.44	38.88

802.11ac (VHT80)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
42	5210	74.88	74.88	74.88	75.36
155	5775	79.68	78.24	78.24	78.72

Spectrum Plot of Worst Value


802.11a_Chain 0 / CH165

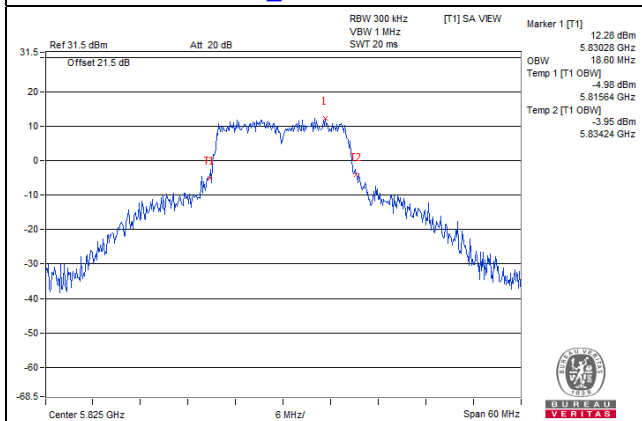


802.11ac (VHT20)_Chain 0 / CH165

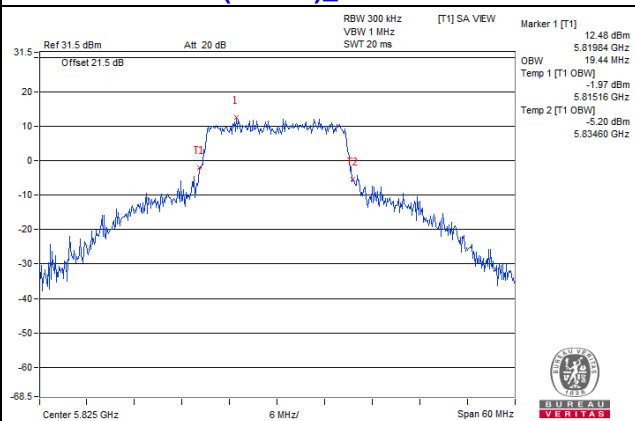

802.11ac (VHT40)_Chain 0 / CH159

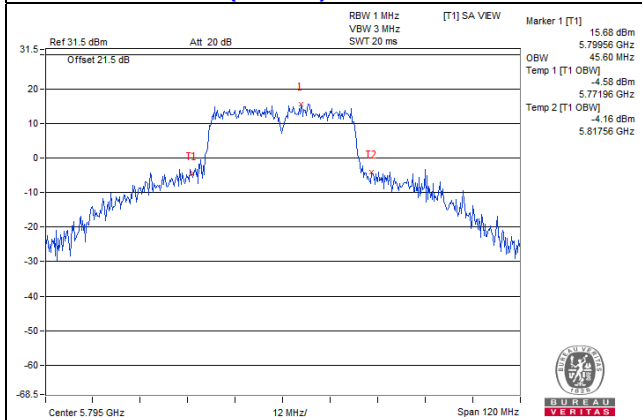


802.11ac (VHT80)_Chain 0 / CH155

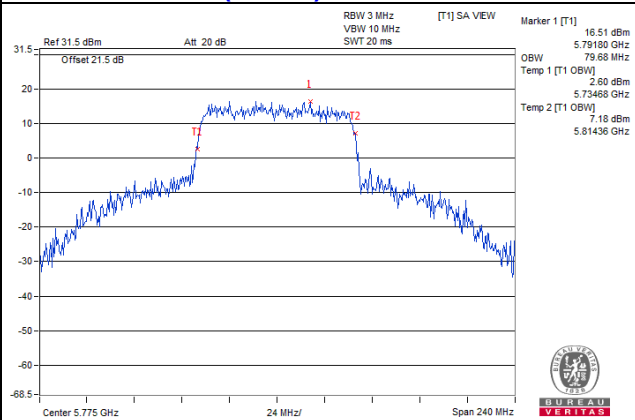


**Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A band)**


802.11a_Chain 0 / CH48

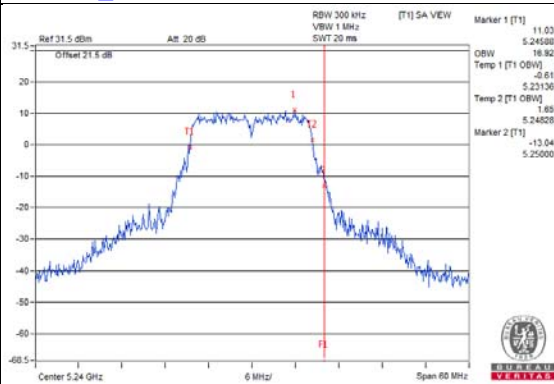


802.11a_Chain 1 / CH48

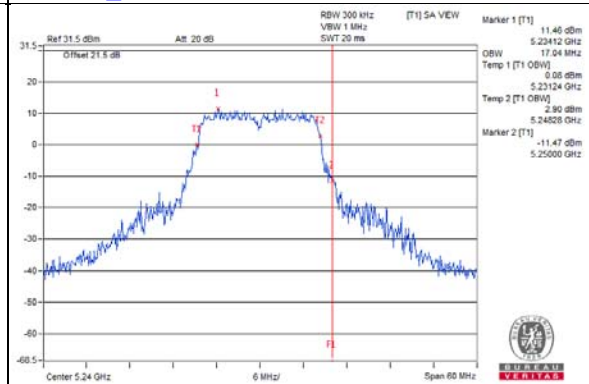


802.11a_Chain 2 / CH48

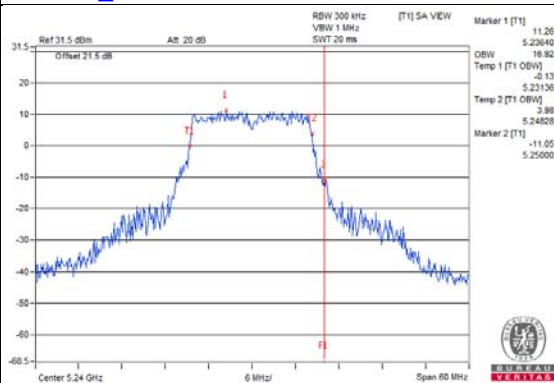


802.11a_Chain 3 / CH48

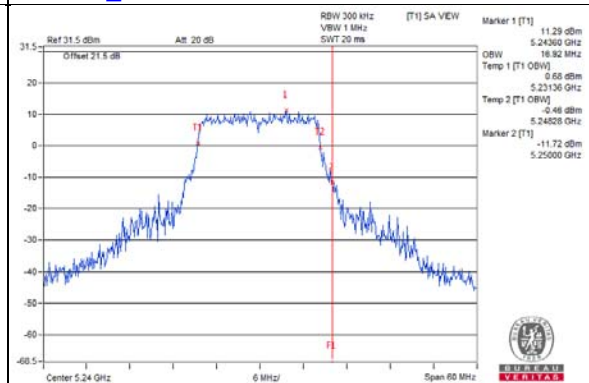


802.11ac (VHT20)_Chain 0 / CH48

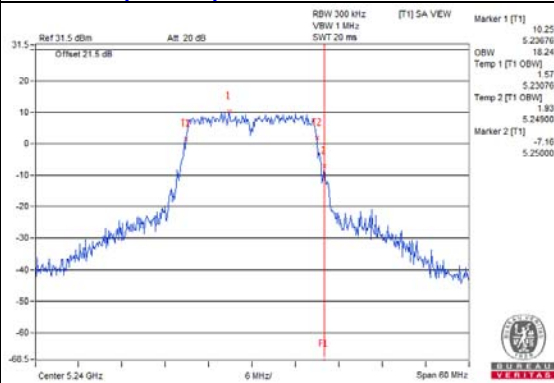


802.11ac (VHT20)_Chain 1 / CH48

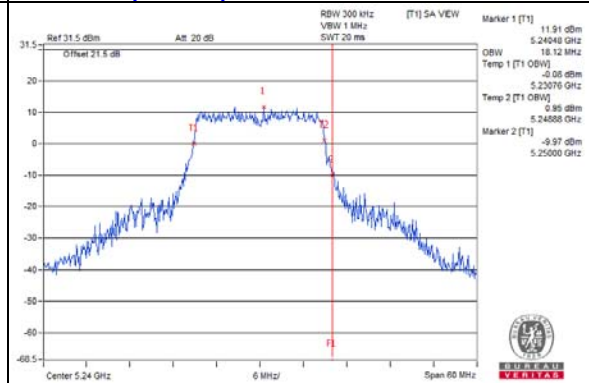

802.11ac (VHT20)_Chain 2 / CH48

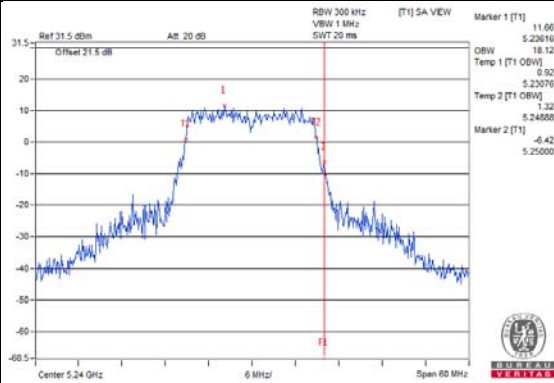


802.11ac (VHT20)_Chain 3 / CH48

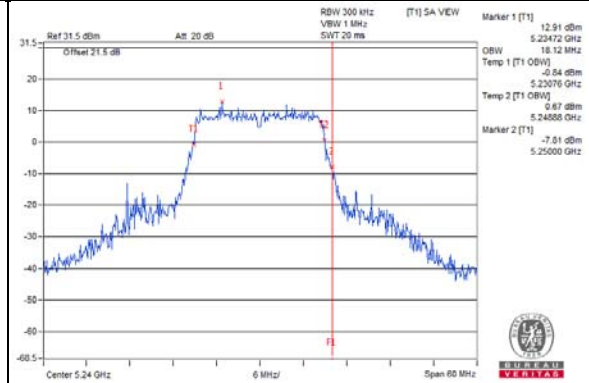


**Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2A band)**


802.11ac (VHT40) Chain 0 / CH46

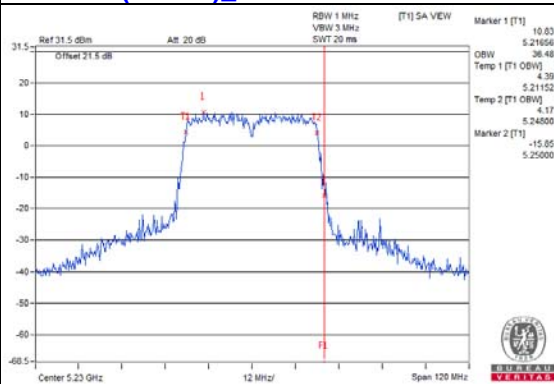


802.11ac (VHT40) Chain 1 / CH46

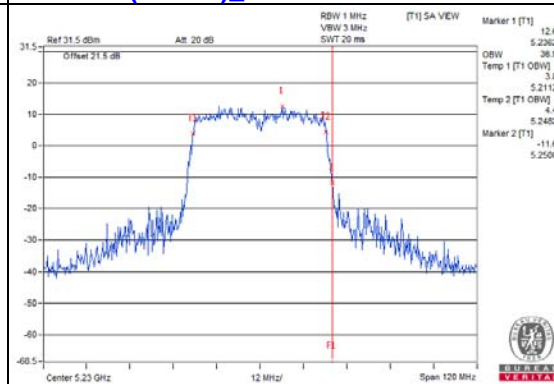


802.11ac (VHT40) Chain 2 / CH46

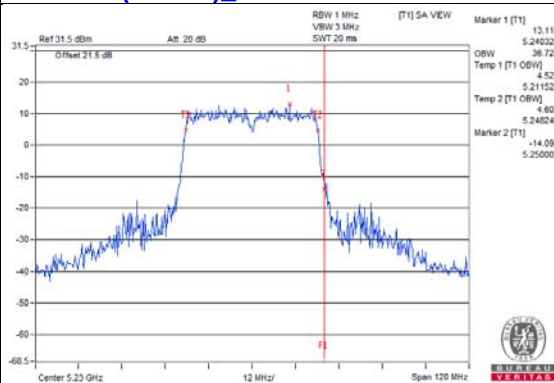


802.11ac (VHT40) Chain 3 / CH46

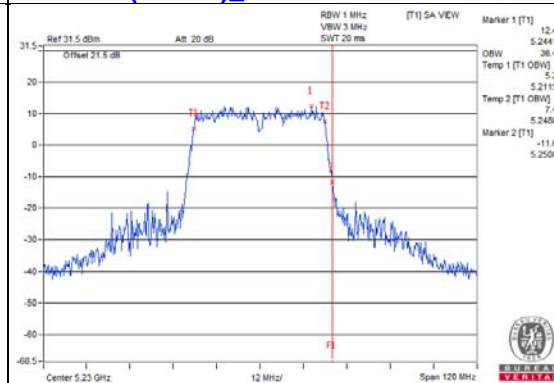


802.11ac (VHT80) Chain 0 / CH42

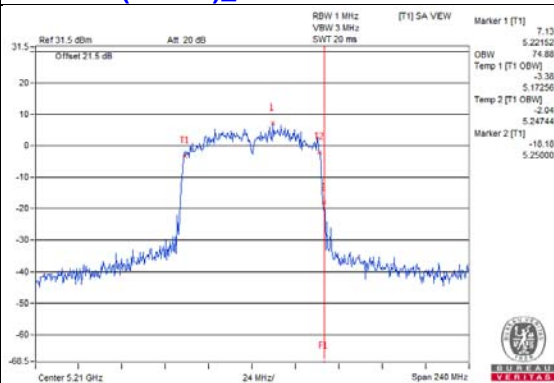


802.11ac (VHT80) Chain 1 / CH42

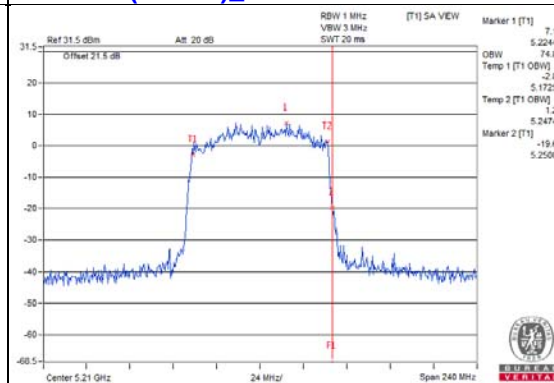

802.11ac (VHT80) Chain 2 / CH42

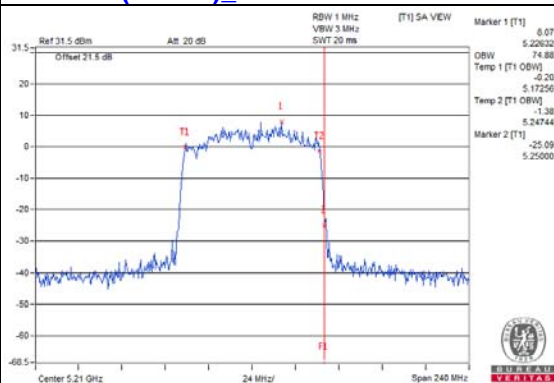


802.11ac (VHT80) Chain 3 / CH42

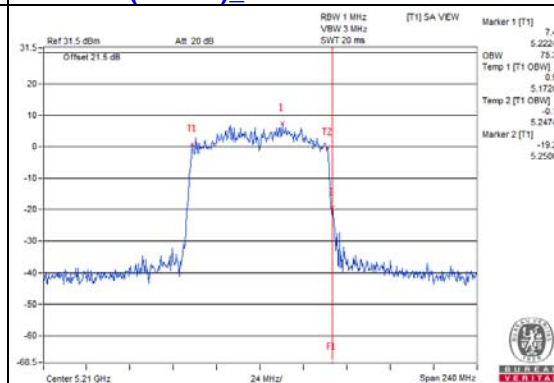


**Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C band)**


802.11a_Chain 0 / CH149

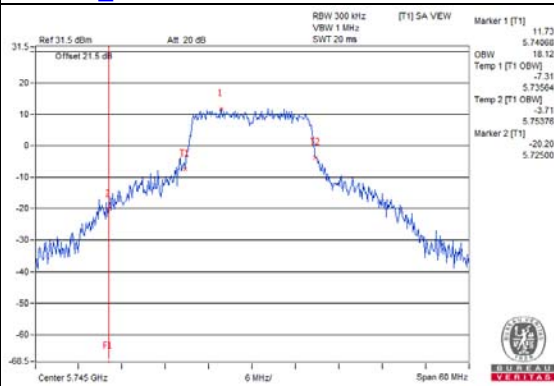


802.11a_Chain 1 / CH149

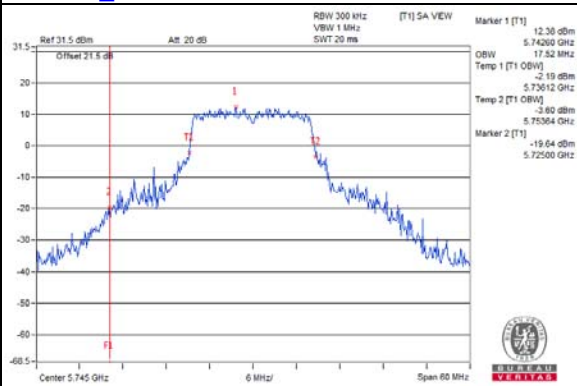


802.11a_Chain 2 / CH149

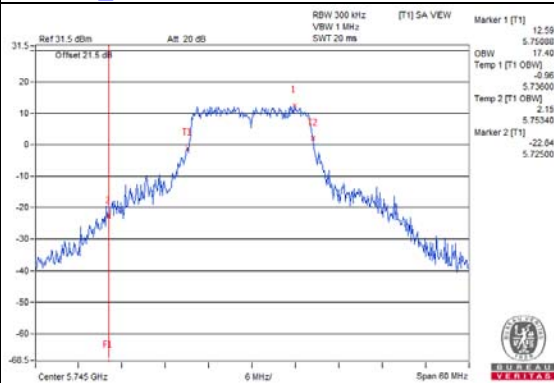


802.11a_Chain 3 / CH149

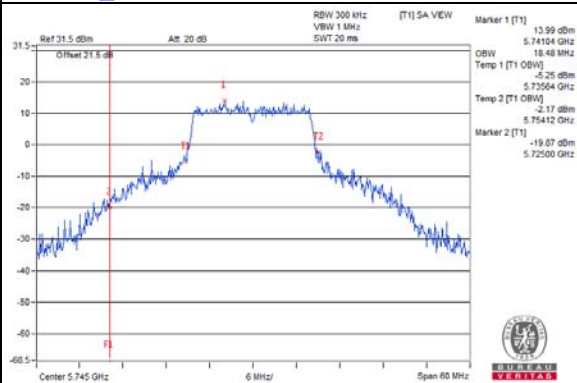


802.11ac (VHT20)_Chain 0 / CH149

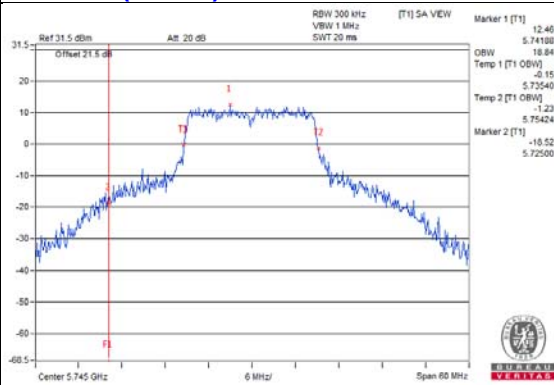


802.11ac (VHT20)_Chain 1 / CH149

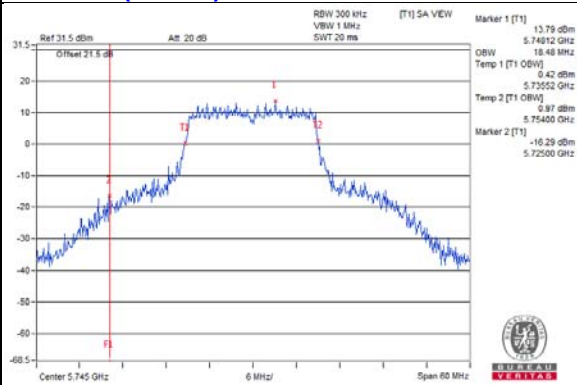

802.11ac (VHT20)_Chain 2 / CH149

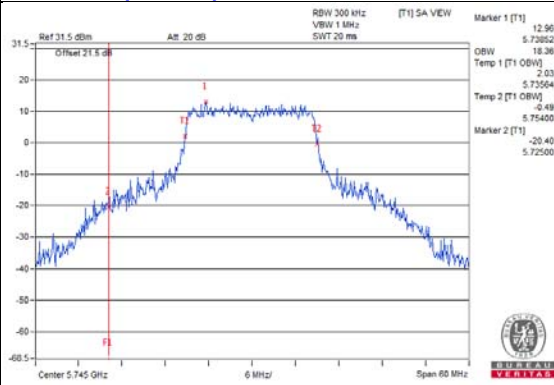


802.11ac (VHT20)_Chain 3 / CH149

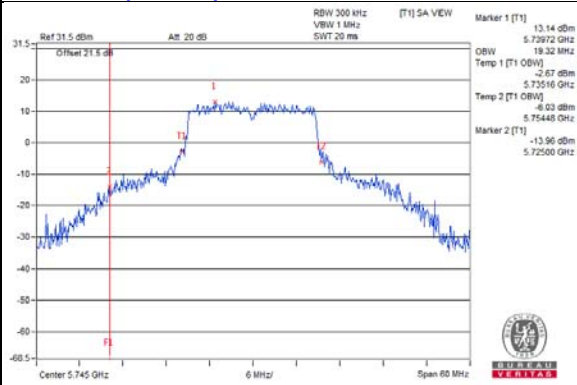


**Spectrum Plot for near by DFS band
(DFS is required, if 99% OCP straddle into U-NII-2C band)**


802.11ac (VHT40) Chain 0 / CH151

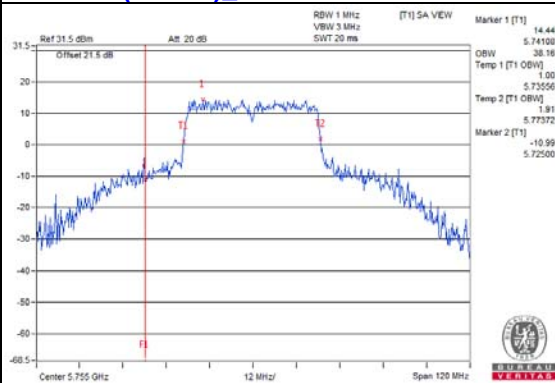


802.11ac (VHT40) Chain 1 / CH151

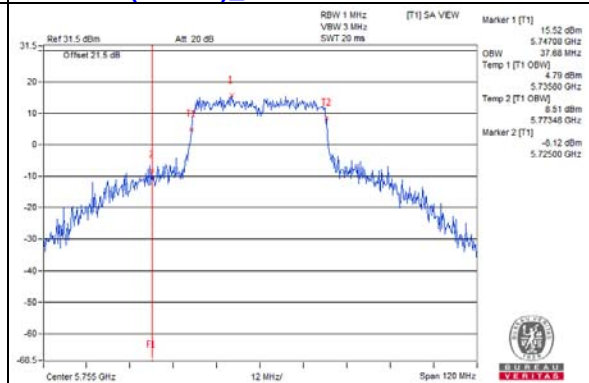


802.11ac (VHT40) Chain 2 / CH151

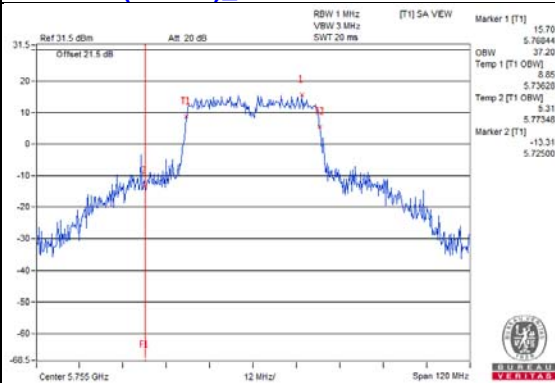


802.11ac (VHT40) Chain 3 / CH151

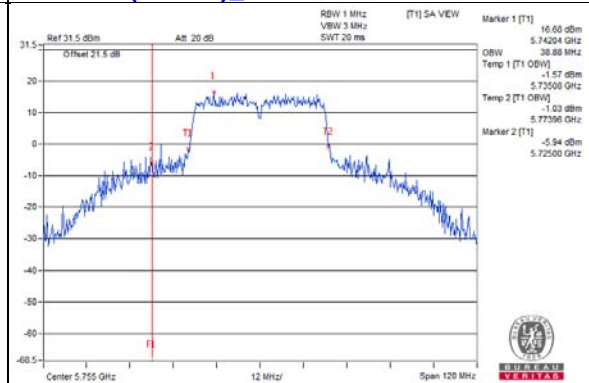


802.11ac (VHT80) Chain 0 / CH155

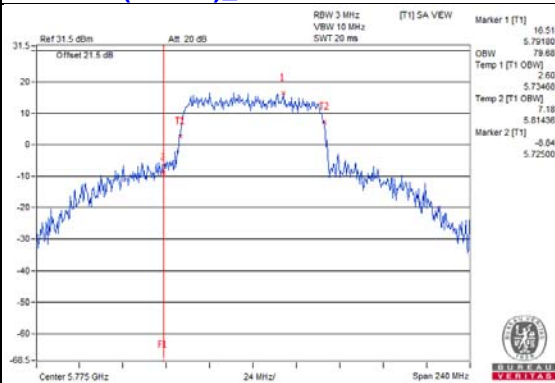


802.11ac (VHT80) Chain 1 / CH155

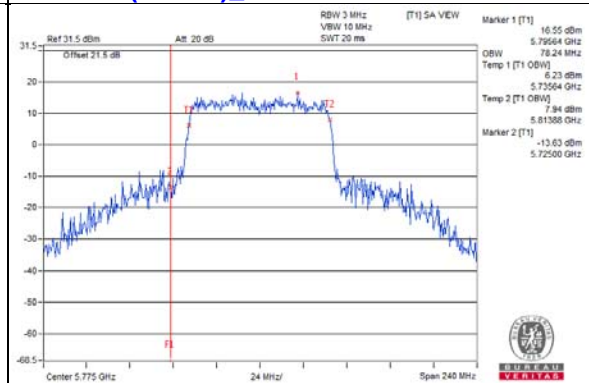

802.11ac (VHT80) Chain 2 / CH155

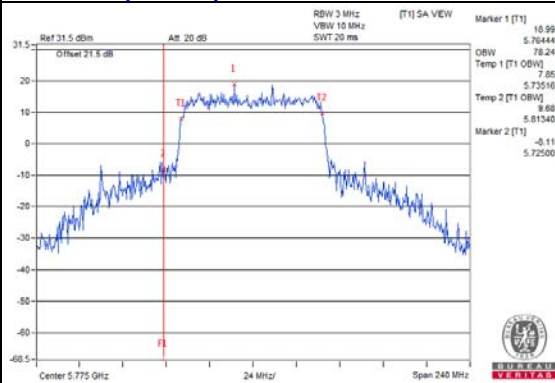

802.11ac (VHT80) Chain 3 / CH155

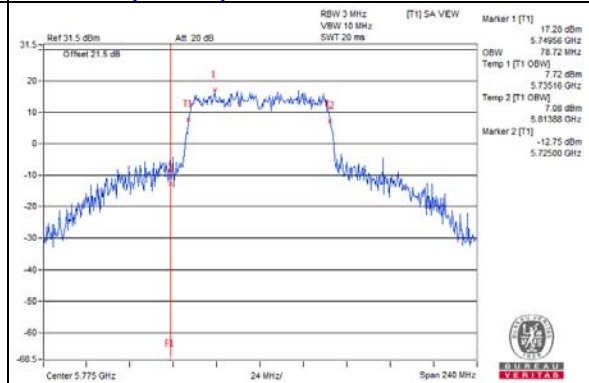


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3		√	30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For U-NII-1 band:

For 802.11a, 802.11ac (VHT20)

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to “free run”.
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

For other modulation mode

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to “free run”.
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

For U-NII-3:

For 802.11a, 802.11ac (VHT20)

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

For other modulation mode

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results

CDD Mode

For U-NII-1:

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3			
36	5180	5.17	6.20	6.16	6.10	11.95	13.70	Pass
40	5200	7.22	7.60	7.51	7.52	13.49	13.70	Pass
48	5240	6.39	7.31	7.06	6.45	12.84	13.70	Pass

Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4]$ = 9.3dBi > 6dBi , so the power density limit shall be reduced to $17-(9.3-6) = 13.7$ dBm.

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm)				Total Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3			
36	5180	5.38	6.28	6.16	6.03	12.00	13.70	Pass
40	5200	6.94	7.65	7.77	7.99	13.63	13.70	Pass
48	5240	5.72	7.06	6.76	6.88	12.66	13.70	Pass

Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4]$ = 9.3dBi > 6dBi , so the power density limit shall be reduced to $17-(9.3-6) = 13.7$ dBm.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	-0.60	0.61	0.20	0.46	0.16	6.37	13.70	Pass
46	5230	1.06	2.32	2.35	2.07	0.16	8.16	13.70	Pass

Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.


2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4]$ = 9.3dBi > 6dBi , so the power density limit shall be reduced to $17-(9.3-6) = 13.7$ dBm.

3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	-3.29	-2.84	-2.83	-2.75	0.27	3.37	13.70	Pass

- Note: 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4] = 9.3\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (9.3 - 6) = 13.7\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

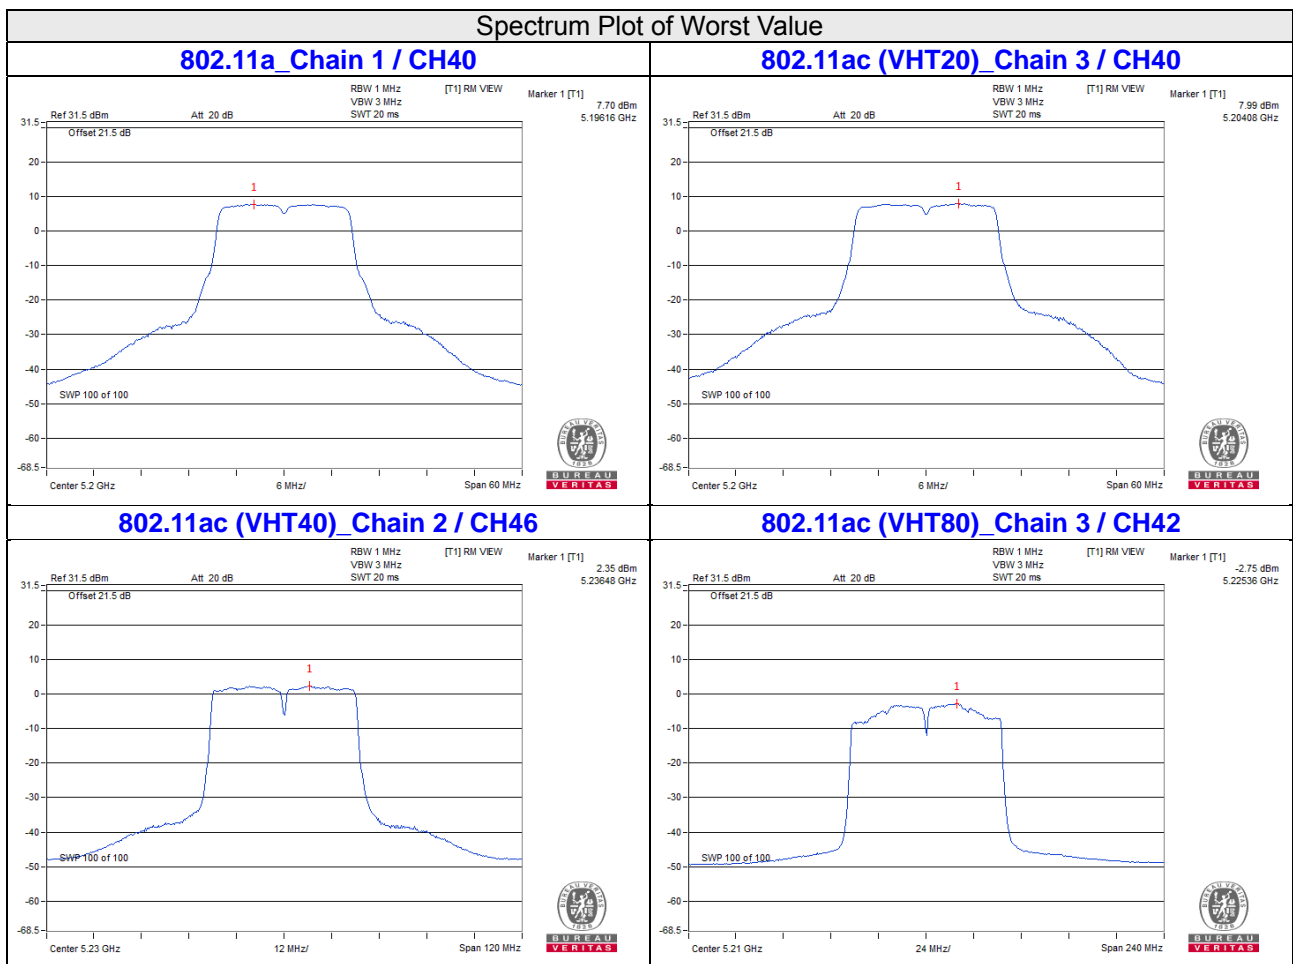

For U-NII-3:
802.11a

Chan.	Freq. (MHz)	PSD (dBm/300kHz)				Total PSD		Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3	dBm/300kHz	dBm/500kHz		
149	5745	0.24	0.42	0.52	1.38	6.68	8.90	26.59	Pass
157	5785	0.27	0.26	0.37	1.22	6.57	8.79	26.59	Pass
165	5825	0.70	0.56	0.67	1.46	6.88	9.10	26.59	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4]$ = 9.41dBi > 6dBi, so the power density limit shall be reduced to $30 - (9.41 - 6) = 26.59$ dBm.

802.11ac (VHT20)

Chan.	Freq. (MHz)	PSD (dBm/300kHz)				Total PSD		Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3	dBm/300kHz	dBm/500kHz		
149	5745	0.09	0.03	0.40	1.08	6.44	8.66	26.59	Pass
157	5785	-0.15	-0.19	-0.06	1.30	6.29	8.51	26.59	Pass
165	5825	-0.06	-0.18	0.05	1.24	6.32	8.54	26.59	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4]$ = 9.41dBi > 6dBi, so the power density limit shall be reduced to $30 - (9.41 - 6) = 26.59$ dBm.

802.11ac (VHT40)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		dBm/300kHz	dBm/500kHz		
151	5755	-3.02	-2.59	-3.00	-2.22	0.16	3.49	5.71	26.59	Pass
159	5795	-2.51	-3.44	-2.88	-1.59	0.16	3.63	5.85	26.59	Pass


- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4]$ = 9.41dBi > 6dBi, so the power density limit shall be reduced to $30 - (9.41 - 6) = 26.59$ dBm.
 3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		dBm/300kHz	dBm/500kHz		
155	5775	-14.73	-7.67	-6.84	-6.10	0.27	-1.56	0.66	26.59	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = $10 \log[(10^{G0/20} + 10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 4]$ = 9.41dBi > 6dBi, so the power density limit shall be reduced to 30-(9.41-6) = 26.59dBm.
 3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value

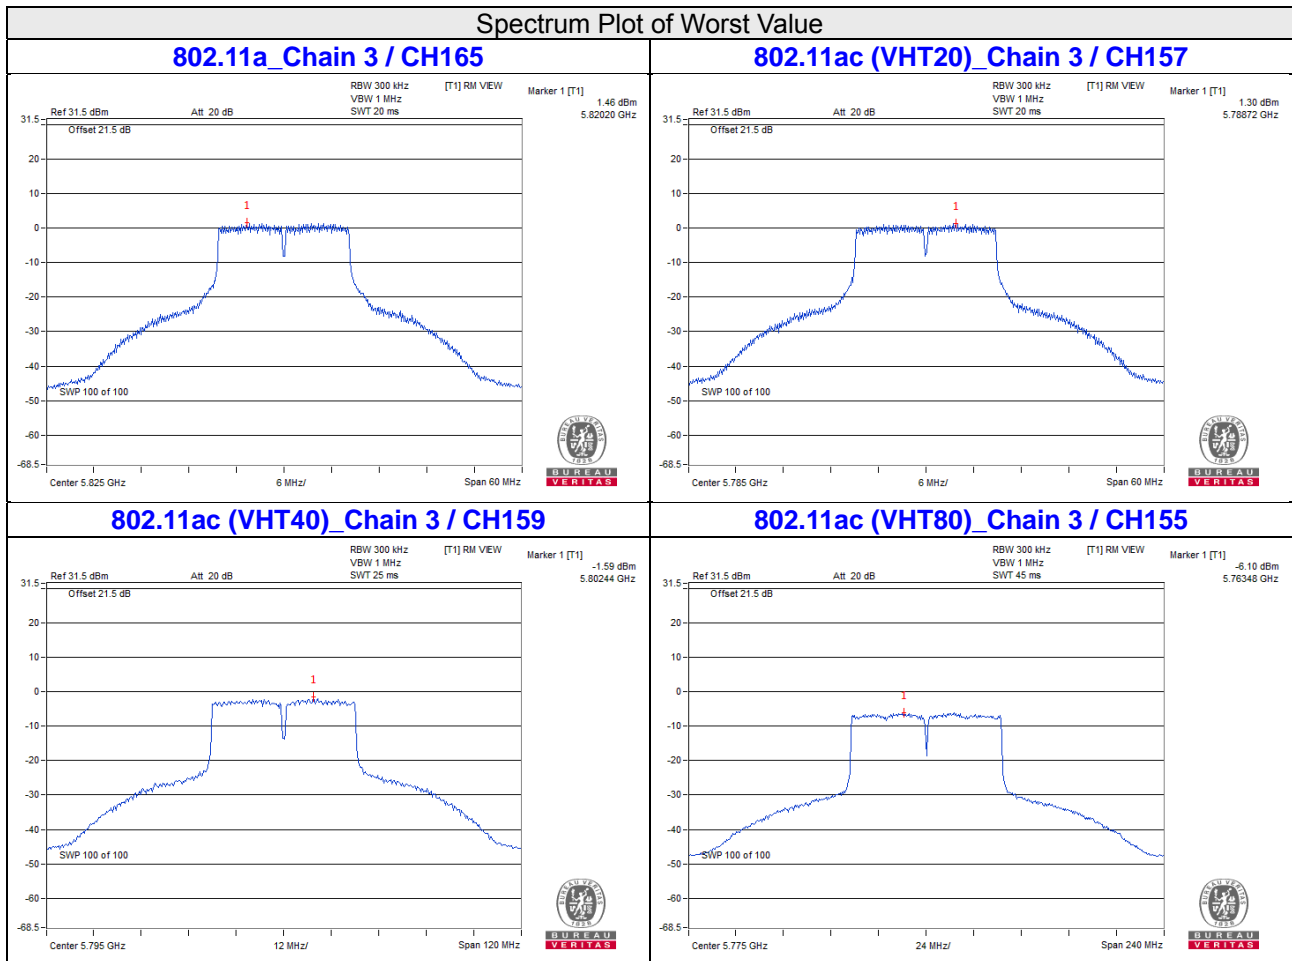


4.6 Frequency Stability Measurement

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

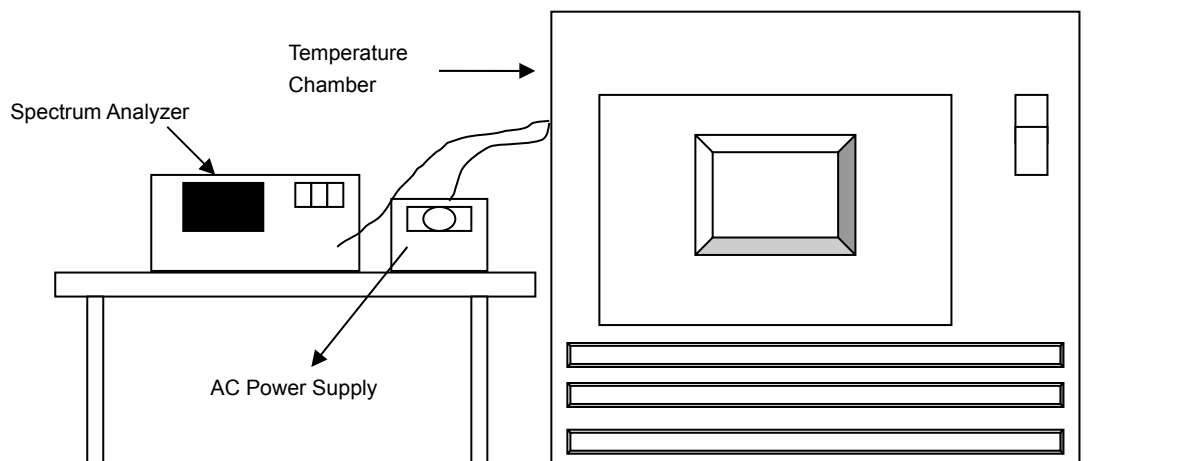

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
50	120	5180.0148	Pass	5180.0162	Pass	5180.0139	Pass	5180.0137	Pass
40	120	5179.9874	Pass	5179.991	Pass	5179.9896	Pass	5179.9913	Pass
30	120	5179.9929	Pass	5179.9942	Pass	5179.9943	Pass	5179.9934	Pass
20	120	5179.9751	Pass	5179.974	Pass	5179.977	Pass	5179.9763	Pass
10	120	5180.0135	Pass	5180.0175	Pass	5180.0153	Pass	5180.0167	Pass
0	120	5180.0164	Pass	5180.0139	Pass	5180.0172	Pass	5180.0143	Pass
-10	120	5179.9846	Pass	5179.9834	Pass	5179.9826	Pass	5179.983	Pass
-20	120	5179.978	Pass	5179.9761	Pass	5179.9747	Pass	5179.9768	Pass
-30	120	5179.9919	Pass	5179.991	Pass	5179.9932	Pass	5179.9922	Pass


Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	138	5179.9755	Pass	5179.974	Pass	5179.9776	Pass	5179.9761	Pass
	120	5179.9751	Pass	5179.974	Pass	5179.977	Pass	5179.9763	Pass
	102	5179.9759	Pass	5179.9745	Pass	5179.9774	Pass	5179.9771	Pass

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

CDD Mode

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	16.42	16.42	16.40	16.43	0.5	Pass
157	5785	16.42	16.41	16.42	16.42	0.5	Pass
165	5825	16.41	16.40	16.40	16.40	0.5	Pass

802.11ac (VHT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	17.64	17.69	17.70	17.64	0.5	Pass
157	5785	17.65	17.66	17.66	17.66	0.5	Pass
165	5825	17.65	17.68	17.67	17.65	0.5	Pass

802.11ac (VHT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
151	5755	36.46	36.48	36.47	36.49	0.5	Pass
159	5795	36.44	36.51	36.46	36.48	0.5	Pass

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
155	5775	76.02	76.50	76.46	75.79	0.5	Pass

Spectrum Plot of Worst Value


802.11a_Chain 1 / CH165

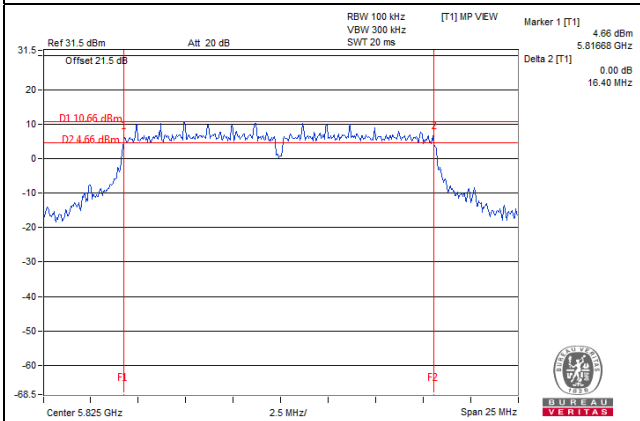


802.11ac (VHT20)_Chain 0 / CH149

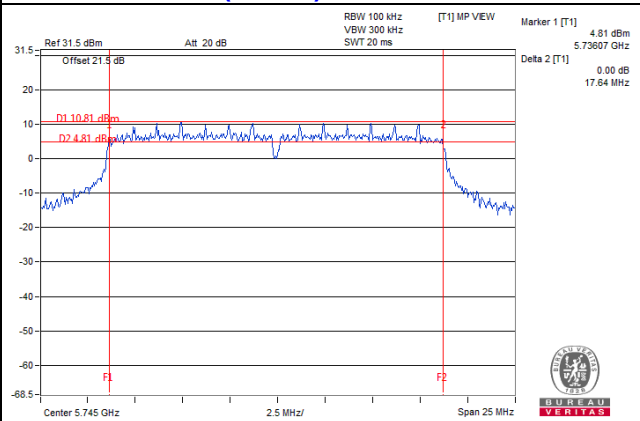

802.11ac (VHT40)_Chain 0 / CH159

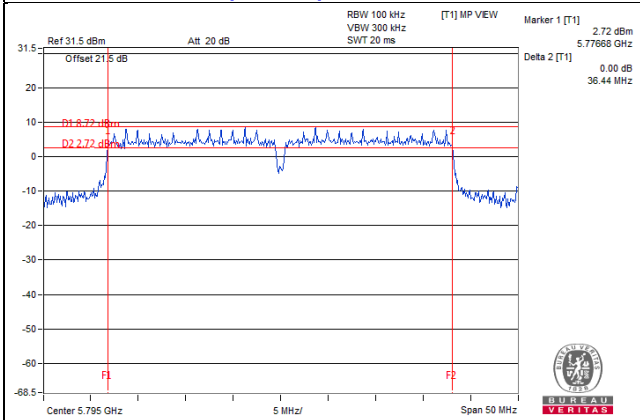

802.11ac (VHT80)_Chain 3 / CH155

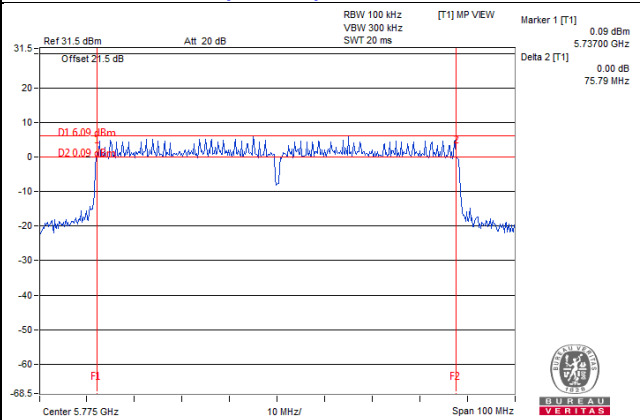

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

CH 149 5745 MHz

Horizontal

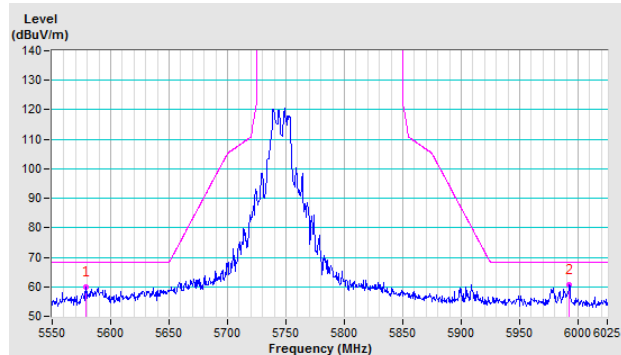


Vertical

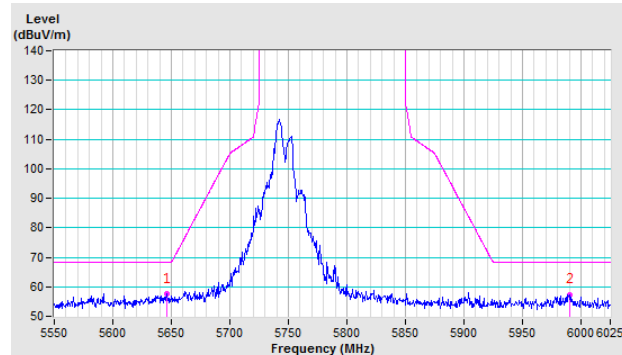


CH 157 5785 MHz

Horizontal

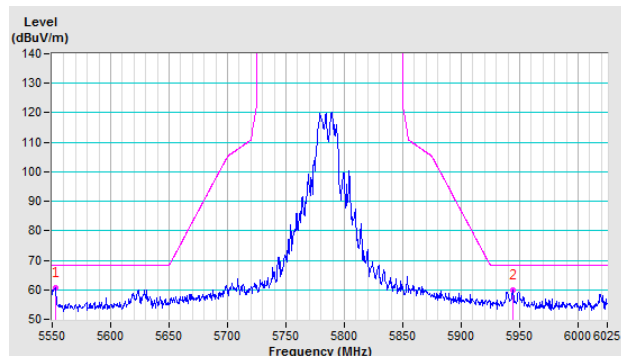


Vertical

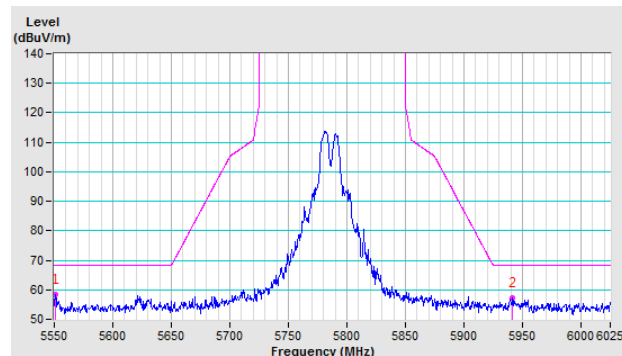


CH 165 5825 MHz

Horizontal

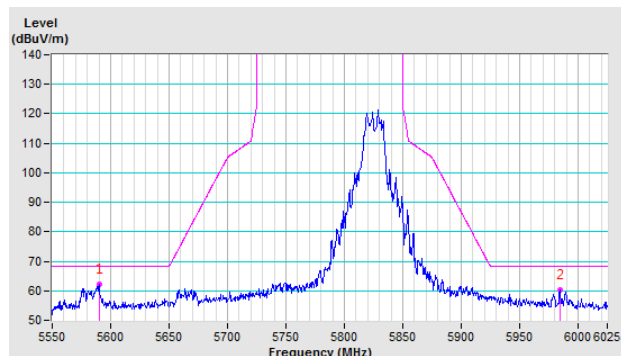


Vertical

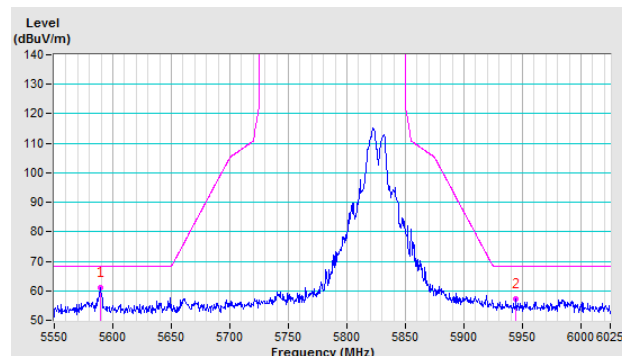


802.11ac (VHT20)

CH 149 5745 MHz

Horizontal

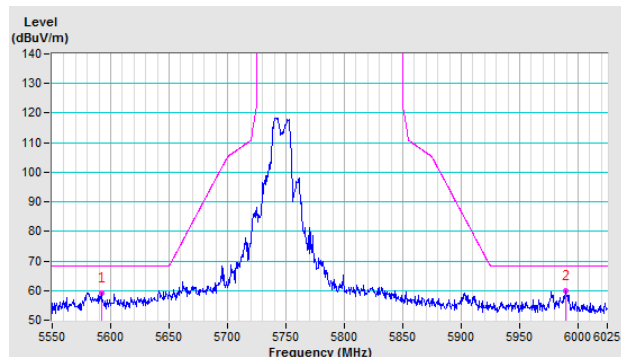


Vertical

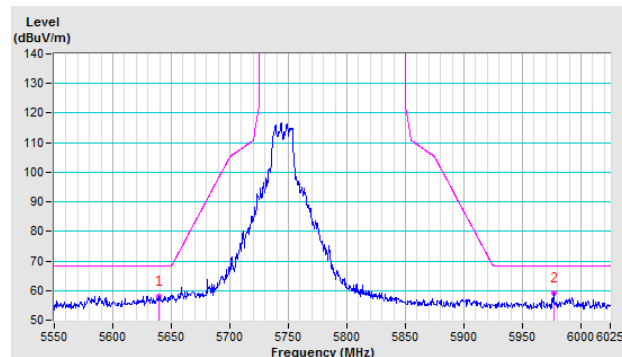


CH 157 5785 MHz

Horizontal

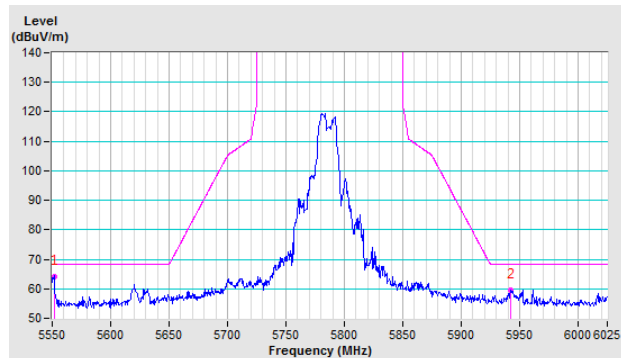


Vertical

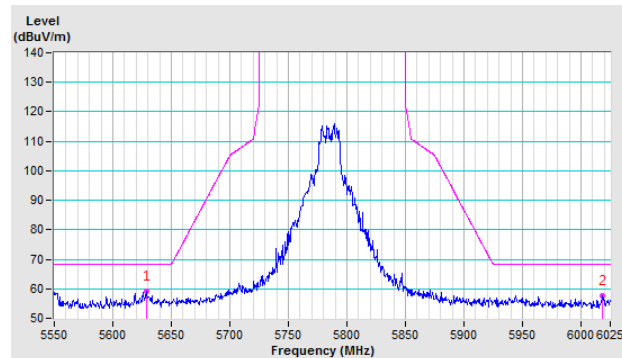


CH 165 5825 MHz

Horizontal

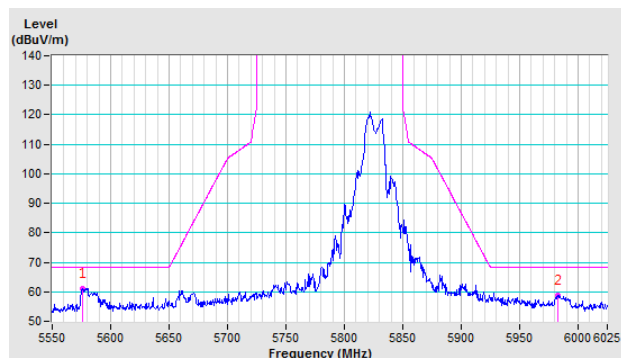


Vertical

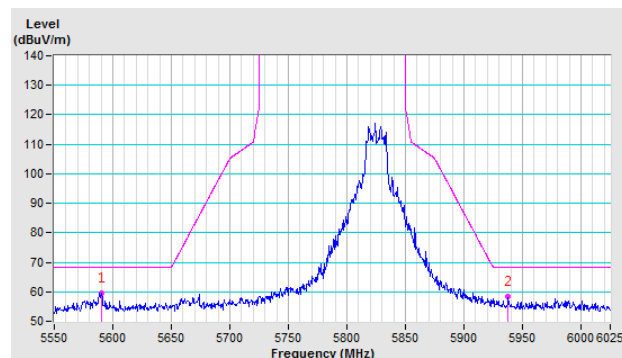


802.11ac (VHT40)

CH 151 5755 MHz

Horizontal

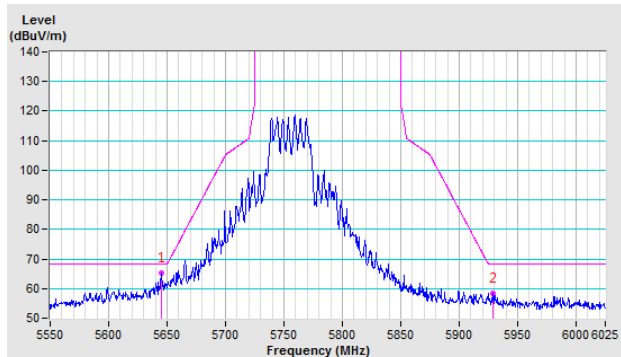


Vertical

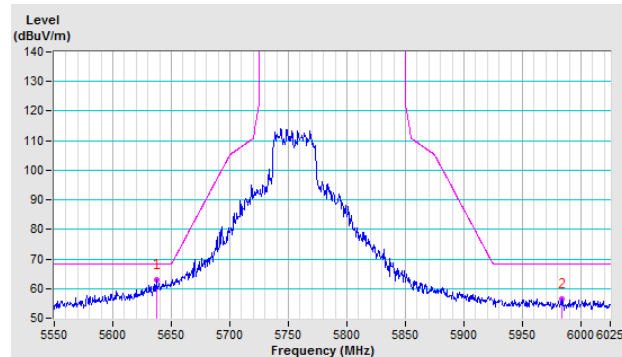


CH 159 5795 MHz

Horizontal

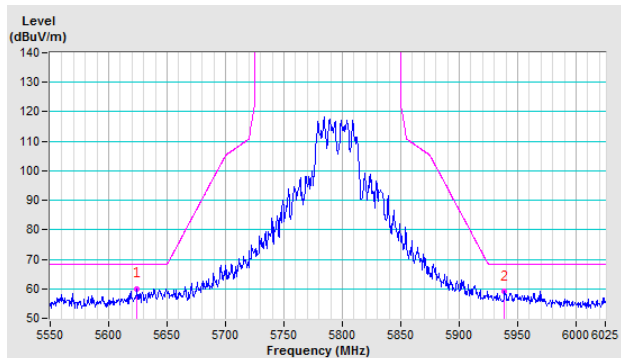


Vertical

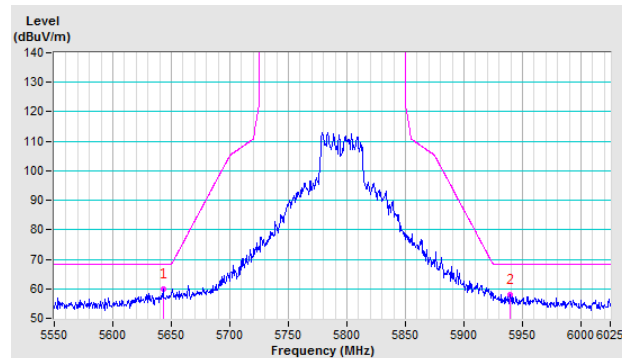


802.11ac (VHT80)

CH 155 5775 MHz

Horizontal

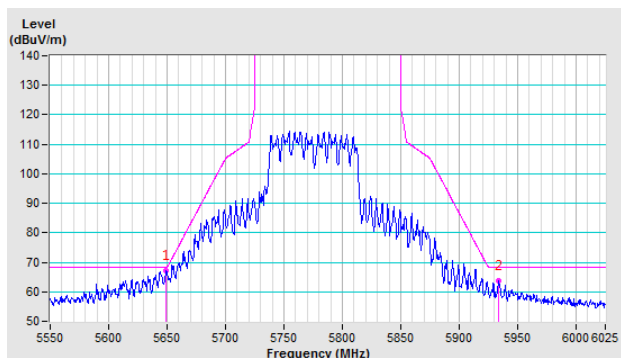

Vertical

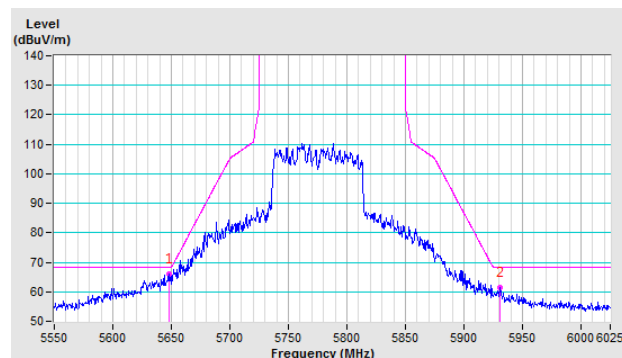

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linkou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---