



VER.	MARK	DCR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
0	N/A	N/A	2019/12/03	First Release	Yong-feng Li

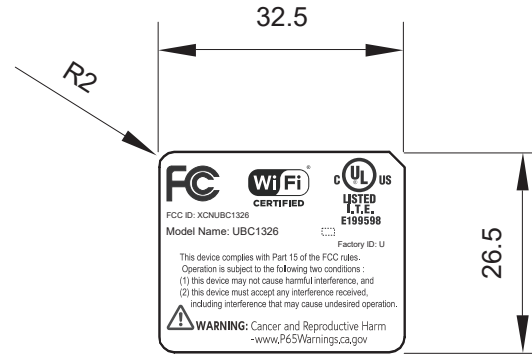

Vendor code

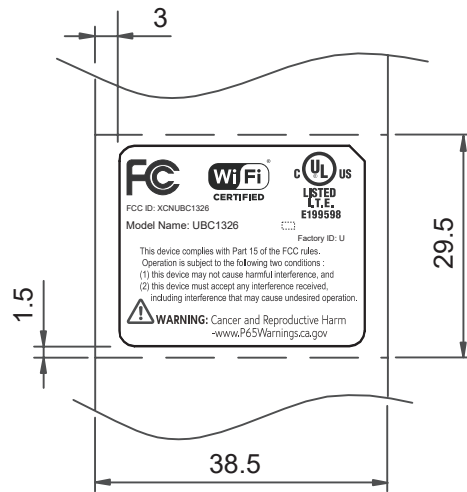

NOTES:

- Surface Material color:white
- Printing color is as color defined in artwork
- Adhesive:Acrylic
- Adhesive thickness:0.025+/-0.003mm
- Adhesion to steel(180°磨钢粘着力):1.8+/-0.3 kg/25mm
- Initial Tack (初期力) : 4 #/boll
- Relese Power(90°剥离力):5 g/25mm
- Holding Power(持粘力测试法):1 hr/kg/20mm²
- Shipment method: Roll
- This part must comply with RoHS.
- Test condition :
 - Soak alcohol(99.7%) at first trial and repeat to soak every 50 times
 - Push force:250g
 - Speed:30 times/min
 - Move back and forth 100 times,printing was not removed

標籤製作黏貼方式 /U10C149.00/00/2 OF 10

MATERIAL (SPEC.)		SCALE	FOXCONN HON HAI PRECISION IND. CO., LTD CNSBG												
50# Mylar(matte)		1:1													
FINISH		SHEET	PART NAME												
膠面咬花		1/1													
Select Dim.	Lot	A	B	C	EPS	EPE	BAG	CTN	V	USR	UNIT	PTT label			
0~6		0.05	0.05	0.10						0.20	0.05	mm			
6~30		0.10	0.15	0.20	0.50	0.50	3.00			0.20	0.05	A4	MODEL	PART NO.	DESIGNED
30~120		0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10	0.10		U10C149.00	500.02478.005	Yong-feng Li
120~300		0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15	0.15	CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED	
300~450		0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20	0.20				N/A
450~600		0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20	0.20				
DRAFT TOLERANCE		±0.2°		CRITICAL DIM. MARK		*									