



## EMC TEST REPORT

No. SH09100184-001

Applicant : Hansong(Nanjing) Technology Ltd.  
8th Kangping Road, Jiangning Economy and Technology  
Development Zone, Nanjing, China, 211100

Manufacturer : Hansong(Nanjing) Technology Ltd.  
8th Kangping Road, Jiangning Economy and Technology  
Development Zone, Nanjing, China, 211100

Equipment : Digital Wireless Audio Transceiver Module

Type/Model : HS-DWAM80/D2DIA

### SUMMARY

The equipment complies with the requirements according to the following standard(s):

**47CFR Part 15 (2008):** Radio Frequency Devices


**ANSIC63.4 (2003):** American National Standard for Methods of Measurement  
of Radio-Noise Emissions from Low-Voltage Electrical and Electronic  
Equipment in the Range of 9 kHz to 40 GHz

**RSS-210 Issue 7 (June 2007):** Low-power Licence-exempt Radiocommunication  
Devices (All Frequency Bands): Category I Equipment

**RSS-Gen Issue 2 (June 2007):** General Requirements and Information for the Certification  
of Radiocommunication Equipment

Date of issue: Dec 15, 2009

Prepared by:

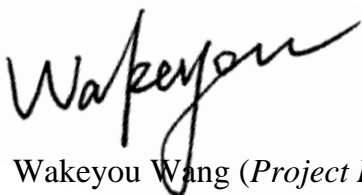

Wakeyou Wang (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)



**FCC ID: XCO-HSMD2DIA80**  
**IC: 7756A- HSMD2DIA80**

## **Description of Test Facility**

Name: Intertek Testing Services Limited Shanghai  
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597  
IC Assigned Code: 2042B-1

Name of contact: Steve Li  
Tel: +86 21 64956565 ext. 214  
Fax: +86 21 54262335 ext. 214



## Content

<b>SUMMARY .....</b>	<b>1</b>
<b>DESCRIPTION OF TEST FACILITY.....</b>	<b>2</b>
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1 Applicant Information .....	5
1.2 Identification of the EUT .....	5
1.3 Technical specification.....	6
1.4 Mode of operation during the test / Test peripherals used .....	6
<b>2. TEST SPECIFICATION .....</b>	<b>7</b>
2.1 Instrument list.....	7
2.2 Test Standard.....	7
<b>3. MINIMUM 6dB BANDWIDTH.....</b>	<b>9</b>
3.1 Limit .....	9
3.2 Test Configuration .....	9
3.3 Test Procedure and test setup.....	9
3.4 Test Protocol .....	10
<b>4. MAXIMUM PEAK OUTPUT POWER.....</b>	<b>11</b>
4.1 Test limit.....	11
4.2 Test Configuration .....	11
4.3 Test procedure and test setup.....	11
4.4 Test protocol.....	12
<b>5. POWER SPECTRUM DENSITY .....</b>	<b>13</b>
5.1 Test limit.....	13
5.2 Test Configuration .....	13
5.3 Test procedure and test setup.....	13
5.4 Test Protocol .....	14
<b>6. RADIATED EMISSION.....</b>	<b>15</b>
6.1 Test limit.....	15
6.2 Test Configuration .....	15
6.3 Test procedure and test setup.....	16
6.4 Test protocol.....	17
<b>7. EMISSION OUTSIDE THE FREQUENCY BAND.....</b>	<b>19</b>
7.1 Limit .....	19
7.2 Test Configuration .....	19
7.3 Test procedure and test setup.....	19
7.4 Test protocol.....	20
<b>8. POWER LINE CONDUCTED EMISSION .....</b>	<b>21</b>
8.1 Limit .....	21
8.2 Test configuration .....	21
8.3 Test procedure and test set up.....	22
8.4 Test protocol.....	23
<b>9. CHANNEL NUMBER OF HOPPING SYSTEM .....</b>	<b>24</b>
9.1 Limit .....	24
9.2 Test Configuration .....	24
9.3 Test procedure and test setup.....	24
9.4 Test protocol.....	25



<b>10. AVERAGE TIME OF OCCUPANCY IN ANY CHANNEL .....</b>	<b>26</b>
10.1 Limit .....	26
10.2 Test Configuration .....	26
10.3 Test procedure and test setup .....	26
10.4 Test protocol.....	27
<b>11. OCCUPIED BANDWIDTH.....</b>	<b>28</b>
11.1 Test limit.....	28
11.2 Test Configuration .....	28
11.3 Test procedure and test setup.....	28
11.4 Test protocol.....	29
<b>12. SPURIOUS EMISSION FOR RECEIVER.....</b>	<b>30</b>
12.1 Test limit.....	30
12.2 Test Configuration .....	30
12.3 Test procedure and test setup.....	30
12.4 Test protocol.....	31



**FCC ID: XCO-HSMD2DIA80**  
**IC: 7756A- HSMD2DIA80**

## **1. General Information**

### **1.1 Applicant Information**

Applicant: Hansong(Nanjing) Technology Ltd.  
8th Kangping Road, Jiangning Economy and  
Technology Development Zone, Nanjing, China,  
211100

Name of contact: Una Chi

Tel: 86 25 66612193

Fax: 86 25 66612091

Manufacturer: Hansong(Nanjing) Technology Ltd.  
8th Kangping Road, Jiangning Economy and  
Technology Development Zone, Nanjing, China,  
211100

Sample received date : Oct 27, 2009

Date of test : Oct 27, 2009 ~ Dec 10, 2009

### **1.2 Identification of the EUT**

Equipment: Digital Wireless Audio Transceiver Module

Type/model: HS-DWAM80/D2DIA

FCC ID: XCO-HSMD2DIA80

IC: 7756A- HSMD2DIA80



### 1.3 Technical specification

Operation Frequency Band:	2412 - 2464 MHz
Modulation:	QPSK
Antenna Designation:	Integral, PCB antenna
Gain of Antenna:	1.0dBi max used.
Rating:	DC 3.3V powered by debug board.
Description of EUT:	<p>Here is one model only.</p> <p>The EUT is the audio transceiver.</p> <p>There are two antennas among the EUT, antenna 1 for transmitting and antenna 2 for receiving.</p> <p>The EUT allows the user to connect virtually any audio receivers, e.g. CD players, MP3 players, amplifier and etc.</p>
I/O port:	Audio input

#### Channel Description:

Channel Identifier	Frequency (MHz)
low	2412
middle	2438
high	2464

### 1.4 Mode of operation during the test / Test peripherals used

Within this test report, both transmitter and receiver mode of EUT were tested.

While testing transmitter mode of EUT, a DVD player generating audio signal were used as a test peripheral.

While testing receiver mode of EUT, the signal generator was employed to generate 2.4GHz continuous answer signal.

For the EUT can be configured in any axes as the user wants, it was set up in three axis (X, Y, Z) and performed test. The three axes were tested one by one while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded.



## 2. Test Specification

### 2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESIB 26	R&S	EC 3045	2009-6-1	2010-5-31
Semi-anechoic chamber	-	Albatross project	EC 3048	2009-6-1	2010-5-31
A.M.N.	ESH2-Z5	R&S	EC 3119	2009-1-23	2010-1-22
A.M.N.	ENV 216	R&S	EC 3394	2009-10-19	2010-10-18
Test Receiver	ESCS 30	R&S	EC 2107	2009-1-23	2010-1-22
Ultra-broadband antenna	CBL 6112D	TESEQ	EC 4206	2009-5-30	2010-6-1
Horn antenna	HF 906	R&S	EC 3049	2009-6-30	2010-6-29
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2009-6-30	2010-6-29
Power meter	PM2002	AR	EC3043-7	2009-1-23	2010-1-22
Power sensor	PH2000	AR	EC3043-8	2009-1-23	2010-1-22
Signal generator	SMR 20	R&S	EC 3044-1	2009-8-21	2010-8-20
Spectrum Analyzer	E7402A	Agilent	EC2254	2009-9-17	2010-9-16
High-Pass Filter	WHKX2.8/18G-12SS	Wainwright	SN1	2009-3-3	2010-3-3
High-Pass Filter	WHKX7.0/18G-8SS	Wainwright	SN16	2009-3-3	2010-3-3
Lowpass Filter	WLKS4500-9SS	Wainwright	SN2	2009-3-3	2010-3-3

### 2.2 Test Standard

47CFR Part 15 (2008)  
ANSI C63.4: 2003  
RSS-210 Issue 7 (June 2007)  
RSS-Gen Issue 2 (June 2007)



## 2.3 Test Summary

**This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.**

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-210 Issue 7 Annex 8	Pass
Maximum peak output power	15.247(b)(1)	RSS-210 Issue 7 Annex 8	Pass
Power spectrum density	15.247(e)	RSS-210 Issue 7 Annex 8	Pass
Radiated emission	15.205 & 15.209	RSS-210 Issue 7 Clause 2	Pass
Emission outside the frequency band	15.247(d)	RSS-210 Issue 7 Annex 8	Pass
Power line conducted emission	15.207	RSS-Gen Issue 2 Clause 7.2.2	Pass
Channel number of hopping system	15.247(a)(1)(iii)	RSS-210 Issue 7 Annex 8	NA
Average time of occupancy in any channel	15.247(a)(1)(iii)	RSS-210 Issue 7 Annex 8	NA
Occupied bandwidth	-	RSS-Gen Issue 2 Clause 4.6.1	Tested
Spurious emission for receiver	-	RSS-210 Issue 7 Clause 2.3	Pass

## 2.4 Data rate VS power

The data rate of EUT is fixed and cannot be adjusted.




### **3. Minimum 6dB Bandwidth**

**Test result: PASS**

#### **3.1 Limit**

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### **3.2 Test Configuration**

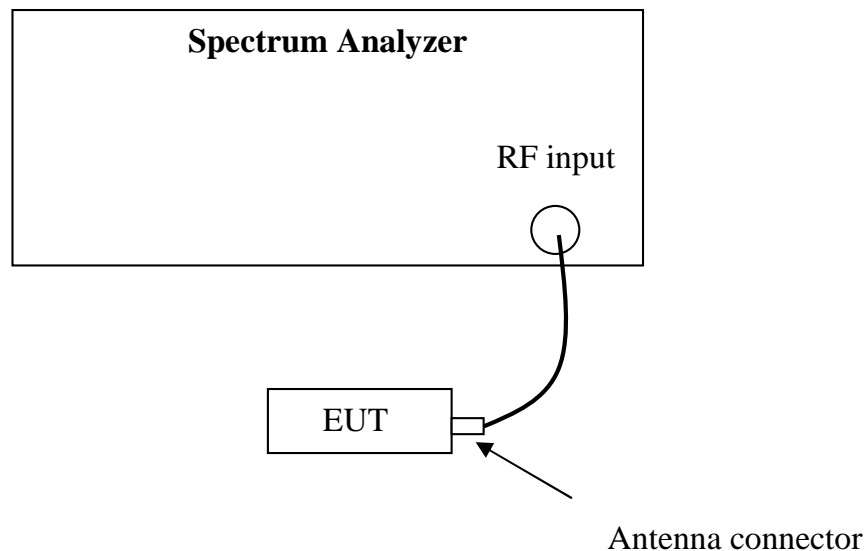

#### **3.3 Test Procedure and test setup**

The minimum 6dB bandwidth per FCC §15.247(a)(2) is measured using the Spectrum Analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW. The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.



### 3.4 Test Protocol

Temperature : 22°C  
Relative Humidity : 43%

Mode	CH	Antenna 1 (MHz)	Antenna 2 (MHz)	Limit (MHz)
-	L	9.66	-	$\geq 0.5$
	M	9.58	-	$\geq 0.5$
	H	9.62	-	$\geq 0.5$

## 4. Maximum peak output power

Test result: Pass

### 4.1 Test limit


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

### 4.2 Test Configuration

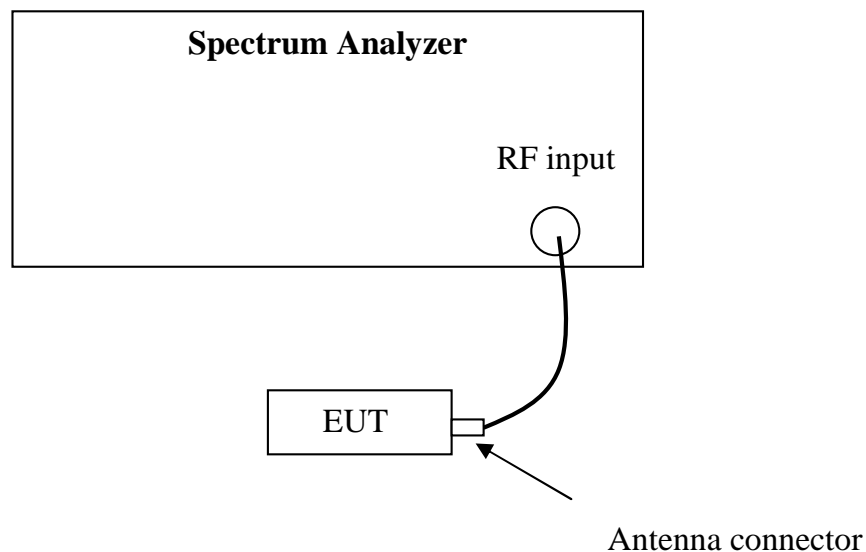

### 4.3 Test procedure and test setup

The power output per FCC § 15.247(b)(1) is measured using the Spectrum Analyzer with the resolutions bandwidth set at 1MHz, the video bandwidth set at 3MHz, and the SPAN>>RBW. The test was performed at 3 channels (lowest, middle and highest channel). The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements (Power Output Option 2, method#1).



#### 4.4 Test protocol

Temperature : 22 °C  
Relative Humidity : 43 %

Mode	CH	Cable loss (dB)	Corrected reading (dBm)	Limit (dBm)
-	L	0.90	16.98	≤30
	M	0.90	16.45	≤30
	H	0.90	15.86	≤30

Note: Please refer to the test data for corrected reading.

**For the gain of antenna = 1.0dBi, the maximum e.i.r.p = 16.98dBm + 1.00dBi = 17.98dBm = 62.81mW (lower than the e.i.r.p limit of 4W showed in RSS-210.).**


## **5. Power spectrum density**

**Test result: Pass**

### **5.1 Test limit**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### **5.2 Test Configuration**

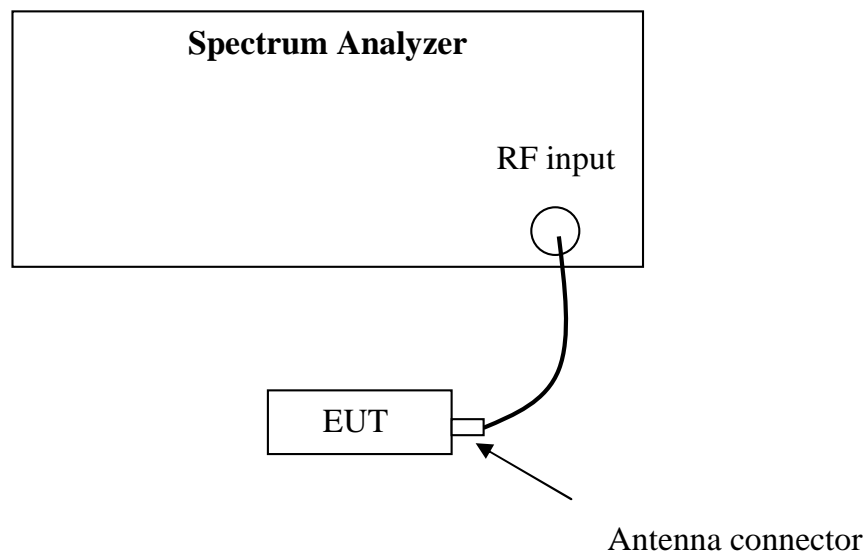

### **5.3 Test procedure and test setup**

The power output per FCC §15.247(e) was measured using the Spectrum Analyzer with the resolutions bandwidth set at 3kHz, the video bandwidth set at 10kHz. The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.



#### 5.4 Test Protocol

Temperature : 22 °C  
Relative Humidity : 43 %

Mode	CH	Antenna 1 (dBm/3kHz)	Antenna 2 (dBm/3kHz)	Limit (dBm/3kHz)
-	L	-1.71	-	$\leq 8$
	M	-2.29	-	$\leq 8$
	H	-3.12	-	$\leq 8$

## 6. Radiated emission


Test result: **PASS**

### 6.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

### 6.2 Test Configuration

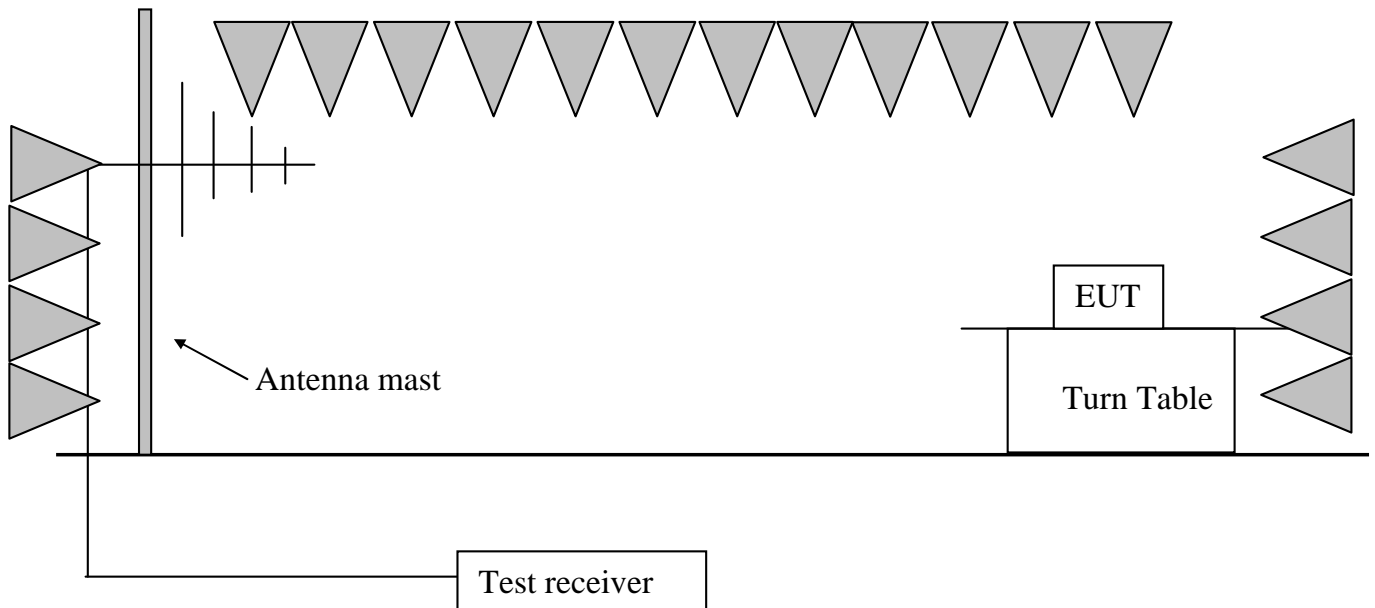



### **6.3 Test procedure and test setup**

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)

RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

RBW = 1MHz, VBW = 10Hz (>1GHz for AV);



#### 6.4 Test protocol

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2410.67	30.70	101.60	Fundamental	/	PK
	V	30.00	18.90	39.20	Spurious	/	PK
	H	3213.64	-0.30	63.50	Spurious	/	PK
	H	239.93	13.70	43.50	Spurious	/	PK
	H	2398.99	30.70	64.10	74.00	9.90	PK
	H	2398.37	30.70	52.50	54.00	1.50	AV
	H	2483.50	30.70	40.60	74.00	33.40	PK
	H	2483.50	30.70	25.90	54.00	28.10	AV
	H	109.70	13.00	42.50	43.50	1.00	PK
	H	4821.93	0.20	43.20	54.00	10.80	PK
M	H	2437.52	30.70	100.90	Fundamental	/	PK
	V	30.00	18.90	39.20	Spurious	/	PK
	H	3250.13	-0.30	63.20	Spurious	/	PK
	H	239.93	13.70	43.50	Spurious	/	PK
	H	2390.00	30.70	42.70	74.00	31.30	PK
	H	2390.00	30.70	28.80	54.00	25.20	AV
	H	2483.50	30.70	40.80	74.00	33.20	PK
	H	2483.50	30.70	26.30	54.00	27.70	AV
	H	109.70	13.00	42.50	43.50	1.00	PK
	H	4875.16	0.20	43.00	54.00	11.00	PK
H	H	2465.27	30.70	100.20	Fundamental	/	PK
	V	30.00	18.90	39.20	Spurious	/	PK
	H	3286.08	-0.30	63.90	Spurious	/	PK
	H	239.93	13.70	43.50	Spurious	/	PK
	H	2390.00	30.70	42.50	74.00	31.50	PK
	H	2390.00	30.70	28.60	54.00	25.40	AV
	H	2494.75	30.70	44.30	74.00	29.70	PK



	H	2490.56	30.70	31.60	54.00	22.40	AV
	H	109.70	13.00	42.50	43.50	1.00	PK
	H	4931.55	0.20	43.00	54.00	11.00	PK

Remark: 1. For fundamental & restrict emission at 2300-2390MHz and 2483.5-2500MHz test, no amplifier is employed.

2. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)

3. Corrected Reading = Original Receiver Reading + Correct Factor

4. Margin = limit – Corrected Reading

5. If the PK reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.

Then Correct Factor =  $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$ ; Corrected Reading =  $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$

Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m, then Margin =  $54 - 10.20 = 43.80\text{dBuV/m}$


## 7. Emission outside the frequency Band

Test result: PASS

### 7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 7.2 Test Configuration

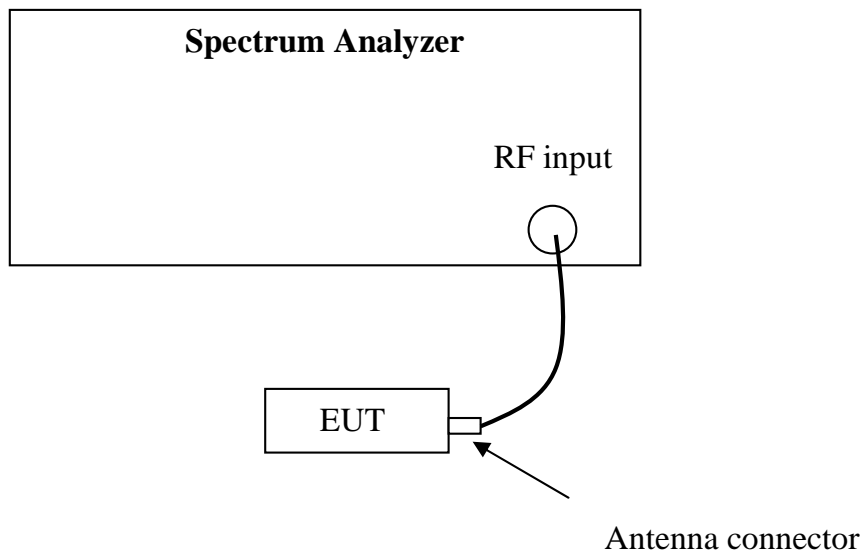

### 7.3 Test procedure and test setup

The Emission outside the frequency Band per FCC §15.247(d) is measured using the Spectrum Analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW.

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.



**FCC ID: XCO-HSMD2DIA80**  
**IC: 7756A- HSMD2DIA80**

#### **7.4 Test protocol**

Please refer to the test data. All the emission outside the frequency band is at least 20 dB below that in the 100 kHz bandwidth within the band.


## 8. Power line conducted emission

**Test result:**      **Pass**

### 8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

### 8.2 Test configuration

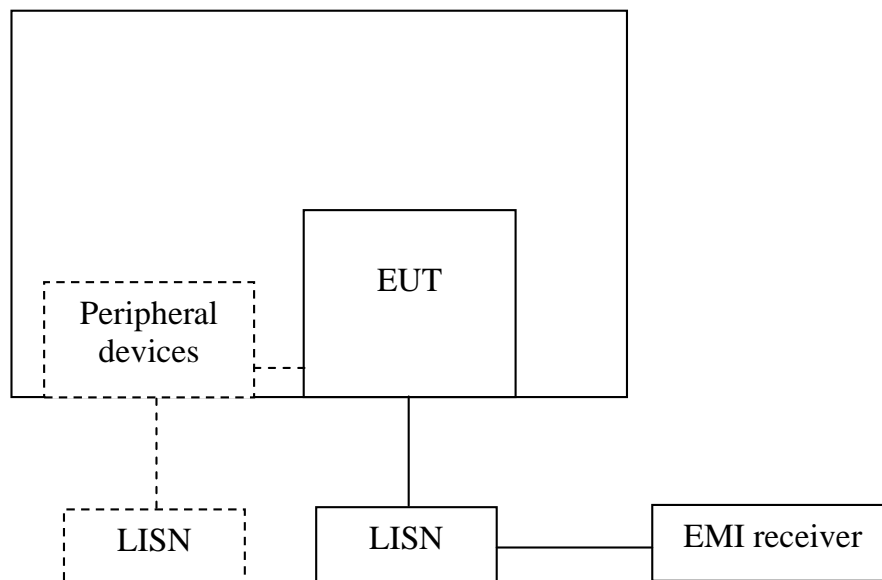

- ☒ For table top equipment, wooden support is 0.8m height table
- ☐ For floor standing equipment, wooden support is 0.1m height rack.



### **8.3 Test procedure and test set up**

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a  $50\Omega/50\mu\text{H}$  coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a  $50\Omega/50\mu\text{H}$  coupling impedance with  $50\Omega$  termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.

The bandwidth of the test receiver is set at 9 kHz.

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.



#### 8.4 Test protocol

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
0.17 (L)	3.00	45.11	28.70	65.10	55.10	19.99	26.40
0.20 (L)	3.00	40.84	26.39	63.58	53.58	22.74	27.19
0.46 (N)	3.00	35.48	22.60	56.78	46.78	21.30	24.18
2.63 (N)	3.00	29.51	17.91	56.00	46.00	26.49	28.09
3.21 (N)	3.00	31.02	18.23	56.00	46.00	24.98	27.77
9.88 (N)	3.00	29.85	23.21	60.00	50.00	30.15	26.79
Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB). 2. Margin (dB) = Limit - Corrected Reading.							


## 9. Channel Number of hopping system

Test result: NA

### 9.1 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 9.2 Test Configuration

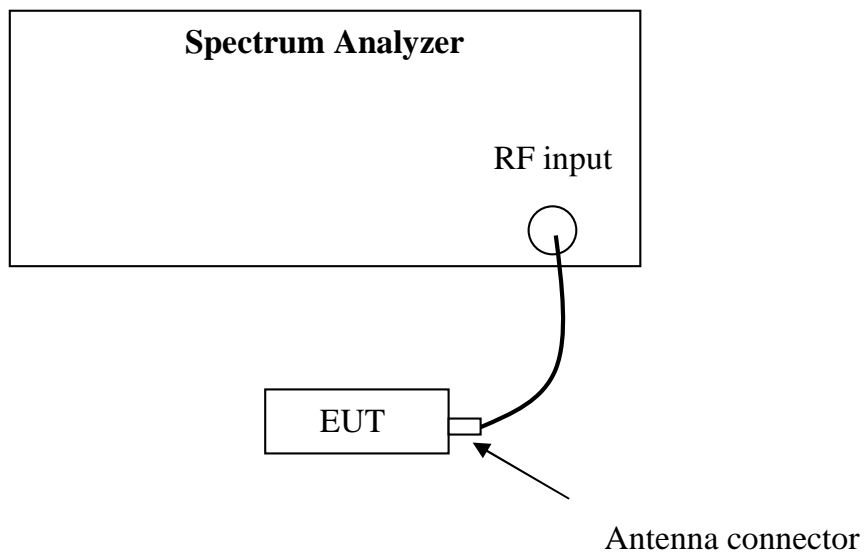

### 9.3 Test procedure and test setup

The channel number per FCC §15.247(a)(1)(iii) is measured using the Spectrum Analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW.

The RF passband of the EUT was divided into 3 appropriate bands to test.

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.





**9.4 Test protocol**

Channel Number	Limit
-	$\geq 15$


## 10. Average time of occupancy in any channel

Test result: NA

### 10.1 Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 10.2 Test Configuration

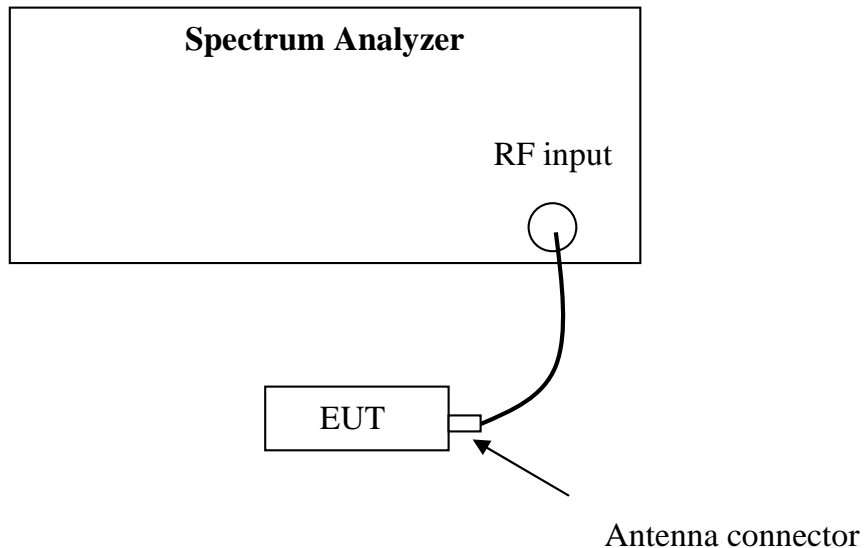

### 10.3 Test procedure and test setup

Average time of occupancy in any channel per FCC § 15.247(a)(1)(iii) is measured using the Spectrum Analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN set to be 0Hz to test in time domain. The test is performed at the middle channel.



#### 10.4 Test protocol

Packet	Observed period (s) <b>P</b>	Time of occupancy for single hopping (ms) <b>O</b>	Hops among the interval of 3.6 s <b>I</b>	Average time of occupancy (s) <b>T</b>	Limit (s)
Packet Type 4	-	-	-	-	≤0.4
Packet Type 11	-	-	-	-	≤0.4
Packet Type 15	-	-	-	-	≤0.4

Remark: 1. There are 79 channels in all. So the observed period  $P = 0.4 * 79 = 31.6$  s.

2. Average time of occupancy  $T = O * I * P / 3.6$


## **11. Occupied Bandwidth**

**Test Status: Tested**

### **11.1 Test limit**

None

### **11.2 Test Configuration**

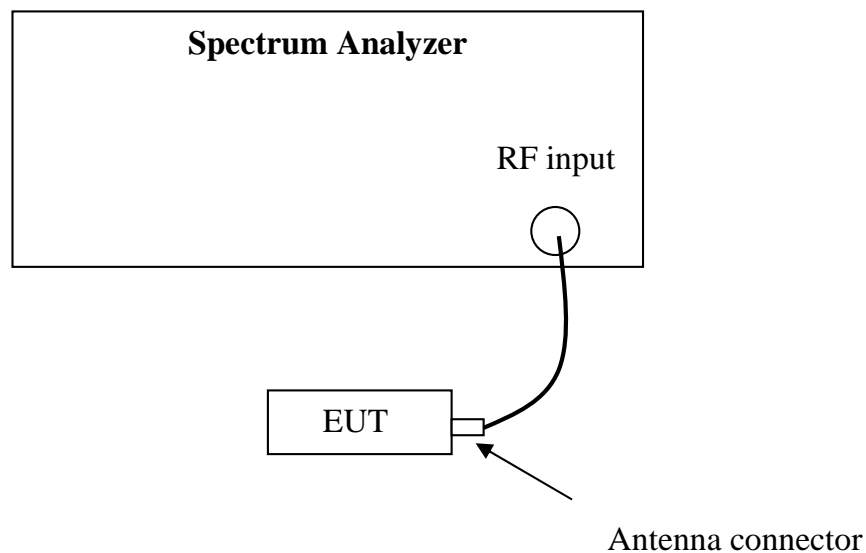

### **11.3 Test procedure and test setup**

The occupied bandwidth per RSS-Gen Issue 2 Clause 4.6.1 was measured using the Spectrum Analyzer with the resolutions bandwidth set at 1MHz, the video bandwidth set at 3MHz.



#### 11.4 Test protocol

Temperature : 22 °C  
Relative Humidity : 43 %

Mode	Antenna	Occupied Bandwidth (MHz)	Max. Value (MHz)
-	1	15.53	15.53
	-	-	

**Remark: “Max. Value” is the maximum test result of all the measured occupied bandwidth.**



## 12. Spurious emission for receiver

Test result: PASS

### 12.1 Test limit

The spurious emission shall test through 3 times tuneable or local oscillator frequency whichever is the higher, without exceeding 40 GHz.

1) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2nW per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5nW above 1 GHz.

2) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

### 12.2 Test Configuration

Please refer to clause 6.2

### 12.3 Test procedure and test setup

Please refer to clause 6.3.



## 12.4 Test protocol

Polarization	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
V	64.95	6.20	36.90	40.00	3.10	PK
H	109.58	13.00	42.20	43.50	1.30	PK
H	239.95	13.70	43.20	46.00	2.80	PK
H	405.17	19.20	43.10	46.00	2.90	PK
V	517.92	20.40	27.30	46.00	18.70	PK
V	945.56	25.80	44.30	46.00	1.70	PK
V	1817.64	1.60	50.30	54.00	3.70	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)  
2. Corrected Reading = Original Receiver Reading + Correct Factor  
3. Margin = limit – Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
Original Receiver Reading = 10dBuV.  
Then Correct Factor = 30.20 + 2.00 = 32.20dB/m; Corrected Reading = 10dBuV + 32.20dB/m = 42.20dBuV/m  
Assuming limit = 54dBuV/m, Corrected Reading = 42.20dBuV/m, then Margin = 54 - 42.20 = 11.80dBuV/m