

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666
Fax: +86 (0) 21 6191 5655
ee.shanghai@sgs.com

Report No.: SHEM110900119302
Page: 1 of 42

TEST REPORT

Application No. : SHEM110900119302
Applicant: Hansong(Nanjing) Technology Ltd.
FCC ID: XCO-HSWK200T
IC: 7756A-HSWK200T
Fundamental Frequency : 2412-2464 MHz
Equipment Under Test (EUT):
Marking: Jamo
Name: Wireless audio system
Model No.: WT 200
Standards: FCC PART 15 SUBPART C, Section 15.247
RSS-210 Issue 8 (December 2010)
RSS-Gen Issue 3 (December 2010)
Date of Receipt: Sep. 20, 2011
Date of Test: Sep. 22, 2011 to Sep 28, 2011
Date of Issue: Sep 31, 2011
Test Result : **PASS ***

* In the configuration tested, the EUT complied with the standards specified above.



Jim Xu
E&E Section Head
SGS-CSTC(Shanghai) Co., Ltd.



Neil Zhang
E&E Project Engineer
SGS-CSTC(Shanghai) Co., Ltd.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

2 Test Summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-210 Issue 8 Annex 8	Pass
Maximum peak output power	15.247(b)	RSS-210 Issue 8 Annex 8	Pass
Power spectrum density	15.247(e)	RSS-210 Issue 8 Annex 8	Pass
Radiated emission	15.205 & 15.209	RSS-210 Issue 8 Clause 2	Pass
Emission outside the Frequency band	15.247(d)	RSS-210 Issue 8 Annex 8	Pass
Power line conducted emission	15.207	RSS-Gen Issue 8 Clause 7.2.4	Pass
Channel number of hopping system	15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8	NA
Average time of occupancy in any channel	15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8	NA
Occupied bandwidth	-	RSS-Gen Issue 3 Clause 4.6.1	Tested
Antenna Requirement	15.203	-	Compliance

Noted: “-” means not require in the rules.

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION	4
4.2 DETAILS OF E.U.T.	4
4.3 DESCRIPTION OF SUPPORT UNITS	4
4.4 TEST LOCATION	4
4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER	5
4.6 TEST FACILITY	5
5 TEST RESULTS	6
5.1 TEST INSTRUMENTS	6
5.2 E.U.T. OPERATION	7
5.3 TEST PROCEDURE & MEASUREMENT DATA	7
5.3.1 Conducted Emission Test	7
5.3.2 Peak Output Power Measurement	10
5.3.3 6dB Bandwidth	15
5.3.4 Radiated Emission Band Edge	19
5.3.5 Conducted Spurious Emission Test	28
5.3.6 Spurious Radiated Emission Test	32
5.3.7 Peak Power Spectral Density	37
5.3.8 Occupied Bandwidth Test	39
5.3.9 Antenna Requirement	42

4 General Information

4.1 Client Information

Applicant :	Hansong(Nanjing) Technology Ltd.
Applicant Address:	8 th Kangping Road, Jiangning Economy and Technology Development Zone,Nanjing,201106,China
Manufacturer:	Hansong(Nanjing) Technology Ltd.
Manufacturer Address:	8 th Kangping Road, Jiangning Economy and Technology Development Zone,Nanjing,201106,China

4.2 Details of E.U.T.

Marking:	Jamo								
Name:	wireless audio system								
Model No.:	WT200								
Power Supply:	5VDC (USB port supply)								
Hardware Version:	N/A								
Software Version:	N/A								
Frequency Band and Channels :	<p>2412-2464 MHz</p> <p>Channel Description:</p> <table style="margin-left: auto; margin-right: auto;"> <tr> <td style="text-align: center;">Channel of Transmitter</td><td style="text-align: center;">Frequency(MHz)</td></tr> <tr> <td style="text-align: center;">1</td><td style="text-align: center;">2412</td></tr> <tr> <td style="text-align: center;">2</td><td style="text-align: center;">2438</td></tr> <tr> <td style="text-align: center;">3</td><td style="text-align: center;">2464</td></tr> </table>	Channel of Transmitter	Frequency(MHz)	1	2412	2	2438	3	2464
Channel of Transmitter	Frequency(MHz)								
1	2412								
2	2438								
3	2464								
Modulation Type:	QPSK								

4.3 Description of Support Units

Name	Model No.	Remark
Laptop	ThinkPad X100e	N/A
AC Adapter	Lenovo 65W 20V	N/A
Mouse	Lenovo M-UAE119	N/A

4.4 Test Location

Tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

No.588 West Jindu Road, Songjiang District, Shanghai, China. 201612.

Tel: +86 21 6191 5666 Fax: +86 21 6191 5655

No tests were sub-contracted.

4.5 Other Information Requested by the Customer

None.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2014-07-26.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2012-03-17.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2014-09-20.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3172 and C-3514 respectively. Date of Registration: 2009-11-30. Date of Expiry: 2012-03-17.

5 Test Results

5.1 Test Instruments

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2011-6-3	2012-6-1
2	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2011-6-3	2012-6-1
3	Horn Antenna	Rohde & Schwarz	HF906	100284	2011-3-12	2012-3-10
4	ANTENNA	SCHWARZBECK	VULB9168	9168-313	2011-6-3	2012-6-1
5	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2010-10-9	2011-10-8
6	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co;Ltd	BY—2009P	--	2010-10-15	2011-10-14
7	CLAMP METER	FLUKE	316	86080010	2011-04-22	2012-04-20
8	Thermo-Hygrometer	ZHICHEN	ZC1-2	01050033	2010-10-15	2011-10-14
9	High-low temperature cabinet	Shanghai YuanZhen	GW2050	--	2011-6-17	2012-6-16
11	Tunable Notch Filter	Wainwright instruments Gmbh	WRCT1800.0/2000.0-0.2/40-5SSK	11	2011-1-26	2012-1-25
12	Tunable Notch Filter	Wainwright instruments Gmbh	WRCT800.0/880.0-0.2/40-5SSK	9	2011-1-26	2012-1-25
13	High pass Filter	FSCW	HP 12/2800-5AA2	19A45-02	2011-4-8	2012-4-7
14	Low noise amplifier	TESEQ	LNA6900	70133	2011-7-5	2012-7-4
15	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2011-06-04	2012-06-03
16	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127-490	2011-05-07	2012-05-06

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEM110900119302
Page: 7 of 42

18	AVG Power Sensor	Rohde & Schwarz	NRP-Z22	1137	2011-05-07	2012-05-06
20	Power meter	Rohde & Schwarz	NRP	101641	2011-05-05	2012-05-04

5.2 E.U.T. Operation

Input voltage: 5VDC (USB port supply)

Operating Environment:

Temperature: 24.0 °C

Humidity: 50 % RH

Atmospheric Pressure: 1010 mbar

EUT Operation: The EUT has been tested under operating condition.

Test program was used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2412MHz) mid(2438MHz) high(2464MHz)

5.3 Test Procedure & Measurement Data

5.3.1 Conducted Emission Test

Test Requirement: FCC Part15 15.207

Test date: Sep. 22, 2011

Standard Applicable According to section 15.207,frequency 150KHz to 30MHz shall not exceed the limit table as blew.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

EUT Setup

1.The conducted emission tests were performed in the test site,using the setup in accordance with the ANSI C63.10-2009.

2.EUT is charged with PC.The AC Power adaptor of PC was plug-in LISN.The rear of the EUT and periphearals were placed flushed with the rear of the tabletop.


3.The LISN was connected with 120V AC/60Hz power source.

Measurement Result

Operation mode:Normal Link Mode

Note:All test modes have been tested.

L line:

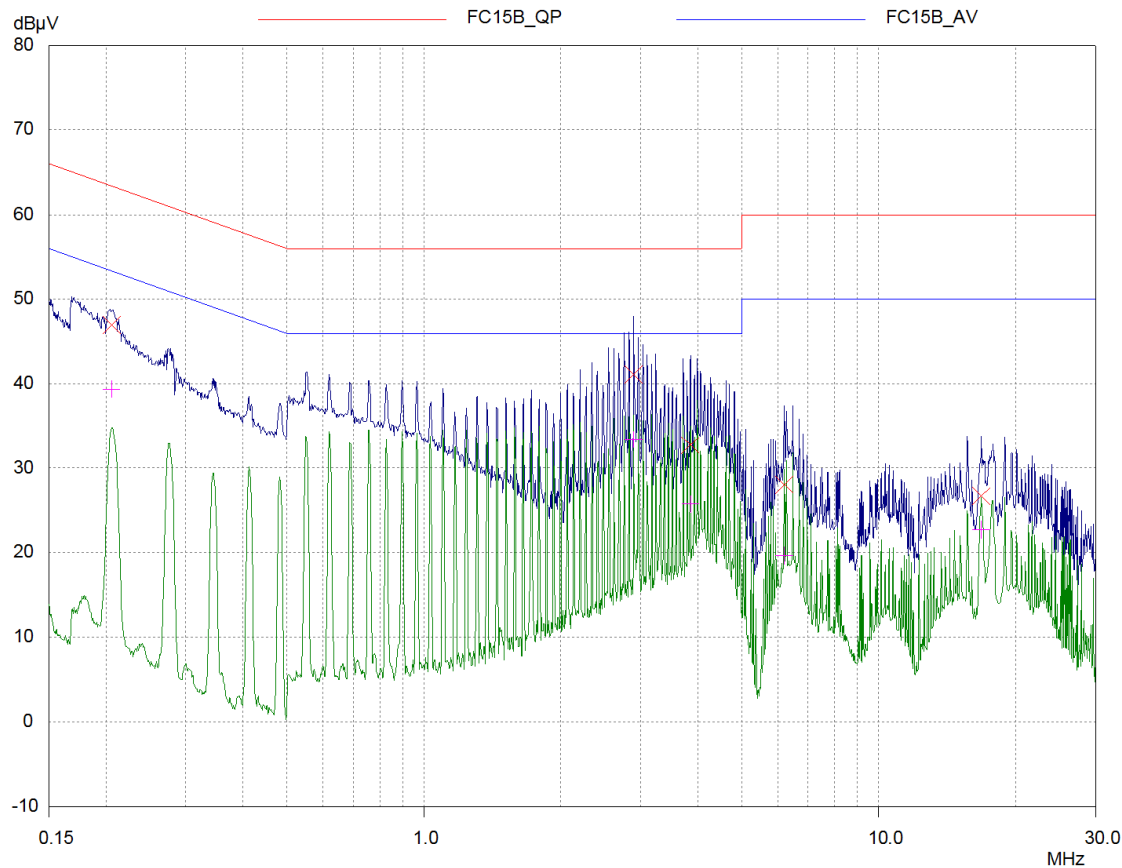

Final Measurement Results


Frequency MHz	QP Level dBµV	QP Limit dBµV	QP Delta dB
0.20561	46.96	63.38	16.42
2.88916	41.12	56.00	14.88
3.85123	32.74	56.00	23.26
6.19314	28.00	60.00	32.00
16.80118	26.70	60.00	33.30

Frequency MHz	AV Level dBµV	AV Limit dBµV	AV Delta dB
0.20561	39.43	53.38	13.95
2.88916	33.37	46.00	12.63
3.85123	25.70	46.00	20.30
6.19314	19.68	50.00	30.32
16.80118	22.66	50.00	27.34

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEM110900119302
Page: 9 of 42

N Line:

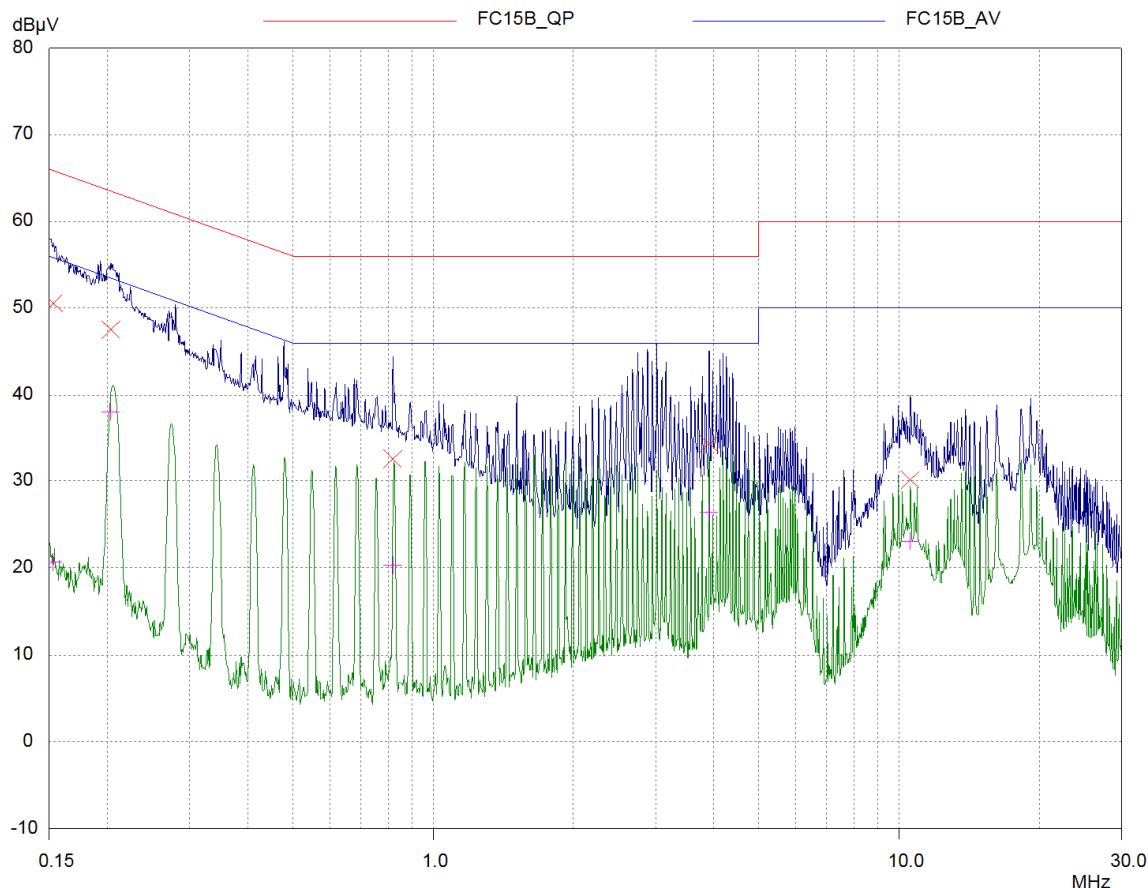

Final Measurement Results

Frequency MHz	QP Level dBμV	QP Limit dBμV	QP Delta dB
0.15302	50.60	65.83	15.23
0.20316	47.52	63.48	15.96
0.81831	32.54	56.00	23.46
3.91322	34.34	56.00	21.66
10.57375	30.16	60.00	29.84

Frequency MHz	AV Level dBμV	AV Limit dBμV	AV Delta dB
0.15302	20.67	55.83	35.16
0.20316	38.09	53.48	15.39
0.81831	20.30	46.00	25.70
3.91322	26.38	46.00	19.62
10.57375	23.07	50.00	26.93

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

5.3.2 Peak Output Power Measurement

Test Requirement: FCC Part 15 15.247(a)(2),(b)
Test date Sep 23, 2011
Standard Applicable: According to section 15.247(a)(2),(b)
(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Measurement Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.
3. Set the occur band to the entire emission bandwidth of the signal.
4. Record the max.channel power reading
5. Repeat above procedures until all the frequency measured were complete.


Measurement Result:

CH	Frequency (MHz)	Reading Power(dBm)	Cable Loss (dB)	Peak Output Power (dBm)	Limit (dBm)	Result
LOW	2412	9.82	0.5	10.32	30	PASS
MID	2438	9.68	0.5	10.18	30	PASS
HIGH	2464	9.52	0.5	10.02	30	PASS

For average power test use the NRP-Z22 Average power sensor and NRP-Z4 connect with PC and test software is NRPV Virtual Power Meter

CH	Frequency (MHz)	Average Power (dBm)
LOW	2412	6.32
MID	2438	6.24
HIGH	2464	6.18


26dB Bandwidth
CH Low 2412MHz

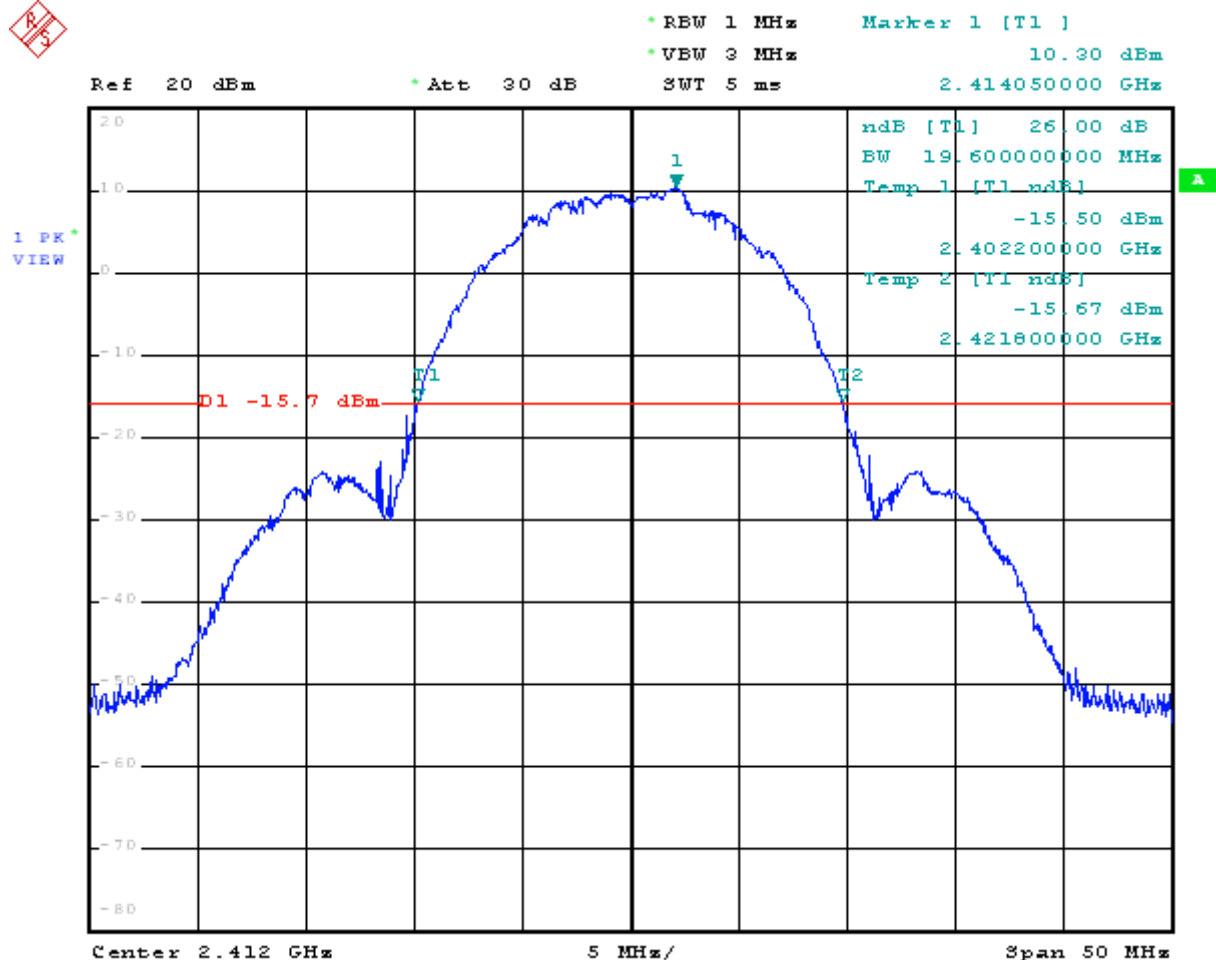


**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEM110900119302
Page: 12 of 42


CH Mid 2438MHz

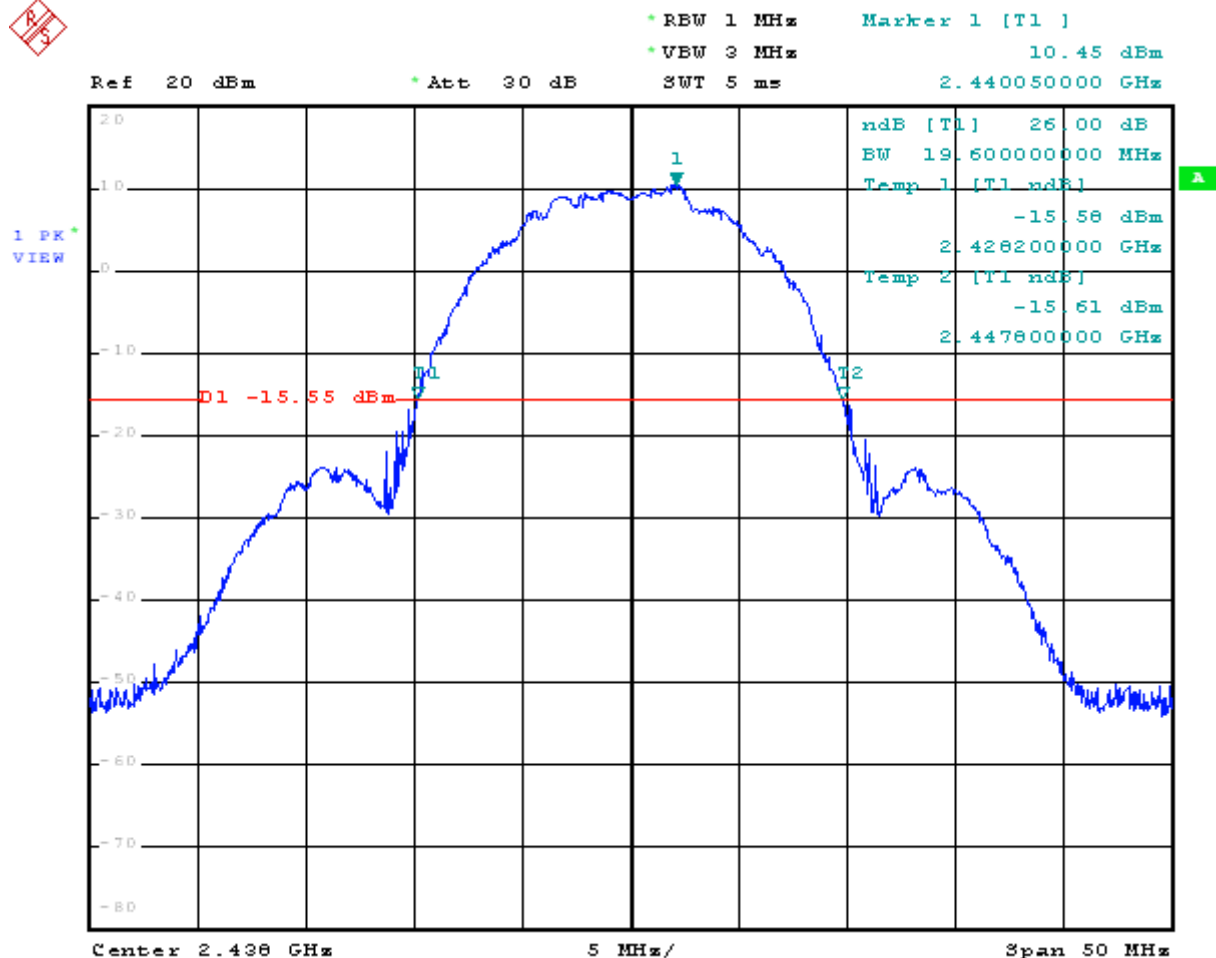

CH High 2464MHz

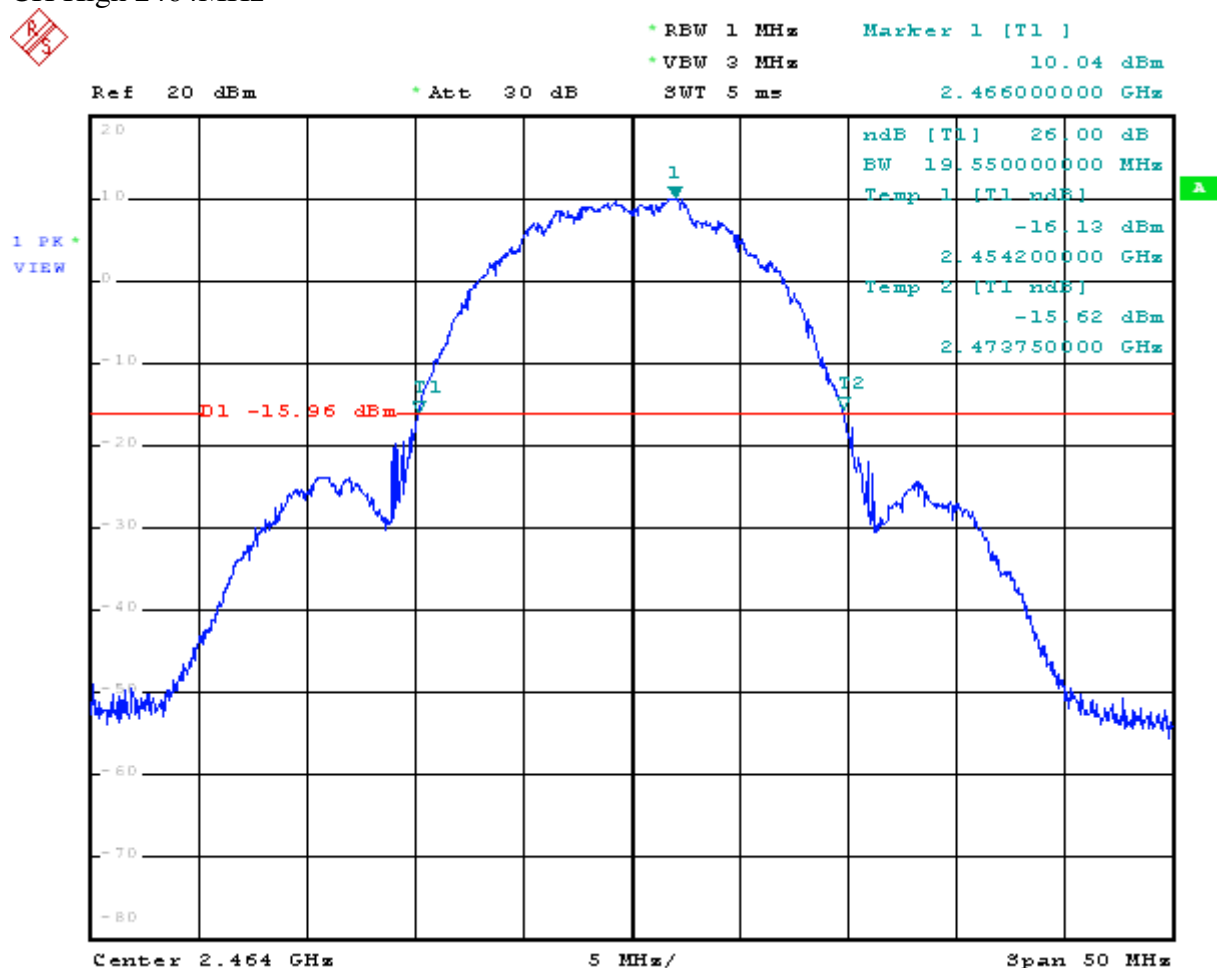


Peak Power Output Data Plot(CH Low 2412MHz)

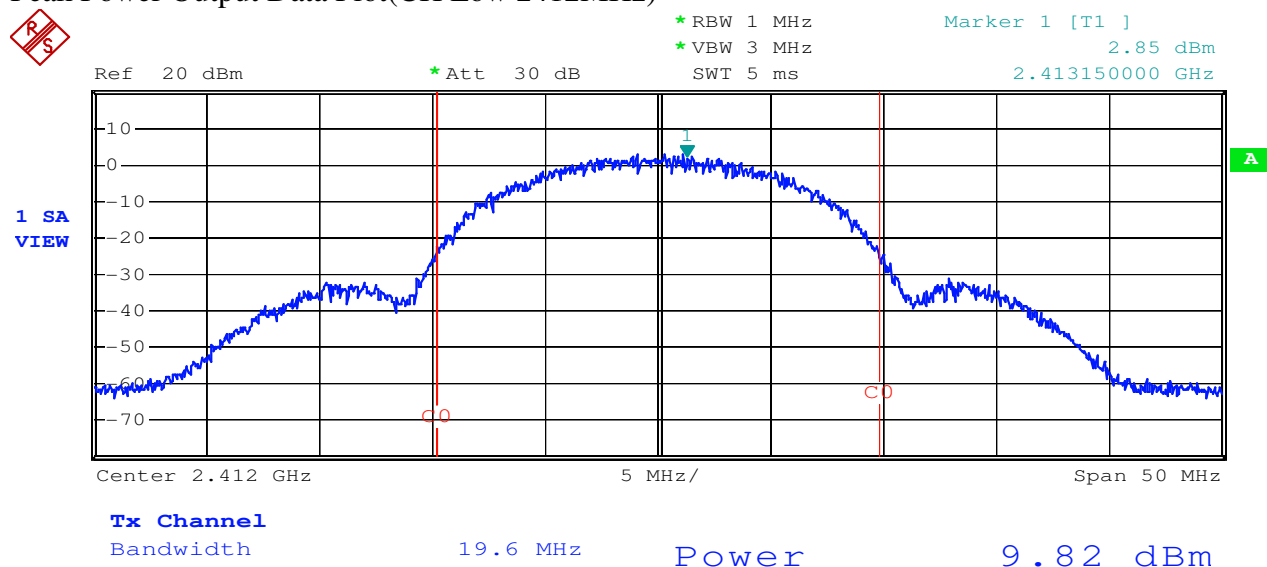


SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.

Report No.: SHEM110900119302
Page: 14 of 42

Peak Power Output Data Plot(CH Mid 2438MHz)

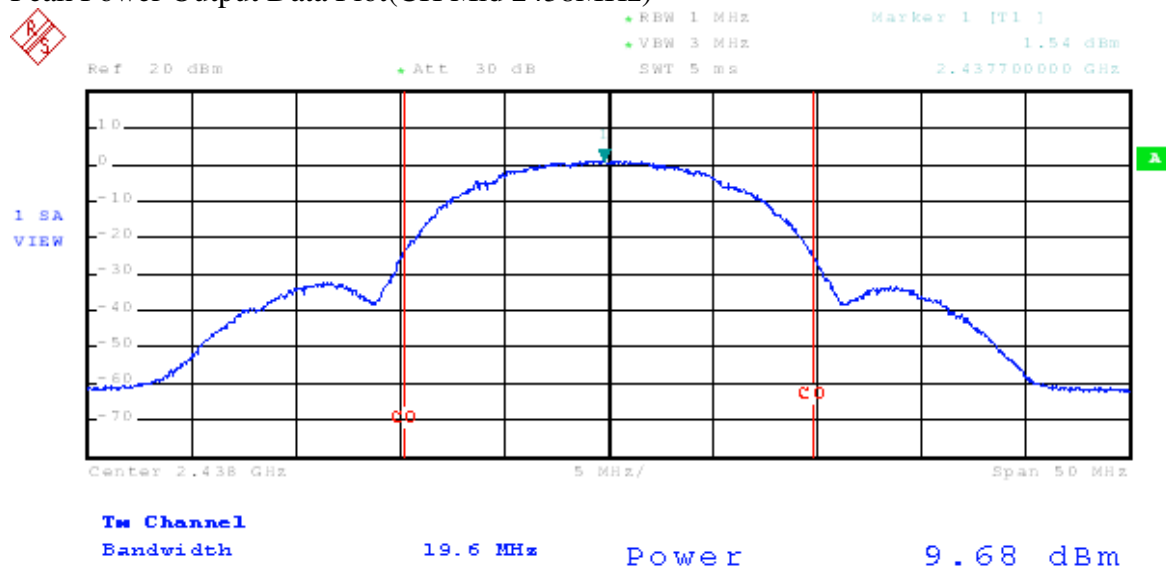

Peak Power Output Data Plot(CH High 2464MHz)

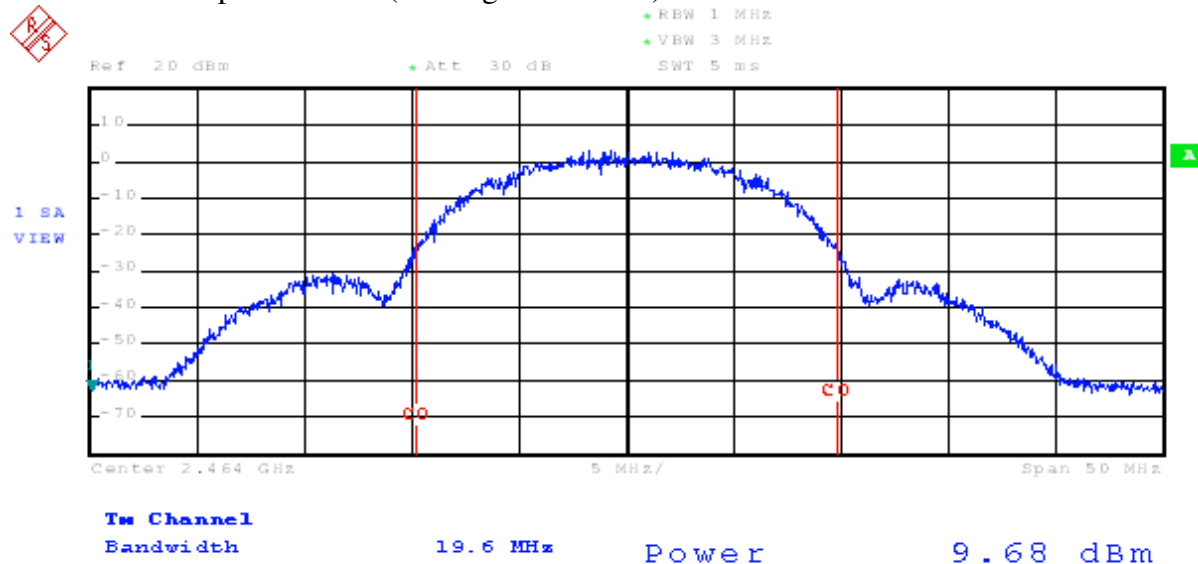

5.3.3 6dB Bandwidth

- Test Requirement:** FCC Part15 247(a)(2)
- Test date:** Sep 23.2011
- Standard Applicable:** According to section 15.247(a)(2),Systems using digital modulationg techniques may operate in the 902-928MHz,2400-2483.5MHz,and 5725-5850MHz bands.The minimum 6dB bandwidth shall be at least 500KHz.
- Measurement Procedure:**
1. Place the EUT on the table and set it in transmitting mode.
 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
 3. Set the spectrum analyzer as RBW=100KHz, VBW =3* RBW, Span=30/ 50MHz, Sweep=auto
 4. Mark the peak frequency and -6dB (upper and lower) frequency.
 5. Repeat above procedures until all frequency measured were complete.


Measurement Result:

CH	Frequency (MHz)	Bandwidth (MHz)	Limit Bandwidth (KHz)	Result
LOW	2412	9.30	500	PASS
MID	2438	8.72	500	PASS
HIGH	2464	9.29	500	PASS

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEM110900119302
Page: 16 of 42


6dB Band Width Test Data CH-Low 2412MHz

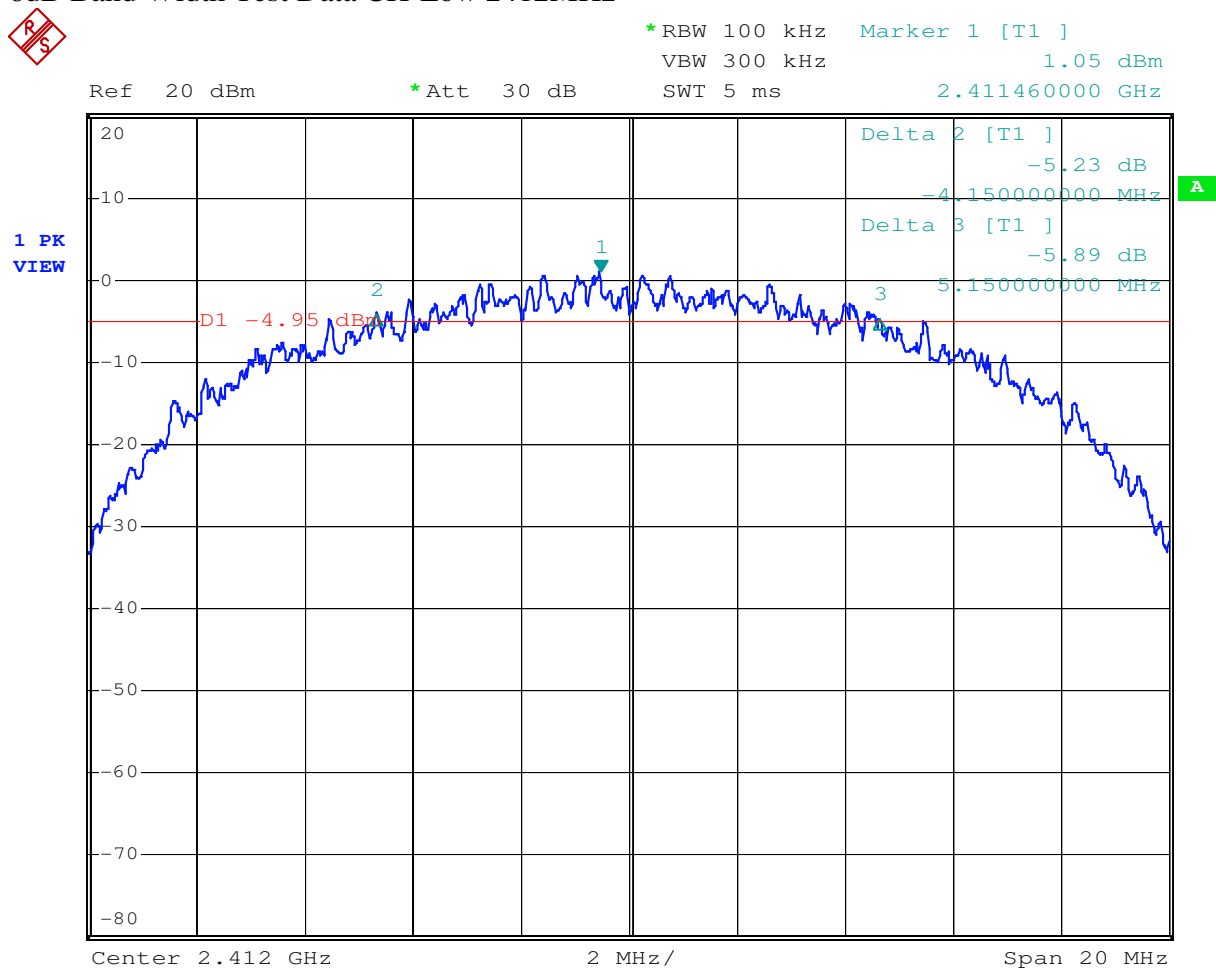


SGS-CSTC Standards Technical Services (Shanghai)Co., Ltd.

Report No.: SHEM110900119302
Page: 17 of 42

6dB Band Width Test Data CH-Mid 2438MHz

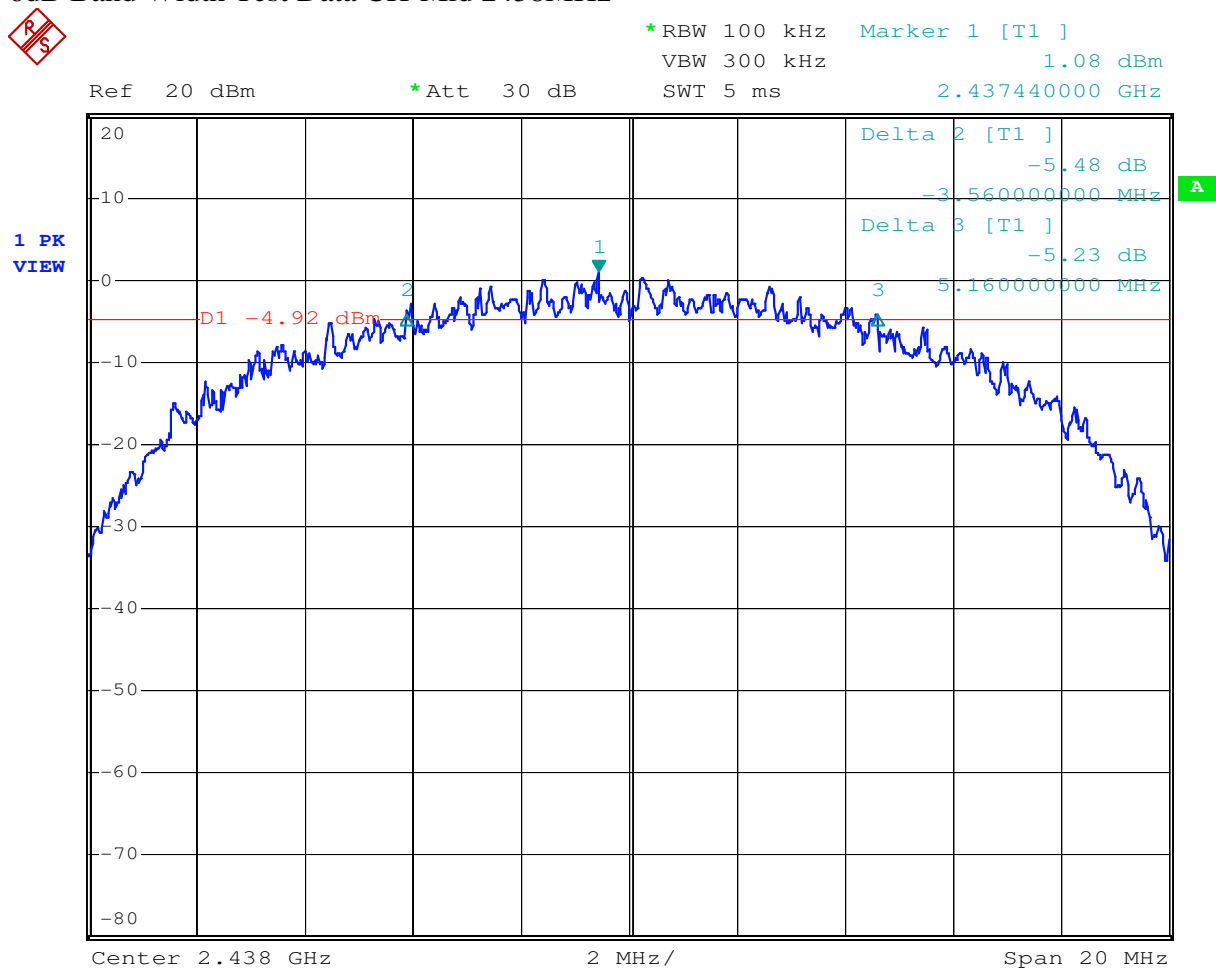

6dB Band Width Test Data CH-High 2464MHz

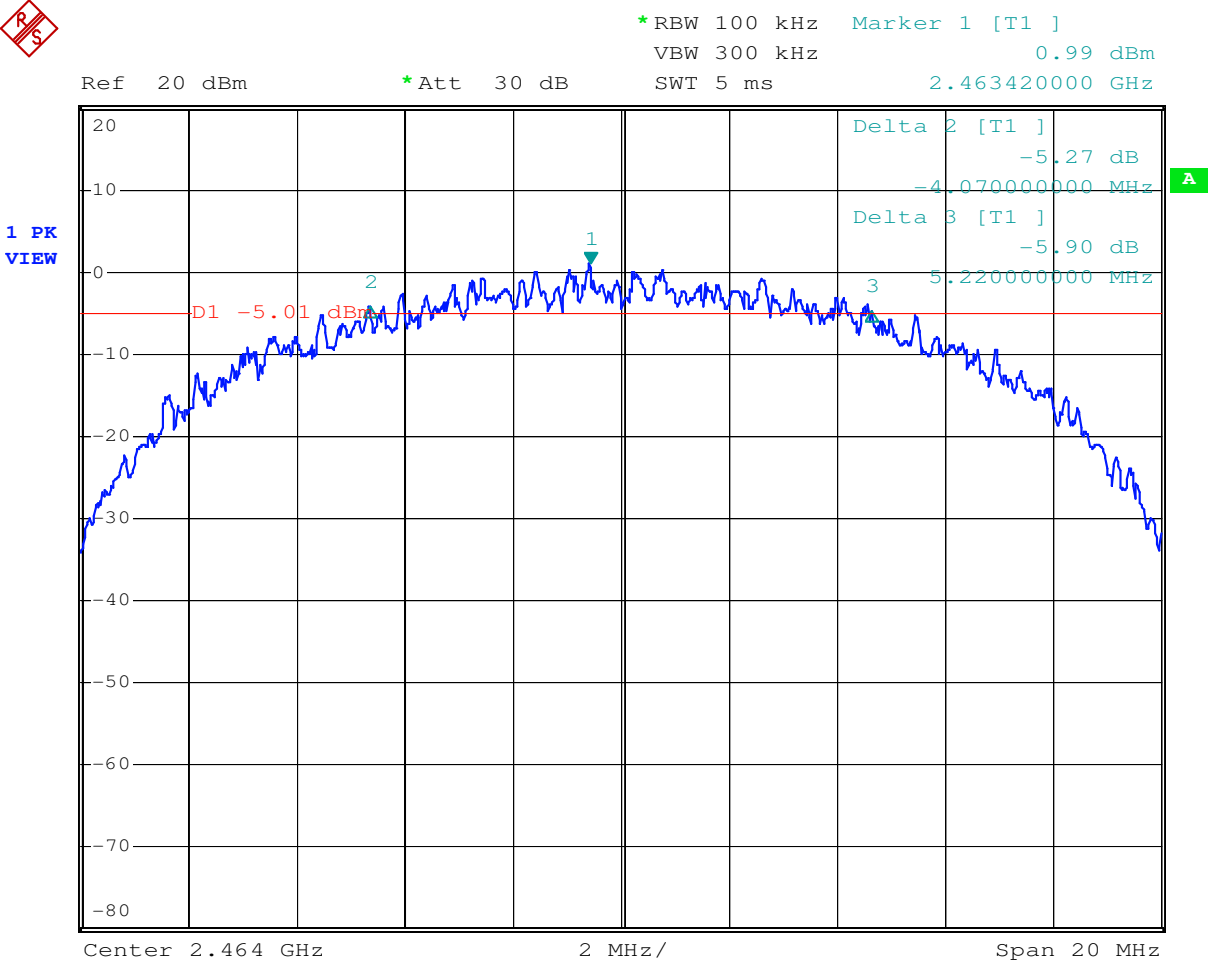

5.3.4 Radiated Emission Band Edge

Test Requirement: FCC Part15 247(c)

Test date: Sep 26.2011

Standard Applicable: According to section 15.247(c),in any 100KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating,the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power,In addition,radiated emissions which fall in the restricted bands,as defined in section 15.205(a),must also comply with the radiated emission limits specified in 15.209(a).


Measurement Procedure: The EUT was setup according to ANSI 63.10,2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47 CFR 15.247 requirements.The EUT is placed on a turn table which is 0.8 m above ground.The turn table is rotated 360 degrees to determine to the position of the maximum emission level.The EUT was positioned such that the distance from antenna to the EUT was 3 meters.The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level This is repeated for both horizontal and vertical polarization of the antenna.In order to find the maximum emission,all of the interface cables were manipulated according to ANSIC 63.10:2009 on radiated measurement.

Spectrum analyzer parameters setting as shown below:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

Radiated Emission Test Set-up Frequency Over 1GHz

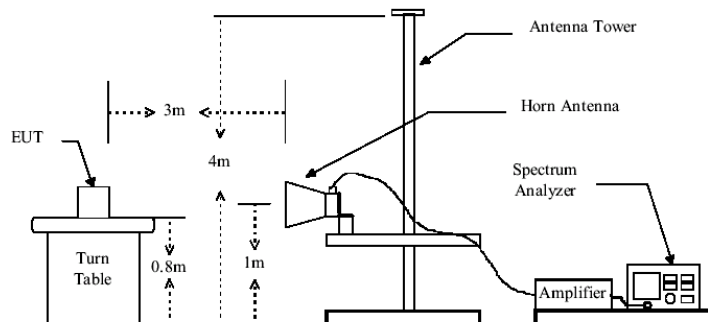


The field strength is calculated by adding the Antenna Factor,Preamplifier Factor&Cable Factor. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

Measurement Result:

CH Low 2412MHz Radiated Bandedge(Horizontal)

FCC RE Bandedge 1GHz-6GHz

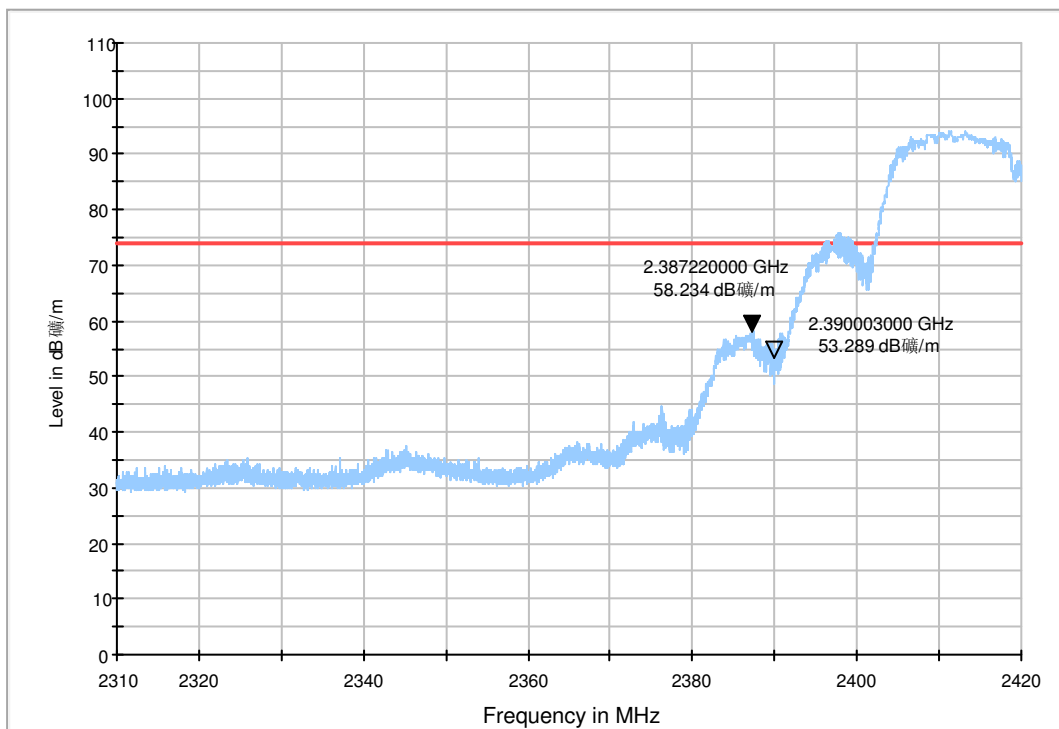


Horizontal, Peak Detector:

Frequency (MHz)	Peak Reading (dBuV)	Factor (dB/m)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2387	68.27	-10.04	58.23	74.00	15.77

AVERAGE LINE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

CISPR22 RE 1GHz-6GHz AV

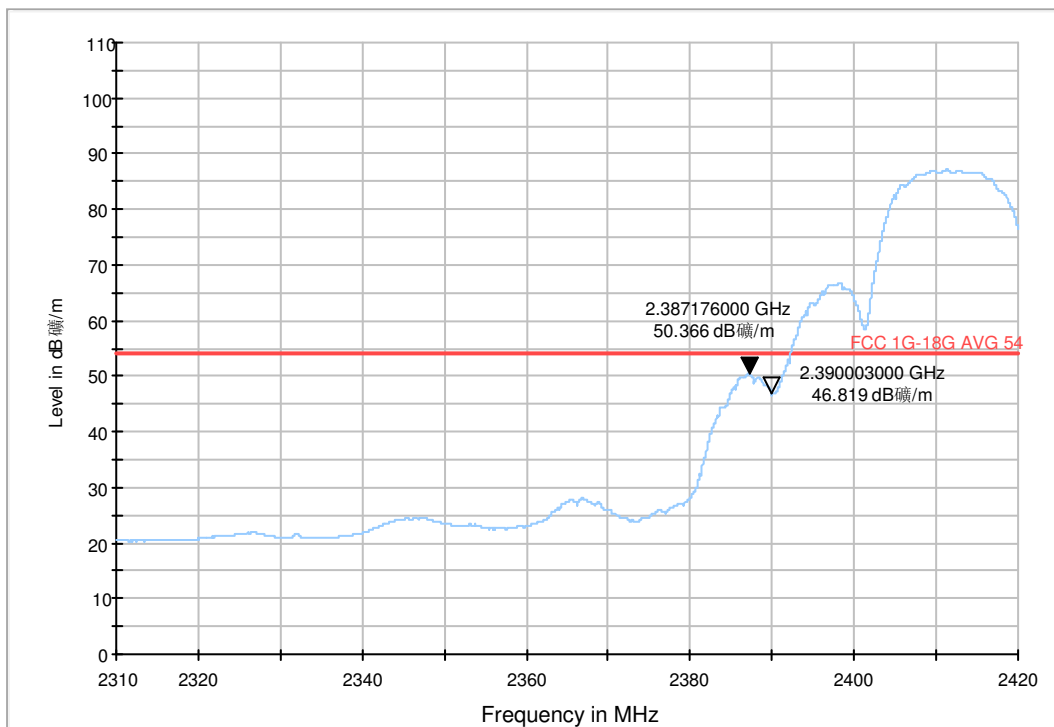


Horizontal, AV Detector:

Frequency (MHz)	AV Reading (dBuV)	Factor (dB/m)	AV Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2387	60.41	-10.04	50.37	54.00	3.63

CH Low 2412MHz Radiated Bandedge(Vertical)

FCC RE Bandedge 1GHz-6GHz

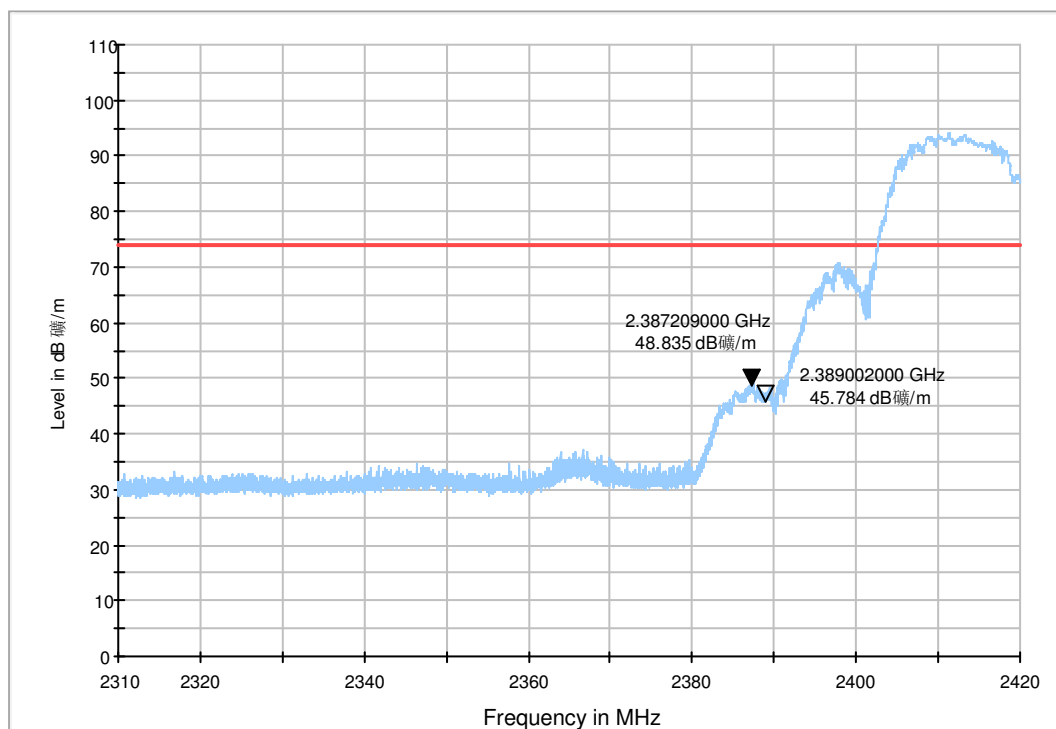


Vertical, Peak Detector:

Frequency (MHz)	Peak Reading (dBuV)	Factor (dB/m)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2387	58.92	-10.04	48.84	74.00	25.16

AVERAGE LINE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

CISPR22 RE 1GHz-6GHz AV

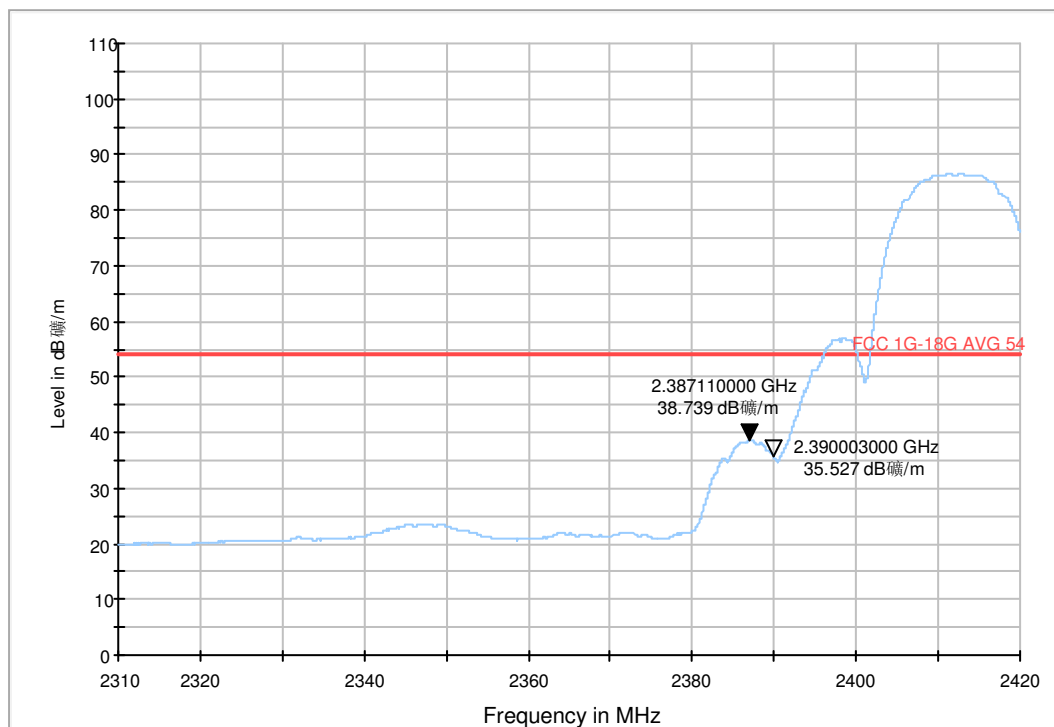


Vertical, AV Detector:

Frequency (MHz)	AV Reading (dBuV)	Factor (dB/m)	AV Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2387	48.78	-10.04	38.74	54.00	15.26

CH High 2464MHz Radiated Bandedge(Horizontal)

FCC RE Bandedge 1GHz-6GHz

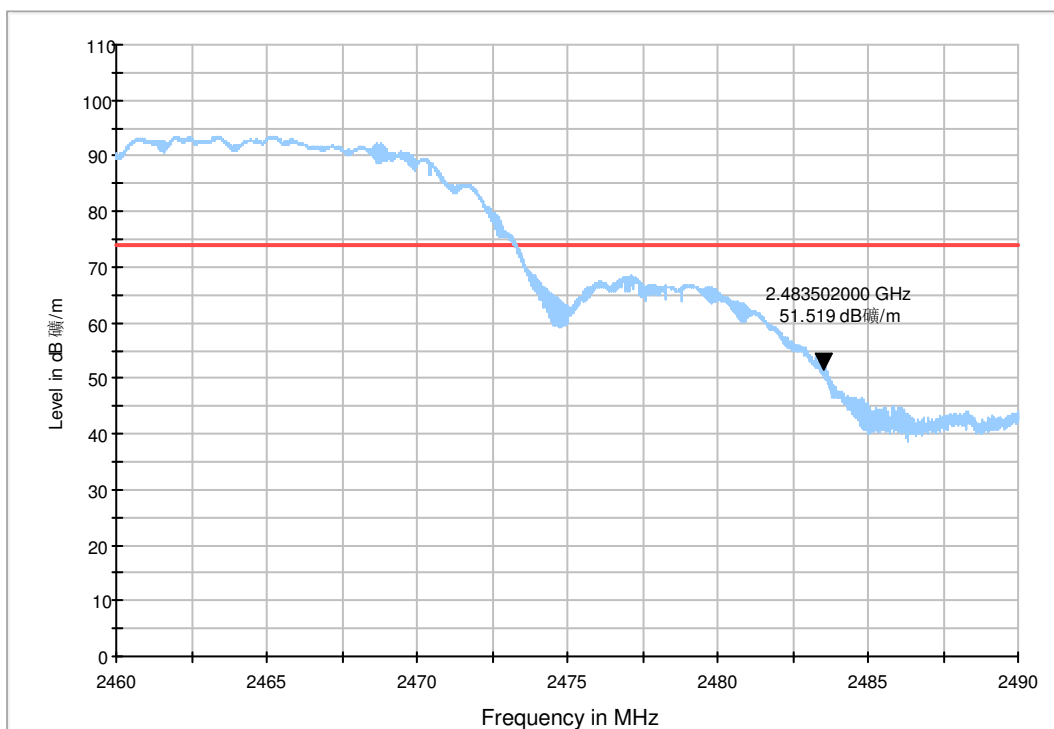


Horizontal, Peak Detector:

Frequency (MHz)	Peak Reading (dBuV)	Factor (dB/m)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2483.5	61.76	-10.24	51.52	74.00	22.48

AVERAGE LINE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

CISPR22 RE 1GHz-6GHz AV

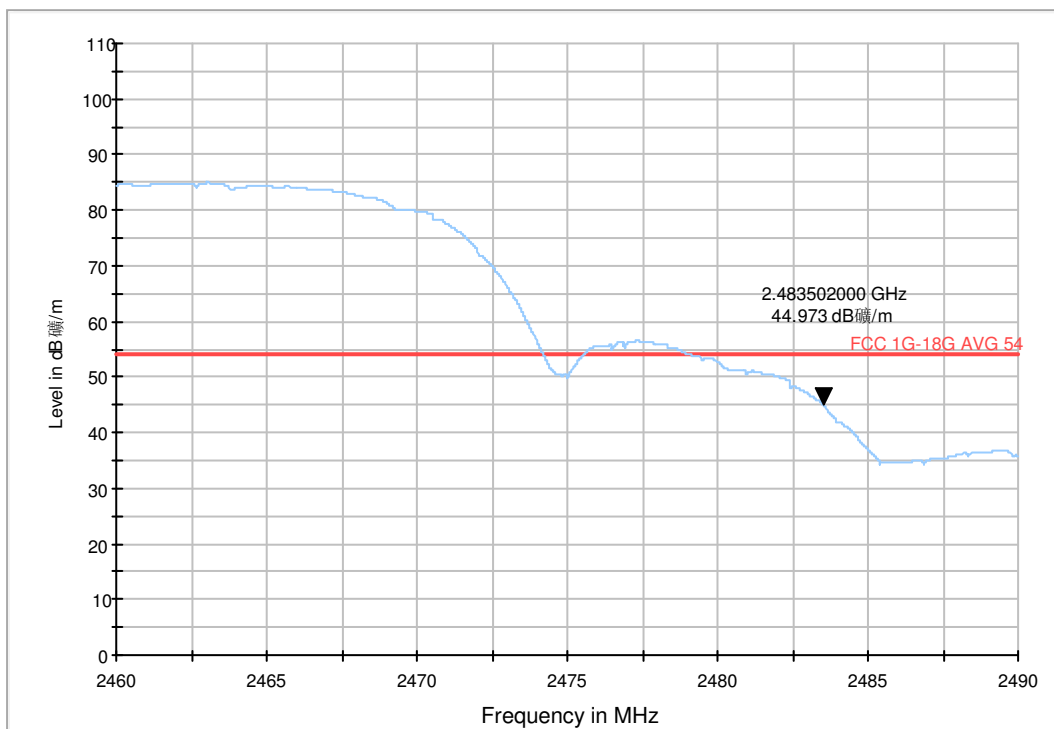


Horizontal, AV Detector:

Frequency (MHz)	AV Reading (dBuV)	Factor (dB/m)	AV Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2483.50	55.21	-10.24	44.97	54.00	9.03

CH High 2464MHz Radiated Bandedge(Vertical)

FCC RE Bandedge 1GHz-6GHz

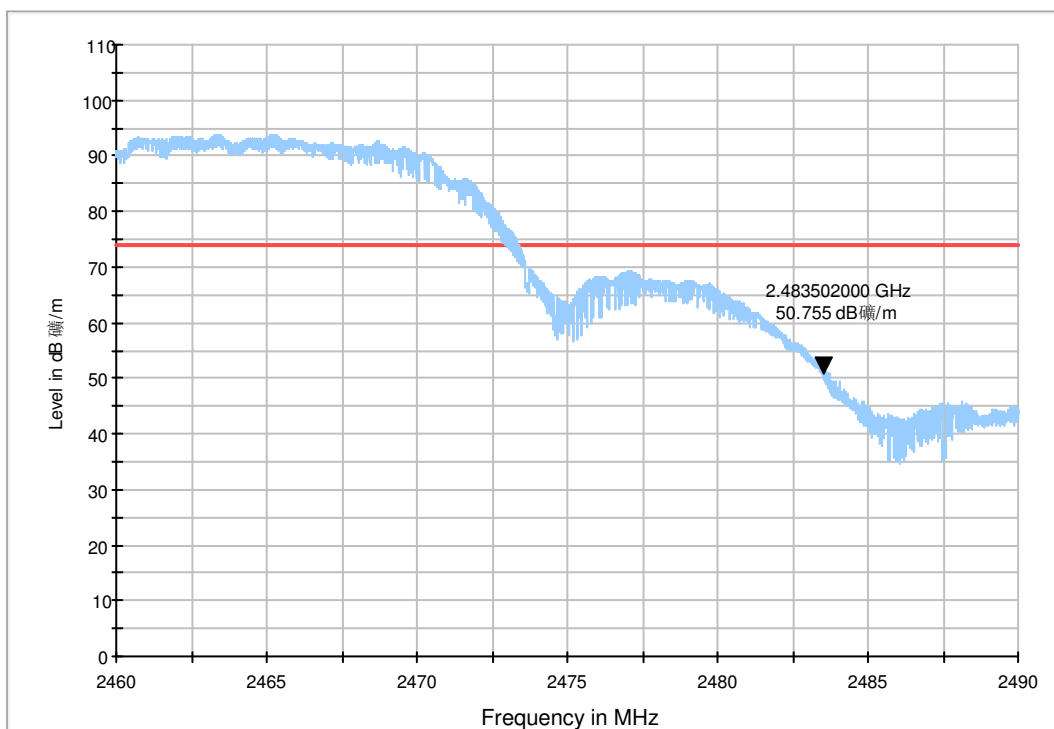


Vertical, Peak Detector:

Frequency (MHz)	Peak Reading (dBuV)	Factor (dB/m)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2483.5	61.00	-10.24	50.76	74.00	23.24

AVERAGE LINE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

CISPR22 RE 1GHz-6GHz AV

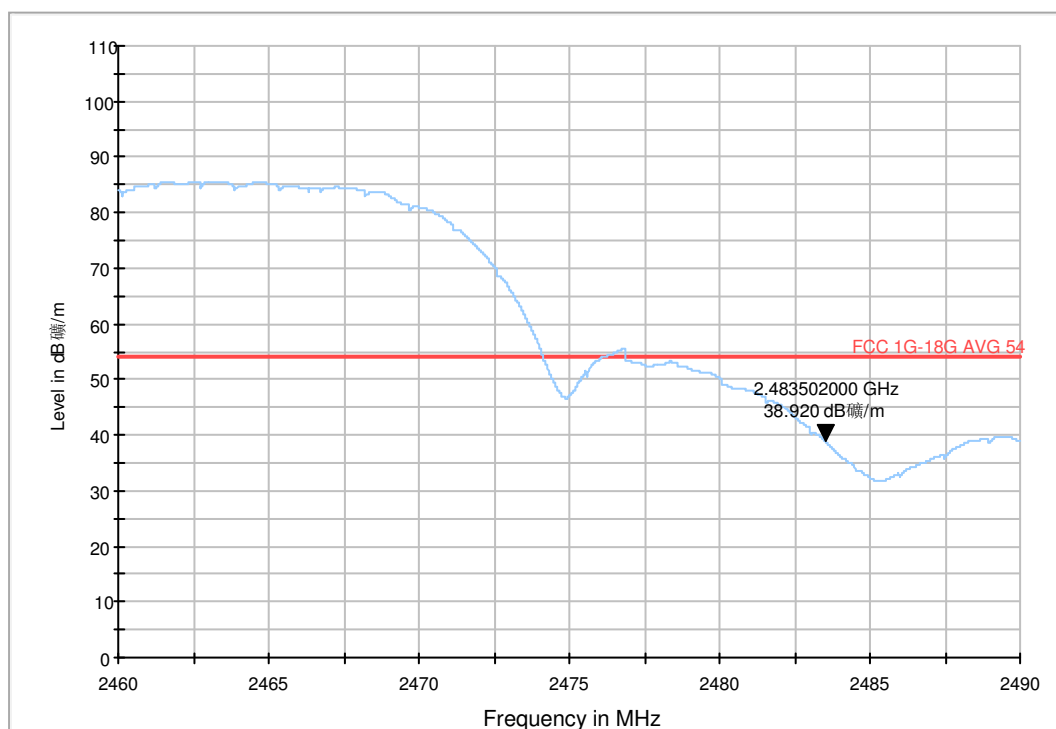

Vertical, AV Detector:

Frequency (MHz)	AV Reading (dBuV)	Factor (dB/m)	AV Level (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
2483.5	49.16	-10.24	38.92	54.00	25.08

5.3.5 Conducted Spurious Emission Test

Test Requirement: FCC Part15 247(c)

Test date: Sep 27, 2011

Standard Applicable: According to section 15.247(c),in any 100KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating,the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power,In addition,radiated emissions which fall in the restricted bands,as defined in section 15.205(a),must also comply with the radiated emission limits specified in 15.209(a).


Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW=100KHz VBW=300KHz, Sweep = auto
6. Repeat above procedures until all frequency measured were complete.

Measurement Result:

Conducted spurious Emission Measurement Result


CH Low 30MHz-3GHz

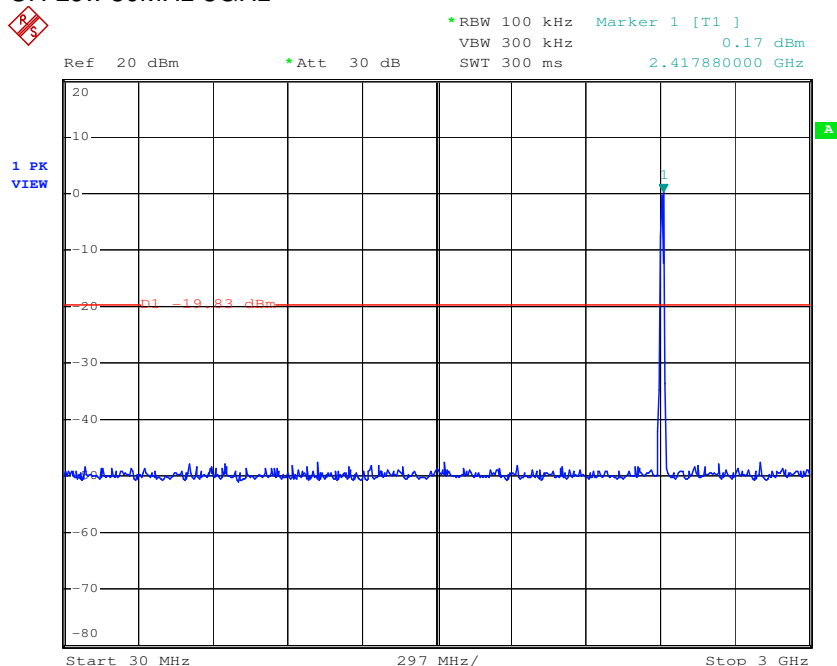


SGS-CSTC Standards Technical Services (Shanghai)Co., Ltd.

Report No.: SHEM110900119302
Page: 29 of 42

CH Low 3GHz-26.5GHz

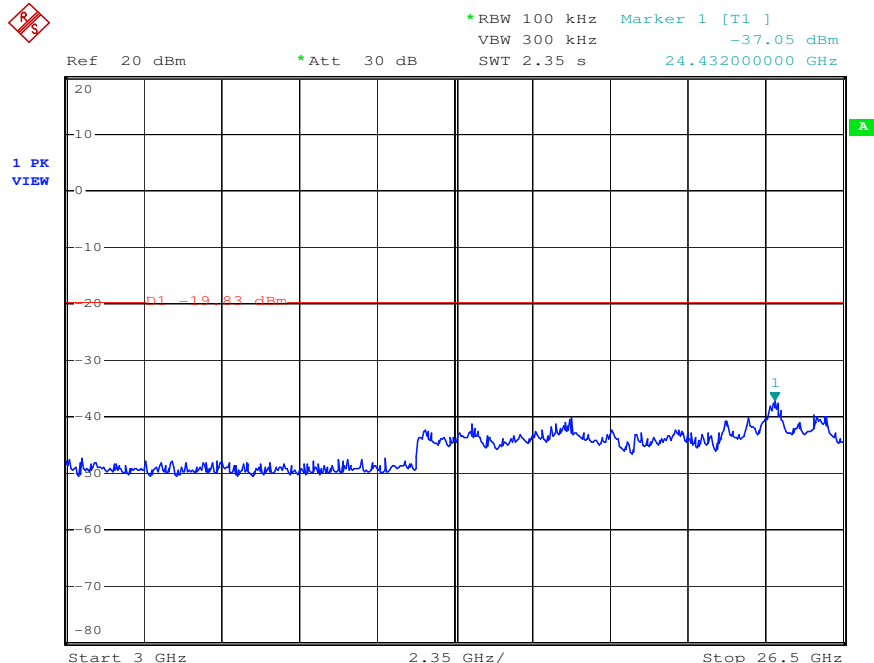


Band Edge (Conducted Mode)

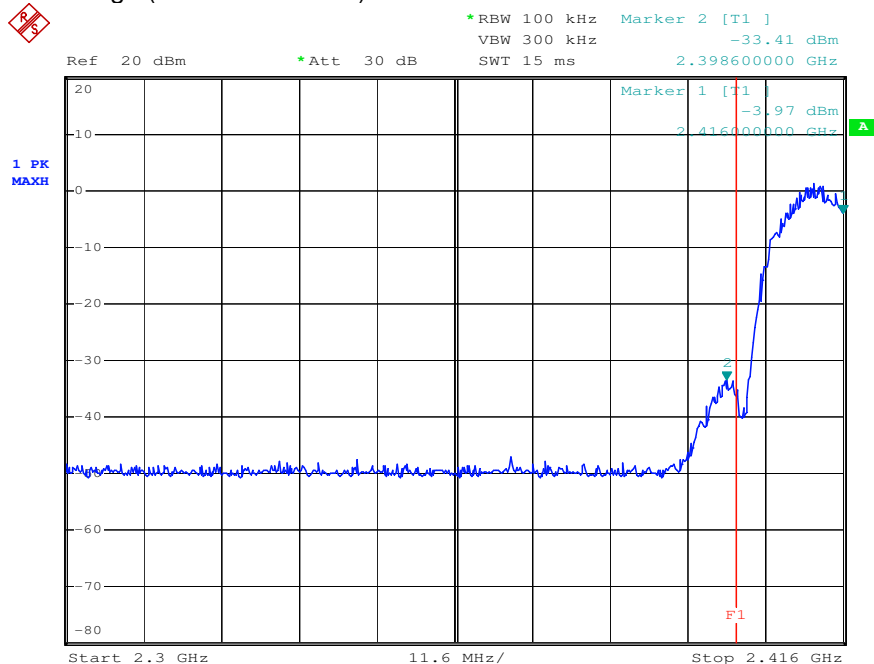


**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEM110900119302
Page: 30 of 42

Ch Mid 30MHz-3GHz

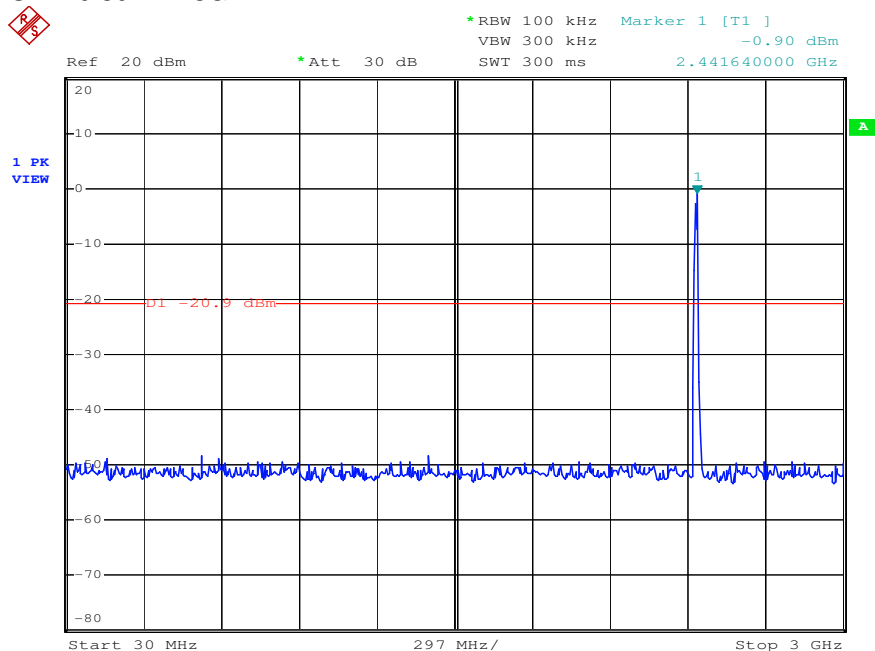

Ch Mid 3GHz-26.5GHz

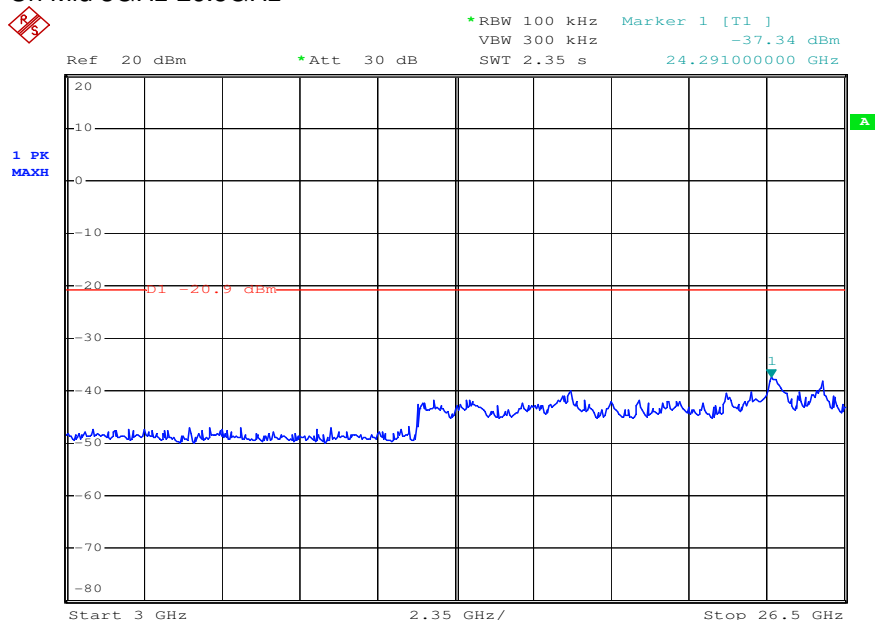


Date: 1.JAN.2000 04:51:39


SGS-CSTC Standards Technical Services (Shanghai)Co., Ltd.

Report No.: SHEM110900119302
Page: 31 of 42


Ch High 30MHz-3GHz

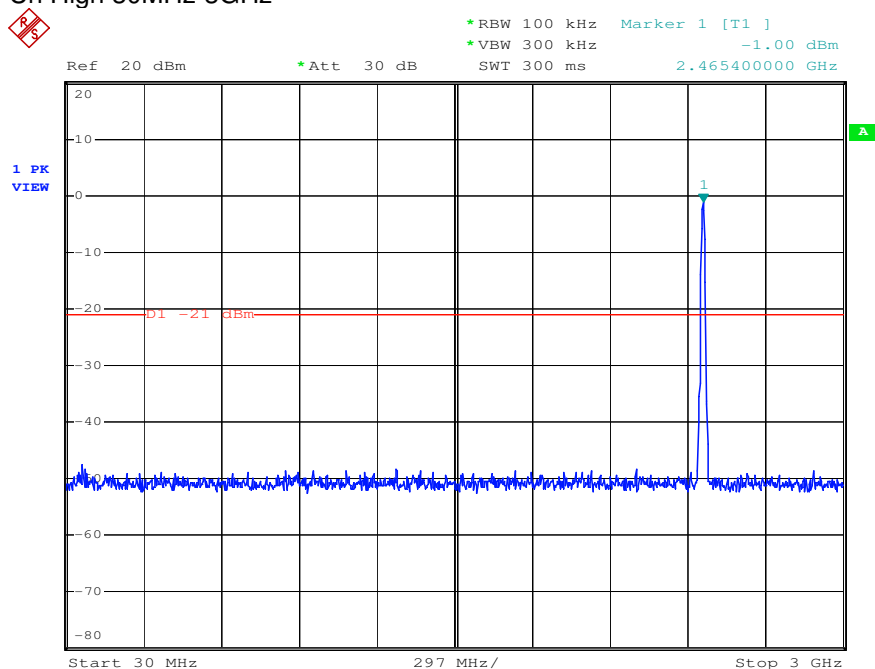

Ch High 3GHz-26.5GHz

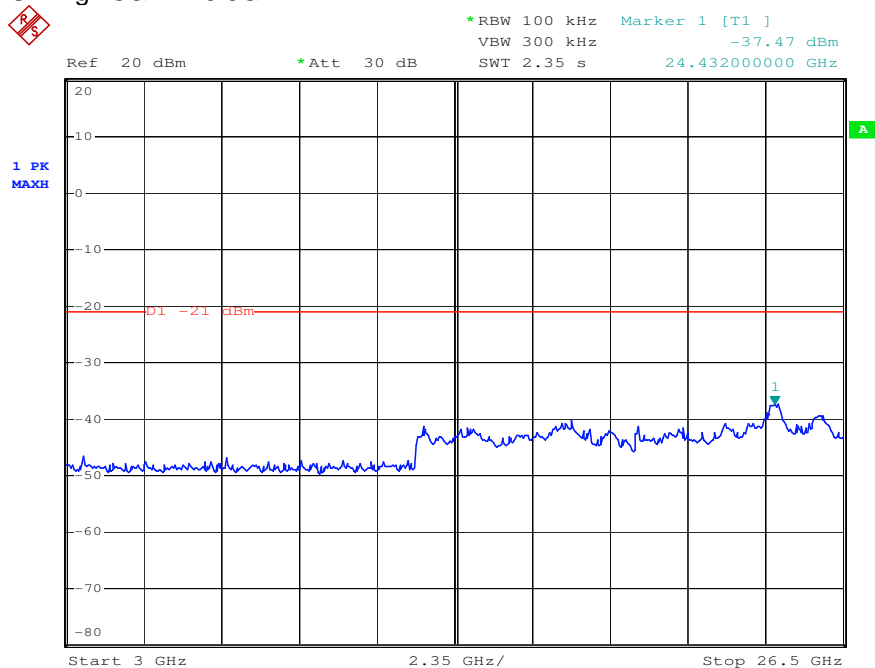

Band Edge (Conducted Mode)

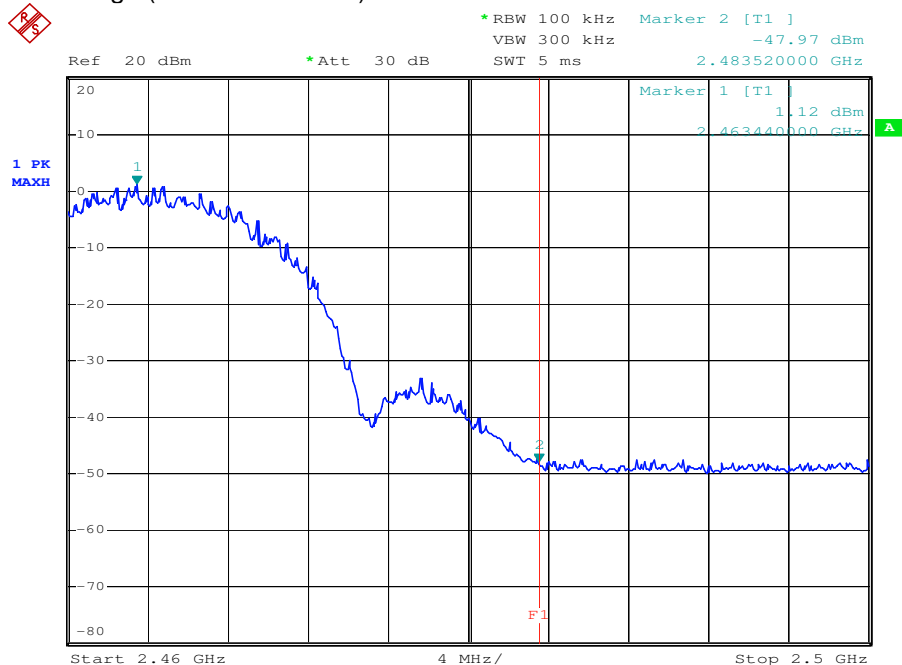

5.3.6 Spurious Radiated Emission Test

Test Requirement: FCC Part15 247(c)

Test date: Sep 22,2011 to Sep 26,2011

Standard Applicable: According to section 15.247(c),all other emissions outside these bands shall not exceed the general radiated emission limits specified in section15.209(a).And according to section 15.33(a)(1),for an intentional radiator operates below 10GHz,the frequency range of measurements:to the tenth harmonic of the highest fundamental frequency or to 40GHz,which is lower.

Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
Test instrumentation resolution bandwidth 120 kHz and Quasi-Peak detector applies (30 MHz - 1000 MHz). 1MHz resolution bandwidth and Peak detector apply (1000 MHz – 25GHz) Above 1GHz
- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO.
4. Maximum procedure was performed on the six highest


emissions to ensure EUT compliance.

5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.


6. Repeat above procedures until all frequency measured were complete.

7. The field strength of spurious emission was measured in the following position: EUT satnd-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down postion(X axis) and the wrost case was recored.

**Radiated Test Set-up:
Radiated Emission Test Set-up, Frequency Below 1000MHz**

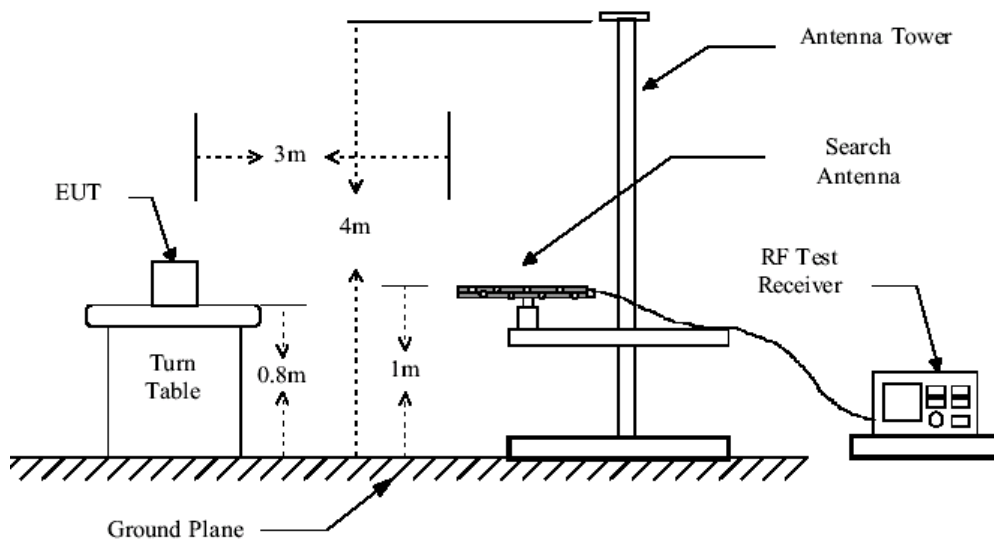

Radiated Emission Test Set-up Frequency Over 1GHz

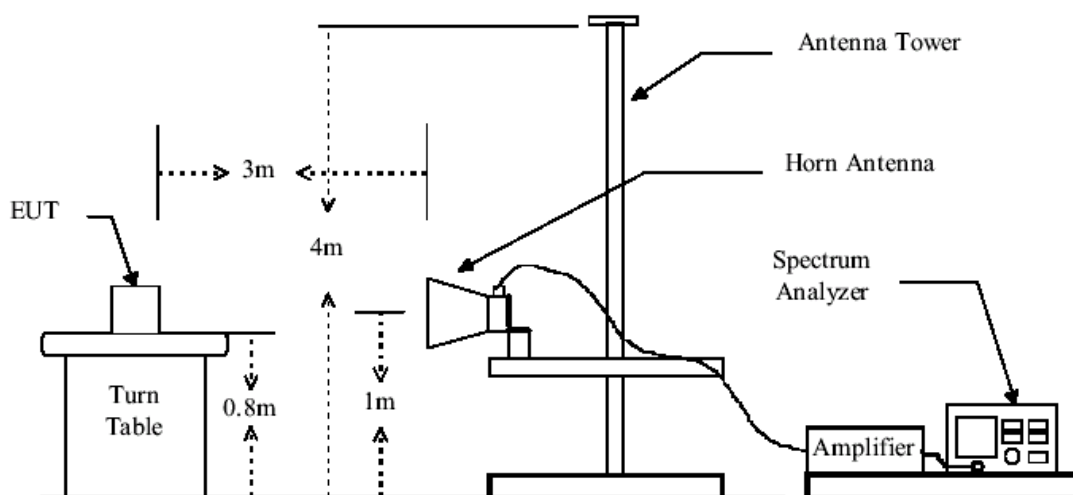

Low noise amplifier was used below 1GHz, High pass Filter was used above 1GHz.

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEM110900119302
Page: 34 of 42

Operation Mode: TX Low Mid CH 2412MHz

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
233	10.5	1.5	24.5	55.7	43.2	46.00	Vertical
331	7.7	2.1	24.4	58.4	43.8	46.00	Vertical
208	11.8	1.2	24.6	52.7	41.1	43.50	Horizontal
233	10.5	1.5	24.5	55.9	43.4	46.00	Horizontal

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4824.0	31.0	1.2	0.5	43.4	60.39	49.69	74	Vertical
7236.0	35.5	1.7	0.6	43.1	48.57	43.27	74	V
4824.0	31.0	1.2	0.5	43.4	61.72	51.02	74	Horizontal
7236.0	35.5	1.7	0.6	43.1	49.58	44.28	74	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4824.0	31.0	1.2	0.5	43.4	54.13	43.43	54	Vertical
7236.0	35.5	1.7	0.6	43.1	44.29	38.99	54	V
4824.0	31.0	1.2	0.5	43.4	54.49	43.79	54	Horizontal
7236.0	35.5	1.7	0.6	43.1	45.27	39.97	54	H

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor +Filter–Preamplifier Factor

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEM110900119302
Page: 35 of 42

Operation Mode: TX Mid CH 2438MHz

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
233	10.5	1.5	24.5	55.7	43.2	46.00	Vertical
331	7.7	2.1	24.4	58.4	43.8	46.00	Vertical
208	11.8	1.2	24.6	52.7	41.1	43.50	Horizontal
233	10.5	1.5	24.5	55.9	43.4	46.00	Horizontal

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4876.0	31.1	1.3	0.5	43.5	59.29	48.69	74	Vertical
7314.0	35.7	1.7	0.6	43.1	47.37	42.27	74	V
4876.0	31.1	1.3	0.5	43.5	59.69	49.09	74	Horizontal
7314.0	35.7	1.7	0.6	43.1	47.91	42.81	74	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4876.0	31.1	1.3	0.5	43.5	53.57	42.97	54	Vertical
7314.0	35.7	1.7	0.6	43.1	42.62	37.52	54	V
4876.0	31.1	1.3	0.5	43.5	54.73	44.13	54	Horizontal
7314.0	35.7	1.7	0.6	43.1	43.49	38.39	54	H

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor +Fiter–Preamplifier Factor

**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEM110900119302
Page: 36 of 42

Operation Mode:TX High CH 2464MHz

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
233	10.5	1.5	24.5	55.7	43.2	46.00	Vertical
331	7.7	2.1	24.4	58.4	43.8	46.00	Vertical
208	11.8	1.2	24.6	52.7	41.1	43.50	Horizontal
233	10.5	1.5	24.5	55.9	43.4	46.00	Horizontal

1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4928.0	31.4	1.4	0.5	43.9	58.92	48.32	74	Vertical
7392.0	35.8	1.7	0.6	43.1	48.51	43.51	74	V
4928.0	31.4	1.4	0.5	43.9	58.77	48.17	74	Horizontal
7392.0	35.8	1.7	0.6	43.1	45.43	40.43	74	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4928.0	31.4	1.4	0.5	43.9	53.85	43.25	54	Vertical
7392.0	35.8	1.7	0.6	43.1	44.47	39.47	54	V
4928.0	31.4	1.4	0.5	43.9	53.89	43.29	54	Horizontal
7392.0	35.8	1.7	0.6	43.1	42.51	37.51	54	H

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

6. Final Test Level =Receiver Reading + Antenna Factor + Cable Factor +Filter-Preamplifier Factor

5.3.7 Peak Power Spectral Density

Test Requirement: FCC Part15 247(e)

Test date: Sep. 27, 2011


Standard Applicable: According to section 15.247(e),For digitally modulated systems,the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dB in any 3KHz band during any time in terval of continuous transmission.This power spectral density shall be determined in accordance with the provisions of paragraph(b) of this section.The same method of determining the conducted output power shall be used to determine the powr spectral density.

Measurement Procedure: The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requiremnts. Set RBW=3KHz,Set VBW=10KHz,Span=100KHz,Sweep time=34s,Set detector=Peak detector.

Measurement Result:

CH	Frequency (MHz)	Reading (dBm)	Cable Loss (dB)	RF Power Density (dBm)	Limit (dBm)	Result
LOW	2412	-9.26	0.5	-8.76	8	PASS
MID	2438	-10.46	0.5	-9.96	8	PASS
HIGH	2462	-9.38	0.5	-8.78	8	PASS


Power Spectral Density Test Plot(CH-Low)

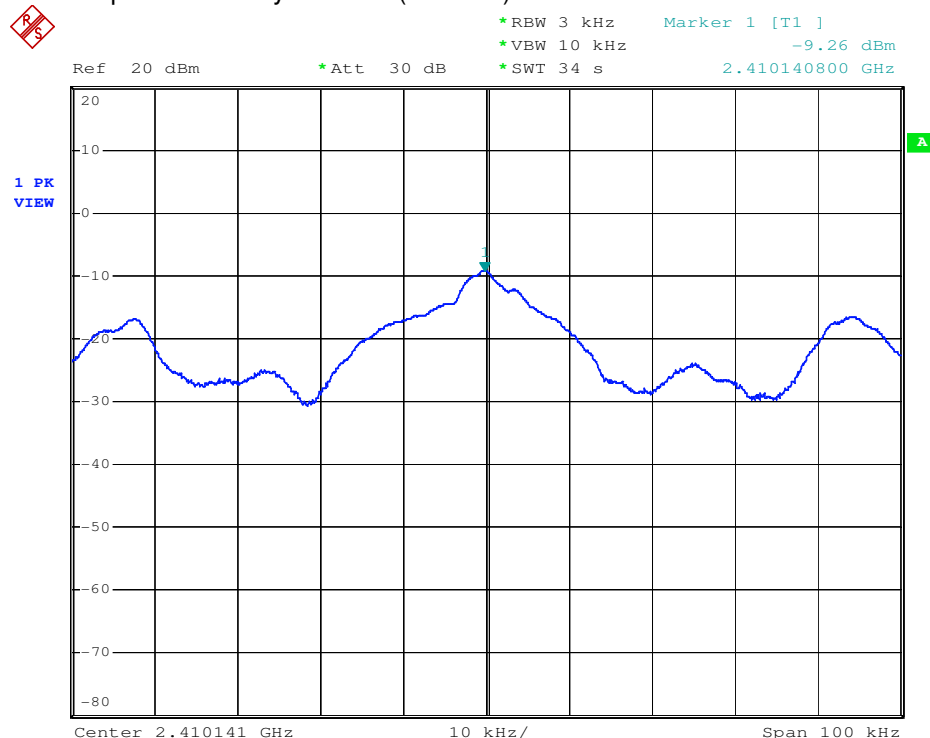


**SGS-CSTC Standards
Technical Services
(Shanghai)Co., Ltd.**

Report No.: SHEM110900119302
Page: 38 of 42

Power Spectral Density Test Plot(CH-Mid)

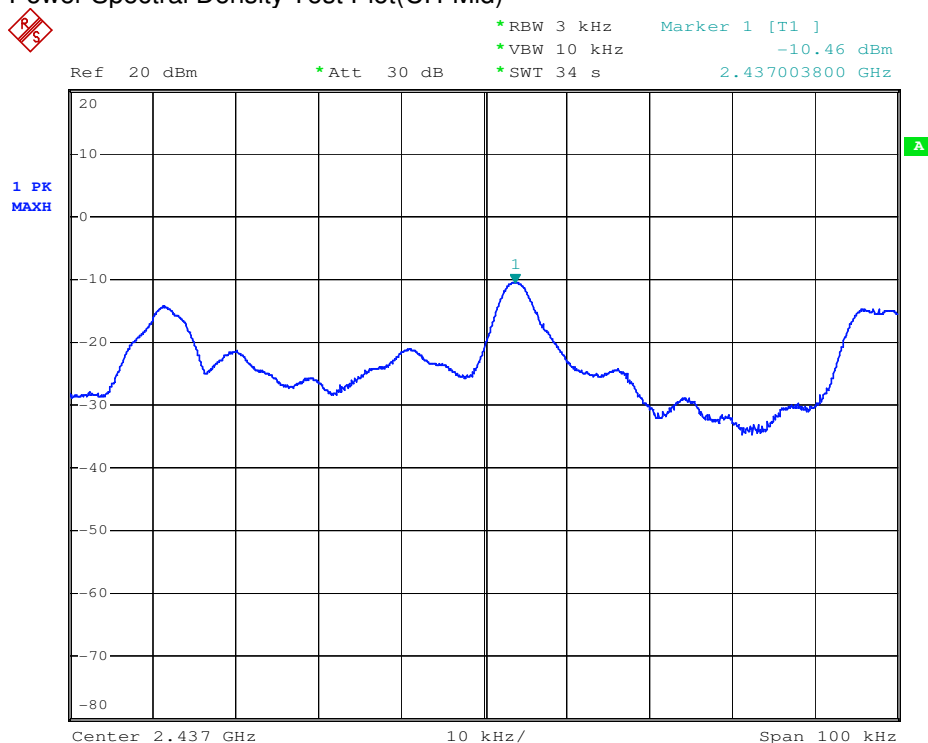

Power Spectral Density Test Plot(CH-High)

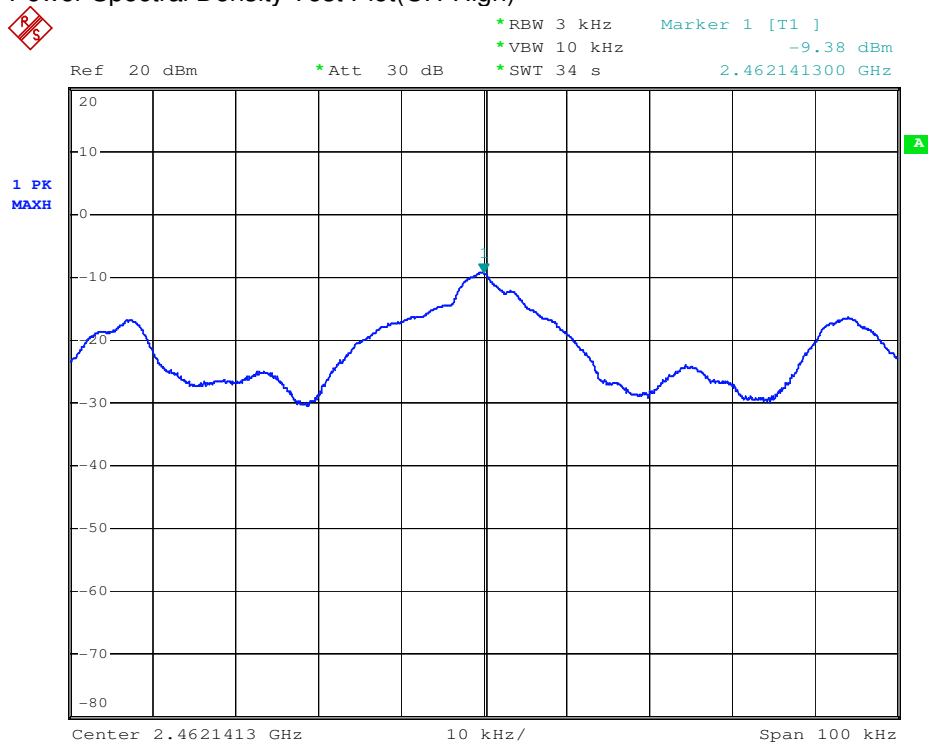


5.3.8 Occupied Bandwidth Test

Test Requirement: RSS-Gen Issue 3 Clause 4.6.1
Test date: Aug. 28, 2011
Standard Applicable According to the section RSS-Gen Issue 3 Clause 4.6.1
EUT Setup The occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was measured using the Spectrum Analyzer with the resolutions set at 1MHz,the video bandwidth set at 3MHz.


Measurement Result:

CH	Frequency (MHz)	Bandwidth (MHz)
LOW	2412	15.70
MID	2438	15.70
HIGH	2464	15.70


Channel Low 2412MHz

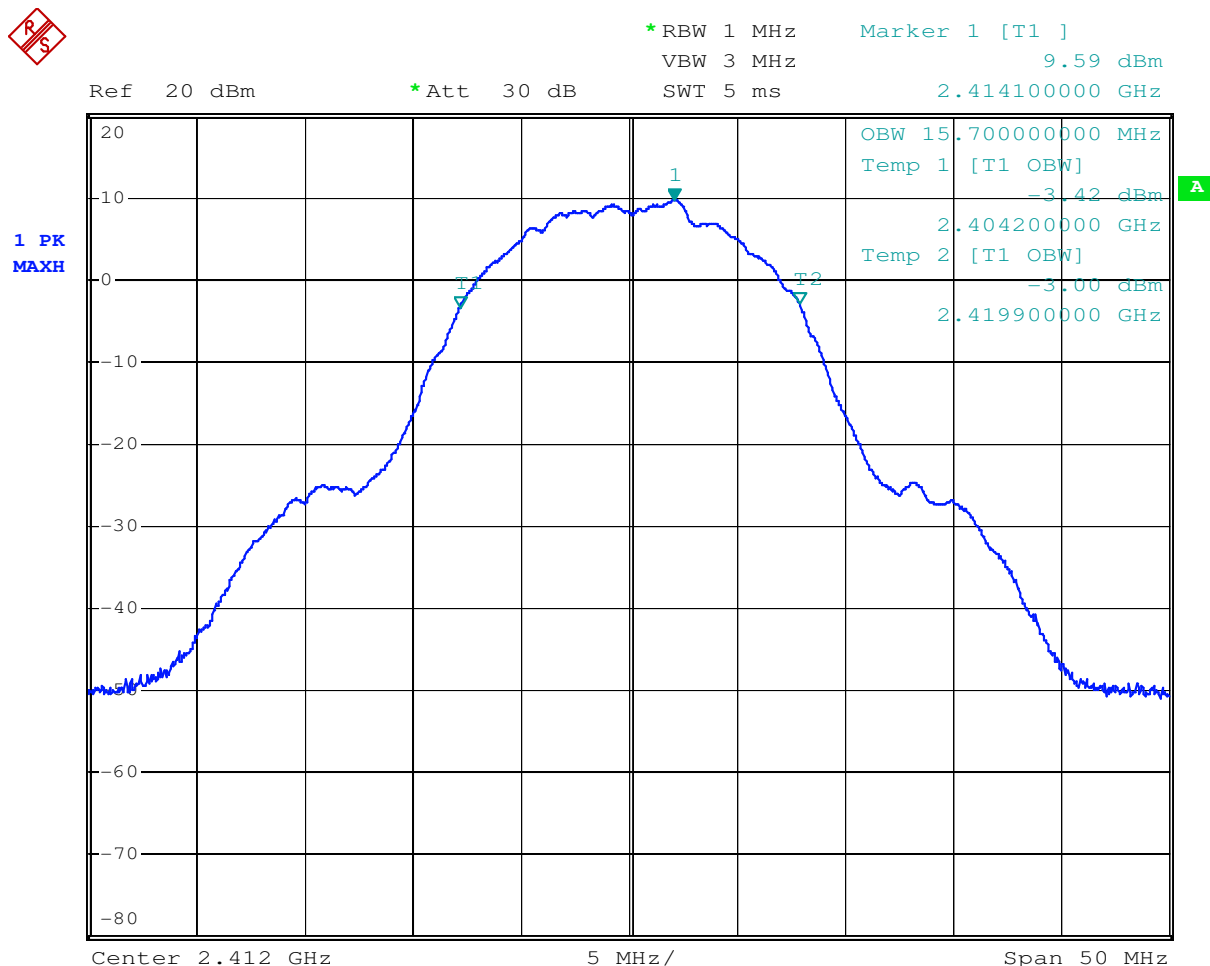

Channel Middle 2438MHz

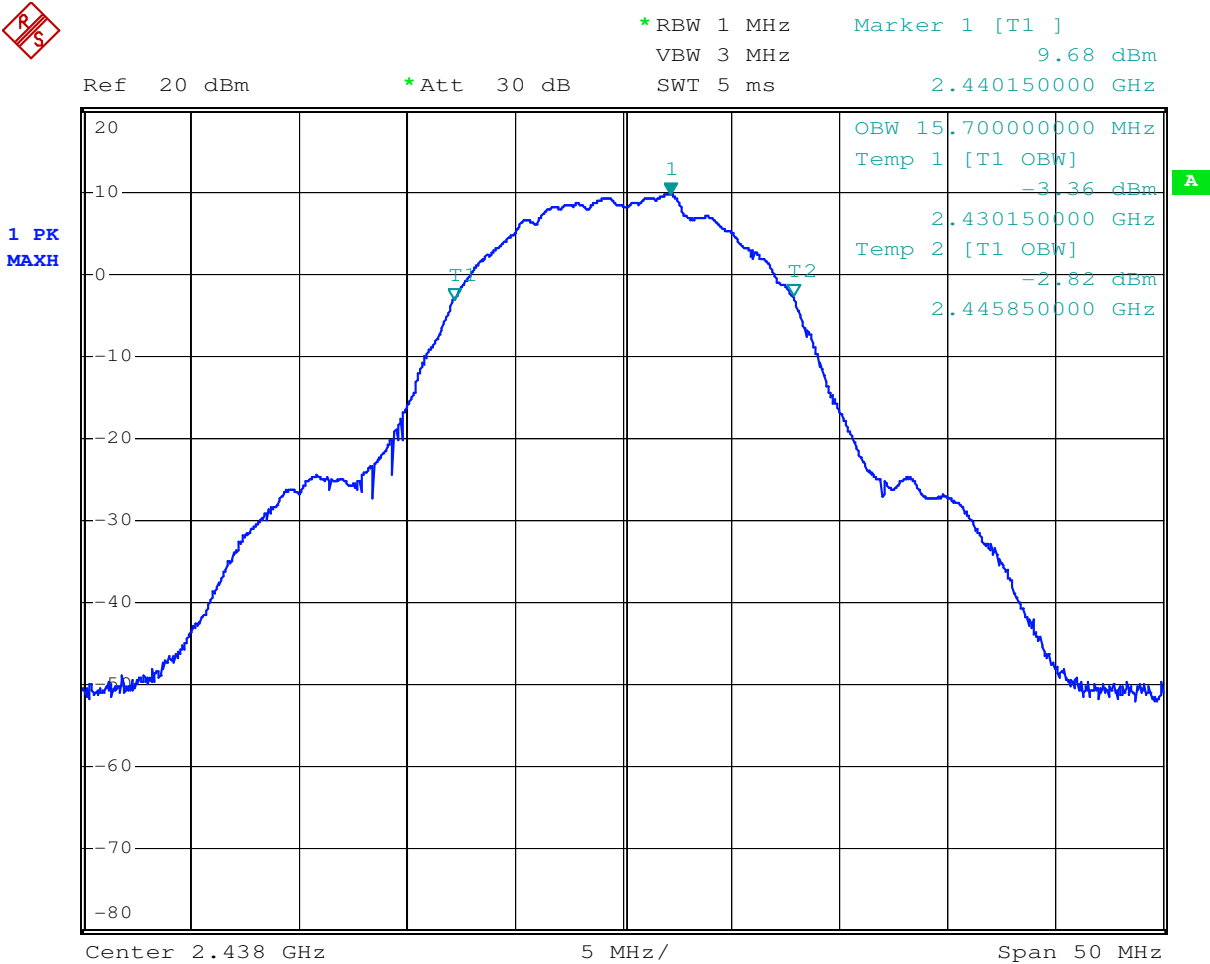

Channel High 2464MHz

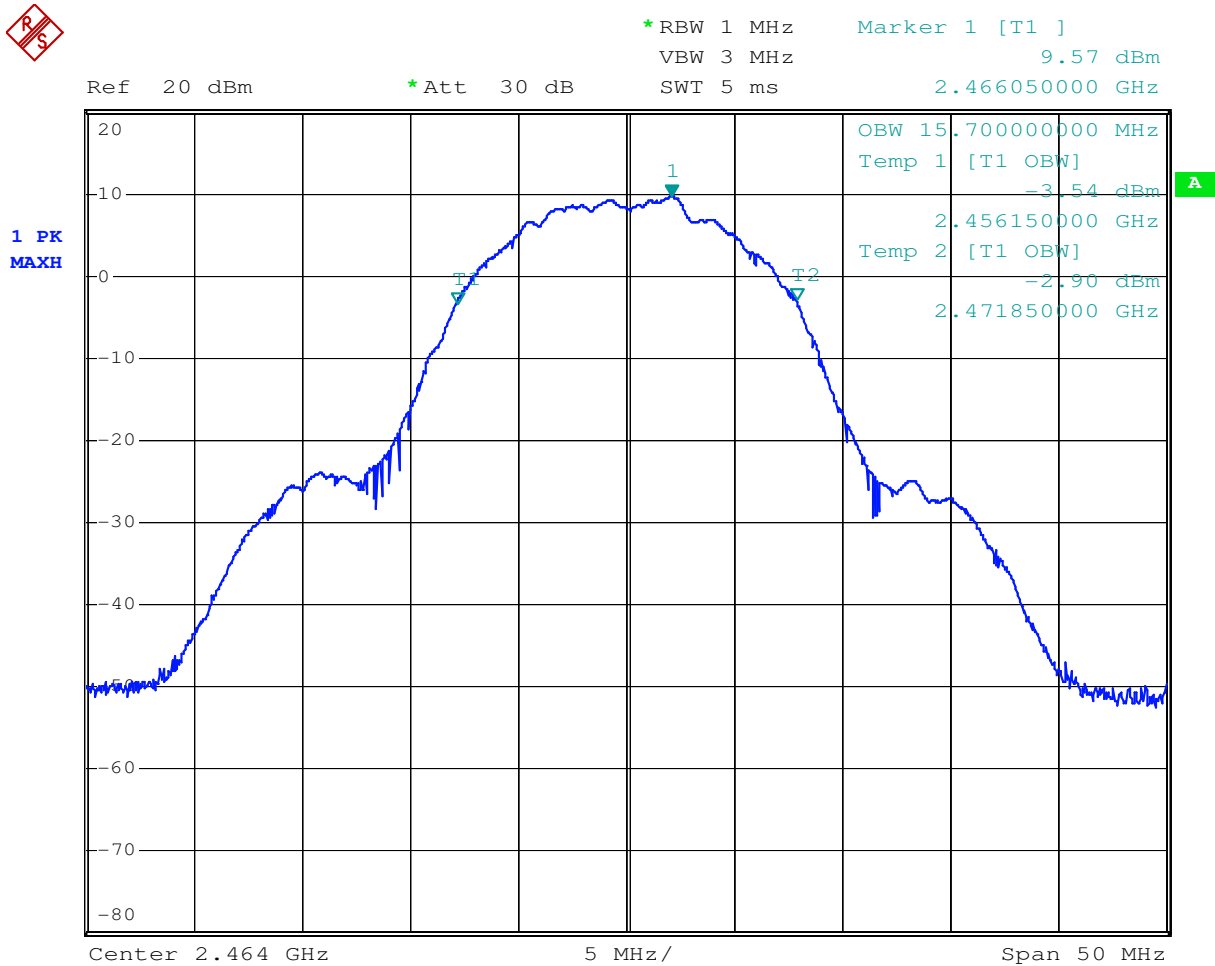

5.3.9 Antenna Requirement

Test Requirement: FCC Part15 15.203

5.3.7.1 Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.3.7.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

5.3.7.3 Result

The EUT antenna is internal Antenna. It comply with the standard requirement.

End of the Report