

EMC TEST REPORT

No. SH11050787-001

Applicant : Hansong(Nanjing) Technology Ltd.
8th Kangping Road, Jiangning Economy and Technology
Development Zone, Nanjing, China, 211100

Manufacturer : Hansong(Nanjing) Technology Ltd.
8th Kangping Road, Jiangning Economy and Technology
Development Zone, Nanjing, China, 211100

Equipment : Powered Speaker

Type/Model : WS80i

SUMMARY

The equipment complies with the requirements according to the following standard(s):

47CFR Part 15 (2010): Radio Frequency Devices


ANSIC63.4 (2003): American National Standard for Methods of Measurement
of Radio-Noise Emissions from Low-Voltage Electrical and Electronic
Equipment in the Range of 9 kHz to 40 GHz

RSS-210 Issue 8 (December 2010): Low-power Licence-exempt Radiocommunication
Devices (All Frequency Bands): Category I Equipment

RSS-Gen Issue 3 (December 2010): General Requirements and Information for the
Certification of Radiocommunication Equipment

Date of issue: Feb 28, 2012

Prepared by:



Wakeyou Wang (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)



FCC ID: XCO-HSWSR
IC: 7756A-HSWSR

Description of Test Facility

Name: Intertek Testing Services Limited Shanghai
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597
IC Assigned Code: 2042B-1

Name of contact: Steve Li
Tel: +86 21 64956565 ext. 214
Fax: +86 21 54262335 ext. 214

Content

SUMMARY.....	1
DESCRIPTION OF TEST FACILITY.....	2
1. GENERAL INFORMATION	5
1.1 Applicant Information.....	5
1.2 Identification of the EUT	5
1.3 Technical specification	6
1.4 Mode of operation during the test / Test peripherals used.....	6
2. TEST SPECIFICATION	7
2.1 Instrument list	7
2.2 Test Standard	7
3. MINIMUM 6dB BANDWIDTH	9
3.1 Limit.....	9
3.2 Test Configuration	9
3.3 Test Procedure and test setup.....	9
3.4 Test Protocol	10
4. MAXIMUM PEAK OUTPUT POWER	11
4.1 Test limit	11
4.2 Test Configuration	11
4.3 Test procedure and test setup.....	11
4.4 Test protocol	12
5. POWER SPECTRUM DENSITY	13
5.1 Test limit	13
5.2 Test Configuration	13
5.3 Test procedure and test setup.....	13
5.4 Test Protocol	14
6. RADIATED EMISSION	15
6.1 Test limit	15
6.2 Test Configuration	15
6.3 Test procedure and test setup.....	16
6.4 Test protocol	17
7. EMISSION OUTSIDE THE FREQUENCY BAND	19
7.1 Limit.....	19
7.2 Test Configuration	19
7.3 Test procedure and test setup.....	19
7.4 Test protocol	20
8. POWER LINE CONDUCTED EMISSION	21
8.1 Limit.....	21
8.2 Test configuration	21
8.3 Test procedure and test set up.....	22
8.4 Test protocol	23
9. CHANNEL NUMBER OF HOPPING SYSTEM.....	24
9.1 Limit.....	24
9.2 Test Configuration	24
9.3 Test procedure and test setup.....	24
9.4 Test protocol	25



10. AVERAGE TIME OF OCCUPANCY IN ANY CHANNEL	26
10.1 Limit.....	26
10.2 Test Configuration	26
10.3 Test procedure and test setup	26
10.4 Test protocol	27
11. OCCUPIED BANDWIDTH	28
11.1 Test limit	28
11.2 Test Configuration	28
11.3 Test procedure and test setup	28
11.4 Test protocol	29
12. SPURIOUS EMISSION FOR RECEIVER	30
12.1 Test limit	30
12.2 Test Configuration	30
12.3 Test procedure and test setup	30
12.4 Test protocol	31



1. General Information

1.1 Applicant Information

Applicant: Hansong(Nanjing) Technology Ltd.
8th Kangping Road, Jiangning Economy and
Technology Development Zone, Nanjing, China,
211100

Name of contact: Una Chi

Tel: 86 25 66612193

Fax: 86 25 66612091

Manufacturer: Hansong(Nanjing) Technology Ltd.
8th Kangping Road, Jiangning Economy and
Technology Development Zone, Nanjing, China,
211100

Sample received date : Dec 17, 2010
Sample Identification No : *0101217-05-005*
Date of test : Feb 15, 2011 ~ April 12, 2011

1.2 Identification of the EUT

Equipment: Powered Speaker

Type/model: WS80i

FCC ID: XCO-HSWSR

IC: 7756A-HSWSR

1.3 Technical specification

Operation Frequency Band:	2412 - 2464 MHz
Modulation:	QPSK
Antenna Designation:	Integral, PCB antenna
Gain of Antenna:	1.0dBi max used.
Rating:	DC 24V powered by AC/DC adapter (Adapter input 100 – 240V, 50/60Hz, 1.5A Adapter input DC 24V, 2000mA, 48W)
Description of EUT:	Here is one model only. The EUT is the audio power amplifier. There are two antennas among the EUT, namely chain 1 and chain 2. The two antennas cannot transmit simultaneously.
Channel Description:	

Channel Identifier	Frequency (MHz)
low	2412
middle	2438
high	2464

1.4 Mode of operation during the test / Test peripherals used

Within this test report, the transmitter mode of EUT was tested.
While testing transmitter mode of EUT, the internal modulation was employed.
The EUT is tabletop device and was set as its normal use.

2. Test Specification

2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESIB 26	R&S	EC 3045	2010-6-1	2011-5-31
Semi-anechoic chamber	-	Albatross project	EC 3048	2010-6-1	2011-5-31
A.M.N.	ESH2-Z5	R&S	EC 3119	2011-1-23	2012-1-22
Test Receiver	ESCS 30	R&S	EC 2107	2011-1-23	2012-1-22
Ultra-broadband Antenna	CBL 6112D	TESEQ	EC 4206	2010-5-30	2011-6-1
Horn Antenna	HF 906	R&S	EC 3049	2010-6-30	2011-6-29
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2010-6-30	2011-6-29
Signal generator	SMR 20	R&S	EC 3044-1	2010-8-21	2011-8-20
High Pass Filter	WHKX 1.0/15G-10SS	Wainwright	EC4297-1	2011-2-8	2012-2-7
High Pass Filter	WHKX 2.8/18G-12SS	Wainwright	EC4297-2	2011-2-8	2012-2-7
High Pass Filter	WHKX 7.0/1.8G-8SS	Wainwright	EC4297-3	2011-2-8	2012-2-7
Band Reject Filter	WRCGV 2400/2483-2390/2493-35/10SS	Wainwright	EC4297-4	2011-2-8	2012-2-7
Spectrum Analyzer	E4408B	Agilent	MY45102679	2009-11-20	2010-11-19
Spectrum Analyzer	E4446A	Agilent	MY45300103	2010-6-11	2011-6-10
EMI Test Receiver	ESCI	R&S	100573	2010-5-23	2011-5-22
Preamplifier	AP-025C	Quietek	QT-AP003	2010-11-25	2011-11-24
Preamplifier	AP-180C	Quietek	CHM-0602013	2010-11-25	2011-11-24
Broad-Band Horn Antenna	BBHA9120D	Schwarzbeck	496	2010-11-25	2011-11-24
Broad-Band Horn Antenna	BBHA9170	Schwarzbeck	294	2010-11-25	2011-11-24

2.2 Test Standard

47CFR Part 15 (2010)
 ANSIC63.4 (2003)
 RSS-210 Issue 8 (December 2010)
 RSS-Gen Issue 3 (December 2010)

2.3 Test Summary

This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-210 Issue 8 Annex 8	Pass
Maximum peak output power	15.247(b)(1)	RSS-210 Issue 8 Annex 8	Pass
Power spectrum density	15.247(e)	RSS-210 Issue 8 Annex 8	Pass
Radiated emission	15.205 & 15.209	RSS-210 Issue 8 Clause 2	Pass
Emission outside the frequency band	15.247(d)	RSS-210 Issue 8 Annex 8	Pass
Power line conducted emission	15.207	RSS-Gen Issue 3 Clause 7.2.4	Pass
Channel number of hopping system	15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8	NA
Average time of occupancy in any channel	15.247(a)(1)(iii)	RSS-210 Issue 8 Annex 8	NA
Occupied bandwidth	-	RSS-Gen Issue 3 Clause 4.6.1	Tested
Spurious emission for receiver	-	RSS-210 Issue 8 Clause 2.3	NA

2.4 Data rate VS power

The data rate of EUT is fixed and cannot be adjusted.


3. Minimum 6dB Bandwidth

Test result: PASS

3.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Test Configuration

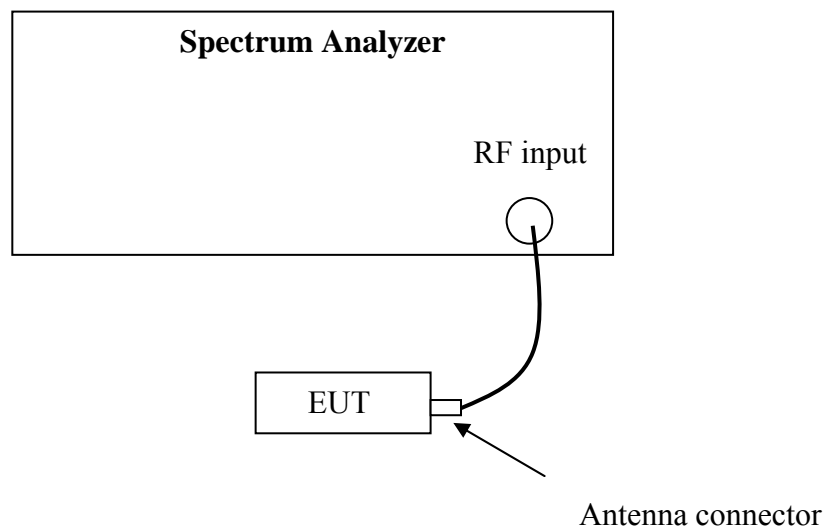

3.3 Test Procedure and test setup

The minimum 6dB bandwidth per FCC §15.247(a)(2) is measured using the Spectrum Analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW. The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

3.4 Test Protocol

Temperature : 22°C
Relative Humidity : 43%

Mode	CH	Chain 1 (MHz)	Chain 2 (MHz)	Limit (MHz)
-	L	10.10	10.10	≥ 0.5
	M	10.10	10.10	≥ 0.5
	H	10.10	10.10	≥ 0.5

4. Maximum peak output power

Test result: Pass

4.1 Test limit


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

4.2 Test Configuration

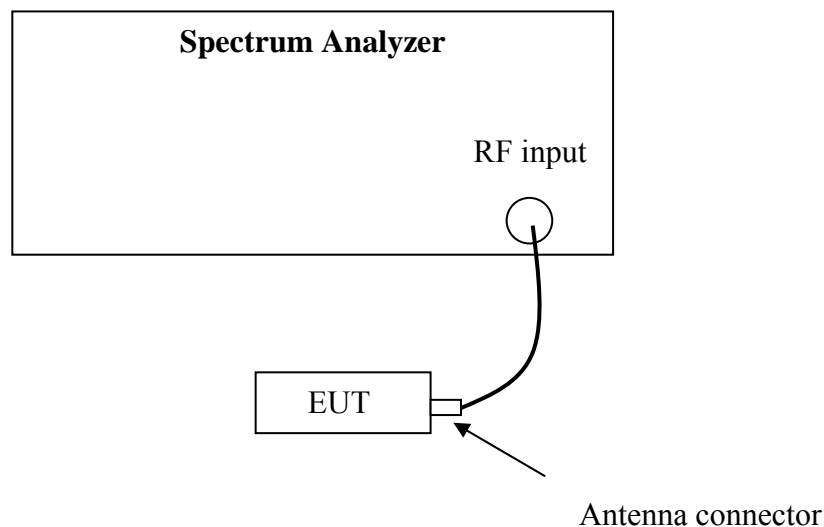

4.3 Test procedure and test setup

The power output per FCC § 15.247(b)(1) is measured using the Spectrum Analyzer with the resolutions bandwidth set at 1MHz, the video bandwidth set at 3MHz, and the SPAN>>RBW. The test was performed at 3 channels (lowest, middle and highest channel). The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements (Power Output Option 2, method#1).

4.4 Test protocol

Temperature : 22 °C
 Relative Humidity : 43 %

CH	Cable loss (dB)	Corrected reading of Chain 1 (dBm)	Corrected reading of Chain 2 (dBm)	Limit (dBm)
L	0.90	15.57	15.95	≤30
M	0.90	14.59	15.04	≤30
H	0.90	15.13	15.61	≤30

Note: Please refer to the test data for corrected reading.

For the gain of antenna = 1.0dBi, the maximum e.i.r.p = 15.95dBm + 1.00dBi = 16.95dBm = 49.55mW (lower than the e.i.r.p limit of 4W showed in RSS-210.).


5. Power spectrum density

Test result: **Pass**

5.1 Test limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Configuration

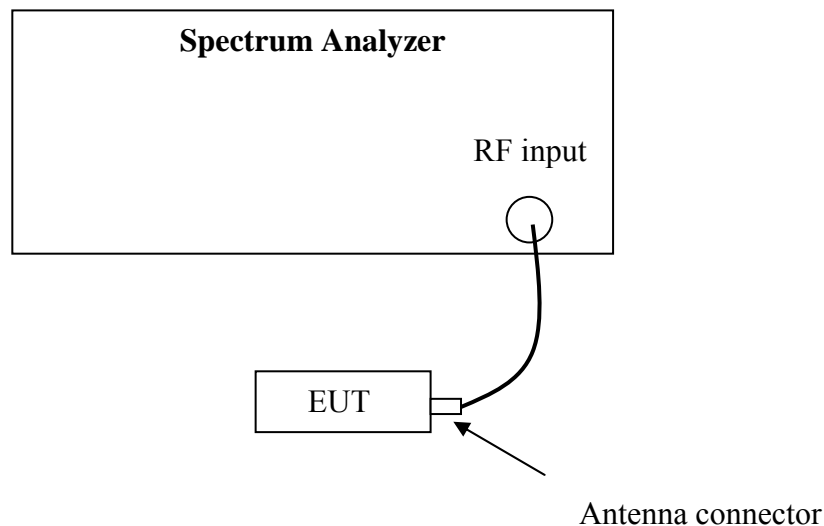

5.3 Test procedure and test setup

The power output per FCC §15.247(e) was measured using the Spectrum Analyzer with the resolutions bandwidth set at 3kHz, the video bandwidth set at 10kHz. The test was performed at 3 channels (lowest, middle and highest channel).

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

5.4 Test Protocol

Temperature : 22 °C
Relative Humidity : 43 %

Mode	CH	Chain 1 (dBm/3kHz)	Chain 2 (dBm/3kHz)	Limit (dBm/3kHz)
-	L	3.18	3.62	≤8
	M	2.49	3.04	≤8
	H	1.97	2.54	≤8

6. Radiated emission


Test result: PASS

6.1 Test limit

The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

6.2 Test Configuration

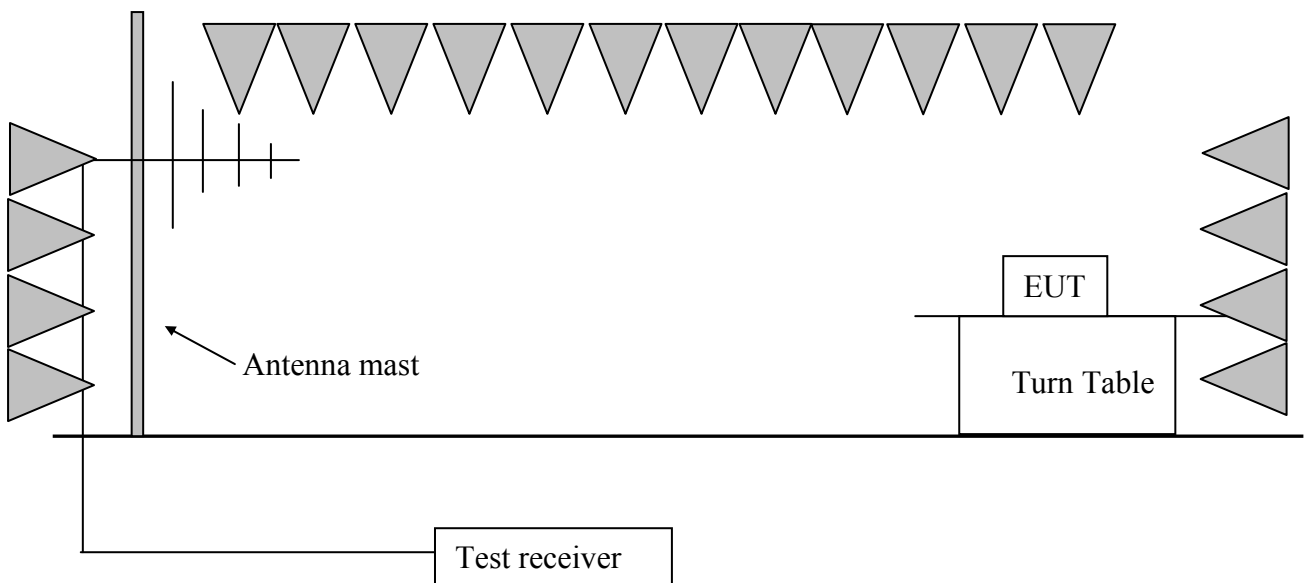

6.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 100kHz, VBW = 300kHz (30MHz~1GHz)

RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

RBW = 1MHz, VBW = 10Hz (>1GHz for AV);

6.4 Test protocol

The test is performed while the chain 2 is active which has higher conducted output power:

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2413.82	30.70	102.90	Fundamental	/	PK
	H	37.78	18.80	24.00	40.00	16.00	PK
	V	109.70	14.60	35.80	43.50	7.70	PK
	V	134.97	14.70	41.90	43.50	1.60	PK
	V	173.05	12.40	29.00	43.50	14.50	PK
	H	331.30	16.10	32.80	46.00	13.20	PK
	H	2390.00	-9.30	49.30	54.00	4.70	PK
	H	2483.50	-8.80	42.80	54.00	11.20	PK
	H	4825.95	-2.80	50.60	54.00	3.40	PK
M	H	2436.65	30.70	103.10	Fundamental	/	PK
	H	37.78	18.80	24.00	40.00	16.00	PK
	V	109.70	14.60	35.80	43.50	7.70	PK
	V	134.97	14.70	41.90	43.50	1.60	PK
	V	173.05	12.40	29.00	43.50	14.50	PK
	H	331.30	16.10	32.80	46.00	13.20	PK
	H	2390.00	-9.30	43.20	54.00	10.80	PK
	H	2483.50	-8.80	42.60	54.00	11.40	PK
	H	4875.13	-2.80	51.10	54.00	2.90	PK
H	H	2465.91	30.70	102.30	Fundamental	/	PK
	H	37.78	18.80	24.00	40.00	16.00	PK
	V	109.70	14.60	35.80	43.50	7.70	PK
	V	134.97	14.70	41.90	43.50	1.60	PK
	V	173.05	12.40	29.00	43.50	14.50	PK
	H	331.30	16.10	32.80	46.00	13.20	PK
	H	2390.00	-9.30	42.10	54.00	11.90	PK
	H	2483.50	-8.80	45.40	54.00	8.60	PK

	H	4932.05	-2.80	50.80	54.00	3.20	PK
--	---	---------	-------	-------	-------	------	----

- Remark: 1. For fundamental test, no amplifier is employed.
 2. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
 3. Corrected Reading = Original Receiver Reading + Correct Factor
 4. Margin = limit – Corrected Reading
 5. If the PK reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading =
 10dBuV + 0.20dB/m = 10.20dBuV/m
 Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m, then Margin =
 54 -10.20 = 43.80dBuV/m


7. Emission outside the frequency Band

Test result: PASS

7.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

7.2 Test Configuration

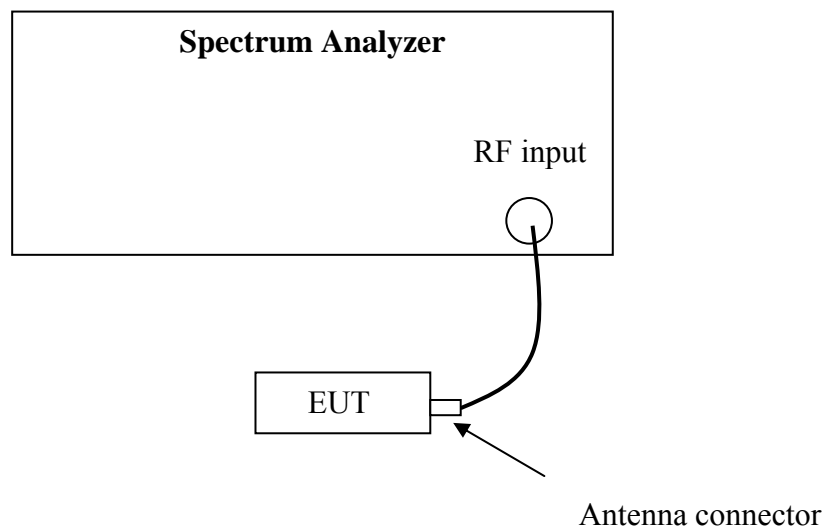

7.3 Test procedure and test setup

The Emission outside the frequency Band per FCC §15.247(d) is measured using the Spectrum Analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW.

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

7.4 Test protocol

It was found all the emission outside the frequency band is at least 20 dB below that in the 100 kHz bandwidth within the band.

Chain	CH	Max reading among band (dBm)	Min Attenuation outside band (dB)	Limit (dB)
1	L	3.04	34.02	≥ 20
	M	2.25	46.84	
	H	1.90	45.53	
2	L	3.44	34.60	
	M	2.82	47.97	
	H	2.50	46.66	

Note: the graph of band edge emission is listed in the “test data”.


8. Power line conducted emission

Test result: **Pass**

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

8.2 Test configuration

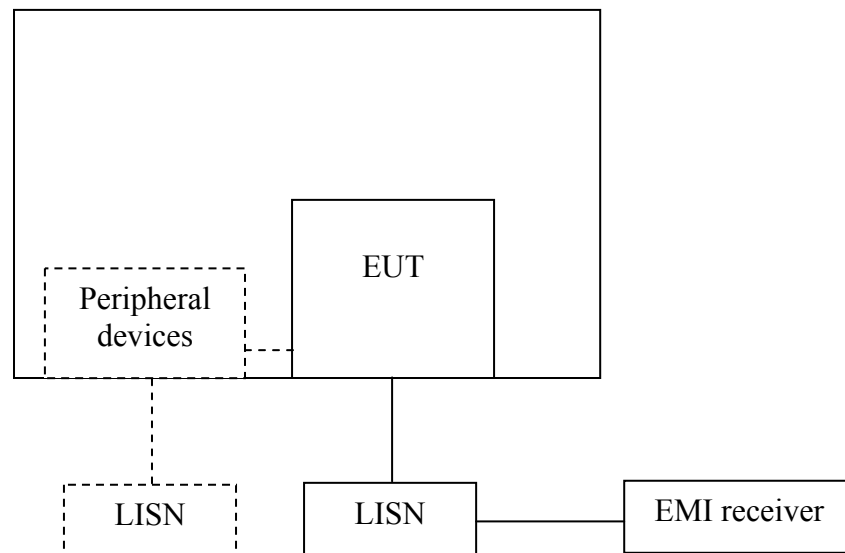

☒ For table top equipment, wooden support is 0.8m height table

☐ For floor standing equipment, wooden support is 0.1m height rack.

8.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a $50\Omega/50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega/50\mu\text{H}$ coupling impedance with 50Ω termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.

8.4 Test protocol

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
0.15 (N)	3.00	17.97	13.69	66.00	56.00	18.03	42.31
0.19 (N)	3.00	42.14	8.24	64.21	54.21	22.07	45.97
0.29 (L)	3.00	34.87	6.96	60.67	50.67	25.80	43.71
0.41 (N)	3.00	27.00	4.75	57.63	47.63	30.63	42.88
0.52 (N)	3.00	28.76	9.87	56.00	46.00	27.24	36.13
17.07 (L)	3.00	27.58	9.08	60.00	50.00	32.42	40.92
Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB). 2. Margin (dB) = Limit - Corrected Reading.							


9. Channel Number of hopping system

Test result: NA

9.1 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.2 Test Configuration

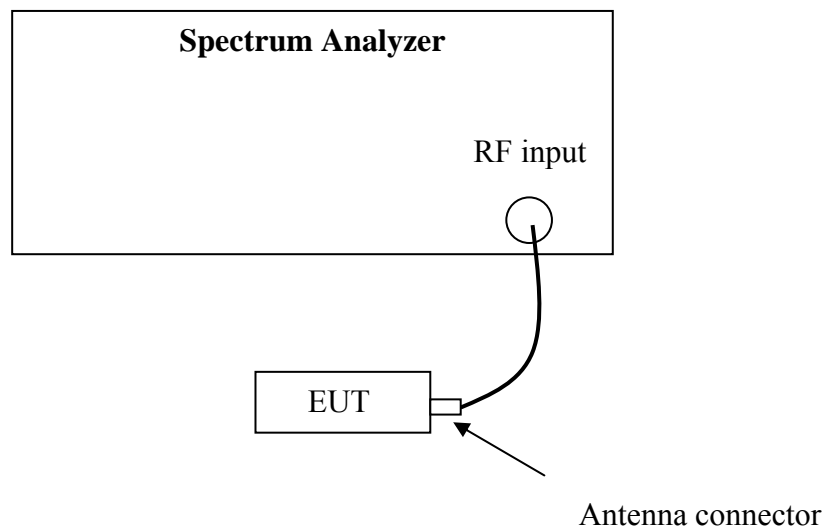

9.3 Test procedure and test setup

The channel number per FCC §15.247(a)(1)(iii) is measured using the Spectrum Analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN>>RBW.

The RF passband of the EUT was divided into 3 appropriate bands to test.

The EUT was tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.



9.4 Test protocol

Channel Number	Limit
-	≥ 15


10. Average time of occupancy in any channel

Test result: NA

10.1 Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2 Test Configuration

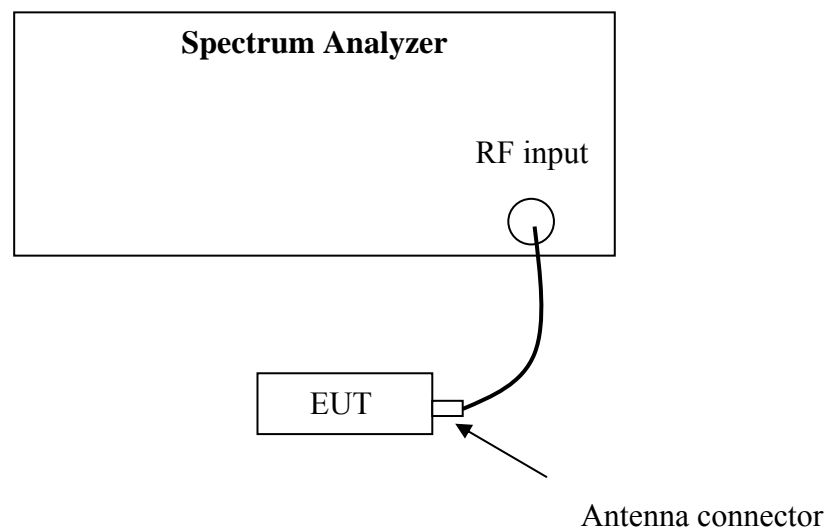

10.3 Test procedure and test setup

Average time of occupancy in any channel per FCC § 15.247(a)(1)(iii) is measured using the Spectrum Analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 300kHz, and the SPAN set to be 0Hz to test in time domain. The test is performed at the middle channel.

10.4 Test protocol

Packet	Observed period (s) P	Time of occupancy for single hopping (ms) O	Hops among the interval of 3.6 s I	Average time of occupancy (s) T	Limit (s)
Packet Type 4	-	-	-	-	≤0.4
Packet Type 11	-	-	-	-	≤0.4
Packet Type 15	-	-	-	-	≤0.4

Remark: 1. There are 79 channels in all. So the observed period $P = 0.4 * 79 = 31.6$ s.
2. Average time of occupancy $T = O * I * P / 3.6$


11. Occupied Bandwidth

Test Status: Tested

11.1 Test limit

None

11.2 Test Configuration

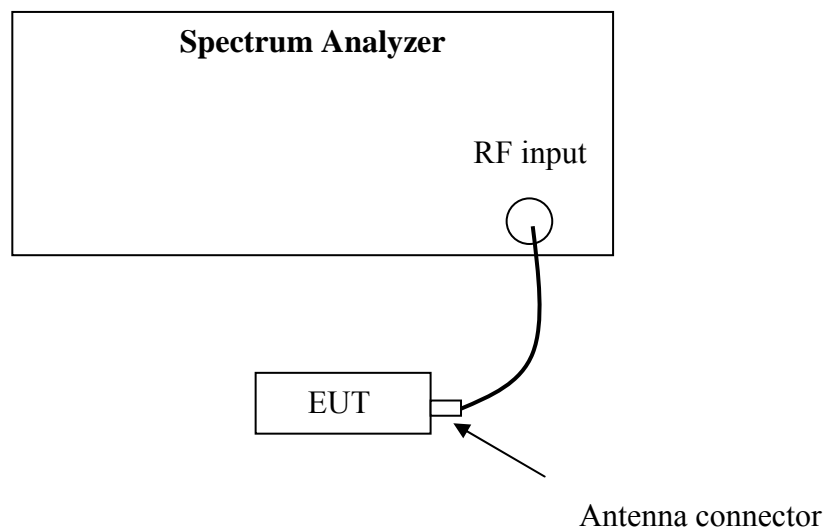

11.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was measured using the Spectrum Analyzer with the resolutions bandwidth set at 1MHz, the video bandwidth set at 3MHz.

11.4 Test protocol

Temperature : 22 °C
Relative Humidity : 43 %

Mode	Chain	Occupied Bandwidth (MHz)	Max. Value (MHz)
-	1	16.43	16.43
	2	16.43	

Remark: “Max. Value” is the maximum test result of all the measured occupied bandwidth.

12. Spurious emission for receiver

Test result: NA

12.1 Test limit

The spurious emission shall test through 3 times tuneable or local oscillator frequency whichever is the higher, without exceeding 40 GHz.

1) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2nW per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5nW above 1 GHz.

2) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table below:

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

12.2 Test Configuration

Please refer to clause 6.2

12.3 Test procedure and test setup

Please refer to clause 6.3.

12.4 Test protocol

Polarization	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed)
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = limit – Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Original Receiver Reading = 10dBuV.
 Then Correct Factor = 30.20 + 2.00 = 32.20dB/m; Corrected Reading = 10dBuV + 32.20dB/m = 42.20dBuV/m
 Assuming limit = 54dBuV/m, Corrected Reading = 42.20dBuV/m, then Margin = 54 - 42.20 = 11.80dBuV/m