

## DFS TEST REPORT

### No. 160602638SHA-003

Applicant : Hansong(Nanjing) Technology Ltd  
8th Kangping Road, Jiangning Economy&Technology  
Development Zone, Nanjing, 211106, China

Manufacturer : Hansong(Nanjing) Technology Ltd  
8th Kangping Road, Jiangning Economy&Technology  
Development Zone, Nanjing, 211106, China

Product Name : Play-Fi Wireless Module

Type/Model : Caprica 2L

**TEST RESULT : PASS**

### SUMMARY

The equipment complies with the requirements according to the following standard(s):

**47CFR Part 15 (2016):** Radio Frequency Devices

**RSS-Gen, Issue 4 (November 2014):** General Requirements and Information for the Certification of Radio communication Equipment

**RSS-247 (Issue 1, 2015):** Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices

**KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02:**  
Compliance Measurement Procedures for Unlicensed-National Information  
Infrastructure Devices Operating In the 5250-5350 MHz and 5470-5725 MHz Bands  
Incorporating Dynamic Frequency Selection


Date of issue: August 9, 2016

Prepared by:



Wade Zhang (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)

## Content

|  |           |
|--|-----------|
| <b>SUMMARY.....</b>  | <b>1</b>  |
| <b>1 GENERAL INFORMATION .....</b>                                     | <b>3</b>  |
| 1.1 Description of Equipment Under Test (EUT).....                     | 3         |
| 1.2 RF Technical Information.....                                      | 4         |
| 1.3 Description of Client.....   | 5         |
| 1.4 Description of Test Facility .....                                 | 5         |
| <b>2 TEST SPECIFICATIONS.....</b>                                      | <b>6</b>  |
| 2.1 Standards or specification .....                                   | 6         |
| 2.2 Mode of operation during the test / Test peripherals used.....     | 6         |
| 2.3 Instrument list .....  | 6         |
| 2.4 Test Summary .....   | 7         |
| <b>3 DFS DETECTION THRESHOLDS AND RADAR TEST WAVEFORMS .....</b>       | <b>8</b>  |
| 3.1 Interference Threshold values.....                                 | 8         |
| 3.2 DFS Response requirement values .....                              | 8         |
| 3.3 Radar Test Waveforms Minimum Step .....                            | 9         |
| 3.4 Short Pulse Radar Test Waveforms .....                             | 9         |
| 3.5 Long Pulse Radar Test Waveform.....                                | 11        |
| 3.6 Frequency Hopping Radar Test Waveform .....                        | 12        |
| 3.7 Calibration Setup .....  | 13        |
| 3.8 Radar Waveform Calibration Procedure.....                          | 14        |
| 3.9 Client Device requirement: .....                                   | 14        |
| 3.10 Radar Waveform Calibration Result.....                            | 15        |
| <b>4 CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME .....</b> | <b>17</b> |
| 4.1 Limit.....   | 17        |
| 4.2 Test Procedures.....   | 17        |
| 4.3 Test Result .....  | 18        |
| <b>APPENDIX I: PHOTOGRAPH OF TEST SETUP .....</b>                      | <b>20</b> |

## 1 GENERAL INFORMATION

### 1.1 Description of Equipment Under Test (EUT)

Product Name : Play-Fi Wireless Module

Type/Model : Caprica 2L

FCC ID : XCO-PLAYFI0754

IC : 7756A-PLAYFI0754

Description of EUT : The EUT is a WIFI module, it support 2.4G band and 5G Bands, and there have only one model. We tested it and listed the DFS result in this report.

Rating : 100-240V ~ 50/60Hz

Port identification : /

Category of EUT : Class B

EUT type : ☒ Table top ☐ Floor standing

Sample received date : July 21, 2016

Sample Identification No : \*0160721-19-001\*

Date of test : July 21, 2016 ~ August 04, 2016

#### Antenna List:

| No. | Model         | Type   | Band(s)          | Max Peak Gain(dBi) |
|-----|---------------|--------|------------------|--------------------|
| 1   | RC12WFI0237A1 | FPCB   | 2.4GHz - 2.5GHz  | 4.2                |
|     |               |        | 5GHz - 5.875 GHz | 4.5                |
| 2   | RC1WFI0779A   | FPCB   | 2.4GHz - 2.5GHz  | 3.0                |
|     |               |        | 5GHz - 5.875 GHz | 2.7                |
| 3   | RC1WFI0886A   | Dipole | 2.4GHz - 2.5GHz  | 1.1                |
|     |               |        | 5GHz - 5.875 GHz | 2.9                |

## 1.2 RF Technical Information

| Specification Items         | Description   |
|-----------------------------|---|
| Protocol                    | 802.11a/n20/n40   |
| Modulation                  | BPSK / QPSK / 16QAM / 64QAM   |
| Channel Frequency           | 5250-5350MHz; 5470-5725MHz  |
| Channel Bandwidth           | 20/40MHz  |
| Weather Band (5600~5650MHz) | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No   |
| Max. EIRP Power             | <input checked="" type="checkbox"/> < 200mW <input type="checkbox"/> ≥ 200mW  |
| Operating Mode              | <input type="checkbox"/> Master<br><input checked="" type="checkbox"/> Client Without Radar Detection<br><input type="checkbox"/> Client With Radar Detection |
| Manufacturer Statement      | Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms are not available to the end user.                |

### **1.3 Description of Client**

Applicant : Hansong(Nanjing) Technology Ltd  
8th Kangping Road, Jiangning Economy&Technology  
Development Zone, Nanjing, 211106, China

Name of contact : Anya Sun

Tel : 0086-025-66604242

Fax : 0086-025-66612098

Manufacturer : Hansong(Nanjing) Technology Ltd  
8th Kangping Road, Jiangning Economy&Technology  
Development Zone, Nanjing, 211106, China

### **1.4 Description of Test Facility**

Name : Intertek Testing Service Shanghai

Address : Building 86, No. 1198 Qinzhou Road(North), Shanghai  
200233, P.R. China

Telephone : 86 21 61278200

Telefax : 86 21 54262353

## 2 TEST SPECIFICATIONS

### 2.1 Standards or specification

**47CFR Part 15 (2016):** Radio Frequency Devices

**RSS-Gen, Issue 4 (November 2014):** General Requirements and Information for the Certification of Radio communication Equipment

**RSS-247 (Issue 1, 2015):** Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices

**KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02:** Compliance Measurement Procedures for Unlicensed-National Information Infrastructure Devices Operating In The 5250-5350 MHz and 5470-5725 MHz Bands Incorporating Dynamic Frequency Selection

### 2.2 Mode of operation during the test / Test peripherals used

Stream the channel loading test file from the Master Device to the Client Device on the test Channel for the entire period of the test if necessary.

### 2.3 Instrument list

| Selected                            | Instrument                  | EC no.   | Model   | Valid until date |
|-------------------------------------|-----------------------------|----------|---------|------------------|
| <input checked="" type="checkbox"/> | PXA Signal Analyzer         | EC5338   | N9030A  | 2016-11-16       |
| <input checked="" type="checkbox"/> | Power sensor                | EC5338-1 | U2021XA | 2016-10-1        |
| <input checked="" type="checkbox"/> | MXG Analog Signal Generator | EC5338-2 | N5181A  | 2016-11-5        |
| <input checked="" type="checkbox"/> | MXG Vector Signal Generator | EC5338-1 | N51812B | 2016-12-28       |

| Test Software  | Manufacturer | Function                         |
|----------------|--------------|----------------------------------|
| Pulse Building | Agilent      | Radar Signal Generation Software |
| DFS Tool       | Agilent      | DFS Test Software                |

## 2.4 Test Summary

**This report applies to tested sample only. The test results have been compared directly with the limits, and the measurement uncertainty is recorded. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.**

| TEST ITEM   | FCC CLAUSE   | IC CLAUSE                     | TEST RESULT |
|---|--------------|-------------------------------|-------------|
| Initial Channel Availability Check Time   | 15.407(h)(2) | RSS247 clause 6.2 (ii)        | NA          |
| Radar Burst at the Beginning of the Channel Availability Check & End of the Channel | 15.407(h)(2) | RSS247 clause 6.2 (ii)        | NA          |
| Channel Move Time, Channel Closing Time   | 15.407(h)(2) | RSS247 clause 6.2 (iii), (iv) | Pass        |
| Non-occupancy period  | 15.407(h)(2) | RSS247 clause 6.2 (v)         | NA          |
| UNII Detection Bandwidth Measurement  | 15.407(h)(2) | RSS247 clause 6.2 (i)         | NA          |
| Statistical Performance Check   | 15.407(h)(2) | RSS247 clause 6.2 (i)         | NA          |

Notes: 1: NA =Not Applicable

### 3 DFS Detection Thresholds and Radar Test Waveforms

#### 3.1 Interference Threshold values

| Maximum Transmit Power  | Value (see note) |
|---|------------------|
| $\geq 200$ mW   | -64 dBm          |
| $< 200$ mW  | -62 dBm          |
| <p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.<br/> Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> |                  |

#### 3.2 DFS Response requirement values

| Parameter  | Value  |
|--|--|
| <i>Non-occupancy period</i>  | Minimum 30 minutes   |
| <i>Channel Availability Check Time</i>   | 60 seconds   |
| <i>Channel Move Time</i>   | 10 seconds See Note 1.   |
| <i>Channel Closing Transmission Time</i>   | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| <i>U-NII Detection Bandwidth</i>   | Minimum 80% of the 99% power bandwidth See Note 3.   |
| <p><b>Note 1:</b> <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.<br/> <b>Note 2:</b> The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.<br/> <b>Note 3:</b> During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> |  |



### 3.3 Radar Test Waveforms Minimum Step

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

### 3.4 Short Pulse Radar Test Waveforms

| Radar Type                  | Pulse Width (μs) | PRI (μs)   | Number of Pulses                                 | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|-----------------------------|------------------|--|--|--|--------------------------|
| 0                           | 1                | 1428   | 18   | See Note 1                                 | See Note 1               |
| 1a                          | 1                | 15 unique PRI values randomly selected from the list of 23 PRI values in Note 2  | Roundup $\{(1/360) * (19 * 10^6 / \text{PRI})\}$ | 60%  | 30                       |
| 1b                          |                  | 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in radar type 1a |  |  |                          |
| 2                           | 1-5              | 150-230  | 23-29  | 60%  | 30                       |
| 3                           | 6-10             | 200-500  | 16-18  | 60%  | 30                       |
| 4                           | 11-20            | 200-500  | 12-16  | 60%  | 30                       |
| Aggregate (Radar Types 1-4) |                  |  |  | 80%  | 120                      |

**Note 1:** Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

**Note 2:** Pulse Repetition Intervals Values for Radar Type 1a

| Pulse Repetition Frequency No | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (us) |
|-------------------------------|--|--------------------------------|
| 1                             | 1930.5   | 518                            |
| 2                             | 1858.7   | 538                            |
| 3                             | 1792.1   | 558                            |
| 4                             | 1730.1   | 578                            |
| 5                             | 1672.2   | 598                            |
| 6                             | 1618.1   | 618                            |
| 7                             | 1567.4   | 638                            |
| 8                             | 1519.8   | 658                            |
| 9                             | 1474.9   | 678                            |
| 10                            | 1432.7   | 698                            |
| 11                            | 1392.8   | 718                            |
| 12                            | 1355   | 738                            |
| 13                            | 1319.3   | 758                            |
| 14                            | 1285.3   | 778                            |
| 15                            | 1253.1   | 798                            |
| 16                            | 1222.5   | 818                            |
| 17                            | 1193.3   | 838                            |
| 18                            | 1165.6   | 858                            |
| 19                            | 1139   | 878                            |
| 20                            | 1113.6   | 898                            |
| 21                            | 1089.3   | 918                            |
| 22                            | 1066.1   | 938                            |
| 23                            | 326.2  | 3066                           |

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example if in Short Pulse Radar Type 1 Test B a PRI of 3066us is selected, the number of pulses would be

$$\text{Roundup} \left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Roundup} \{17.2\} = 18.$$

### 3.5 Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μs) | PRI (μs) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|------------------|----------|-------------------|------------|----------------------------|--|--------------------------|
| 5          | 50-100           | 5-20     | 1000-2000         | 1-3        | 8-20                       | 80%  | 30                       |

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst\_Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *Burst* will have the same chirp width. Pulses in different *Bursts* may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst\_Count*. Each interval is of length  $(12,000,000 / \text{Burst\_Count})$  microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst\_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1

microsecond. The start time for each *Burst* is chosen randomly.

### A representative example of a Long Pulse Radar Type waveform:

- 1) The total test waveform length is 12 seconds.
- 2) Eight (8) *Bursts* are randomly generated for the *Burst\_Count*.
- 3) *Burst* 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts* 2 through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst* 1 is randomly generated (1 to 1,500,000 minus the total *Burst* 1 length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts* 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst* 2 falls in the 1,500,001 – 3,000,000 microsecond range).

### 3.6 Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (μs) | PRI (μs) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|------------------|----------|----------------|--------------------|--------------------------------|--|--------------------------|
| 6          | 1                | 333      | 9              | 0.333              | 300                            | 70%  | 30                       |


For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.


*Note: If a segment does not contain at least 1 frequency within the U-NII Detection Bandwidth of the UUT, then that segment is not used.*

### 3.7 Calibration Setup

☐ Radiated Method

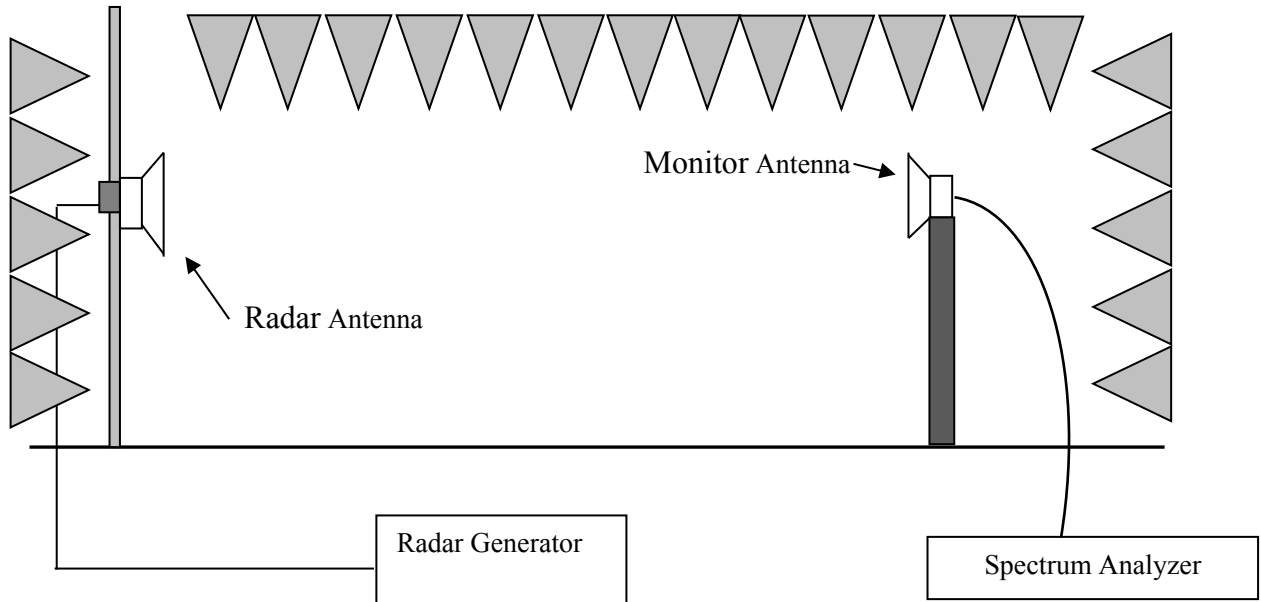

☒ Conducted Method

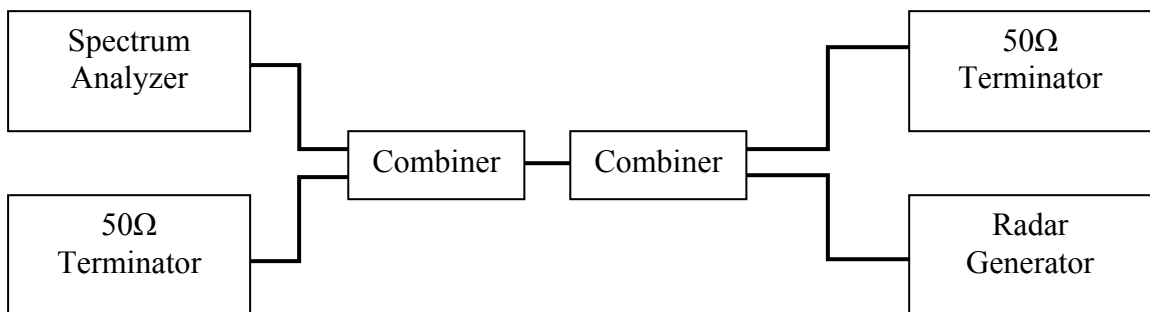

### 3.8 Radar Waveform Calibration Procedure

The Interference Radar Detection Threshold Level is -64dBm or -62dBm + 0 [dBi] + 1 dB that had been taken into account the output power range and antenna gain. The above equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to at least 3MHz. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was -64dBm or -62dBm + 0 [dBi] + 1 dB. Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

Central Frequency of Calibration:


- ☒ Bandwidth 20MHz: 5300MHz, 5500MHz
- ☒ Bandwidth 40MHz: 5310MHz, 5510MHz

### 3.9 Client Device requirement:


- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

### 3.10 Radar Waveform Calibration Result

5300MHz, Radar 0

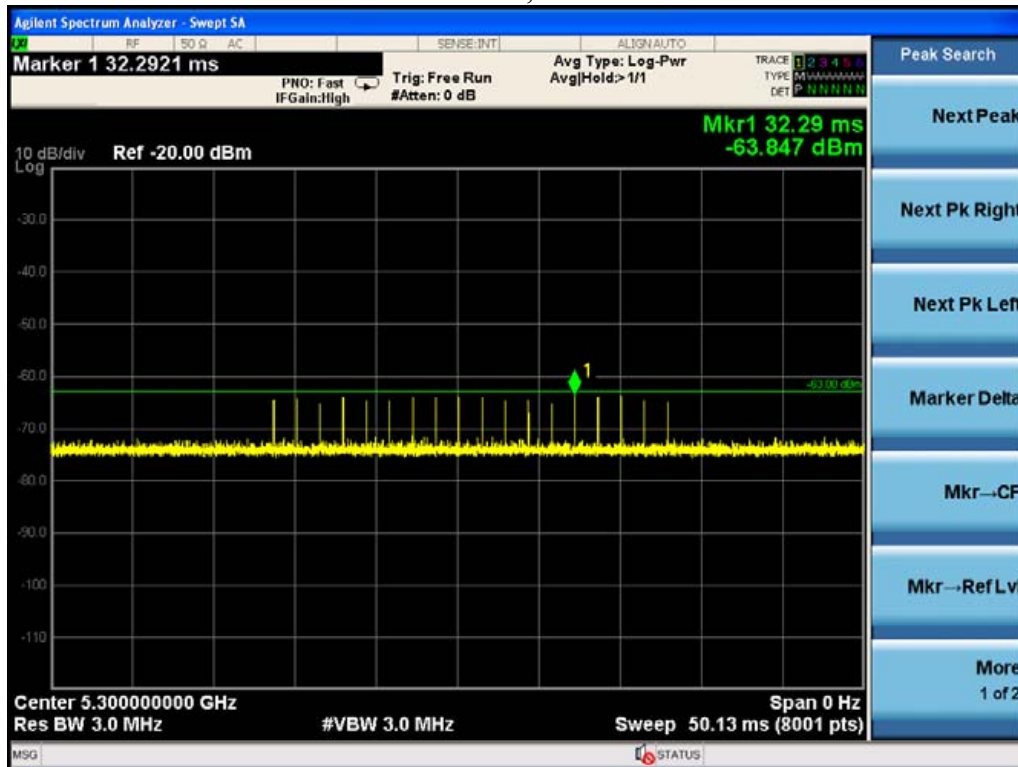

5310MHz, Radar 0

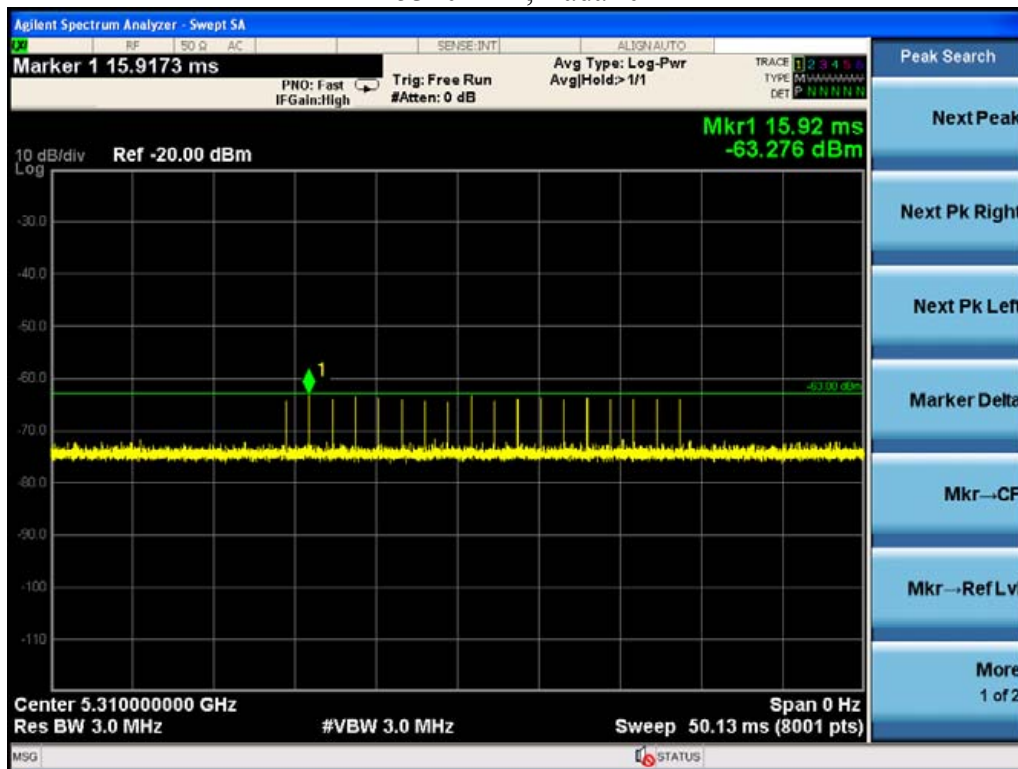




5500MHz, Radar 0



5510MHz, Radar 0

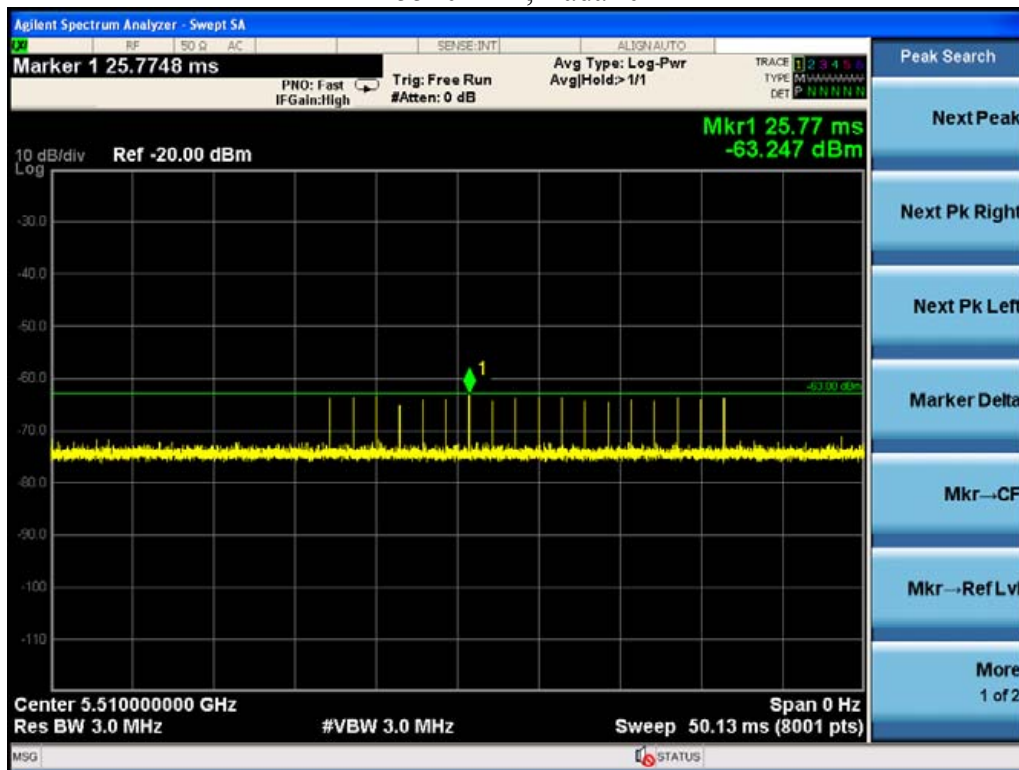



## 4 Channel Move Time and Channel Closing Transmission Time

### 4.1 Limit

The Channel Move Time to cease all transmissions on the current Channel upon detection of a Radar Waveform above the DFS Detection Threshold within 10 sec.

The total duration of Channel Closing Transmission Time is 200ms + an aggregate of 60ms over remaining 10s period.


### 4.2 Test Procedures

1. When a radar Burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device. A U-NII device operating as a Client Device will associate with the Master at Channel. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test. At time T0 the Radar Waveform generator sends a Burst of radar type 0 at Detection Threshold + 1dB.
2. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). At least a 10 second plot is reported. The *Channel Move Time* will be calculated based on the plot.
3. Measurement of the aggregate duration of the Channel Closing Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell = S / B$ ; where dwell is the dwell time per spectrum analyzer sampling bin, S is the sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of *Channel Closing Transmission Time* is calculated by:  $C = N * Dwell$ ; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.


### 4.3 Test Result

| Test Item                         | 5300MHz | 5310MHz  | Limit   | Result |
|-----------------------------------|---------|----------|---|--------|
| Channel Move Time                 | 4135ms  | 4022.5ms | 10 s  | Pass   |
| Channel Closing Transmission Time | 132.5ms | 132.5ms  | 200ms + an aggregate of 60ms over remaining 10 second period. | Pass   |

Type 0 radar at 5300MHz

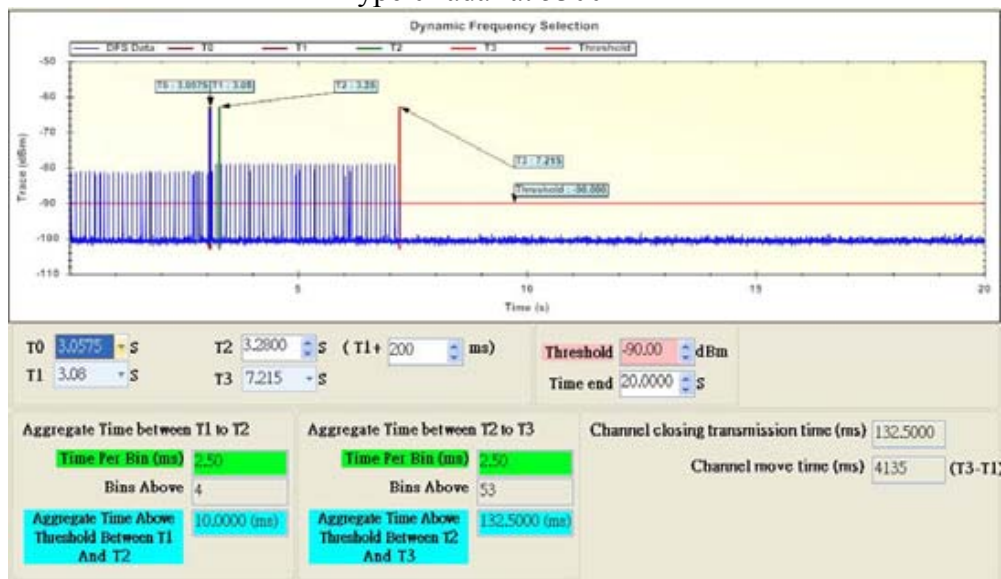


Type 0 radar at 5310MHz

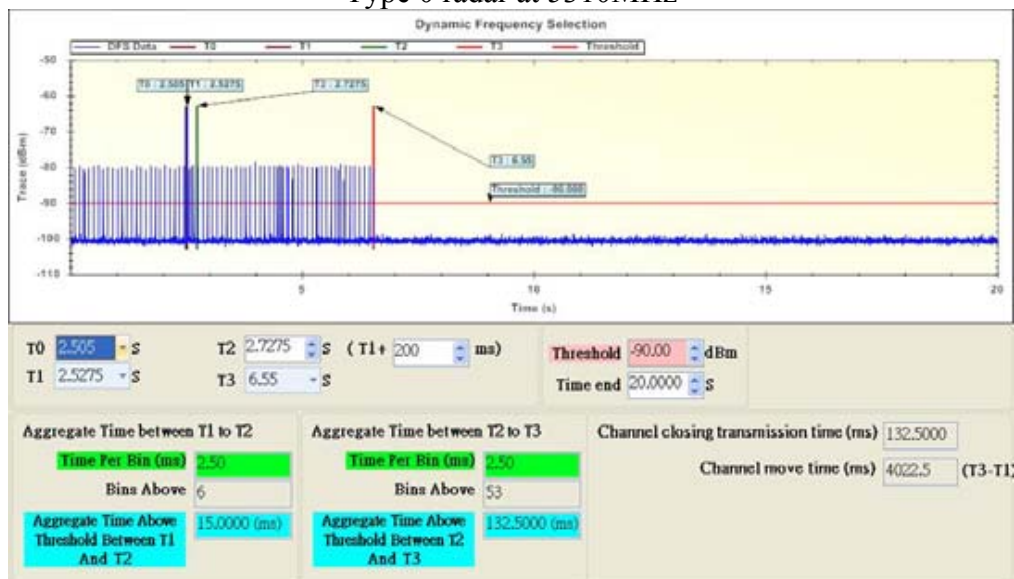


| Test Item                         | 5500MHz | 5510MHz | Limit   | Result |
|-----------------------------------|---------|---------|---|--------|
| Channel Move Time                 | 4250ms  | 4045ms  | 10 s  | Pass   |
| Channel Closing Transmission Time | 112.5ms | 107.5ms | 200ms + an aggregate of 60ms over remaining 10 second period. | Pass   |

Type 0 radar at 5500MHz

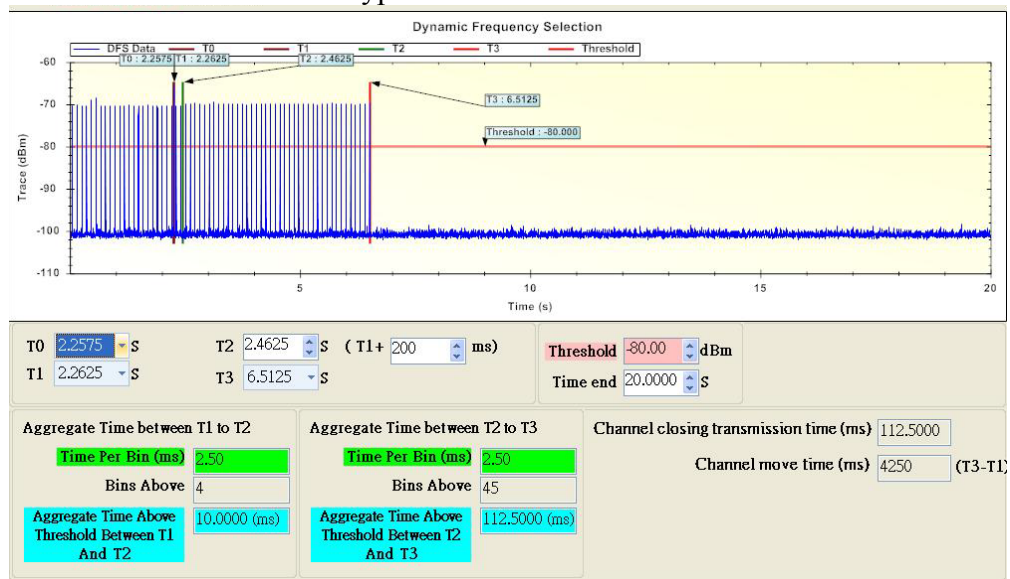

Type 0 radar at 5510MHz

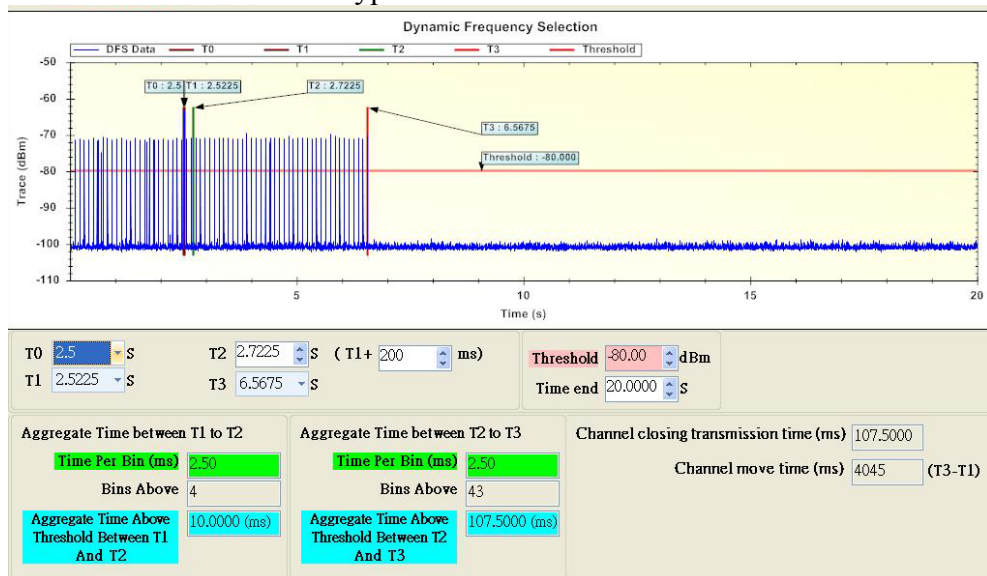

## **Appendix I: Photograph of Test Setup**

