


**TEST REPORT**  
**47 CFR FCC Part 15 subpart C Par. 15.225**  
**Intentional Radiators**

<b>Applicant:</b>	A.R. Hungary, Inc. Alkotas utca 41. Budapest 1123, HUNGARY		
<b>Test item:</b>	Passaport Readers and ID scanners		
<b>Identification / Type No.:</b>	Osmond R		
<b>IC:</b>	XCW-OSMOND-R		
<b>Order content:</b>	Full testing according to the following standard(s):		
<b>Test specification:</b>	FCC Part 15, Subpart C (par. 15.225)		
<b>Date of receipt:</b>	05/05/2022		
<b>Internal storage No.:</b>	A003255761-003		
<b>Testing period:</b>	21-22/06/2022 31/10/2022 18/11/2022		
<b>Place of testing:</b>	TÜV Rheinland Italia S.r.l. Via E. Mattei, 3 20005 Pogliano Milanese (MI) - IT		
<b>Testing laboratory:</b>	TÜV Rheinland Italia S.r.l. Via E. Mattei, 3 20005 Pogliano Milanese (MI) - IT		
<b>Test result:</b>	Pass		
<b>Tested by:</b>	Frescaroli Mattia  (Laboratory technician)	<b>Authorized by:</b>	Andrea Bortolotti  (Reviewer)
<b>Date:</b>	01/02/2023	<b>Date:</b>	02/02/2023
<b>Position</b>	Sachverständige(r)/Expert	<b>Position</b>	Sachverständige(r)/Expert
<b>Other:</b>	---		
<p>The test results reported in this test report shall refer only to the samples tested as received. TRI is not responsible for the sampling phase. This report may not be partially reproduced, except with the prior written permission of the issuing Laboratory. TRI refuses any responsibility about information supplied by the customer contained in this test report</p>			

## Product description

1	<p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.</i></p> <p><i>Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p>
2	<p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</i></p>
3	<p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p>
4	<p><i>Unless otherwise agreed with the customer, a conformity assessment is always carried out based on the applied standards.</i></p> <p><i>At the customer's request, the statement on the conformity of the product tested in this test report is carried out according to the criteria/requirements of the applied standards.</i></p> <p><i>Evaluation conditions deviating from these are documented separately in the respective chapters.</i></p>

## Product description

### 0. Table of Contents

0.	Table of Contents .....	3
1.	General description of test item(s) .....	4
2.	EUT identification .....	5
3.	Test method .....	6
4.	Reference standards .....	10
5.	Equipment used during test .....	10
6.	Input/Output ports .....	11
7.	Radio type identification .....	12
8.	Operating modes .....	13
9.	Climatic conditions .....	13
10.	Statement of the measurement uncertainty .....	14
11.	Example for interpretation of measuring results .....	14
12.	Measurement uncertainty .....	15
13.	EUT configuration .....	16
14.	Change history .....	17
15.	Result summary section .....	18
16.	Emission Test .....	19
17.	Photographic documentation: EUT Test setup .....	41
18.	List of test equipment .....	42

## Product description

### 1. General description of test item(s)

<b>Identification / Type No.:</b>	Osmond R
<b>Serial number</b>	1213620
<b>Manufacturer</b>	A.R. Hungary, Inc. Alkotas utca 41. Budapest 1123, HUNGARY
<b>Trade Mark</b>	<b>ADAPTIVE RECOGNITION</b>
<b>Rated voltage / frequency</b>	100-240 V AC, 50/60 Hz
<b>Rated current / power</b>	Input Max 1,5 A
<b>Equipment type</b>	Intentional radiator installed in a host equipment
<b>Number of phases</b>	1Phase
<b>Hardware version</b>	ASM-1054.18
<b>Software version</b>	PR 2.1.10.3
<b>Dimensions</b>	178 × 203 × 157 mm
<b>Weight</b>	2.25 kg
<b>Other</b>	---
<b>Test sample obtaining:</b>	<input checked="" type="checkbox"/> Sampling by customer <input type="checkbox"/> Sampling by TÜV Rheinland Group <input type="checkbox"/> others:

## Product description

### 2. EUT identification

See the Annex below:

DE2297LO 001 Annex 1	Photographic documentation
----------------------	----------------------------

Clause	Requirements - Tests	Clause	Evaluation
<b>3. Test method</b>			
	<p><b>§15.225 Operation within the band 13.110 – 14.010 MHz</b></p> <p>(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.</p> <p>(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.</p> <p>(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.</p> <p>(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.</p> <p>(e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.</p> <p>(f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device</p>		

Clause	Requirements - Tests	Clause	Evaluation													
	<p><b>§15.207 Conducted limits.</b></p> <p>(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 <math>\mu</math>H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.</p> <table border="1"> <thead> <tr> <th>Frequency of Emission (MHz)</th> <th colspan="2">Conducted Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th></th> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56 *</td> <td>56 to 46 *</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p> <p>(b) The shown limit in paragraph (a) of this Section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:</p> <ol style="list-style-type: none"> <li>(1) For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.</li> <li>(2) For all other carrier current systems: 1000 <math>\mu</math>V within the frequency band 535-1705 kHz, as measured using a 50 <math>\mu</math>H/50 ohms LISN.</li> <li>(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in Section 15.205 and Section 15.209, 15.221, 15.223, 15.225 or 15.227, as appropriate.</li> </ol> <p>(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.</p>	Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)			Quasi-peak	Average	0.15-0.5	66 to 56 *	56 to 46 *	0.5-5	56	46	5-30	60	50
Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)															
	Quasi-peak	Average														
0.15-0.5	66 to 56 *	56 to 46 *														
0.5-5	56	46														
5-30	60	50														

Clause	Requirements - Tests	Clause	Evaluation																									
	<p><b>§15.209 Radiated emission limits, general requirements.</b></p> <p>(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement Distance (meter)</th></tr> </thead> <tbody> <tr> <td>0.009 - 0.490</td><td>2400/F(kHz)</td><td>300</td></tr> <tr> <td>0.490 - 1.705</td><td>24000/F(kHz)</td><td>30</td></tr> <tr> <td>1.705 - 30.0</td><td>30</td><td>30</td></tr> <tr> <td>30-88</td><td>100**</td><td>3</td></tr> <tr> <td>88-216</td><td>150**</td><td>3</td></tr> <tr> <td>216-960</td><td>200**</td><td>3</td></tr> <tr> <td>Above 960</td><td>500</td><td>3</td></tr> </tbody> </table> <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.</p> <p>(b) In the emission table above, the tighter limit applies at the band edges.</p> <p>(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other Sections within this Part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.</p> <p>(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>(e) The provisions in Sections 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this Part.</p> <p>(f) In accordance with Section 15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in Section 15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in Section 15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in Section 15.109 that are applicable to the incorporated digital device.</p> <p>(g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.</p>	Frequency (MHz)	Field strength (microvolts/meter)	Measurement Distance (meter)	0.009 - 0.490	2400/F(kHz)	300	0.490 - 1.705	24000/F(kHz)	30	1.705 - 30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3			
Frequency (MHz)	Field strength (microvolts/meter)	Measurement Distance (meter)																										
0.009 - 0.490	2400/F(kHz)	300																										
0.490 - 1.705	24000/F(kHz)	30																										
1.705 - 30.0	30	30																										
30-88	100**	3																										
88-216	150**	3																										
216-960	200**	3																										
Above 960	500	3																										

Clause	Requirements - Tests	Clause	Evaluation
<p><b>§ 15.33 Frequency range of radiated measurements.</b></p> <p>(a) Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:</p> <p>(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.</p> <p>(2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.</p> <p>(3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.</p> <p>(4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.</p>			

Clause	Requirements - Tests	Clause	Evaluation
--------	----------------------	--------	------------

**4. Reference standards**

Reference document		
47 CFR Part 15	Last edition	Radio Frequency Device
ANSI C63.4	2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices
996369 D04 Module Integration Guide	v02 October 13, 2020	Modular transmitter integration guide; guidance for host product manufacturers.

Note: The following referenced documents are indispensable for the application of this document.  
For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.


**5. Equipment used during test**

Equipment under test				
No.	Product type	Manufacturer	Model	Comments
1	Passaport Readers and ID scanners	Adaptive Recognition	Osmond R	With RFID
2	—	—	—	—
Auxiliary Equipment / Peripherals				
No.	Product type	Manufacturer	Model	Comments
1	Personal computer	DELL	—	Use for the continuous scanning mode

Clause	Requirements - Tests		Clause	Evaluation	
<b>6. Input/Output ports</b>					
Nr.	Name	Type	Cable length	Cable shielded	Comments
1	Enclosure port	Conductive/ Non conductive	—	—	Closed by screws
2	AC power port	Power / Mains	< 3m	---	L/N/PE

Clause	Requirements - Tests	Clause	Evaluation
<b>7. Radio type identification</b>			
<b>Brand name and model of radio module</b>	ST25R3911B		
<b>Antenna model and Gain</b>	Pcb loop antenna		
<b>Antenna type</b>	<input type="checkbox"/> External antenna <input type="checkbox"/> Dedicated antenna <input checked="" type="checkbox"/> Integral antenna		
<b>Type of equipment</b>	<input type="checkbox"/> stand-alone equipment <input checked="" type="checkbox"/> combined equipment <input type="checkbox"/> multi-radio equipment		
<b>Type of modulation</b>	----		
<b>Nominal voltage of stand-alone or combined equipment</b>	100-240 V AC		
<b>Operatig frequency</b>	13.56MHz		
<b>Number of channels</b>	1		
<b>Transmit operating mode</b>	<input checked="" type="checkbox"/> single antenna <input type="checkbox"/> multiple antennas		
<b>Environmental equipment</b>	<input checked="" type="checkbox"/> Test only in normal conditions <input type="checkbox"/> Test in normal conditions and extreme conditions		
<b>Temperature range</b>	-20 °C to +55 °C		

Clause	Requirements - Tests	Clause	Evaluation
<b>8. Operating modes</b>			
<b>No. Description</b>			
<b>1</b>	<i>continuous scanning mode with test passport</i>		
<b>9. Climatic conditions</b>			
<b>Ambient Temperature</b>	10 - 40 °C		
<b>Relative Humidity</b>	10 - 90 %		
<b>Air pressure</b>	Not specified		
According to ANSI C63.4			

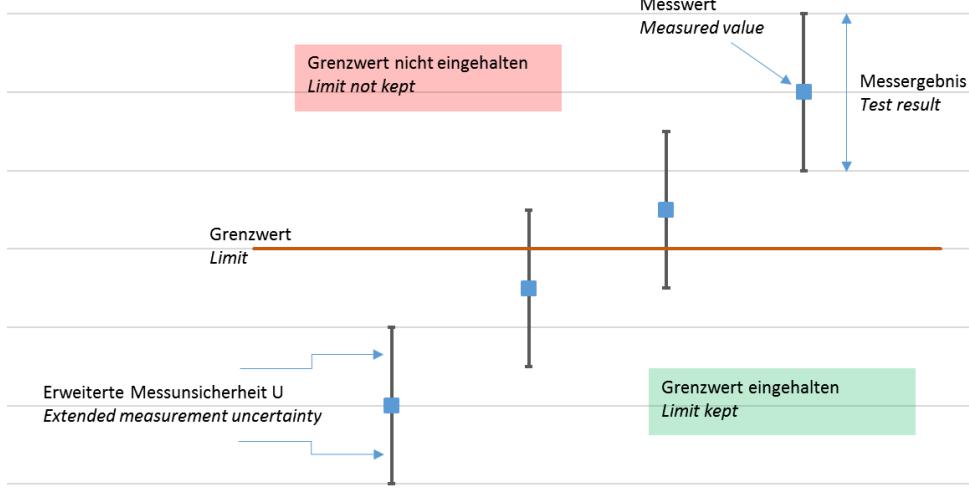Clause	Requirements - Tests	Clause	Evaluation								
<b>10. Statement of the measurement uncertainty</b>											
<p>The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the quality system acc. to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.</p> <p>The manufacturer has the sole responsibility of continued compliance of the device.</p>											
<b>11. Example for interpretation of measuring results</b>											
											
	<p>Example for interpretation of measuring results</p> <table> <thead> <tr> <th>Measured value</th> <th>Limit</th> <th>Extended measurement uncertainty (k=2)</th> <th>Test result</th> </tr> </thead> <tbody> <tr> <td>48.9 dB<math>\mu</math>V @ 16.5 MHz</td> <td>50 dB<math>\mu</math>V</td> <td>2.2 dB</td> <td>46.7 dB<math>\mu</math>V – 51.1 dB<math>\mu</math>V</td> </tr> </tbody> </table>	Measured value	Limit	Extended measurement uncertainty (k=2)	Test result	48.9 dB $\mu$ V @ 16.5 MHz	50 dB $\mu$ V	2.2 dB	46.7 dB $\mu$ V – 51.1 dB $\mu$ V		
Measured value	Limit	Extended measurement uncertainty (k=2)	Test result								
48.9 dB $\mu$ V @ 16.5 MHz	50 dB $\mu$ V	2.2 dB	46.7 dB $\mu$ V – 51.1 dB $\mu$ V								
Decision rule :	<p>Statements of conformity (PASS or FAIL) to specifications are made in this report without taking measurement uncertainty into account.</p> <p>Where statements of conformity are made in this report, the following decision rules are applied:</p> <p>PASS – Results within limits/specifications</p> <p>FAIL – Results exceed limits/specifications</p>										

Clause	Requirements - Tests	Clause	Evaluation
<b>12. Measurement uncertainty</b>			
	<b>Test Method</b>	<b>Uncertainty (95%)</b>	<b>Coverage factor k</b>
RF Conducted continuous emissions - range (9 kHz – 30 MHz)	3.3 dB	2.0	
RF Radiated emissions – range (30 – 1000) MHz	4.9 dB	2.0	
RF Radiated emissions – range (1 – 3,6) GHz	5.1 dB	2.0	
RF Radiated emissions – range (3,6 – 8) GHz	5.1 dB	2.0	
RF Magnetic Field by Loop Large Antenna – range (9 kHz – 30 MHz)	4,6 dB	2,0	
Occupied Bandwidth	$514.4 \times 10^{-9}$	2.0	
Measurement of Normalised Site Attenuation and VSWR	6.0 dB	2.0	

Clause	Requirements - Tests	Clause	Evaluation
<b>13. EUT configuration</b>			
	<p>The test setup was made in accordance with mentioned FF standards.</p> <p>Measurements and tests were executed under "worst case" conditions. Typical EUT arrangements or operating modes were chosen or assumed which let suspect maximum emission or susceptibility (a so called "unfavourable configuration").</p> <p>Details of test setup or adjustments are (particularly) shown inside the photo documentation.</p> <p>As far as not mentioned otherwise these statements are valid for all following tests.</p>		
AC or DC mains voltage used during the test if not otherwise specified:	115 Vac – 60 Hz		

**REVISION HISTORY****14. Change history**

Test report number	List of revisions	Date
DE2297LO 001	First edition	02/02/2023

**ADDITIONAL DOCUMENTATION**
**15. Result summary section**

Clause	Requirement – Test case	Result
§ 15.203	Antenna Requirements	<b>Pass</b>
§ 15.207 (a)	Conducted emission test	<b>Pass</b>
§ 15.215 (a) (b) (c)	Additional provisions to the general radiated emission limitations	<b>Pass</b>
§ 15.215 (c)	20 dB Bandwidth	<b>Pass</b>
§ 15.225 (a)	Field strength in band 13,553-13,567MHz	<b>Pass</b>
§ 15.225 (b)	Field strength in band 13,410-13,553 MHz and 13,567-13,710 MHz	<b>Pass</b>
§ 15.225 (c)	Field strength in band 13,110-13,410 MHz and 13,710-14,010 MHz	<b>Pass</b>
§ 15.225 (d) § 15.209 (a) (f)	Field strength outside of the 13,110-14,010 MHz band	<b>Pass</b>
§ 15.225 (e)	Frequency tolerance of the carrier signal	<b>Pass</b>
§ 15.225 (f)	Radio frequency powered tags	<b>Not applicable<sup>1</sup></b>
N.A. <sup>1</sup> : No powered tag.		

**ADDITIONAL DOCUMENTATION****16. Emission Test**

<b>Antenna requirement</b>	
<b>Test date</b>	18/11/2022
<b>Applied Standard</b>	FCC part 15 C
<b>Paragraph</b>	§15.203
<b>Temperature</b>	25° C
<b>Humidity</b>	40%
<b>Tested by</b>	Mattia Frescaroli
<b>Model</b>	Osmond R
<b>Internal Storage No.</b>	A003255761-003
<b>Remarks</b>	1

**ADDITIONAL DOCUMENTATION**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

**Antenna specifications**

N° of authorized antenna types	1
Antenna type	PCB antenna
Maximum total gain	< 6dBi
External power amplifiers	Not present

**ADDITIONAL DOCUMENTATION**

<b>Conducted emission test</b>	
<b>Test date</b>	18/11/2022
<b>Applied Standard</b>	FCC part 15 C
<b>Paragraph</b>	§15.207
<b>Test method</b>	§ 7 of ANSI C63-4
<b>Temperature</b>	25° C
<b>Humidity</b>	40%
<b>Tested by</b>	Mattia Frescaroli
<b>Model</b>	Osmond R
<b>Internal Storage No.</b>	A003255761-003
<b>Operating mode</b>	1
<b>Tested terminals</b>	AC Mains input
<b>Remarks</b>	---

## ADDITIONAL DOCUMENTATION

**Test parameter of**

Hardware Setup: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz  
 Measurement Type: 2 Line LISN  
 Frequency Range: 150 kHz - 30 MHz  
 Graphics Level Range: 0 dB $\mu$ V - 90 dB $\mu$ V


Preview Measurements:  
 LISN Lines: N, L1, HP (150 kHz)  
 Scan Test Template: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz

<b>Subrange</b>	<b>Step Size</b>	<b>Detectors</b>	<b>IF BW</b>	<b>Meas. Time</b>	<b>Preamp</b>
Receiver: [ESR 3] 150 kHz - 30 MHz	2.25 kHz	QPK ; AVG	9 kHz	2 s	0 dB

Final Measurements:  
 Template for Single Meas.: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz fin

<b>Subrange</b>	<b>Step Size</b>	<b>Detectors</b>	<b>IF BW</b>	<b>Meas. Time</b>	<b>Preamp</b>
Receiver: [ESR 3] 150 kHz - 30 MHz	2.25 kHz	QPK ; AVG	9 kHz	1 s	0 dB

## ADDITIONAL DOCUMENTATION

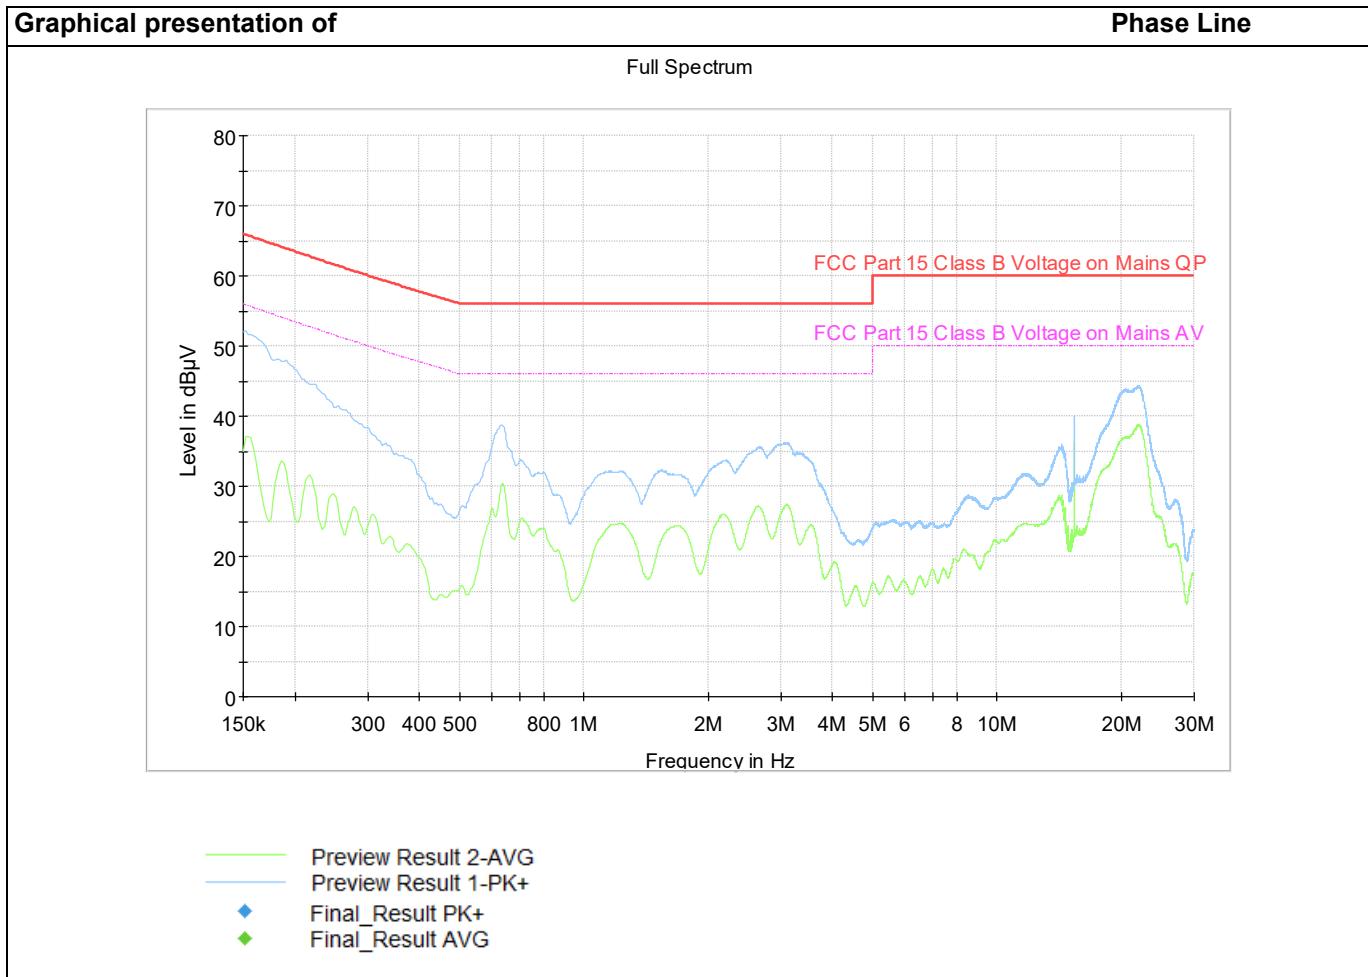


Measurement data of

Note: with RF circuit closed on 50ohm resistor.

Margin value = Measurement value – Limit value

## ADDITIONAL DOCUMENTATION

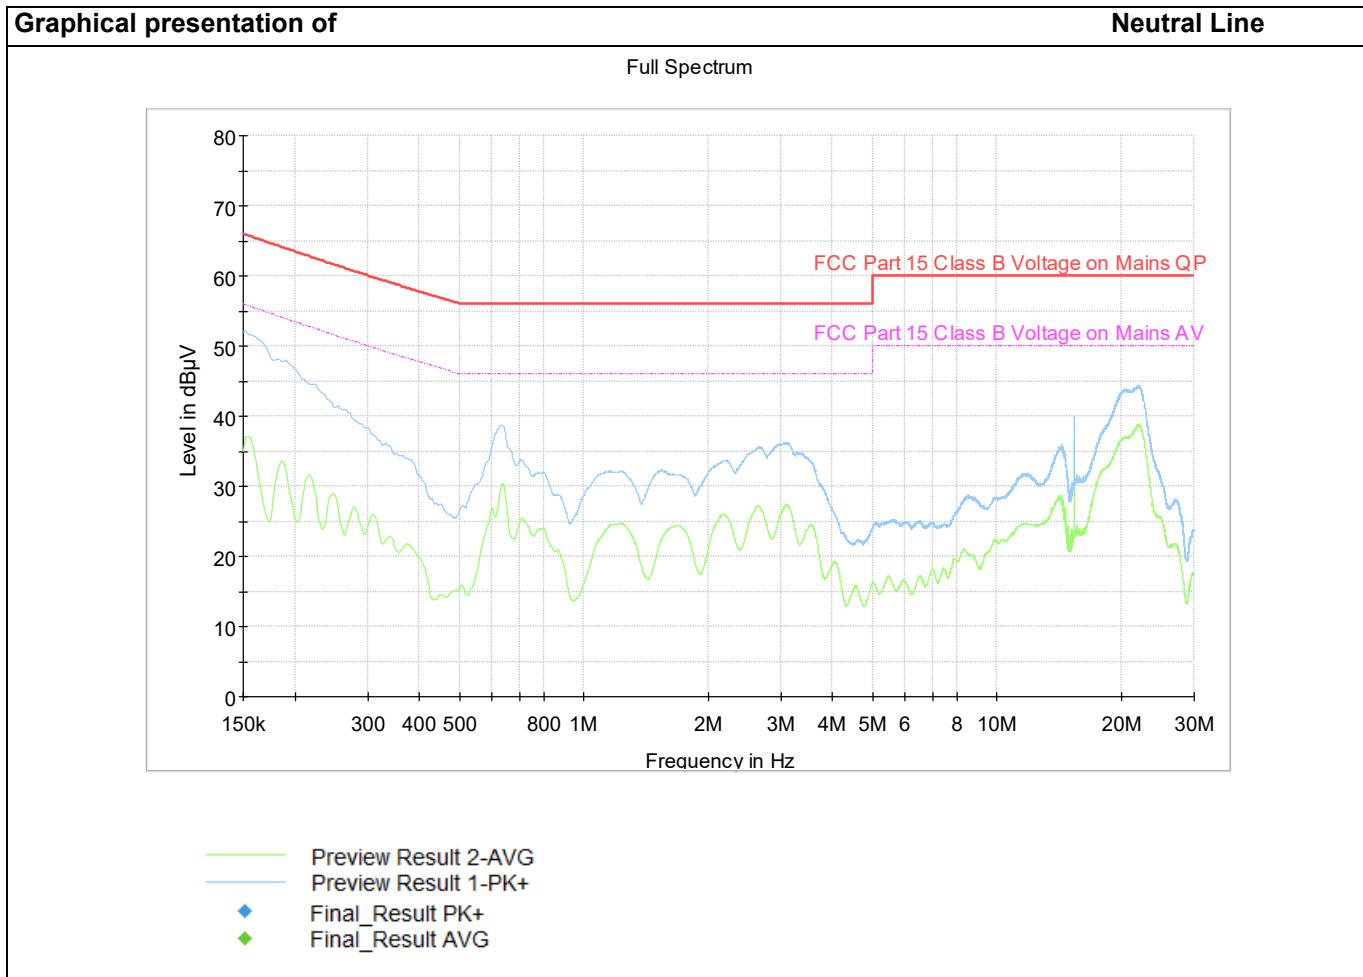

Measurement data of

Note: with RF circuit closed on 50ohm resistor

Margin value = Measurement value – Limit value

## ADDITIONAL DOCUMENTATION

**Radiated emission test - Field strength outside of the 13,110-14,010 MHz band**

<b>Test date</b>	18/11/2022
<b>Applied Standard</b>	FCC part 15 C
<b>Paragraph</b>	§15.205; §15.209; §15.225
<b>Test method</b>	§ 8 of ANSI C63-4
<b>Temperature</b>	25° C
<b>Humidity</b>	40%
<b>Tested by</b>	Mattia Frescaroli
<b>Model</b>	Osmond R
<b>Internal Storage No.</b>	A003255761-003
<b>Operating mode</b>	1
<b>Tested terminals</b>	Enclosure
<b>Further information to test setup</b>	For frequencies above 1GHz, the anechoic material is also placed on the metallic floor between EUT and Antenna
<b>Remarks</b>	In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is: $\text{Extrapolation (dB)} = 40\log(300\text{meter} / 3\text{meter}) = +80\text{dB}$ $\text{Extrapolation (dB)} = 40\log(30\text{meter} / 3\text{meter}) = +40\text{dB}$

**ADDITIONAL DOCUMENTATION**
**RANGE 9kHz-30MHz**
**Test parameter of**
**EMI Auto Test Template: Electric Field Strength with Scans 9kHz-30MHz**

Hardware Setup: Electric Field Strength 9kHz-30MHz  
 Measurement Type: Open-Area-Test-Site (SAC/FAR)  
 Frequency Range: 9 kHz - 30 MHz  
 Graphics Level Range: 0 dB $\mu$ V/m - 130 dB $\mu$ V/m

**Preview Measurements:**

Antenna height: 100 - 100 cm , Step Size = 0 cm , Positioning Speed = 1  
 Polarization: V  
 Turntable position: 0 - 270 deg , Step Size = 90 deg , Positioning Speed = 3  
 Scan Test Template: Electric Field Strength 9kHz-30MHz

<b>Subrange</b>	<b>Step Size</b>	<b>Detectors</b>	<b>IF BW</b>	<b>Meas. Time</b>	<b>Preamp</b>
Receiver: [ESR 3]					
9 kHz - 150 kHz	50 Hz	PK+	200 Hz	0,05 s	0 dB
150 kHz - 30 MHz	2.25 kHz	PK+	9 kHz	5 s	0 dB

**Final Measurements:**


Template for Single Meas.: Electric Field Strength 9kHz-30MHz fin

<b>Subrange</b>	<b>Step Size</b>	<b>Detectors</b>	<b>IF BW</b>	<b>Meas. Time</b>	<b>Preamp</b>
Receiver: [ESR 3]					
9 kHz - 150 kHz	80 Hz	QPK	200 Hz	1 s	20 dB
150 kHz - 30 MHz	2.25 kHz	QPK ; AVG	9 kHz	1 s	20 dB

### ADDITIONAL DOCUMENTATION

#### Graphical presentation of

##### Full Spectrum

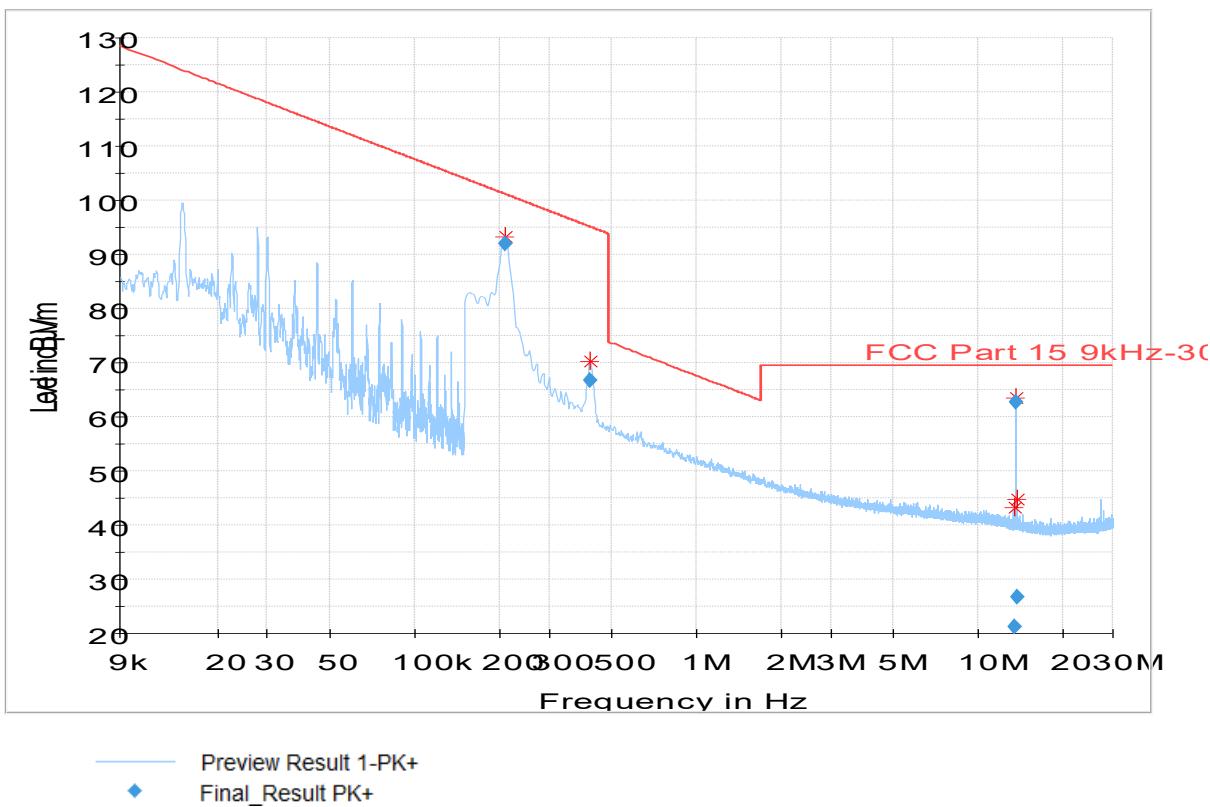

#### Measurement data of

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
13.454250	21.33	69.55	48.22	1000.0	9.000	100.0	V	180.0	32.9
13.668000	26.68	69.55	42.87	1000.0	9.000	100.0	V	180.0	32.9
13.562250	62.87	69.55	6.68	1000.0	9.000	100.0	V	90.0	32.9
0.417750	66.64	95.17	28.53	1000.0	9.000	100.0	V	0.0	53.7
0.208500	92.00	101.21	9.20	1000.0	9.000	100.0	V	180.0	59.7

Remarks:

Margin value = Measurement value – Limit value


## ADDITIONAL DOCUMENTATION

RANGE 30-1000 MHz					
Test parameter of					
Hardware Setup:	Emissione irradiata 30-1000MHz HL562E 3metri				
Measurement Type:	Open-Area-Test-Site (SAC/FAR)				
Frequency Range:	30 MHz - 1 GHz				
Graphics Level Range:	0 dB $\mu$ V/m - 80 dB $\mu$ V/m				
Preview Measurements:					
Antenna height:	100 - 400 cm , Step Size = 100 cm , Positioning Speed = 4				
Polarization:	H + V				
Turntable position:	0 - 270 deg , Step Size = 90 deg , Positioning Speed = 4				
Scan Test Template:	Emissione irradiata 30-1000MHz HL562E 3metri				
Adjustment:					
Antenna height:	Range = 50 cm , Measuring Speed = 3				
Turntable position:	Range = 20 deg , Measuring Speed = 3				
Template for Single Meas.:	Emissione irradiata 30-1000MHz HL562E 3metri				
Final Measurements:					
Template for Single Meas.:	Emissione irradiata 30-1000MHz HL562E 3metri - fin QP				
<b>Subrange</b>	<b>Step Size</b>	<b>Detectors</b>	<b>IF BW</b>	<b>Meas. Time</b>	<b>Preamp</b>
Receiver: [ESW 44] 30 MHz - 1 GHz	30 kHz	QPK	120 kHz	1 s	20 dB

## ADDITIONAL DOCUMENTATION

### Graphical presentation of

Full Spectrum

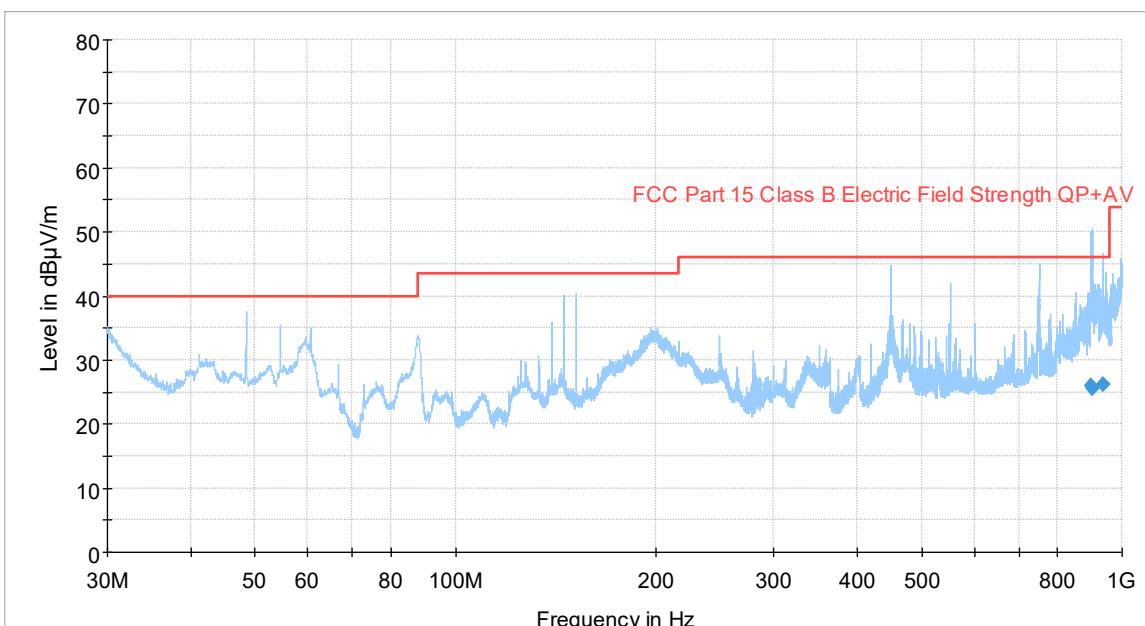

### Measurement data of

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
898.950000	26.04	46.00	19.96	1000.0	120.000	325.0	H	93.0	25.2
900.990000	25.50	46.00	20.50	1000.0	120.000	325.0	H	96.0	25.2
938.220000	26.07	46.00	19.93	1000.0	120.000	185.0	H	184.0	25.3

Remarks:

Margin value = Measurement value – Limit value

**ADDITIONAL DOCUMENTATION****Radiated emission test - Field strength inside of the 13,110-14,010 MHz band**

<b>Test date</b>	21/06/2022
<b>Applied Standard</b>	FCC part 15 C
<b>Paragraph</b>	§15.225(a); §15.225(b); §15.225(c)
<b>Temperature</b>	25° C
<b>Humidity</b>	40%
<b>Tested by</b>	Mattia Frescaroli
<b>Model</b>	Osmond R
<b>Internal Storage No.</b>	A003255761-003
<b>Operating mode</b>	1
<b>Tested terminals</b>	Enclosure
<b>Remarks</b>	In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is:Extrapolation (dB) = 40log (300meter / 3meter) = +80db Extrapolation (dB) = 40log (30meter / 3meter) = +40db

## ADDITIONAL DOCUMENTATION

### Extrapolation from the measurement of a single point

If field strength is measured at only a single point, then that point shall be at the radial from the EUT that produces the maximum emission at the frequency being measured, as described in 5.4. If that point is closer to the EUT than  $\lambda/2\pi$  and the limit distance is greater than  $\lambda/2\pi$ , the measurement shall be extrapolated to the limit distance by conservatively presuming that the field strength decreases at a 40 dB/decade of distance rate to the  $\lambda/2\pi$  distance, and at a 20 dB/decade of distance rate beyond  $\lambda/2\pi$ .

This shall be accomplished using **Equation (A)**:

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log\left(\frac{d_{\text{near field}}}{d_{\text{measure}}}\right) - 20 \log\left(\frac{d_{\text{limit}}}{d_{\text{near field}}}\right)$$

where

$FS_{\text{limit}}$  is the calculation of field strength at the limit distance, expressed in  $\text{dB}\mu\text{V/m}$

$FS_{\text{max}}$  is the measured field strength, expressed in  $\text{dB}\mu\text{V/m}$

$d_{\text{near field}}$  is the  $\lambda/2\pi$  distance

$d_{\text{measure}}$  is the distance of the measurement point from the EUT

$d_{\text{limit}}$  is the reference limit distance

If the single point measured is at a distance greater than  $\lambda/2\pi$ , then extrapolation to the limit distance shall be calculated using Equation (B):

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

If both the single point and the limit distance are equal to or closer to the EUT than  $\lambda/2\pi$ , then extrapolation to the limit distance shall be calculated using Equation (C):

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

where

$FS_{\text{limit}}$  is the calculation of field strength at the limit distance, expressed in  $\text{dB}\mu\text{V/m}$

$FS_{\text{max}}$  is the measured field strength, expressed in  $\text{dB}\mu\text{V/m}$


$d_{\text{near field}}$  is the  $\lambda/2\pi$  distance

$d_{\text{measure}}$  is the distance of the measurement point from the EUT

$d_{\text{limit}}$  is the reference distance or the distance of the  $\lambda/2\pi$  point

**ADDITIONAL DOCUMENTATION**


New limit (according to equation A)						
f (MHz)	Fs limit (uV/m)	Fs limit (dBuV/m)	d(near field) (m)	d(measure) (m)	d(limit) (m)	FS (max) (dBuV/m)
13,11	106	40,51	3,64	3	30	62,2
13,41	334	50,47	3,56	3	30	72,0
13,41	334	50,47	3,56	3	30	72,0
13,553	15848	84,00	3,52	3	30	105,4
13,567	15848	84,00	3,52	3	30	105,4
13,71	334	50,47	3,48	3	30	71,8
13,71	334	50,47	3,48	3	30	71,8
14,01	106	40,51	3,41	3	30	61,6

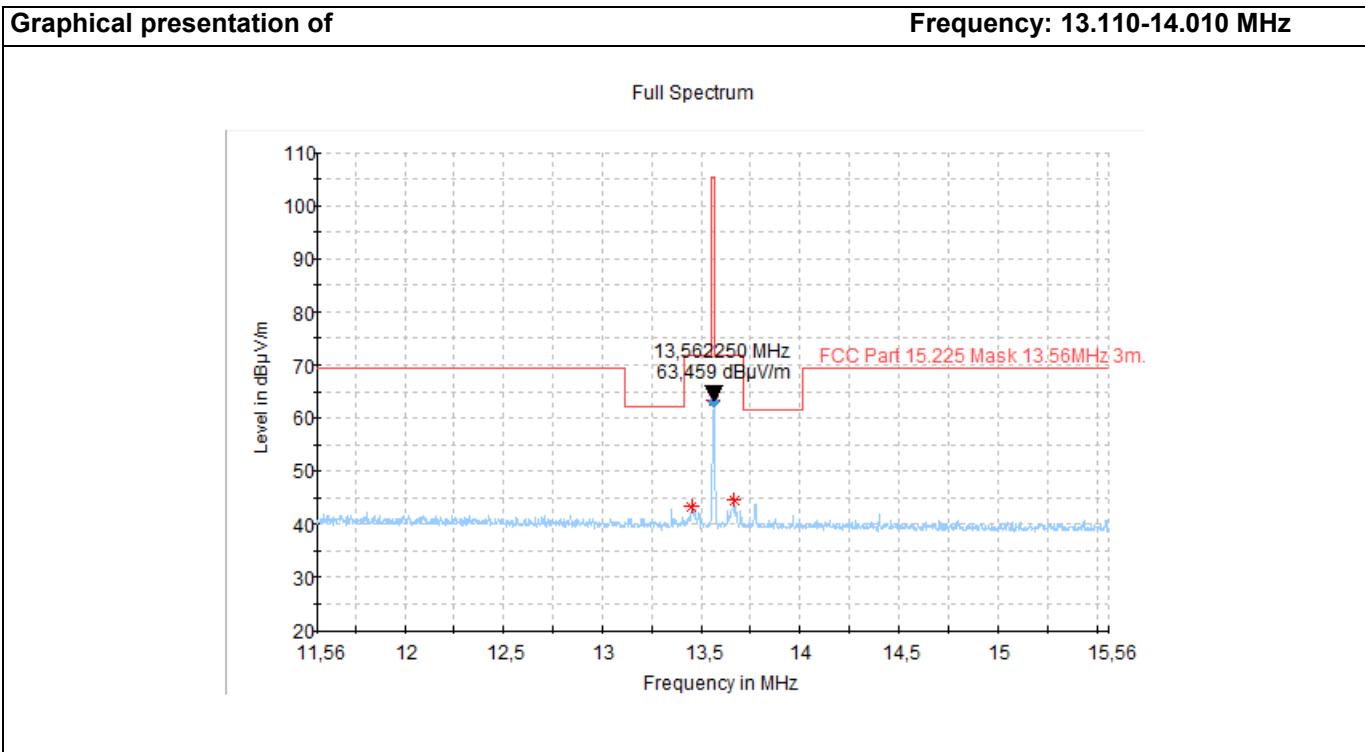**ADDITIONAL DOCUMENTATION**

**ADDITIONAL DOCUMENTATION****20dB Bandwidth**


<b>Test date</b>	22/06/2022
<b>Applied Standard</b>	FCC part 15 C
<b>Paragraph</b>	§15.215(c)
<b>Temperature</b>	25° C
<b>Humidity</b>	40%
<b>Tested by</b>	Mattia Frescaroli
<b>Model</b>	Osmond R
<b>Internal Storage No.</b>	A003255761-003
<b>Operating mode</b>	1
<b>Tested terminals</b>	Enclosure
<b>Remarks</b>	---

Note: Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

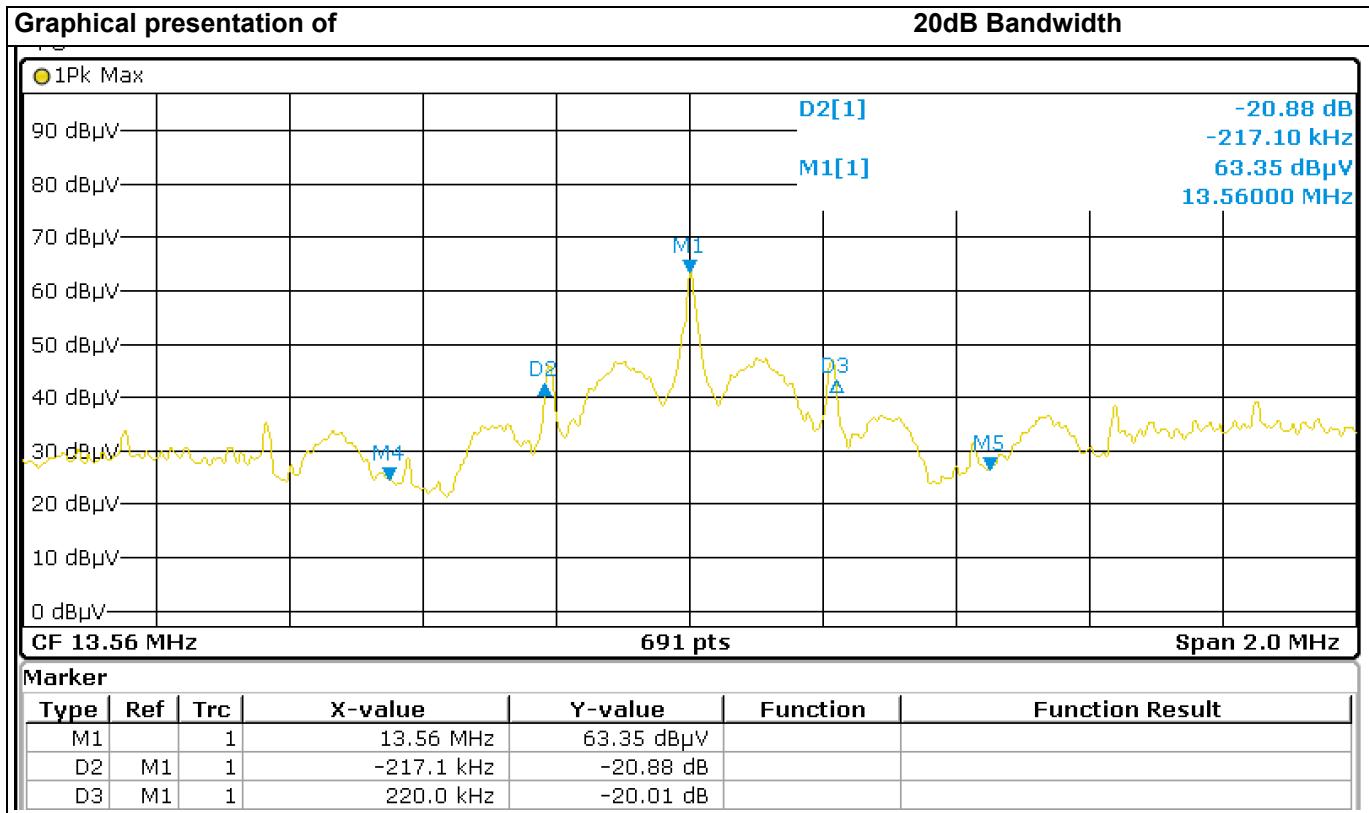**ADDITIONAL DOCUMENTATION**


Channel (No.)	Frequency (MHz)	Channel Bandwidth at -20dB (kHz)	Plot (No.)
1	13,56	220,0	1

Bandwidth at -20dB (Fmin and Fmax)			
Fmin	13,34 MHz	Fmax	13,78 MHz

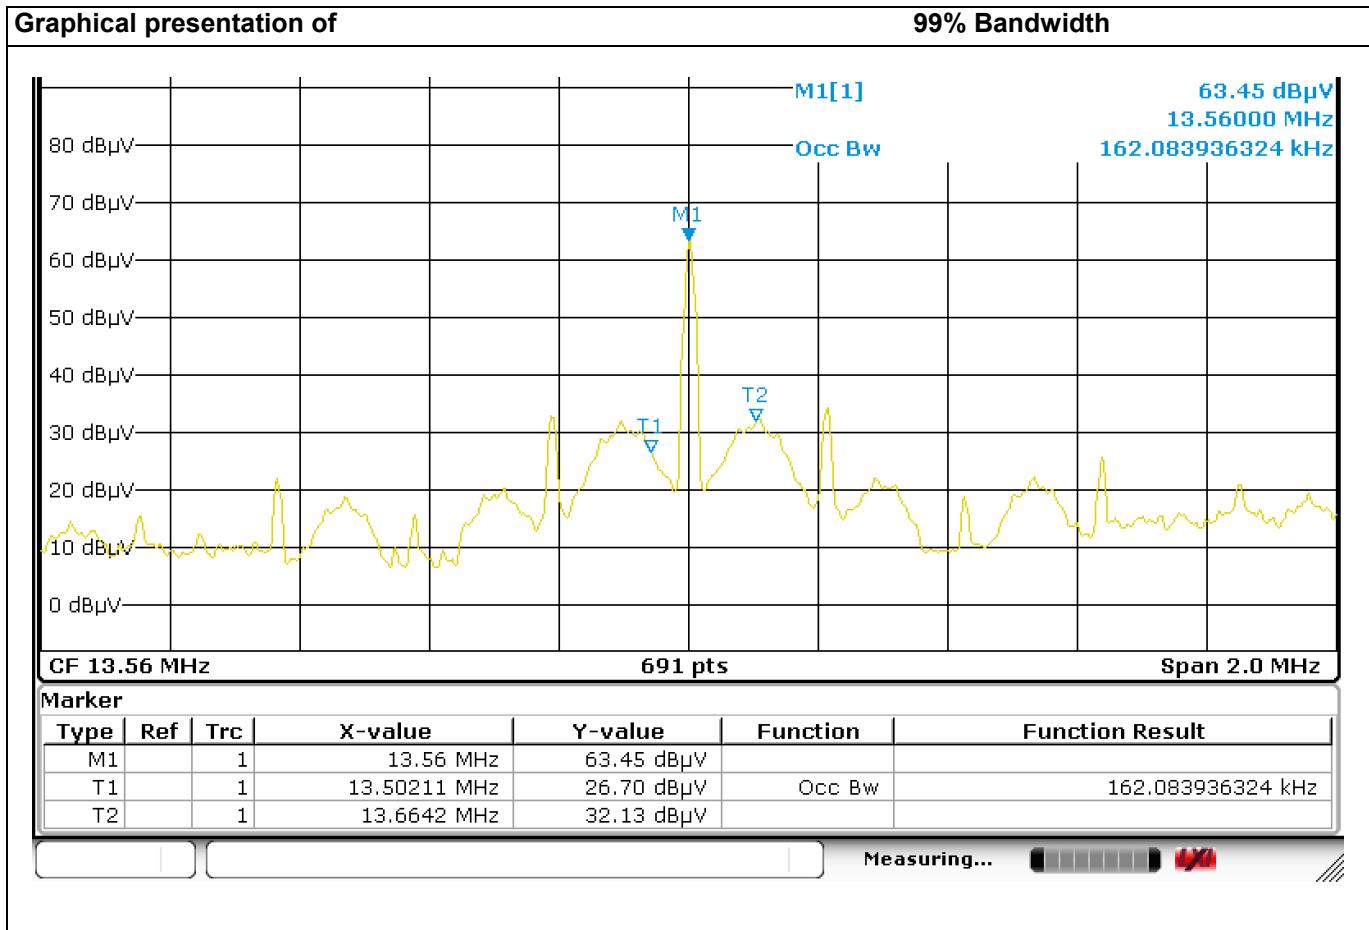**ADDITIONAL DOCUMENTATION**


Channel (No.)	Frequency (MHz)	Channel Bandwidth at 99% (kHz)	Plot (No.)
1	13,56	162,08	1

Bandwidth at 99% (Fmin and Fmax)			
Fmin	13,50 MHz	Fmax	13,66 MHz

**ADDITIONAL DOCUMENTATION****Frequency tolerance of the carrier signal**

<b>Test date</b>	22/06/2022
<b>Applied Standard</b>	FCC part 15 C
<b>Paragraph</b>	§15.225(e)
<b>Temperature</b>	25° C
<b>Humidity</b>	40%
<b>Tested by</b>	Mattia Frescaroli
<b>Model</b>	Osmond R
<b>Internal Storage No.</b>	A003255761-003
<b>Operating mode</b>	1
<b>Tested terminals</b>	Enclosure
<b>Remarks</b>	---

Note: the frequency tolerance of the carrier signal shall be maintained within +0.01% of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

**ADDITIONAL DOCUMENTATION**
**Frequency stability**

Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Frequency Delta (ppm)
25	230	13,559358	0
25	195,5	13,559358	0
25	264,5	13,559358	0

Temperature (°C)	Voltage (Vac)	Measured Frequency (MHz)	Frequency Delta (ppm)
-20	230	13,559358	0
-10	230	13,559358	0
0	230	13,559358	0
+10	230	13,559358	0
+20	230	13,559358	0
+30	230	13,559358	0
+40	230	13,559358	0
+50	230	13,559358	0

**ADDITIONAL DOCUMENTATION****Additional provisions to the general radiated emission limitations.**

<b>Test date</b>	18/11/2022
<b>Applied Standard</b>	FCC part 15 C
<b>Paragraph</b>	§15.215 (a) (b) (c)
<b>Temperature</b>	25° C
<b>Humidity</b>	40%
<b>Tested by</b>	Mattia Frescaroli
<b>Model</b>	Osmond R
<b>Internal Storage No.</b>	A003255761-003
<b>Operating mode</b>	1
<b>Tested terminals</b>	Enclosure
<b>Remarks</b>	---

**ADDITIONAL DOCUMENTATION**

(A) The regulations in §§ 15.217-15.257 provide alternatives to the general radiated emission limits for intentional radiators operating in specified frequency bands. Unless otherwise stated, there are no restrictions as to the types of operation permitted under these sections.	
(B) In most cases, unwanted emissions outside of the frequency bands shown in these alternative provisions must be attenuated to the emission limits shown in Section 15.209. In no case shall the level of the unwanted emissions from an intentional radiator operating under these additional provisions exceed the field strength of the fundamental emission.	VERDICT PASS
(C) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least	VERDICT PASS

## ADDITIONAL DOCUMENTATION

### 17. Photographic documentation: EUT Test setup

See the Annex below:

DE2297LO 001 Annex 1

Photographic documentation

**ADDITIONAL DOCUMENTATION**
**18. List of test equipment**

Equipment	Type	Inventory no.	Manufacturer	Calibration due date
<b>Test stand: Radiated emission test - Field strength outside of the 13,110-14,010 MHz band</b>				
Semi-Anechoic Chamber	FACT3	2782378	ETS Lindgren	05/2024
BiConiLog Antenna	3142-E	2782348	ETS Lindgren	05/2023
Loop Antenna	6512	2782356	EMCO	07/2023
EMI Receiver	ESW44	2782867	Rohde&Schwarz	08/2023
EMI Receiver	ESU40	2782345	Rohde&Schwarz	11/2022
Software EMC32	11.40.00	---	Rohde&Schwarz	---

Equipment	Type	Inventory no.	Manufacturer	Calibration due date
<b>Test stand: 20dB Bandwidth</b>				
Semi-Anechoic Chamber	FACT3	2782378	ETS Lindgren	05/2024
BiConiLog Antenna	3142-E	2782348	ETS Lindgren	05/2023
Loop Antenna	6512	2782356	EMCO	07/2023
EMI Receiver	ESW44	2782867	Rohde&Schwarz	08/2023
EMI Receiver	ESU40	2782345	Rohde&Schwarz	11/2022
Software EMC32	11.40.00	---	Rohde&Schwarz	---

<b>Test stand: Frequency tolerance of the carrier signal</b>				
Climatic Chamber	CTS C-40/350	2789468	CTS	03/2023
Loop Antenna	6512	2782356	EMCO	07/2023
EMI Receiver	ESR3	2782768	Rohde&Schwarz	03/2023
Three-Phases Power Supply	TPS T 30K60S	2782385	Elettrotest	10/2024

**ADDITIONAL DOCUMENTATION****Test stand: Conducted emission**

Semi-Anechoic Chamber	FACT3	2782378	ETS Lindgren	05/2024
EMI Receiver	ESW44	9019591	Rohde&Schwarz	08/2023
Software EMC32	11.40.00	---	Rohde&Schwarz	---
Single-phase LISN 16A	ENV216	2782895	Rohde&Schwarz	06/2023

**Environmental condition**

Equipment	Type	Inventory no.	Manufacturer	Calibration due date
Ambient Temperature Humidity Sensor SAC1	6152C	2782344	Davis Instruments	06/2024
Ambient Temperature Humidity Sensor ESD laboratory	T3511	2781962	Comet system	06/2024
Barometer	P3267S07801 + E1999X	2782560	TECSIS	02/2023
Climatic Chamber	C-40/350	2789461	CTS	03/2023

---END OF TEST REPORT---