

TEST REPORT
47 CFR FCC Part 15 subpart C Par. 15.225
Intentional Radiators

Applicant: A.R. Hungary, Inc. Alkotas utca 41. Budapest 1123, HUNGARY			
Test item: Passport Reader and ID scanner			
Identification / Type No.:	Osmond N		
FCC ID:	XCW-OSMOND-R		
Order content: Full testing according to the following standard(s):			
Test specification: FCC Part 15, Subpart C (par. 15.225)			
Date of receipt:	05/05/2022		
Internal storage No.: A003255761-008			
Testing period: 27/02/2023 & 09/06/2023			
Place of testing:	TÜV Rheinland Italia S.r.l. Via E. Mattei, 3 20005 Pogliano Milanese (MI) - IT		
Testing laboratory:	TÜV Rheinland Italia S.r.l. Via E. Mattei, 3 20005 Pogliano Milanese (MI) - IT		
Test result:	Pass		
Tested by:	Roberto Radice <i>Roberto Radice</i>	Authorized by:	Luca Colombo <i>Luca Colombo</i>
Date:	19/01/2024	Date:	19/01/2024
Position	(Laboratory technician)	Position	(Reviewer)
Condition of the test item at delivery:		Test item complete and undamaged	
<p>The test results reported in this test report shall refer only to the samples tested as received. TÜV Rheinland Italia is not responsible for the sampling phase.</p> <p>This report may not be partially reproduced, except with the prior written permission of the issuing Laboratory TÜV Rheinland refuses any responsibility about information supplied by the customer contained in this test report (#) Test sample(s), as well sample information, description, product details and intended usage was provided by customer.</p>			

Product description

1	<p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.</i></p> <p><i>Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p>
2	<p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</i></p>
3	<p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i></p> <p><i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p>
4	<p><i>Unless otherwise agreed with the customer, a conformity assessment is always carried out based on the applied standards.</i></p> <p><i>At the customer's request, the statement on the conformity of the product tested in this test report is carried out according to the criteria/requirements of the applied standards.</i></p> <p><i>Evaluation conditions deviating from these are documented separately in the respective chapters.</i></p>

Product description

0. Table of Contents

0.	Table of Contents	3
1.	General description of test item(s)	4
2.	Test method	5
3.	Reference standards	9
4.	Equipment used during test	10
5.	Input/Output ports	11
6.	Radio type identification	12
7.	Operating modes	13
8.	Climatic conditions	13
9.	Modification during tests	14
10.	Statement of the measurement uncertainty	15
11.	Example for interpretation of measuring results	15
12.	Measurement uncertainty	16
13.	EUT configuration	17
14.	Change history	18
15.	Result summary section	19
16.	Emission Test	20
17.	List of test equipment	49

Product description

1. General description of test item(s)

Identification / Type No.:	Passport Reader and ID scanner Osmond N
Serial number	1215319
Manufacturer	A.R. Hungary, Inc. Alkotas utca 41. Budapest 1123, HUNGARY
Trade Mark	ADAPTIVE RECOGNITION
Rated voltage / frequency	100-240 V AC, 50/60 Hz via universal external power supply
Rated current / power	Input Max 1.5 A
Equipment type	Intentional radiator installed in a host equipment
Number of phases	1ph.
Hardware version (#)	ASM-1054.19
Software version (#)	PR 2.1.10.3
Dimensions	178 x 203 x 157 mm
Weight	2.25 kg
Temperature Range	5 °C to 40 °C
Test sample obtaining:	<input checked="" type="checkbox"/> Sampling by customer <input type="checkbox"/> Sampling by TÜV Rheinland Group <input type="checkbox"/> others:

2. Test method**§15.225 Operation within the band 13.110 – 14.010 MHz**

- (a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.
- (e) The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.
- (f) In the case of radio frequency powered tags designed to operate with a device authorized under this section, the tag may be approved with the device or be considered as a separate device subject to its own authorization. Powered tags approved with a device under a single application shall be labeled with the same identification number as the device

§15.207 Conducted limits.

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

<i>Frequency of Emission (MHz)</i>	<i>Conducted Limit (dBμV)</i>	
	<i>Quasi-peak</i>	<i>Average</i>
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

(b) The shown limit in paragraph (a) of this Section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

- (1) For carrier current systems containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.
- (2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.
- (3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in Section 15.205 and Section 15.209, 15.221, 15.223, 15.225 or 15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

§15.209 Radiated emission limits, general requirements.

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement Distance (meter)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other Sections within this Part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

(e) The provisions in Sections 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this Part.

(f) In accordance with Section 15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in Section 15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in Section 15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in Section 15.109 that are applicable to the incorporated digital device.

(g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

§ 15.33 Frequency range of radiated measurements.

(a) Unless otherwise noted in the specific rule section under which the equipment operates for an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

3. Reference standards

Reference document		
47 CFR Part 15	Last edition	Radio Frequency Device
ANSI C63.4	2014	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices
996369 D04 Module Integration Guide	v02 October 13, 2020	Modular transmitter integration guide; guidance for host product manufacturers.

Note: The following referenced documents are indispensable for the application of this document.

For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

4. Equipment used during test

Equipment under test				
No.	Product type	Manufacturer	Model	Comments
1	Passport Reader and ID scanner	A.R. Hungary, Inc.	Osmond N	—
2	—	—	—	—
Auxiliary Equipment / Peripherals				
No.	Product type	Manufacturer	Model	Comments
1	Personal computer	Lenovo	—	Ethernet traffic with equipment under test
2	—	—	—	—
3	—	—	—	—

5. Input/Output ports

Nr.	Name	Type	Cable length	Cable shielded	Comments
1	Enclosure port	Conductive surface	—	—	Closed by screws
2	AC power port	Mains Input	<3m.	No	Via switching adapter JG mod. ZTU1588-400050-3T input 100-240V 50-60Hz output + 5v dc 4.0Ampere
3	DC power port	Port not present			
4	Signal/control port	USB Port	<3m.	Yes	—
5	Wired Network port	Lan Port	>3m.	No	—

6. Radio type identification	
Brand name and model of radio module	highly integrated NFC Initiator / HF Reader IC, AMS mod. AS3911-BQFT
Antenna model and Gain	LC antenna
Antenna type	<input type="checkbox"/> External antenna <input type="checkbox"/> Dedicated antenna <input checked="" type="checkbox"/> Integral antenna
Type of equipment	<input type="checkbox"/> stand-alone equipment <input checked="" type="checkbox"/> combined equipment <input type="checkbox"/> multi-radio equipment
Type of modulation	OOK
Nominal voltage of stand-alone or combined equipment	voltage range from 2.4 Vdc to 5.5 Vdc
Operatig frequency	13.56MHz
Number of channels	1
Transmit operating mode	<input checked="" type="checkbox"/> single antenna <input type="checkbox"/> multiple antennas
Temperature range	-40°C to 125°C

7. Operating modes
No. Description

1 Continuous scanning mode with test passport; ethernet cable connected to PC (auxiliary equipment) in continuous traffic mode.

8. Climatic conditions

Ambient Temperature 10 - 40 °C

Relative Humidity 10 - 90 %

Air pressure Not specified

According to ANSI C63.4

Ambient Temperature Humidity Sensor (used to control climatic conditions)	Type: 6152C (ID: 2782344; manufacturer: Davis Instruments) <ul style="list-style-type: none"> Semi-Anechoic Chamber FACT 3 	Calibration due date 06/2024
	Type: T3511 (ID: 2782075; manufacturer: Comet system) <ul style="list-style-type: none"> Semi-Anechoic Chamber SAC 5 	Calibration due date 06/2024
	Type: T3511 (ID: 2782070; manufacturer: Comet system) <ul style="list-style-type: none"> Transitory phenomena area 	Calibration due date 06/2024
	Type: T3511 (ID: 2781962; manufacturer: Comet system) <ul style="list-style-type: none"> ESD room 	Calibration due date 06/2024
Barometer (used to control climatic conditions)	Type P3267S07801 + E1999X (ID: 2782560; manufacturer: Tecsis)	Calibration due date 03/2025

9. Modification during tests		
<input checked="" type="checkbox"/>	No modifications done during testing	
<input type="checkbox"/>	Modifications done during testing (see details below)	
No.	Description of modification	Date of modification
1		
2		
3		

Supplementary information: --


10. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the quality system acc. to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

The manufacturer has the sole responsibility of continued compliance of the device.

11. Example for interpretation of measuring results

The decision rule for statements of conformity in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance to and ILAC-G8:09/2019 and IEC Guide 115:2023, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report."

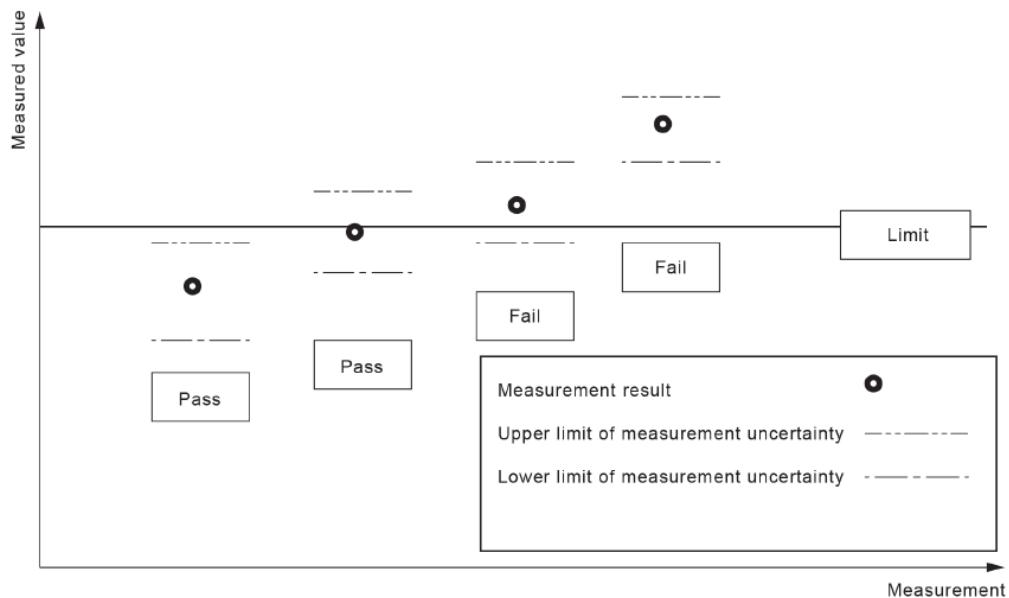

Decision Rule

Statements of conformity (PASS or FAIL) to specifications are made in this report without taking measurement uncertainty into account.

Where statements of conformity are made in this report, the following decision rules are applied:

Test result complies with test specification.

P = passed

Test result does not comply with test specification.

F = failed

Requirement not applicable

N/A = not applicable

Requirement not tested

N/T = not tested

12. Measurement uncertainty

Test Method	Uncertainty (95%)	Coverage factor k
RF Conducted continuous emissions - range (9 kHz – 30 MHz)	3.3 dB	2.0
RF Radiated emissions – range (30 – 1000) MHz	4.9 dB	2.0
Occupied Bandwidth	514.4×10^{-9}	2.0
Measurement of Normalised Site Attenuation and VSWR	6.0 dB	2.0

13. EUT configuration

The test setup was made in accordance with mentioned FF standards.

Measurements and tests were executed under "worst case" conditions. Typical EUT arrangements or operating modes were chosen or assumed which let suspect maximum emission or susceptibility (a so called "unfavourable configuration").

Details of test setup or adjustments are (particularly) shown inside the photo documentation.
As far as not mentioned otherwise these statements are valid for all following tests.

REVISION HISTORY

14. Change history

Test report number	List of revisions	Date
IT23SWZZ 001	First edition	19/01/2024

ADDITIONAL DOCUMENTATION

15. Result summary section

Clause	Requirement – Test case	Result
§ 15.203	Antenna Requirements	P
§ 15.207 (a)	Conducted emission test	P
§ 15.215 (a) (b) (c)	Additional provisions to the general radiated emission limitations	P
§ 15.215 (c)	20 dB Bandwidth	P
§ 15.225 (a)	Field strength in band 13,553-13,567MHz	P
§ 15.225 (b)	Field strength in band 13,410-13,553 MHz and 13,567-13,710 MHz	P
§ 15.225 (c)	Field strength in band 13,110-13,410 MHz and 13,710-14,010 MHz	P
§ 15.225 (d) § 15.209 (a) (f)	Field strength outside of the 13,110-14,010 MHz band	P
§ 15.225 (e)	Frequency tolerance of the carrier signal	P
§ 15.225 (f)	Radio frequency powered tags	N/A ¹
N.A.1: No powered tag.		

ADDITIONAL DOCUMENTATION**16. Emission Test****Antenna requirement**

Test date	27/02/2023
Applied Standard	FCC part 15 C
Paragraph	§15.203
Temperature	21.5° C
Humidity	46%
Tested by	Roberto Radice
Model	Osmond N
Internal Storage No.	A003255761-009
Remarks	None

ADDITIONAL DOCUMENTATION

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

Antenna specifications

N° of authorized antenna types	1
Antenna type	LC antenna on PCB
Maximum total gain	< 6dBi
External power amplifiers	Not present

ADDITIONAL DOCUMENTATION**Conducted emission test**

Test date	27/02/2023 & 09/06/2023
Applied Standard	FCC part 15 C
Paragraph	§15.207
Test method	§ 7 of ANSI C63-4
Temperature	21.5° C
Humidity	46%
Voltage/Frequency used during the test	110Vac / 60Hz
Tested by	Roberto Radice
Model	Osmond N
Internal Storage No.	A003255761-008
Operating mode	1
Tested terminals	AC Mains input
Remarks	Equipment tested before with normal antenna and after closed on 50ohm resistor load.

ADDITIONAL DOCUMENTATION**Test parameter of****EMI Auto Test Template: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz**

Hardware Setup: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz

Measurement Type: 2 Line LISN

Frequency Range: 150 kHz - 30 MHz

Graphics Level Range: 0 dB μ V - 80 dB μ V

Preview Measurements:

LISN Lines: N & L

Scan Test Template: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
-----------------	------------------	------------------	--------------	-------------------	---------------

Receiver: [ESW 44]

150 kHz - 30 MHz

2.25 kHz

PK+ ; AVG

9 kHz

0,2 s

0 dB

Final Measurements:

Template for Single Meas.: Voltage with 2-Line-LISN R&S ENV216 150kHz-30MHz fin

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
-----------------	------------------	------------------	--------------	-------------------	---------------

Receiver: [ESW 44]

150 kHz - 30 MHz


2.25 kHz

QPK ; AVG

9 kHz

5 s

0 dB

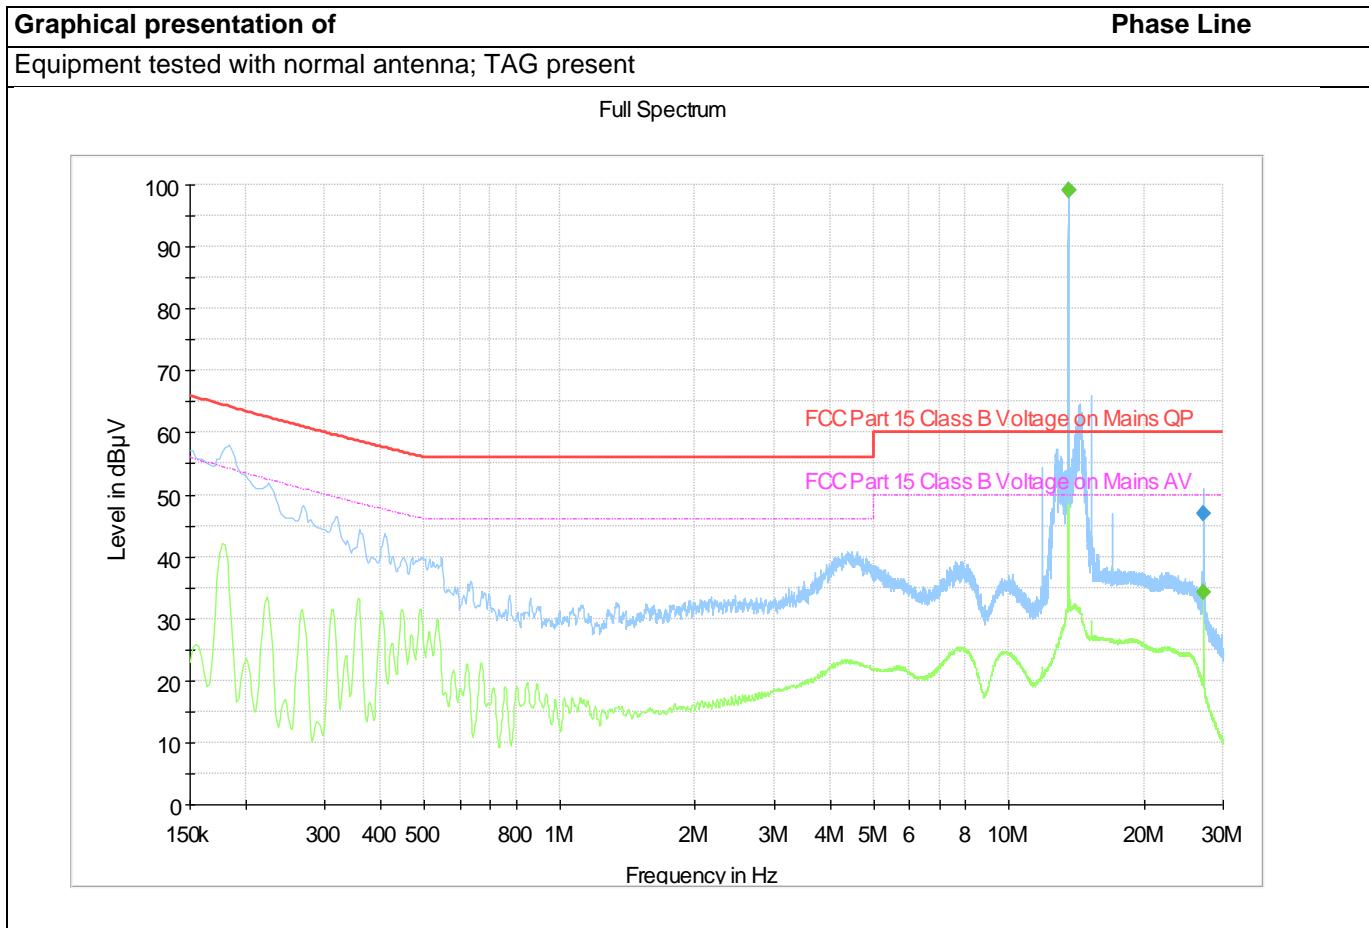
ADDITIONAL DOCUMENTATION


Measurement data of									
Final Result									
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	
13.562250	---	98.98	50.00	-48.98	5000.0	9.000	N	10.2	
13.562250	99.19	---	60.00	-39.19	5000.0	9.000	N	10.2	
27.123000	---	34.16	50.00	15.84	5000.0	9.000	N	10.5	
27.123000	46.91	---	60.00	13.09	5000.0	9.000	N	10.5	

Remarks:

Margin value = Measurement value – Limit value


ADDITIONAL DOCUMENTATION

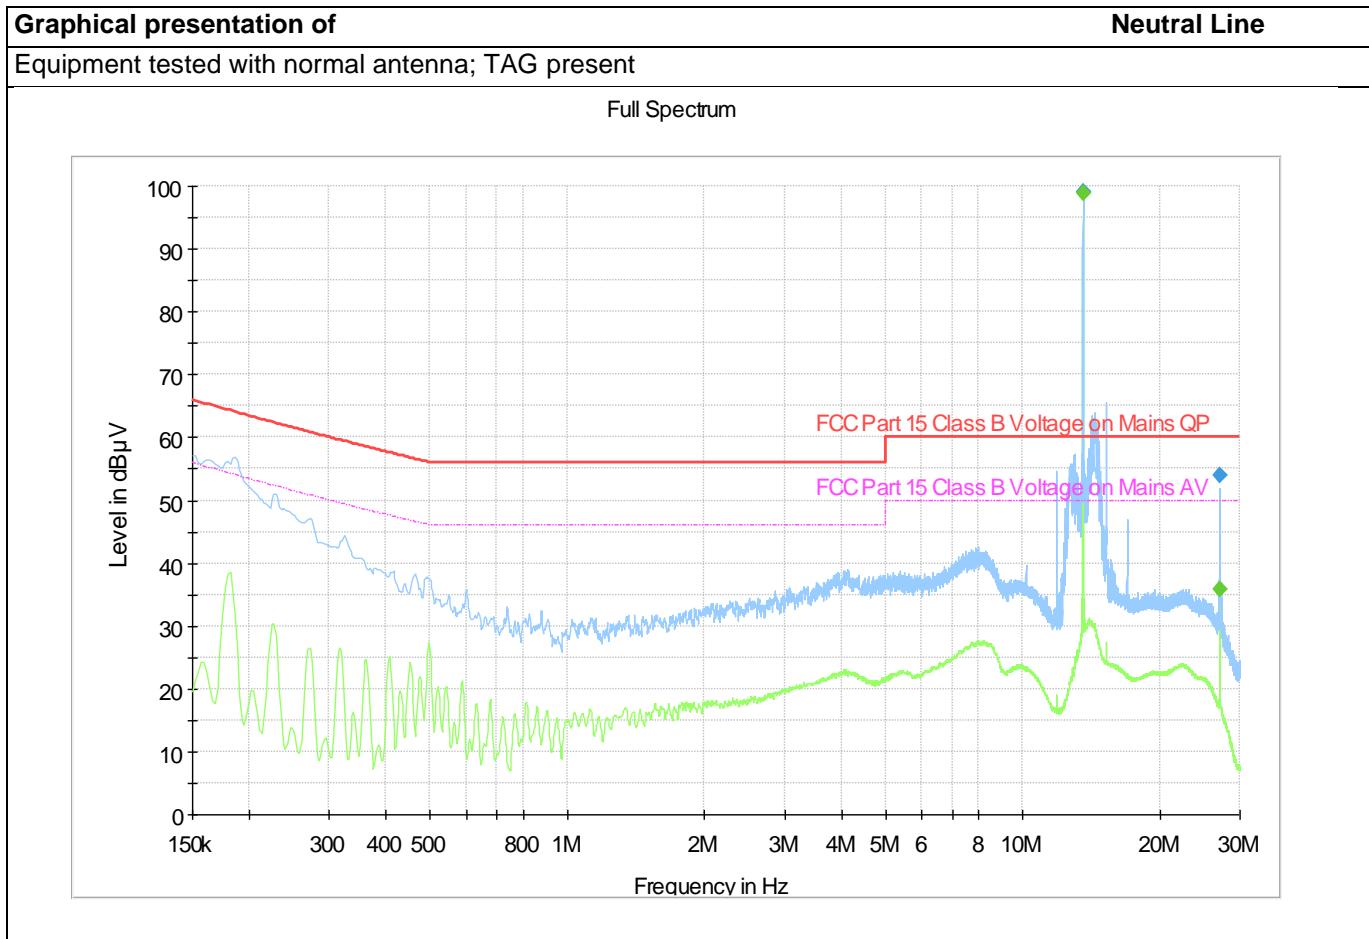

Measurement data of									
Final_Result									
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	
13.562250	---	98.83	50.00	-48.83	5000.0	9.000	L1	10.1	
13.562250	99.02	---	60.00	-39.02	5000.0	9.000	L1	10.1	
27.123000	---	35.74	50.00	14.26	5000.0	9.000	L1	10.3	
27.123000	53.86	---	60.00	6.14	5000.0	9.000	L1	10.3	

Remarks:


Margin value = Measurement value – Limit value

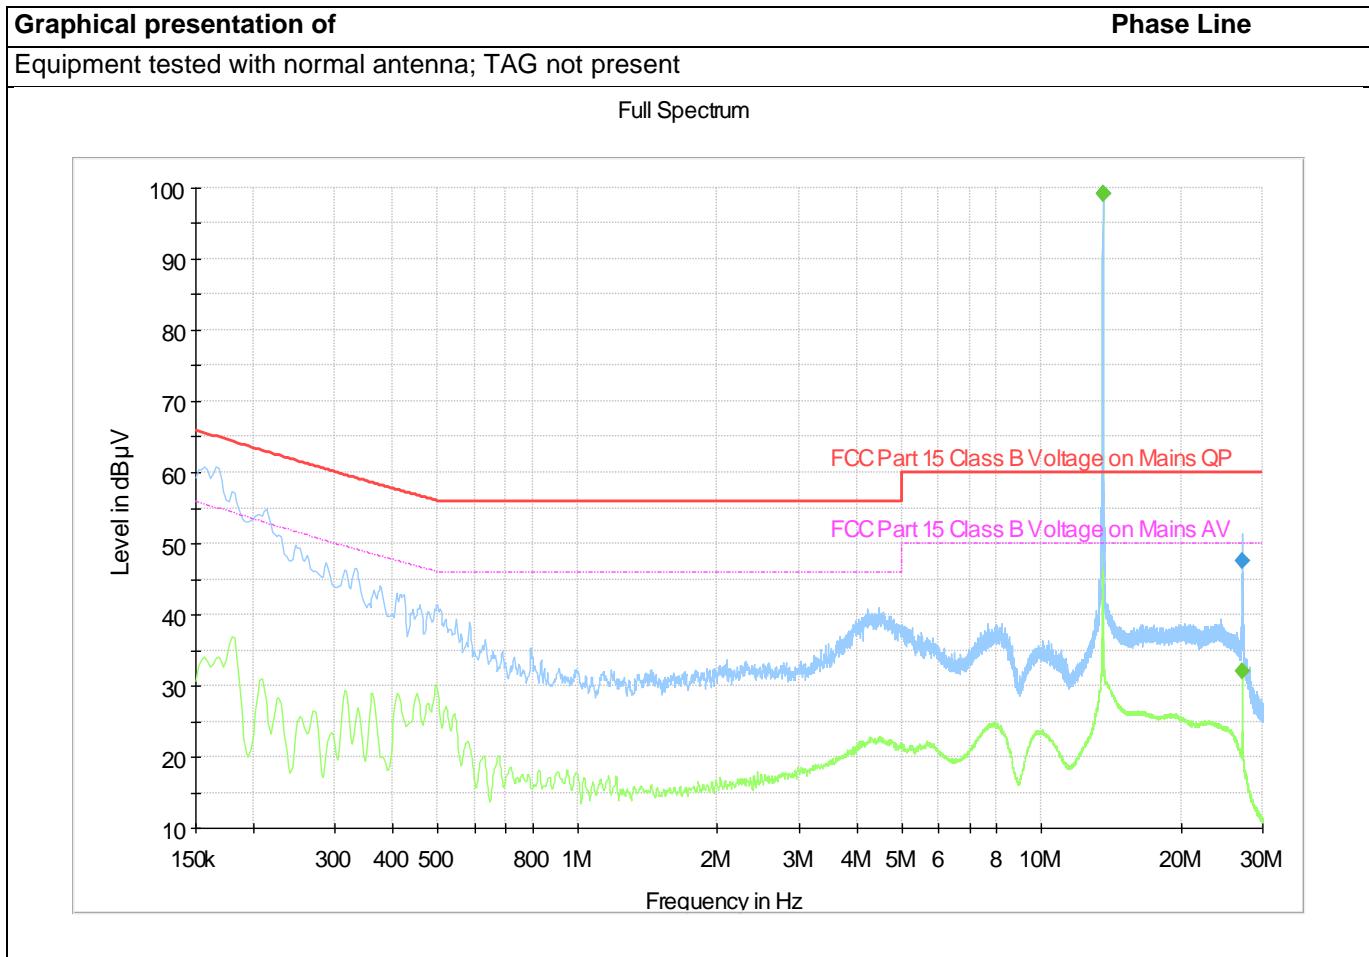ADDITIONAL DOCUMENTATION


Measurement data of									
Final Result									
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	
13.562250	---	99.09	50.00	-49.09	5000.0	9.000	L1	10.1	
13.562250	99.27	---	60.00	-39.27	5000.0	9.000	L1	10.1	
27.123000	---	32.03	50.00	17.97	5000.0	9.000	L1	10.3	
27.123000	47.49	---	60.00	12.51	5000.0	9.000	L1	10.3	

Remarks:

Margin value = Measurement value – Limit value

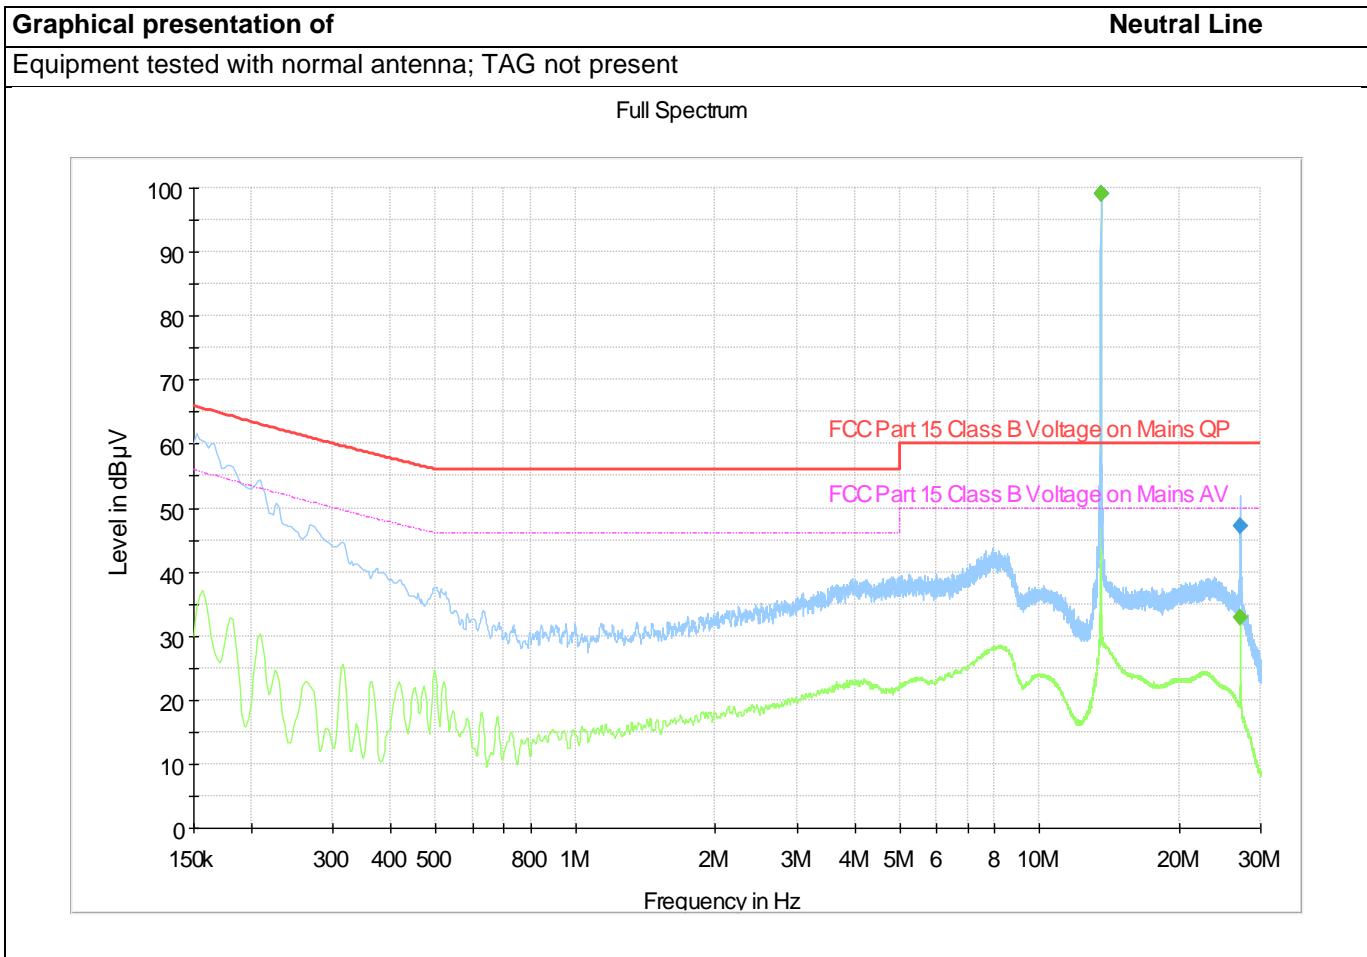
ADDITIONAL DOCUMENTATION


Measurement data of									
Final Result									
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	
13.562250	---	99.04	50.00	-49.04	5000.0	9.000	N	10.2	
13.562250	99.20	---	60.00	-39.20	5000.0	9.000	N	10.2	
27.123000	---	32.81	50.00	17.19	5000.0	9.000	N	10.5	
27.123000	47.22	---	60.00	12.78	5000.0	9.000	N	10.5	

Remarks:

Margin value = Measurement value – Limit value

ADDITIONAL DOCUMENTATION

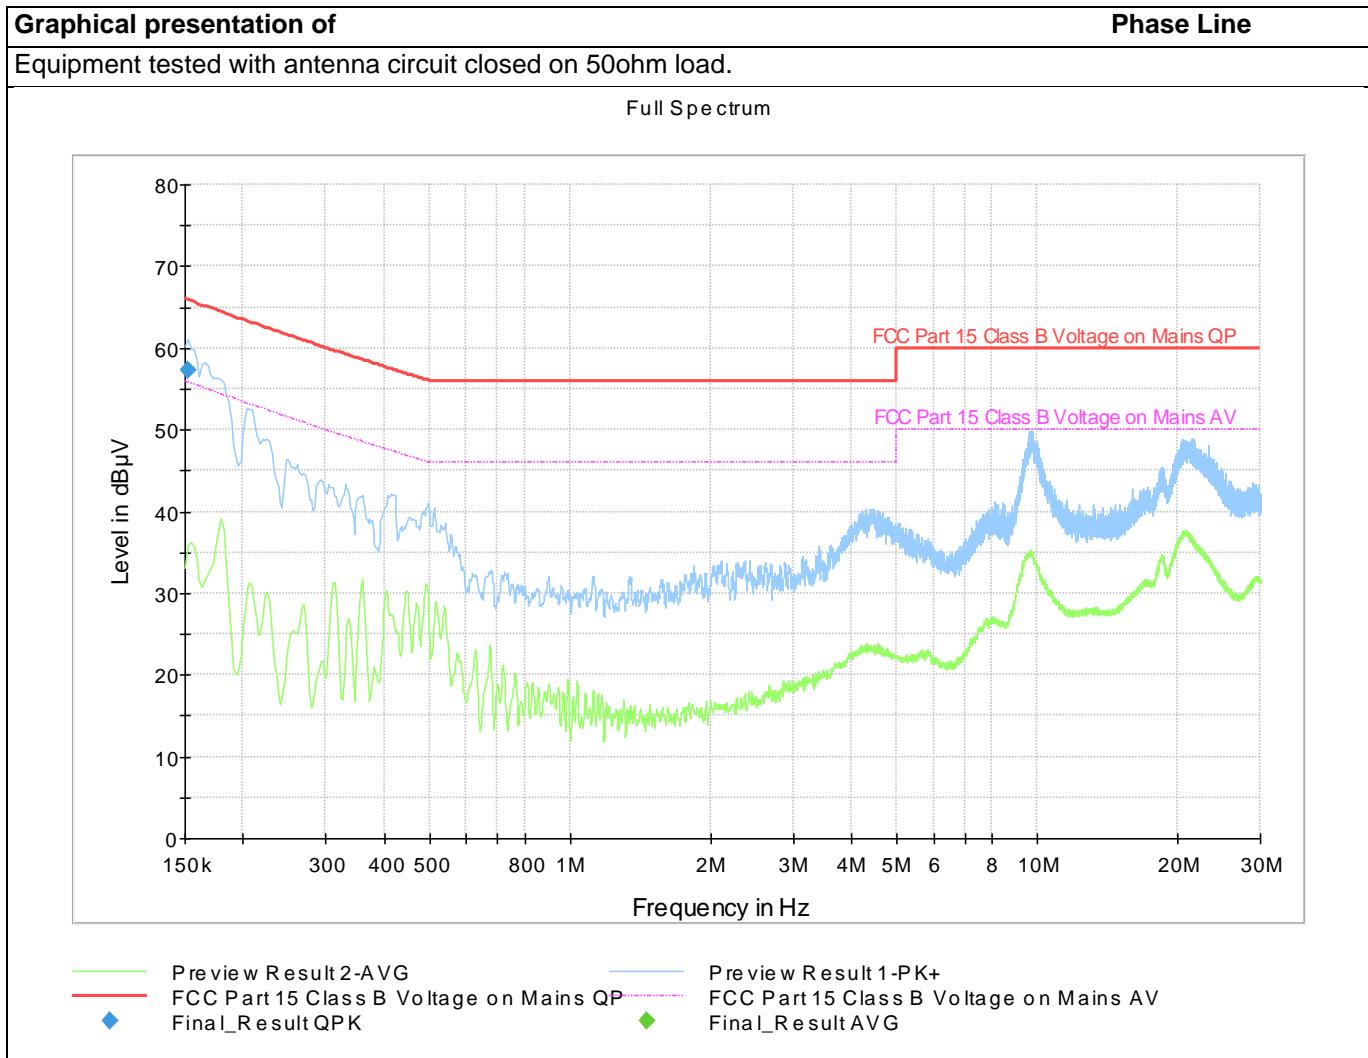


Measurement data of									
Final_Result									
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	
0.152250	57.37	---	65.87	8.49	1000.0	9.000	L1	9.8	

Remarks:

Margin value = Measurement value – Limit value

ADDITIONAL DOCUMENTATION

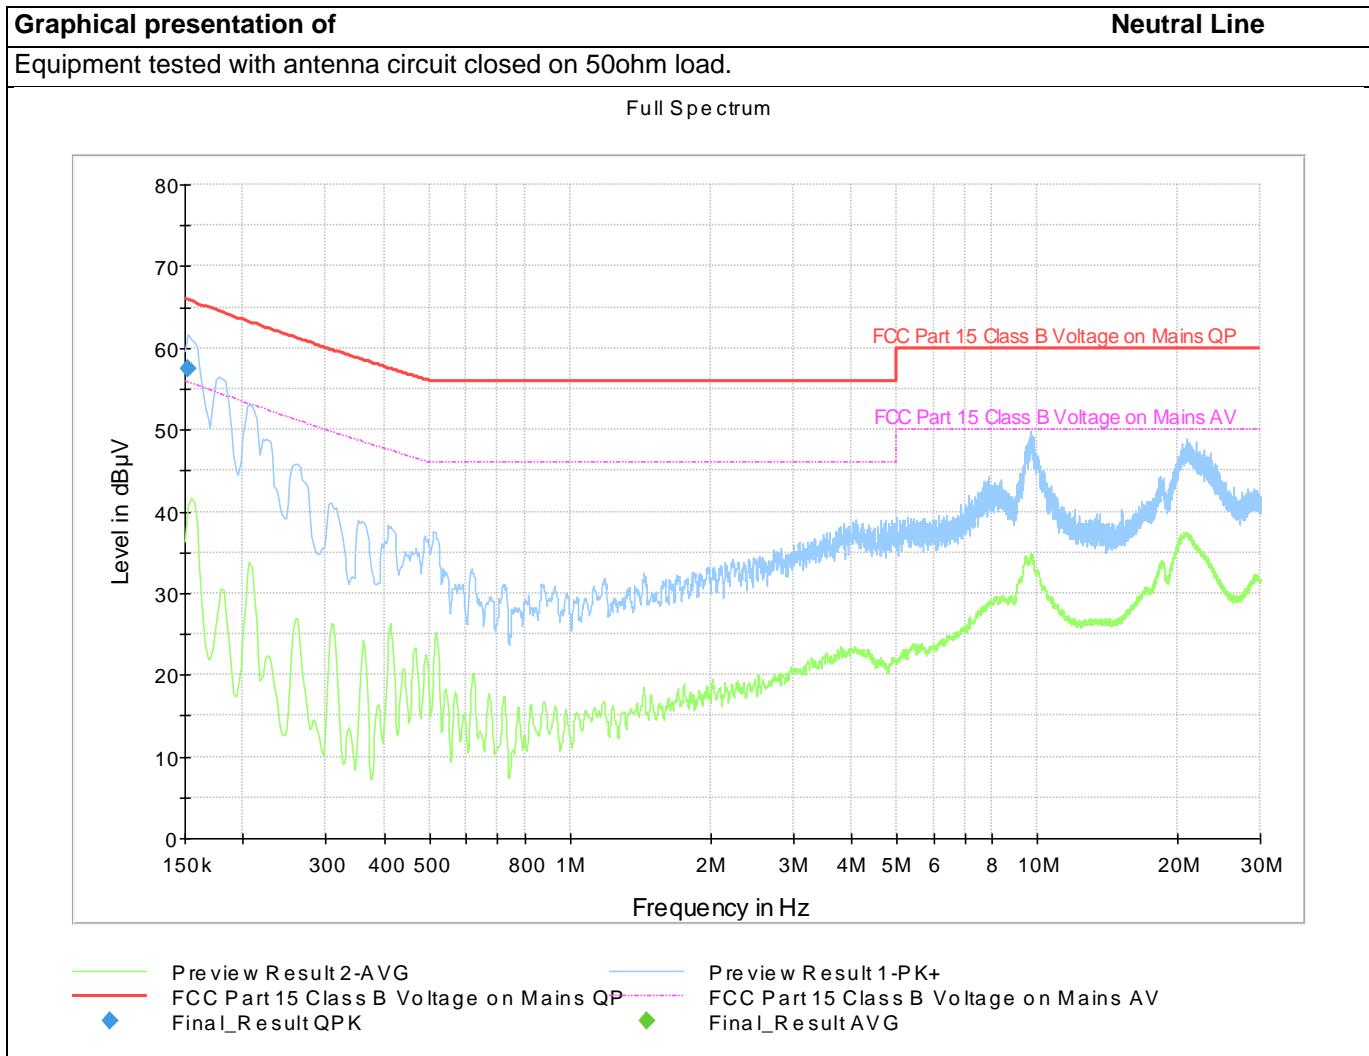

Measurement data of									
Final_Result									
Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	
0.152250	57.52	---	65.87	8.34	1000.0	9.000	N	9.8	

Remarks:

Margin value = Measurement value – Limit value

ADDITIONAL DOCUMENTATION**Radiated emission test - Field strength outside of the 13,110-14,010 MHz band**

Test date	27/02/2023
Applied Standard	FCC part 15 C
Paragraph	§15.205; §15.209; §15.225
Test method	§ 8 of ANSI C63-4
Temperature	21.5° C
Humidity	46%
Voltage/Frequency used during the test	110Vac / 60Hz
Tested by	Roberto Radice
Model	Osmond N
Internal Storage No.	A003255761-008
Operating mode	1
Tested terminals	Enclosure
Further information to test setup	For frequencies above 1GHz, the anechoic material is also placed on the metallic floor between EUT and Antenna
Remarks	In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is: Extrapolation (dB) = 40log (300meter / 3meter) = +80db Extrapolation (dB) = 40log (30meter / 3meter) = +40db

ADDITIONAL DOCUMENTATION**RANGE 9kHz-30MHz****Test parameter of****EMI Auto Test Template: Electric Field Strength with Scans 9kHz-30MHz active loop**

Hardware Setup: Electric Field Strength 9kHz-30MHz - HFH2-Z2E
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 9 kHz - 30 MHz
Graphics Level Range: -20 dB μ V/m - 90 dB μ V/m

Preview Measurements:

Antenna height: 100 - 400 cm , Step Size = 50 cm , Positioning Speed = 2
Polarization: H
Turntable position: 0 - 330 deg , Step Size = 30 deg , Positioning Speed = 3
Scan Test Template: Electric Field Strength 9kHz-30MHz active Antenna Loop

Adjustment:

Antenna height: Range = 25 cm , Measuring Speed = 2
Turntable position: Range = 30 deg , Measuring Speed = 3
Template for Single Meas.: Electric Field Strength 9kHz-30MHz active Antenna Loop

Final Measurements:


Template for Single Meas.: Electric Field Strength 9kHz-30MHz active Antenna Loop fin QP

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESW 44]					
9 kHz - 150 kHz	50 Hz	QPK ; AVG	200 Hz	2 s	0 dB
150 kHz - 30 MHz	2.25 kHz	QPK ; AVG	9 kHz	5 s	0 dB

ADDITIONAL DOCUMENTATION

Graphical presentation of

Equipment tested with normal antenna; TAG present

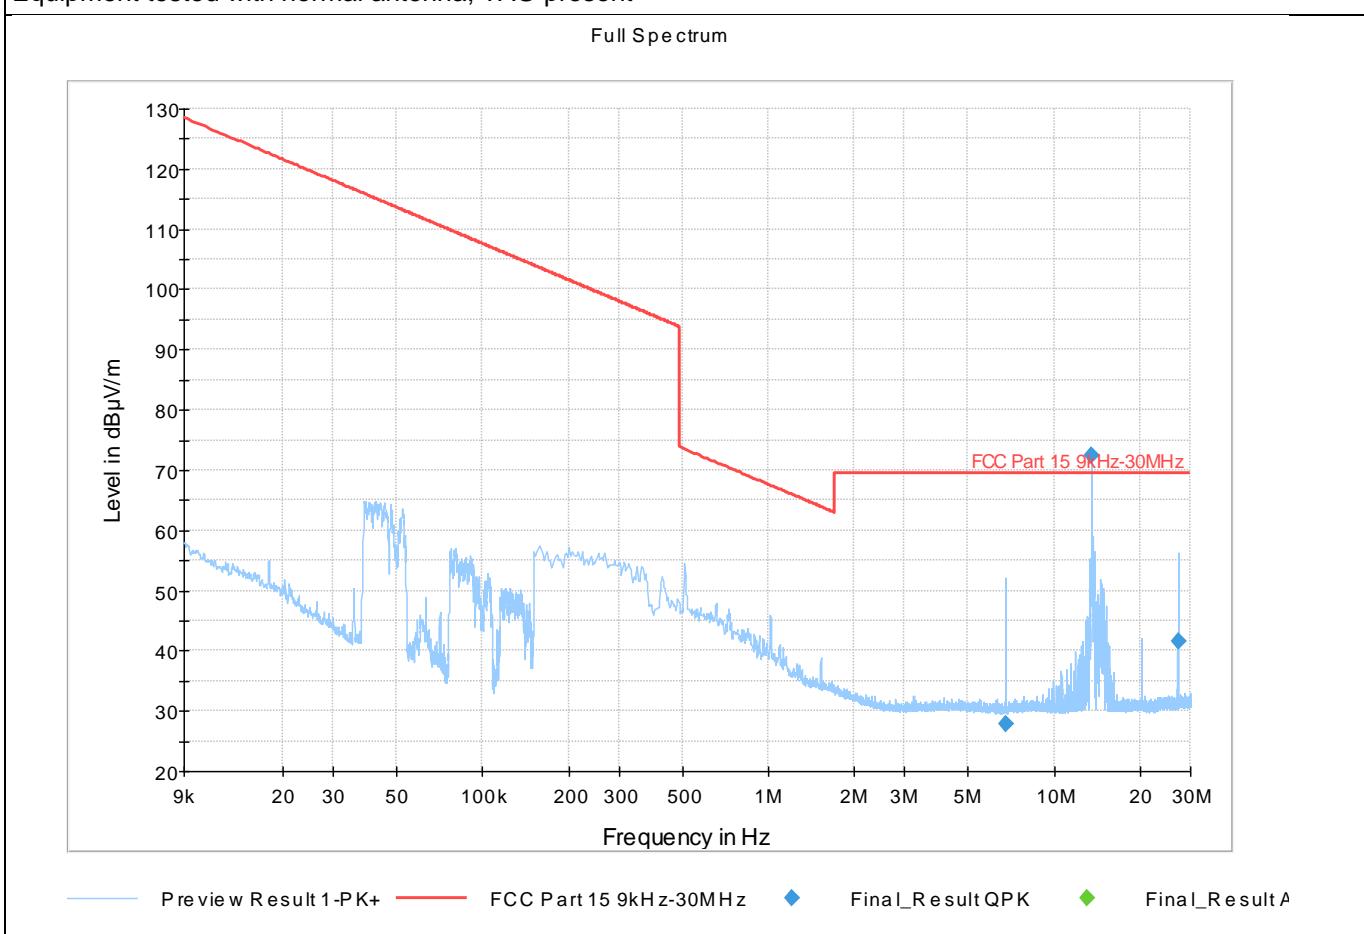

Measurement data of

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6.783000	27.90	---	69.55	41.65	5000.0	9.000	100.0	H	133.0	20.5
13.562250*	72.52	---	---	---	5000.0	9.000	100.0	H	170.0	20.5
27.123000	41.55	---	69.55	28.00	5000.0	9.000	100.0	H	103.0	21.2

*Fundamental frequency not related to limit

Remarks:


Margin value = Measurement value – Limit value

ADDITIONAL DOCUMENTATION

Graphical presentation of

Equipment tested with normal antenna; TAG not present

Full Spectrum

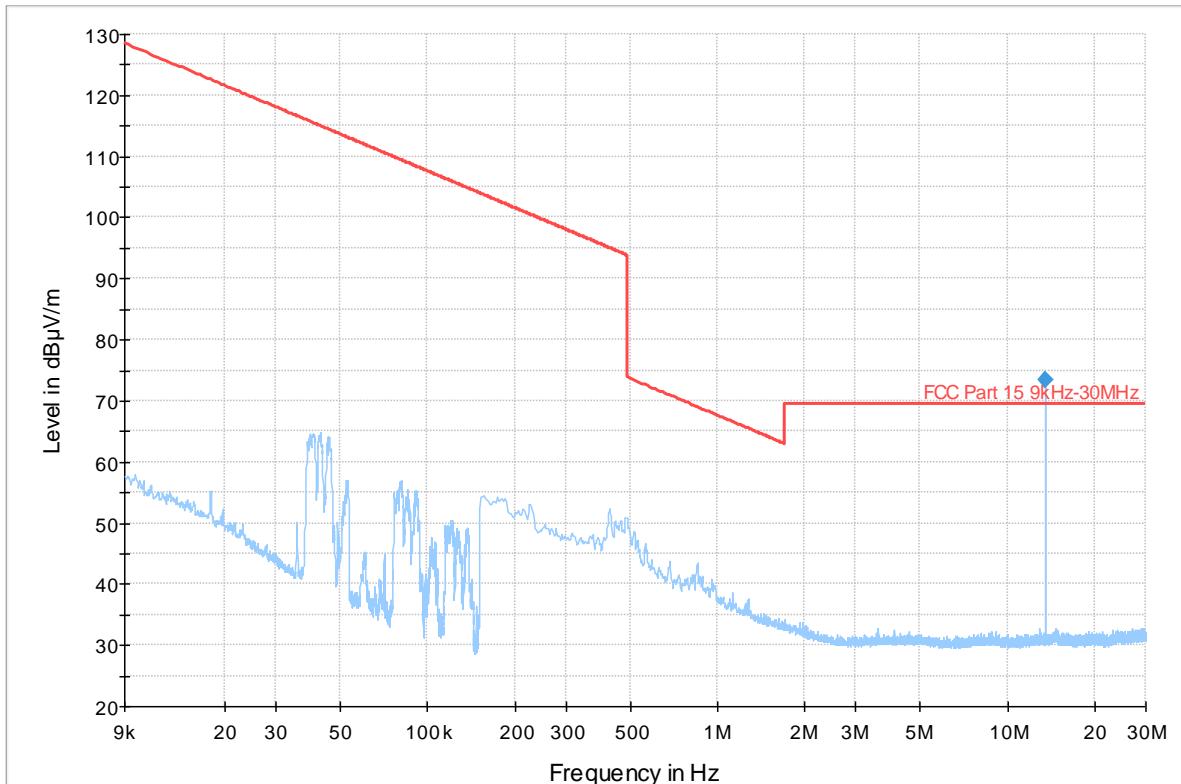

Measurement data of

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
13.562250	73.31	---	---	---	5000.0	9.000	100.0	H	170.0	20.5

*Fundamental frequency not related to limit

Remarks:

Margin value = Measurement value – Limit value

ADDITIONAL DOCUMENTATION**RANGE 30-1000 MHz****Test parameter of****EMI Auto Test Template: Electric Field Strength with Scans 30-1000MHz**

Hardware Setup: Electric Field Strength 30-1000MHz
Measurement Type: Open-Area-Test-Site (SAC/FAR)
Frequency Range: 30 MHz - 1 GHz
Graphics Level Range: 0 dB μ V/m - 80 dB μ V/m

Preview Measurements:

Antenna height: 100 - 400 cm , Step Size = 100 cm , Positioning Speed = 2
Polarization: H + V
Turntable position: 0 - 270 deg , Step Size = 90 deg , Positioning Speed = 3
Scan Test Template: Electric Field Strength

Adjustment:

Antenna height: Range = 25 cm , Measuring Speed = 3
Turntable position: Range = 25 deg , Measuring Speed = 3
Template for Single Meas.: Electric Field Strength

Final Measurements:


Template for Single Meas.: Electric Field Strength fin

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
Receiver: [ESW 44] 30 MHz - 1 GHz	30 kHz	QPK	120 kHz	1 s	0 dB

ADDITIONAL DOCUMENTATION**Graphical presentation of**

Equipment tested with normal antenna; TAG present

Full Spectrum

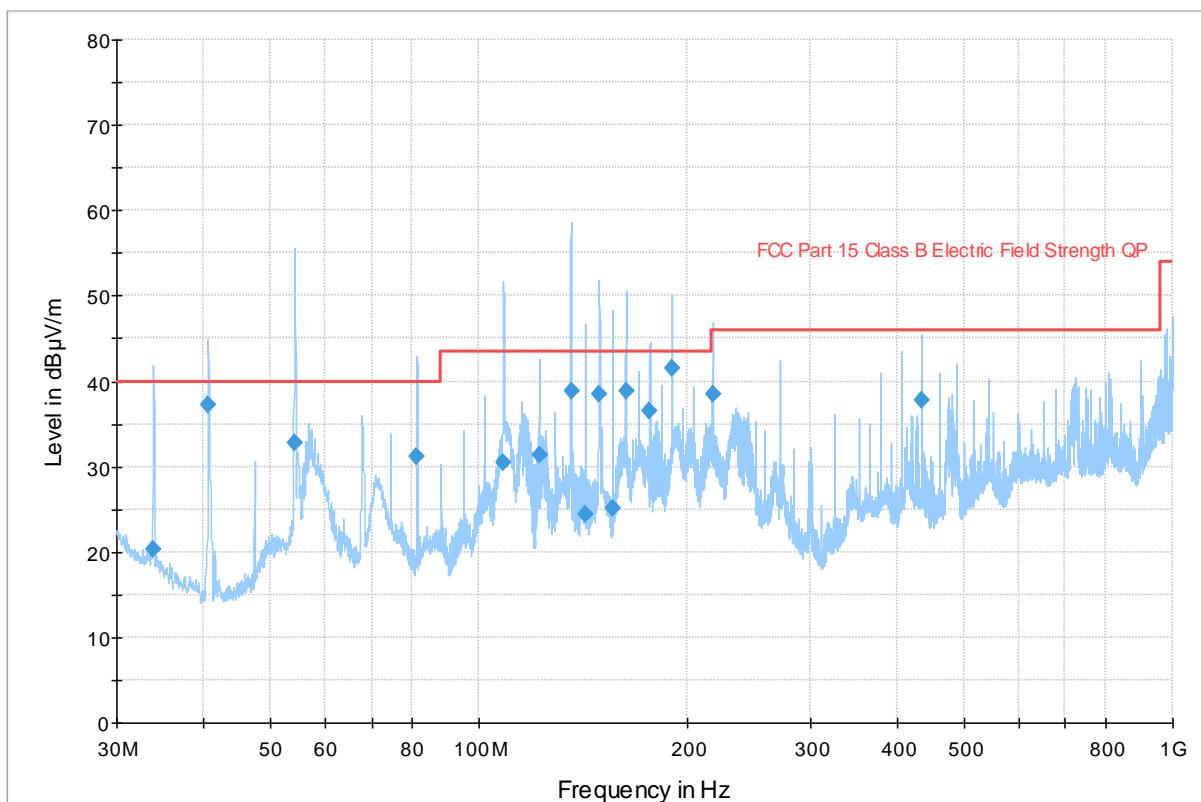

— Preview Result 1-PK+ — FCC Part 15 Class B Electric Field Strength QP ♦ Final_Result QPK

ADDITIONAL DOCUMENTATION
Measurement data of
Final_Results

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.900000	20.27	40.00	19.73	5000.0	120.000	100.0	V	103.0	14.2
40.680000	37.16	40.00	2.84	5000.0	120.000	212.0	H	181.0	9.6
54.210000	32.86	40.00	7.14	5000.0	120.000	202.0	V	86.0	7.3
81.360000	31.16	40.00	8.84	5000.0	120.000	212.0	H	86.0	7.2
108.420000	30.50	43.50	13.00	5000.0	120.000	195.0	H	89.0	8.2
122.040000	31.44	43.50	12.06	5000.0	120.000	212.0	H	78.0	7.5
135.600000	38.83	43.50	4.67	5000.0	120.000	195.0	V	193.0	9.0
142.380000	24.33	43.50	19.17	5000.0	120.000	100.0	H	91.0	8.9
149.160000	38.49	43.50	5.01	5000.0	120.000	112.0	H	103.0	9.9
155.940000	25.06	43.50	18.44	5000.0	120.000	112.0	H	103.0	11.1
162.720000	38.82	43.50	4.68	5000.0	120.000	103.0	H	91.0	10.5
176.280000	36.47	43.50	7.03	5000.0	120.000	187.0	H	13.0	10.7
189.870000	41.49	43.50	2.01	5000.0	120.000	103.0	H	283.0	10.3
216.960000	38.44	46.00	7.56	5000.0	120.000	288.0	H	268.0	11.5
433.950000	37.84	46.00	8.16	5000.0	120.000	187.0	H	13.0	18.3

Remarks:


Margin value = Measurement value – Limit value

ADDITIONAL DOCUMENTATION

Graphical presentation of

Equipment tested with normal antenna; TAG not present

Full Spectrum

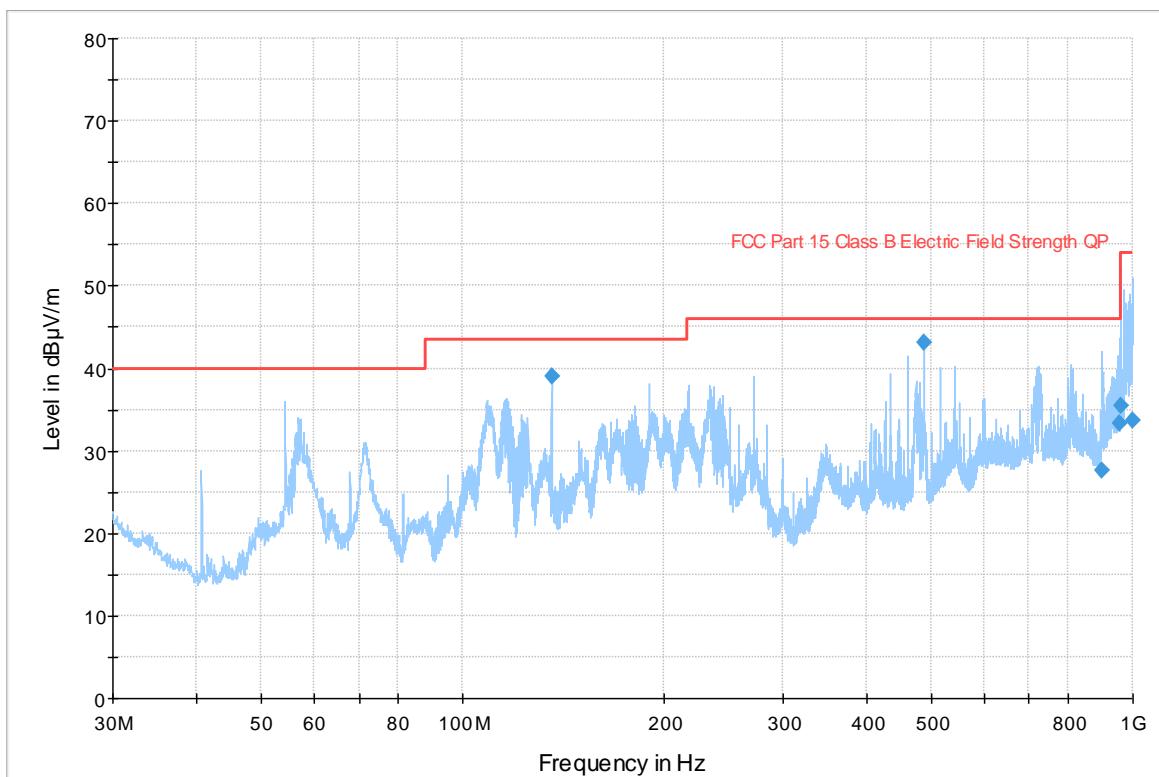

Pre view R esult 1-PK+ — FCC Part 15 Class B Electric Field Strength QP ♦ Final_R esult QPK

Measurement data of

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
135.600000	38.99	43.50	4.51	5000.0	120.000	287.0	H	83.0	8.7
488.190000	43.11	46.00	2.89	5000.0	120.000	187.0	H	12.0	20.9
898.980000	27.56	46.00	18.44	5000.0	120.000	212.0	H	98.0	25.2
954.210000	33.31	46.00	12.69	5000.0	120.000	112.0	V	178.0	28.9
960.000000	35.41	46.00	10.59	5000.0	120.000	207.0	H	103.0	28.2
997.560000	33.68	53.90	20.22	5000.0	120.000	108.0	V	266.0	28.0

Remarks:

Margin value = Measurement value – Limit value

ADDITIONAL DOCUMENTATION**Radiated emission test - Field strength inside of the 13,110-14,010 MHz band**

Test date	27/02/2023
Applied Standard	FCC part 15 C
Paragraph	§15.225(a); §15.225(b); §15.225(c)
Temperature	21.5° C
Humidity	46%
Voltage/Frequency used during the test	110Vac / 60Hz
Tested by	Roberto Radice
Model	Osmond N
Internal Storage No.	A003255761-008
Operating mode	1
Tested terminals	Enclosure
Remarks	In accordance with part 15.31 (f) (2), where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance. The applied formula for limits at 3 meter is: Extrapolation (dB) = 40log (300meter / 3meter) = +80db Extrapolation (dB) = 40log (30meter / 3meter) = +40db

ADDITIONAL DOCUMENTATION

Extrapolation from the measurement of a single point

If field strength is measured at only a single point, then that point shall be at the radial from the EUT that produces the maximum emission at the frequency being measured, as described in 5.4. If that point is closer to the EUT than $\lambda/2\pi$ and the limit distance is greater than $\lambda/2\pi$, the measurement shall be extrapolated to the limit distance by conservatively presuming that the field strength decreases at a 40 dB/decade of distance rate to the $\lambda/2\pi$ distance, and at a 20 dB/decade of distance rate beyond $\lambda/2\pi$.

This shall be accomplished using **Equation (A)**:

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log\left(\frac{d_{\text{near field}}}{d_{\text{measure}}}\right) - 20 \log\left(\frac{d_{\text{limit}}}{d_{\text{near field}}}\right)$$

where

FS_{limit} is the calculation of field strength at the limit distance, expressed in $\text{dB}\mu\text{V/m}$

FS_{max} is the measured field strength, expressed in $\text{dB}\mu\text{V/m}$

$d_{\text{near field}}$ is the $\lambda/2\pi$ distance

d_{measure} is the distance of the measurement point from the EUT

d_{limit} is the reference limit distance

If the single point measured is at a distance greater than $\lambda/2\pi$, then extrapolation to the limit distance shall be calculated using Equation (B):

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

If both the single point and the limit distance are equal to or closer to the EUT than $\lambda/2\pi$, then extrapolation to the limit distance shall be calculated using Equation (C):

$$FS_{\text{limit}} = FS_{\text{max}} - 40 \log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

where

FS_{limit} is the calculation of field strength at the limit distance, expressed in $\text{dB}\mu\text{V/m}$

FS_{max} is the measured field strength, expressed in $\text{dB}\mu\text{V/m}$


$d_{\text{near field}}$ is the $\lambda/2\pi$ distance

d_{measure} is the distance of the measurement point from the EUT

d_{limit} is the reference distance or the distance of the $\lambda/2\pi$ point

ADDITIONAL DOCUMENTATION

New limit (according to equation A)						
f (MHz)	Fs limit (uV/m)	Fs limit (dBuV/m)	d(near field) (m)	d(measure) (m)	d(limit) (m)	FS (max) (dBuV/m)
13,11	106	40,51	3,64	3	30	62,2
13,41	334	50,47	3,56	3	30	72,0
13,41	334	50,47	3,56	3	30	72,0
13,553	15848	84,00	3,52	3	30	105,4
13,567	15848	84,00	3,52	3	30	105,4
13,71	334	50,47	3,48	3	30	71,8
13,71	334	50,47	3,48	3	30	71,8
14,01	106	40,51	3,41	3	30	61,6

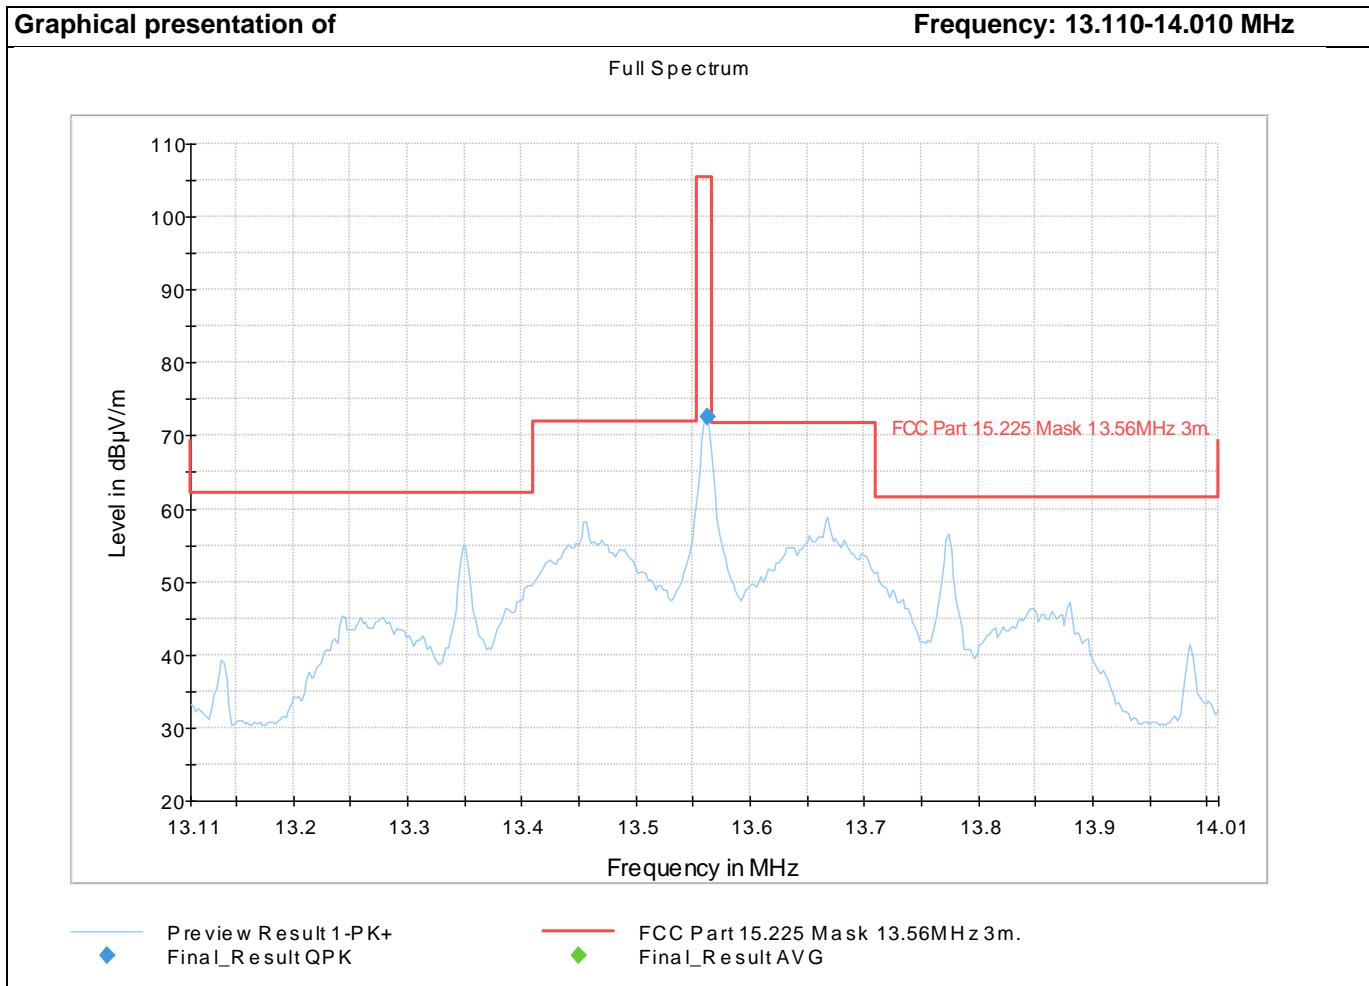ADDITIONAL DOCUMENTATION

Final_Result


Frequency (MHz)	QuasiPeak (dB μ V/m)	Average (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
13.562250	72.52	---	5000.0	9.000	100.0	H	170.0	20.5

ADDITIONAL DOCUMENTATION**20dB Bandwidth**

Test date	27/02/2023
Applied Standard	FCC part 15 C
Paragraph	§15.215(c)
Temperature	21.5° C
Humidity	46%
Tested by	Roberto Radice
Model	Osmond N
Internal Storage No.	A003255761-008
Operating mode	1
Tested terminals	Enclosure
Remarks	None

Note: Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.


ADDITIONAL DOCUMENTATION

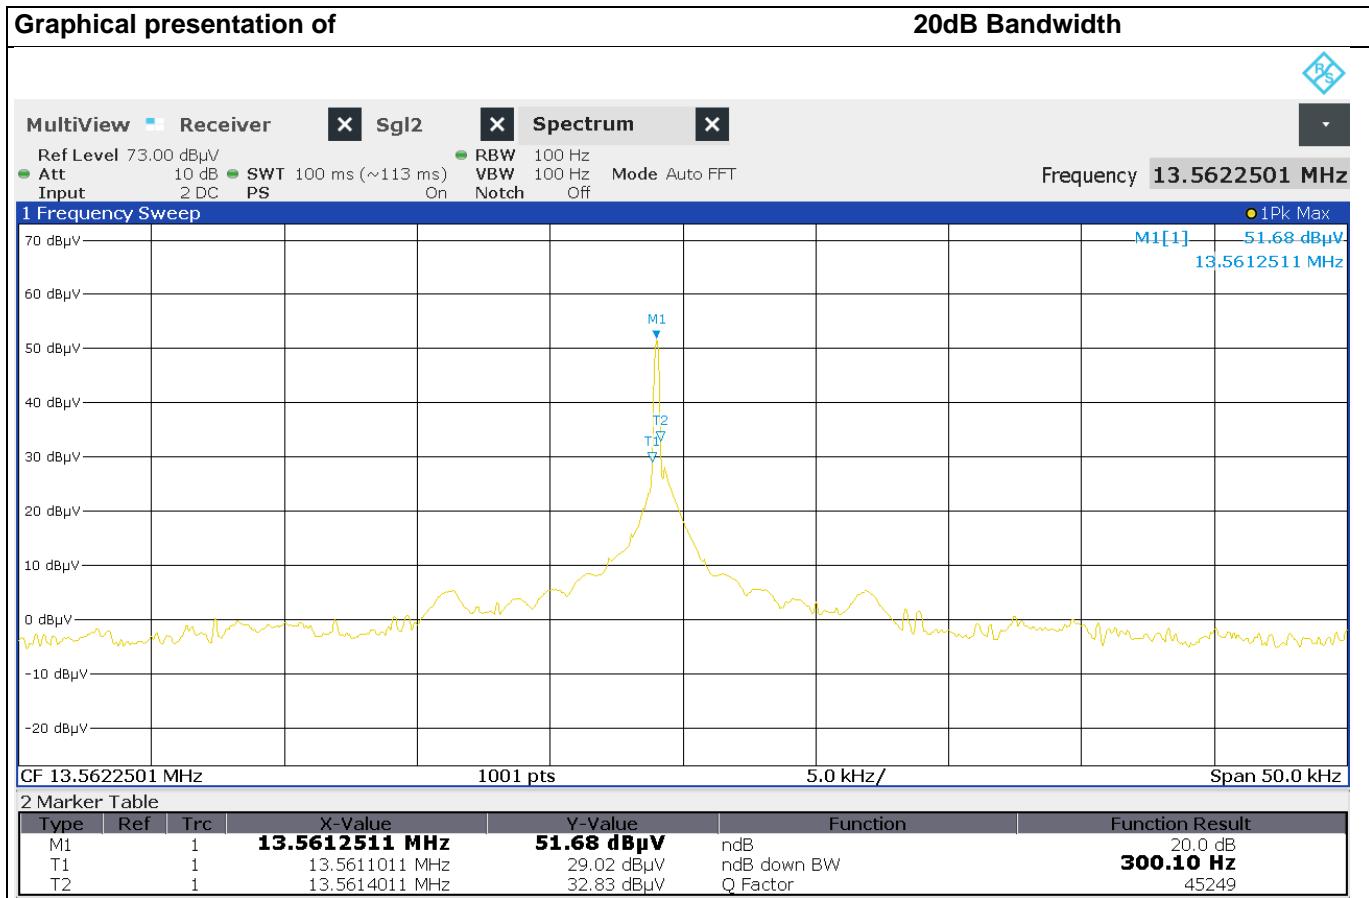

Channel (No.)	Frequency (MHz)	Channel Bandwidth at -20dB (Hz)	Plot (No.)
1	13.5612511	300.10	1

Bandwidth at -20dB (Fmin and Fmax)			
Fmin	13.5611011 MHz	Fmax	13.5614011 MHz

ADDITIONAL DOCUMENTATION

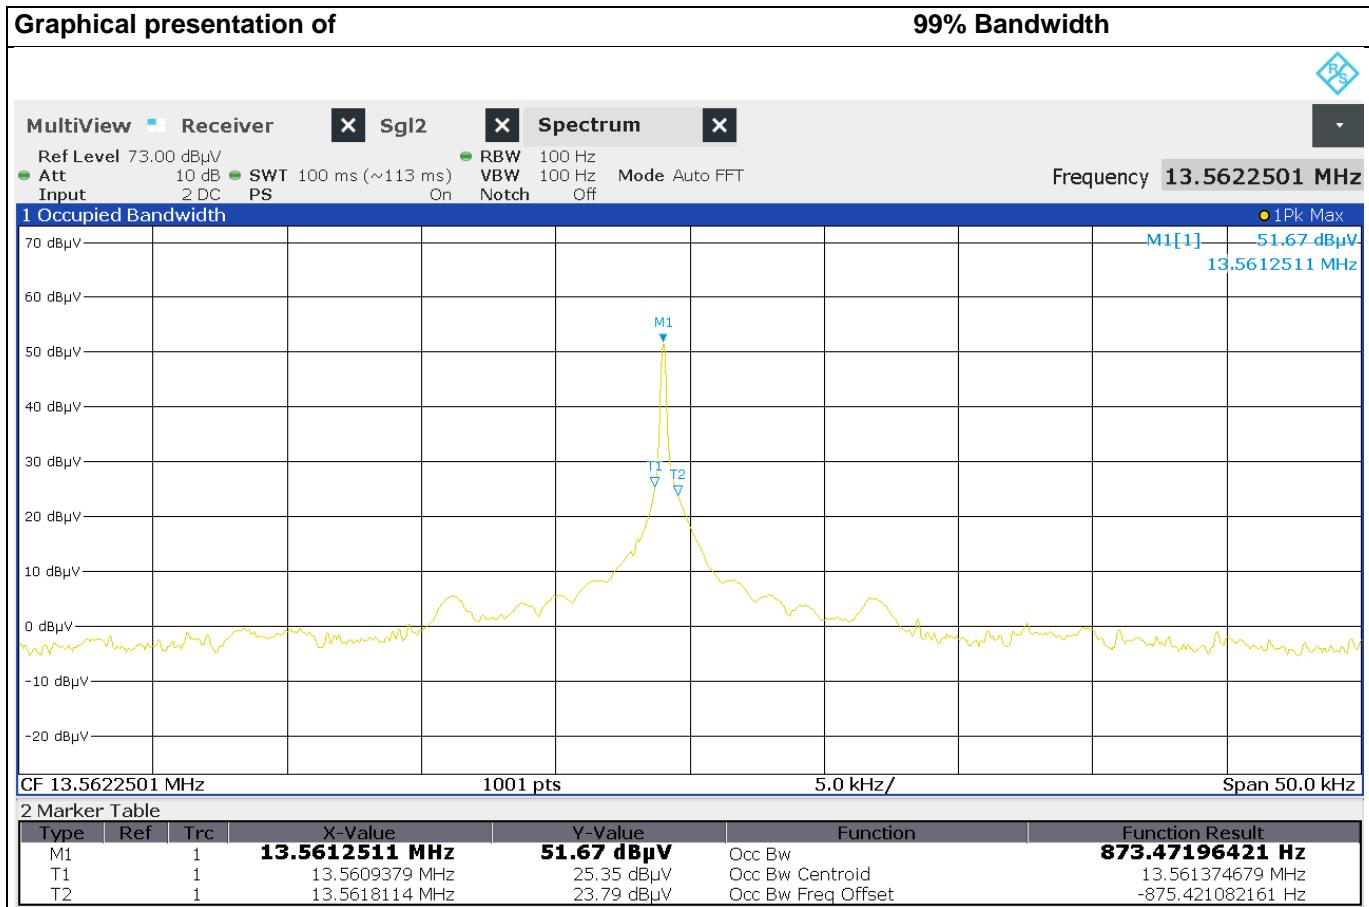

Channel (No.)	Frequency (MHz)	Channel Bandwidth at 99% (Hz)	Plot (No.)
1	13.5612511	873.47	1

Bandwidth at 99% (Fmin and Fmax)			
Fmin	13.5609379 MHz	Fmax	13.5618114 MHz

ADDITIONAL DOCUMENTATION**Frequency tolerance of the carrier signal**

Test date	27/02/2023
Applied Standard	FCC part 15 C
Paragraph	§15.225(e)
Temperature	20.5° C
Humidity	40%
Tested by	Roberto Radice
Model	Osmond N
Internal Storage No.	A003255761-008
Operating mode	1
Tested terminals	Enclosure
Remarks	None

Note: the frequency tolerance of the carrier signal shall be maintained within +0.01% of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

ADDITIONAL DOCUMENTATION**Frequency stability**

Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Frequency Delta (ppm)
25	110	13.5612640	0
25	93.5	13.5612640	0
25	126.5	13.5612640	0

Temperature (°C)	Voltage (Vac)	Measured Frequency (MHz)	Frequency Delta (ppm)
-20	110	13.5612640	0
-10	110	13.5612640	0
0	110	13.5612640	0
+10	110	13.5612640	0
+20	110	13.5612640	0
+25	110	13.5612640	0
+30	110	13.5612640	0
+40	110	13.5612640	0
+50	110	13.5612640	0

ADDITIONAL DOCUMENTATION**Additional provisions to the general radiated emission limitations.**

Test date	27/02/2023
Applied Standard	FCC part 15 C
Paragraph	§15.215 (a) (b) (c)
Temperature	21.5° C
Humidity	46%
Tested by	Roberto Radice
Model	Osmond N
Internal Storage No.	A003255761-009
Operating mode	1
Tested terminals	Enclosure
Remarks	None

ADDITIONAL DOCUMENTATION

(A) The regulations in §§ 15.217-15.257 provide alternatives to the general radiated emission limits for intentional radiators operating in specified frequency bands. Unless otherwise stated, there are no restrictions as to the types of operation permitted under these sections.	
(B) In most cases, unwanted emissions outside of the frequency bands shown in these alternative provisions must be attenuated to the emission limits shown in Section 15.209. In no case shall the level of the unwanted emissions from an intentional radiator operating under these additional provisions exceed the field strength of the fundamental emission.	VERDICT P
(C) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least	VERDICT P

ADDITIONAL DOCUMENTATION
17. List of test equipment

Equipment	Type	Inventory no.	Manufacturer	Calibration due date
Test stand: Radiated emission test - Field strength outside of the 13,110-14,010 MHz band				
Semi-anechoic Chamber	FACT3	2782378	ETS Lindgren	05/2024
Active Loop Antenna and power supply	HFH2-Z2E+IN 600	9015215	Rohde&Schwarz	06/2026
BiConiLog Antenna	3142-E	2782348	ETS Lindgren	08/2023
EMI Receiver	ESW44	2782867	Rohde&Schwarz	05/2024
Three-Phases Power Supply	TPS T 30K60S	2782385	Elettrotest	10/2024
Software EMC32	11.40.00	---	Rohde&Schwarz	---
Test stand: Radiated emission test - Field strength inside of the 13,110-14,010 MHz band				
Semi-anechoic Chamber	FACT3	2782378	ETS Lindgren	05/2024
Active Loop Antenna and power supply	HFH2-Z2E+IN 600	9015215	Rohde&Schwarz	06/2026
EMI Receiver	ESW44	2782867	Rohde&Schwarz	05/2024
Three-Phases Power Supply	TPS T 30K60S	2782385	Elettrotest	10/2024
Software EMC32	11.40.00	---	Rohde&Schwarz	---

ADDITIONAL DOCUMENTATION

Equipment	Type	Inventory no.	Manufacturer	Calibration due date
Test stand: 20dB Bandwidth				
Semi-anechoic Chamber	FACT3	2782378	ETS Lindgren	05/2024
Active Loop Antenna and power supply	HFH2-Z2E+IN 600	9015215	Rohde&Schwarz	06/2026
EMI Receiver	ESW44	2782867	Rohde&Schwarz	05/2024
Three-Phases Power Supply	TPS T 30K60S	2782385	Elettrotest	10/2024
Software EMC32	11.40.00	---	Rohde&Schwarz	---
Test stand: Frequency tolerance of the carrier signal				
Climatic Chamber	CTS C-40/350	2789461	CTS	07/2024
Active Loop Antenna and power supply	HFH2-Z2E+IN 600	9015215	Rohde&Schwarz	06/2026
EMI Receiver	ESR 3	2782768	Rohde&Schwarz	05/2024
Three-Phases Power Supply	TPS T 30K60S	2782385	Elettrotest	10/2024
Test stand: Conducted emission				
EMI Receiver	ESW44	2782867	Rohde&Schwarz	05/2024
Single-phase LISN 16A	ENV216	2782895	Rohde&Schwarz	06/2024
Three-Phases Power Supply	TPS T 30K60S	2782385	Elettrotest	10/2024
Software EMC32	11.40.00	---	Rohde&Schwarz	---

ADDITIONAL DOCUMENTATION**PHOTOGRAPHIC DOCUMENTATION**

See the Annex below:

IT23SWZZ 001 Annex 1	External photos
IT23SWZZ 001 Annex 2	Internal photos
IT23SWZZ 001 Annex 3	Test Set-up photos

SAR EVALUATION

See the Annex below:

IT23SWZZ 001 Annex 4	SAR Evaluation
----------------------	----------------

---END OF TEST REPORT---