



CAICT
No.I22Z62463-SEM03



SAR TEST REPORT

No. I22Z62463-SEM03

For

Shenzhen Tinno Mobile Technology Corp.

Mobile Phone

Model Name: U1030AA, U1030AC

With

Hardware Version: V1.0

Software Version: U1030AAV01.02.10

FCC ID: XD6U1030AA

2023-03-13

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Issue Date	Description
I22Z62463-SEM03	Rev.0	2023-03-01	Initial creation of test report
I22Z62463-SEM03	Rev.1	2023-03-03	Update information for the WLAN 2.4 G on page 6
I22Z62463-SEM03	Rev.2	2023-03-09	Update information for the WCDMA1700 tune up on page 24
I22Z62463-SEM03	Rev.3	2023-03-13	When body SAR>1.2W/kg, headset test data (H1) has been added on page 53/54/55; BT test data has been added on page 57.
I22Z62463-SEM03	Rev.4	2023-03-13	Add BLE SAR test exemption on page 49

TABLE OF CONTENT

1 TEST LABORATORY	5
1.1 TESTING LOCATION	5
1.2 TESTING ENVIRONMENT.....	5
1.3 PROJECT DATA.....	5
1.4 SIGNATURE.....	5
2 STATEMENT OF COMPLIANCE	6
3 CLIENT INFORMATION	7
3.1 APPLICANT INFORMATION.....	7
3.2 MANUFACTURER INFORMATION	7
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
4.1 ABOUT EUT.....	8
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	8
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
5 TEST METHODOLOGY	9
5.1 APPLICABLE LIMIT REGULATIONS.....	9
5.2 APPLICABLE MEASUREMENT STANDARDS.....	9
6 SPECIFIC ABSORPTION RATE (SAR).....	10
6.1 INTRODUCTION.....	10
6.2 SAR DEFINITION.....	10
7 TISSUE SIMULATING LIQUIDS.....	11
7.1 TARGETS FOR TISSUE SIMULATING LIQUID.....	11
7.2 DIELECTRIC PERFORMANCE.....	11
8 SYSTEM VERIFICATION	13
8.1 SYSTEM SETUP.....	13
8.2 SYSTEM VERIFICATION.....	14
9 MEASUREMENT PROCEDURES	15
9.1 TESTS TO BE PERFORMED.....	15
9.2 GENERAL MEASUREMENT PROCEDURE.....	17
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR.....	18
9.4 SAR MEASUREMENT FOR LTE	19
9.5 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR.....	21
9.6 POWER DRIFT.....	21
10 AREA SCAN BASED 1-G SAR	22
10.1 REQUIREMENT OF KDB	22
10.2 FAST SAR ALGORITHMS.....	22

11 CONDUCTED OUTPUT POWER.....	23
11.1 WCDMA MEASUREMENT RESULT.....	23
11.2 LTE MEASUREMENT RESULT	25
11.3 WI-FI AND BT MEASUREMENT RESULT.....	48
12 SIMULTANEOUS TX SAR CONSIDERATIONS.....	49
12.1 TRANSMIT ANTENNA SEPARATION DISTANCES.....	49
12.2 SAR MEASUREMENT POSITIONS.....	49
13 EVALUATION OF SIMULTANEOUS.....	50
14 SAR TEST RESULT	51
14.1 SAR RESULTS FOR 2G/3G/4G.....	54
14.2 SAR RESULTS FOR WLAN	57
14.3 SAR RESULTS FOR BT.....	58
15 SAR MEASUREMENT VARIABILITY	58
16 MEASUREMENT UNCERTAINTY	59
16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHZ~3GHZ).....	59
16.2 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz)	60
16.3 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHZ~3GHz).....	61
16.4 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz)	62
17 MAIN TEST INSTRUMENTS.....	64
ANNEX A GRAPH RESULTS	65
ANNEX B SYSTEM VERIFICATION RESULTS	90
ANNEX C SAR MEASUREMENT SETUP	95
ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM.....	101
ANNEX E EQUIVALENT MEDIA RECIPES	104
ANNEX F SYSTEM VALIDATION	105
ANNEX G PROBE CALIBRATION CERTIFICATE.....	106
ANNEX H DIPOLE CALIBRATION CERTIFICATE	115
ANNEX I ACCREDITATION CERTIFICATE.....	145

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL
Address:	No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.


1.2 Testing Environment

Temperature:	18°C~25°C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg


1.3 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	WangTian
Testing Start Date:	February 1,2023
Testing End Date:	February 18,2023


1.4 Signature



WangTian
(Prepared this test report)



Qi Dianyuan
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Shenzhen Tinno Mobile Technology Corp. Mobile phone U1030AA, U1030AC is as follows:

Table 2.1: Highest Reported SAR (1g)

Mode		Highest Reported SAR (1g)		
		1g SAR Head	1g SAR Hotspot	1g SAR Body-worn
WCDMA	UMTS FDD 5	0.58	1.15	1.15
	UMTS FDD 4	0.45	1.25	1.26
	UMTS FDD 2	0.59	1.25	1.13
LTE	LTE Band 2	0.17	1.06	1.18
	LTE Band 4	0.22	1.12	1.10
	LTE Band 5	0.63	1.34	1.07
	LTE Band 12	0.67	0.55	0.55
	LTE Band 14	0.56	0.44	0.44
WLAN 2.4 GHz		0.12	0.04	0.04
BT		0.03	0.03	0.03

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm/15mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report. The highest reported SAR value is obtained at the case of (**Table 2.1&2.2**), and the Head value is 0.67 W/kg(1g), Hotspot value is 1.34 W/kg(1g), Body-worn value is 1.26 W/kg(1g).

Table 2.2: The sum of SAR values for Main antenna + WiFi

	Position	Main antenna	WiFi	Sum
Highest SAR value	Rear 10mm	1.34 (LTE B5)	0.03 (WiFi2.4G)	1.37

According to the above tables, the highest sum of reported SAR values is **1.37 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 14.

Conclusion:

According to the above tables, the sum of reported SAR values is <1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

3 Client Information

3.1 Applicant Information

Company Name:	Shenzhen Tinno Mobile Technology Corp.
Address/Post:	27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, S henzhen ,PRC
Contact Person:	xiaoping.li
Contact Email:	xiaoping.li@tinno.com
Telephone:	0755-86095550
Fax	0755-86095551

3.2 Manufacturer Information

Company Name:	Shenzhen Tinno Mobile Technology Corp.
Address/Post:	27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, S henzhen ,PRC
Contact Person:	xiaoping.li
Contact Email:	xiaoping.li@tinno.com
Telephone:	0755-86095550
Fax	0755-86095551

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	Mobile Phone
Model name:	U1030AA, U1030AC
Tested Band:	WCDMA B2/B4/B5 LTE Band2/4/5/12/14 BT, Wi-Fi(2.4G)
Tx Frequency:	824–849 MHz (WCDMA 850 Band V)
	1710 – 1755 MHz (WCDMA 1700 Band IV)
	1850–1910 MHz (WCDMA1900 Band II)
	1850 – 1910 MHz(LTE Band 2)
	1710 – 1755 MHz(LTE Band 4)
	824 – 849 MHz (LTE Band 5)
	699 – 716 MHz (LTE Band 12)
	788 –798 MHz (LTE Band 14)
	2412 – 2462 MHz (Wi-Fi 2.4G)
	2400 – 2483.5 MHz (Bluetooth)
Test device production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Hotspot mode:	Support

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	864732060011353	V1.0	U1030AAV01.02.10
EUT2	864732060007583	V1.0	U1030AAV01.02.10
EUT3	864732060013185	V1.0	U1030AAV01.02.10

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT3 and conducted power with the EUT1/2.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	LT25H426271B	/	GUANGDONG FENGHUA NEW ENERGY CO.,LTD.

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528-2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

KDB447498 D01: General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01: SAR Measurement Procedures for 3G Devices

KDB941225 D05 SAR for LTE Devices v02r05: SAR Evaluation Considerations for LTE Devices

KDB941225 D06 Hotspot Mode SAR v02r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


Frequency(MHz)	Liquid Type	Conductivity(σ)	$\pm 5\%$ Range	Permittivity(ϵ)	$\pm 5\%$ Range
750	Head	0.89	0.85~0.93	41.94	39.8~44.0
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
1750	Head	1.37	1.30~1.44	40.08	38.1~42.1
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
2450	Head	1.67	1.59~1.75	39.47	37.5~41.4
2600	Head	1.96	1.76~2.16	39.01	35.11~42.91
5250	Head	4.71	4.47~4.95	35.93	34.13~37.73
5600	Head	5.07	4.82~5.32	35.53	33.8~37.3
5750	Head	5.22	4.96~5.48	35.36	33.59~37.13

7.2 Dielectric Performance


Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2023/2/1	Head	750 MHz	43.98	4.86	0.9065	1.85
2023/2/2	Head	835 MHz	43.57	4.99	0.9386	4.29
2023/2/3	Head	1750 MHz	41.88	4.49	1.38	0.73
2023/2/4	Head	1900 MHz	41.63	4.08	1.471	5.07
2023/2/18	Head	2450 MHz	40.73	3.90	1.852	2.89

Note: The liquid temperature is 22.0°C

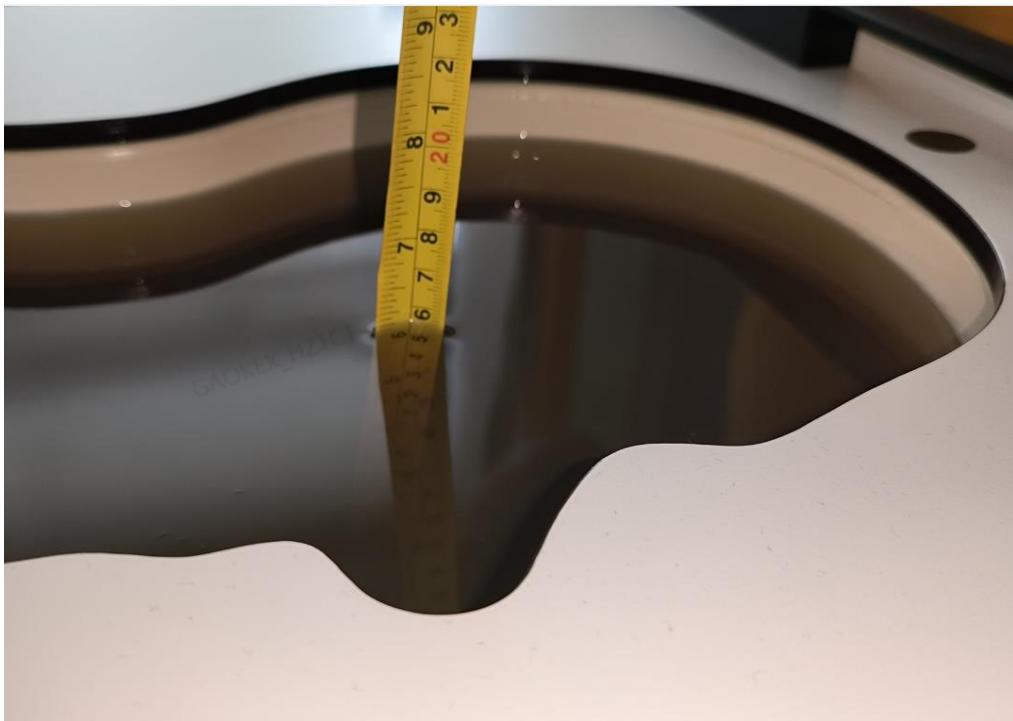

Picture 7-1 Liquid depth in the Head Phantom

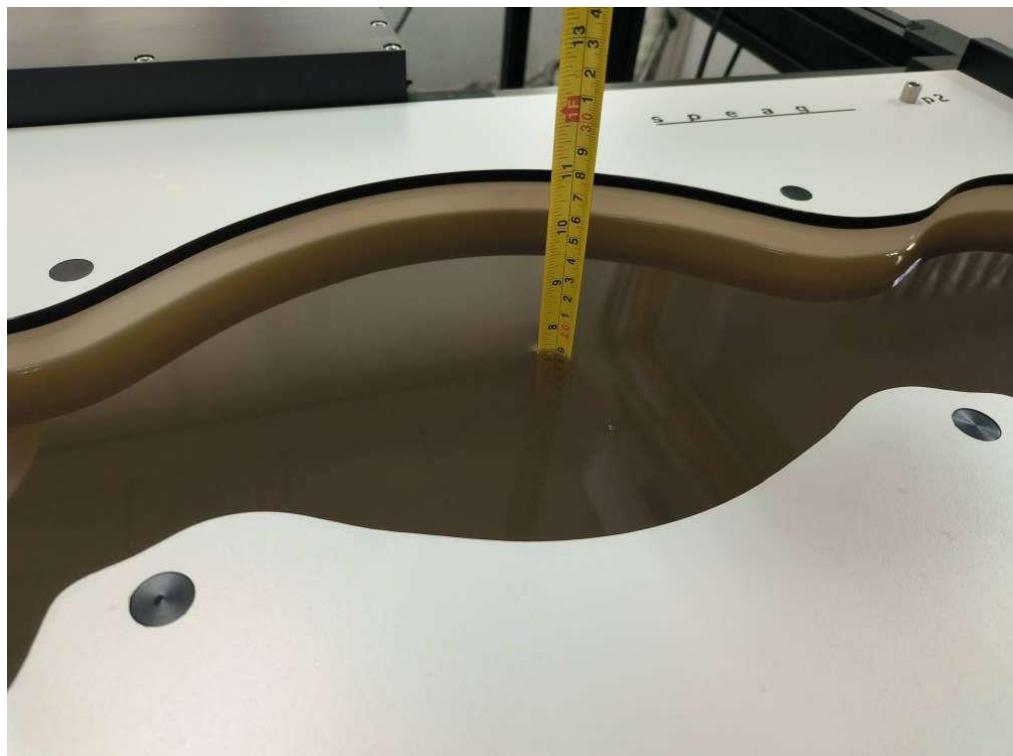


Picture 7-2 Liquid depth in the Flat Phantom

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

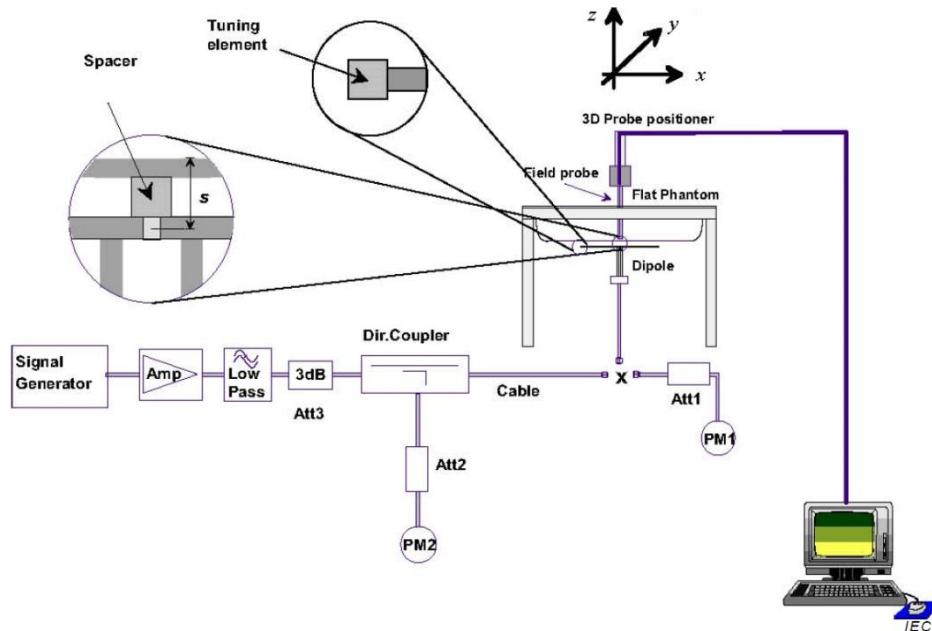

Picture 8-1 System Setup for System Evaluation



Picture 8-2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value(W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2023/2/1	750 MHz	5.64	8.63	5.60	8.24	-0.71%	-4.52%
2023/2/2	835 MHz	6.34	9.73	6.08	9.76	-4.10%	0.31%
2023/2/3	1750 MHz	19.3	36.8	18.8	34.7	-2.59%	-5.65%
2023/2/4	1900 MHz	20.7	39.7	19.4	37.0	-6.09%	-6.90%
2023/2/18	2450 MHz	24.9	52.7	22.9	49.2	-8.11%	-6.64%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

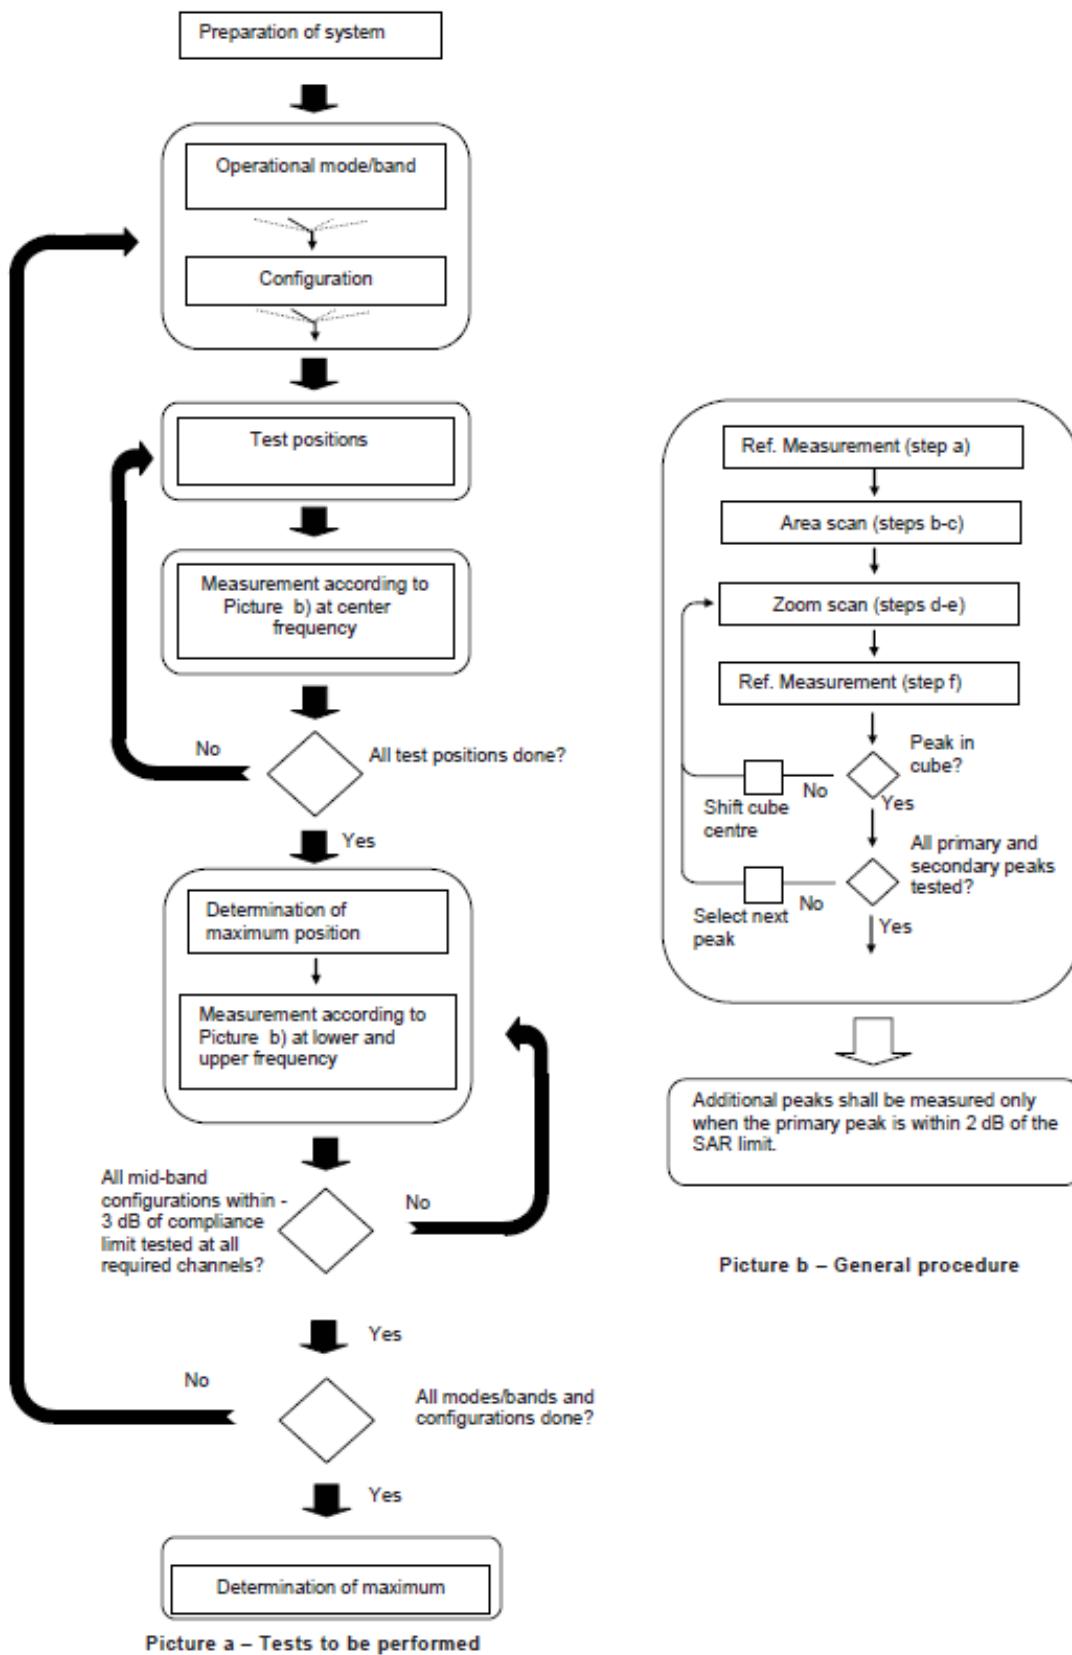
Picture 9-1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

		$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1): \text{between 1}^{\text{st}}$ two points closest to phantom surface $\Delta z_{\text{Zoom}}(n>1): \text{between}$ subsequent points	$\leq 4 \text{ mm}$ $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}, \leq 8 \text{ mm}, \leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.5	1.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	1.5	1.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1} : 47/15$	4	2	1.5	1.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	1.5	1.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

Rel.8 DC-HSDPA (Cat 24)

SAR test exclusion for Rel.8 DC-HSDPA must satisfy the SAR test exclusion requirements of Rel.5 HSDPA. SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion.

9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Rchwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

TDD test:

TDD testing is performed using guidance from FCC KDB 941225 D05 and the SAR test guidance provided in April 2013 TCB works hop notes. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211.

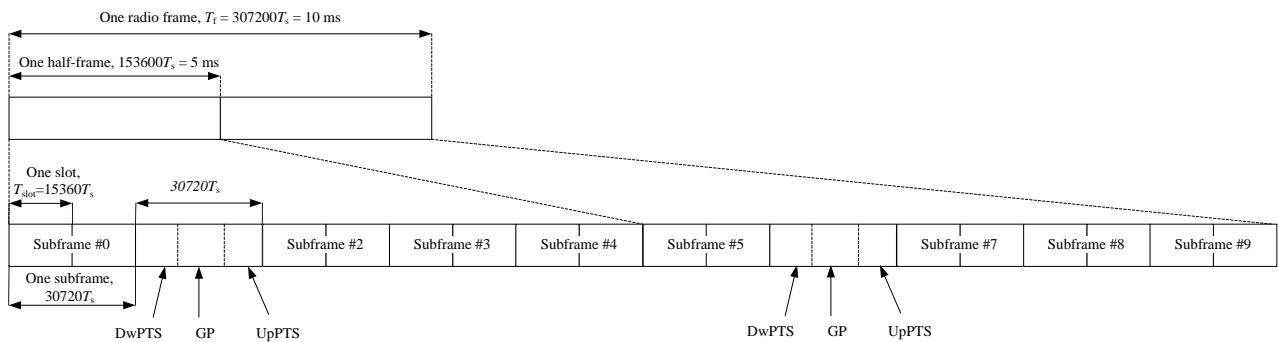


Figure 9.2: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 9.1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Table 9.2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Duty factor is calculated by:

$$\text{Duty factor} = \text{uplink frame} * 6 + \text{UpPTS} * 2 / \text{one frame length}$$

$$= (30720 \cdot T_s * 6 + 5120 \cdot T_s * 2) / 307200 \cdot T_s$$

$$= 0.633$$

9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.6 Power Drift

To control the output power stability during the SAR test, DASY5 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-gSAR is $\leq 1.2 \text{ W/kg}$, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to a Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

Table11: Summary of Receiver detection mechanism

Antenna	Receiver on (head scenario)	Receiver off + Hotspot off (Body scenario)	Receiver off + Hotspot on (Hotspot scenario)
Main Antenna	Power Level A1	Power Level B1	Power Level C1

11.1 WCDMA Measurement result

WCDMA850 Power Level A1/B1/C1

WCDMA850	FDDV result (dBm)			tune up
	4233/4458 (846.6MHz)	4183/4408 (836.6MHz)	4132/4357 (826.4MHz)	
	23.79	23.56	23.71	
	21.44	21.43	21.38	
HSUPA	21.24	21.26	21.12	21.5
	20.92	21.52	21.47	22.5
	21.59	22.06	22.03	21
	22.41	22.43	22.47	22.5
	22.26	22.17	22.10	23
HSPA+	22.72	22.65	22.24	23.5
	22.16	22.03	22.47	23.5
	22.1	22.01	21.99	23.5
	22.45	22.81	22.23	23.5

WCDMA1900 Power Level A1

WCDMA1900	FDDII result (dBm)			tune up
	9538/9938 (1907.6MHz)	9400/9800 (1880MHz)	9262/9662 (1852.4MHz)	
	23.05	23.07	23.13	
	21.53	21.64	21.51	
HSUPA	22.12	21.05	20.52	22
	21.1	21.27	21.29	23
	21.3	20.87	21.30	21.5
	21.83	21.84	21.75	23
	21.4	21.53	21.26	23
DC-HSDPA	21.75	21.88	21.87	23.5
	21.71	21.65	21.79	23.5
	21.52	21.58	21.61	23.5
	21.58	21.99	21.54	23.5

WCDMA1700 Power Level A1

WCDMA1700	FDDIV result (dBm)			tune up
	1513/1738 (1752.6MHz)	1412/1637 (1732.4MHz)	1312/1537 (1712.4MHz)	
	23.22	23.19	23.24	
	20.03	20.00	20.15	
HSUPA	20.15	20.11	20.08	22
	21.33	21.17	21.13	23
	19.94	19.51	19.65	21.5
	21.82	21.26	21.01	23
	21.38	21.57	21.56	23
DC-HSDPA	21.75	21.62	21.87	23.5
	21.85	21.54	21.79	23.5
	21.75	21.84	21.69	23.5
	21.56	21.56	21.73	23.5

WCDMA1900 Power Level C1

FDDII result (dBm)			tune up
9538/9938 (1907.6MHz)	9400/9800 (1880MHz)	9262/9662 (1852.4MHz)	
19.16	18.84	18.92	20
17.7	17.56	17.72	18
17.34	17.22	16.42	18
17.18	17.29	17.57	19
17.34	16.89	17.21	17.5
18.05	17.78	17.98	19
HSPA+	17.49	17.81	19
DC-HSDPA	17.97 17.93 17.76 17.61	17.92 17.59 17.68 18.00	19.5 19.5 19.5 19.5
		17.98 17.94 17.51 17.72	

WCDMA1700 Power Level C1

FDDIV result (dBm)			Tune up
1513/1738 (1752.6MHz)	1412/1637 (1732.4MHz)	1312/1537 (1712.4MHz)	
16.92	17.03	16.88	17.5
14.06	14.20	14.16	16
14.1	14.41	14.20	16
16.43	16.34	16.35	17.5
13.84	13.54	13.62	15.5
15.72	15.34	15.08	17
HSPA+	15.42	15.57	17
DC-HSDPA	16 15.83 15.77 15.77	15.71 15.52 16.10 15.52	17.5 17.5 17.5 17.5
		16.00 15.79 15.59 15.64	

WCDMA1900 Power Level B1

FDDII result (dBm)			Tune up
9538/9938 (1907.6MHz)	9400/9800 (1880MHz)	9262/9662 (1852.4MHz)	
22.41	22.16	21.95	23
20.67	20.58	20.86	21
20.55	20.51	19.39	21
20.5	20.34	20.56	22
20.41	20.16	20.19	20.5
21.12	21.03	21.15	22
HSPA+	20.74	20.35	22
DC-HSDPA	20.94 21.09 20.86 20.86	21.19 20.86 20.75 21.03	22.5 22.5 22.5 22.5
		21.15 21.26 20.59 20.86	

WCDMA1700 Power Level B1

FDDIV result (dBm)				
1513/1738 (1752.6MHz)	1412/1637 (1732.4MHz)	1312/1537 (1712.4MHz)		
20.23	20.03	20.26		20.5
HSUPA	17.21 17.06 18.23 16.71 18.76	17.02 17.00 18.27 16.53 18.30	17.14 17.10 18.33 16.65 18.13	1 2 3 4 5
HSPA+	18.4	18.40	18.47	1 20
DC-HSDPA	18.62 18.62 18.78 18.47	18.50 18.51 18.86 18.62	18.75 18.66 18.66 18.55	1 2 3 4
			20.5 20.5 20.5 20.5	

11.2 LTE Measurement result

Maximum Target Power for Production Unit

Band	Tune up (dBm)		
	Power Level A1	Power Level B1	Power Level C1
Band 2	23.5	23.5	21
Band 4	24.3	21.3	18.3
Band 5	24.7	24.7	24.7
Band 12	24.5	24.5	24.5
Band 14	24	24	24

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM				≥ 1			≤ 5

LTEB2 Power Level A1/B1

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1909.3 (19193)	22.74	21.16	20.60
		1880 (18900)	22.70	21.14	20.39
		1850.7 (18607)	22.75	21.86	20.89
	1RB-Middle (3)	1909.3 (19193)	22.74	21.40	20.53
		1880 (18900)	22.66	21.30	21.00
		1850.7 (18607)	22.71	21.14	20.94
	1RB-Low (0)	1909.3 (19193)	22.67	21.25	20.59
		1880 (18900)	22.63	21.26	20.82
		1850.7 (18607)	22.66	21.17	20.43
	3RB-High (3)	1909.3 (19193)	22.71	21.92	20.45
		1880 (18900)	22.82	21.48	20.70
		1850.7 (18607)	22.77	21.85	20.31
3RB-Middle (1)	1909.3 (19193)	22.81	21.82	20.46	
	1880 (18900)	22.67	21.64	20.80	

		1850.7 (18607)	22.90	21.86	20.49
3RB-Low (0)	1909.3 (19193)	22.73	21.96	20.36	
	1880 (18900)	22.64	21.58	20.68	
	1850.7 (18607)	22.76	21.83	20.32	
6RB (0)	1909.3 (19193)	21.64	20.63	19.60	
	1880 (18900)	21.68	20.57	19.65	
	1850.7 (18607)	21.56	20.48	19.58	
3MHz	1RB-High (14)	1908.5 (19185)	22.65	21.33	20.47
		1880 (18900)	22.69	21.00	20.49
		1851.5 (18615)	22.68	21.92	20.42
	1RB-Middle (7)	1908.5 (19185)	22.78	21.55	20.67
		1880 (18900)	22.58	22.00	20.66
		1851.5 (18615)	22.80	21.65	20.83
	1RB-Low (0)	1908.5 (19185)	22.80	21.42	20.57
		1880 (18900)	22.67	21.98	20.44
		1851.5 (18615)	22.73	21.94	20.30
	8RB-High (7)	1908.5 (19185)	21.66	20.71	19.71
		1880 (18900)	21.69	20.84	19.57
		1851.5 (18615)	21.72	20.75	19.65
	8RB-Middle (4)	1908.5 (19185)	21.67	20.67	19.68
		1880 (18900)	21.75	20.79	19.62
		1851.5 (18615)	21.78	20.83	19.69
	8RB-Low (0)	1908.5 (19185)	21.67	20.55	19.33
		1880 (18900)	21.72	20.76	19.56
		1851.5 (18615)	21.75	20.80	19.67
	15RB (0)	1908.5 (19185)	21.56	20.62	19.57
		1880 (18900)	21.71	20.72	19.63
		1851.5 (18615)	21.74	20.62	19.67
5MHz	1RB-High (24)	1907.5 (19175)	22.74	21.22	20.49
		1880 (18900)	22.52	21.16	20.23
		1852.5 (18625)	22.62	21.71	20.27
	1RB-Middle (12)	1907.5 (19175)	22.85	21.47	20.51
		1880 (18900)	22.55	21.32	20.63
		1852.5 (18625)	22.84	21.75	20.70
	1RB-Low (0)	1907.5 (19175)	22.37	21.73	20.35
		1880 (18900)	22.48	21.38	20.55
		1852.5 (18625)	22.71	22.00	20.37
	12RB-High (13)	1907.5 (19175)	21.62	20.79	19.44
		1880 (18900)	21.69	20.47	19.64
		1852.5 (18625)	21.66	20.67	19.74

	12RB-Middle (6)	1907.5 (19175)	21.73	20.72	19.58
		1880 (18900)	21.76	20.54	19.70
		1852.5 (18625)	21.67	20.75	19.82
12RB-Low (0)		1907.5 (19175)	21.71	20.69	19.64
		1880 (18900)	21.73	20.63	19.65
		1852.5 (18625)	21.65	20.78	19.91
25RB (0)		1907.5 (19175)	21.61	20.69	19.66
		1880 (18900)	21.62	20.80	19.42
		1852.5 (18625)	21.72	20.63	19.85
10MHz	1RB-High (49)	1905 (19150)	22.71	21.45	20.18
		1880 (18900)	22.55	21.25	20.32
		1855 (18650)	22.67	21.20	20.58
	1RB-Middle (24)	1905 (19150)	22.74	21.35	20.35
		1880 (18900)	22.76	21.31	20.53
		1855 (18650)	22.80	21.47	20.92
	1RB-Low (0)	1905 (19150)	22.53	21.87	20.34
		1880 (18900)	22.40	21.24	20.92
		1855 (18650)	22.43	21.23	20.28
	25RB-High (25)	1905 (19150)	21.68	20.67	19.66
		1880 (18900)	21.65	20.65	19.65
		1855 (18650)	21.68	20.61	19.86
	25RB-Middle (12)	1905 (19150)	21.76	20.75	19.75
		1880 (18900)	21.66	20.66	19.76
		1855 (18650)	21.72	20.74	19.87
	25RB-Low (0)	1905 (19150)	21.66	20.74	19.63
		1880 (18900)	21.64	20.64	19.63
		1855 (18650)	21.63	20.75	19.47
	50RB (0)	1905 (19150)	21.70	20.70	19.69
		1880 (18900)	21.69	20.70	19.60
		1855 (18650)	21.66	20.68	19.62
15MHz	1RB-High (74)	1902.5 (19125)	22.68	21.27	20.38
		1880 (18900)	22.45	21.66	20.31
		1857.5 (18675)	22.54	21.17	20.41
	1RB-Middle (37)	1902.5 (19125)	22.86	21.08	20.68
		1880 (18900)	22.83	21.82	20.50
		1857.5 (18675)	22.82	21.37	20.46
	1RB-Low (0)	1902.5 (19125)	22.54	21.95	20.15
		1880 (18900)	22.56	21.19	20.78
		1857.5 (18675)	22.58	21.14	20.15
	36RB-High (38)	1902.5 (19125)	21.81	20.62	19.76

		1880 (18900)	21.75	20.68	19.75
		1857.5 (18675)	21.73	20.71	19.74
36RB-Middle (19)	1902.5 (19125)	21.67	20.64	19.79	
	1880 (18900)	21.73	20.76	19.72	
	1857.5 (18675)	21.89	20.66	19.79	
	1902.5 (19125)	21.62	20.51	19.66	
36RB-Low (0)	1880 (18900)	21.66	20.60	19.57	
	1857.5 (18675)	21.68	20.54	19.67	
	1902.5 (19125)	21.74	20.66	19.61	
75RB (0)	1880 (18900)	21.71	20.65	19.53	
	1857.5 (18675)	21.71	20.69	19.57	
20MHz	1RB-High (99)	1900 (19100)	22.85	21.28	20.18
		1880 (18900)	22.85	21.38	20.82
		1860 (18700)	22.73	21.95	20.80
	1RB-Middle (50)	1900 (19100)	22.82	21.55	20.67
		1880 (18900)	22.88	21.47	20.92
		1860 (18700)	22.70	21.52	20.99
	1RB-Low (0)	1900 (19100)	22.87	21.38	20.72
		1880 (18900)	22.90	21.36	20.88
		1860 (18700)	22.73	21.30	20.43
	50RB-High (50)	1900 (19100)	21.85	20.83	19.69
		1880 (18900)	21.91	20.87	19.80
		1860 (18700)	21.80	20.74	19.68
	50RB-Middle (25)	1900 (19100)	21.83	20.89	19.91
		1880 (18900)	21.85	20.70	19.83
		1860 (18700)	21.77	20.82	19.88
	50RB-Low (0)	1900 (19100)	21.78	20.63	19.77
		1880 (18900)	21.79	20.61	19.55
		1860 (18700)	21.76	20.70	19.66
	100RB (0)	1900 (19100)	21.84	20.72	19.72
		1880 (18900)	21.90	20.82	19.77
		1860 (18700)	21.79	20.71	19.66

LTEB2 Power Level C1

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1909.3 (19193)	20.42	18.93	17.84
		1880 (18900)	20.45	18.94	17.80
		1850.7 (18607)	20.40	18.68	18.53

	1RB-Middle (3)	1909.3 (19193) 1880 (18900) 1850.7 (18607)	20.51 20.40 20.36	19.06 18.79 18.77	17.69 18.27 18.31
	1RB-Low (0)	1909.3 (19193)	20.21	18.85	17.85
		1880 (18900)	20.28	18.99	18.04
		1850.7 (18607)	20.29	18.92	18.10
	3RB-High (3)	1909.3 (19193)	20.38	19.26	17.58
		1880 (18900)	20.51	19.62	17.38
		1850.7 (18607)	20.52	19.21	17.94
	3RB-Middle (1)	1909.3 (19193)	20.45	19.10	17.82
		1880 (18900)	20.55	19.20	17.42
		1850.7 (18607)	20.56	19.20	17.10
	3RB-Low (0)	1909.3 (19193)	20.39	19.68	17.70
		1880 (18900)	20.31	19.31	17.41
		1850.7 (18607)	20.52	19.10	17.91
	6RB (0)	1909.3 (19193)	19.34	18.43	17.55
		1880 (18900)	19.39	18.45	16.93
		1850.7 (18607)	19.39	18.14	17.15
3MHz	1RB-High (14)	1908.5 (19185)	20.23	18.98	17.80
		1880 (18900)	20.49	18.48	17.46
		1851.5 (18615)	20.53	19.16	17.14
	1RB-Middle (7)	1908.5 (19185)	20.15	19.14	17.80
		1880 (18900)	20.56	19.85	17.85
		1851.5 (18615)	20.71	19.38	17.79
	1RB-Low (0)	1908.5 (19185)	20.14	18.91	17.69
		1880 (18900)	20.43	18.64	17.31
		1851.5 (18615)	20.57	19.22	17.09
	8RB-High (7)	1908.5 (19185)	19.38	18.27	17.12
		1880 (18900)	19.10	18.28	17.26
		1851.5 (18615)	19.37	18.12	17.20
	8RB-Middle (4)	1908.5 (19185)	19.39	18.17	17.11
		1880 (18900)	19.10	17.47	17.63
		1851.5 (18615)	19.40	18.16	17.14
	8RB-Low (0)	1908.5 (19185)	19.35	18.07	17.01
		1880 (18900)	19.09	18.25	17.55
		1851.5 (18615)	19.42	18.16	17.18
	15RB (0)	1908.5 (19185)	19.33	18.88	17.88
		1880 (18900)	18.45	17.85	17.77
		1851.5 (18615)	18.45	18.39	17.47
5MHz	1RB-High (24)	1907.5 (19175)	20.30	18.73	18.12

		1880 (18900)	20.42	18.69	18.59
		1852.5 (18625)	20.38	19.15	18.43
1RB-Middle (12)	1907.5 (19175)	20.63	19.14	18.52	
	1880 (18900)	20.23	19.11	18.53	
	1852.5 (18625)	20.53	19.13	18.58	
1RB-Low (0)	1907.5 (19175)	20.37	18.34	18.32	
	1880 (18900)	20.28	18.73	18.07	
	1852.5 (18625)	20.37	18.89	18.41	
12RB-High (13)	1907.5 (19175)	19.44	18.40	17.53	
	1880 (18900)	19.44	18.41	17.45	
	1852.5 (18625)	19.47	18.30	17.52	
12RB-Middle (6)	1907.5 (19175)	19.55	18.39	17.56	
	1880 (18900)	19.50	18.59	17.36	
	1852.5 (18625)	19.46	18.38	17.52	
12RB-Low (0)	1907.5 (19175)	19.54	18.42	17.55	
	1880 (18900)	19.47	18.54	17.34	
	1852.5 (18625)	19.44	18.37	17.49	
25RB (0)	1907.5 (19175)	19.33	18.50	17.31	
	1880 (18900)	19.44	18.45	17.55	
	1852.5 (18625)	19.42	18.43	17.53	
10MHz	1RB-High (49)	1905 (19150)	20.34	19.07	18.94
		1880 (18900)	20.57	19.18	17.21
		1855 (18650)	20.32	19.04	17.38
	1RB-Middle (24)	1905 (19150)	20.50	19.54	18.99
		1880 (18900)	20.57	19.40	17.11
		1855 (18650)	20.58	19.09	17.86
	1RB-Low (0)	1905 (19150)	20.27	18.58	18.91
		1880 (18900)	20.47	19.01	17.88
		1855 (18650)	20.25	19.03	17.43
	25RB-High (25)	1905 (19150)	19.38	18.63	17.82
		1880 (18900)	19.50	18.49	17.01
		1855 (18650)	19.51	18.55	17.98
	25RB-Middle (12)	1905 (19150)	19.36	18.52	17.80
		1880 (18900)	19.60	18.60	17.17
		1855 (18650)	19.51	18.70	17.02
	25RB-Low (0)	1905 (19150)	19.40	18.49	17.80
		1880 (18900)	19.49	18.68	17.39
		1855 (18650)	19.44	18.45	17.14
	50RB (0)	1905 (19150)	19.39	18.38	17.93
		1880 (18900)	19.54	18.64	17.86
		1855 (18650)	19.46	18.47	17.98

15MHz	1RB-High (74)	1902.5 (19125)	20.58	18.61	18.83
		1880 (18900)	20.56	19.06	18.28
		1857.5 (18675)	20.66	19.65	18.30
	1RB-Middle (37)	1902.5 (19125)	20.50	19.03	18.17
		1880 (18900)	20.63	19.70	18.28
		1857.5 (18675)	20.59	18.87	18.25
	1RB-Low (0)	1902.5 (19125)	20.57	19.22	18.21
		1880 (18900)	20.59	19.15	18.75
		1857.5 (18675)	20.52	19.21	18.39
	36RB-High (38)	1902.5 (19125)	19.57	18.49	17.61
		1880 (18900)	19.62	18.55	17.55
		1857.5 (18675)	19.70	18.55	17.65
	36RB-Middle (19)	1902.5 (19125)	19.44	18.48	17.50
		1880 (18900)	19.69	18.71	17.71
		1857.5 (18675)	19.70	18.57	17.65
	36RB-Low (0)	1902.5 (19125)	19.56	18.49	17.48
		1880 (18900)	19.52	18.66	17.55
		1857.5 (18675)	19.51	18.55	17.55
	75RB (0)	1902.5 (19125)	19.62	18.54	17.42
		1880 (18900)	19.67	18.52	17.67
		1857.5 (18675)	19.68	18.61	17.46
20MHz	1RB-High (99)	1900 (19100)	20.72	19.26	18.93
		1880 (18900)	20.66	19.47	18.91
		1860 (18700)	20.72	19.28	18.84
	1RB-Middle (50)	1900 (19100)	20.82	19.65	18.66
		1880 (18900)	20.87	19.56	18.65
		1860 (18700)	20.79	19.44	18.73
	1RB-Low (0)	1900 (19100)	20.90	19.44	18.80
		1880 (18900)	20.95	19.24	18.34
		1860 (18700)	20.81	19.35	18.40
	50RB-High (50)	1900 (19100)	19.96	18.91	17.71
		1880 (18900)	19.99	18.85	17.75
		1860 (18700)	19.97	18.88	17.71
	50RB-Middle (25)	1900 (19100)	19.95	18.81	17.84
		1880 (18900)	19.86	18.87	17.77
		1860 (18700)	19.85	18.83	17.75
	50RB-Low (0)	1900 (19100)	19.93	18.92	17.82
		1880 (18900)	19.94	18.81	17.82
		1860 (18700)	19.92	18.70	17.63
	100RB (0)	1900 (19100)	19.93	18.77	17.76

		1880 (18900)	19.97	18.91	17.82
		1860 (18700)	19.96	18.84	17.77

LTEB4 Power Level A1

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1754.3 (20393)	23.34	21.82	21.89
		1732.5 (20175)	23.44	22.05	21.19
		1710.7 (19957)	23.24	22.41	21.58
	1RB-Middle (3)	1754.3 (20393)	23.35	22.10	21.93
		1732.5 (20175)	23.42	22.25	21.33
		1710.7 (19957)	23.27	21.86	21.73
	1RB-Low (0)	1754.3 (20393)	23.27	22.00	21.70
		1732.5 (20175)	23.27	21.99	21.13
		1710.7 (19957)	23.11	21.97	21.61
	3RB-High (3)	1754.3 (20393)	23.43	22.55	21.54
		1732.5 (20175)	23.45	22.32	21.55
		1710.7 (19957)	23.32	22.63	21.43
	3RB-Middle (1)	1754.3 (20393)	23.37	22.69	21.93
		1732.5 (20175)	23.49	22.73	21.56
		1710.7 (19957)	23.42	22.69	21.42
	3RB-Low (0)	1754.3 (20393)	23.32	22.69	21.72
		1732.5 (20175)	23.45	22.45	21.47
		1710.7 (19957)	23.37	22.47	21.09
	6RB (0)	1754.3 (20393)	22.32	21.49	20.57
		1732.5 (20175)	22.44	21.33	20.15
		1710.7 (19957)	22.19	21.19	20.38
3MHz	1RB-High (14)	1753.5 (20385)	23.42	22.44	21.73
		1732.5 (20175)	23.42	22.75	21.69
		1711.5 (19965)	23.36	22.48	21.87
	1RB-Middle (7)	1753.5 (20385)	23.41	21.91	21.96
		1732.5 (20175)	23.46	22.55	21.73
		1711.5 (19965)	23.63	22.00	21.63
	1RB-Low (0)	1753.5 (20385)	23.23	21.74	21.88
		1732.5 (20175)	23.24	22.15	21.88
		1711.5 (19965)	23.32	21.93	21.32
	8RB-High (7)	1753.5 (20385)	22.24	21.64	20.37
		1732.5 (20175)	22.41	21.44	20.59

		1711.5 (19965)	22.60	21.74	20.33
8RB-Middle (4)	1753.5 (20385)	22.29	21.42	20.51	
	1732.5 (20175)	22.48	21.54	20.47	
	1711.5 (19965)	22.34	21.45	20.31	
8RB-Low (0)	1753.5 (20385)	22.26	21.38	20.32	
	1732.5 (20175)	22.48	21.53	20.43	
	1711.5 (19965)	22.30	21.74	20.27	
15RB (0)	1753.5 (20385)	22.24	21.34	20.18	
	1732.5 (20175)	22.45	21.47	20.31	
	1711.5 (19965)	22.18	21.20	20.08	
5MHz	1RB-High (24)	1752.5 (20375)	23.54	22.76	21.39
		1732.5 (20175)	23.36	21.91	21.44
		1712.5 (19975)	23.48	21.91	21.55
	1RB-Middle (12)	1752.5 (20375)	23.40	22.71	21.16
		1732.5 (20175)	23.67	22.16	21.55
		1712.5 (19975)	23.63	22.16	21.56
	1RB-Low (0)	1752.5 (20375)	23.33	22.48	21.98
		1732.5 (20175)	23.41	22.12	21.05
		1712.5 (19975)	23.17	21.85	20.91
	12RB-High (13)	1752.5 (20375)	22.60	21.42	20.28
		1732.5 (20175)	22.41	21.48	20.43
		1712.5 (19975)	22.42	21.42	20.79
	12RB-Middle (6)	1752.5 (20375)	22.59	21.41	20.29
		1732.5 (20175)	22.44	21.41	20.44
		1712.5 (19975)	22.48	21.36	20.51
	12RB-Low (0)	1752.5 (20375)	22.37	21.31	20.36
		1732.5 (20175)	22.33	21.40	20.22
		1712.5 (19975)	22.31	21.30	20.44
	25RB (0)	1752.5 (20375)	22.43	21.53	20.42
		1732.5 (20175)	22.38	21.55	20.35
		1712.5 (19975)	22.43	21.42	20.42
10MHz	1RB-High (49)	1750 (20350)	23.43	22.08	21.37
		1732.5 (20175)	23.23	21.96	21.18
		1715 (20000)	23.19	21.80	20.96
	1RB-Middle (24)	1750 (20350)	23.40	22.49	21.55
		1732.5 (20175)	23.45	22.22	21.35
		1715 (20000)	23.46	22.43	21.35
	1RB-Low (0)	1750 (20350)	23.32	21.49	21.96
		1732.5 (20175)	23.01	21.70	21.12
		1715 (20000)	23.23	21.44	20.88

	25RB-High (25)	1750 (20350)	22.43	21.42	20.39
		1732.5 (20175)	22.40	21.51	20.37
		1715 (20000)	22.48	21.09	20.49
25RB-Middle (12)		1750 (20350)	22.36	21.37	20.49
		1732.5 (20175)	22.29	21.56	20.36
		1715 (20000)	22.63	21.63	20.58
	25RB-Low (0)	1750 (20350)	22.29	21.48	20.32
		1732.5 (20175)	22.26	21.57	20.19
		1715 (20000)	22.39	21.37	20.48
	50RB (0)	1750 (20350)	22.38	21.41	20.28
		1732.5 (20175)	22.51	21.44	20.02
		1715 (20000)	22.52	21.39	20.18
15MHz	1RB-High (74)	1747.5 (20325)	23.39	22.18	21.20
		1732.5 (20175)	22.93	21.82	20.93
		1717.5 (20025)	23.38	22.51	21.17
	1RB-Middle (37)	1747.5 (20325)	23.34	22.57	21.02
		1732.5 (20175)	23.34	21.88	20.99
		1717.5 (20025)	23.34	22.56	21.00
	1RB-Low (0)	1747.5 (20325)	23.20	21.89	21.87
		1732.5 (20175)	22.99	21.49	21.05
		1717.5 (20025)	23.18	21.73	21.04
	36RB-High (38)	1747.5 (20325)	22.20	21.20	20.30
		1732.5 (20175)	22.31	21.38	20.26
		1717.5 (20025)	22.42	21.41	20.47
	36RB-Middle (19)	1747.5 (20325)	22.38	21.40	20.37
		1732.5 (20175)	22.23	21.58	20.28
		1717.5 (20025)	22.22	21.43	20.27
	36RB-Low (0)	1747.5 (20325)	22.19	21.30	20.39
		1732.5 (20175)	22.38	21.44	20.13
		1717.5 (20025)	22.32	21.52	20.55
	75RB (0)	1747.5 (20325)	22.37	21.31	20.41
		1732.5 (20175)	22.38	21.36	20.38
		1717.5 (20025)	22.33	21.42	20.35
20MHz	1RB-High (99)	1745 (20300)	23.30	22.02	21.70
		1732.5 (20175)	23.06	21.77	21.59
		1720 (20050)	23.05	22.50	21.17
	1RB-Middle (50)	1745 (20300)	23.54	22.19	21.50
		1732.5 (20175)	23.11	22.53	21.27
		1720 (20050)	23.12	22.54	21.13
	1RB-Low (0)	1745 (20300)	23.59	22.20	21.32

		1732.5 (20175)	23.20	21.95	21.26
		1720 (20050)	23.15	21.31	20.88
50RB-High (50)	1745 (20300)	22.31	21.28	20.36	
	1732.5 (20175)	22.23	21.42	20.22	
	1720 (20050)	22.47	21.49	20.49	
50RB-Middle (25)	1745 (20300)	22.26	21.53	20.42	
	1732.5 (20175)	22.18	21.28	20.52	
	1720 (20050)	22.25	21.47	20.24	
50RB-Low (0)	1745 (20300)	22.27	21.43	20.33	
	1732.5 (20175)	22.29	21.38	20.38	
	1720 (20050)	22.39	21.59	20.38	
100RB (0)	1745 (20300)	22.39	21.35	20.38	
	1732.5 (20175)	22.36	21.34	20.35	
	1720 (20050)	22.48	21.46	20.51	

LTEB4 Power Level C1

BANDWIDT H	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1754.3 (20393)	18.01	16.56	15.66
		1732.5 (20175)	17.83	16.58	15.66
		1710.7 (19957)	17.85	17.06	15.49
	1RB-Middle (3)	1754.3 (20393)	18.05	16.61	15.83
		1732.5 (20175)	17.92	16.62	15.91
		1710.7 (19957)	18.01	17.10	15.64
	1RB-Low (0)	1754.3 (20393)	18.00	16.52	15.61
		1732.5 (20175)	17.87	16.59	15.85
		1710.7 (19957)	17.71	16.20	15.72
	3RB-High (3)	1754.3 (20393)	18.29	17.19	16.19
		1732.5 (20175)	18.07	16.90	15.95
		1710.7 (19957)	17.97	16.90	16.13
	3RB-Middle (1)	1754.3 (20393)	18.23	17.20	16.17
		1732.5 (20175)	18.22	16.92	16.25
		1710.7 (19957)	18.07	16.87	16.26
	3RB-Low (0)	1754.3 (20393)	18.07	17.25	16.19
		1732.5 (20175)	18.08	16.79	16.08
		1710.7 (19957)	17.98	16.78	16.04
	6RB (0)	1754.3 (20393)	17.02	15.83	14.96
		1732.5 (20175)	17.00	15.78	15.06
		1710.7 (19957)	16.94	15.70	14.78

3MHz	1RB-High (14)	1753.5 (20385)	17.91	16.27	15.69
		1732.5 (20175)	17.73	17.07	15.88
		1711.5 (19965)	17.81	16.51	15.75
	1RB-Middle (7)	1753.5 (20385)	17.78	16.59	15.42
		1732.5 (20175)	18.07	16.69	16.07
		1711.5 (19965)	17.85	16.98	15.99
	1RB-Low (0)	1753.5 (20385)	17.66	16.29	15.80
		1732.5 (20175)	18.11	16.65	15.53
		1711.5 (19965)	17.81	16.38	15.55
	8RB-High (7)	1753.5 (20385)	17.00	15.93	15.02
		1732.5 (20175)	17.05	15.51	14.82
		1711.5 (19965)	17.07	15.90	14.78
	8RB-Middle (4)	1753.5 (20385)	17.05	15.98	14.87
		1732.5 (20175)	17.01	15.97	15.07
		1711.5 (19965)	17.01	15.75	14.74
	8RB-Low (0)	1753.5 (20385)	16.93	15.98	14.89
		1732.5 (20175)	17.00	15.66	15.06
		1711.5 (19965)	16.95	15.88	14.98
	15RB (0)	1753.5 (20385)	16.90	15.94	14.85
		1732.5 (20175)	16.98	15.89	14.92
		1711.5 (19965)	17.06	15.95	14.89
5MHz	1RB-High (24)	1752.5 (20375)	18.20	16.76	15.43
		1732.5 (20175)	17.86	16.57	15.54
		1712.5 (19975)	17.75	16.42	15.59
	1RB-Middle (12)	1752.5 (20375)	18.15	16.72	15.63
		1732.5 (20175)	17.91	16.77	15.43
		1712.5 (19975)	17.84	16.71	15.79
	1RB-Low (0)	1752.5 (20375)	17.94	16.55	15.31
		1732.5 (20175)	18.12	16.61	15.59
		1712.5 (19975)	17.80	16.33	15.60
	12RB-High (13)	1752.5 (20375)	17.14	16.11	14.87
		1732.5 (20175)	16.93	15.83	14.70
		1712.5 (19975)	17.00	15.74	14.67
	12RB-Middle (6)	1752.5 (20375)	17.03	15.92	14.74
		1732.5 (20175)	17.03	15.83	14.81
		1712.5 (19975)	16.93	15.72	14.59
	12RB-Low (0)	1752.5 (20375)	16.95	15.95	14.64
		1732.5 (20175)	17.02	15.72	14.68
		1712.5 (19975)	16.87	15.65	14.49
	25RB (0)	1752.5 (20375)	17.09	16.07	15.06

		1732.5 (20175)	16.99	15.89	14.89
		1712.5 (19975)	17.00	15.65	14.90
10MHz	1RB-High (49)	1750 (20350)	18.07	16.66	15.85
		1732.5 (20175)	18.04	16.80	15.73
		1715 (20000)	18.03	16.53	15.77
	1RB-Middle (24)	1750 (20350)	18.08	17.10	15.79
		1732.5 (20175)	18.09	17.12	15.98
		1715 (20000)	18.13	16.85	15.94
	1RB-Low (0)	1750 (20350)	18.04	16.57	15.76
		1732.5 (20175)	18.14	16.62	15.82
		1715 (20000)	17.91	16.60	15.63
	25RB-High (25)	1750 (20350)	17.07	15.85	14.88
		1732.5 (20175)	16.93	15.74	15.17
		1715 (20000)	17.06	16.02	15.14
	25RB-Middle (12)	1750 (20350)	17.23	16.03	14.95
		1732.5 (20175)	16.99	16.10	15.23
		1715 (20000)	17.13	16.09	14.92
	25RB-Low (0)	1750 (20350)	17.09	15.99	14.91
		1732.5 (20175)	16.93	15.82	14.96
		1715 (20000)	16.96	15.93	14.73
	50RB (0)	1750 (20350)	17.17	16.08	15.08
		1732.5 (20175)	17.03	15.72	14.98
		1715 (20000)	17.12	15.99	15.05
15MHz	1RB-High (74)	1747.5 (20325)	18.06	17.29	15.64
		1732.5 (20175)	18.09	16.85	15.61
		1717.5 (20025)	17.83	16.57	15.65
	1RB-Middle (37)	1747.5 (20325)	18.24	17.29	15.90
		1732.5 (20175)	17.97	17.11	15.68
		1717.5 (20025)	18.06	16.62	15.85
	1RB-Low (0)	1747.5 (20325)	18.16	16.81	15.20
		1732.5 (20175)	17.82	16.64	15.29
		1717.5 (20025)	17.70	16.03	15.25
	36RB-High (38)	1747.5 (20325)	17.18	15.96	15.03
		1732.5 (20175)	16.99	15.77	14.88
		1717.5 (20025)	17.03	16.05	14.84
	36RB-Middle (19)	1747.5 (20325)	17.21	16.10	15.17
		1732.5 (20175)	17.02	15.83	15.03
		1717.5 (20025)	17.08	15.99	14.87
	36RB-Low (0)	1747.5 (20325)	17.16	16.05	15.02
		1732.5 (20175)	16.95	15.74	14.95

		1717.5 (20025)	17.02	15.83	15.02
75RB (0)		1747.5 (20325)	17.20	16.00	14.97
		1732.5 (20175)	16.99	15.91	14.92
		1717.5 (20025)	17.13	15.95	15.04
20MHz	1RB-High (99)	1745 (20300)	17.74	16.21	14.49
		1732.5 (20175)	17.82	16.11	14.52
		1720 (20050)	17.90	17.14	15.08
	1RB-Middle (50)	1745 (20300)	17.82	17.23	15.84
		1732.5 (20175)	17.83	16.48	15.67
		1720 (20050)	17.98	17.05	15.91
	1RB-Low (0)	1745 (20300)	18.01	16.83	14.34
		1732.5 (20175)	17.89	16.07	14.82
		1720 (20050)	17.98	16.33	14.89
	50RB-High (50)	1745 (20300)	16.92	15.85	14.79
		1732.5 (20175)	16.97	15.88	14.52
		1720 (20050)	17.06	15.84	14.61
	50RB-Middle (25)	1745 (20300)	16.86	15.95	14.02
		1732.5 (20175)	16.90	15.93	14.70
		1720 (20050)	16.96	15.85	14.70
	50RB-Low (0)	1745 (20300)	16.78	15.84	14.85
		1732.5 (20175)	16.85	15.87	14.64
		1720 (20050)	16.96	15.71	14.53
	100RB (0)	1745 (20300)	16.79	15.96	14.29
		1732.5 (20175)	16.96	15.88	14.54
		1720 (20050)	17.07	15.91	14.99

LTEB4 Power Level B1

BANDWIDT H	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1754.3 (20393)	21.00	19.59	19.26
		1732.5 (20175)	20.65	19.36	19.12
		1710.7 (19957)	20.81	19.55	18.80
	1RB-Middle (3)	1754.3 (20393)	21.02	19.73	18.66
		1732.5 (20175)	20.90	19.65	18.75
		1710.7 (19957)	20.92	19.65	18.82
	1RB-Low (0)	1754.3 (20393)	20.92	19.51	19.28
		1732.5 (20175)	20.76	19.29	19.07
		1710.7 (19957)	20.78	19.53	18.76

	3RB-High (3)	1754.3 (20393)	21.10	19.71	18.62
		1732.5 (20175)	20.97	19.86	18.59
		1710.7 (19957)	21.06	19.94	18.93
	3RB-Middle (1)	1754.3 (20393)	21.11	19.84	18.51
		1732.5 (20175)	21.02	19.85	18.74
		1710.7 (19957)	21.26	19.77	18.99
	3RB-Low (0)	1754.3 (20393)	20.86	19.80	18.51
		1732.5 (20175)	20.96	19.74	18.24
		1710.7 (19957)	21.09	19.81	19.00
	6RB (0)	1754.3 (20393)	19.94	18.93	17.81
		1732.5 (20175)	20.00	19.03	17.96
		1710.7 (19957)	20.02	18.98	17.95
3MHz	1RB-High (14)	1753.5 (20385)	21.00	19.86	18.51
		1732.5 (20175)	20.85	19.43	18.64
		1711.5 (19965)	20.73	20.18	19.11
	1RB-Middle (7)	1753.5 (20385)	21.27	19.63	18.98
		1732.5 (20175)	21.07	19.70	19.11
		1711.5 (19965)	20.81	20.27	19.20
	1RB-Low (0)	1753.5 (20385)	20.80	19.41	19.05
		1732.5 (20175)	20.99	19.44	19.04
		1711.5 (19965)	20.88	19.88	19.17
	8RB-High (7)	1753.5 (20385)	19.96	19.01	17.95
		1732.5 (20175)	20.03	18.96	17.84
		1711.5 (19965)	20.08	19.07	18.12
	8RB-Middle (4)	1753.5 (20385)	19.91	18.97	17.92
		1732.5 (20175)	19.99	19.04	17.87
		1711.5 (19965)	20.02	18.99	18.04
	8RB-Low (0)	1753.5 (20385)	19.98	18.88	17.81
		1732.5 (20175)	19.98	18.99	17.92
		1711.5 (19965)	19.97	19.05	18.16
	15RB (0)	1753.5 (20385)	19.86	18.99	17.85
		1732.5 (20175)	20.05	19.01	18.22
		1711.5 (19965)	20.08	19.02	18.14
5MHz	1RB-High (24)	1752.5 (20375)	20.86	20.21	18.71
		1732.5 (20175)	20.71	19.21	18.51
		1712.5 (19975)	20.76	19.41	18.63
	1RB-Middle (12)	1752.5 (20375)	20.98	20.07	18.94
		1732.5 (20175)	20.94	19.55	19.09
		1712.5 (19975)	20.69	19.44	19.12
	1RB-Low (0)	1752.5 (20375)	20.72	19.18	18.76

		1732.5 (20175)	20.60	19.57	18.87
		1712.5 (19975)	20.54	19.22	18.81
12RB-High (13)	12RB-High (13)	1752.5 (20375)	20.08	18.90	17.84
		1732.5 (20175)	19.91	18.90	17.94
		1712.5 (19975)	19.88	18.87	17.83
		1752.5 (20375)	20.04	18.92	17.73
12RB-Middle (6)	12RB-Middle (6)	1732.5 (20175)	20.03	18.72	17.84
		1712.5 (19975)	19.96	18.98	17.85
		1752.5 (20375)	19.93	18.89	17.52
12RB-Low (0)	12RB-Low (0)	1732.5 (20175)	19.92	19.02	17.33
		1712.5 (19975)	19.83	18.85	17.77
		1752.5 (20375)	19.98	18.94	17.86
25RB (0)	25RB (0)	1732.5 (20175)	19.88	18.87	17.98
		1712.5 (19975)	19.91	18.81	18.08
10MHz	1RB-High (49)	1750 (20350)	21.29	19.88	19.06
		1732.5 (20175)	21.16	20.19	18.82
		1715 (20000)	21.16	19.70	18.84
	1RB-Middle (24)	1750 (20350)	21.02	19.62	18.86
		1732.5 (20175)	21.09	19.56	18.83
		1715 (20000)	21.17	19.59	18.96
	1RB-Low (0)	1750 (20350)	21.06	19.64	18.77
		1732.5 (20175)	21.02	19.51	18.38
		1715 (20000)	21.07	19.56	18.83
	25RB-High (25)	1750 (20350)	20.09	18.97	18.11
		1732.5 (20175)	20.08	18.98	18.08
		1715 (20000)	20.16	19.25	18.12
	25RB-Middle (12)	1750 (20350)	20.13	19.20	18.24
		1732.5 (20175)	20.05	19.05	18.05
		1715 (20000)	20.18	19.27	18.23
	25RB-Low (0)	1750 (20350)	20.15	19.25	17.26
		1732.5 (20175)	20.06	19.05	17.88
		1715 (20000)	20.13	19.12	18.08
	50RB (0)	1750 (20350)	20.14	19.15	18.30
		1732.5 (20175)	20.07	19.07	18.09
		1715 (20000)	20.24	19.02	18.09
15MHz	1RB-High (74)	1747.5 (20325)	21.03	19.44	18.35
		1732.5 (20175)	20.68	19.46	18.60
		1717.5 (20025)	20.78	19.46	18.42
	1RB-Middle (37)	1747.5 (20325)	20.96	19.54	18.33
		1732.5 (20175)	20.84	19.46	18.37

		1717.5 (20025)	20.94	19.50	18.41
1RB-Low (0)	1747.5 (20325)	21.03	19.69	18.21	
	1732.5 (20175)	20.78	19.35	18.35	
	1717.5 (20025)	20.64	19.05	18.33	
36RB-High (38)	1747.5 (20325)	20.11	19.01	17.51	
	1732.5 (20175)	19.88	18.94	17.49	
	1717.5 (20025)	19.98	19.04	17.31	
36RB-Middle (19)	1747.5 (20325)	20.12	18.91	17.64	
	1732.5 (20175)	19.96	18.99	17.57	
	1717.5 (20025)	20.06	19.12	18.26	
36RB-Low (0)	1747.5 (20325)	20.06	18.94	18.11	
	1732.5 (20175)	19.86	18.89	18.00	
	1717.5 (20025)	20.03	18.99	18.20	
75RB (0)	1747.5 (20325)	20.11	19.12	18.03	
	1732.5 (20175)	19.92	18.97	17.96	
	1717.5 (20025)	20.11	19.07	18.07	
20MHz	1RB-High (99)	1745 (20300)	21.02	19.53	18.61
		1732.5 (20175)	20.77	19.40	18.64
		1720 (20050)	20.82	19.52	18.52
	1RB-Middle (50)	1745 (20300)	21.08	19.47	18.90
		1732.5 (20175)	20.92	19.54	18.89
		1720 (20050)	21.02	19.70	19.19
	1RB-Low (0)	1745 (20300)	21.15	19.73	19.04
		1732.5 (20175)	20.95	19.16	18.76
		1720 (20050)	21.05	18.94	19.05
	50RB-High (50)	1745 (20300)	20.10	18.96	18.01
		1732.5 (20175)	20.05	18.93	17.92
		1720 (20050)	20.12	19.08	18.08
	50RB-Middle (25)	1745 (20300)	20.01	19.26	18.20
		1732.5 (20175)	20.03	18.90	18.06
		1720 (20050)	20.07	19.08	18.17
	50RB-Low (0)	1745 (20300)	20.08	19.11	18.01
		1732.5 (20175)	20.06	18.98	18.05
		1720 (20050)	20.03	19.08	18.08
	100RB (0)	1745 (20300)	20.17	19.05	18.04
		1732.5 (20175)	20.08	18.99	17.94
		1720 (20050)	20.13	19.17	18.06

LTEB5 Power Level A1/B1/C1

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	848.3 (20643)	23.71	23.27	22.67
		836.5 (20525)	23.90	22.39	22.25
		824.7 (20407)	23.86	23.36	22.19
	1RB-Middle (3)	848.3 (20643)	23.83	23.44	21.83
		836.5 (20525)	23.95	22.79	21.81
		824.7 (20407)	23.90	23.35	22.17
	1RB-Low (0)	848.3 (20643)	23.89	23.24	22.52
		836.5 (20525)	23.90	22.42	22.15
		824.7 (20407)	23.78	23.36	22.08
	3RB-High (3)	848.3 (20643)	24.09	22.77	21.88
		836.5 (20525)	24.07	22.78	21.89
		824.7 (20407)	23.94	22.79	21.79
	3RB-Middle (1)	848.3 (20643)	23.99	23.11	21.94
		836.5 (20525)	24.16	22.87	21.74
		824.7 (20407)	23.96	22.76	21.82
	3RB-Low (0)	848.3 (20643)	23.95	23.06	21.81
		836.5 (20525)	23.98	22.89	21.94
		824.7 (20407)	23.89	22.79	21.94
	6RB (0)	848.3 (20643)	22.86	21.85	20.75
		836.5 (20525)	22.89	21.71	20.79
		824.7 (20407)	22.80	21.71	20.91
3MHz	1RB-High (14)	847.5 (20635)	23.93	22.44	22.05
		836.5 (20525)	24.07	23.02	22.01
		825.5 (20415)	24.02	22.49	21.92
	1RB-Middle (7)	847.5 (20635)	24.03	22.76	22.11
		836.5 (20525)	24.10	23.36	22.15
		825.5 (20415)	24.34	22.70	22.05
	1RB-Low (0)	847.5 (20635)	24.01	22.89	22.09
		836.5 (20525)	23.91	23.14	21.64
		825.5 (20415)	23.82	22.29	21.91
	8RB-High (7)	847.5 (20635)	22.98	21.87	20.85
		836.5 (20525)	22.97	21.76	20.96
		825.5 (20415)	23.02	22.01	21.00
	8RB-Middle (4)	847.5 (20635)	23.00	21.87	20.97
		836.5 (20525)	23.06	22.14	21.03
		825.5 (20415)	23.04	22.04	21.10
	8RB-Low (0)	847.5 (20635)	22.92	21.83	20.91

		836.5 (20525)	23.06	22.06	21.04
		825.5 (20415)	23.03	22.03	20.91
15RB (0)	15RB (0)	847.5 (20635)	22.95	21.91	21.02
		836.5 (20525)	23.02	22.06	21.07
		825.5 (20415)	22.98	22.01	21.02
5MHz	1RB-High (24)	846.5 (20625)	23.75	22.32	22.51
		836.5 (20525)	23.82	22.51	21.58
		826.5 (20425)	23.82	22.28	22.01
	1RB-Middle (12)	846.5 (20625)	23.81	22.41	21.87
		836.5 (20525)	23.88	22.89	21.97
		826.5 (20425)	23.88	22.57	22.03
	1RB-Low (0)	846.5 (20625)	23.69	22.29	22.64
		836.5 (20525)	23.73	22.18	21.35
		826.5 (20425)	23.76	22.12	21.74
	12RB-High (13)	846.5 (20625)	22.82	21.76	20.73
		836.5 (20525)	22.78	21.80	20.98
		826.5 (20425)	22.88	21.93	20.88
	12RB-Middle (6)	846.5 (20625)	22.94	21.73	20.93
		836.5 (20525)	22.90	21.76	20.90
		826.5 (20425)	22.92	21.88	20.80
	12RB-Low (0)	846.5 (20625)	22.79	21.72	20.71
		836.5 (20525)	22.74	21.58	20.66
		826.5 (20425)	22.76	21.87	20.73
	25RB (0)	846.5 (20625)	22.71	21.74	20.82
		836.5 (20525)	22.91	21.85	20.79
		826.5 (20425)	22.83	21.86	21.08
10MHz	1RB-High (49)	844 (20600)	23.67	23.04	21.53
		836.5 (20525)	23.72	22.33	21.60
		829 (20450)	23.72	22.27	22.09
	1RB-Middle (24)	844 (20600)	23.68	22.65	22.19
		836.5 (20525)	23.68	22.83	22.22
		829 (20450)	23.69	23.03	22.25
	1RB-Low (0)	844 (20600)	23.73	22.16	21.55
		836.5 (20525)	23.75	22.42	21.57
		829 (20450)	23.76	22.45	21.54
	25RB-High (25)	844 (20600)	22.78	21.77	20.89
		836.5 (20525)	22.81	21.92	21.03
		829 (20450)	22.77	21.79	20.91
	25RB-Middle (12)	844 (20600)	22.89	21.98	20.88
		836.5 (20525)	22.88	22.10	21.22

		829 (20450)	23.00	22.03	20.96
25RB-Low (0)	844 (20600)	22.83	21.82	20.74	
	836.5 (20525)	22.84	21.86	20.78	
	829 (20450)	22.89	21.92	20.71	
50RB (0)	844 (20600)	22.79	21.79	20.92	
	836.5 (20525)	22.92	21.75	20.87	
	829 (20450)	22.83	21.86	20.88	

LTEB12 Power Level A1/B1/C1

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	715.3 (23173)	23.78	23.00	21.70
		707.5 (23095)	24.05	22.53	21.83
		699.7 (23017)	23.94	22.76	22.04
	1RB-Middle (3)	715.3 (23173)	23.82	22.50	21.75
		707.5 (23095)	23.98	22.78	21.80
		699.7 (23017)	23.92	22.60	21.80
	1RB-Low (0)	715.3 (23173)	23.66	22.16	21.77
		707.5 (23095)	23.84	22.59	21.56
		699.7 (23017)	23.64	22.58	21.72
	3RB-High (3)	715.3 (23173)	23.93	22.70	22.37
		707.5 (23095)	24.02	22.91	22.13
		699.7 (23017)	24.00	22.59	21.58
	3RB-Middle (1)	715.3 (23173)	24.08	22.87	21.44
		707.5 (23095)	24.41	22.79	21.56
		699.7 (23017)	23.85	23.15	21.43
	3RB-Low (0)	715.3 (23173)	23.95	22.73	21.33
		707.5 (23095)	24.00	22.90	21.43
		699.7 (23017)	24.04	22.77	21.42
	6RB (0)	715.3 (23173)	22.92	21.59	21.33
		707.5 (23095)	23.01	22.00	21.04
		699.7 (23017)	22.90	21.29	20.80
3MHz	1RB-High (14)	714.5 (23165)	23.87	22.56	22.04
		707.5 (23095)	23.82	22.29	21.89
		700.5 (23025)	23.89	22.67	22.21
	1RB-Middle (7)	714.5 (23165)	24.00	22.56	21.99
		707.5 (23095)	23.99	22.71	21.82
		700.5 (23025)	23.95	22.67	22.10

	1RB-Low (0)	714.5 (23165)	23.81	22.37	21.43
		707.5 (23095)	23.91	22.61	21.49
		700.5 (23025)	23.93	22.61	21.52
	8RB-High (7)	714.5 (23165)	22.98	21.96	20.86
		707.5 (23095)	23.12	22.21	21.08
		700.5 (23025)	23.08	21.92	20.97
	8RB-Middle (4)	714.5 (23165)	22.87	21.91	21.04
		707.5 (23095)	23.06	22.22	21.06
		700.5 (23025)	22.87	21.92	20.83
	8RB-Low (0)	714.5 (23165)	22.88	21.86	21.12
		707.5 (23095)	23.05	22.02	21.04
		700.5 (23025)	22.99	22.07	20.88
	15RB (0)	714.5 (23165)	22.81	21.97	20.75
		707.5 (23095)	22.95	22.05	21.07
		700.5 (23025)	22.97	21.84	20.78
5MHz	1RB-High (24)	713.5 (23155)	23.71	22.37	21.87
		707.5 (23095)	23.78	22.75	21.84
		701.5 (23035)	24.07	22.46	21.88
	1RB-Middle (12)	713.5 (23155)	23.80	22.53	21.77
		707.5 (23095)	23.92	23.18	21.96
		701.5 (23035)	24.33	22.72	21.82
	1RB-Low (0)	713.5 (23155)	23.88	22.28	21.69
		707.5 (23095)	23.92	22.99	21.90
		701.5 (23035)	23.85	22.34	21.49
	12RB-High (13)	713.5 (23155)	22.81	21.90	20.87
		707.5 (23095)	23.09	22.00	21.09
		701.5 (23035)	22.88	21.82	20.80
	12RB-Middle (6)	713.5 (23155)	22.87	21.68	20.85
		707.5 (23095)	23.17	22.10	20.98
		701.5 (23035)	23.12	21.94	20.88
	12RB-Low (0)	713.5 (23155)	22.83	21.76	20.96
		707.5 (23095)	23.03	22.06	20.96
		701.5 (23035)	23.04	21.65	20.83
	25RB (0)	713.5 (23155)	22.83	21.82	20.60
		707.5 (23095)	23.01	21.94	21.21
		701.5 (23035)	22.82	21.86	21.13
10MHz	1RB-High (49)	711 (23130)	23.73	22.58	21.68
		707.5 (23095)	23.86	22.20	21.51
		704 (23060)	23.83	22.51	21.92
	1RB-Middle (24)	711 (23130)	23.91	23.02	21.85

		707.5 (23095)	24.00	23.01	21.88
		704 (23060)	23.80	22.39	21.79
1RB-Low (0)		711 (23130)	24.01	22.61	21.72
		707.5 (23095)	24.06	22.75	21.51
		704 (23060)	23.88	22.59	21.60
25RB-High (25)		711 (23130)	22.82	22.03	20.57
		707.5 (23095)	22.87	21.80	20.66
		704 (23060)	22.90	21.91	20.74
25RB-Middle (12)		711 (23130)	22.89	22.10	20.76
		707.5 (23095)	22.85	22.14	20.78
		704 (23060)	22.80	21.93	21.11
25RB-Low (0)		711 (23130)	23.12	21.94	20.85
		707.5 (23095)	22.87	21.80	20.95
		704 (23060)	22.92	21.66	21.01
50RB (0)		711 (23130)	22.95	21.87	20.93
		707.5 (23095)	22.87	21.93	20.85
		704 (23060)	22.94	21.79	20.84

LTEB14 Power Level A1/B1/C1

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
5MHz	1RB-High (24)	795.5 (23355)	23.34	21.68	21.65
		793 (23330)	23.14	22.15	21.93
		790.5 (23305)	23.31	22.26	21.81
	1RB-Middle (12)	795.5 (23355)	23.22	21.82	21.97
		793 (23330)	23.31	22.13	21.89
		790.5 (23305)	23.55	22.10	21.83
	1RB-Low (0)	795.5 (23355)	23.22	21.92	21.91
		793 (23330)	23.32	21.79	21.81
		790.5 (23305)	23.31	21.97	20.48
	12RB-High (13)	795.5 (23355)	22.25	21.33	20.39
		793 (23330)	22.42	21.31	20.46
		790.5 (23305)	22.49	21.53	20.52
	12RB-Middle (6)	795.5 (23355)	22.40	21.41	20.27
		793 (23330)	22.48	21.47	20.37
		790.5 (23305)	22.57	21.32	20.46
	12RB-Low (0)	795.5 (23355)	22.37	21.39	20.26
		793 (23330)	22.48	21.34	20.25
		790.5 (23305)	22.42	21.26	20.52

	25RB (0)	795.5 (23355)	22.37	21.42	20.40
		793 (23330)	22.46	21.41	20.49
		790.5 (23305)	22.42	21.37	20.33
10MHz	1RB-High (49)	793 (23330)	23.19	21.64	21.32
	1RB-Middle (24)	793 (23330)	23.30	22.39	21.66
	1RB-Low (0)	793 (23330)	23.44	22.01	21.52
	25RB-High (25)	793 (23330)	22.39	21.34	20.18
	25RB-Middle (12)	793 (23330)	22.42	21.44	20.11
	25RB-Low (0)	793 (23330)	22.31	21.42	20.28
	50RB (0)	793 (23330)	22.40	21.33	20.37

11.3 Wi-Fi and BT Measurement result

The average conducted power for BT is as following:

BR/EDR									
	GFSK			EDR2M-4_DQPSK			EDR3M-8DPSK		
	Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78	Channel 0	Channel 39	Channel 78
Maximum Transmit Power(<20dBm)	11.93	12.40	10.31	9.51	9.99	7.84	9.51	9.98	7.84
Tune up	13	13	11	11	11	9	11	11	9
BLE									
	Channel 0	Channel 19	Channel 39						
Maximum Transmit Power(<20dBm)	0.66	1.16	-0.81						
Tune up	1.5	2	0.5						

The average conducted power for Wi-Fi 2.4G is as following:

2.4GHz	
FCC	
802.11b(dBm)	
Channel\data rate	1Mbps
11(2462MHz)	17.03
6(2437MHz)	16.86
1(2412MHz)	17.22
TUNE UP	18.00
802.11g(dBm)	
Channel\data rate	6Mbps
11(2462MHz)	13.79
6(2437MHz)	13.90
1(2412MHz)	14.23
TUNE UP	15.00
802.11n(dBm)-20MHz	
Channel\data rate	MCS0
11(2462MHz)	13.82
6(2437MHz)	13.50
1(2412MHz)	13.85
TUNE UP	15.00

12 Simultaneous TX SAR Considerations

12.1 Transmit Antenna Separation Distances

The detail for transmit antenna separation distances is described in the additional document:
 Appendix to test report No.I22Z62463-SEM03
 The photos of SAR test

12.2 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
WWAN ANT	< 25mm	< 25mm	< 25mm	< 25mm	> 25mm	< 25mm
WLAN ANT	< 25mm	< 25mm	< 25mm	< 25mm	< 25mm	> 25mm

12.3 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

● Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	SAR test exclusion threshold(mW)	RF output power		SAR test exclusion
			dBm	mW	
BLE	2.440	2	2	1.58	No

13 Evaluation of Simultaneous

reported SAR 1g (W/kg)													
Head		WCDMA850	WCDMA1700	WCDMA1900	LTE Band2	LTE Band4	LTE Band5	LTE Band12	LTE Band14	2.4G	BT	+WiFi2.4G	+BT
Cheek	L	0.54	0.45	0.59	0.17	0.22	0.63	0.58	0.56	0.12	0.03	0.75	0.66
Tilt	L	0.28	0.08	0.28	0.09	0.05	0.28	0.32	0.27	0.00	0.00	0.32	0.32
Cheek	R	0.58	0.13	0.36	0.15	0.10	0.61	0.67	0.49	0.09	0.00	0.76	0.67
Tilt	R	0.30	0.08	0.20	0.06	0.05	0.32	0.29	0.30	0.00	0.00	0.32	0.32

Hotspot		WCDMA850	WCDMA1700	WCDMA1900	LTE Band2	LTE Band4	LTE Band5	LTE Band12	LTE Band14	2.4G	BT	+WiFi2.4G	+BT
Front	10mm	0.24	0.05	0.26	0.19	0.08	0.22	0.10	0.10	0.00	0.00	0.26	0.26
Rear	10mm	1.15	1.25	1.25	1.06	1.12	1.34	0.45	0.44	0.03	0.00	1.37	1.34
Rear open	10mm	0.76	0.99	1.05	0.77	0.63	0.60	0.55	0.27	0.04	0.03	1.09	1.08
Left	10mm	0.20	0.07	0.20	0.13	0.05	0.19	0.00	0.00	0.00	0.00	0.20	0.20
Right	10mm	0.23	0.03	0.04	0.04	0.04	0.17	0.09	0.11	0.03	0.00	0.26	0.23
Top	10mm	0.00	0.00	0.00	0.00	0.00	0.05	0.04	0.00	0.00	0.00	0.05	0.05
Bottom	10mm	0.13	0.70	0.66	0.50	0.71	0.10	0.06	0.10	0.00	0.00	0.71	0.71
Front	15mm	\	0.12	0.25	0.21	0.09	\	\	\	0.00	0.00	0.25	0.25
Rear	15mm	\	1.26	1.13	1.18	1.10	\	\	\	0.03	0.00	1.29	1.26
Rear open	15mm	\	0.67	0.81	0.99	0.78	\	\	\	0.04	0.00	1.03	0.99

Estimated SAR for BLE

Mode/Band	F (GHz)	Position	Distance (mm)	Upper limit of power *		Estimated _{1g} (W/kg)
				dBm	mW	
BLE	2.440	Body	5	2	1.58	0.07

* - Maximum possible output power declared by manufacturer

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance,mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;

where x = 7.5 for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Conclusion:

According to the above tables, the sum of reported SAR values is<1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

Note:

KDB 447498 D01 General RF Exposure Guidance:

For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor

For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

$\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$

$\leq 0.6 \text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz

$\leq 0.4 \text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200 \text{ MHz}$

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4} \text{ dB}$ higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.

When the reported SAR is $> 0.8 \text{ W/kg}$, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.

Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are $> 0.8 \text{ W/kg}$. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation $< 1.45 \text{ W/kg}$.

Testing for 16-QAM modulation is not required because the reported SAR for QPSK is $< 1.45 \text{ W/Kg}$ and its output power is not more than 0.5 dB higher than that of QPSK.

Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is $< 1.45 \text{ W/Kg}$ and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the

group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

To determine the initial test position, Area Scans were performed to determine the position with the Maximum Value of SAR (measured). The position that produced the highest Maximum Value of SAR is considered the worst case position; thus used as the initial test position.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s).

When the reported SAR for the initial test position is:

$\leq 0.4 \text{ W/kg}$, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.

$> 0.4 \text{ W/kg}$, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is $\leq 0.8 \text{ W/kg}$ or all required test positions are tested.

- For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
- When it is unclear, all equivalent conditions must be tested.

For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is $> 0.8 \text{ W/kg}$, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is $\leq 1.2 \text{ W/kg}$ or all required test channels are considered.

• The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.

When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is $\leq 1.2 \text{ W/kg}$, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.

When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is $\leq 1.2 \text{ W/kg}$, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

Table 15.1: Duty Cycle

Mode	Duty Cycle
Speech for GSM	1:8.3
GPRS&EGPRS 1 Slot	1:8.3
GPRS&EGPRS 2 Slot	1:4
GPRS&EGPRS 3 Slot	1:2.67
GPRS&EGPRS 4 Slot	1:2
WCDMA<E FDD	1:1
TDD PC3	1:1.58

14.1 SAR results for 2G/3G/4G

H1=handset1

Test Position	Phantom position L/R/F	Frequency Band	Channel Number	Frequency (MHz)	Test setup	Fig	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
Cheek	L	WCDMA 850	4183	836.6		\	23.56	24.00	0.485	0.54	0.324	0.36	-0.02
Tilt	L	WCDMA 850	4183	836.6		\	23.56	24.00	0.255	0.28	0.178	0.20	0.04
Cheek	R	WCDMA 850	4233	846.6		\	23.79	24.00	0.531	0.56	0.34	0.36	-0.10
Cheek	R	WCDMA 850	4183	836.6		\	23.56	24.00	0.519	0.57	0.328	0.36	0.05
Cheek	R	WCDMA 850	4132	826.4		F.1	23.71	24.00	0.543	0.58	0.348	0.37	0.01
Tilt	R	WCDMA 850	4183	836.6		\	23.56	24.00	0.271	0.30	0.184	0.20	0.04
Body	F	WCDMA 850	4183	836.6	Front 10mm	\	23.56	24.00	0.219	0.24	0.162	0.18	-0.19
Body	F	WCDMA 850	4233	846.6	Rear 10mm	\	23.79	24.00	0.859	0.90	0.545	0.57	-0.14
Body	F	WCDMA 850	4183	836.6	Rear 10mm	F.2	23.56	24.00	1.04	1.15	0.698	0.77	-0.08
Body	F	WCDMA 850	4132	826.4	Rear 10mm	\	23.71	24.00	0.986	1.05	0.657	0.70	-0.09
Body	F	WCDMA 850	4183	836.6	Rear 10mm Open	\	23.56	24.00	0.691	0.76	0.484	0.54	-0.16
Body	F	WCDMA 850	4183	836.6	Left Edge 10mm	\	23.56	24.00	0.182	0.20	0.124	0.14	0.07
Body	F	WCDMA 850	4183	836.6	Right Edge 10mm	\	23.56	24.00	0.212	0.23	0.143	0.16	0.14
Body	F	WCDMA 850	4183	836.6	Top Edge 10mm	\	23.56	24.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	WCDMA 850	4183	836.6	Bottom Edge 10mm	\	23.56	24.00	0.118	0.13	0.072	0.08	-0.19
Cheek	L	WCDMA 1700	1513	1752.6		\	23.22	24.00	0.192	0.23	0.123	0.15	-0.19
Cheek	L	WCDMA 1700	1412	1732.4		F.3	23.19	24.00	0.37	0.45	0.226	0.27	-0.08
Cheek	L	WCDMA 1700	1312	1712.4		\	23.24	24.00	0.193	0.23	0.12	0.14	-0.17
Tilt	L	WCDMA 1700	1412	1732.4		\	23.19	24.00	0.067	0.08	0.043	0.05	-0.18
Cheek	R	WCDMA 1700	1412	1732.4		\	23.19	24.00	0.111	0.13	0.063	0.08	0.15
Tilt	R	WCDMA 1700	1412	1732.4		\	23.19	24.00	0.068	0.08	0.043	0.05	0.12
Body	F	WCDMA 1700	1412	1732.4	Front 15mm	\	20.03	20.50	0.112	0.12	0.08	0.09	0.10
Body	F	WCDMA 1700	1513	1752.6	Rear 15mm	\	20.23	20.50	0.942	1.00	0.576	0.61	0.14
Body	F	WCDMA 1700	1412	1732.4	Rear 15mm	F.4	20.03	20.50	1.13	1.26	0.62	0.69	-0.12
Body	F	WCDMA 1700	1312	1712.4	Rear 15mm	\	20.26	20.50	0.952	1.01	0.576	0.61	0.13
Body	F	WCDMA 1700	1412	1732.4	Rear 15mm Open	\	20.03	20.50	0.601	0.67	0.369	0.41	-0.16
Body	F	WCDMA 1700	1412	1732.4	Rear 15mm	H1	20.03	20.50	1.06	1.18	0.513	0.57	0.04
Body	F	WCDMA 1700	1412	1732.4	Front 10mm	\	17.03	17.50	0.049	0.05	0.029	0.03	-0.11
Body	F	WCDMA 1700	1513	1752.6	Rear 10mm	\	16.92	17.50	0.911	1.04	0.468	0.53	-0.01
Body	F	WCDMA 1700	1412	1732.4	Rear 10mm	\	17.03	17.50	1.016	1.13	0.522	0.58	-0.03
Body	F	WCDMA 1700	1312	1712.4	Rear 10mm	F.5	16.88	17.50	1.08	1.25	0.559	0.64	0.06
Body	F	WCDMA 1700	1513	1752.6	Rear 10mm Open	\	16.92	17.50	0.833	0.95	0.434	0.50	0.03
Body	F	WCDMA 1700	1412	1732.4	Rear 10mm Open	\	17.03	17.50	0.884	0.99	0.463	0.52	0.10
Body	F	WCDMA 1700	1312	1712.4	Rear 10mm Open	\	16.88	17.50	0.821	0.95	0.416	0.48	0.08
Body	F	WCDMA 1700	1412	1732.4	Left Edge 10mm	\	17.03	17.50	0.062	0.07	0.033	0.04	-0.17
Body	F	WCDMA 1700	1412	1732.4	Right Edge 10mm	\	17.03	17.50	0.026	0.03	0.016	0.02	0.02
Body	F	WCDMA 1700	1412	1732.4	Top Edge 10mm	\	17.03	17.50	<0.01	<0.01	<0.01	<0.01	\
Body	F	WCDMA 1700	1412	1732.4	Bottom Edge 10mm	\	17.03	17.50	0.627	0.70	0.329	0.37	-0.07
Body	F	WCDMA 1700	1312	1712.4	Rear 10mm	H1	16.88	17.50	0.964	1.11	0.521	0.60	0.08
Cheek	L	WCDMA 1900	9538	1907.6		F.6	23.05	24.00	0.471	0.59	0.305	0.38	0.02
Cheek	L	WCDMA 1900	9400	1880		\	23.07	24.00	0.365	0.45	0.243	0.30	0.06
Cheek	L	WCDMA 1900	9262	1852.4		\	23.13	24.00	0.464	0.57	0.307	0.38	-0.05
Tilt	L	WCDMA 1900	9400	1880		\	23.07	24.00	0.222	0.28	0.171	0.21	-0.10
Cheek	R	WCDMA 1900	9400	1880		\	23.07	24.00	0.292	0.36	0.223	0.28	-0.09
Tilt	R	WCDMA 1900	9400	1880		\	23.07	24.00	0.163	0.20	0.131	0.16	0.01
Body	F	WCDMA 1900	9400	1880	Front 15mm	\	22.16	23.00	0.209	0.25	0.13	0.16	0.07
Body	F	WCDMA 1900	9538	1907.6	Rear 15mm	\	22.41	23.00	0.733	0.84	0.4	0.46	0.04
Body	F	WCDMA 1900	9400	1880	Rear 15mm	\	22.16	23.00	0.848	1.03	0.502	0.61	0.16
Body	F	WCDMA 1900	9262	1852.4	Rear 15mm	F.7	21.95	23.00	0.888	1.13	0.512	0.65	-0.15
Body	F	WCDMA 1900	9538	1907.6	Rear 15mm Open	\	22.41	23.00	0.597	0.68	0.343	0.39	-0.07
Body	F	WCDMA 1900	9400	1880	Rear 15mm Open	\	22.16	23.00	0.643	0.78	0.372	0.45	-0.19
Body	F	WCDMA 1900	9262	1852.4	Rear 15mm Open	\	21.95	23.00	0.634	0.81	0.369	0.47	0.15
Body	F	WCDMA 1900	9400	1880	Front 10mm	\	18.84	20.00	0.196	0.26	0.123	0.16	-0.18
Body	F	WCDMA 1900	9538	1907.6	Rear 10mm	\	19.16	20.00	0.964	1.17	0.538	0.65	-0.04
Body	F	WCDMA 1900	9400	1880	Rear 10mm	\	18.84	20.00	0.951	1.24	0.521	0.68	0.13
Body	F	WCDMA 1900	9262	1852.4	Rear 10mm	F.8	18.92	20.00	0.976	1.25	0.534	0.68	-0.09
Body	F	WCDMA 1900	9538	1907.6	Rear 10mm Open	\	19.16	20.00	0.761	0.92	0.428	0.52	0.04
Body	F	WCDMA 1900	9400	1880	Rear 10mm Open	\	18.84	20.00	0.807	1.05	0.452	0.59	0.15
Body	F	WCDMA 1900	9262	1852.4	Rear 10mm Open	\	18.92	20.00	0.773	0.99	0.431	0.55	0.07
Body	F	WCDMA 1900	9400	1880	Left Edge 10mm	\	18.84	20.00	0.15	0.20	0.083	0.11	0.13
Body	F	WCDMA 1900	9400	1880	Right Edge 10mm	\	18.84	20.00	0.028	0.04	0.017	0.02	0.11
Body	F	WCDMA 1900	9400	1880	Top Edge 10mm	\	18.84	20.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	WCDMA 1900	9400	1880	Bottom Edge 10mm	\	18.84	20.00	0.507	0.66	0.278	0.36	0.16
Body	F	WCDMA 1900	9262	1852.4	Rear 10mm	H1	18.92	20.00	0.943	1.21	0.497	0.64	0.01

Test Position	Phantom position L/R/F	Frequency Band	Channel Number	Frequency (MHz)	Test setup	Fig	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
Cheek	L	LTE Band2	18900	1880	1RB-Low	F.9	22.90	23.50	0.149	0.17	0.097	0.11	-0.03
Tilt	L	LTE Band2	18900	1880	1RB-Low	\	22.90	23.50	0.077	0.09	0.055	0.06	-0.17
Cheek	R	LTE Band2	18900	1880	1RB-Low	\	22.90	23.50	0.132	0.15	0.095	0.11	-0.15
Tilt	R	LTE Band2	18900	1880	1RB-Low	\	22.90	23.50	0.054	0.06	0.04	0.05	-0.08
Cheek	L	LTE Band2	18900	1880	50RB-High	\	21.91	22.50	0.146	0.17	0.083	0.10	-0.09
Tilt	L	LTE Band2	18900	1880	50RB-High	\	21.91	22.50	0.052	0.06	0.037	0.04	-0.06
Cheek	R	LTE Band2	18900	1880	50RB-High	\	21.91	22.50	0.091	0.10	0.068	0.08	0.10
Tilt	R	LTE Band2	18900	1880	50RB-High	\	21.91	22.50	0.045	0.05	0.034	0.04	-0.02
Body	F	LTE Band2	18900	1880	1RB-Low Front 15mm	\	22.90	23.50	0.178	0.20	0.11	0.13	-0.05
Body	F	LTE Band2	19100	1900	1RB-Low Rear 15mm	F.10	22.87	23.50	1.02	1.18	0.566	0.65	0.06
Body	F	LTE Band2	18900	1880	1RB-Low Rear 15mm	\	22.90	23.50	0.735	0.84	0.452	0.52	-0.18
Body	F	LTE Band2	18700	1860	1RB-Low Rear 15mm	\	22.73	23.50	0.99	1.18	0.551	0.66	0.08
Body	F	LTE Band2	19100	1900	1RB-Low Rear 15mmOpen	\	22.87	23.50	0.595	0.69	0.208	0.24	-0.01
Body	F	LTE Band2	18900	1880	1RB-Low Rear 15mmOpen	\	22.90	23.50	0.863	0.99	0.494	0.57	-0.08
Body	F	LTE Band2	18700	1860	1RB-Low Rear 15mmOpen	\	22.73	23.50	0.811	0.97	0.465	0.56	0.16
Body	F	LTE Band2	18900	1880	50RB-High Front 15mm	\	21.91	22.50	0.179	0.21	0.111	0.13	-0.13
Body	F	LTE Band2	19100	1900	50RB-High Rear 15mm	\	21.85	22.50	0.758	0.88	0.439	0.51	0.07
Body	F	LTE Band2	18900	1880	50RB-High Rear 15mm	\	21.91	22.50	0.804	0.92	0.455	0.52	-0.04
Body	F	LTE Band2	18700	1860	50RB-High Rear 15mm	\	21.80	22.50	0.744	0.87	0.431	0.51	0.08
Body	F	LTE Band2	18900	1880	50RB-High Rear 15mmOpen	\	21.91	22.50	0.684	0.78	0.388	0.44	-0.05
Body	F	LTE Band2	18900	1880	100RB Rear 15mm	\	21.90	22.50	0.833	0.96	0.469	0.54	-0.13
Body	F	LTE Band2	18900	1880	1RB-Low Front 10mm	\	20.95	21.00	0.184	0.19	0.112	0.11	-0.13
Body	F	LTE Band2	19100	1900	1RB-Low Rear 10mm	F.11	20.90	21.00	1.04	1.06	0.556	0.57	-0.01
Body	F	LTE Band2	18900	1880	1RB-Low Rear 10mm	\	20.95	21.00	1.03	1.04	0.556	0.56	-0.15
Body	F	LTE Band2	18700	1860	1RB-Low Rear 10mm	\	20.81	21.00	0.971	1.01	0.521	0.54	-0.02
Body	F	LTE Band2	18900	1880	1RB-Low Rear 10mmOpen	\	20.95	21.00	0.758	0.77	0.416	0.42	0.09
Body	F	LTE Band2	18900	1880	1RB-Low Left Edge 10mm	\	20.95	21.00	0.124	0.13	0.067	0.07	0.06
Body	F	LTE Band2	18900	1880	1RB-Low Right Edge 10mm	\	20.95	21.00	0.021	0.02	0.013	0.01	-0.15
Body	F	LTE Band2	18900	1880	1RB-Low Top Edge 10mm	\	20.95	21.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band2	18900	1880	1RB-Low Bottom Edge 10mm	\	20.95	21.00	0.494	0.50	0.265	0.27	-0.01
Body	F	LTE Band2	18900	1880	50RB-High Front 10mm	\	19.99	20.00	0.153	0.15	0.092	0.09	-0.01
Body	F	LTE Band2	18900	1880	50RB-High Rear 10mm	\	19.99	20.00	0.708	0.71	0.363	0.36	0.08
Body	F	LTE Band2	18900	1880	50RB-High Rear 10mmOpen	\	19.99	20.00	0.669	0.67	0.364	0.36	0.05
Body	F	LTE Band2	18900	1880	50RB-High Left Edge 10mm	\	19.99	20.00	0.082	0.08	0.044	0.04	-0.10
Body	F	LTE Band2	18900	1880	50RB-High Right Edge 10mm	\	19.99	20.00	0.039	0.04	0.022	0.02	-0.15
Body	F	LTE Band2	18900	1880	50RB-High Top Edge 10mm	\	19.99	20.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band2	18900	1880	50RB-High Bottom Edge 10mm	\	19.99	20.00	0.438	0.44	0.229	0.23	0.06
Body	F	LTE Band2	19100	1900	1RB-Low Rear 10mm	H1	20.90	21.00	0.975	1.00	0.515	0.53	0.04
Body	F	LTE Band2	18900	1880	100RB Rear 10mm	\	19.97	20.00	0.985	0.99	0.537	0.54	-0.11
Cheek	L	LTE Band4	20300	1745	1RB-Low	\	23.59	24.30	0.151	0.18	0.099	0.12	-0.08
Tilt	L	LTE Band4	20300	1745	1RB-Low	\	23.59	24.30	0.043	0.05	0.026	0.03	-0.14
Cheek	R	LTE Band4	20300	1745	1RB-Low	\	23.59	24.30	0.089	0.10	0.051	0.06	-0.14
Tilt	R	LTE Band4	20300	1745	1RB-Low	\	23.59	24.30	0.044	0.05	0.024	0.03	-0.18
Cheek	L	LTE Band4	20050	1720	50RB-High	F.12	22.47	23.30	0.178	0.22	0.115	0.14	0.11
Tilt	L	LTE Band4	20050	1720	50RB-High	\	22.47	23.30	0.044	0.05	0.029	0.04	0.19
Cheek	R	LTE Band4	20050	1720	50RB-High	\	22.47	23.30	0.064	0.08	0.036	0.04	-0.06
Tilt	R	LTE Band4	20050	1720	50RB-High	\	22.47	23.30	0.036	0.04	0.018	0.02	-0.02
Body	F	LTE Band4	20300	1745	1RB-Low Front 15mm	\	21.15	21.30	0.085	0.09	0.055	0.06	0.16
Body	F	LTE Band4	20300	1745	1RB-Low Rear 15mm	F.13	21.15	21.30	1.06	1.10	0.571	0.59	-0.09
Body	F	LTE Band4	20175	1732.5	1RB-Low Rear 15mm	\	20.95	21.30	0.897	0.97	0.481	0.52	-0.06
Body	F	LTE Band4	20050	1720	1RB-Low Rear 15mm	\	21.05	21.30	0.786	0.83	0.442	0.47	-0.14
Body	F	LTE Band4	20300	1745	1RB-Low Rear 15mmOpen	\	21.15	21.30	0.749	0.78	0.411	0.43	-0.17
Body	F	LTE Band4	20175	1732.5	1RB-Low Rear 15mmOpen	\	20.95	21.30	0.66	0.72	0.355	0.38	-0.14
Body	F	LTE Band4	20050	1720	1RB-Low Rear 15mmOpen	\	21.05	21.30	0.675	0.71	0.363	0.38	-0.10
Body	F	LTE Band4	20050	1720	50RB-High Front 15mm	\	20.12	20.30	0.072	0.08	0.047	0.05	0.06
Body	F	LTE Band4	20050	1720	50RB-High Rear 15mm	\	20.12	20.30	0.556	0.58	0.31	0.32	0.04
Body	F	LTE Band4	20300	1745	50RB-High Rear 15mmOpen	\	20.12	20.30	0.408	0.43	0.226	0.24	-0.04
Body	F	LTE Band4	20300	1745	100RB Rear 15mm	\	20.17	20.30	0.976	1.01	0.551	0.57	-0.03
Body	F	LTE Band4	20300	1745	1RB-Low Front 10mm	\	18.01	18.30	0.06	0.06	0.035	0.04	-0.09
Body	F	LTE Band4	20300	1745	1RB-Low Rear 10mm	\	18.01	18.30	0.98	1.05	0.465	0.50	0.01
Body	F	LTE Band4	20175	1732.5	1RB-Low Rear 10mm	\	17.89	18.30	0.96	1.06	0.461	0.51	0.05
Body	F	LTE Band4	20050	1720	1RB-Low Rear 10mm	F.14	17.98	18.30	1.04	1.12	0.53	0.57	-0.09
Body	F	LTE Band4	20300	1745	1RB-Low Rear 10mmOpen	\	18.01	18.30	0.489	0.52	0.228	0.24	0.03
Body	F	LTE Band4	20300	1745	1RB-Low Left Edge 10mm	\	18.01	18.30	0.046	0.05	0.024	0.03	0.06
Body	F	LTE Band4	20300	1745	1RB-Low Right Edge 10mm	\	18.01	18.30	0.042	0.04	0.024	0.03	0.12
Body	F	LTE Band4	20300	1745	1RB-Low Top Edge 10mm	\	18.01	18.30	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band4	20300	1745	1RB-Low Bottom Edge 10mm	\	18.01	18.30	0.668	0.71	0.33	0.35	-0.17
Body	F	LTE Band4	20050	1720	50RB-High Front 10mm	\	17.06	17.30	0.073	0.08	0.041	0.04	-0.12
Body	F	LTE Band4	20300	1745	50RB-High Rear 10mm	\	16.92	17.30	0.789	0.86	0.351	0.38	0.03
Body	F	LTE Band4	20175	1732.5	50RB-High Rear 10mm	\	16.97	17.30	0.776	0.84	0.342	0.37	0.06
Body	F	LTE Band4	20050	1720	50RB-High Rear 10mm	\	17.06	17.30	0.821	0.87	0.384	0.41	-0.08
Body	F	LTE Band4	20050	1720	50RB-High Rear 10mmOpen	\	17.06	17.30	0.596	0.63	0.29	0.31	0.07
Body	F	LTE Band4	20050	1720	50RB-High Left Edge 10mm	\	17.06	17.30	0.052	0.05	0.028	0.03	-0.11
Body	F	LTE Band4	20050	1720	50RB-High Right Edge 10mm	\	17.06	17.30	0.026	0.03	0.015	0.02	-0.09
Body	F	LTE Band4	20050	1720	50RB-High Top Edge 10mm	\	17.06	17.30	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band4	20050	1720	50RB-High Bottom Edge 10mm	\	17.06	17.30	0.476	0.50	0.237	0.25	-0.03
Body	F	LTE Band4	20050	1720	100RB Rear 10mm	\	17.07	17.30	0.956	1.01	0.503	0.53	-0.11


Cheek	L	LTE Band5	20450	829	1RB-Low	F.15	23.76	24.70	0.509	0.63	0.336	0.42	0.02
Tilt	L	LTE Band5	20450	829	1RB-Low	\	23.76	24.70	0.223	0.28	0.157	0.19	0.09
Cheek	R	LTE Band5	20450	829	1RB-Low	\	23.76	24.70	0.492	0.61	0.317	0.39	0.15
Tilt	R	LTE Band5	20450	829	1RB-Low	\	23.76	24.70	0.261	0.32	0.179	0.22	-0.06
Cheek	L	LTE Band5	20450	829	25RB-Mid	\	23.00	23.70	0.409	0.48	0.27	0.32	0.08
Tilt	L	LTE Band5	20450	829	25RB-Mid	\	23.00	23.70	0.186	0.22	0.129	0.15	-0.09
Cheek	R	LTE Band5	20450	829	25RB-Mid	\	23.00	23.70	0.387	0.45	0.25	0.29	0.03
Tilt	R	LTE Band5	20450	829	25RB-Mid	\	23.00	23.70	0.125	0.15	0.086	0.10	0.15
Body	F	LTE Band5	20450	829	1RB-Low Front 15mm	\	23.76	24.70	0.174	0.22	0.137	0.17	-0.17
Body	F	LTE Band5	20600	844	1RB-Low Rear 15mm	\	23.76	24.70	0.788	0.98	0.548	0.68	-0.15
Body	F	LTE Band5	20525	836.5	1RB-Low Rear 15mm	\	23.76	24.70	0.835	1.04	0.588	0.73	-0.17
Body	F	LTE Band5	20450	829	1RB-Low Rear 15mm	F.16	23.76	24.70	0.859	1.07	0.612	0.76	-0.05
Body	F	LTE Band5	20450	829	1RB-Low Rear 15mmOpen	\	23.76	24.70	0.242	0.30	0.187	0.23	0.17
Body	F	LTE Band5	20450	829	25RB-Mid Front 15mm	\	23.00	23.70	0.155	0.18	0.121	0.14	-0.05
Body	F	LTE Band5	20450	829	25RB-Mid Rear 15mm	\	23.00	23.70	0.712	0.84	0.504	0.59	-0.13
Body	F	LTE Band5	20450	829	25RB-Mid Rear 15mmOpen	\	23.00	23.70	0.3	0.35	0.219	0.26	-0.16
Body	F	LTE Band5	20525	836.5	50RB Rear 15mm		22.92	23.70	0.796	0.95	0.559	0.67	-0.01
Body	F	LTE Band5	20450	829	1RB-Low Front 10mm	\	23.76	24.70	0.173	0.21	0.131	0.16	0.00
Body	F	LTE Band5	20600	844	1RB-Low Rear 10mm	\	23.76	24.70	0.695	0.86	0.461	0.57	0.13
Body	F	LTE Band5	20525	836.5	1RB-Low Rear 10mm	\	23.76	24.70	0.647	0.80	0.457	0.57	-0.09
Body	F	LTE Band5	20450	829	1RB-Low Rear 10mm	F.17	23.76	24.70	1.08	1.34	0.745	0.93	0.06
Body	F	LTE Band5	20450	829	1RB-Low Rear 10mmOpen	\	23.76	24.70	0.482	0.60	0.349	0.43	0.17
Body	F	LTE Band5	20450	829	1RB-Low Left Edge 10mm	\	23.76	24.70	0.101	0.13	0.071	0.09	-0.05
Body	F	LTE Band5	20450	829	1RB-Low Right Edge 10mm	\	23.76	24.70	0.126	0.16	0.088	0.11	-0.17
Body	F	LTE Band5	20450	829	1RB-Low Top Edge 10mm	\	23.76	24.70	0.041	0.05	0.03	0.04	-0.03
Body	F	LTE Band5	20450	829	1RB-Low Bottom Edge 10mm	\	23.76	24.70	0.114	0.14	0.072	0.09	-0.09
Body	F	LTE Band5	20450	829	25RB-Mid Front 10mm	\	23.00	23.70	0.187	0.22	0.142	0.17	0.06
Body	F	LTE Band5	20450	829	25RB-Mid Rear 10mm	\	23.00	23.70	0.763	0.90	0.525	0.62	-0.16
Body	F	LTE Band5	20450	829	25RB-Mid Rear 10mmOpen	\	23.00	23.70	0.385	0.45	0.276	0.32	0.14
Body	F	LTE Band5	20450	829	25RB-Mid Left Edge 10mm	\	23.00	23.70	0.159	0.19	0.113	0.13	-0.16
Body	F	LTE Band5	20450	829	25RB-Mid Right Edge 10mm	\	23.00	23.70	0.145	0.17	0.1	0.12	0.12
Body	F	LTE Band5	20450	829	25RB-Mid Top Edge 10mm	\	23.00	23.70	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band5	20450	829	25RB-Mid Bottom Edge 10mm	\	23.00	23.70	0.082	0.10	0.052	0.06	-0.10
Body	F	LTE Band5	20450	829	1RB-Low Rear 10mm	H1	23.76	24.70	0.857	1.06	0.701	0.87	0.04
Body	F	LTE Band5	20525	836.5	50RB Rear 10mm		22.92	23.70	0.961	1.15	0.611	0.73	0.06
Cheek	L	LTE Band12	23095	707.5	1RB-Low	\	24.06	24.50	0.526	0.58	0.31	0.34	0.16
Tilt	L	LTE Band12	23095	707.5	1RB-Low	\	24.06	24.50	0.25	0.28	0.165	0.18	0.13
Cheek	R	LTE Band12	23095	707.5	1RB-Low	F.18	24.06	24.50	0.609	0.67	0.365	0.40	-0.09
Tilt	R	LTE Band12	23095	707.5	1RB-Low	\	24.06	24.50	0.262	0.29	0.168	0.19	-0.13
Cheek	L	LTE Band12	23130	711	25RB-Low	\	23.12	23.50	0.502	0.55	0.294	0.32	0.01
Tilt	L	LTE Band12	23130	711	25RB-Low	\	23.12	23.50	0.293	0.32	0.193	0.21	0.10
Cheek	R	LTE Band12	23130	711	25RB-Low	\	23.12	23.50	0.491	0.54	0.295	0.32	0.05
Tilt	R	LTE Band12	23130	711	25RB-Low	\	23.12	23.50	0.228	0.25	0.146	0.16	0.13
Body	F	LTE Band12	23095	707.5	1RB-Low Front 10mm	\	24.06	24.50	0.094	0.10	0.069	0.08	-0.10
Body	F	LTE Band12	23095	707.5	1RB-Low Rear 10mm	\	24.06	24.50	0.409	0.45	0.296	0.33	0.16
Body	F	LTE Band12	23095	707.5	1RB-Low Rear 10mmOpen	F.19	24.06	24.50	0.501	0.55	0.358	0.40	0.07
Body	F	LTE Band12	23095	707.5	1RB-Low Left Edge 10mm	\	24.06	24.50	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band12	23095	707.5	1RB-Low Right Edge 10mm	\	24.06	24.50	0.08	0.09	0.057	0.06	-0.04
Body	F	LTE Band12	23095	707.5	1RB-Low Top Edge 10mm	\	24.06	24.50	0.035	0.04	0.022	0.02	0.18
Body	F	LTE Band12	23095	707.5	1RB-Low Bottom Edge 10mm	\	24.06	24.50	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band12	23130	711	25RB-Low Front 10mm	\	23.12	23.50	0.092	0.10	0.07	0.08	-0.19
Body	F	LTE Band12	23130	711	25RB-Low Rear 10mm	\	23.12	23.50	0.308	0.34	0.218	0.24	-0.01
Body	F	LTE Band12	23130	711	25RB-Low Rear 10mmOpen	\	23.12	23.50	0.237	0.26	0.165	0.18	-0.14
Body	F	LTE Band12	23130	711	25RB-Low Left Edge 10mm	\	23.12	23.50	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band12	23130	711	25RB-Low Right Edge 10mm	\	23.12	23.50	0.04	0.04	0.029	0.03	0.11
Body	F	LTE Band12	23130	711	25RB-Low Top Edge 10mm	\	23.12	23.50	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band12	23130	711	25RB-Low Bottom Edge 10mm	\	23.12	23.50	0.059	0.06	0.037	0.04	0.09
Cheek	L	LTE Band14	23330	793	1RB-Low	F.20	23.44	24.00	0.491	0.56	0.318	0.36	-0.11
Tilt	L	LTE Band14	23330	793	1RB-Low	\	23.44	24.00	0.24	0.27	0.168	0.19	0.18
Cheek	R	LTE Band14	23330	793	1RB-Low	\	23.44	24.00	0.43	0.49	0.285	0.32	-0.18
Tilt	R	LTE Band14	23330	793	1RB-Low	\	23.44	24.00	0.266	0.30	0.184	0.21	0.15
Cheek	L	LTE Band14	23330	793	25RB-Mid	\	22.42	23.00	0.387	0.44	0.252	0.29	-0.08
Tilt	L	LTE Band14	23330	793	25RB-Mid	\	22.42	23.00	0.181	0.21	0.126	0.14	0.18
Cheek	R	LTE Band14	23330	793	25RB-Mid	\	22.42	23.00	0.323	0.37	0.209	0.24	0.16
Tilt	R	LTE Band14	23330	793	25RB-Mid	\	22.42	23.00	0.189	0.22	0.132	0.15	-0.11
Body	F	LTE Band14	23330	793	1RB-Low Front 10mm	\	23.44	24.00	0.092	0.10	0.07	0.08	0.17
Body	F	LTE Band14	23330	793	1RB-Low Rear 10mm	F.21	23.44	24.00	0.383	0.44	0.259	0.29	-0.07
Body	F	LTE Band14	23330	793	1RB-Low Rear 10mmOpen	\	23.44	24.00	0.236	0.27	0.15	0.17	0.12
Body	F	LTE Band14	23330	793	1RB-Low Left Edge 10mm	\	23.44	24.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band14	23330	793	1RB-Low Right Edge 10mm	\	23.44	24.00	0.094	0.11	0.065	0.07	-0.19
Body	F	LTE Band14	23330	793	1RB-Low Top Edge 10mm	\	23.44	24.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band14	23330	793	1RB-Low Bottom Edge 10mm	\	23.44	24.00	0.089	0.10	0.055	0.06	-0.09
Body	F	LTE Band14	23330	793	25RB-Mid Front 10mm	\	22.42	23.00	0.05	0.06	0.037	0.04	0.08
Body	F	LTE Band14	23330	793	25RB-Mid Rear 10mm	\	22.42	23.00	0.34	0.39	0.231	0.26	-0.01
Body	F	LTE Band14	23330	793	25RB-Mid Rear 10mmOpen	\	22.42	23.00	0.17	0.19	0.106	0.12	0.16
Body	F	LTE Band14	23330	793	25RB-Mid Left Edge 10mm	\	22.42	23.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band14	23330	793	25RB-Mid Right Edge 10mm	\	22.42	23.00	0.089	0.10	0.064	0.07	0.04
Body	F	LTE Band14	23330	793	25RB-Mid Top Edge 10mm	\	22.42	23.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	LTE Band14	23330	793	25RB-Mid Bottom Edge 10mm	\	22.42	23.00	0.07	0.08	0.05	0.05	-0.0

14.2 SAR results for WLAN

The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures.

Duty factor plot

CH1

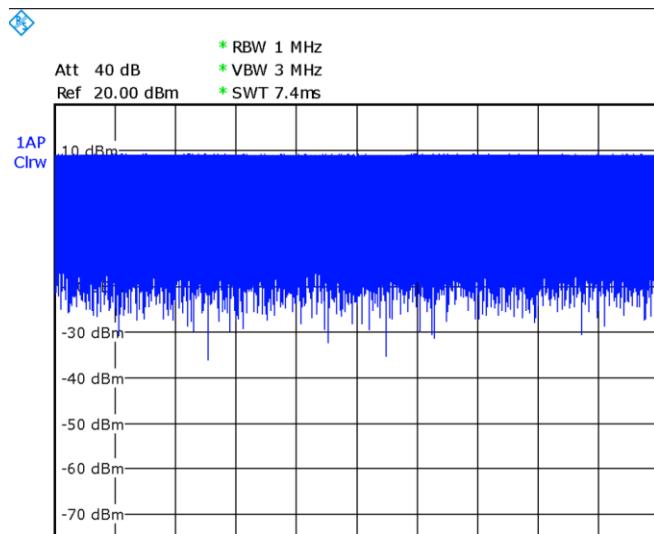

WLAN 2.4G

Test Position	Phantom position L/R/F	Frequency Band	Channel Number	Frequency (MHz)	Test setup	Fig	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
Cheek	L	WIFI2.4G	1	2412		F.21	17.22	18.00	0.102	0.12	0.057	0.07	0.10
Tilt	L	WIFI2.4G	1	2412		\	17.22	18.00	<0.01	<0.01	<0.01	<0.01	\
Cheek	R	WIFI2.4G	1	2412		\	17.22	18.00	0.079	0.09	0.055	0.07	0.02
Tilt	R	WIFI2.4G	1	2412		\	17.22	18.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	WIFI2.4G	1	2412	Front 10mm	\	17.22	18.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	WIFI2.4G	1	2412	Rear 10mm	\	17.22	18.00	0.029	0.03	0.014	0.02	0.07
Body	F	WIFI2.4G	1	2412	Rear 10mm Open	F.22	17.22	18.00	0.031	0.04	0.015	0.02	0.10
Body	F	WIFI2.4G	1	2412	Left Edge 10mm	\	17.22	18.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	WIFI2.4G	1	2412	Right Edge 10mm	\	17.22	18.00	0.024	0.03	0.012	0.01	-0.11
Body	F	WIFI2.4G	1	2412	Top 10mm	\	17.22	18.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	WIFI2.4G	1	2412	Bottom 10mm	\	17.22	18.00	<0.01	<0.01	<0.01	<0.01	\

14.3 SAR results for BT

Test Position	Phantom position L/R/F	Frequency Band	Channel Number	Frequency (MHz)	Test setup	Fig	EUT Measured Power (dBm)	Tune up (dBm)	Measured SAR 1g (W/kg)	Calculated SAR 1g (W/kg)	Measured SAR 10g (W/kg)	Calculated SAR 10g (W/kg)	Power Drift
Cheek	L	BT	39			F.23	12.40	13.00	0.0233	0.03	0.0122	0.01	-0.07
Tilt	L	BT	39			\	12.40	13.00	<0.01	<0.01	<0.01	<0.01	\
Cheek	R	BT	39			\	12.40	13.00	<0.01	<0.01	<0.01	<0.01	\
Tilt	R	BT	39			\	12.40	13.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	BT	39		Front 10mm	\	12.40	13.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	BT	39		Rear 10mm	\	12.40	13.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	BT	39		Rear 10mm Open	F.24	12.40	13.00	0.0296	0.03	0.0103	0.01	0.19
Body	F	BT	39		Left Edge 10mm	\	12.40	13.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	BT	39		Right Edge 10mm	\	12.40	13.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	BT	39		Top 10mm	\	12.40	13.00	<0.01	<0.01	<0.01	<0.01	\
Body	F	BT	39		Bottom 10mm	\	12.40	13.00	<0.01	<0.01	<0.01	<0.01	\

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Test Position	Phantom position L/R/F	Frequency Band	Channel Number	Frequency (MHz)	Test setup	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
Body	F	WCDMA 850	4233	846.6	Rear 10mm	0.859	0.83	1.03	\
Body	F	WCDMA 850	4183	836.6	Rear 10mm	1.04	0.99	1.05	\
Body	F	WCDMA 850	4132	826.4	Rear 10mm	0.986	0.94	1.05	\
Body	F	WCDMA 1700	1513	1752.6	Rear 15mm	0.942	0.81	1.16	\
Body	F	WCDMA 1700	1412	1732.4	Rear 15mm	1.13	1.10	1.03	\
Body	F	WCDMA 1700	1312	1712.4	Rear 15mm	0.952	0.89	1.07	\
Body	F	WCDMA 1700	1513	1752.6	Rear 10mm	0.911	0.79	1.15	\
Body	F	WCDMA 1700	1412	1732.4	Rear 10mm	1.016	0.92	1.1	\
Body	F	WCDMA 1700	1312	1712.4	Rear 10mm	1.08	1.06	1.02	\
Body	F	WCDMA 1700	1412	1732.4	Rear 10mm Open	0.884	0.84	1.05	\
Body	F	WCDMA 1900	9400	1880	Rear 15mm	0.848	0.72	1.17	\
Body	F	WCDMA 1900	9262	1852.4	Rear 15mm	0.888	0.84	1.06	\
Body	F	WCDMA 1900	9538	1907.6	Rear 10mm	0.964	0.90	1.07	\
Body	F	WCDMA 1900	9400	1880	Rear 10mm	0.951	0.84	1.13	\
Body	F	WCDMA 1900	9262	1852.4	Rear 10mm	0.976	0.92	1.06	\
Body	F	WCDMA 1900	9400	1880	Rear 10mm Open	0.807	0.72	1.12	\
Body	F	LTE Band2	19100	1900	1RB-Low Rear 15mm	1.02	0.91	1.12	\
Body	F	LTE Band2	18700	1860	1RB-Low Rear 15mm	0.99	0.88	1.12	\
Body	F	LTE Band2	18900	1880	1RB-Low Rear 15mmOpen	0.863	0.80	1.08	\
Body	F	LTE Band2	18700	1860	1RB-Low Rear 15mmOpen	0.811	0.78	1.04	\
Body	F	LTE Band2	18900	1880	50RB-High Rear 15mm	0.804	0.76	1.06	\
Body	F	LTE Band2	18900	1880	100RB Rear 15mm	0.833	0.71	1.17	\
Body	F	LTE Band2	19100	1900	1RB-Low Rear 10mm	1.04	0.89	1.17	\
Body	F	LTE Band2	18900	1880	1RB-Low Rear 10mm	1.03	0.98	1.05	\
Body	F	LTE Band2	18700	1860	1RB-Low Rear 10mm	0.971	0.88	1.1	\
Body	F	LTE Band2	18900	1880	100RB Rear 10mm	0.985	0.94	1.05	\
Body	F	LTE Band4	20300	1745	1RB-Low Rear 15mm	1.06	0.93	1.14	\
Body	F	LTE Band4	20175	1732.5	1RB-Low Rear 15mm	0.897	0.86	1.04	\
Body	F	LTE Band4	20300	1745	100RB Rear 15mm	0.976	0.96	1.02	\
Body	F	LTE Band4	20300	1745	1RB-Low Rear 10mm	0.98	0.87	1.13	\
Body	F	LTE Band4	20175	1732.5	1RB-Low Rear 10mm	0.96	0.85	1.13	\
Body	F	LTE Band4	20050	1720	1RB-Low Rear 10mm	1.04	0.92	1.13	\
Body	F	LTE Band4	20050	1720	50RB-High Rear 10mm	0.821	0.73	1.13	\
Body	F	LTE Band4	20050	1720	100RB Rear 10mm	0.956	0.94	1.02	\
Body	F	LTE Band5	20450	829	1RB-Low Rear 10mm	1.08	0.98	1.1	\
Body	F	LTE Band5	20525	836.5	50RB Rear 10mm	0.961	0.86	1.12	\

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient	B	0	R	$\sqrt{3}$	1	1	0	0	∞

	conditions-reflection								
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Test sample related									
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
Phantom and set-up									
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						9.55	9.43
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						19.1	18.9

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient	B	0	R	$\sqrt{3}$	1	1	0	0	∞

	conditions-noise									
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.7	10.6	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						21.4	21.1	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc.	Std. Unc.	Degree of freedom
-----	-------------------	------	-------------------	-----------------------	------	---------	----------	-----------	-----------	-------------------

Measurement system

1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞

8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z- Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.4	10.3	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.8	20.6	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
-----	-------------------	------	-------------------	-----------------------	------	------------	-------------	----------------------	-----------------------	-------------------------

Measurement system

1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞

3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞

Test sample related

15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞

Phantom and set-up

18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$							13.5	13.4	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$							27.0	26.8	

17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	January 5, 2023	One year
02	Power sensor	NRP50S	101488	June 17, 2022	One year
03	Power sensor	NRP50S	101489		
04	Signal Generator	E4438C	MY49070393	May 17, 2022	One Year
05	Amplifier	60S1G4	0331848	No Calibration Requested	
07	BTS	CMW500	129942	February 14 2022	One year
08	DAE	SPEAG DAE4	777	January 11, 2023	One year
09	E-field Probe	SPEAG EX3DV4	7673	July 08,2022	One year
10	Dipole Validation Kit	SPEAG D750V3	1017	July 20,,2022	One year
11	Dipole Validation Kit	SPEAG D835V2	4d069	July 20,,2022	One year
12	Dipole Validation Kit	SPEAG D1750V2	1003	July 18,,2022	One year
13	Dipole Validation Kit	SPEAG D1900V2	5d101	July 26,2022	One year
14	Dipole Validation Kit	SPEAG D2450V2	853	July 20,2022	One year

END OF REPORT BODY

ANNEX A Graph Results

WCDMA850 Head

Date/Time: 2/2/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 826.4 \text{ MHz}$; $\sigma = 0.939 \text{ S/m}$; $\epsilon_r = 43.724$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 850 (0) Frequency: 826.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022


Area Scan (81x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.773 W/kg

Zoom Scan (6x8x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.912 W/kg

SAR(1 g) = 0.543 W/kg; SAR(10 g) = 0.348 W/kg

Maximum value of SAR (measured) = 0.767 W/kg

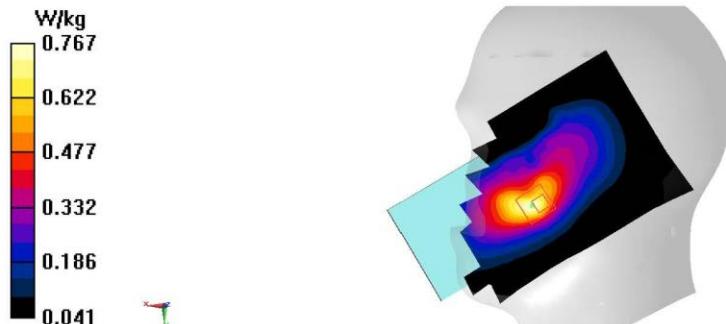

A. 1

WCDMA850 Body-10mm

Date/Time: 2/2/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.939 \text{ S/m}$; $\epsilon_r = 43.724$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 850 (0) Frequency: 836.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.35 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 36.05 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.55 W/kg
SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.698 W/kg
Maximum value of SAR (measured) = 1.35 W/kg

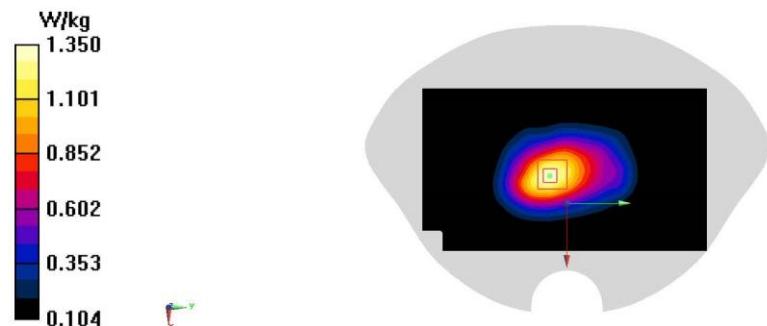

A. 2

W1700 Head

Date/Time: 2/3/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 1700 Band4 (0) Frequency: 1732.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.49, 8.49, 8.49); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.534 W/kg

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.520 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.583 W/kg
SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.226 W/kg
Maximum value of SAR (measured) = 0.485 W/kg

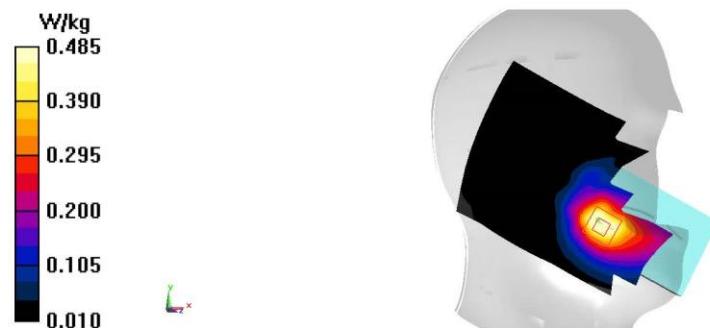

A. 3

WCDMA1700 Body-15mm

Date/Time: 2/3/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 1700 Band4 (0) Frequency: 1732.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.49, 8.49, 8.49); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.72 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.884 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.96 W/kg
SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.620 W/kg
Maximum value of SAR (measured) = 1.64 W/kg

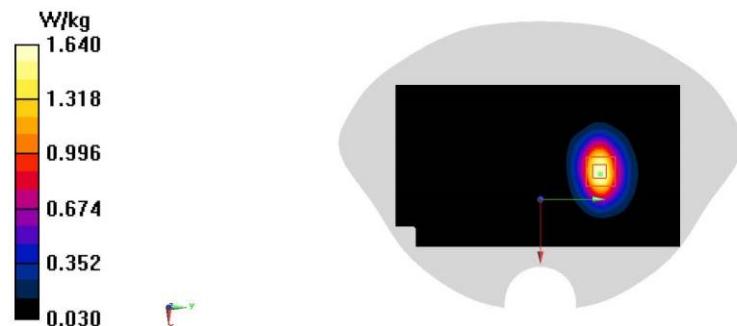

A. 4

WCDMA1700 Body-10mm

Date/Time: 2/3/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.355$ S/m; $\epsilon_r = 41.91$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 1700 Band4 (0) Frequency: 1712.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.49, 8.49, 8.49); Calibrated: 7/8/2022

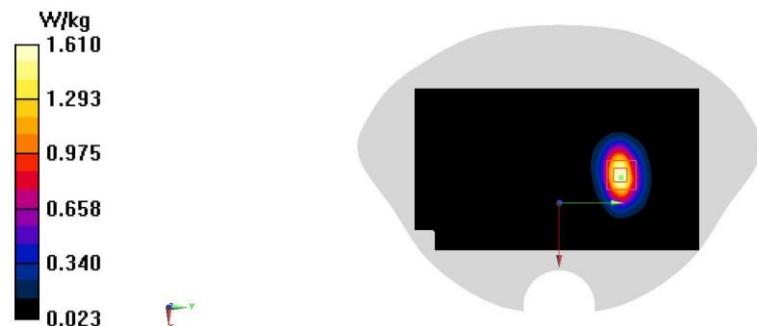Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.74 W/kg**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.808 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.98 W/kg
SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.559 W/kg
Maximum value of SAR (measured) = 1.61 W/kg

A. 5

W1900 Head

Date/Time: 2/4/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 1907.6 \text{ MHz}$; $\sigma = 1.476 \text{ S/m}$; $\epsilon_r = 41.622$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 1900 (0) Frequency: 1907.6 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.648 W/kg

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.897 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.719 W/kg
SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.305 W/kg
Maximum value of SAR (measured) = 0.617 W/kg



A. 6

WCDMA1900 Body-15mm

Date/Time: 2/4/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 41.686$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 1900 (0) Frequency: 1852.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.36 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.44 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 1.56 W/kg
SAR(1 g) = 0.888 W/kg; SAR(10 g) = 0.512 W/kg
Maximum value of SAR (measured) = 1.31 W/kg

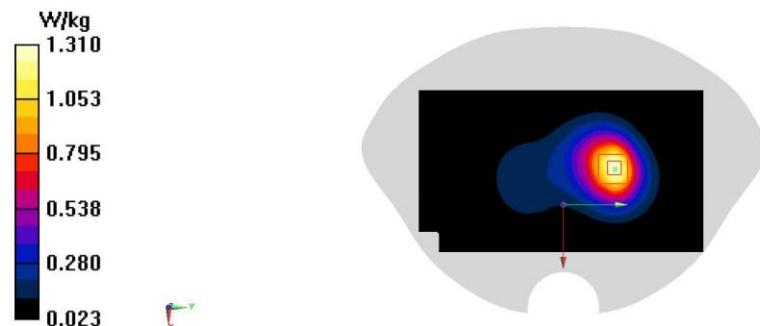

A. 7

WCDMA1900 Body-10mm

Date/Time: 2/4/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.442$ S/m; $\epsilon_r = 41.686$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WCDMA 1900 (0) Frequency: 1852.4 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.57 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.03 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.80 W/kg
SAR(1 g) = 0.976 W/kg; SAR(10 g) = 0.534 W/kg
Maximum value of SAR (measured) = 1.50 W/kg

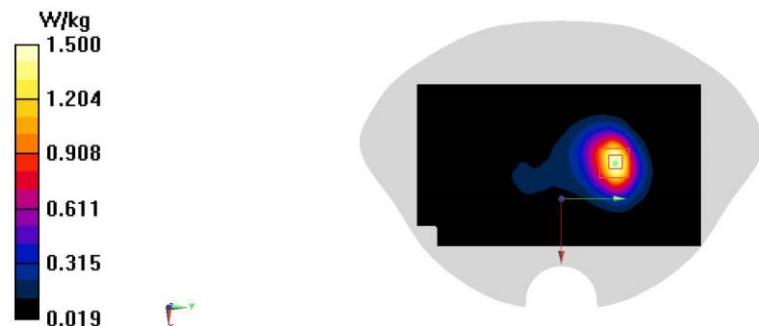

A. 8

LTE Band2 Head

Date/Time: 2/4/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.459$ S/m; $\epsilon_r = 41.653$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band2(20MB) (0) Frequency: 1880 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.248 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.118 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.222 W/kg
SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.097 W/kg
Maximum value of SAR (measured) = 0.195 W/kg

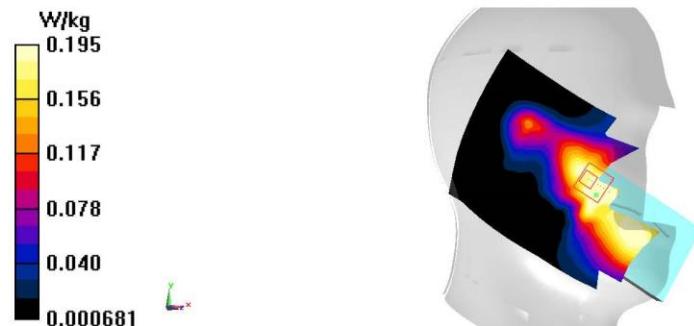

A. 9

LTE Band2 Body-15mm

Date/Time: 2/4/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.471 \text{ S/m}$; $\epsilon_r = 41.632$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band2(20MB) (0) Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.54 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 10.53 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.566 W/kg
Maximum value of SAR (measured) = 1.50 W/kg

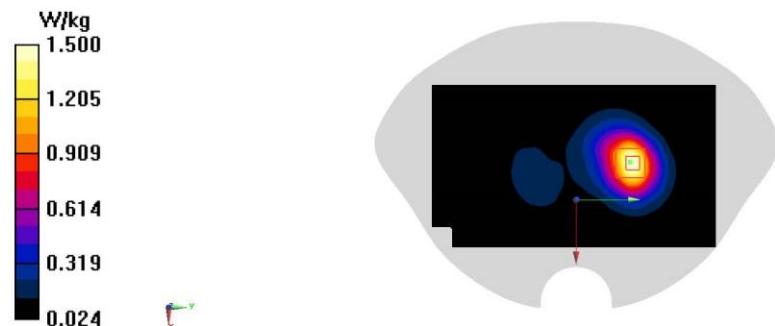

A. 10

LTE Band2 Body- 10mm

Date/Time: 2/4/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.471 \text{ S/m}$; $\epsilon_r = 41.632$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band2(20MB) (0) Frequency: 1900 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.07, 8.07, 8.07); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: $dx=1.500 \text{ mm}$,
 $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.62 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,
 $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.98 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.556 W/kg

Maximum value of SAR (measured) = 1.52 W/kg

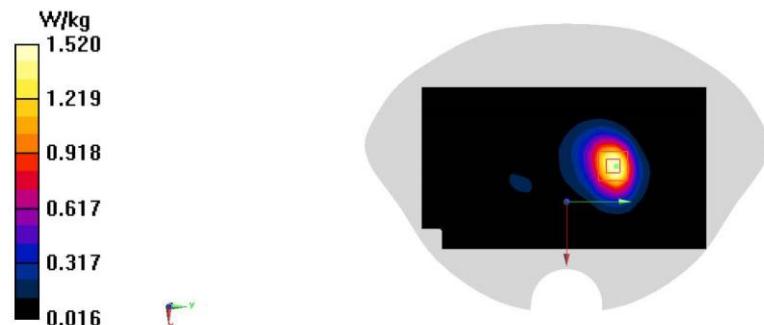

A. 11

LTE Band4 Head

Date/Time: 2/3/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 41.906$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band4 (0) Frequency: 1720 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.49, 8.49, 8.49); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.244 W/kg

Zoom Scan (6x8x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.105 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.275 W/kg
SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.115 W/kg
Maximum value of SAR (measured) = 0.238 W/kg

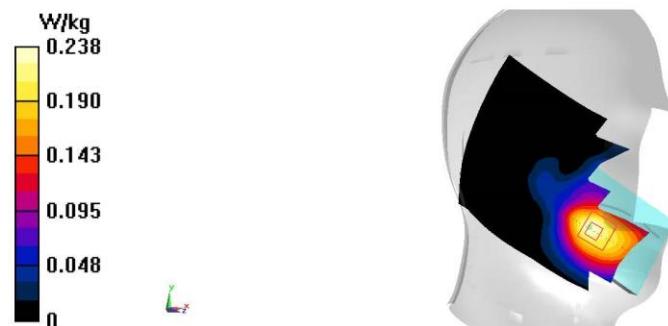

A. 12

LTE Band4 Body-15mm

Date/Time: 2/3/2023


Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.376 \text{ S/m}$; $\epsilon_r = 41.887$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band4 (0) Frequency: 1745 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.49, 8.49, 8.49); Calibrated: 7/8/2022

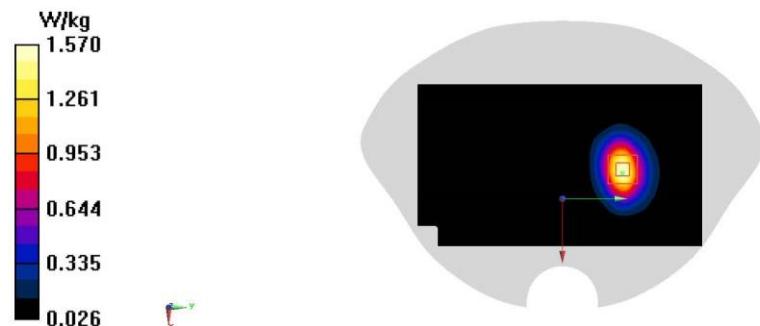Area Scan (81x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.58 W/kg**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.654 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.87 W/kg
SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.571 W/kg
Maximum value of SAR (measured) = 1.57 W/kg

A. 13

LTE Band4 Body-10mm

Date/Time: 2/3/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used: $f = 1720$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 41.906$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band4 (0) Frequency: 1720 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.49, 8.49, 8.49); Calibrated: 7/8/2022

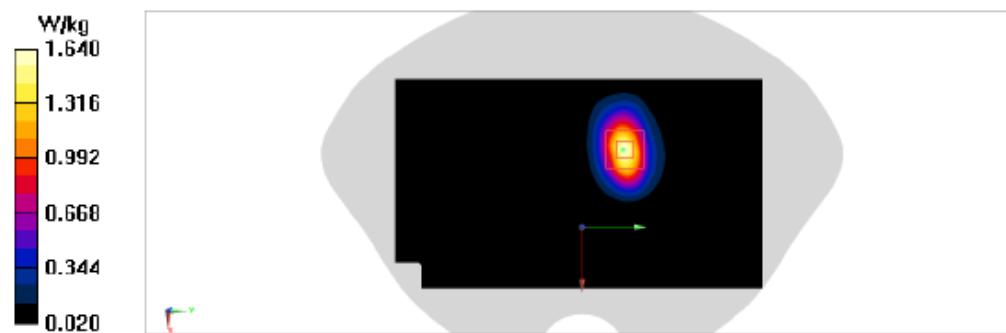Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.62 W/kg**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.075 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 1.98 W/kg
SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.530 W/kg
Maximum value of SAR (measured) = 1.64 W/kg

A. 14

LTE Band5 Head

Date/Time: 2/2/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 43.749$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band5 (0) Frequency: 829 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.705 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.51 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.827 W/kg
SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.336 W/kg
Maximum value of SAR (measured) = 0.708 W/kg

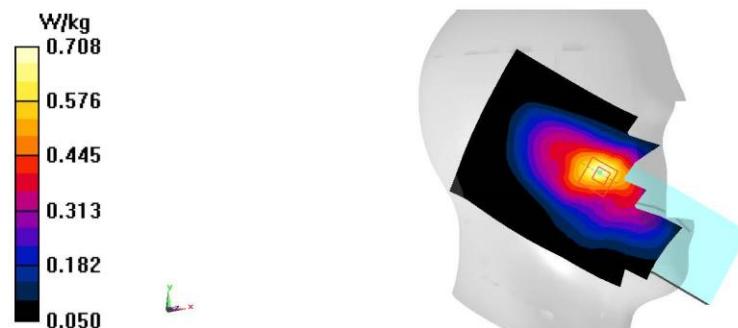

A. 15

LTE Band5 Body-15mm

Date/Time: 2/2/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 43.749$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band5 (0) Frequency: 829 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.18 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 33.41 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.22 W/kg
SAR(1 g) = 0.859 W/kg; SAR(10 g) = 0.612 W/kg
Maximum value of SAR (measured) = 1.08 W/kg

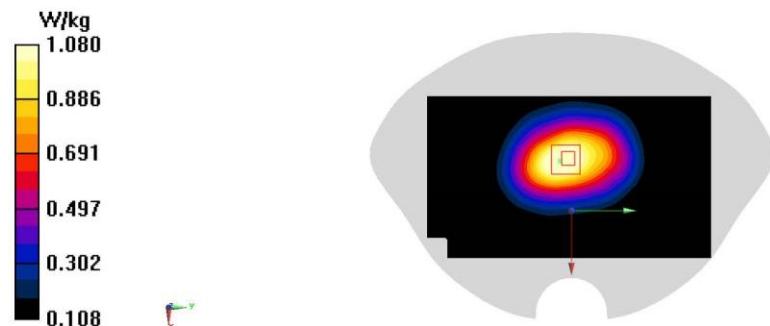

A. 16

LTE Band5 Body-10mm

Date/Time: 2/2/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used (interpolated): $f = 829$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 43.749$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band5 (0) Frequency: 829 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

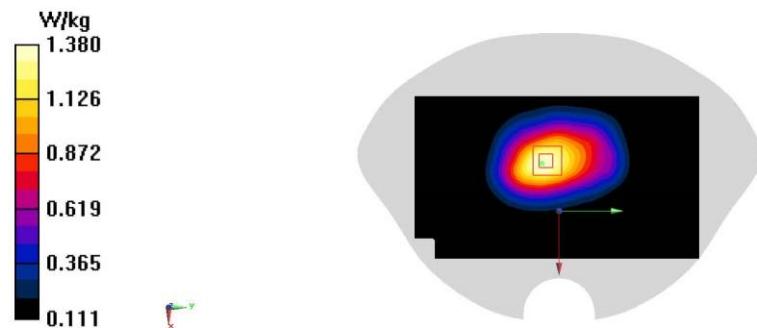Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.42 W/kg**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 33.56 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 1.56 W/kg
SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.745 W/kg
Maximum value of SAR (measured) = 1.38 W/kg

A. 17

LTE Band12 Head

Date/Time: 2/1/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 44.117$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band12 (0) Frequency: 707.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.778 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.520 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.37 W/kg
SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.365 W/kg
Maximum value of SAR (measured) = 1.05 W/kg

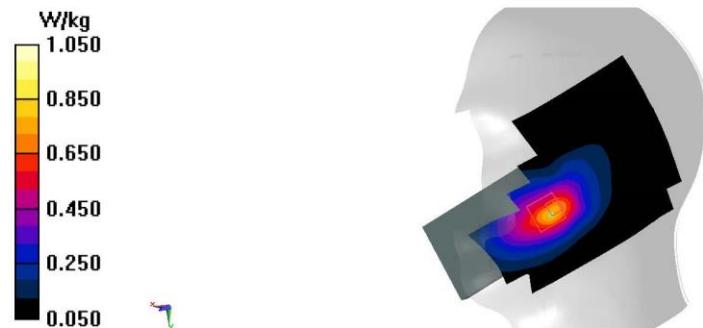

A. 18

LTE Band12 Body-10mm

Date/Time: 2/1/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 44.117$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band12 (0) Frequency: 707.5 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.630 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 24.12 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 0.715 W/kg
SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.358 W/kg
 Maximum value of SAR (measured) = 0.630 W/kg

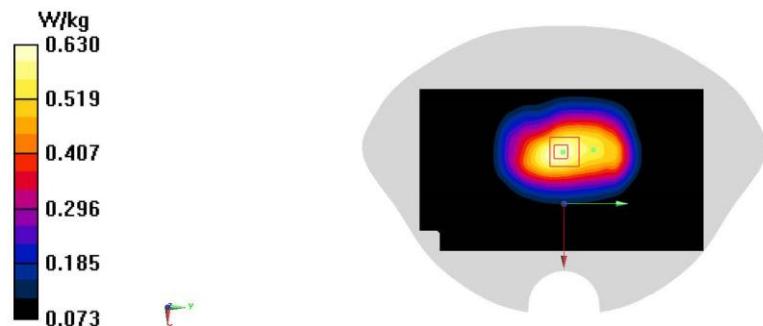

A. 19

LTE Band14 Head

Date/Time: 2/1/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 43.854$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band14 (0) Frequency: 793 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.580 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.46 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.786 W/kg
SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.318 W/kg
Maximum value of SAR (measured) = 0.669 W/kg



A. 20

LTE Band14 Body-10mm

Date/Time: 2/1/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 43.854$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, LTE Band14 (0) Frequency: 793 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34); Calibrated: 7/8/2022

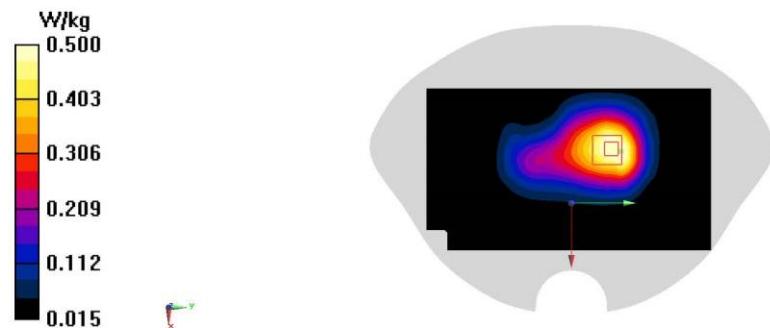Area Scan (81x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.524 W/kg**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.45 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.591 W/kg
SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.259 W/kg
Maximum value of SAR (measured) = 0.500 W/kg

WIFI 2.4G Head

Date/Time: 2/18/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2412 \text{ MHz}$; $\sigma = 1.823 \text{ S/m}$; $\epsilon_r = 40.785$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLan 2450 (0) Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.57, 7.57, 7.57); Calibrated: 7/8/2022

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.161 W/kg

Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.1 dB
Peak SAR (extrapolated) = 0.201 W/kg
SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.057 W/kg
Maximum value of SAR (measured) = 0.165 W/kg

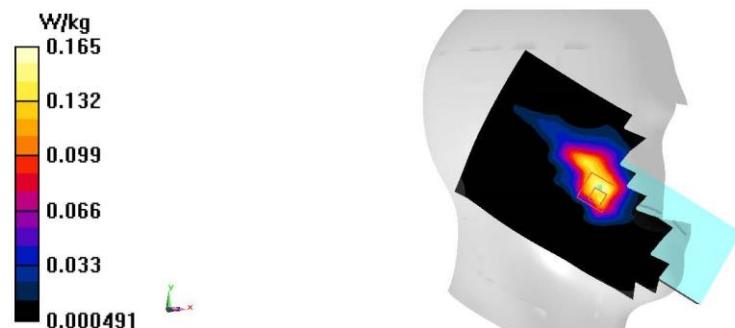

A. 22

WIFI 2.4G Body-10mm

Date/Time: 2/18/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used (interpolated): $f = 2412 \text{ MHz}$; $\sigma = 1.823 \text{ S/m}$; $\epsilon_r = 40.785$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, WLan 2450 (0) Frequency: 2412 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.57, 7.57, 7.57); Calibrated: 7/8/2022

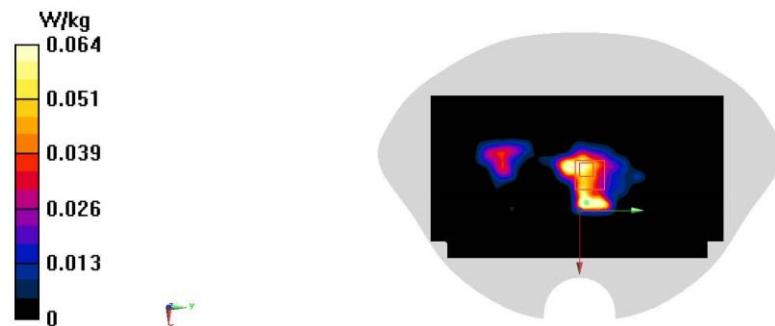Area Scan (101x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0955 W/kg**Zoom Scan (11x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.758 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.0830 W/kg
SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.015 W/kg
Maximum value of SAR (measured) = 0.0643 W/kg

A. 23

BT Head

Date/Time: 2/18/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.845$ S/m; $\epsilon_r = 40.742$; $\rho = 1000$ kg/m³


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, Bluetooth2 (0) Frequency: 2441 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.57, 7.57, 7.57); Calibrated: 7/8/2022

Area Scan (101x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0658 W/kg

Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.062 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.0510 W/kg
SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.012 W/kg
Maximum value of SAR (measured) = 0.0423 W/kg

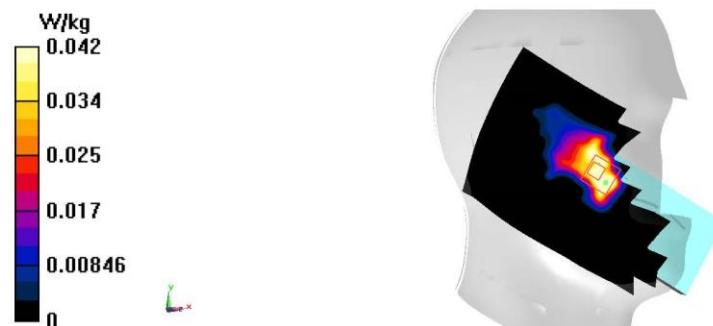

A. 24

BT Body-10mm

Date/Time: 2/18/2023

Electronics: DAE4 Sn777


Medium: H700-6000M

Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.845$ S/m; $\epsilon_r = 40.742$; $\rho = 1000$ kg/m³

Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, Bluetooth2 (0) Frequency: 2441 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(7.57, 7.57, 7.57); Calibrated: 7/8/2022

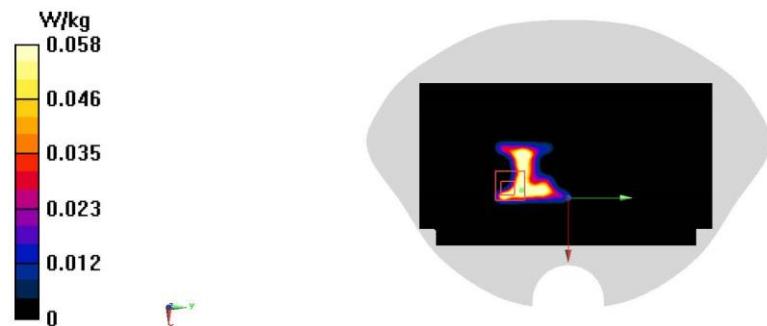Area Scan (101x181x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.116 W/kg**Zoom Scan (8x9x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 0.0750 W/kg
SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.010 W/kg
Maximum value of SAR (measured) = 0.0581 W/kg

A. 25

ANNEX B System Verification Results

System Performance Check-D750

Date/Time: 2/1/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.906 \text{ S/m}$; $\epsilon_r = 43.983$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, CW (0) Frequency: 750 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34);

Area Scan (61x141x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 2.37 W/kg

Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 50.14 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 2.94 W/kg
SAR(1 g) = 2.06 W/kg; SAR(10 g) = 1.4 W/kg
Maximum value of SAR (measured) = 2.54 W/kg

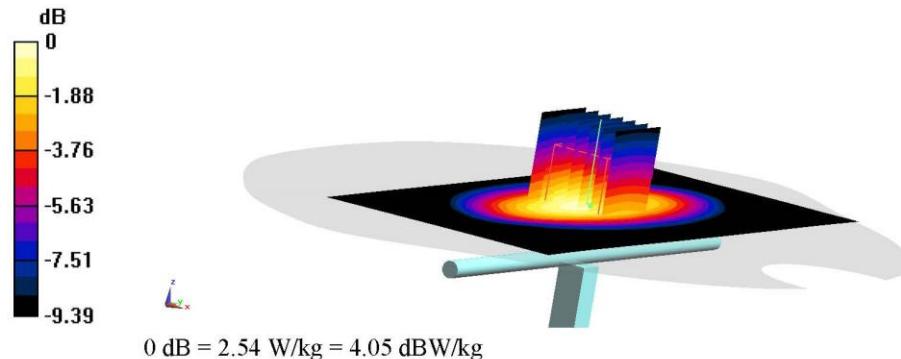

B. 1

System Performance Check-D835

Date/Time: 2/2/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.939 \text{ S/m}$; $\epsilon_r = 43.569$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, CW (0) Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(10.34, 10.34, 10.34);

Area Scan (61x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 3.10 W/kg

Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 57.80 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 4.02 W/kg
SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.52 W/kg
Maximum value of SAR (measured) = 3.26 W/kg

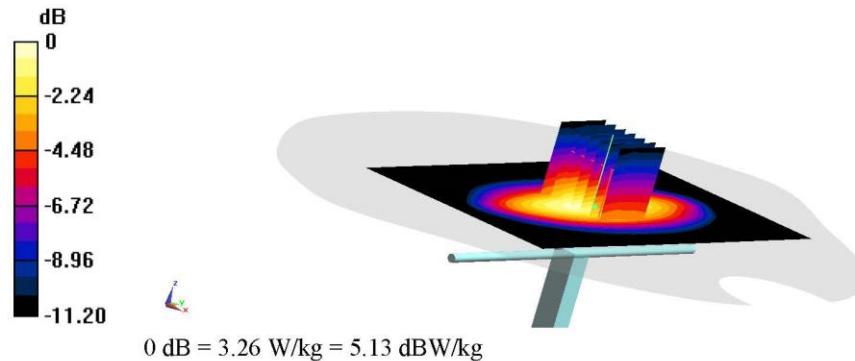

B. 2

System Performance Check-D1750

Date/Time: 2/3/2023

Electronics: DAE4 Sn777

Medium: H700-6000M

Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.38 \text{ S/m}$; $\epsilon_r = 41.881$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.3°C Liquid Temperature: 22.5°C

Communication System: UID 0, CW Frequency: 1750 MHz Duty Cycle: 1:1

Probe: EX3DV4 - SN7673 ConvF(8.49, 8.49, 8.49);

Area Scan (61x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 12.4 W/kg

Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 93.31 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 15.3 W/kg
SAR(1 g) = 8.68 W/kg; SAR(10 g) = 4.7 W/kg
Maximum value of SAR (measured) = 12.2 W/kg

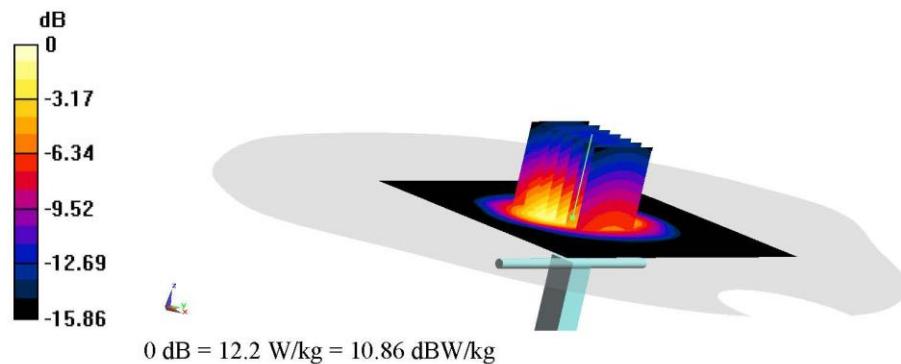

B. 3