



SAR TEST REPORT

No. I19Z60566-SEM01

For

Shenzhen Tinno Mobile Technology Corp.

Smart Phone

Model Name: U304AA

With

Hardware Version: V1.0

Software Version: U304AAV01.18.11

FCC ID: XD6U304AA

Issued Date: 2019-5-7



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT
No. 51, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.
Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504
Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Issue Date	Description
I19Z60566-SEM01	Rev.0	2019-5-7	Initial creation of test report

TABLE OF CONTENT

1 TEST LABORATORY	5
1.1 TESTING LOCATION	5
1.2 TESTING ENVIRONMENT	5
1.3 PROJECT DATA	5
1.4 SIGNATURE	5
2 STATEMENT OF COMPLIANCE	6
3 CLIENT INFORMATION	8
3.1 APPLICANT INFORMATION	8
3.2 MANUFACTURER INFORMATION	8
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
4.1 ABOUT EUT	9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	9
5 TEST METHODOLOGY	10
5.1 APPLICABLE LIMIT REGULATIONS	10
5.2 APPLICABLE MEASUREMENT STANDARDS	10
6 SPECIFIC ABSORPTION RATE (SAR)	11
6.1 INTRODUCTION	11
6.2 SAR DEFINITION	11
7 TISSUE SIMULATING LIQUIDS	12
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	12
7.2 DIELECTRIC PERFORMANCE	12
8 SYSTEM VERIFICATION	19
8.1 SYSTEM SETUP	19
8.2 SYSTEM VERIFICATION	20
9 MEASUREMENT PROCEDURES	21
9.1 TESTS TO BE PERFORMED	21
9.2 GENERAL MEASUREMENT PROCEDURE	23
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR	24
9.4 SAR MEASUREMENT FOR LTE	25
9.5 BLUETOOTH & Wi-Fi MEASUREMENT PROCEDURES FOR SAR	25
9.6 POWER DRIFT	26
10 AREA SCAN BASED 1-G SAR	26
10.1 REQUIREMENT OF KDB	26
10.2 FAST SAR ALGORITHMS	26
11 CONDUCTED OUTPUT POWER	27

11.1	GSM MEASUREMENT RESULT	27
11.2	WCDMA MEASUREMENT RESULT.....	29
11.3	LTE MEASUREMENT RESULT	31
11.4	Wi-Fi AND BT MEASUREMENT RESULT	46
12	SIMULTANEOUS TX SAR CONSIDERATIONS	48
12.1	INTRODUCTION.....	48
12.2	TRANSMIT ANTENNA SEPARATION DISTANCES	48
12.3	SAR MEASUREMENT POSITIONS	49
12.4	STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....	49
13	EVALUATION OF SIMULTANEOUS.....	50
14	SAR TEST RESULT	52
14.1	SAR RESULTS	52
14.2	FULL SAR	73
14.3	WiFi EVALUATION.....	74
15	SAR MEASUREMENT VARIABILITY	77
16	MEASUREMENT UNCERTAINTY	78
16.1	MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz)	78
16.2	MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz).....	79
16.3	MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHz~3GHz).....	80
16.4	MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz)	81
17	MAIN TEST INSTRUMENTS.....	83
ANNEX A	GRAPH RESULTS.....	84
ANNEX B	SYSTEM VERIFICATION RESULTS.....	124
ANNEX C	SAR MEASUREMENT SETUP	137
ANNEX D	POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	143
ANNEX E	EQUIVALENT MEDIA RECIPES	146
ANNEX F	SYSTEM VALIDATION	147
ANNEX G	PROBE CALIBRATION CERTIFICATE	148
ANNEX H	DIPOLE CALIBRATION CERTIFICATE.....	159
ANNEX I	EXTENDED CALIBRATION SAR DIPOLE.....	207
ANNEX J	ACCREDITATION CERTIFICATE.....	210

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

1.2 Testing Environment

Temperature:	18°C~25 °C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg

1.3 Project Data


Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	May 1, 2019
Testing End Date:	May 5, 2019

1.4 Signature



Lin Xiaojun

(Prepared this test report)



Qi Dianyuan

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory

(Approved this test report)

2 Statement of Compliance

The maximum results of SAR found during testing for Shenzhen Tinno Mobile Technology Corp. Smart Phone U304AA is as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g (W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM 850	0.17	PCE
	PCS 1900	0.22	
	UMTS FDD 2	0.22	
	UMTS FDD 4	0.17	
	UMTS FDD 5	0.54	
	LTE Band 2	0.23	
	LTE Band 4	0.21	
	LTE Band 5	0.36	
	LTE Band 12	0.25	
	LTE Band 14	0.42	
	LTE Band 30	0.26	
Hotspot (Separation Distance 10mm)	WiFi 2.4 GHz	1.28	DTS
	GSM 850	0.62	PCE
	PCS 1900	0.84	
	UMTS FDD 2	1.25	
	UMTS FDD 4	1.12	
	UMTS FDD 5	0.70	
	LTE Band 2	1.31	
	LTE Band 4	1.17	
	LTE Band 5	0.40	
	LTE Band 12	0.53	
	LTE Band 14	0.62	
Body worn (Separation Distance 15mm)	LTE Band 30	1.10	PCE
	WiFi 2.4 GHz	0.34	
	PCS 1900	0.87	
	UMTS FDD 2	0.94	
	UMTS FDD 4	1.00	
	LTE Band 2	0.79	

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10/15 mm between this device and the body of the user. Use of other accessories may not ensure

compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of (**Table 2.1**), and the values are: 1.31 W/kg (1g).

Table 2.2: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Highest reported SAR value for Head	Left hand, Touch cheek (LTE Band30)	0.26	1.28	1.54
Highest reported SAR value for Body 10mm	Rear (LTE Band4)	1.17	0.34	1.51
Highest reported SAR value for Body 15mm	Rear (LTE Band4)	1.20	0.34 (10mm)	1.54

Table 2.3: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Head	Left hand, Touch cheek (WCDMA 850)	0.54	0.26	0.80
Maximum reported SAR value for Body	Rear (LTE Band4)	1.20	0.13	1.33

[1] - Estimated SAR for Bluetooth (see the table 13.3)

3 Client Information

3.1 Applicant Information

Company Name:	Shenzhen Tinno Mobile Technology Corp.
Address /Post:	4/F, H-3 Building,OCT Eastern Industrial Park. NO.1 XiangShan East Road, Nan Shan District,Shenzhen, P.R.China
City:	Shanghai
Postal Code:	201203
Country:	China
Contact Person:	Jingwen.Guo
E-mail:	jingwen.guo@tinno.com
Telephone:	0755-86095550
Fax:	/

3.2 Manufacturer Information

Company Name:	Shenzhen Tinno Mobile Technology Corp.
Address /Post:	4/F, H-3 Building,OCT Eastern Industrial Park. NO.1 XiangShan East Road, Nan Shan District,Shenzhen, P.R.China
City:	Shanghai
Postal Code:	201203
Country:	China
Contact Person:	Jingwen.Guo
E-mail:	jingwen.guo@tinno.com
Telephone:	0755-86095550
Fax:	/

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	Smart Phone
Model name:	U304AA
Operating mode(s):	GSM 850/900/1800/1900 WCDMA850/1700/1900 LTE B2/4/5/12/14/30, BT, WiFi
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850) 1850.2 – 1910 MHz (GSM 1900) 826.4–846.6 MHz (WCDMA 850 Band V) 1712.4 – 1752.6 MHz (WCDMA 1700 Band IV) 1852.4–1907.6 MHz (WCDMA1900 Band II) 1860 – 1900 MHz (LTE Band 2) 1720 – 1745 MHz (LTE Band 4) 824.7 – 848.3 MHz (LTE Band 5) 704.7 – 715.3 MHz (LTE Band 12) 790.5 – 795.5MHz (LTE Band 14) 2307.5 – 2312.5MHz(LTE Band 30) 2412 – 2462 MHz (Wi-Fi 2.4G)
GRPS/EGPRS Multislot Class:	12
GRPS capability Class:	B
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Hotspot mode:	Support
Product dimension	Overall Diagonal 159.99mm

4.2 Internal Identification of EUT used during the test

EUTID	IMEI	HW Version	SW Version
1	863382040008045	V1.0	U304AAV01.18.11
2	863382040008003	V1.0	U304AAV01.18.11
3	863382040009316	V1.0	U304AAV01.18.11

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1&2and conducted power with the EUT3.

4.3 Internal Identification of AE used during the test

AE ID	Description	Model	SN	Manufactor
AE1	Battery	LT25H426271B0		Shenzhen BYD Lithium Battery Company Limited

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528:2013 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

KDB447498 D01 General RF Exposure Guidance v06 Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r03 SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01 SAR Measurement Procedures for 3G Devices

KDB941225 D05 SAR for LTE Devices v02r05 SAR Evaluation Considerations for LTE Devices

KDB941225 D06 Hotspot Mode SAR v02r01 SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227 D01 802.11 Wi-Fi SAR v02r02 SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04 SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB865664 D02 RF Exposure Reporting v01r02 RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid


Table 7.1: Targets for tissue simulating liquid

Frequency(MHz)	Liquid Type	Conductivity(σ)	$\pm 5\%$ Range	Permittivity(ϵ)	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
2300	Head	1.67	1.59~1.75	39.47	37.5~41.4
2300	Body	1.85	1.76~1.94	52.8	50.2~55.4

7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid


Measurement Date yyyy/mm/dd	Frequency	Type	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2019/5/1	750 MHz	Head	41.53	-0.98	0.888	-0.22
		Body	55.83	0.59	0.961	0.10
2019/5/2	835 MHz	Head	41.04	-1.11	0.915	1.67
		Body	55.46	0.47	0.958	-1.24
2019/5/3	1750 MHz	Head	40.53	1.12	1.368	-0.15
		Body	52.72	-1.27	1.472	-1.21
2019/5/4	1900 MHz	Head	39.59	-1.02	1.377	-1.64
		Body	52.71	-1.11	1.495	-1.64
2019/5/5	2300 MHz	Head	39.08	-1.06	1.688	1.08
		Body	53.54	1.21	1.783	-1.49
2019/5/6	2450 MHz	Head	39.21	0.03	1.788	-0.67
		Body	51.83	-1.65	1.92	-1.54

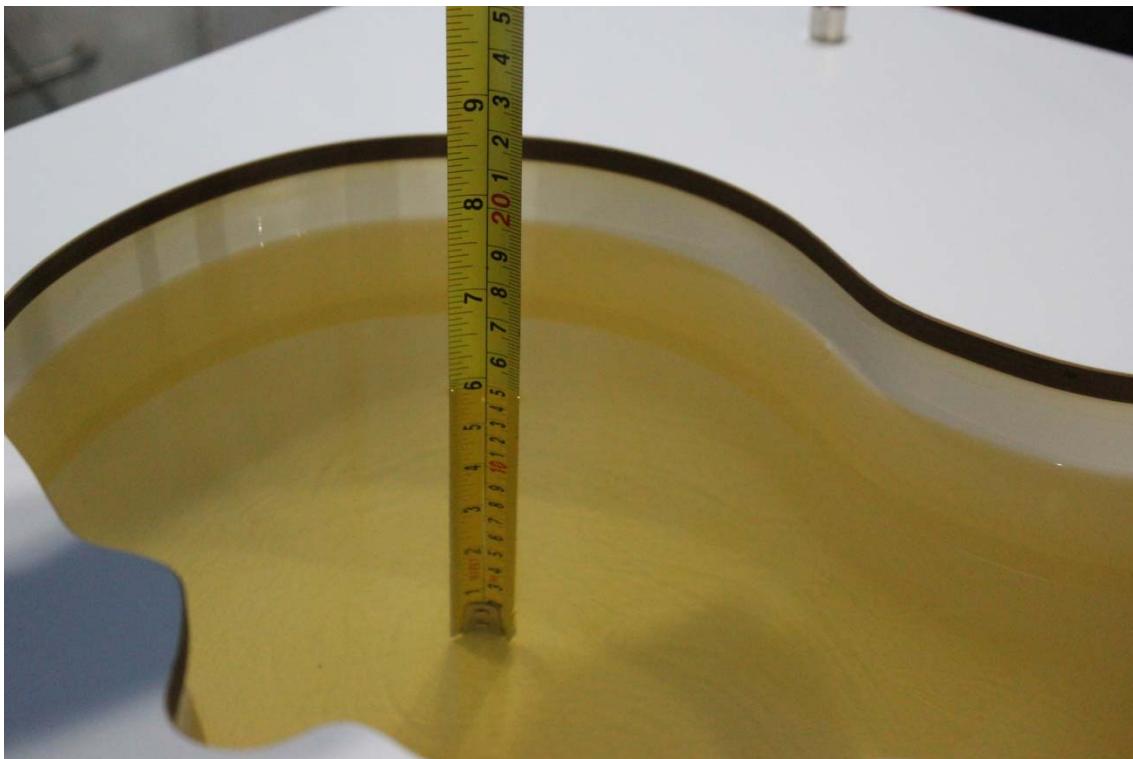

Picture 7-1 Liquid depth in the Head Phantom (750 MHz)



Picture 7-2 Liquid depth in the Flat Phantom (750 MHz)

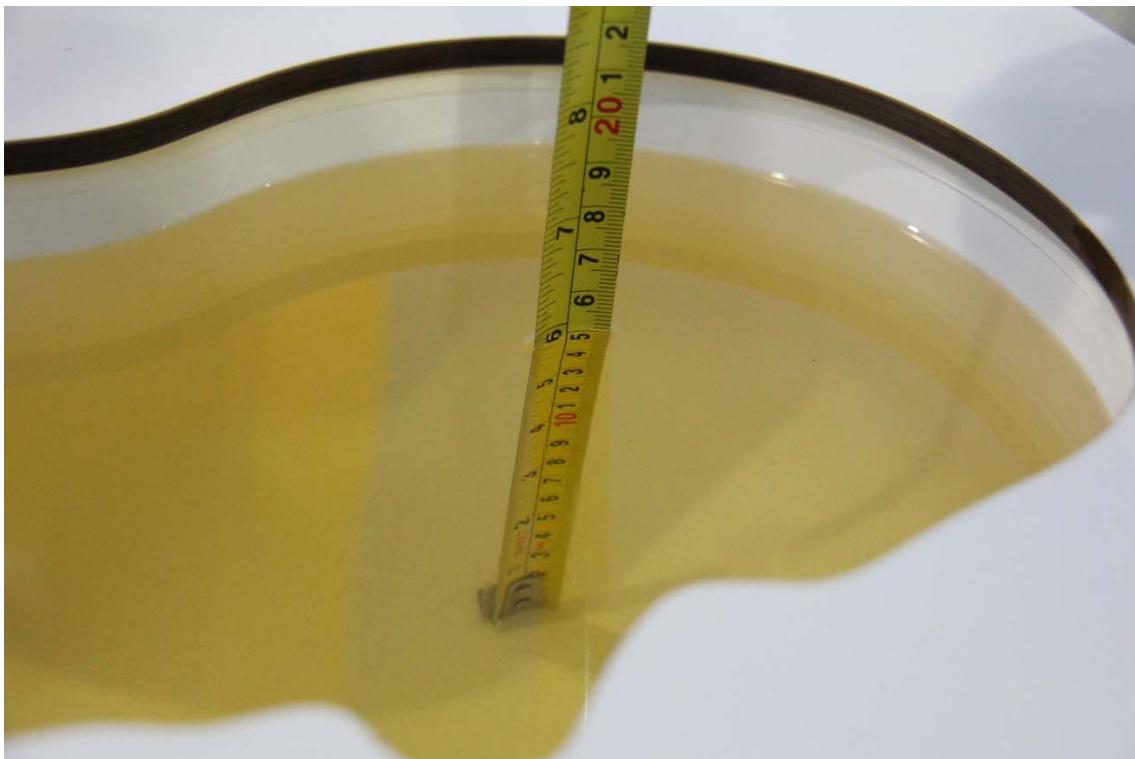


Picture 7-3 Liquid depth in the Head Phantom (835MHz)



Picture 7-4 Liquid depth in the Flat Phantom (835MHz)



Picture 7-5 Liquid depth in the Head Phantom (1750 MHz)

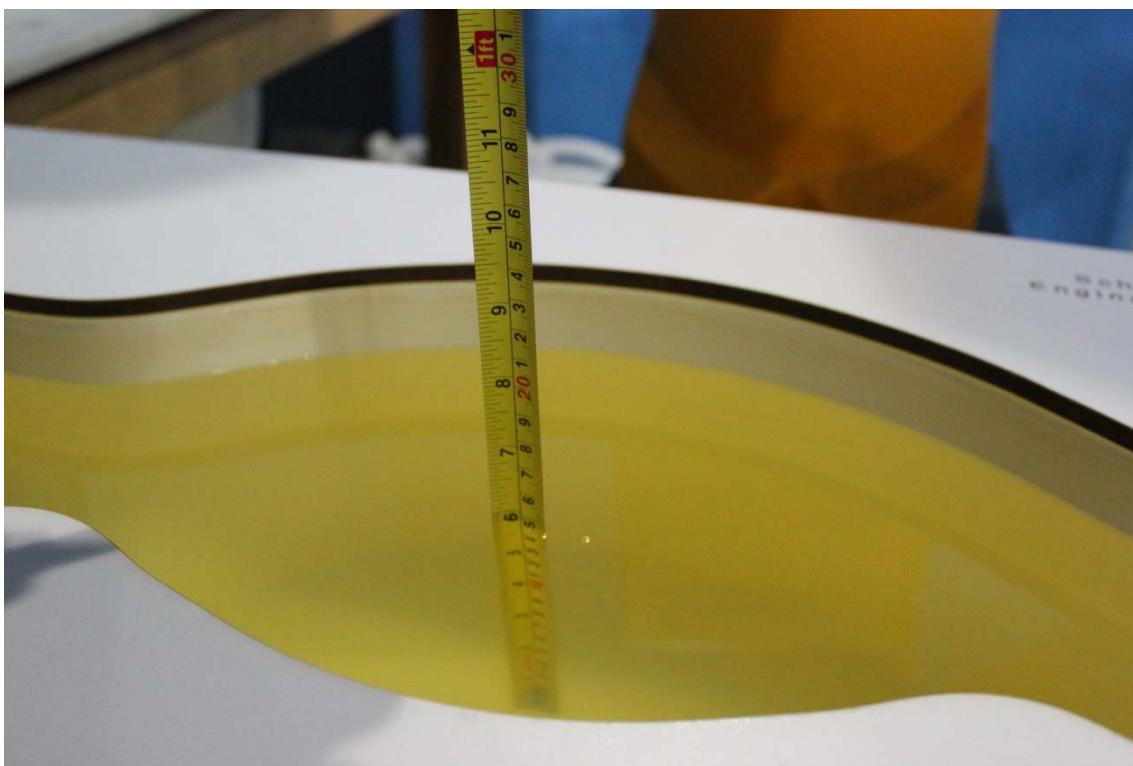

Picture 7-6 Liquid depth in the Flat Phantom (1750MHz)




Picture 7-7 Liquid depth in the Head Phantom (1900 MHz)




Picture 7-8 Liquid depth in the Flat Phantom (1900MHz)




Picture 7-9 Liquid depth in the Head Phantom (2450MHz)

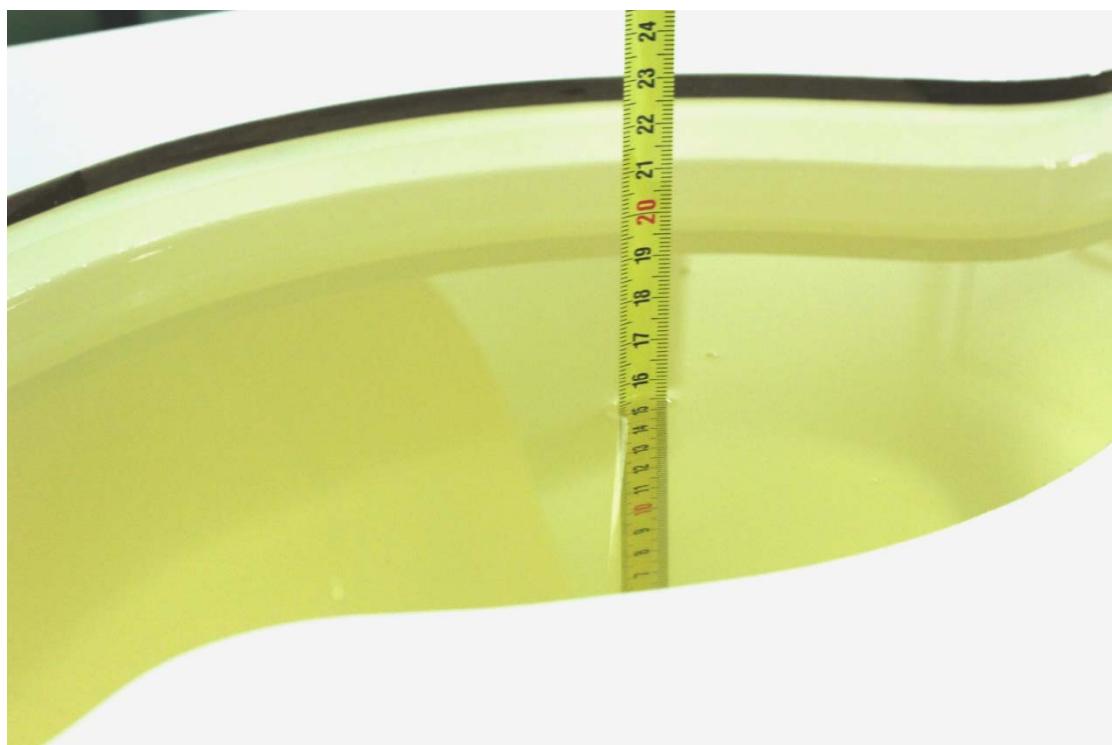

Picture 7-10 Liquid depth in the Flat Phantom (2450MHz)

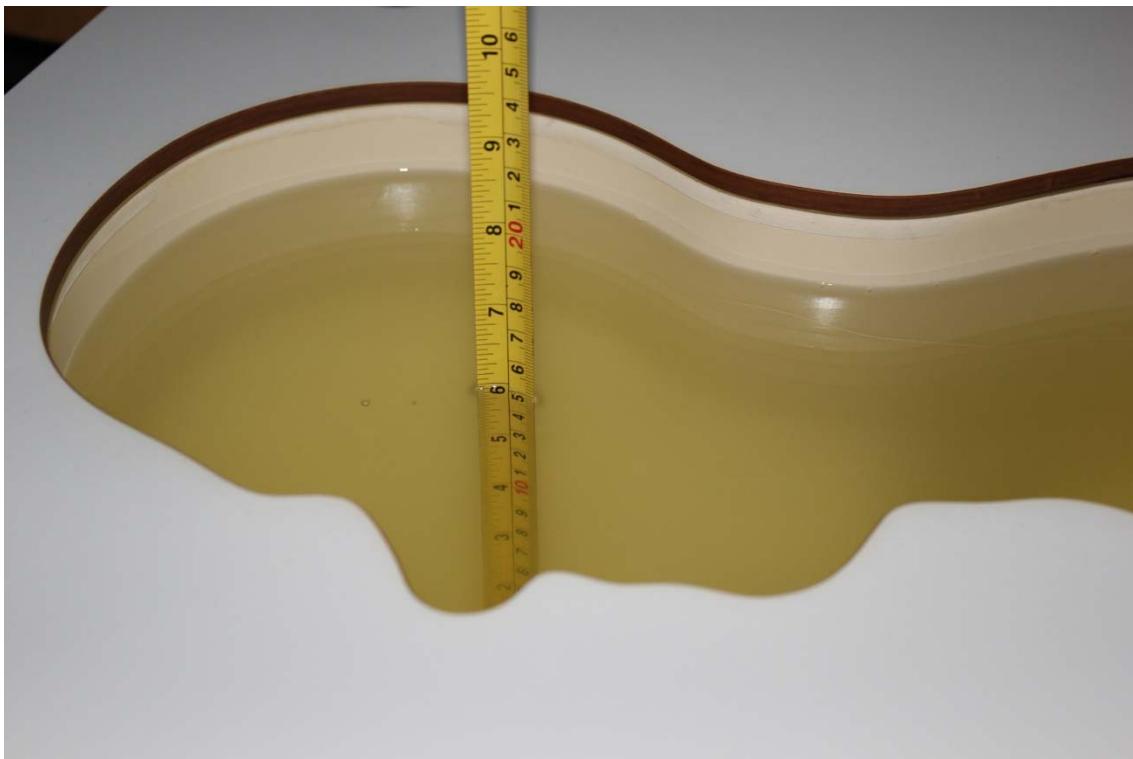

Picture 7-11 Liquid depth in the Head Phantom (2300 MHz Head)

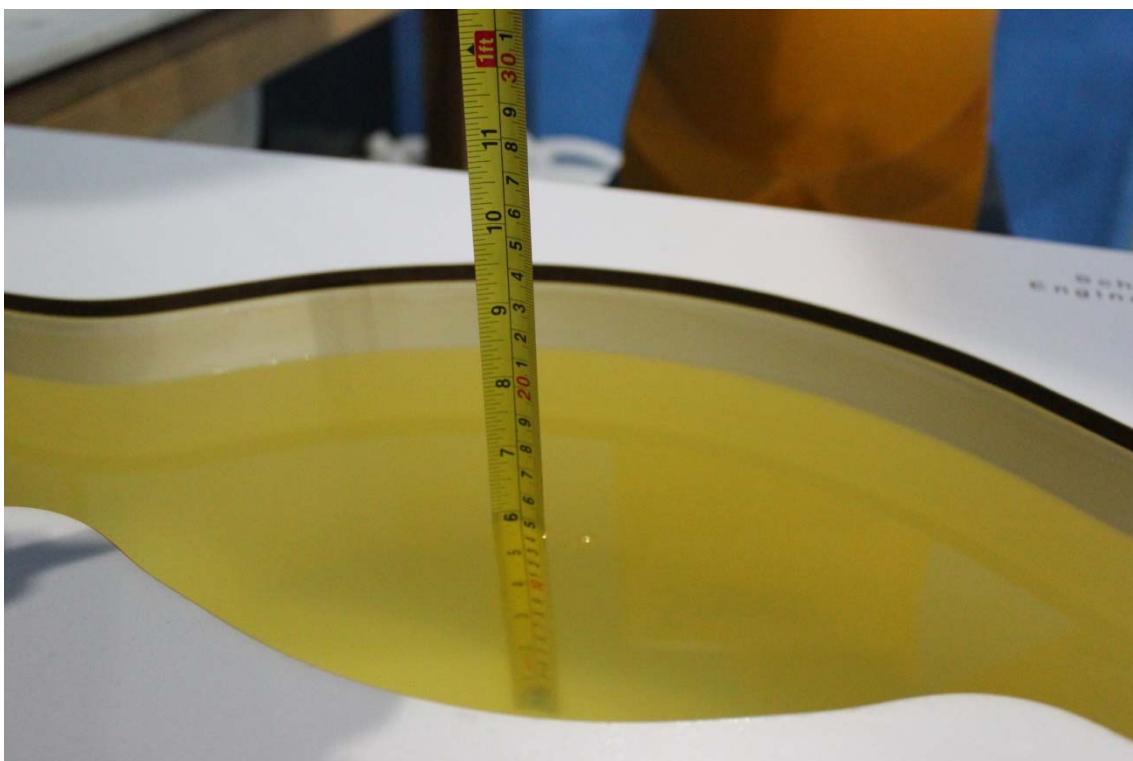


Picture 7-12 Liquid depth in the Flat Phantom (2300MHz)

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

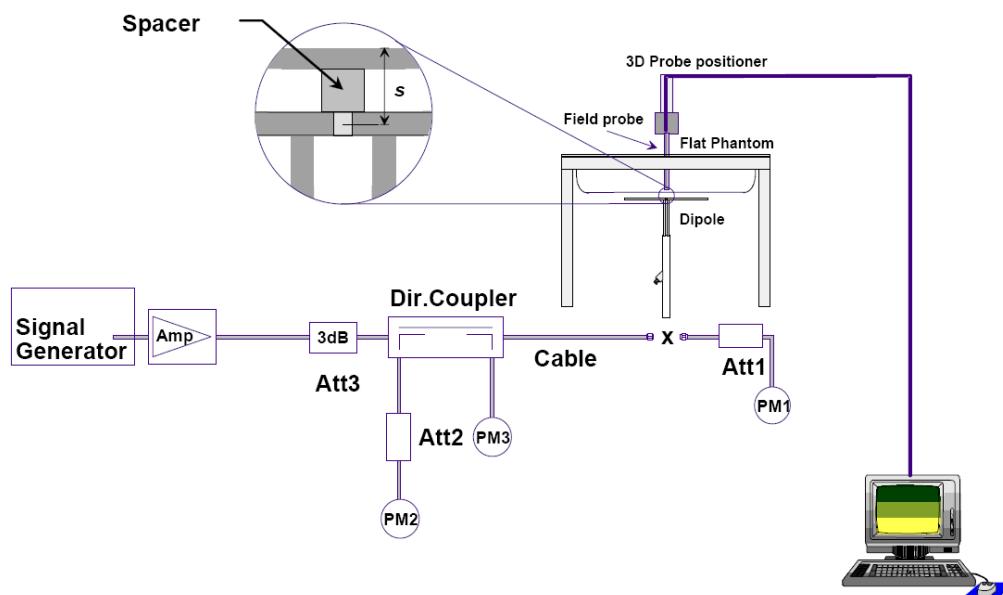

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2019/5/1	750 MHz	5.42	8.32	5.36	8.32	-1.11%	0.00%
2019/5/2	835 MHz	6.06	9.37	6.08	9.48	0.33%	1.17%
2019/5/3	1750 MHz	19.4	36.7	19.52	36.12	0.62%	-1.58%
2019/5/4	1900 MHz	21.0	40.0	20.8	40.6	-0.95%	1.50%
2019/5/5	2300 MHz	23.6	49.0	24	49.88	1.69%	1.80%
2019/5/6	2450 MHz	24.7	52.2	24.84	53.04	0.57%	1.61%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2019/5/1	750 MHz	5.68	8.66	5.64	8.84	-0.70%	2.08%
2019/5/2	835 MHz	6.12	9.41	6.2	9.24	1.31%	-1.81%
2019/5/3	1750 MHz	19.8	37.1	20.08	36.76	1.41%	-0.92%
2019/5/4	1900 MHz	21.5	40.5	21.24	40.12	-1.21%	-0.94%
2019/5/5	2300 MHz	22.7	47	22.36	46.52	-1.50%	-1.02%
2019/5/6	2450 MHz	23.8	50.4	24.2	49.6	1.68%	-1.59%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the center of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

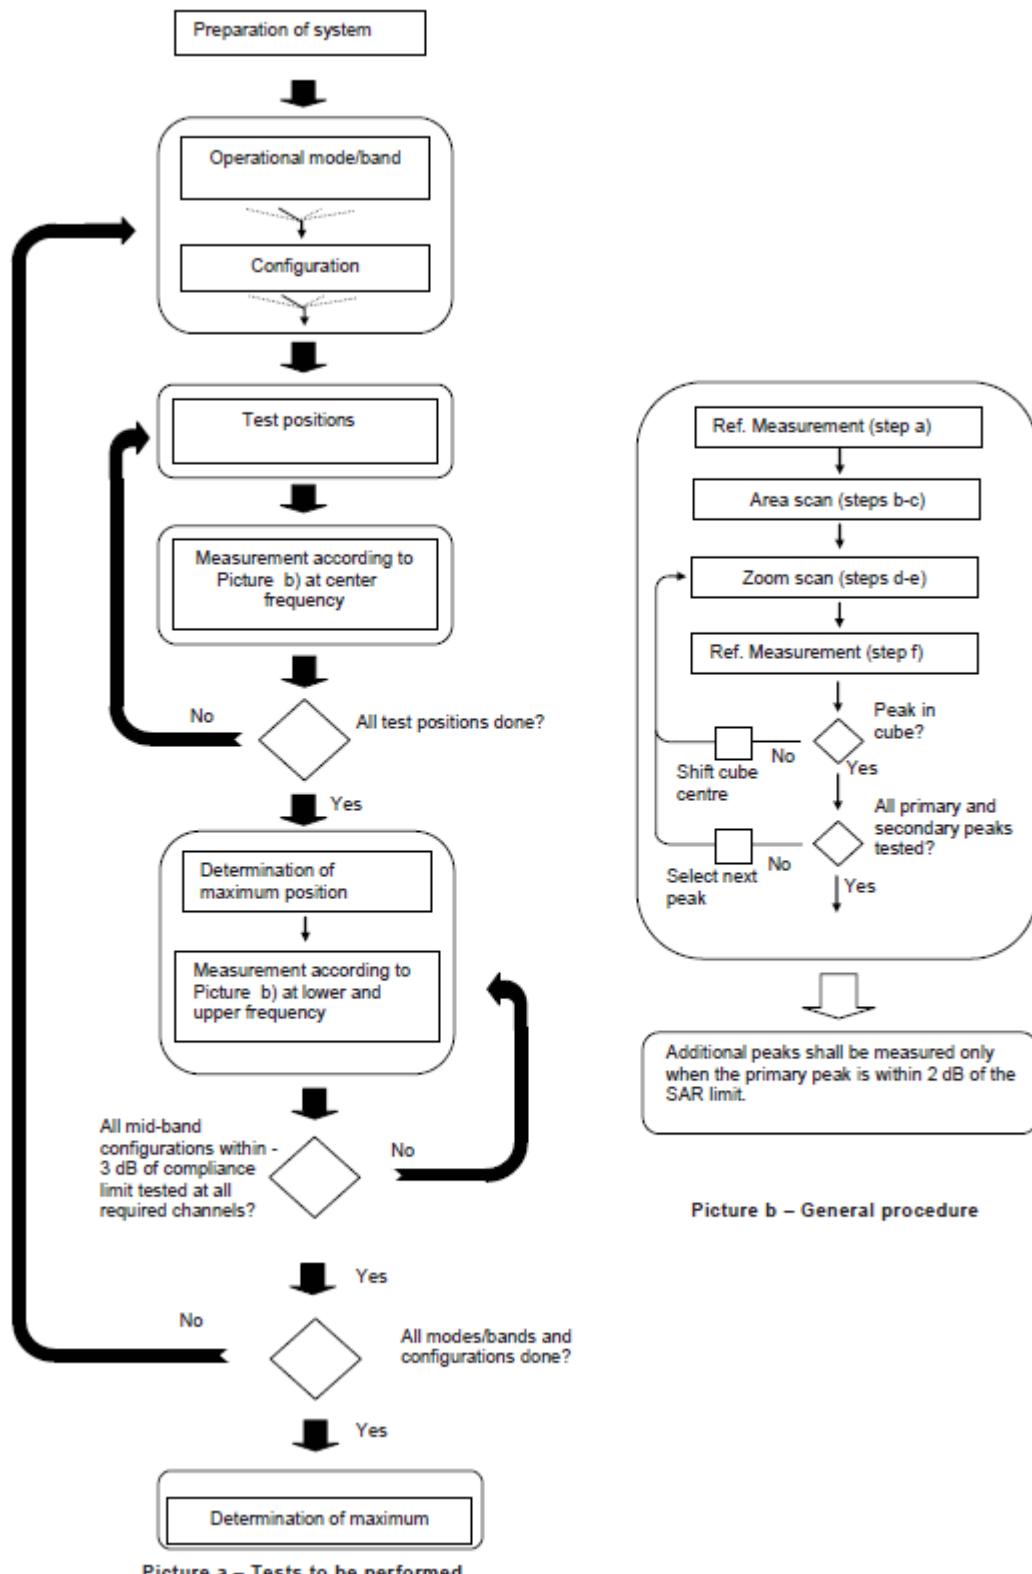

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

		$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1): \text{between } 1^{\text{st}}$ two points closest to phantom surface	$\leq 4 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1): \text{between}$ subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.5	1.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	1.5	1.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1:47/15}$	4	2	1.5	1.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	1.5	1.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

Rel.8 DC-HSDPA (Cat 24)

SAR test exclusion for Rel.8 DC-HSDPA must satisfy the SAR test exclusion requirements of Rel.5 HSDPA. SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion.

9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Rchwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.6 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v06, when the implementation is based the specific polynomial fit

algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is $\leq 1.2 \text{ W/kg}$, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

11.1 GSM Measurement result

During the process of testing, the EUT was controlled via Digital Radio Communication tester to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11-1 GSM850 #1

		GSM850 #1			Caculation	Frame Burst Power (dBm)		
Config	Tune-up	Measured Power (dBm)	CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz	CH251 848.8 MHz	CH190 836.6 MHz	CH128 824.2 MHz
GSM Speech	33.20	32.04	32.09	32.03				
GPRS 1 Txslot	33.20	32.03	32.10	32.04	-9.03	23.00	23.07	23.01
GPRS 2 Txslots	32.00	30.81	30.89	30.87	-6.02	24.79	24.87	24.85
GPRS 3 Txslots	30.00	28.79	28.89	28.87	-4.26	24.53	24.63	24.61
GPRS 4 Txslots	28.00	26.75	26.85	26.84	-3.01	23.74	23.84	23.83
EGPRS GMSK 1 Txslot	33.20	32.04	32.09	32.03	-9.03	23.01	23.06	23.00
EGPRS GMSK 2 Txslots	32.00	30.81	30.88	30.85	-6.02	24.79	24.86	24.83
EGPRS GMSK 3 Txslots	30.00	28.79	28.87	28.86	-4.26	24.53	24.61	24.60
EGPRS GMSK 4 Txslots	28.00	26.75	26.84	26.83	-3.01	23.74	23.83	23.82
EGPRS 8PSK 1 Txslot	28.00	26.83	26.91	26.80	-9.03	17.80	17.88	17.77
EGPRS 8PSK 2 Txslots	26.00	24.71	24.69	24.53	-6.02	18.69	18.67	18.51
EGPRS 8PSK 3 Txslots	24.00	22.48	22.46	22.30	-4.26	18.22	18.20	18.04
EGPRS 8PSK 4 Txslots	22.00	20.22	20.12	20.05	-3.01	17.21	17.11	17.04

Table 11-2 PCS1900 #1 AP OFF

		PCS1900 #1 AP OFF			Caculation	Frame Burst Power (dBm)		
Config	Tune-up	Measured Power (dBm)	CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz	CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz
GSM Speech	30.00	28.38	28.37	28.21				
GPRS 1 Txslot	30.00	28.37	28.35	28.24	-9.03	19.34	19.32	19.21
GPRS 2 Txslots	28.00	27.20	26.97	26.81	-6.02	21.18	20.95	20.79
GPRS 3 Txslots	26.00	25.24	24.99	24.82	-4.26	20.98	20.73	20.56
GPRS 4 Txslots	24.00	23.26	22.98	22.73	-3.01	20.25	19.97	19.72
EGPRS GMSK 1 Txslot	30.00	28.37	28.36	28.21	-9.03	19.34	19.33	19.18
EGPRS GMSK 2 Txslots	28.00	27.19	26.95	26.79	-6.02	21.17	20.93	20.77
EGPRS GMSK 3 Txslots	26.00	25.24	24.96	24.81	-4.26	20.98	20.70	20.55
EGPRS GMSK 4 Txslots	24.00	23.26	22.95	22.72	-3.01	20.25	19.94	19.71
EGPRS 8PSK 1 Txslot	27.00	26.08	25.98	25.74	-9.03	17.05	16.95	16.71
EGPRS 8PSK 2 Txslots	24.00	23.92	23.90	23.86	-6.02	17.90	17.88	17.84
EGPRS 8PSK 3 Txslots	22.00	21.96	21.84	21.81	-4.26	17.70	17.58	17.55
EGPRS 8PSK 4 Txslots	20.00	19.91	19.78	19.72	-3.01	16.90	16.77	16.71

Table 11-3 PCS1900 #2 AP ON

		PCS1900 #2 AP ON						
Config	Tune-up	Measured Power (dBm)			Caculation	Frame Burst Power (dBm)		
		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz		CH810 1909.8 MHz	CH661 1880 MHz	CH512 1850.2 MHz
GSM Speech	\	\	\	\				
GPRS 1 Txslot	24.50	23.95	23.69	23.33	-9.03	14.92	14.66	14.30
GPRS 2 Txslots	22.50	21.80	21.50	21.41	-6.02	15.78	15.48	15.39
GPRS 3 Txslots	20.50	19.93	19.76	19.53	-4.26	15.67	15.50	15.27
GPRS 4 Txslots	18.50	18.30	17.90	17.40	-3.01	15.29	14.89	14.39
EGPRS GMSK 1 Txslot	24.50	23.74	23.67	23.53	-9.03	14.71	14.64	14.50
EGPRS GMSK 2 Txslots	22.50	21.81	21.70	21.52	-6.02	15.79	15.68	15.50
EGPRS GMSK 3 Txslots	20.50	19.93	19.76	19.55	-4.26	15.67	15.50	15.29
EGPRS GMSK 4 Txslots	18.50	18.12	17.91	17.61	-3.01	15.11	14.90	14.60
EGPRS 8PSK 1 Txslot	20.50	19.75	19.53	19.30	-9.03	10.72	10.50	10.27
EGPRS 8PSK 2 Txslots	18.00	17.34	17.31	16.97	-6.02	11.32	11.29	10.95
EGPRS 8PSK 3 Txslots	16.00	15.28	15.07	14.77	-4.26	11.02	10.81	10.51
EGPRS 8PSK 4 Txslots	14.00	12.97	12.87	12.55	-3.01	9.96	9.86	9.54

NOTES:
Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 2Txslots for 850MHz and 1900MHz.

11.2 WCDMA Measurement result

Table 11-4 WCDMA1900-BII #1 AP OFF

WCDMA1900-BII #1 AP OFF					
		Tune-up	Measured Power (dBm)		
Item			CH9538 1907.6 MHz	CH9400 1880 MHz	CH9262 1852.4 MHz
WCDMA	RMC	23.20	22.04	22.06	22.02
HSUPA	subtest1	21.00	19.96	19.97	19.93
	subtest2	21.00	19.98	19.99	19.96
	subtest3	22.00	20.91	20.90	20.88
	subtest4	21.00	19.61	19.55	19.52
	subtest5	22.00	20.98	20.97	20.95
HSPA+	\	22.00	20.58	20.55	20.61
DC-HSDPA	subtest1	22.00	21.05	21.03	20.98
	subtest2	22.00	20.90	20.96	20.95
	subtest3	22.00	20.55	20.56	20.47
	subtest4	22.00	20.53	20.54	20.48

Table 11-5 WCDMA1900-BII #2 AP ON

WCDMA1900-BII #2 AP ON					
		Tune-up	Measured Power (dBm)		
Item			CH9538 1907.6 MHz	CH9400 1880 MHz	CH9262 1852.4 MHz
WCDMA	RMC	20.20	18.93	18.95	18.92
HSUPA	subtest1	17.00	16.01	16.03	16.02
	subtest2	17.00	16.02	16.05	16.03
	subtest3	18.00	17.04	17.05	17.01
	subtest4	16.50	15.47	15.50	15.48
	subtest5	18.00	16.98	16.96	16.97
HSPA+	\	19.00	17.61	17.58	17.53
DC-HSDPA	subtest1	19.00	18.07	18.09	18.05
	subtest2	19.00	17.98	18.03	17.98
	subtest3	18.00	17.52	17.53	17.51
	subtest4	18.00	17.51	17.50	17.47

Table 11-6 WCDMA1700-BIV #1 AP OFF

WCDMA1700-BIV #1 AP OFF					
		Tune-up	Measured Power (dBm)		
Item			CH1513 1752.6 MHz	CH1412 1732.4 MHz	CH1312 1712.4 MHz
WCDMA	RMC	22.50	21.39	21.40	21.43
HSUPA	subtest1	21.00	19.40	19.37	19.44
	subtest2	21.00	19.41	19.40	19.43
	subtest3	22.00	20.44	20.41	20.46
	subtest4	20.00	18.89	18.88	18.92
	subtest5	22.00	20.37	20.40	20.38
HSPA+	\	21.00	19.98	19.92	20.01
DC-HSDPA	subtest1	22.00	20.88	20.95	20.96
	subtest2	22.00	20.85	20.81	20.83
	subtest3	21.00	20.29	20.35	20.41
	subtest4	21.00	20.31	20.38	20.42

Table 11-7 WCDMA1700-BIV #2 AP ON

WCDMA1700-BIV #2 AP ON					
			Measured Power (dBm)		
Item		Tune-up	CH1513 1752.6 MHz	CH1412 1732.4 MHz	CH1312 1712.4 MHz
WCDMA	RMC	20.00	19.28	19.28	19.31
	subtest1	17.00	16.35	16.36	16.39
	subtest2	17.00	16.38	16.39	16.41
	subtest3	18.00	17.32	17.34	17.39
	subtest4	17.00	15.81	15.85	15.86
	subtest5	18.00	17.31	17.36	17.34
HSUPA+	\	19.00	17.99	18.04	17.98
	subtest1	19.00	18.34	18.41	18.43
DC-HSDPA	subtest2	19.00	18.20	18.24	18.36
	subtest3	18.50	17.84	17.91	17.90
	subtest4	18.50	17.79	17.88	17.92

Table 11-8 WCDMA850-BV #1

WCDMA850-BV #1					
			Measured Power (dBm)		
Item		Tune-up	CH4233 846.6 MHz	CH4183 836.6 MHz	CH4132 826.4 MHz
WCDMA	RMC	25.50	24.32	24.34	24.28
	subtest1	22.00	21.35	21.38	21.30
	subtest2	22.00	21.36	21.39	21.34
	subtest3	23.00	22.66	22.71	22.60
	subtest4	21.00	20.84	20.87	20.82
	subtest5	23.00	22.37	22.39	22.31
HSUPA+	\	23.00	22.89	22.97	22.92
	subtest1	24.00	23.37	23.36	23.31
DC-HSDPA	subtest2	24.00	23.23	23.19	23.15
	subtest3	23.00	22.82	22.84	22.77
	subtest4	23.00	22.81	22.87	22.74

11.3 LTE Measurement result

Table 11-9 LTE1900-FDD2 #1 AP OFF

LTE1900-FDD2 #1 AP OFF				Measured Power (dBm) & MPR					
SN	BandWidth	RB No./Start	Channel	QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	19193	24	23.43	0	22.64	1	21.08	2
		18900	24	23.38	0	22.62	1	21.09	2
		18607	24	23.43	0	22.64	1	21.20	2
	1M	19193	24	23.54	0	22.71	1	21.09	2
		18900	24	23.50	0	22.77	1	21.16	2
		18607	24	23.55	0	22.73	1	21.32	2
	1L	19193	24	23.48	0	22.66	1	21.06	2
		18900	24	23.40	0	22.68	1	21.07	2
		18607	24	23.46	0	22.65	1	21.18	2
	3H	19193	24	23.55	0	22.64	1	21.10	2
		18900	24	23.54	0	22.63	1	21.04	2
		18607	24	23.54	0	22.64	1	21.15	2
	3M	19193	24	23.63	0	22.64	1	21.13	2
		18900	24	23.58	0	22.70	1	21.09	2
		18607	24	23.62	0	22.68	1	21.14	2
	3L	19193	24	23.59	0	22.58	1	21.11	2
		18900	24	23.52	0	22.63	1	21.04	2
		18607	24	23.54	0	22.59	1	21.15	2
	6	19193	24	22.60	1	21.53	2	20.02	3
		18900	24	22.55	1	21.55	2	19.99	3
		18607	24	22.56	1	21.59	2	20.02	3
3MHz	1H	19185	24	23.58	0	22.66	1	21.19	2
		18900	24	23.49	0	22.68	1	21.14	2
		18615	24	23.51	0	22.69	1	21.53	2
	1M	19185	24	23.58	0	22.73	1	21.07	2
		18900	24	23.64	0	22.81	1	21.09	2
		18615	24	23.64	0	22.77	1	21.14	2
	1L	19185	24	23.54	0	22.65	1	21.10	2
		18900	24	23.49	0	22.68	1	21.12	2
		18615	24	23.52	0	22.65	1	21.20	2
	8H	19185	24	22.58	1	21.49	2	20.01	3
		18900	24	22.53	1	21.54	2	20.00	3
		18615	24	22.52	1	21.54	2	20.04	3
	8M	19185	24	22.62	1	21.52	2	20.05	3
		18900	24	22.57	1	21.54	2	19.99	3
		18615	24	22.56	1	21.60	2	20.07	3
	8L	19185	24	22.57	1	21.51	2	20.03	3
		18900	24	22.53	1	21.56	2	20.00	3
		18615	24	22.53	1	21.55	2	20.05	3
	15	19185	24	22.58	1	21.46	2	20.02	3
		18900	24	22.51	1	21.49	2	19.95	3
		18615	24	22.53	1	21.49	2	19.99	3
5MHz	1H	19175	24	23.52	0	22.62	1	21.10	2
		18900	24	23.47	0	22.65	1	21.07	2
		18625	24	23.49	0	22.68	1	21.15	2
	1M	19175	24	23.75	0	22.81	1	21.08	2
		18900	24	23.72	0	22.83	1	21.15	2
		18625	24	23.67	0	22.79	1	21.18	2
	1L	19175	24	23.48	0	22.65	1	21.09	2
		18900	24	23.49	0	22.82	1	21.10	2
		18625	24	23.50	0	22.63	1	21.15	2
	12H	19175	24	22.58	1	21.54	2	20.01	3
		18900	24	22.54	1	21.54	2	20.00	3
		18625	24	22.54	1	21.56	2	20.19	3
	12M	19175	24	22.60	1	21.53	2	20.07	3
		18900	24	22.56	1	21.56	2	20.06	3
		18625	24	22.56	1	21.57	2	20.10	3
	12L	19175	24	22.59	1	21.53	2	20.05	3
		18900	24	22.54	1	21.52	2	20.03	3
		18625	24	22.53	1	21.59	2	20.06	3
	25	19175	24	22.60	1	21.58	2	20.00	3
		18900	24	22.57	1	21.58	2	20.00	3
		18625	24	22.58	1	21.57	2	20.04	3

10MHz	1H	19150	24	23.57	0	22.67	1	21.15	2
		18900	24	23.49	0	22.64	1	21.09	2
		18650	24	23.50	0	22.67	1	21.18	2
	1M	19150	24	23.59	0	22.73	1	21.19	2
		18900	24	23.58	0	22.78	1	21.23	2
		18650	24	23.63	0	22.86	1	21.19	2
	1L	19150	24	23.55	0	22.69	1	21.16	2
		18900	24	23.57	0	22.72	1	21.15	2
		18650	24	23.56	0	22.68	1	21.24	2
	25H	19150	24	22.64	1	21.59	2	19.97	3
		18900	24	22.62	1	21.54	2	19.99	3
		18650	24	22.59	1	21.59	2	20.02	3
	25M	19150	24	22.60	1	21.53	2	20.01	3
		18900	24	22.59	1	21.56	2	20.02	3
		18650	24	22.59	1	21.54	2	20.03	3
	25L	19150	24	22.68	1	21.61	2	20.06	3
		18900	24	22.63	1	21.51	2	20.04	3
		18650	24	22.53	1	21.63	2	20.00	3
	50	19150	24	22.65	1	21.60	2	20.00	3
		18900	24	22.65	1	21.52	2	20.02	3
		18650	24	22.58	1	21.59	2	20.01	3
15MHz	1H	19125	24	23.56	0	22.67	1	21.12	2
		18900	24	23.51	0	22.59	1	21.09	2
		18675	24	23.45	0	22.65	1	21.08	2
	1M	19125	24	23.69	0	22.77	1	21.23	2
		18900	24	23.65	0	22.75	1	21.24	2
		18675	24	23.68	0	22.81	1	21.21	2
	1L	19125	24	23.52	0	22.67	1	21.14	2
		18900	24	23.52	0	22.70	1	21.12	2
		18675	24	23.56	0	22.65	1	21.18	2
	36H	19125	24	22.63	1	21.59	2	19.99	3
		18900	24	22.59	1	21.53	2	20.00	3
		18675	24	22.55	1	21.60	2	20.00	3
	36M	19125	24	22.59	1	21.56	2	20.01	3
		18900	24	22.60	1	21.56	2	20.01	3
		18675	24	22.56	1	21.55	2	20.02	3
	36L	19125	24	22.63	1	21.60	2	20.05	3
		18900	24	22.63	1	21.57	2	20.07	3
		18675	24	22.58	1	21.59	2	20.03	3
	75	19125	24	22.63	1	21.55	2	19.98	3
		18900	24	22.63	1	21.54	2	20.00	3
		18675	24	22.57	1	21.58	2	19.98	3
20MHz	1H	19100	24	23.44	0	22.56	1	20.98	2
		18900	24	23.40	0	22.47	1	20.99	2
		18700	24	23.36	0	22.57	1	20.95	2
	1M	19100	24	23.61	0	22.76	1	21.14	2
		18900	24	23.60	0	22.86	1	21.15	2
		18700	24	23.60	0	22.74	1	21.15	2
	1L	19100	24	23.41	0	22.53	1	20.99	2
		18900	24	23.43	0	22.63	1	20.98	2
		18700	24	23.46	0	22.55	1	21.03	2
	50H	19100	24	22.63	1	21.64	2	19.95	3
		18900	24	22.70	1	21.52	2	20.03	3
		18700	24	22.58	1	21.57	2	19.95	3
	50M	19100	24	22.65	1	21.58	2	20.00	3
		18900	24	22.62	1	21.58	2	19.99	3
		18700	24	22.64	1	21.59	2	20.00	3
	50L	19100	24	22.67	1	21.65	2	20.03	3
		18900	24	22.70	1	21.56	2	20.05	3
		18700	24	22.61	1	21.62	2	19.98	3
	100	19100	24	22.64	1	21.64	2	19.96	3
		18900	24	22.68	1	21.54	2	20.00	3
		18700	24	22.70	1	21.60	2	19.91	3

Table 11-10 LTE1900-FDD2 #2 AP ON

LTE1900-FDD2 #2 AP ON				Measured Power (dBm) & MPR					
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	19193	20	19.04	0	18.59	1	17.45	2
		18900	20	19.01	0	18.56	1	17.48	2
		18607	20	19.04	0	18.35	1	17.49	2
	1M	19193	20	19.31	0	18.74	1	17.59	2
		18900	20	19.20	0	18.77	1	17.62	2
		18607	20	19.22	0	18.70	1	17.67	2
	1L	19193	20	19.28	0	18.47	1	17.40	2
		18900	20	18.96	0	18.46	1	17.47	2
		18607	20	19.00	0	18.51	1	17.62	2
	3H	19193	20	19.06	0	18.58	1	17.43	2
		18900	20	19.05	0	18.50	1	17.42	2
		18607	20	19.02	0	18.38	1	17.44	2
	3M	19193	20	19.33	0	18.66	1	17.59	2
		18900	20	19.25	0	18.78	1	17.58	2
		18607	20	19.24	0	18.76	1	17.69	2
	3L	19193	20	19.25	0	18.50	1	17.42	2
		18900	20	18.99	0	18.49	1	17.47	2
		18607	20	18.94	0	18.54	1	17.60	2
	6	19193	20	18.21	1	17.12	2	16.50	3
		18900	20	18.20	1	17.26	2	16.63	3
		18607	20	18.14	1	17.21	2	16.53	3
3MHz	1H	19185	20	19.05	0	18.51	1	17.44	2
		18900	20	19.03	0	18.48	1	17.46	2
		18615	20	18.98	0	18.37	1	17.44	2
	1M	19185	20	19.32	0	18.73	1	17.66	2
		18900	20	19.18	0	18.77	1	17.64	2
		18615	20	19.16	0	18.74	1	17.70	2
	1L	19185	20	19.28	0	18.46	1	17.46	2
		18900	20	19.01	0	18.49	1	17.43	2
		18615	20	18.92	0	18.52	1	17.58	2
	8H	19185	20	18.07	1	17.15	2	16.50	3
		18900	20	18.23	1	17.21	2	16.57	3
		18615	20	18.09	1	17.19	2	16.51	3
	8M	19185	20	18.24	1	17.18	2	16.54	3
		18900	20	18.22	1	17.13	2	16.49	3
		18615	20	18.16	1	17.26	2	16.53	3
	8L	19185	20	18.21	1	17.18	2	16.57	3
		18900	20	18.24	1	17.32	2	16.60	3
		18615	20	18.04	1	17.13	2	16.57	3
	15	19185	20	18.20	1	17.11	2	16.58	3
		18900	20	18.24	1	17.26	2	16.63	3
		18615	20	18.12	1	17.18	2	16.45	3
5MHz	1H	19175	20	19.03	0	18.49	1	17.42	2
		18900	20	19.02	0	18.48	1	17.44	2
		18625	20	19.00	0	18.40	1	17.44	2
	1M	19175	20	19.38	0	18.68	1	17.66	2
		18900	20	19.26	0	18.75	1	17.60	2
		18625	20	19.21	0	18.73	1	17.68	2
	1L	19175	20	19.26	0	18.45	1	17.43	2
		18900	20	19.03	0	18.55	1	17.45	2
		18625	20	19.00	0	18.53	1	17.55	2
	12H	19175	20	18.12	1	17.14	2	16.53	3
		18900	20	18.14	1	17.23	2	16.58	3
		18625	20	18.17	1	17.17	2	16.54	3
	12M	19175	20	18.18	1	17.22	2	16.52	3
		18900	20	18.16	1	17.16	2	16.50	3
		18625	20	18.13	1	17.21	2	16.49	3
	12L	19175	20	18.15	1	17.19	2	16.64	3
		18900	20	18.33	1	17.32	2	16.60	3
		18625	20	18.00	1	17.15	2	16.50	3
	25	19175	20	18.12	1	17.18	2	16.56	3
		18900	20	18.24	1	17.22	2	16.56	3
		18625	20	18.12	1	17.13	2	16.45	3

10MHz	1H	19150	20	19.12	0	18.58	1	17.46	2
		18900	20	19.00	0	18.51	1	17.47	2
		18650	20	18.96	0	18.39	1	17.50	2
	1M	19150	20	19.34	0	18.71	1	17.66	2
		18900	20	19.17	0	18.71	1	17.61	2
		18650	20	19.20	0	18.73	1	17.68	2
	1L	19150	20	19.22	0	18.49	1	17.42	2
		18900	20	19.00	0	18.46	1	17.48	2
		18650	20	19.00	0	18.46	1	17.62	2
	25H	19150	20	18.08	1	17.08	2	16.47	3
		18900	20	18.14	1	17.24	2	16.58	3
		18650	20	18.17	1	17.23	2	16.49	3
	25M	19150	20	18.22	1	17.22	2	16.56	3
		18900	20	18.15	1	17.14	2	16.51	3
		18650	20	18.12	1	17.25	2	16.54	3
	25L	19150	20	18.14	1	17.21	2	16.63	3
		18900	20	18.27	1	17.26	2	16.60	3
		18650	20	18.00	1	17.16	2	16.49	3
	50	19150	20	18.16	1	17.19	2	16.55	3
		18900	20	18.19	1	17.18	2	16.60	3
		18650	20	18.08	1	17.13	2	16.49	3
15MHz	1H	19125	20	19.04	0	18.58	1	17.42	2
		18900	20	19.06	0	18.53	1	17.44	2
		18675	20	19.04	0	18.40	1	17.48	2
	1M	19125	20	19.29	0	18.74	1	17.60	2
		18900	20	19.21	0	18.78	1	17.63	2
		18675	20	19.21	0	18.79	1	17.68	2
	1L	19125	20	19.29	0	18.53	1	17.43	2
		18900	20	18.98	0	18.46	1	17.45	2
		18675	20	18.92	0	18.54	1	17.55	2
	36H	19125	20	18.13	1	17.07	2	16.52	3
		18900	20	18.15	1	17.21	2	16.56	3
		18675	20	18.10	1	17.18	2	16.55	3
	36M	19125	20	18.24	1	17.22	2	16.57	3
		18900	20	18.20	1	17.15	2	16.49	3
		18675	20	18.14	1	17.20	2	16.49	3
	36L	19125	20	18.24	1	17.16	2	16.60	3
		18900	20	18.31	1	17.30	2	16.64	3
		18675	20	18.08	1	17.17	2	16.55	3
	75	19125	20	18.10	1	17.17	2	16.53	3
		18900	20	18.22	1	17.23	2	16.62	3
		18675	20	18.05	1	17.13	2	16.52	3
20MHz	1H	19100	20	19.09	0	18.55	1	17.43	2
		18900	20	19.02	0	18.53	1	17.46	2
		18700	20	19.00	0	18.40	1	17.50	2
	1M	19100	20	19.35	0	18.73	1	17.64	2
		18900	20	19.22	0	18.75	1	17.63	2
		18700	20	19.20	0	18.76	1	17.70	2
	1L	19100	20	19.29	0	18.50	1	17.45	2
		18900	20	19.00	0	18.52	1	17.48	2
		18700	20	18.96	0	18.52	1	17.59	2
	50H	19100	20	18.09	1	17.13	2	16.52	3
		18900	20	18.19	1	17.22	2	16.59	3
		18700	20	18.14	1	17.21	2	16.52	3
	50M	19100	20	18.20	1	17.19	2	16.58	3
		18900	20	18.19	1	17.15	2	16.53	3
		18700	20	18.17	1	17.25	2	16.53	3
	50L	19100	20	18.19	1	17.19	2	16.63	3
		18900	20	18.29	1	17.29	2	16.64	3
		18700	20	18.07	1	17.17	2	16.55	3
	100	19100	20	18.16	1	17.16	2	16.56	3
		18900	20	18.24	1	17.23	2	16.60	3
		18700	20	18.11	1	17.18	2	16.50	3

Table 11-11 LTE1700-FDD4 #1 AP OFF

LTE1700-FDD4 #1 AP OFF				Measured Power (dBm) & MPR					
BandWidth	RB No./Start	Channel	Tune-up	QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	20393	24	23.38	0	22.69	1	21.20	2
		20175	24	23.36	0	22.49	1	20.98	2
		19957	24	23.49	0	22.64	1	21.15	2
	1M	20393	24	23.53	0	22.26	1	21.26	2
		20175	24	23.45	0	22.06	1	21.12	2
		19957	24	23.57	0	22.22	1	21.23	2
	1L	20393	24	23.16	0	22.05	1	21.15	2
		20175	24	23.33	0	22.05	1	21.02	2
		19957	24	23.12	0	22.13	1	21.19	2
	3H	20393	24	23.13	0	22.07	1	21.18	2
		20175	24	22.96	0	22.00	1	21.07	2
		19957	24	23.12	0	22.13	1	21.07	2
	3M	20393	24	23.08	0	22.13	1	21.21	2
		20175	24	22.99	0	22.07	1	21.08	2
		19957	24	23.13	0	22.19	1	21.21	2
	3L	20393	24	23.03	0	22.09	1	21.17	2
		20175	24	22.95	0	22.03	1	21.09	2
		19957	24	23.07	0	22.15	1	21.20	2
	6	20393	24	22.06	1	21.10	2	20.07	3
		20175	24	21.97	1	21.01	2	19.95	3
		19957	24	22.10	1	21.13	2	20.07	3
3MHz	1H	20385	24	22.97	0	22.12	1	21.01	2
		20175	24	22.88	0	22.04	1	21.07	2
		19965	24	23.02	0	22.16	1	21.19	2
	1M	20385	24	23.10	0	22.19	1	21.02	2
		20175	24	23.01	0	22.11	1	20.98	2
		19965	24	23.16	0	22.27	1	21.15	2
	1L	20385	24	22.94	0	22.09	1	21.11	2
		20175	24	22.87	0	22.02	1	21.07	2
		19965	24	23.03	0	22.18	1	21.21	2
	8H	20385	24	21.95	1	21.01	2	19.92	3
		20175	24	21.90	1	20.96	2	19.93	3
		19965	24	22.03	1	21.07	2	20.05	3
	8M	20385	24	22.01	1	21.05	2	19.95	3
		20175	24	21.90	1	20.95	2	19.97	3
		19965	24	22.04	1	21.10	2	20.07	3
	8L	20385	24	22.01	1	21.04	2	19.92	3
		20175	24	21.90	1	20.95	2	19.93	3
		19965	24	22.06	1	21.10	2	20.06	3
	15	20385	24	21.97	1	20.97	2	20.00	3
		20175	24	21.91	1	20.88	2	20.02	3
		19965	24	22.04	1	21.03	2	20.01	3
5MHz	1H	20375	24	22.93	0	22.09	1	21.00	2
		20175	24	22.84	0	21.95	1	21.00	2
		19975	24	22.99	0	22.13	1	21.15	2
	1M	20375	24	23.09	0	22.26	1	20.96	2
		20175	24	23.02	0	22.16	1	20.98	2
		19975	24	23.18	0	22.44	1	21.15	2
	1L	20375	24	22.93	0	22.06	1	20.91	2
		20175	24	22.88	0	22.02	1	21.09	2
		19975	24	23.02	0	22.13	1	21.17	2
	12H	20375	24	21.93	1	20.99	2	19.92	3
		20175	24	21.86	1	20.91	2	19.94	3
		19975	24	22.02	1	21.05	2	20.05	3
	12M	20375	24	22.02	1	21.06	2	19.95	3
		20175	24	21.92	1	20.96	2	19.95	3
		19975	24	22.05	1	21.09	2	20.70	3
	12L	20375	24	22.01	1	21.05	2	19.94	3
		20175	24	21.90	1	20.95	2	19.93	3
		19975	24	22.07	1	21.09	2	20.08	3
	25	20375	24	22.02	1	21.04	2	19.94	3
		20175	24	21.92	1	20.93	2	20.96	3
		19975	24	22.07	1	21.08	2	20.02	3

10MHz	1H	20350	24	22.97	0	22.07	1	20.98	2
		20175	24	22.88	0	21.99	1	21.00	2
		20000	24	23.00	0	22.15	1	21.18	2
	1M	20350	24	23.04	0	22.13	1	21.05	2
		20175	24	23.00	0	22.12	1	21.08	2
		20000	24	23.10	0	22.24	1	21.25	2
	1L	20350	24	22.95	0	22.04	1	20.90	2
		20175	24	22.97	0	22.10	1	21.13	2
		20000	24	23.07	0	22.17	1	21.16	2
	25H	20350	24	21.92	1	20.98	2	19.84	3
		20175	24	21.92	1	20.94	2	19.90	3
		20000	24	22.04	1	21.05	2	20.01	3
	25M	20350	24	22.03	1	21.05	2	19.92	3
		20175	24	21.98	1	21.00	2	19.93	3
		20000	24	22.08	1	21.09	2	20.03	3
	25L	20350	24	22.04	1	21.05	2	19.88	3
		20175	24	21.97	1	20.99	2	19.94	3
		20000	24	22.07	1	21.10	2	20.02	3
	50	20350	24	21.99	1	20.98	2	19.87	3
		20175	24	21.93	1	20.96	2	19.88	3
		20000	24	22.05	1	21.04	2	20.03	3
15MHz	1H	20325	24	22.93	0	22.07	1	20.99	2
		20175	24	22.88	0	21.88	1	20.92	2
		20025	24	22.90	0	22.09	1	21.07	2
	1M	20325	24	23.03	0	22.14	1	20.95	2
		20175	24	23.04	0	22.16	1	21.05	2
		20025	24	23.15	0	22.22	1	21.19	2
	1L	20325	24	22.95	0	22.02	1	21.00	2
		20175	24	22.95	0	22.17	1	21.11	2
		20025	24	23.05	0	22.19	1	21.21	2
	36H	20325	24	21.94	1	20.97	2	19.87	3
		20175	24	21.93	1	20.98	2	19.96	3
		20025	24	21.98	1	21.03	2	20.02	3
	36M	20325	24	21.99	1	21.02	2	19.92	3
		20175	24	21.94	1	20.98	2	19.97	3
		20025	24	22.04	1	21.07	2	20.05	3
	36L	20325	24	21.96	1	21.04	2	19.92	3
		20175	24	21.98	1	21.02	2	19.98	3
		20025	24	22.04	1	21.08	2	20.08	3
	75	20325	24	21.98	1	20.99	2	19.86	3
		20175	24	21.95	1	20.96	2	19.92	3
		20025	24	22.04	1	21.04	2	20.00	3
20MHz	1H	20300	24	22.80	0	21.90	1	20.81	2
		20175	24	22.69	0	21.80	1	20.80	2
		20050	24	22.73	0	21.84	1	20.95	2
	1M	20300	24	22.99	0	22.05	1	21.01	2
		20175	24	22.98	0	22.06	1	20.08	2
		20050	24	23.04	0	22.25	1	21.18	2
	1L	20300	24	22.80	0	21.87	1	20.98	2
		20175	24	22.84	0	21.93	1	20.66	2
		20050	24	22.95	0	22.13	1	21.12	2
	50H	20300	24	21.94	1	20.93	2	19.86	3
		20175	24	21.98	1	20.97	2	19.94	3
		20050	24	22.06	1	21.03	2	20.07	3
	50M	20300	24	22.04	1	21.01	2	19.93	3
		20175	24	21.98	1	20.98	2	19.95	3
		20050	24	22.07	1	21.05	2	20.04	3
	50L	20300	24	22.06	1	21.05	2	19.99	3
		20175	24	22.04	1	21.01	2	19.99	3
		20050	24	22.11	1	21.07	2	20.09	3
	100	20300	24	21.98	1	21.00	2	19.91	3
		20175	24	21.98	1	20.99	2	19.92	3
		20050	24	22.06	1	21.07	2	20.06	3

Table 11-12 LTE1700-FDD4 #2 AP ON

LTE1700-FDD4 #2 AP ON									
BandWidth	RB No./Start	Channel	Tune-up	Measured Power (dBm) & MPR					
				QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
1.4MHz	1H	20393	20.5	19.57	0	19.03	1	17.84	2
		20175	20.5	19.61	0	18.95	1	17.80	2
		19957	20.5	19.63	0	19.02	1	17.92	2
	1M	20393	20.5	19.88	0	19.24	1	18.04	2
		20175	20.5	19.80	0	19.24	1	18.13	2
		19957	20.5	19.90	0	19.29	1	18.25	2
	1L	20393	20.5	19.52	0	18.87	1	17.94	2
		20175	20.5	19.58	0	18.99	1	17.95	2
		19957	20.5	19.63	0	19.04	1	18.03	2
	3H	20393	20.5	19.63	0	18.97	1	17.80	2
		20175	20.5	19.61	0	19.00	1	17.78	2
		19957	20.5	19.62	0	19.05	1	17.95	2
	3M	20393	20.5	19.83	0	19.13	1	18.01	2
		20175	20.5	19.81	0	19.29	1	18.12	2
		19957	20.5	19.93	0	19.33	1	18.21	2
	3L	20393	20.5	19.51	0	18.86	1	17.94	2
		20175	20.5	19.61	0	18.95	1	17.97	2
		19957	20.5	19.58	0	19.11	1	18.09	2
	6	20393	20.5	18.75	1	17.56	2	17.17	3
		20175	20.5	18.73	1	17.79	2	17.14	3
		19957	20.5	18.82	1	17.88	2	17.30	3
3MHz	1H	20385	20.5	19.63	0	19.00	1	17.82	2
		20175	20.5	19.50	0	18.96	1	17.76	2
		19965	20.5	19.52	0	19.04	1	17.95	2
	1M	20385	20.5	19.77	0	19.19	1	17.97	2
		20175	20.5	19.82	0	19.28	1	18.12	2
		19965	20.5	19.89	0	19.31	1	18.24	2
	1L	20385	20.5	19.55	0	18.88	1	17.99	2
		20175	20.5	19.59	0	18.94	1	18.00	2
		19965	20.5	19.61	0	19.07	1	18.06	2
	8H	20385	20.5	18.62	1	17.59	2	17.04	3
		20175	20.5	18.72	1	17.69	2	17.19	3
		19965	20.5	18.78	1	17.84	2	17.31	3
	8M	20385	20.5	18.72	1	17.63	2	17.15	3
		20175	20.5	18.67	1	17.80	2	17.21	3
		19965	20.5	18.74	1	17.84	2	17.26	3
	8L	20385	20.5	18.76	1	17.69	2	17.20	3
		20175	20.5	18.65	1	17.77	2	17.17	3
		19965	20.5	18.74	1	17.90	2	17.28	3
	15	20385	20.5	18.66	1	17.65	2	17.14	3
		20175	20.5	18.66	1	17.77	2	17.13	3
		19965	20.5	18.78	1	17.80	2	17.25	3
5MHz	1H	20375	20.5	19.52	0	18.97	1	17.77	2
		20175	20.5	19.58	0	18.99	1	17.80	2
		19975	20.5	19.54	0	18.97	1	17.91	2
	1M	20375	20.5	19.79	0	19.23	1	18.00	2
		20175	20.5	19.82	0	19.27	1	18.14	2
		19975	20.5	19.91	0	19.36	1	18.18	2
	1L	20375	20.5	19.50	0	18.92	1	17.99	2
		20175	20.5	19.54	0	18.94	1	18.03	2
		19975	20.5	19.56	0	19.08	1	18.08	2
	12H	20375	20.5	18.63	1	17.64	2	17.08	3
		20175	20.5	18.71	1	17.71	2	17.20	3
		19975	20.5	18.77	1	17.90	2	17.31	3
	12M	20375	20.5	18.70	1	17.62	2	17.12	3
		20175	20.5	18.72	1	17.79	2	17.15	3
		19975	20.5	18.79	1	17.85	2	17.28	3
	12L	20375	20.5	18.75	1	17.64	2	17.23	3
		20175	20.5	18.68	1	17.77	2	17.14	3
		19975	20.5	18.74	1	17.90	2	17.31	3
	25	20375	20.5	18.63	1	17.59	2	17.15	3
		20175	20.5	18.73	1	17.73	2	17.15	3
		19975	20.5	18.77	1	17.84	2	17.28	3

10MHz	1H	20350	20.5	19.55	0	18.95	1	17.80	2
		20175	20.5	19.56	0	18.93	1	17.74	2
		20000	20.5	19.58	0	19.03	1	17.92	2
	1M	20350	20.5	19.75	0	19.16	1	18.00	2
		20175	20.5	19.81	0	19.26	1	18.09	2
		20000	20.5	19.90	0	19.33	1	18.26	2
	1L	20350	20.5	19.49	0	18.94	1	17.99	2
		20175	20.5	19.57	0	18.93	1	18.00	2
		20000	20.5	19.64	0	19.06	1	18.02	2
	25H	20350	20.5	18.61	1	17.65	2	17.07	3
		20175	20.5	18.71	1	17.77	2	17.23	3
		20000	20.5	18.87	1	17.89	2	17.29	3
	25M	20350	20.5	18.65	1	17.63	2	17.16	3
		20175	20.5	18.70	1	17.80	2	17.21	3
		20000	20.5	18.76	1	17.81	2	17.30	3
	25L	20350	20.5	18.66	1	17.66	2	17.21	3
		20175	20.5	18.70	1	17.76	2	17.20	3
		20000	20.5	18.73	1	17.85	2	17.29	3
	50	20350	20.5	18.68	1	17.65	2	17.16	3
		20175	20.5	18.73	1	17.77	2	17.10	3
		20000	20.5	18.75	1	17.81	2	17.26	3
15MHz	1H	20325	20.5	19.54	0	19.02	1	17.86	2
		20175	20.5	19.60	0	18.91	1	17.77	2
		20025	20.5	19.53	0	19.01	1	17.96	2
	1M	20325	20.5	19.87	0	19.17	1	17.98	2
		20175	20.5	19.86	0	19.29	1	18.13	2
		20025	20.5	19.84	0	19.30	1	18.18	2
	1L	20325	20.5	19.49	0	18.93	1	17.96	2
		20175	20.5	19.60	0	18.94	1	17.96	2
		20025	20.5	19.68	0	19.05	1	18.05	2
	36H	20325	20.5	18.67	1	17.62	2	17.07	3
		20175	20.5	18.65	1	17.73	2	17.21	3
		20025	20.5	18.83	1	17.86	2	17.33	3
	36M	20325	20.5	18.69	1	17.69	2	17.14	3
		20175	20.5	18.66	1	17.84	2	17.19	3
		20025	20.5	18.78	1	17.81	2	17.24	3
	36L	20325	20.5	18.68	1	17.69	2	17.26	3
		20175	20.5	18.65	1	17.75	2	17.21	3
		20025	20.5	18.76	1	17.90	2	17.31	3
	75	20325	20.5	18.72	1	17.59	2	17.13	3
		20175	20.5	18.70	1	17.78	2	17.12	3
		20025	20.5	18.80	1	17.81	2	17.29	3
20MHz	1H	20300	20.5	19.59	0	18.99	1	17.83	2
		20175	20.5	19.57	0	18.97	1	17.78	2
		20050	20.5	19.58	0	19.02	1	17.95	2
	1M	20300	20.5	19.83	0	19.21	1	18.02	2
		20175	20.5	19.84	0	19.25	1	18.14	2
		20050	20.5	19.91	0	19.35	1	18.24	2
	1L	20300	20.5	19.54	0	18.92	1	17.98	2
		20175	20.5	19.60	0	18.98	1	18.01	2
		20050	20.5	19.63	0	19.07	1	18.06	2
	50H	20300	20.5	18.66	1	17.65	2	17.10	3
		20175	20.5	18.71	1	17.75	2	17.22	3
		20050	20.5	18.83	1	17.87	2	17.31	3
	50M	20300	20.5	18.71	1	17.68	2	17.17	3
		20175	20.5	18.72	1	17.83	2	17.18	3
		20050	20.5	18.77	1	17.82	2	17.27	3
	50L	20300	20.5	18.72	1	17.69	2	17.24	3
		20175	20.5	18.71	1	17.81	2	17.19	3
		20050	20.5	18.77	1	17.87	2	17.31	3
	100	20300	20.5	18.70	1	17.62	2	17.15	3
		20175	20.5	18.70	1	17.78	2	17.14	3
		20050	20.5	18.81	1	17.85	2	17.30	3

Table 11-13 LTE850-FDD5 #1

LTE850-FDD5 #1									
BandWidth	RB No./Start	Channel	Tune-up	Measured Power (dBm) & MPR					
				QPSK		16QAM			
				Measured Power	MPR	Measured Power	MPR		
1.4MHz	1H	20643	24.5	24.12	0	23.32	1	22.46	2
		20525	24.5	24.12	0	23.32	1	22.47	2
		20407	24.5	24.05	0	23.27	1	22.39	2
	1M	20643	24.5	24.18	0	23.35	1	22.48	2
		20525	24.5	24.19	0	23.37	1	22.46	2
		20407	24.5	24.16	0	23.35	1	22.40	2
	1L	20643	24.5	24.08	0	23.26	1	22.45	2
		20525	24.5	24.12	0	23.26	1	22.50	2
		20407	24.5	24.15	0	23.30	1	22.46	2
	3H	20643	24.5	24.20	0	23.26	1	22.40	2
		20525	24.5	24.19	0	23.29	1	22.41	2
		20407	24.5	24.19	0	23.27	1	22.50	2
	3M	20643	24.5	24.23	0	23.31	1	22.49	2
		20525	24.5	24.24	0	23.34	1	22.44	2
		20407	24.5	24.23	0	23.31	1	22.43	2
	3L	20643	24.5	24.19	0	23.31	1	22.45	2
		20525	24.5	24.19	0	23.28	1	22.43	2
		20407	24.5	24.22	0	23.34	1	22.48	2
	6	20643	24.5	23.26	1	22.24	2	21.45	3
		20525	24.5	23.28	1	22.23	2	21.42	3
		20407	24.5	23.29	1	22.22	2	21.36	3
3MHz	1H	20635	24.5	24.02	0	23.39	1	22.47	2
		20525	24.5	24.20	0	23.41	1	22.48	2
		20415	24.5	24.22	0	23.39	1	22.43	2
	1M	20635	24.5	24.18	0	23.41	1	22.48	2
		20525	24.5	24.34	0	23.45	1	22.44	2
		20415	24.5	24.31	0	23.39	1	22.49	2
	1L	20635	24.5	24.19	0	23.33	1	22.45	2
		20525	24.5	24.21	0	23.33	1	22.43	2
		20415	24.5	24.21	0	23.37	1	22.43	2
	8H	20635	24.5	23.28	1	22.26	2	21.34	3
		20525	24.5	23.28	1	22.26	2	21.48	3
		20415	24.5	23.26	1	22.25	2	21.37	3
	8M	20635	24.5	23.29	1	22.26	2	21.39	3
		20525	24.5	23.31	1	22.28	2	21.33	3
		20415	24.5	23.26	1	22.25	2	21.36	3
	8L	20635	24.5	23.25	1	22.25	2	21.45	3
		20525	24.5	23.26	1	22.25	2	21.37	3
		20415	24.5	23.26	1	22.25	2	21.33	3
	15	20635	24.5	23.27	1	22.22	2	21.42	3
		20525	24.5	23.29	1	22.22	2	21.47	3
		20415	24.5	23.26	1	22.19	2	21.31	3
5MHz	1H	20625	24.5	24.17	0	23.26	1	22.38	2
		20525	24.5	24.18	0	23.34	1	22.47	2
		20425	24.5	24.20	0	23.36	1	22.42	2
	1M	20625	24.5	24.29	0	23.49	1	22.46	2
		20525	24.5	24.29	0	23.48	1	22.48	2
		20425	24.5	24.31	0	23.44	1	22.49	2
	1L	20625	24.5	24.13	0	23.30	1	22.50	2
		20525	24.5	24.18	0	23.31	1	22.41	2
		20425	24.5	24.19	0	23.34	1	22.42	2
	12H	20625	24.5	23.27	1	22.28	2	21.36	3
		20525	24.5	23.27	1	22.27	2	21.46	3
		20425	24.5	23.25	1	22.26	2	21.32	3
	12M	20625	24.5	23.29	1	22.26	2	21.37	3
		20525	24.5	23.32	1	22.30	2	21.33	3
		20425	24.5	23.26	1	22.28	2	21.27	3
	12L	20625	24.5	23.24	1	22.23	2	21.49	3
		20525	24.5	23.26	1	22.26	2	21.39	3
		20425	24.5	23.26	1	22.23	2	21.34	3
	25	20625	24.5	23.28	1	22.26	2	21.48	3
		20525	24.5	23.33	1	22.30	2	21.39	3
		20425	24.5	23.27	1	22.25	2	21.29	3

10MHz	1H	20600	24.5	24.16	0	23.33	1	22.44	2
		20525	24.5	24.21	0	23.45	1	22.49	2
		20450	24.5	24.22	0	23.38	1	22.47	2
	1M	20600	24.5	24.21	0	23.33	1	22.48	2
		20525	24.5	24.21	0	23.38	1	22.44	2
		20450	24.5	24.28	0	23.41	1	22.46	2
	1L	20600	24.5	24.16	0	23.32	1	22.49	2
		20525	24.5	24.19	0	23.40	1	22.42	2
		20450	24.5	24.16	0	23.32	1	22.41	2
	25H	20600	24.5	23.31	1	22.27	2	21.40	3
		20525	24.5	23.38	1	22.35	2	21.45	3
		20450	24.5	23.30	1	22.30	2	21.37	3
	25M	20600	24.5	23.30	1	22.27	2	21.39	3
		20525	24.5	23.29	1	22.27	2	21.35	3
		20450	24.5	23.28	1	22.28	2	21.34	3
	25L	20600	24.5	23.36	1	22.35	2	21.46	3
		20525	24.5	23.33	1	22.30	2	21.40	3
		20450	24.5	23.27	1	22.24	2	21.38	3
	50	20600	24.5	23.36	1	22.31	2	21.46	3
		20525	24.5	23.37	1	22.32	2	21.44	3
		20450	24.5	23.30	1	22.27	2	21.36	3

Table 11-14 LTE700-FDD12 #1

LTE700-FDD12 #1									
BandWidth	RB No./Start	Channel	Tune-up	Measured Power (dBm) & MPR					
				QPSK		16QAM			
				Measured Power	MPR	Measured Power	MPR		
1.4MHz	1H	23173	24.5	23.55	0	22.63	1	21.46	2
		23095	24.5	23.63	0	22.64	1	21.45	2
		23017	24.5	23.68	0	22.69	1	21.60	2
	1M	23173	24.5	23.62	0	22.60	1	21.65	2
		23095	24.5	23.68	0	22.68	1	21.67	2
		23017	24.5	23.73	0	22.76	1	21.60	2
	1L	23173	24.5	23.54	0	22.60	1	21.60	2
		23095	24.5	23.56	0	22.57	1	21.58	2
		23017	24.5	23.68	0	22.70	1	21.72	2
	3H	23173	24.5	23.62	0	22.54	1	21.51	2
		23095	24.5	23.67	0	22.66	1	21.50	2
		23017	24.5	23.75	0	22.75	1	21.61	2
	3M	23173	24.5	23.67	0	22.61	1	21.65	2
		23095	24.5	23.68	0	22.67	1	21.64	2
		23017	24.5	23.79	0	22.73	1	21.59	2
	3L	23173	24.5	23.62	0	22.56	1	21.64	2
		23095	24.5	23.63	0	22.65	1	21.58	2
		23017	24.5	23.72	0	22.73	1	21.70	2
	6	23173	24.5	22.69	1	21.53	2	20.46	3
		23095	24.5	22.75	1	21.59	2	20.54	3
		23017	24.5	22.81	1	21.62	2	20.48	3
3MHz	1H	23165	24.5	23.59	0	22.61	1	21.45	2
		23095	24.5	23.65	0	22.72	1	21.55	2
		23025	24.5	23.69	0	22.69	1	21.56	2
	1M	23165	24.5	23.69	0	22.68	1	21.59	2
		23095	24.5	23.74	0	22.71	1	21.58	2
		23025	24.5	23.83	0	22.81	1	21.65	2
	1L	23165	24.5	23.56	0	22.58	1	21.57	2
		23095	24.5	23.59	0	22.62	1	21.65	2
		23025	24.5	23.65	0	22.70	1	21.65	2
	8H	23165	24.5	22.64	1	21.51	2	20.40	3
		23095	24.5	22.70	1	21.56	2	20.52	3
		23025	24.5	22.74	1	21.61	2	20.51	3
	8M	23165	24.5	22.66	1	21.53	2	20.48	3
		23095	24.5	22.71	1	21.59	2	20.46	3
		23025	24.5	22.73	1	21.61	2	20.46	3
	8L	23165	24.5	22.64	1	21.53	2	20.47	3
		23095	24.5	22.66	1	21.55	2	20.61	3
		23025	24.5	22.72	1	21.63	2	20.45	3
	15	23165	24.5	22.64	1	21.47	2	20.47	3
		23095	24.5	22.71	1	21.52	2	20.50	3
		23025	24.5	22.70	1	21.52	2	20.48	3
5MHz	1H	23155	24.5	23.54	0	22.58	1	21.51	2
		23095	24.5	23.60	0	22.66	1	21.47	2
		23035	24.5	23.60	0	22.69	1	21.59	2
	1M	23155	24.5	23.73	0	22.75	1	21.58	2
		23095	24.5	23.66	0	22.77	1	21.68	2
		23035	24.5	23.75	0	22.77	1	21.69	2
	1L	23155	24.5	23.50	0	22.60	1	21.63	2
		23095	24.5	23.54	0	22.64	1	21.58	2
		23035	24.5	23.59	0	22.68	1	21.62	2
	12H	23155	24.5	22.62	1	21.50	2	20.49	3
		23095	24.5	22.69	1	21.58	2	20.51	3
		23035	24.5	22.74	1	21.61	2	20.51	3
	12M	23155	24.5	22.65	1	21.55	2	20.47	3
		23095	24.5	22.68	1	21.58	2	20.53	3
		23035	24.5	22.67	1	21.60	2	20.44	3
	12L	23155	24.5	22.64	1	21.52	2	20.55	3
		23095	24.5	22.64	1	21.54	2	20.54	3
		23035	24.5	22.62	1	21.52	2	20.51	3
	25	23155	24.5	22.65	1	21.52	2	20.53	3
		23095	24.5	22.68	1	21.56	2	20.47	3
		23035	24.5	22.70	1	21.57	2	20.47	3

10MHz	1H	23130	24.5	23.57	0	22.62	1	21.50	2
		23095	24.5	23.58	0	22.64	1	21.51	2
		23060	24.5	23.63	0	22.69	1	21.58	2
	1M	23130	24.5	23.63	0	22.66	1	21.64	2
		23095	24.5	23.64	0	22.69	1	21.65	2
		23060	24.5	23.65	0	22.66	1	21.67	2
	1L	23130	24.5	23.46	0	22.55	1	21.63	2
		23095	24.5	23.48	0	22.57	1	21.64	2
		23060	24.5	23.56	0	22.63	1	21.68	2
	25H	23130	24.5	22.72	1	21.58	2	20.47	3
		23095	24.5	22.70	1	21.59	2	20.52	3
		23060	24.5	22.75	1	21.64	2	20.55	3
	25M	23130	24.5	22.65	1	21.54	2	20.50	3
		23095	24.5	22.65	1	21.54	2	20.50	3
		23060	24.5	22.67	1	21.55	2	20.49	3
	25L	23130	24.5	22.64	1	21.54	2	20.52	3
		23095	24.5	22.66	1	21.58	2	20.58	3
		23060	24.5	22.59	1	21.50	2	20.49	3
	50	23130	24.5	22.67	1	21.54	2	20.49	3
		23095	24.5	22.68	1	21.56	2	20.53	3
		23060	24.5	22.69	1	21.56	2	20.53	3

Table 11-15 LTE700-FDD14 #1

LTE700-FDD14 #1									
BandWidth	RB No./Start	Channel	Tune-up	Measured Power (dBm) & MPR					
				QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
5MHz	1H	23355	24.5	23.24	0	22.34	1	21.23	2
		23330	24.5	23.29	0	22.37	1	21.30	2
		23305	24.5	23.26	0	22.35	1	21.30	2
	1M	23355	24.5	23.41	0	22.53	1	21.45	2
		23330	24.5	23.47	0	22.53	1	21.50	2
		23305	24.5	23.42	0	22.49	1	21.47	2
	1L	23355	24.5	23.29	0	22.40	1	21.34	2
		23330	24.5	23.26	0	22.35	1	21.35	2
		23305	24.5	23.26	0	22.30	1	21.37	2
	12H	23355	24.5	22.28	1	21.24	2	20.34	3
		23330	24.5	22.32	1	21.33	2	20.39	3
		23305	24.5	22.29	1	21.27	2	20.33	3
	12M	23355	24.5	22.33	1	21.31	2	20.37	3
		23330	24.5	22.33	1	21.33	2	20.38	3
		23305	24.5	22.35	1	21.33	2	20.40	3
	12L	23355	24.5	22.31	1	21.30	2	20.39	3
		23330	24.5	22.34	1	21.35	2	20.43	3
		23305	24.5	22.33	1	21.32	2	20.38	3
	25	23355	24.5	22.33	1	21.28	2	20.33	3
		23330	24.5	22.38	1	21.37	2	20.39	3
		23305	24.5	22.37	1	21.32	2	20.34	3
10MHz	1H	23330	24.5	23.28	0	22.29	1	21.25	2
		23330	24.5	23.37	0	22.51	1	21.44	2
		23330	24.5	23.28	0	22.32	1	21.36	2
	25H	23330	24.5	22.43	1	21.37	2	20.41	3
		23330	24.5	22.37	1	21.32	2	20.37	3
	25L	23330	24.5	22.50	1	21.43	2	20.47	3
		23330	24.5	22.47	1	21.40	2	20.43	3

Table 11-16 LTE2300-FDD30 #1 AP OFF

LTE2300-FDD30 #1 AP OFF									
BandWidth	RB No./Start	Channel	Tune-up	Measured Power (dBm) & MPR					
				QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
5MHz	1H	27735	24	23.14	0	22.21	1	20.97	2
		27710	24	23.08	0	22.02	1	20.96	2
		27685	24	23.08	0	21.74	1	20.99	2
	1M	27735	24	23.22	0	21.87	1	21.10	2
		27710	24	23.18	0	21.83	1	21.11	2
		27685	24	23.03	0	21.78	1	21.09	2
	1L	27735	24	22.68	0	21.75	1	21.00	2
		27710	24	22.70	0	21.73	1	20.99	2
		27685	24	22.55	0	21.72	1	21.03	2
	12H	27735	24	21.67	1	20.62	2	19.88	3
		27710	24	21.71	1	20.65	2	19.90	3
		27685	24	21.63	1	20.60	2	19.89	3
	12M	27735	24	21.71	1	20.71	2	19.91	3
		27710	24	21.69	1	20.68	2	19.92	3
		27685	24	21.67	1	20.64	2	19.89	3
	12L	27735	24	21.71	1	20.68	2	19.90	3
		27710	24	21.71	1	20.69	2	19.95	3
		27685	24	21.67	1	20.62	2	19.92	3
	25	27735	24	21.73	1	20.68	2	19.88	3
		27710	24	21.71	1	20.69	2	19.89	3
		27685	24	21.68	1	20.65	2	19.85	3
10MHz									
	1H	27710	24	22.67	0	21.84	1	21.00	2
	1M	27710	24	22.69	0	21.87	1	21.08	2
	1L	27710	24	22.60	0	21.75	1	21.06	2
	25H	27710	24	21.69	1	20.65	2	19.86	3
	25M	27710	24	21.74	1	20.69	2	19.91	3
	25L	27710	24	21.71	1	20.67	2	19.92	3
	50	27710	24	21.70	1	20.66	2	19.91	3

Table 11-17 LTE2300-FDD30 #2 AP ON

LTE2300-FDD30 #2 AP ON									
BandWidth	RB No./Start	Channel	Tune-up	Measured Power (dBm) & MPR					
				QPSK		16QAM		64QAM	
				Measured Power	MPR	Measured Power	MPR	Measured Power	MPR
5MHz	1H	27735	21.5	20.90	0	20.06	1	18.86	2
		27710	21.5	20.89	0	20.02	1	18.81	2
		27685	21.5	20.90	0	20.37	1	18.84	2
	1M	27735	21.5	20.96	0	20.10	1	18.90	2
		27710	21.5	20.98	0	20.10	1	18.90	2
		27685	21.5	20.97	0	20.35	1	18.92	2
	1L	27735	21.5	20.85	0	19.97	1	18.86	2
		27710	21.5	20.85	0	20.00	1	18.83	2
		27685	21.5	20.91	0	20.31	1	18.81	2
	12H	27735	21.5	19.82	1	18.88	2	17.80	3
		27710	21.5	19.83	1	18.90	2	17.80	3
		27685	21.5	19.79	1	18.91	2	17.78	3
	12M	27735	21.5	19.88	1	18.90	2	17.82	3
		27710	21.5	19.84	1	18.92	2	17.84	3
		27685	21.5	19.81	1	18.94	2	17.79	3
	12L	27735	21.5	19.86	1	18.90	2	17.85	3
		27710	21.5	19.87	1	18.98	2	17.89	3
		27685	21.5	19.81	1	18.93	2	17.81	3
	25	27735	21.5	19.87	1	18.78	2	17.79	3
		27710	21.5	19.85	1	18.84	2	17.80	3
		27685	21.5	19.84	1	18.85	2	17.77	3
10MHz									
	1H	27710	21.5	20.93	0	19.83	1	18.88	2
	1M	27710	21.5	20.90	0	19.93	1	18.95	2
	1L	27710	21.5	20.82	0	19.74	1	18.92	2
	25H	27710	21.5	19.92	1	18.85	2	17.80	3
	25M	27710	21.5	19.87	1	18.86	2	17.80	3
	25L	27710	21.5	19.86	1	18.83	2	17.83	3
	50	27710	21.5	19.85	1	18.83	2	17.82	3