



# FCC PART 15C TEST REPORT

No. I21Z61101-IOT03

for

**Shenzhen Tinno Mobile Technology Corp.**

**Smart Phone**

**Wiko U316AT**

**FCC ID : XD6U316AT**

**with**

**Hardware Version: V1.0**

**Software Version: U316ATV01.09.10**

**Issued Date: 2021-07-16**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)

## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
21Z61101-IOT03	Rev.0	1st edition	2021-07-16

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT.....	5
1.4. PROJECT DATE .....	5
1.5. SIGNATURE .....	5
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
2.1. APPLICANT INFORMATION .....	6
2.2. MANUFACTURER INFORMATION .....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT .....	7
3.3. INTERNAL IDENTIFICATION OF AE.....	7
3.4. GENERAL DESCRIPTION.....	7
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	7
<b>3.6. EUT SET-UPS .....</b>	<b>8</b>
<b>4. REFERENCE DOCUMENTS .....</b>	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	8
4.2. REFERENCE DOCUMENTS FOR TESTING .....	8
<b>5. TEST RESULTS .....</b>	<b>9</b>
5.1. SUMMARY OF TEST RESULTS.....	9
5.2. STATEMENTS.....	9
5.3. TEST CONDITIONS .....	9
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>10</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
7.1. MAXIMUM OUTPUT POWER.....	11
7.2. PEAK POWER SPECTRAL DENSITY .....	11
7.3. DTS 6-dB SIGNAL BANDWIDTH.....	11
7.4. BAND EDGES COMPLIANCE .....	11
7.5. TRANSMITTER SPURIOUS EMISSION .....	11
7.6. AC POWER-LINE CONDUCTED EMISSION .....	11
<b>ANNEX A: DETAILED TEST RESULTS .....</b>	<b>12</b>
<b>A.1. MEASUREMENT METHOD.....</b>	<b>12</b>
<b>A.2. MAXIMUM OUTPUT POWER.....</b>	<b>13</b>

A.2.1. PEAK OUTPUT POWER-CONDUCTED .....	13
<b>A.3. PEAK POWER SPECTRAL DENSITY.....</b>	<b>15</b>
<b>A.5. BAND EDGES COMPLIANCE .....</b>	<b>27</b>
<b>A.6. TRANSMITTER SPURIOUS EMISSION.....</b>	<b>31</b>
A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED .....	31
<b>. A.6. TRANSMITTER SPURIOUS EMISSION .....</b>	<b>44</b>
A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED .....	44
A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED .....	44
<b>A.7. AC POWER-LINE CONDUCTED EMISSION .....</b>	<b>54</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>	<b>58</b>

## 1. Test Laboratory

### 1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### 1.2. Testing Location

Location 1: CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

### 1.3. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

### 1.4. Project date

Testing Start Date: 2021-07-10


Testing End Date: 2021-07-16

### 1.5. Signature



Feng Aiyu

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Hu Xiaoyu

(Approved this test report)

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Shenzhen Tinno Mobile Technology Corp.  
Address: TINNO Building, No.33, Xiandong Rd, Xili, Nanshan District  
City: Shenzhen  
Postal Code: /  
Country: CHINA  
Contact: xiaoping.li  
Telephone: 0755-86095550  
E-mail: xiaoping.li@tinno.com

### **2.2. Manufacturer Information**

Company Name: Shenzhen Tinno Mobile Technology Corp.  
Address: TINNO Building, No.33, Xiandong Rd, Xili, Nanshan District  
City: Shenzhen  
Postal Code: /  
Country: CHINA  
Contact: xiaoping.li  
Telephone: 0755-86095550  
E-mail: xiaoping.li@tinno.com

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Smart Phone
Model name	Wiko U316AT
FCC ID	XD6U316AT
With WLAN Function	Yes
Frequency Range	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	25.99dBm
Power Supply	3.85V

#### **3.2. Internal Identification of EUT**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT65	860117050015462	V1.0	U316ATV01.09.10
EUT46	860117050015769	V1.0	U316ATV01.09.10

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE**

AE ID*	Description	SN
AE1	Charger	/

AE 1

Model	TN-050120U9
Manufacturer	Chongqing Lianmao Electronic Co., LTD.

\*AE ID: is used to identify the test sample in the lab internally.

#### **3.4. General Description**

The Equipment under Test (EUT) is a model of Smart Phone with WLAN with integrated antenna and inbuilt battery.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

#### **3.5. Interpretation of the Test Environment**

For the test methods, the test environment uncertainty figures correspond to an expansion factor k=2.

#### Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

#### 3.6. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	UT65a+ AE1	Charger
Set.2	UT65a+ PC	USB mode (Data link with PC)

### 4. Reference Documents

#### 4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

#### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2018
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Federal Communications Commission Office of Engineering and Technology Laboratory Division GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2013
KDB 558074 D01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g. MIMO Smart Antenna etc)	2019
KDB-662911 D01		2013

## **5. Test Results**

### **5.1. Summary of Test Results**

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
Occupied 6dB Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### **5.2. Statements**

The test cases as listed in section 5.1 of this report for the EUT specified in section 3 was performed by CTTL and according to the standards or reference documents listed in section 4.2. The EUT met all requirements of the standards or reference documents, and only the WLAN function was tested in this report.

### **5.3. Test Conditions**

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage

For this report, if the test cases listed above are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	T nom	26°C
Voltage	V nom	3.85V
Humidity	H nom	20-75%

## **6. Test Facilities Utilized**

### **Conducted test system**

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2022-05-15
2	LISN	ENV216	101459	R&S	1 year	2022-04-10
3	Test Receiver	ESCI7	100948	R&S	1 year	2021-07-17
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### **Radiated emission test system**

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100235	R&S	1 year	2022-02-23
2	BiLog Antenna	VULB9163	483	Schwarzbeck	1 year	2021-08-27
3	Dual-Ridge Waveguide Horn Antenna	3115	6914	ETS-Lindgren	1 year	2022-02-03
4	Loop Antenna	HFH2-Z2	829324/007	R&S	1 year	2021-12-10
5	EMI Antenna	3116	2661	ETS-Lindgren	1 year	2022-01-05

## **7. Measurement Uncertainty**

### **7.1. Maximum Output Power**

Measurement Uncertainty: 0.387dB,k=1.96

### **7.2. Peak Power Spectral Density**

Measurement Uncertainty: 0.705dB,k=1.96

### **7.3. DTS 6-dB Signal Bandwidth**

Measurement Uncertainty: 60.80Hz,k=1.96

### **7.4. Band Edges Compliance**

Measurement Uncertainty : 0.62dB,k=1.96

### **7.5. Transmitter Spurious Emission**

#### **Conducted (k=1.96)**

Frequency Range	Uncertainty(dB)
30MHz ≤ f ≤ 2GHz	1.22
2GHz ≤ f ≤ 3.6GHz	1.22
3.6GHz ≤ f ≤ 8GHz	1.22
8GHz ≤ f ≤ 12.75GHz	1.51
12.75GHz ≤ f ≤ 26GHz	1.51
26GHz ≤ f ≤ 40GHz	1.59

#### **Radiated (k=2)**

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
30MHz ≤ f ≤ 1GHz	5.40
1GHz ≤ f ≤ 18GHz	4.32
18GHz ≤ f ≤ 40GHz	5.26

### **7.6. AC Power-line Conducted Emission**

Measurement Uncertainty : 3.08dB,k=2

## **ANNEX A: Detailed Test Results**

### **A.1. Measurement Method**

#### **A.1.1. Conducted Measurements**


Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

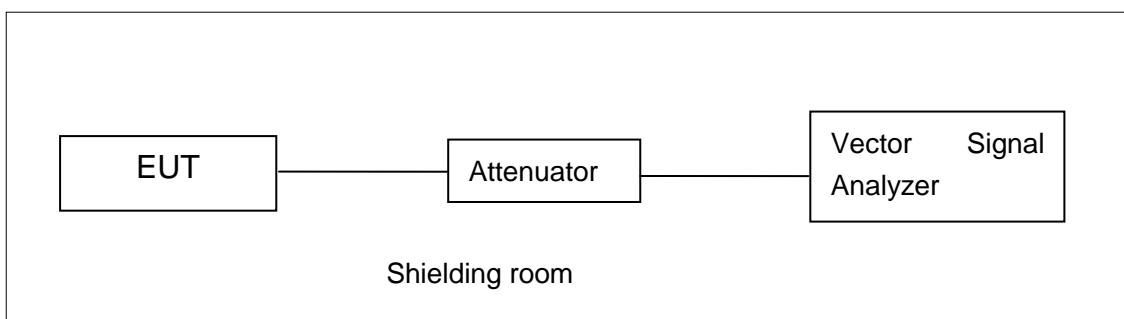


**Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements**

#### **A.1.2. Radiated Emission Measurements**

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

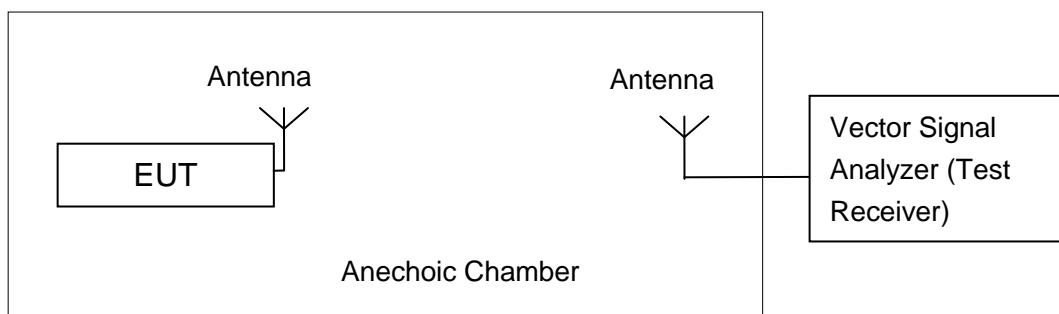

**Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements**

## A.2. Maximum Output Power

**Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.2**

- a) Set the RBW = 1 MHz.
- b) Set the VBW = 3 MHz.
- c) Set the span  $\geq [1.5 \times \text{DTS bandwidth}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector).

**Measurement Limit:**

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

**EUT ID: EUT1**

### **A.2.1. Peak Output Power-conducted**

**Measurement Results:**

#### **802.11b/g mode**

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	21.27	21.60	21.47
	2	/	/	/
	5.5	/	/	/
	11	/	/	/
802.11g	6	25.99	25.87	25.88
	9	/	/	/
	12	/	/	/
	18	/	/	/
	24	/	/	/
	36	/	/	/
	48	/	/	/
	54	/	/	/

#### **802.11n-HT20 mode**

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz	2437MHz	2462 MHz

		(Ch1)	(Ch6)	(Ch11)
802.11n (20MHz)	MCS0	25.98	26.15	25.96
	MCS1	/	/	/
	MCS2	/	/	/
	MCS3	/	/	/
	MCS4	/	/	/
	MCS5	/	/	/
	MCS6	/	/	/
	MCS7	/	/	/

The data rate MCS0 are selected as worse condition, and the following cases are performed with this condition.

Note:The duty cycle of the EUT is 100%.

**Conclusion: Pass**

### **A.3. Peak Power Spectral Density**

**Method of Measurement: See ANSI C63.10-2013-clause 11.10.2**

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to RBW = 3 kHz.
- d) Set the VBW = 10 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

**Measurement Limit:**


Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

**Measurement Results:**


Mode	Channel	Power Spectral Density ( dBm/3 kHz ) ANT0
802.11b	1	-10.49
	6	-9.79
	11	-10.43
802.11g	1	-8.67
	6	-8.89
	11	-9.48
802.11n (HT20)	1	-8.83
	6	-8.55
	11	-8.68

**Conclusion: Pass**


**Test graphs as below:**

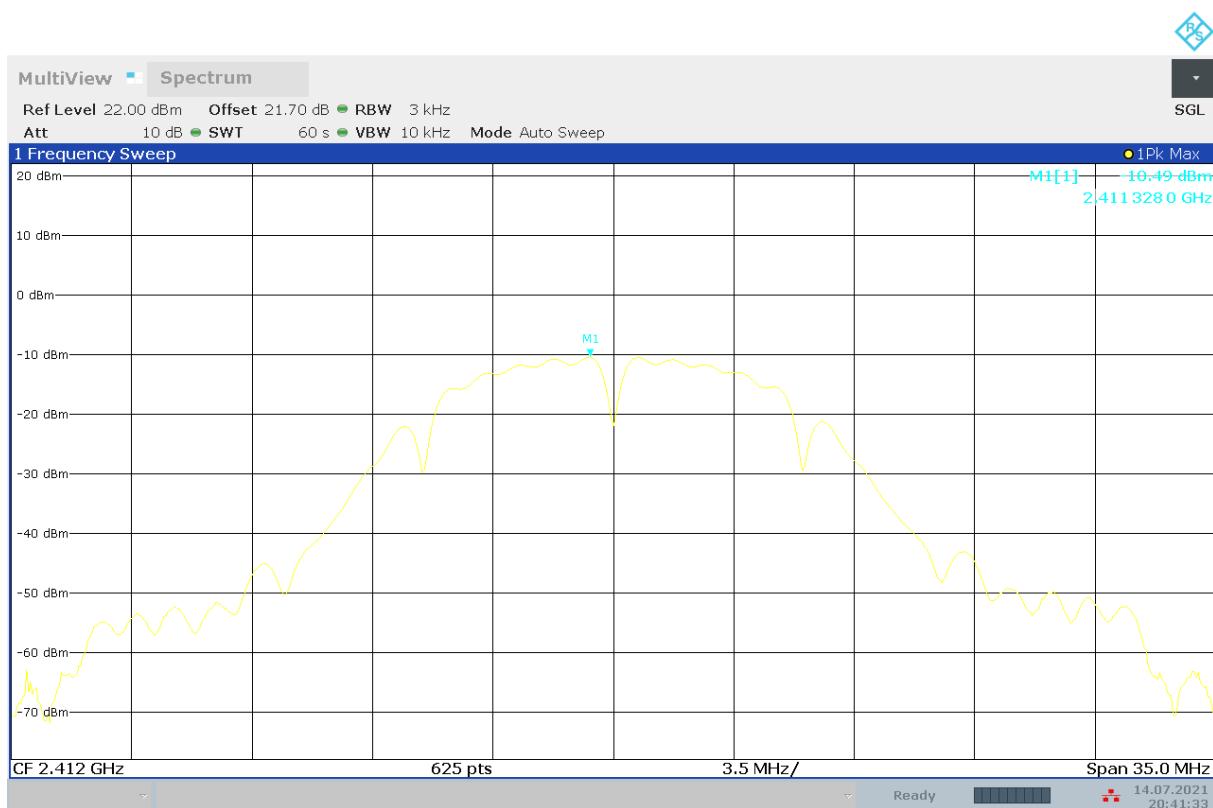


**Fig.A.3.1 Power Spectral Density(802.11b,Ch1)**

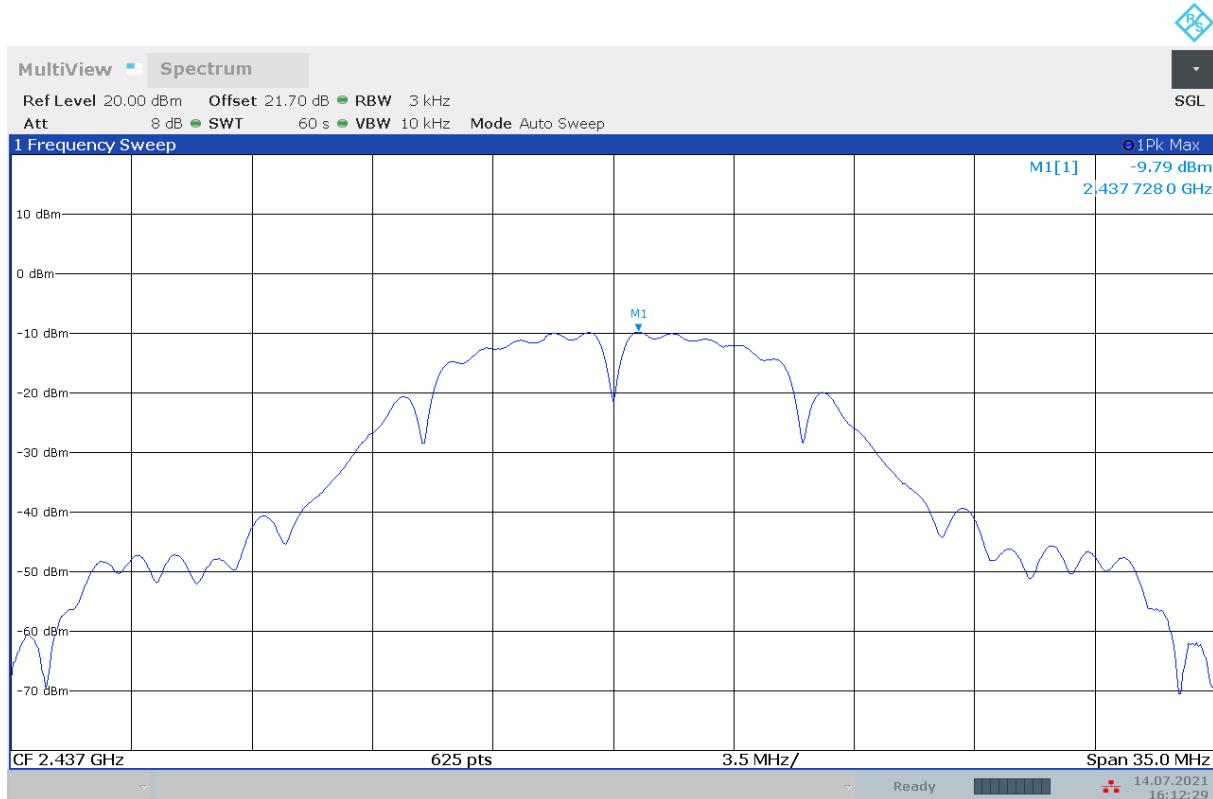


**Fig.A.3.2 Power Spectral Density (802.11b, Ch 6)**

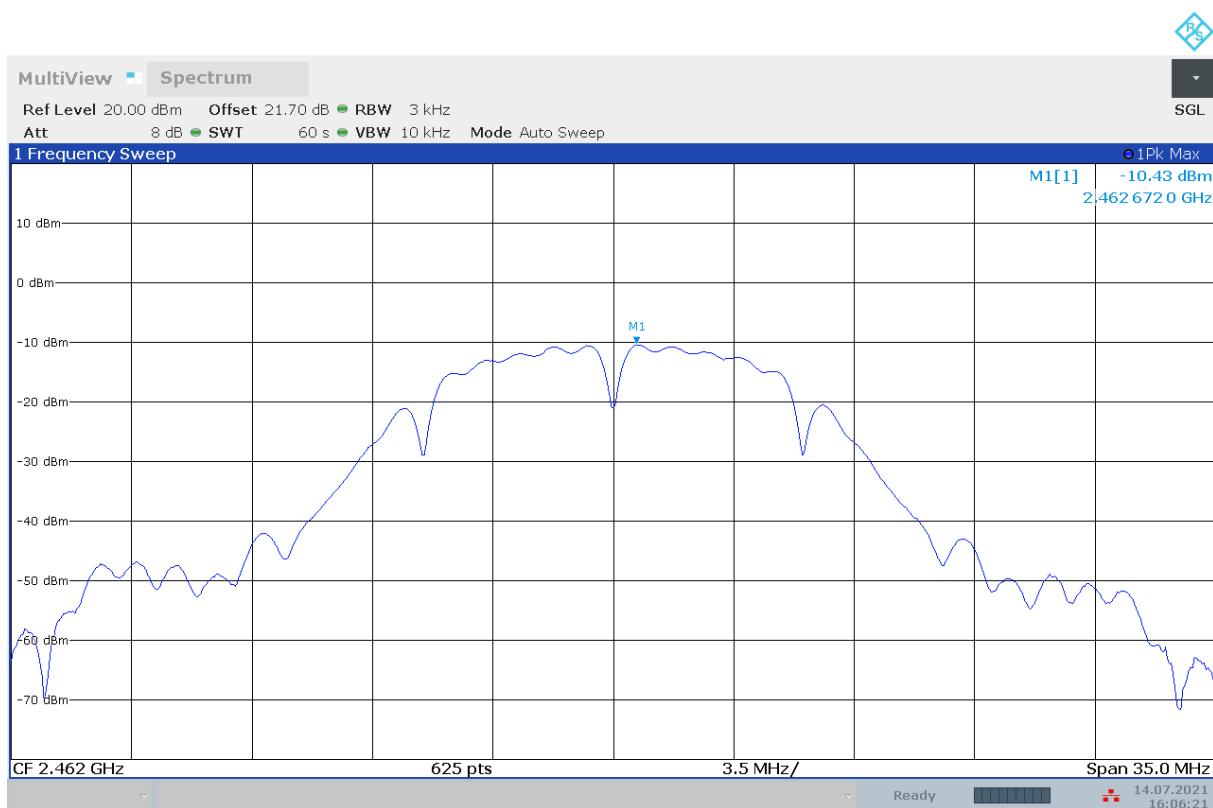


**Fig.A.3.3 Power Spectral Density (802.11b, Ch 11)**

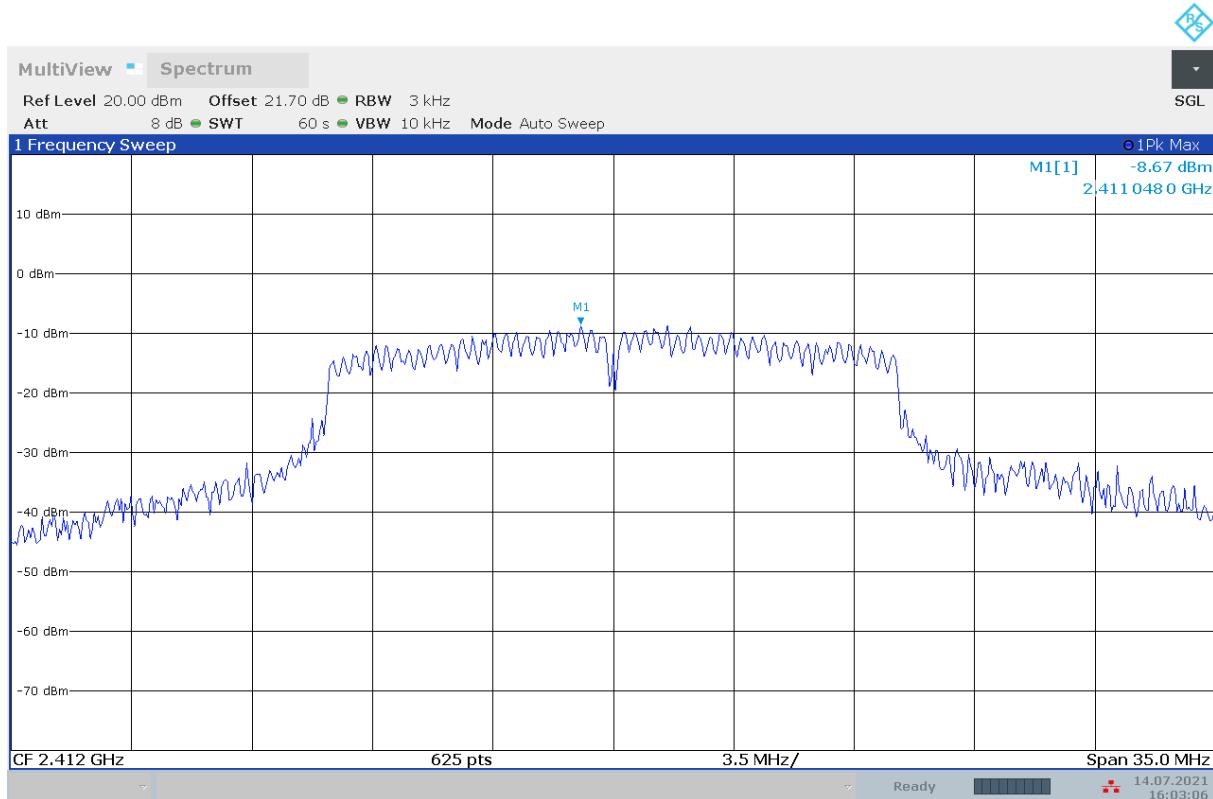


**Fig.A.3.4 Power Spectral Density (802.11g, Ch 1)**

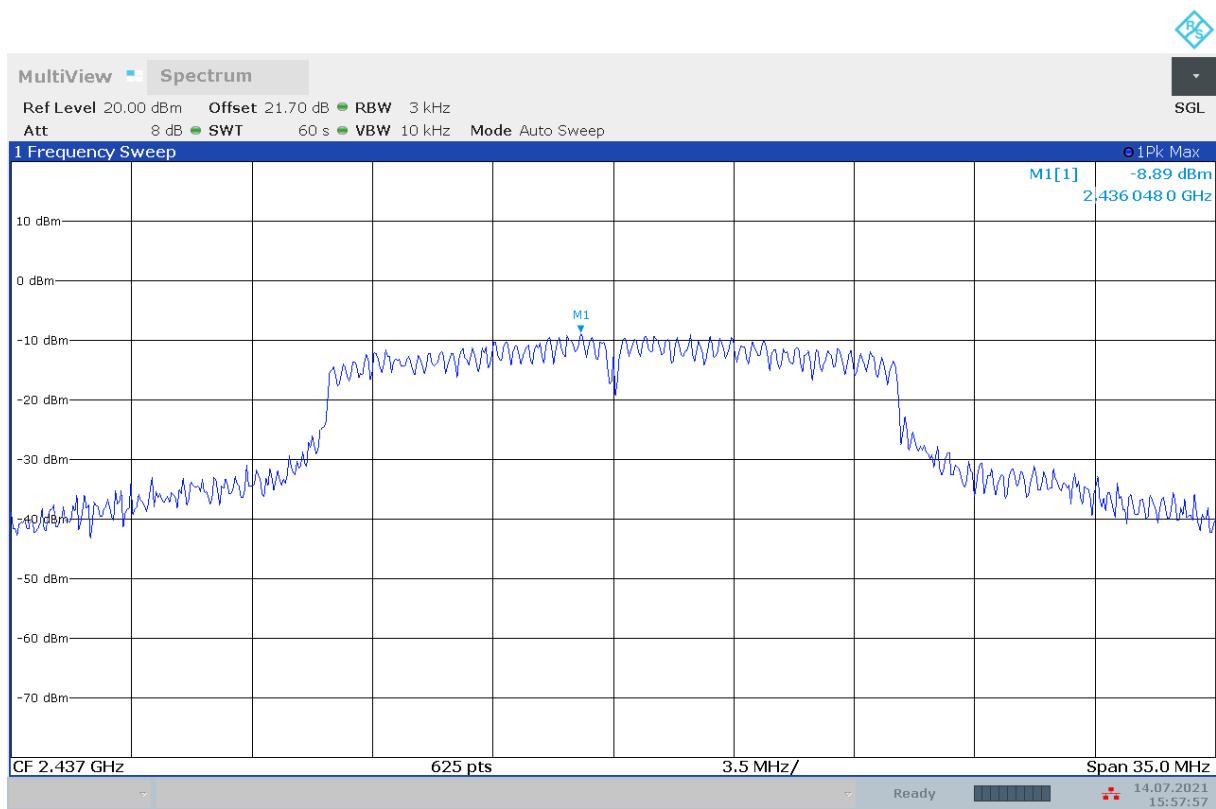


**Fig.A.3.5 Power Spectral Density (802.11g, Ch 6)**

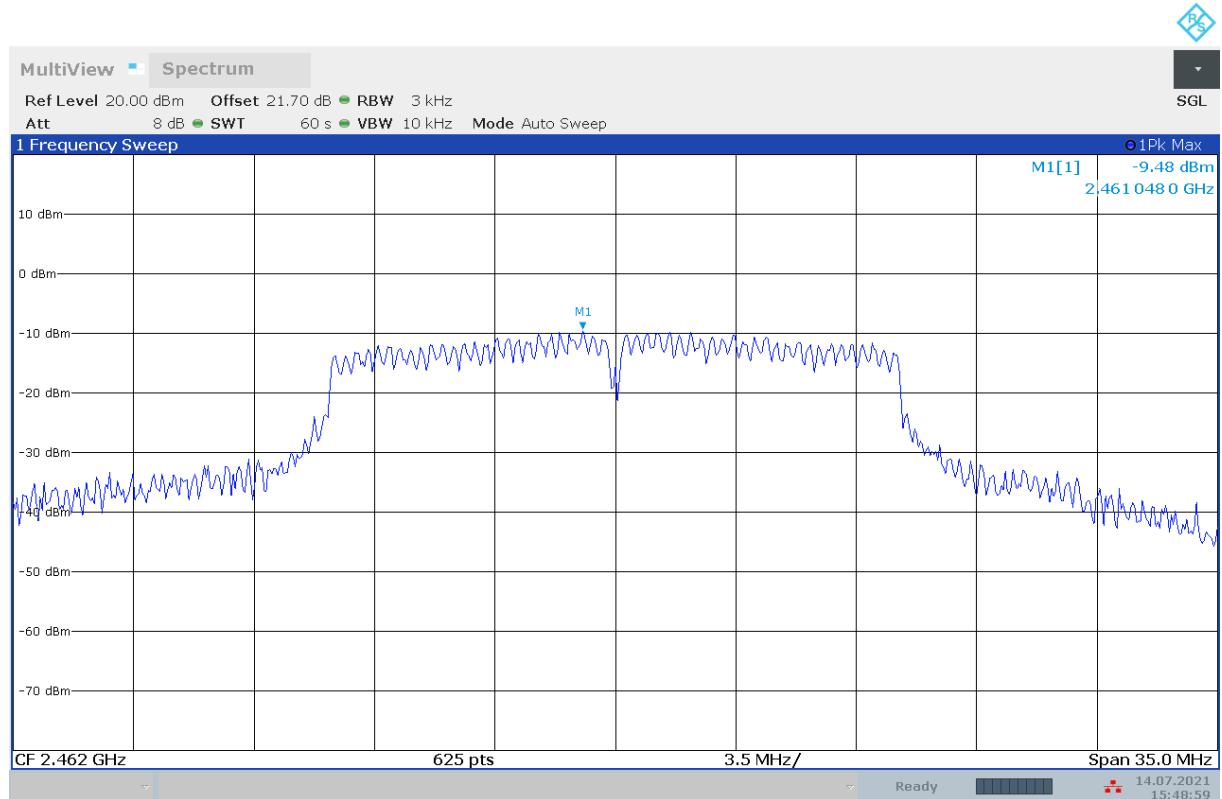


**Fig.A.3.6 Power Spectral Density (802.11g, Ch 11)**

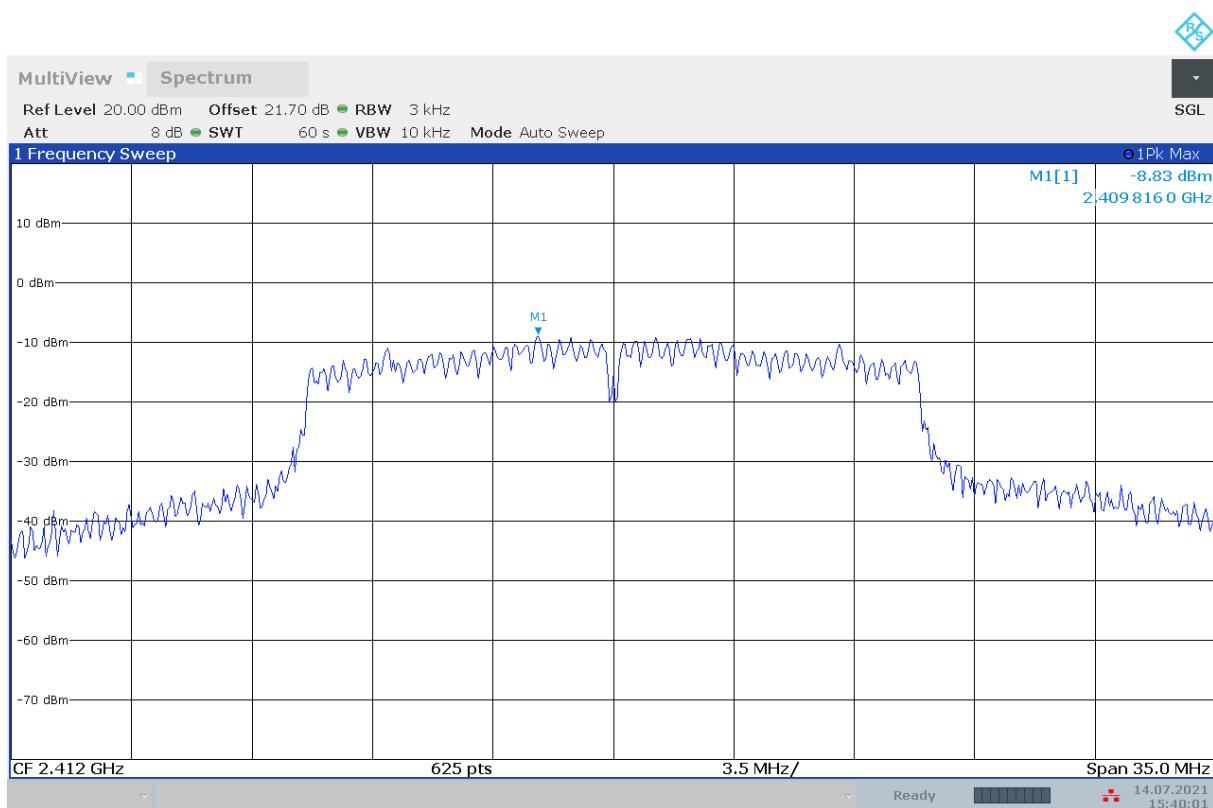

**Fig.A.3.7 Power Spectral Density (802.11n-HT20, Ch 1)**

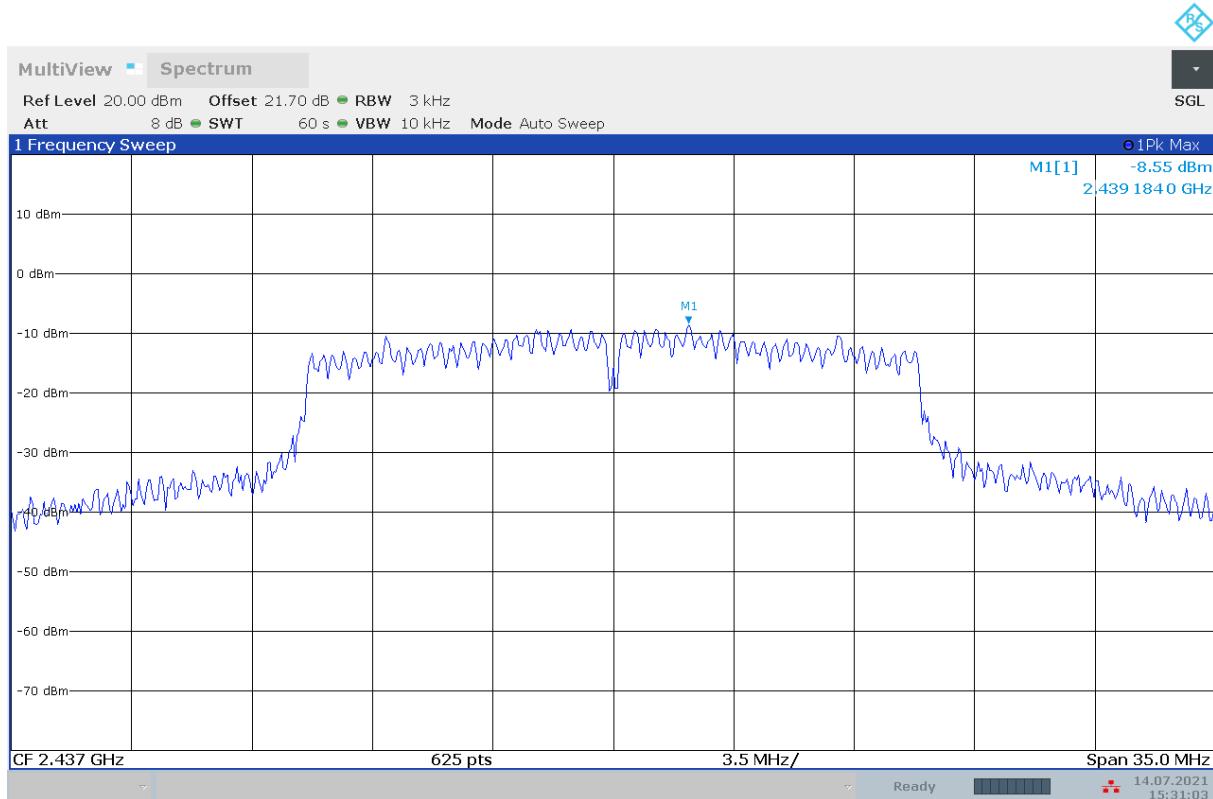

**Fig.A.3.8 Power Spectral Density (802.11n-HT20, Ch 6)**

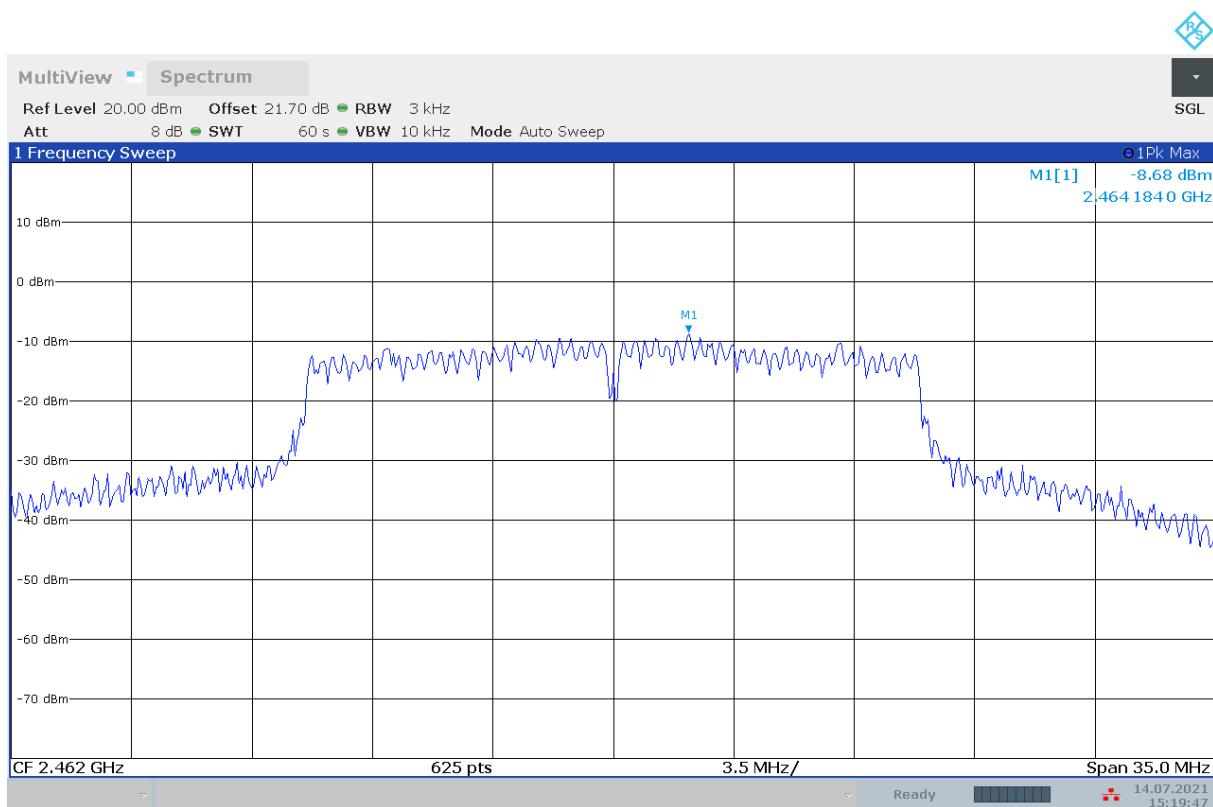

**Fig.A.3.9 Power Spectral Density (802.11n-HT20, Ch 11)**

#### **A.4. DTS 6-dB Signal Bandwidth**

**Method of Measurement: See ANSI C63.10-2013 section 11.8.1.**

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) = 300 kHz.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

**EUT ID: EUT1**


**Measurement Result:**



**SISO ANT0:**
**802.11b/g mode**


Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11b	1	Fig.A.4.1	9112	P
	6	Fig.A.4.2	9117	P
	11	Fig.A.4.3	9252	P
802.11g	1	Fig.A.4.4	16320	P
	6	Fig.A.4.5	16320	P
	11	Fig.A.4.6	16370	P

**802.11n-HT20 mode**


Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11n (HT20)	1	Fig.A.4.7	17560	P
	6	Fig.A.4.8	17570	P
	11	Fig.A.4.9	17680	P


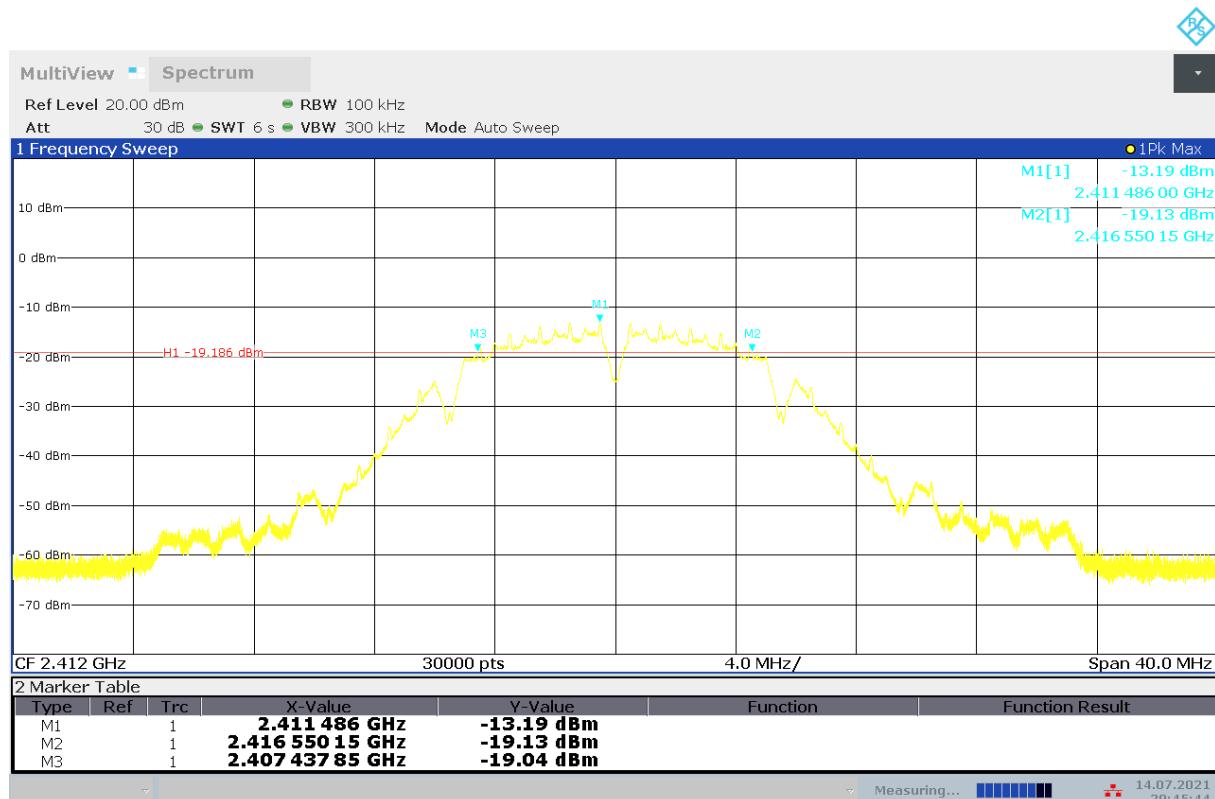
**Test graphs as below:**
**SISO ANT0:**

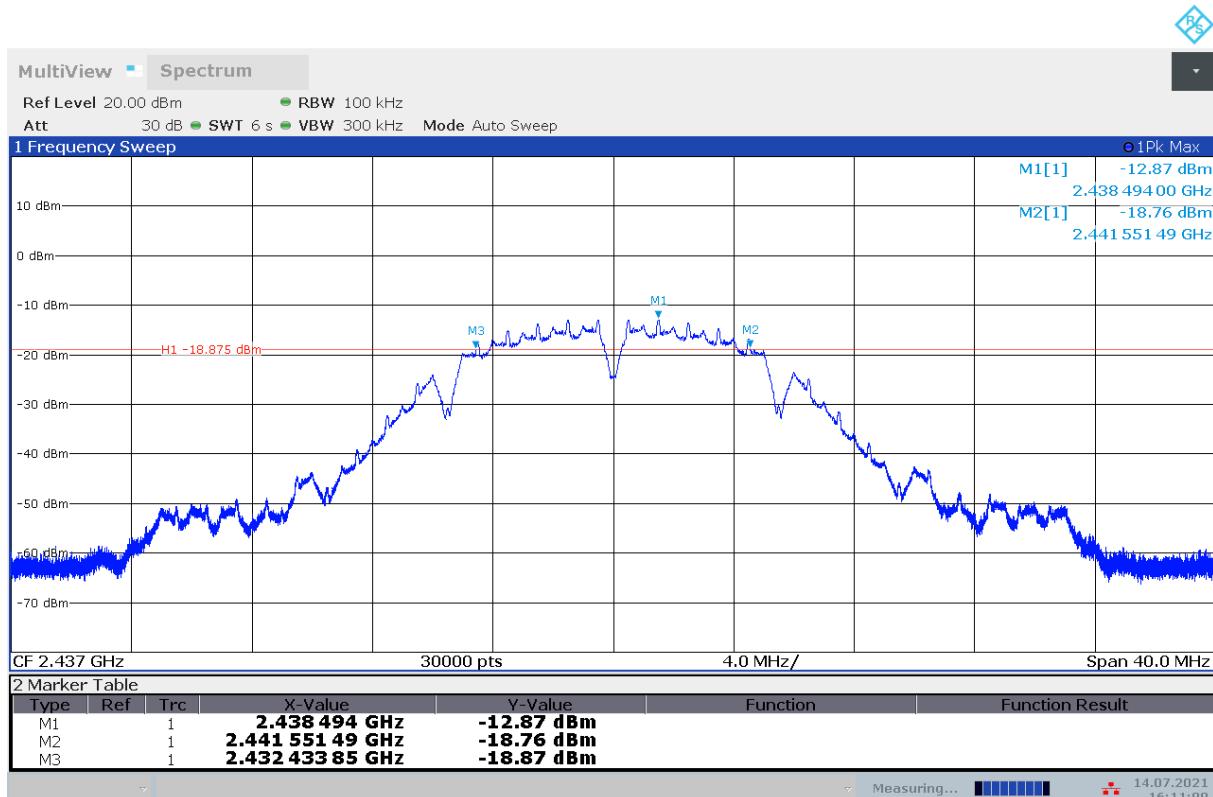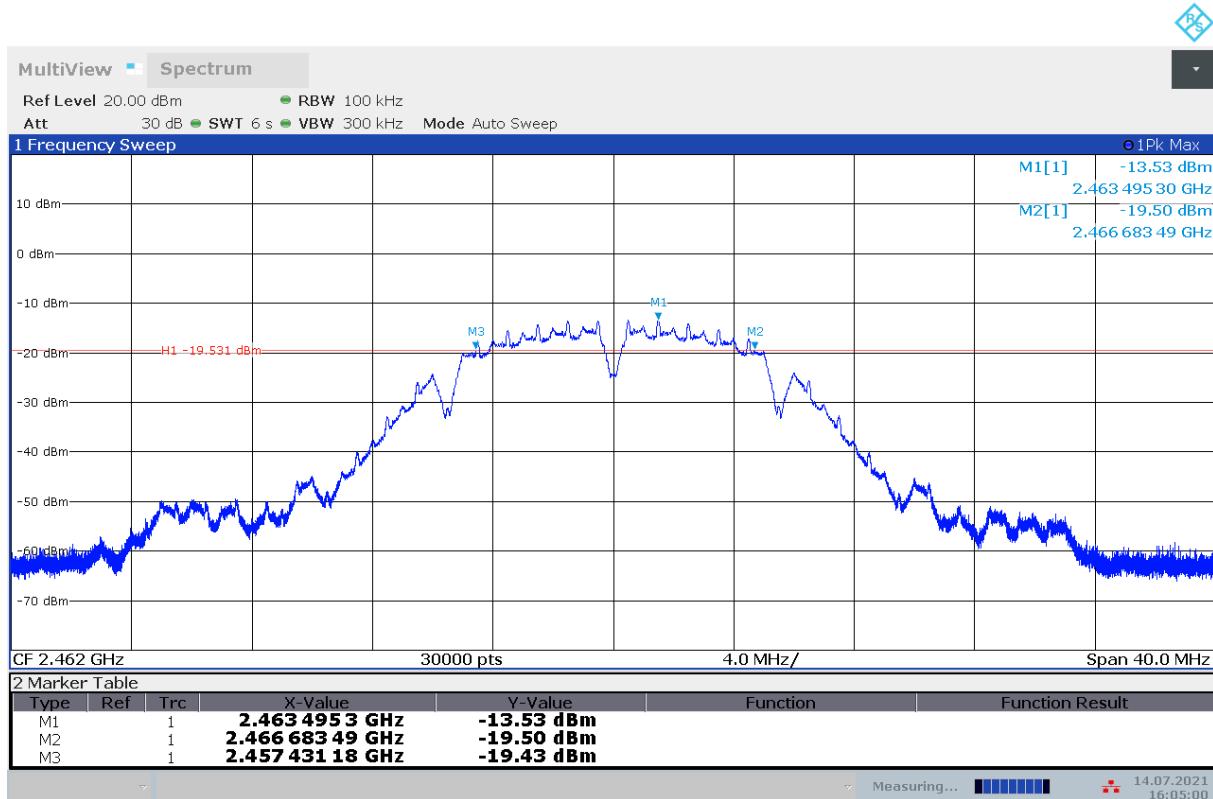**Fig.A.4.1 Occupied 6dB Bandwidth(802.11b,Ch 1)**

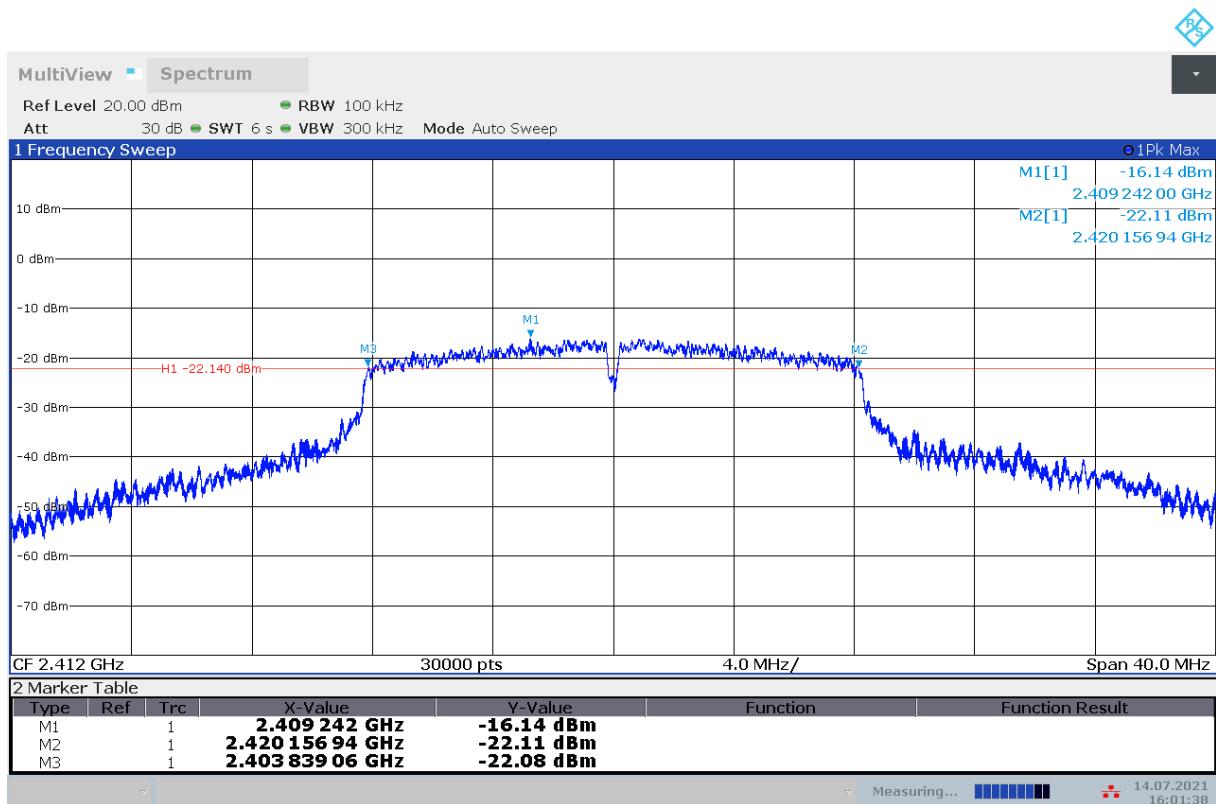
**Fig.A.4.2 Occupied 6dB Bandwidth (802.11b, Ch 6)**

**Fig.A.4.3 Occupied 6dB Bandwidth (802.11b, Ch 11)**

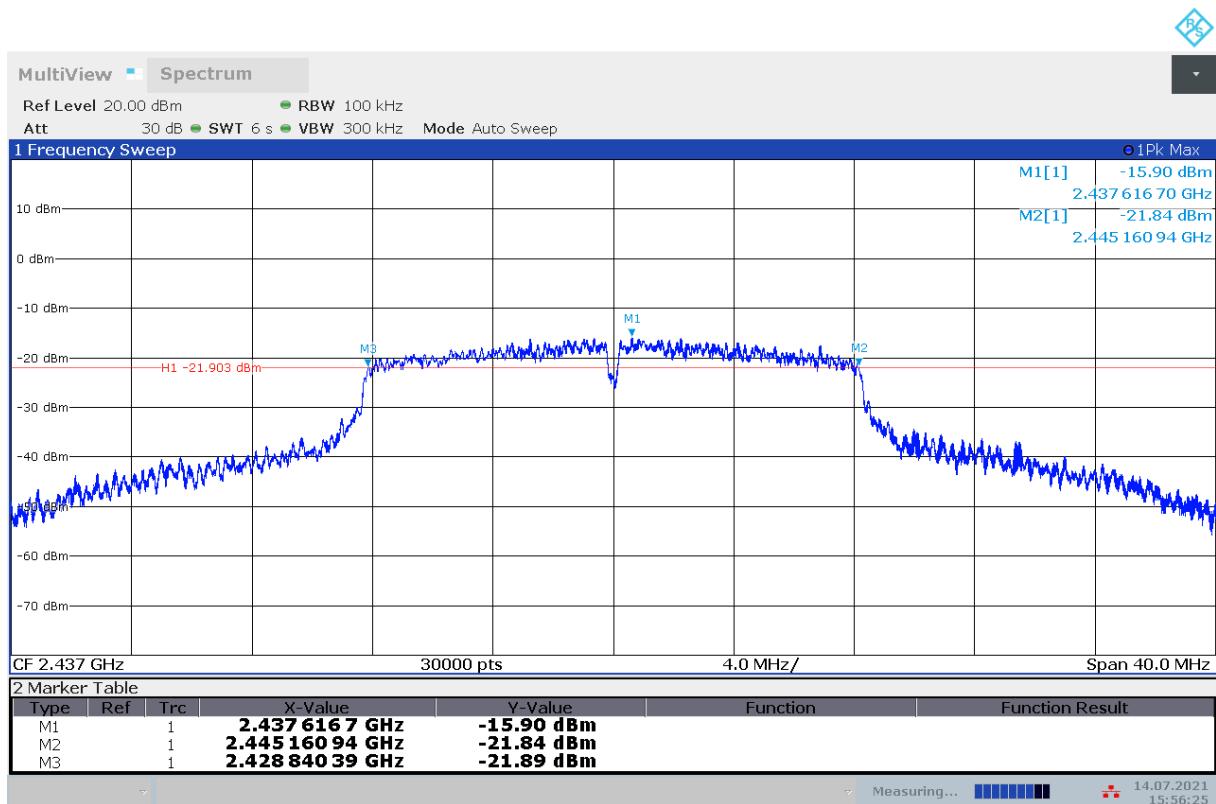


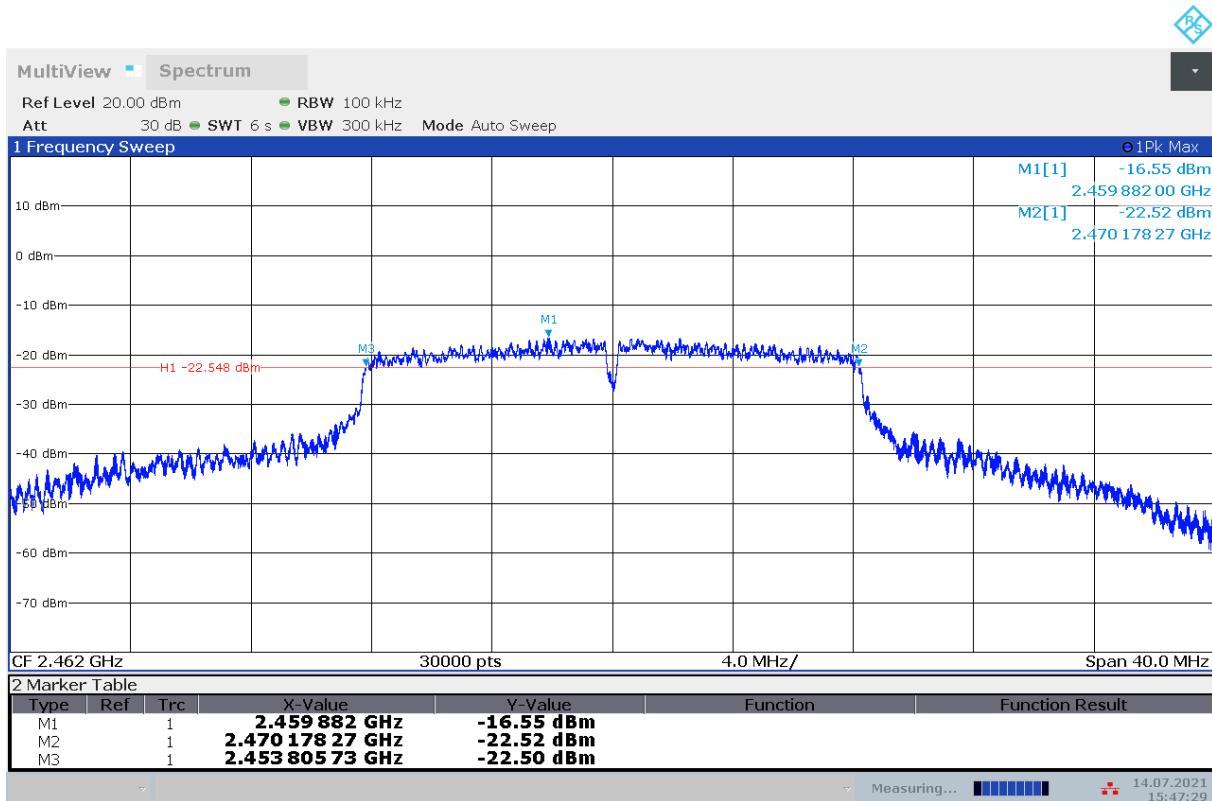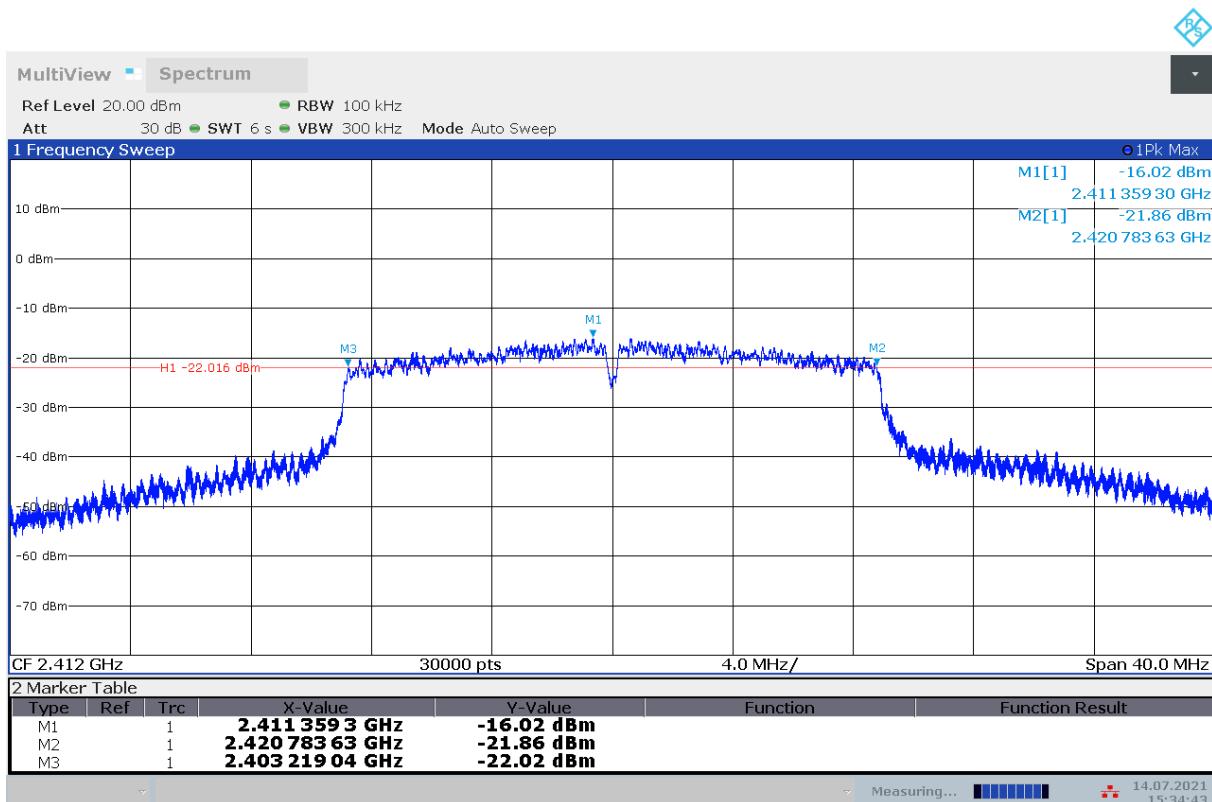**Fig.A.4.4 Occupied 6dB Bandwidth (802.11g, Ch 1)**




**Fig.A.4.5 Occupied 6dB Bandwidth (802.11g, Ch 6)**

**Fig.A.4.6 Occupied 6dB Bandwidth (802.11g, Ch 11)**

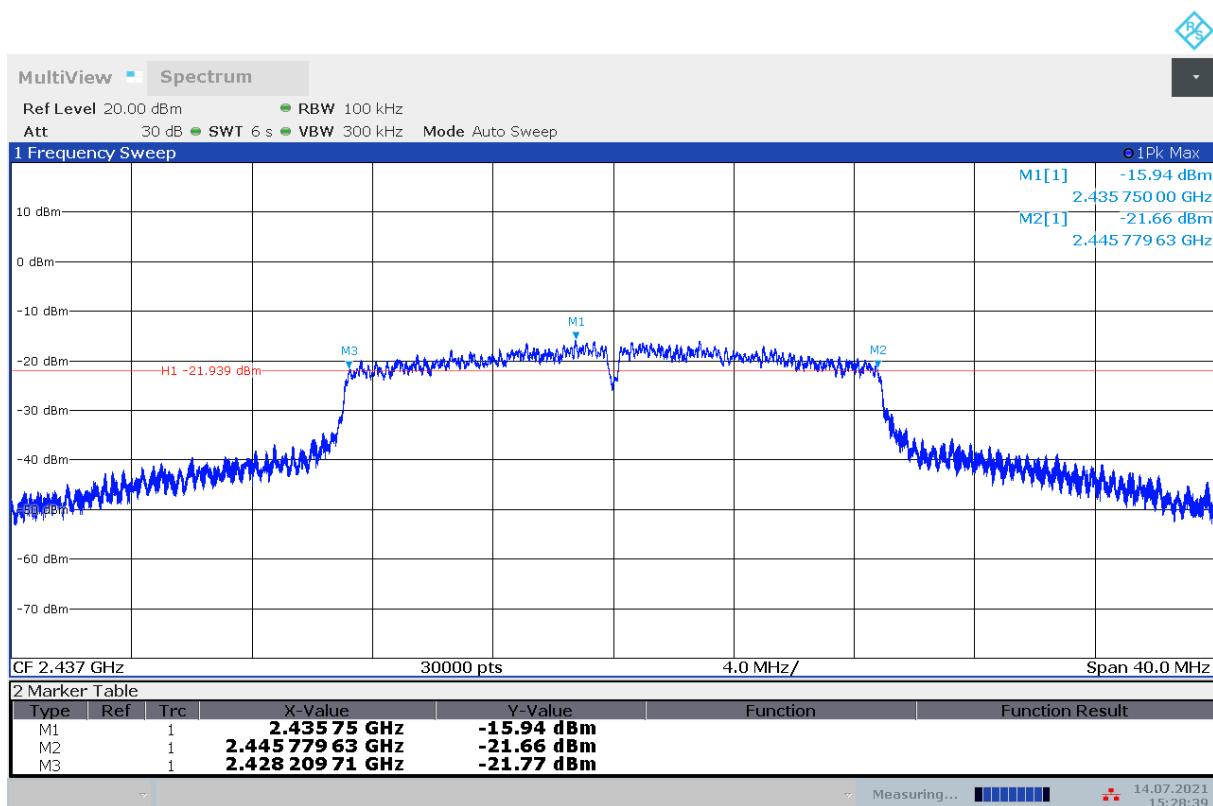
**Fig.A.4.7 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 1)**

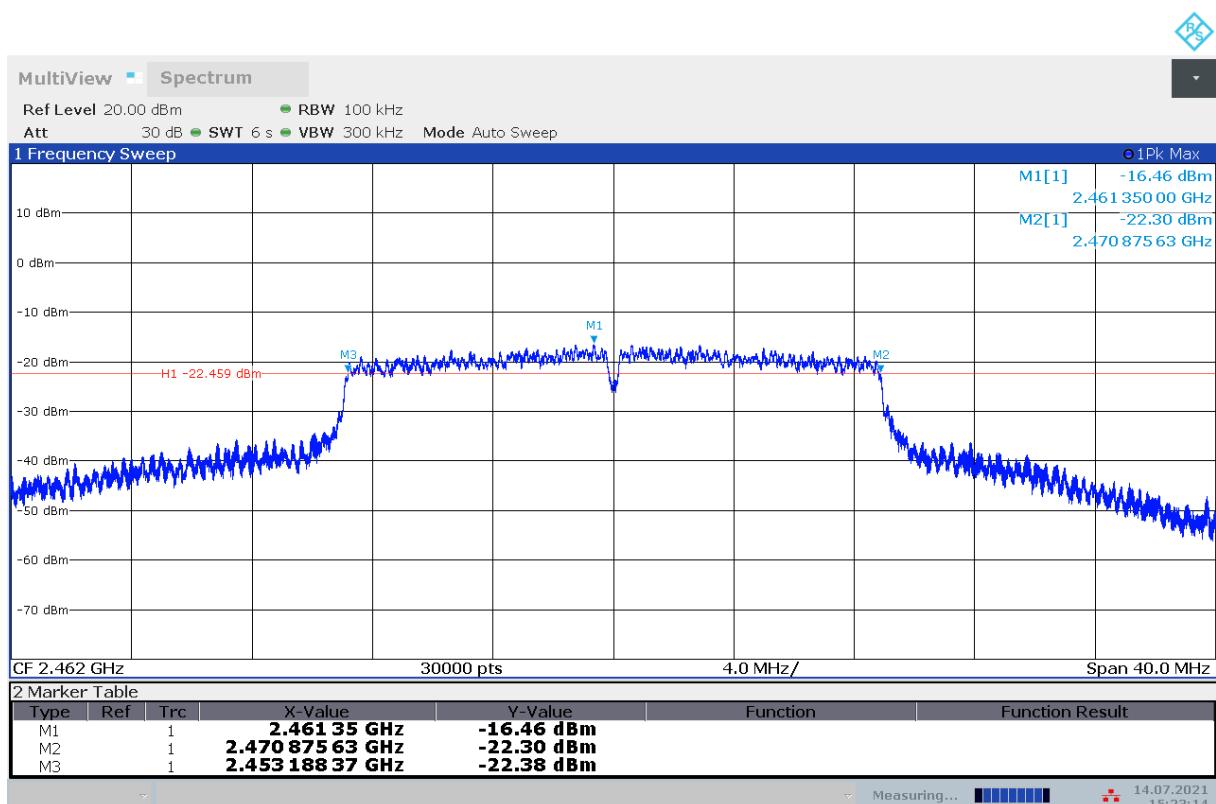

**Fig.A.4.8 Occupied 6dB Bandwidth (802.11n-HT20, Ch 6)**



**Fig.A.4.9 Occupied 6dB Bandwidth (802.11n-HT20, Ch 11)**

## A.5. Band Edges Compliance

**Method of Measurement: See ANSI C63.10-2013-clause 6.10.4**

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 100MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

**EUT ID: EUT1**

**Measurement Result:**


**802.11b/g mode**

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.1	P
	11	Fig.A.5.2	P
802.11g	1	Fig.A.5.3	P
	11	Fig.A.5.4	P


**802.11n-HT20 mode**

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.5	P
	11	Fig.A.5.6	P


**Test graphs as below:**

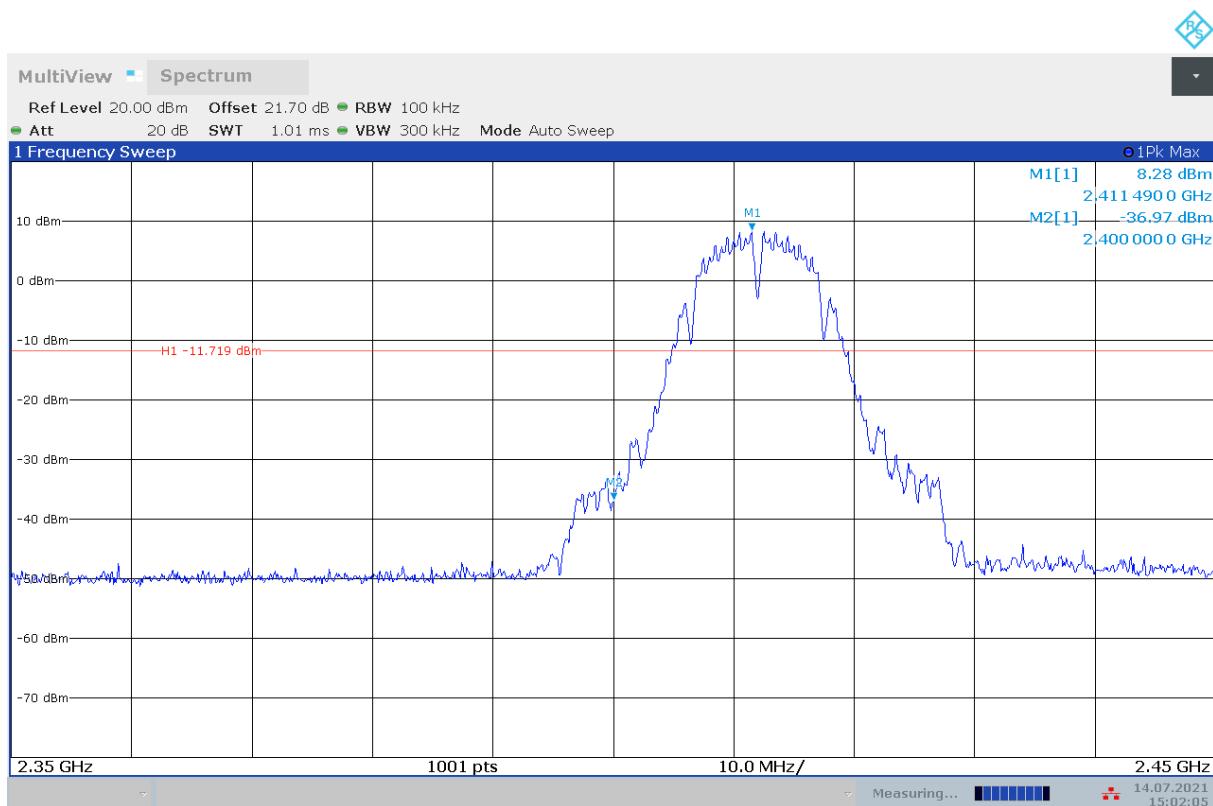


**Fig.A.5.1 Band Edges (802.11b, Ch 1)**

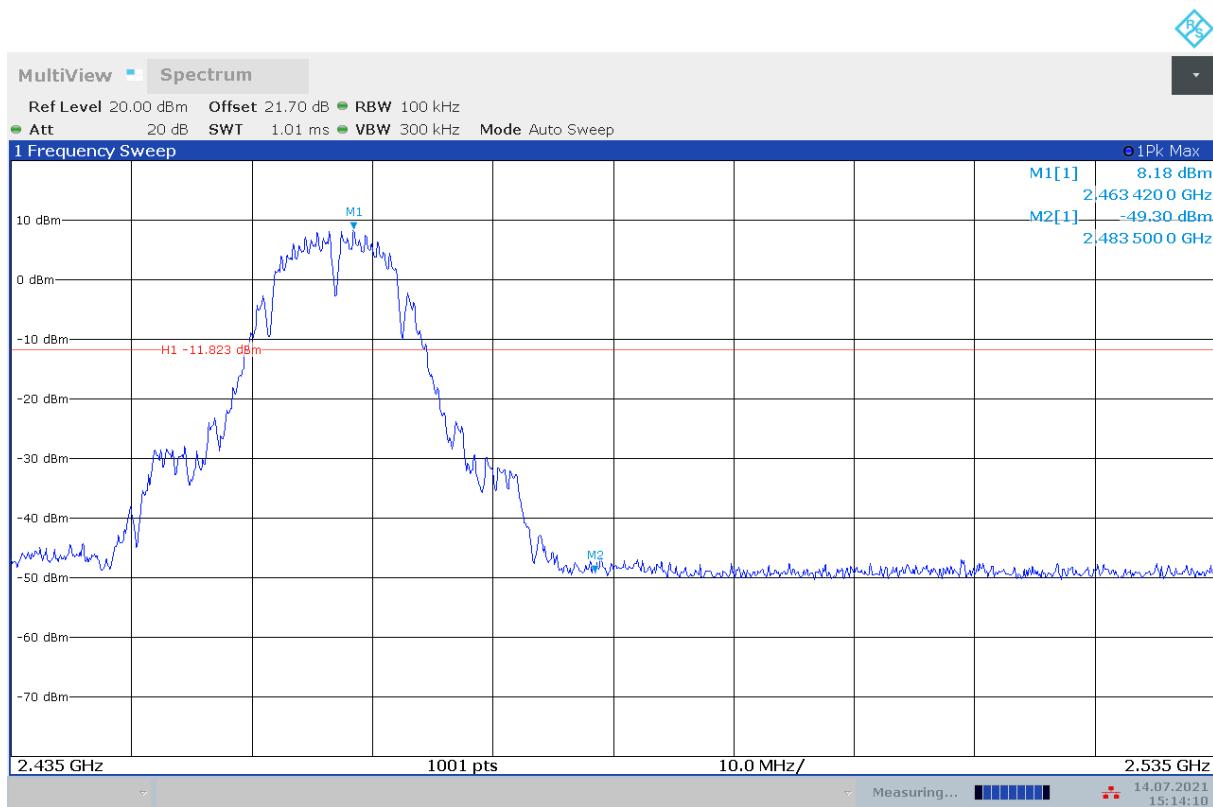


**Fig.A.5.2 Band Edges (802.11b, Ch 11)**

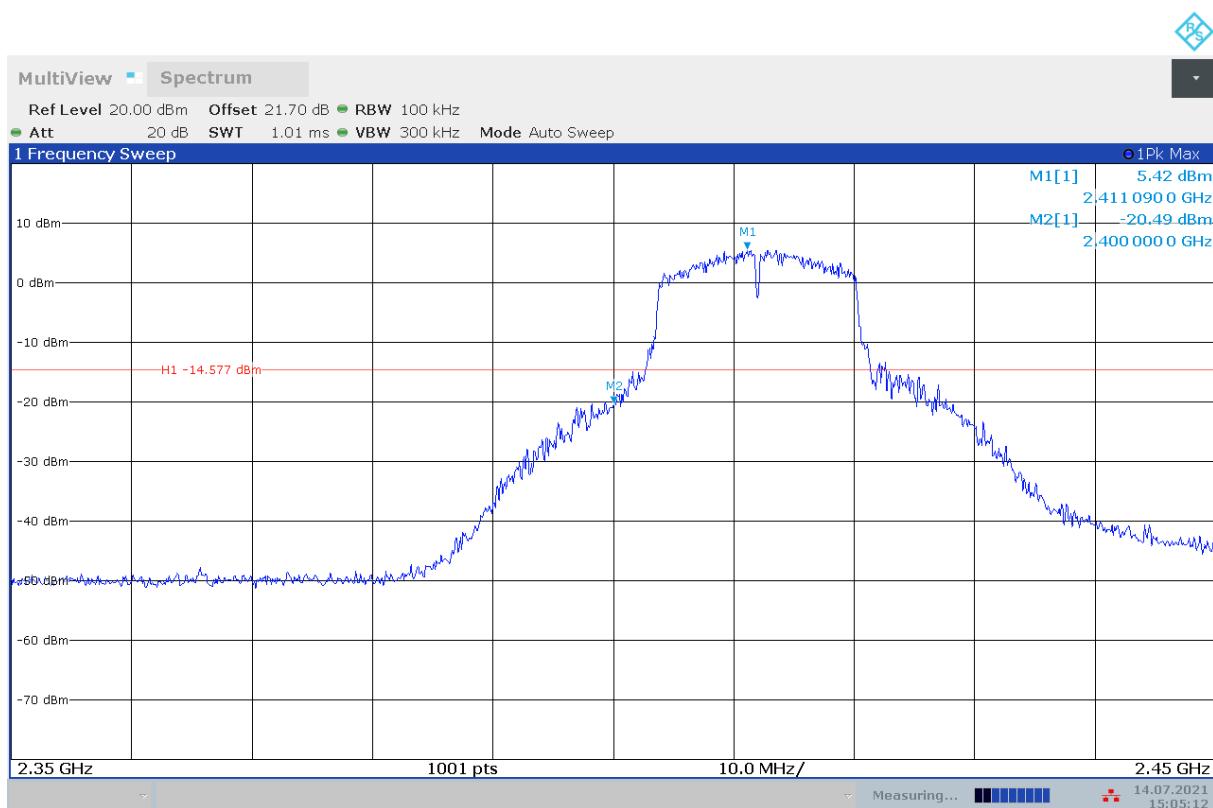

**Fig.A.5.3 Band Edges (802.11g, Ch 1)**

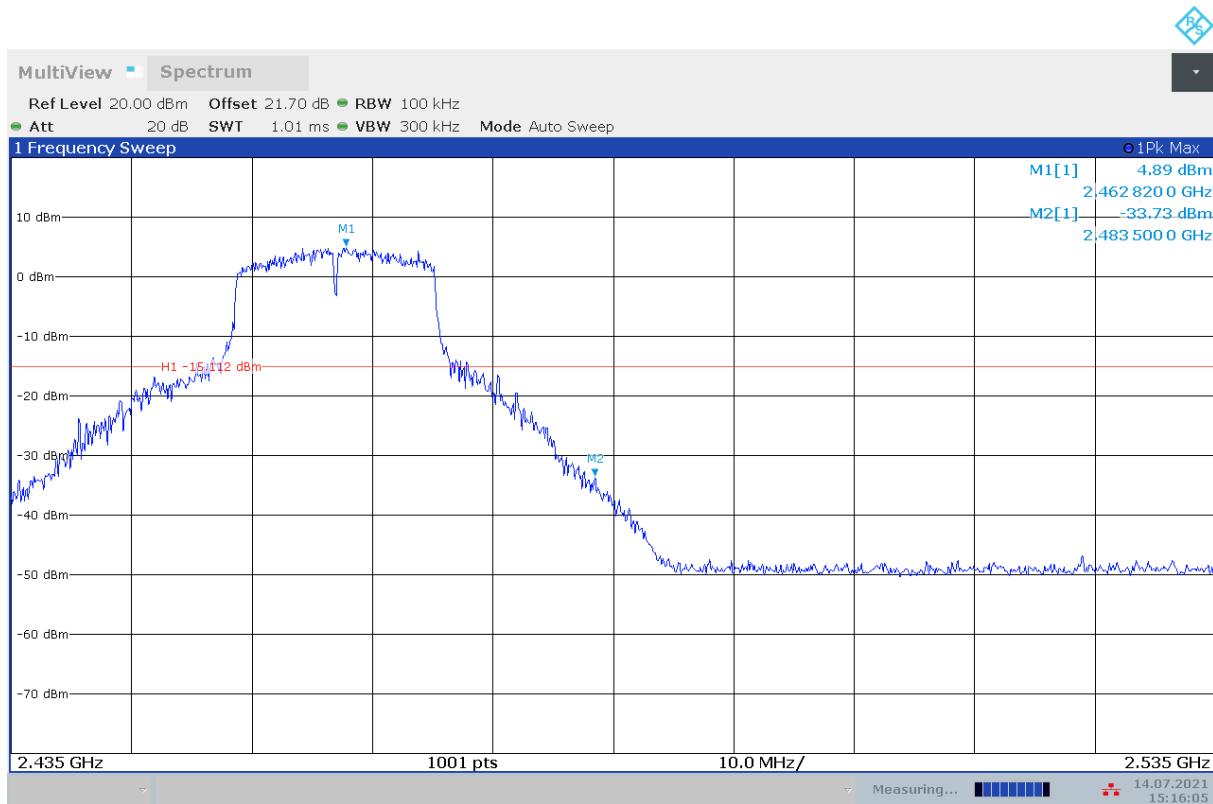

**Fig.A.5.4 Band Edges (802.11g, Ch 11)**

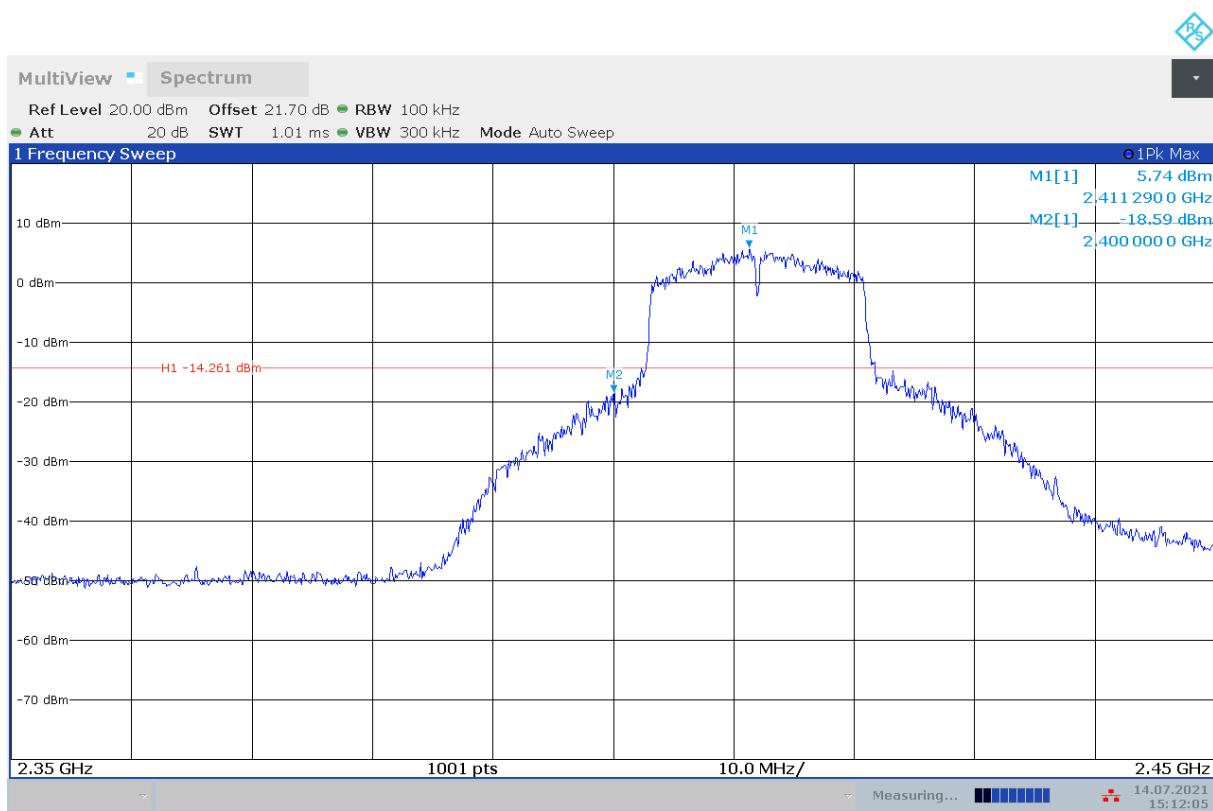

**Fig.A.5.5 Band Edges (802.11n-HT20, Ch 1)**



**Fig.A.5.6 Band Edges (802.11n-HT20, Ch 11)**

## A.6. Transmitter Spurious Emission

### A.6.1 Transmitter Spurious Emission – Conducted

**Method of Measurement: See ANSI C63.10-2013-clause 11.11**

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency
- b) Set the span to  $\geq 1.5$  times the DTS bandwidth
- c) Set the RBW= 100 kHz
- d) Set the VBW= 300 kHz
- e) Detector = Peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize

- i) Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW = 300 kHz.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.

- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

#### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth


**EUT ID: EUT1**

#### Measurement Results:


<b>MODE</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11b	1	2.412 GHz	Fig.A.6.1.1	P
		30 MHz ~ 26 GHz	Fig.A.6.1.2	P
	6	2.437 GHz	Fig.A.6.1.3	P
		30 MHz ~ 26 GHz	Fig.A.6.1.4	P
	11	2.462 GHz	Fig.A.6.1.5	P
		30 MHz ~ 26 GHz	Fig.A.6.1.6	P
<b>MODE</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11g	1	2.412 GHz	Fig.A.6.1.7	P
		30 MHz ~ 26 GHz	Fig.A.6.1.8	P
	6	2.437 GHz	Fig.A.6.1.9	P
		30 MHz ~ 26 GHz	Fig.A.6.1.10	P
	11	2.462 GHz	Fig.A.6.1.11	P
		30 MHz ~ 26 GHz	Fig.A.6.1.12	P
<b>MODE</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11n (HT20)	1	2.412 GHz	Fig.A.6.1.13	P
		30 MHz ~ 26 GHz	Fig.A.6.1.14	P
	6	2.437 GHz	Fig.A.6.1.15	P
		30 MHz ~ 26 GHz	Fig.A.6.1.16	P
	11	2.462 GHz	Fig.A.6.1.17	P
		30 MHz ~ 26 GHz	Fig.A.6.1.18	P

**Conclusion: Pass**


**Test graphs as below:**

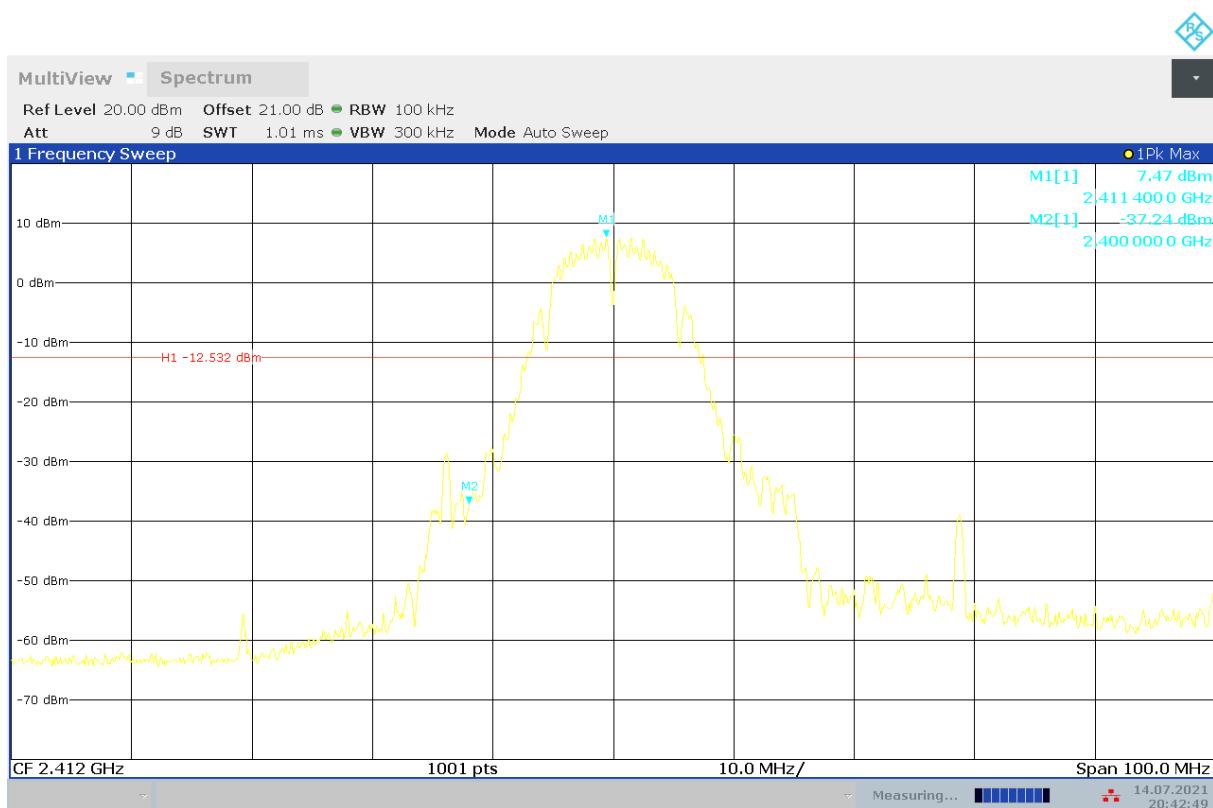


**Fig.A.6.1.1 Transmitter Spurious Emission - Conducted (802.11b, Ch1, Center Frequency)**

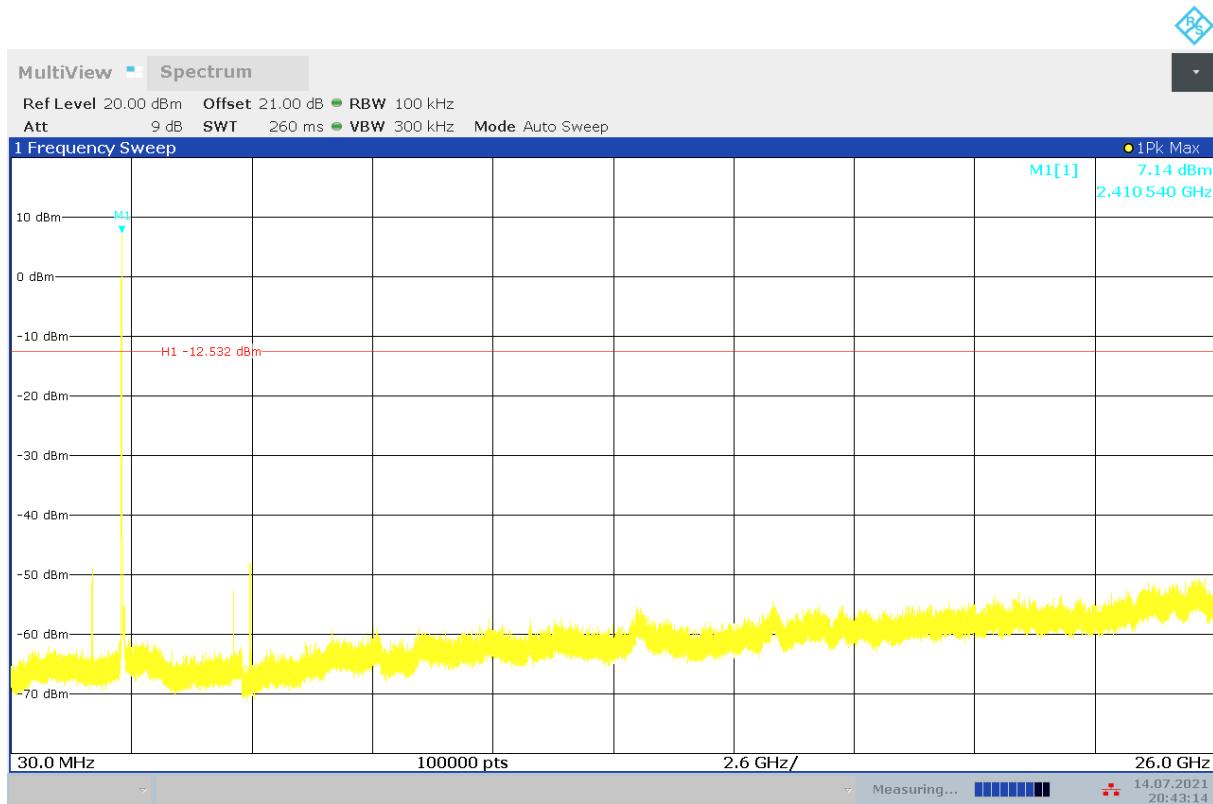


**Fig.A.6.1.2 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 30 MHz-26**

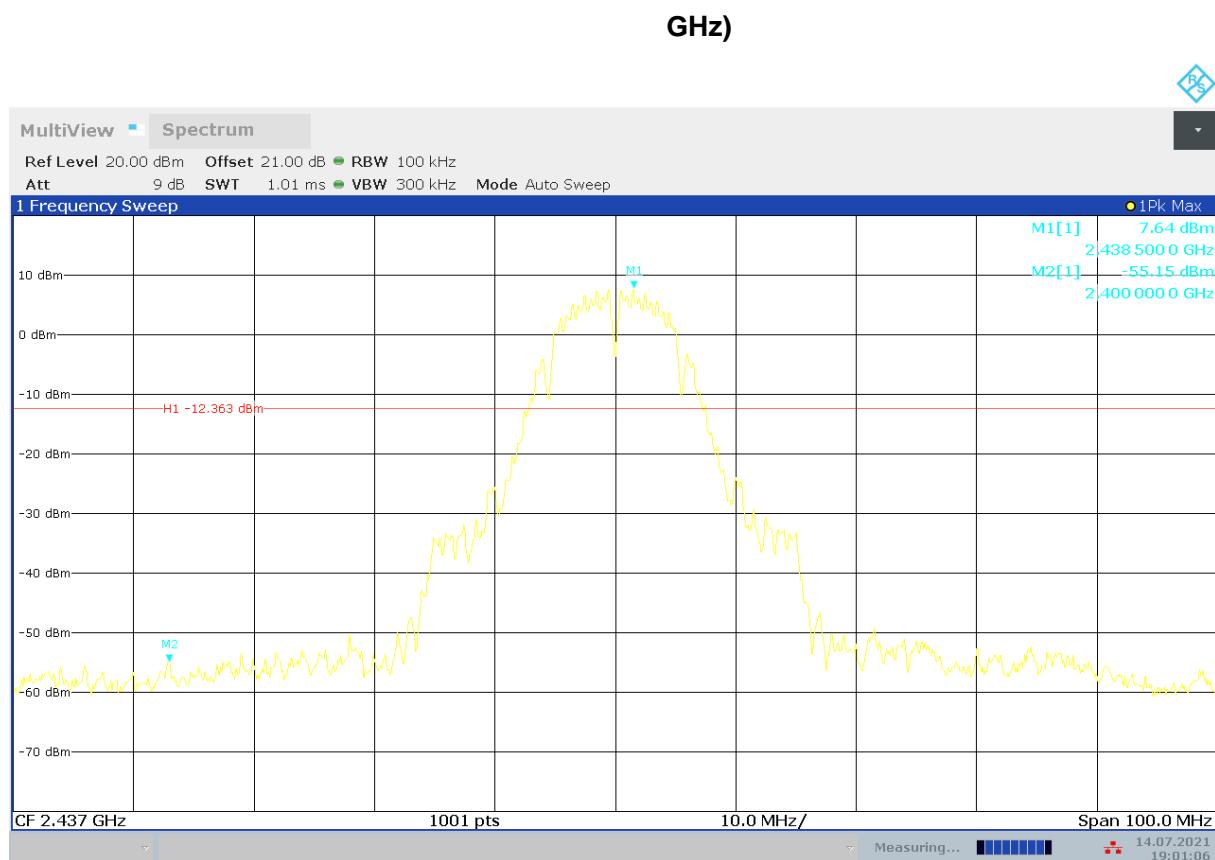


**Fig.A.6.1.3 Transmitter Spurious Emission - Conducted (802.11b, Ch6, Center Frequency)**

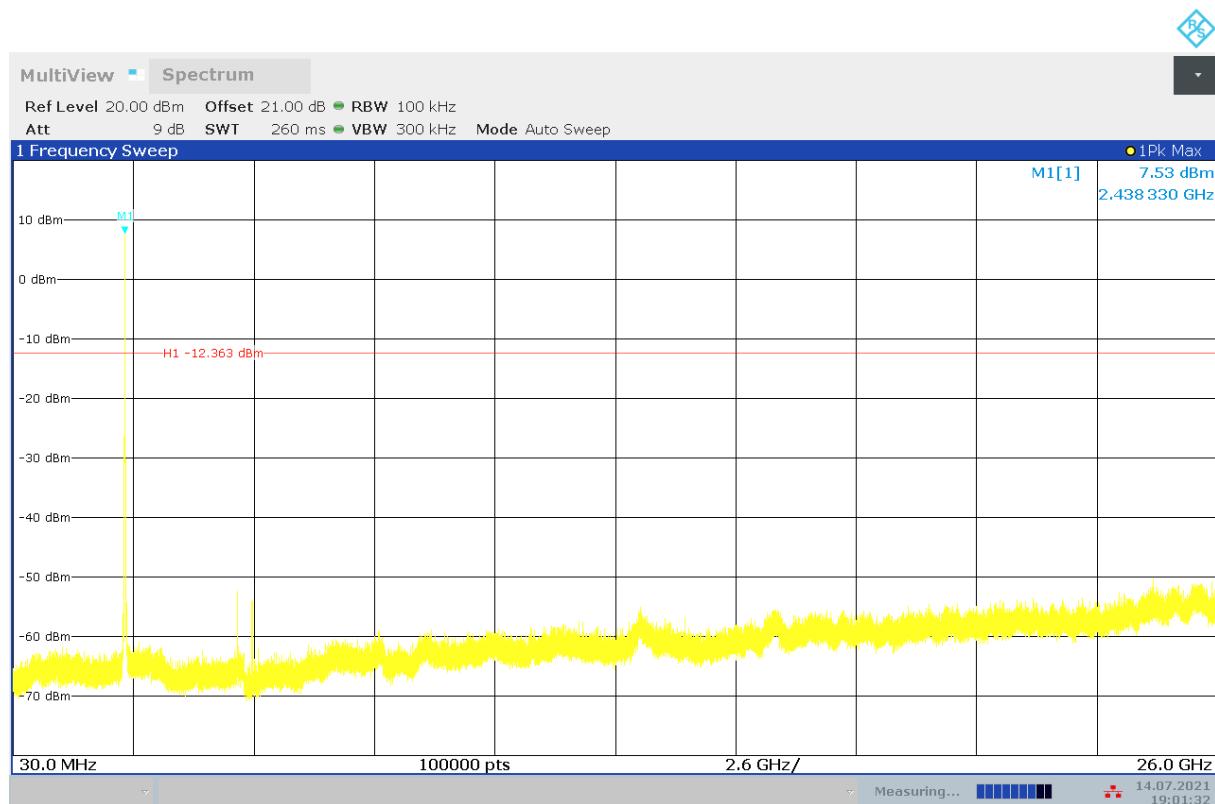


**Fig.A.6.1.4 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 30 MHz-26 GHz)**

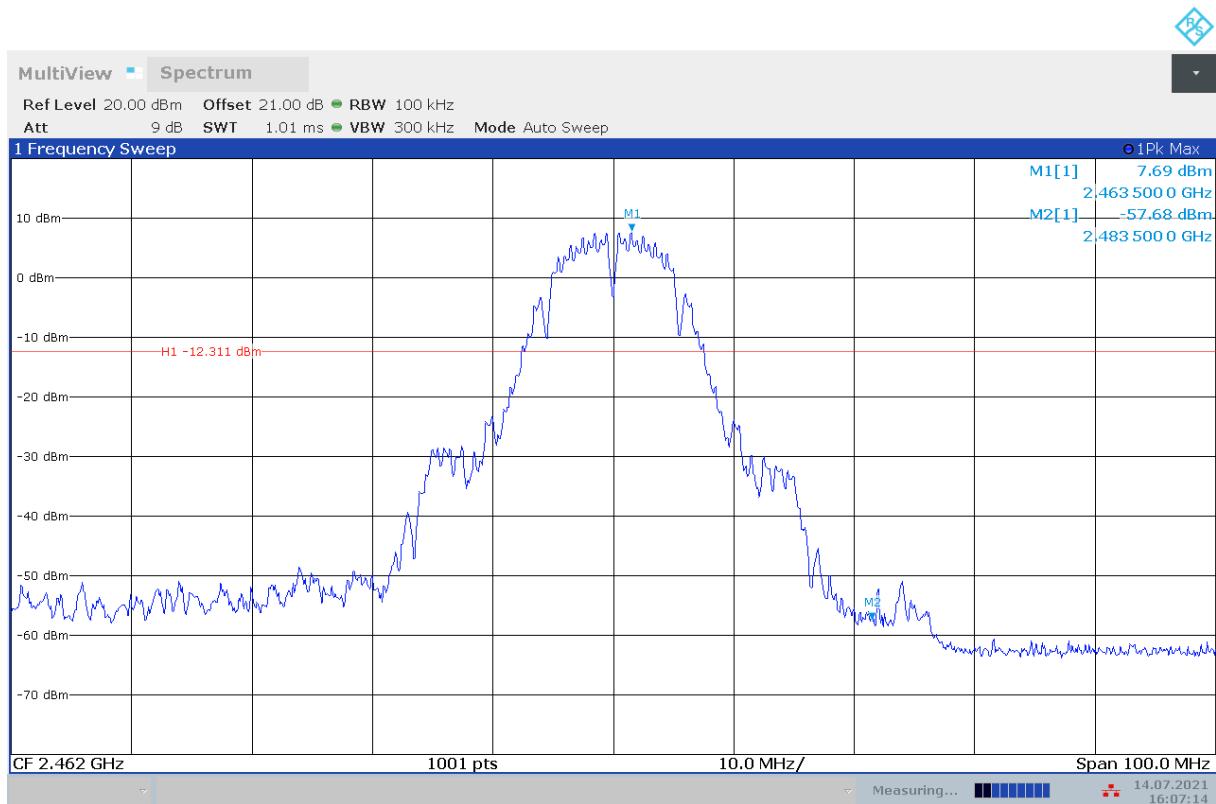


**Fig.A.6.1.5 Transmitter Spurious Emission - Conducted (802.11b, Ch11, Center Frequency)**

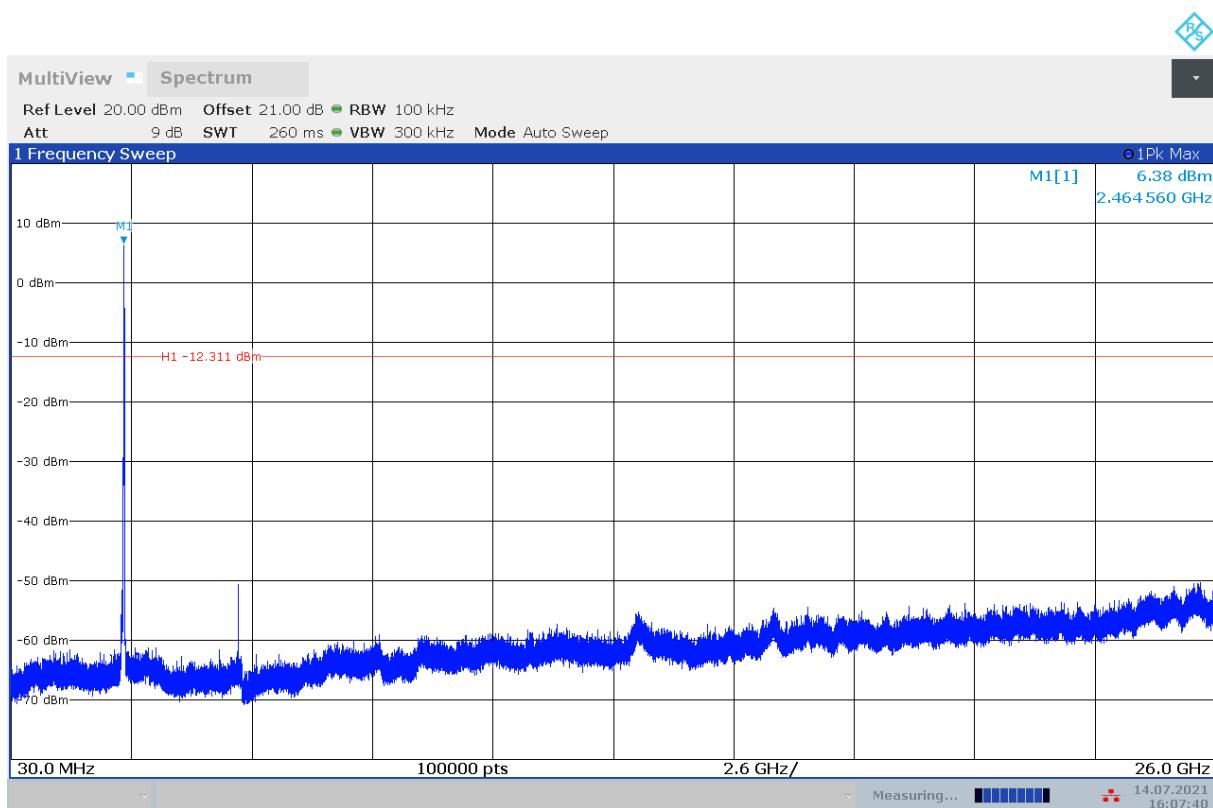


**Fig.A.6.1.6 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 30 MHz-26 GHz)**

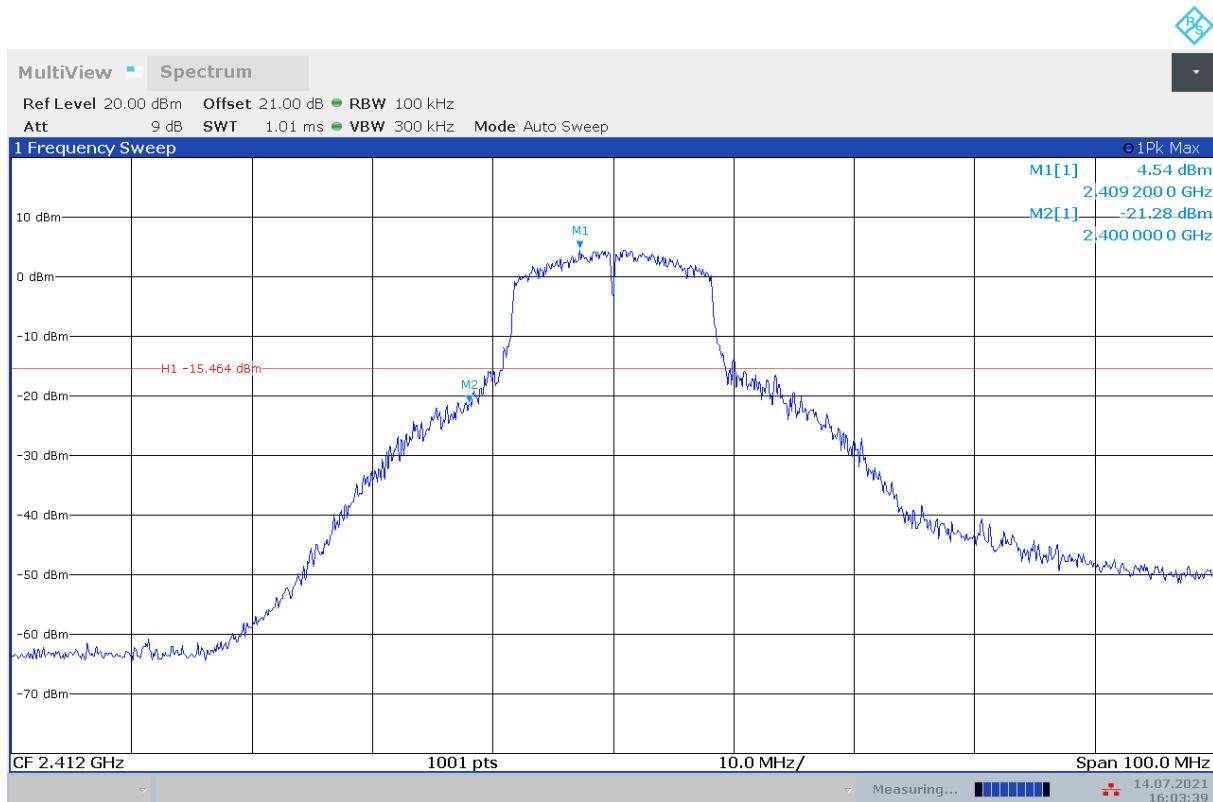


**Fig.A.6.1.7 Transmitter Spurious Emission - Conducted (802.11g, Ch1, Center)**

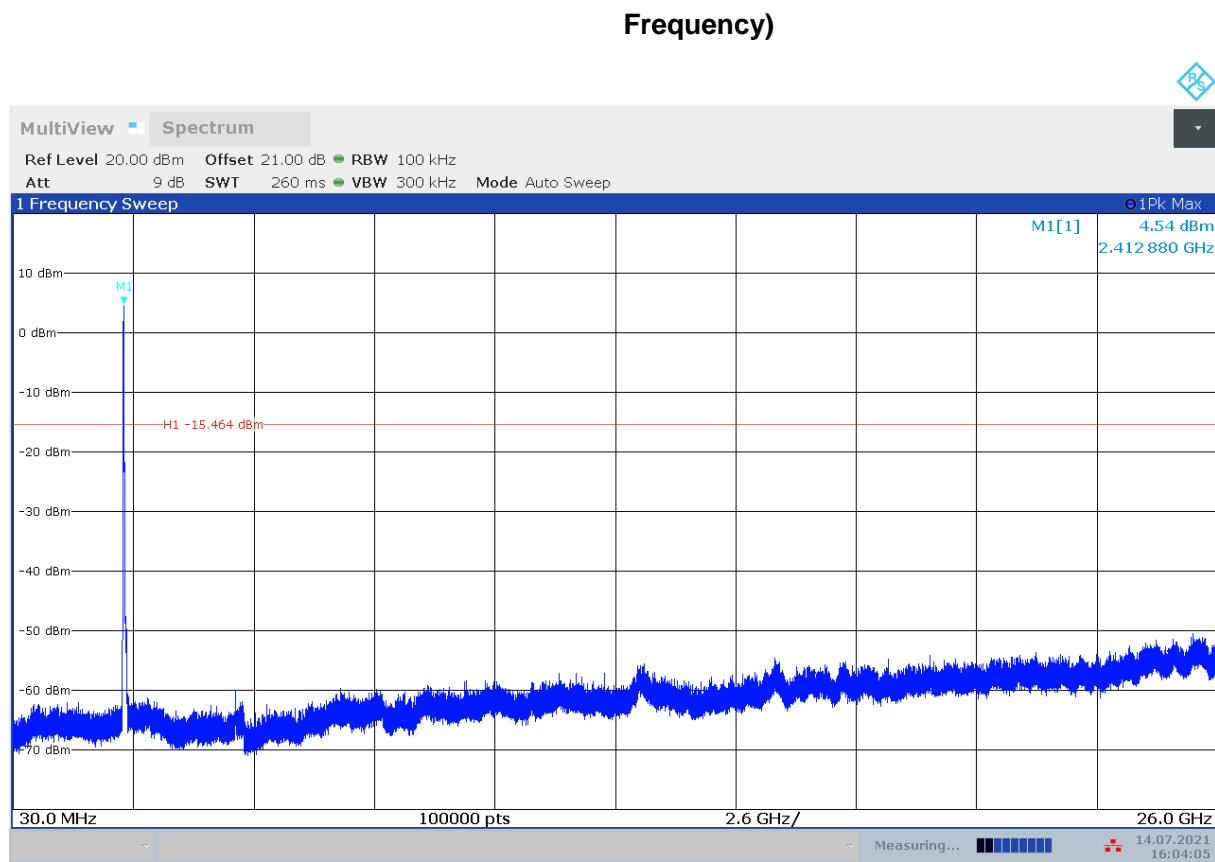


**Fig.A.6.1.8 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 30 MHz-26 GHz)**

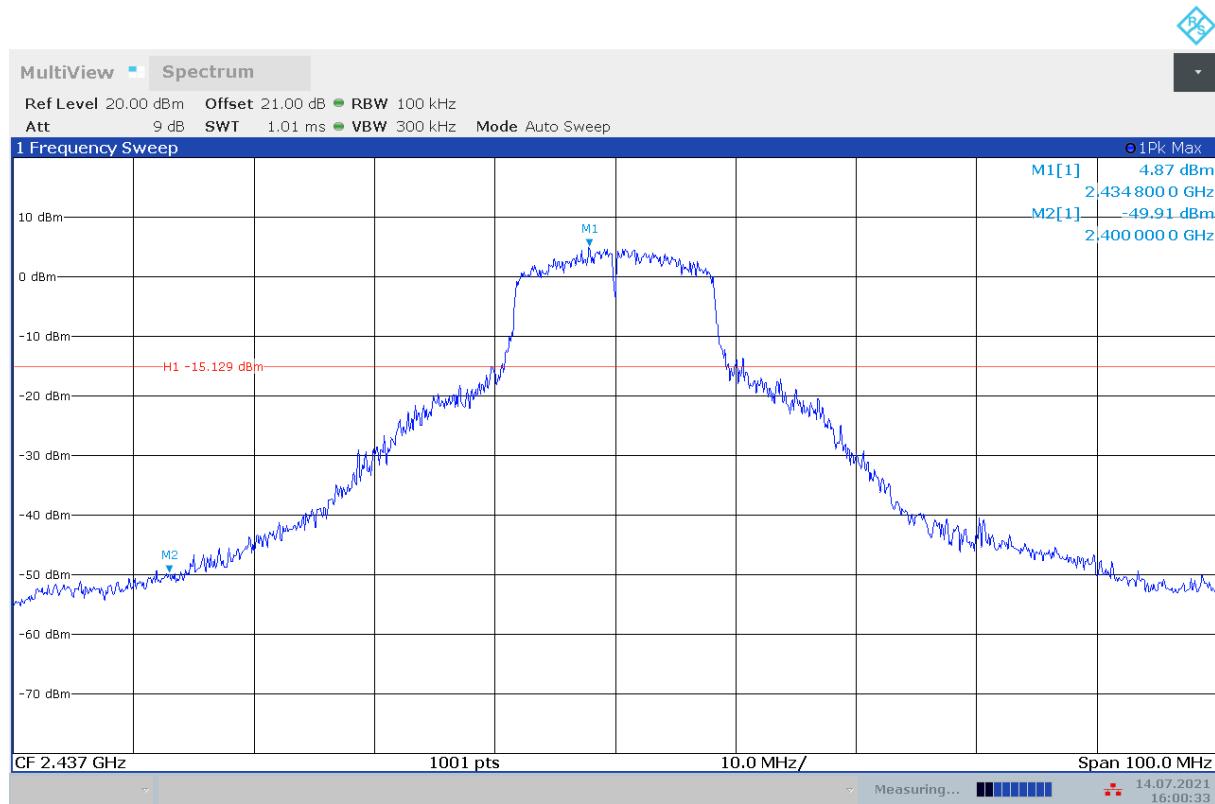


**Fig.A.6.1.9 Transmitter Spurious Emission - Conducted (802.11g, Ch6, Center Frequency)**

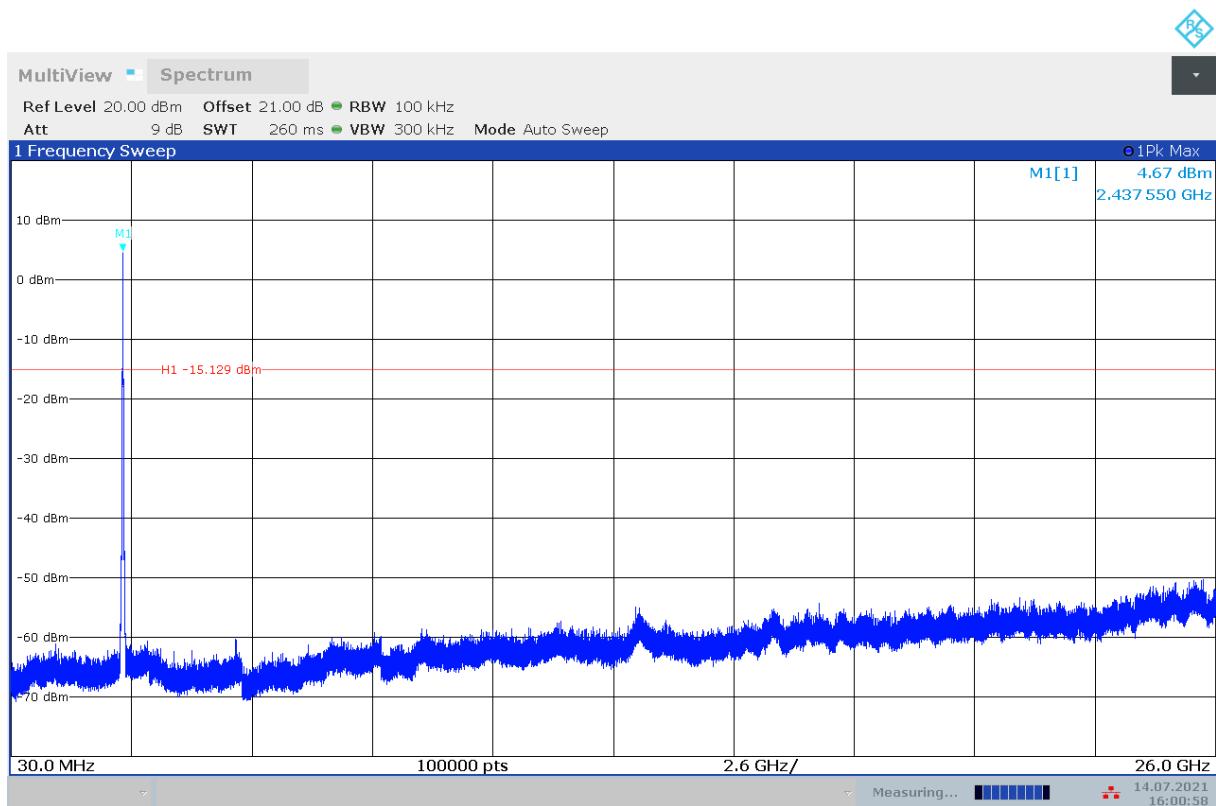


**Fig.A.6.1.10 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 30 MHz-26 GHz)**

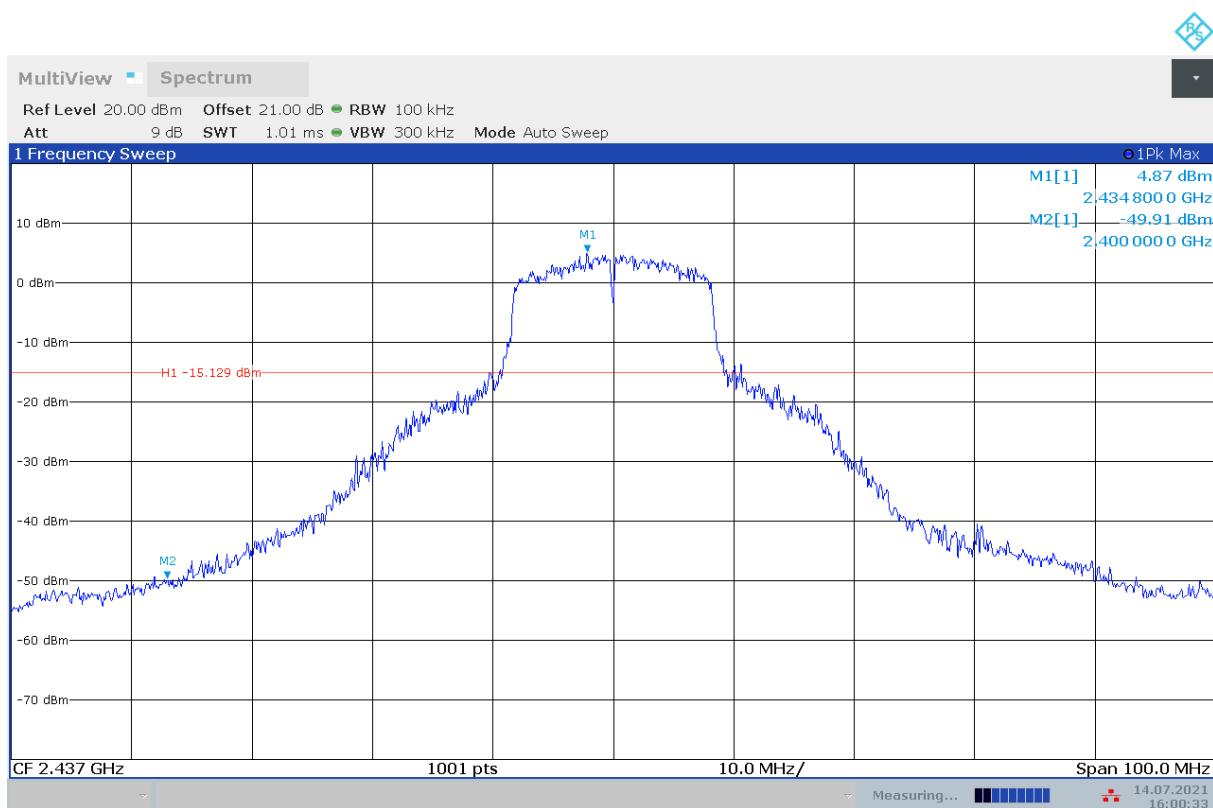


**Fig.A.6.1.11 Transmitter Spurious Emission - Conducted (802.11g, Ch11, Center Frequency)**

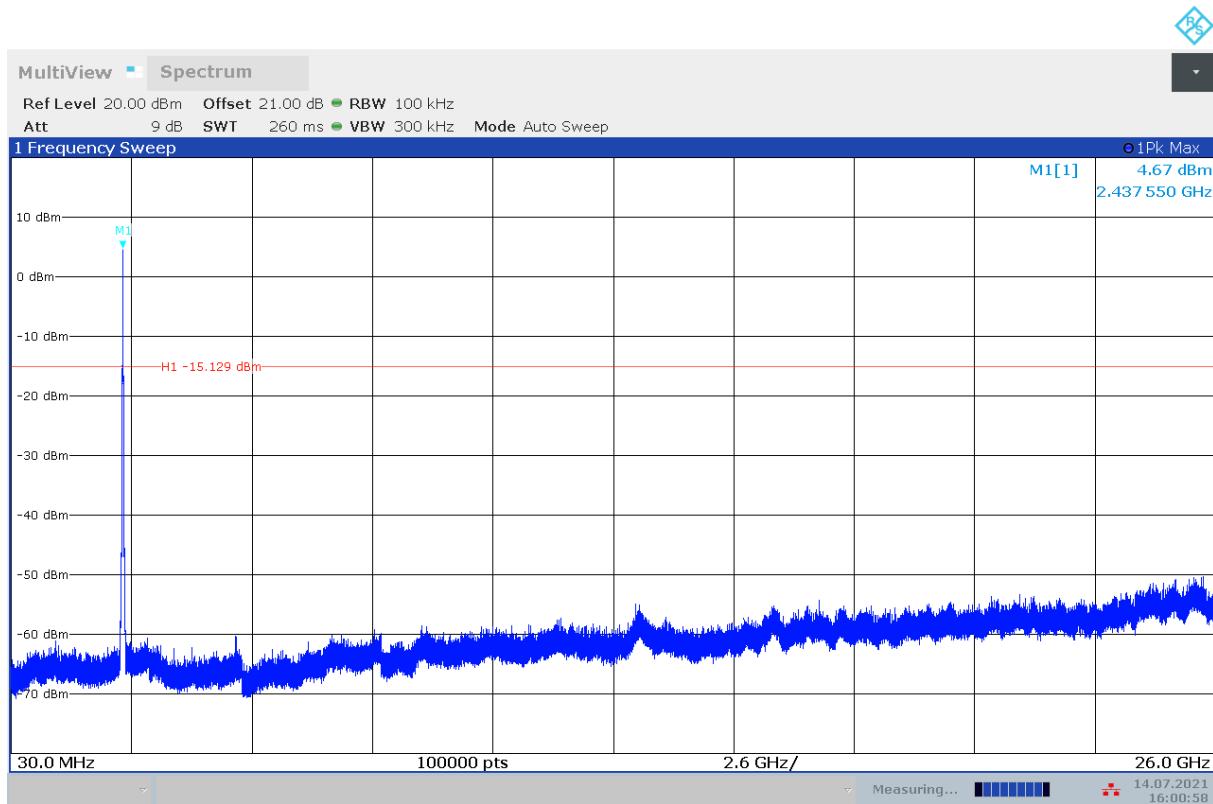


**Fig.A.6.1.12 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 30 MHz-26 GHz)**

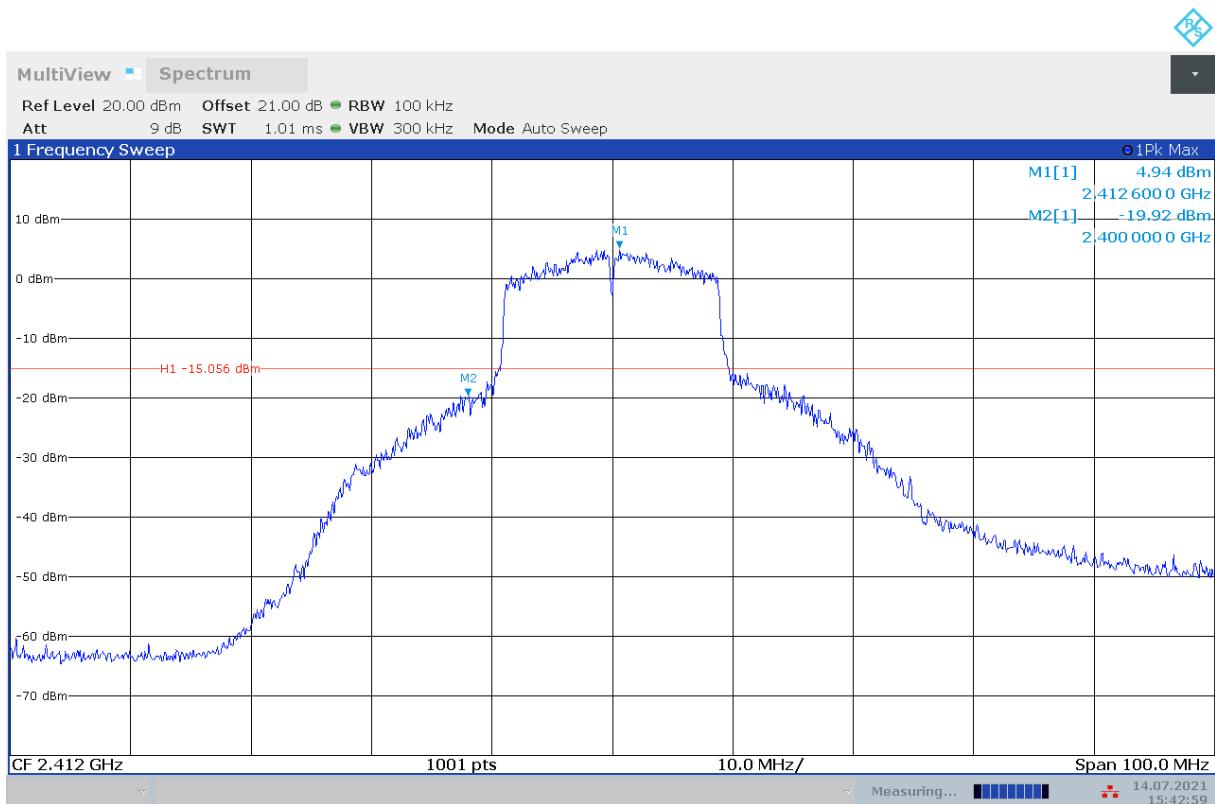


**Fig.A.6.1.13 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, Center Frequency)**

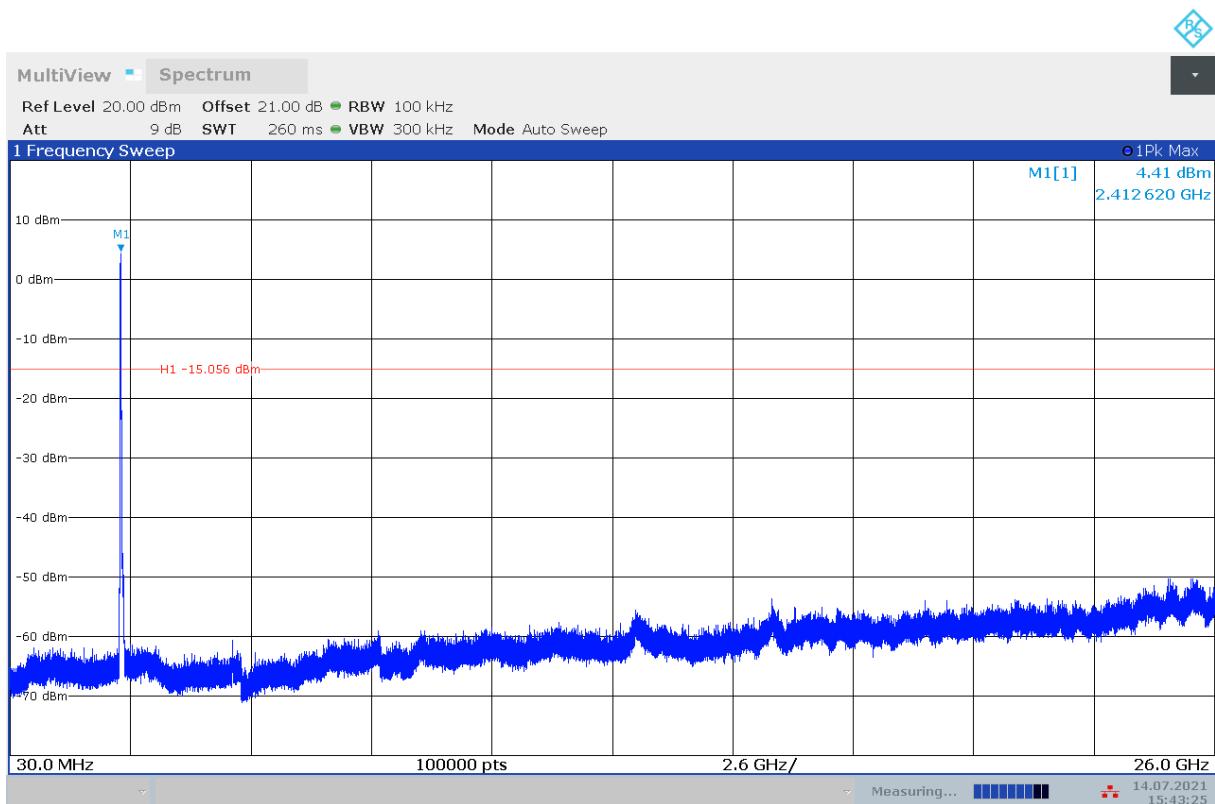


**Fig.A.6.1.14 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 30 MHz-26 GHz)**

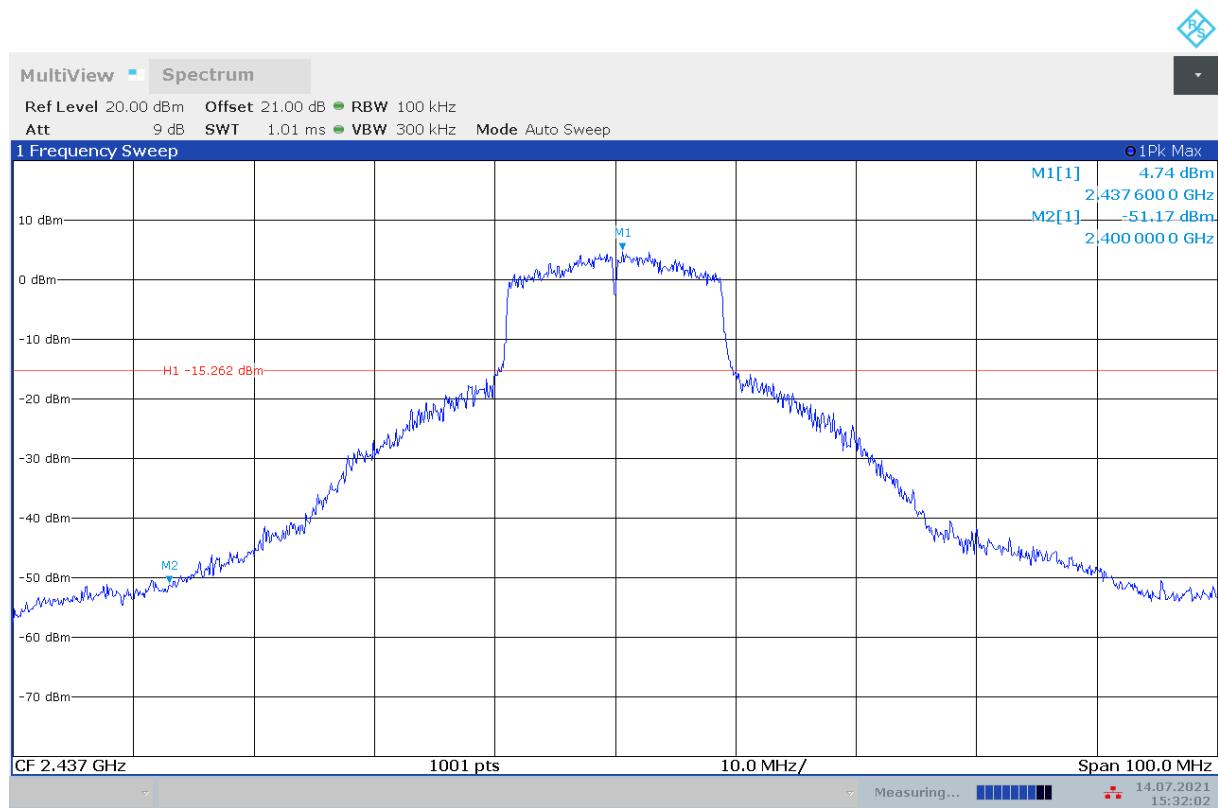


**Fig.A.6.1.15 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, Center Frequency)**

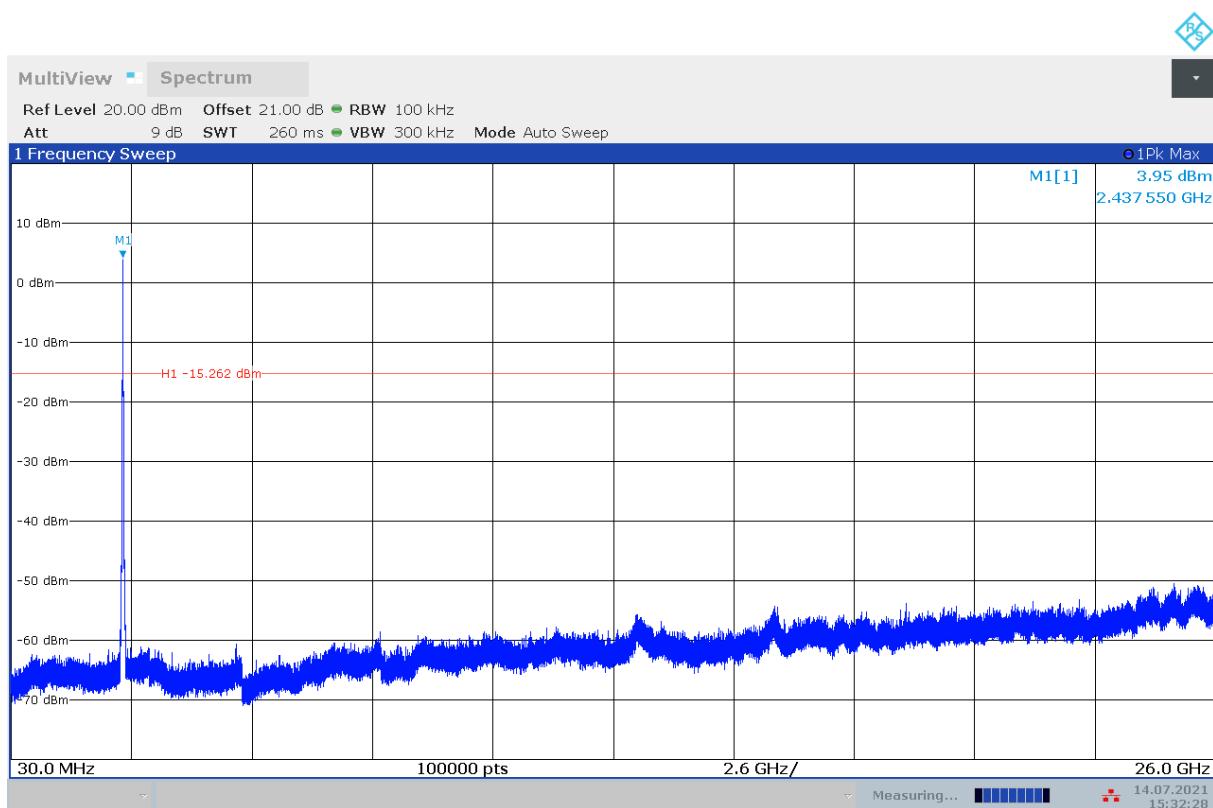

**Fig.A.6.1.16 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 30 MHz-26 GHz)**

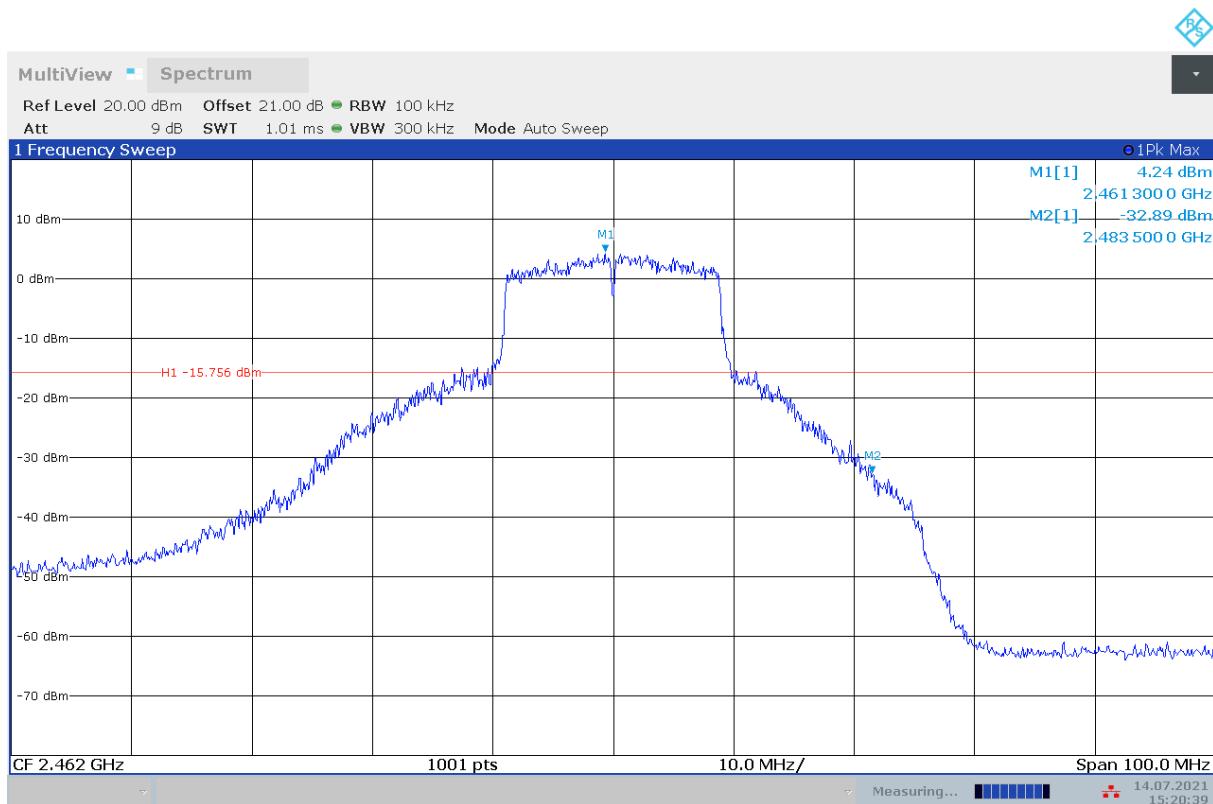

**Fig.A.6.1.17 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, Center Frequency)**

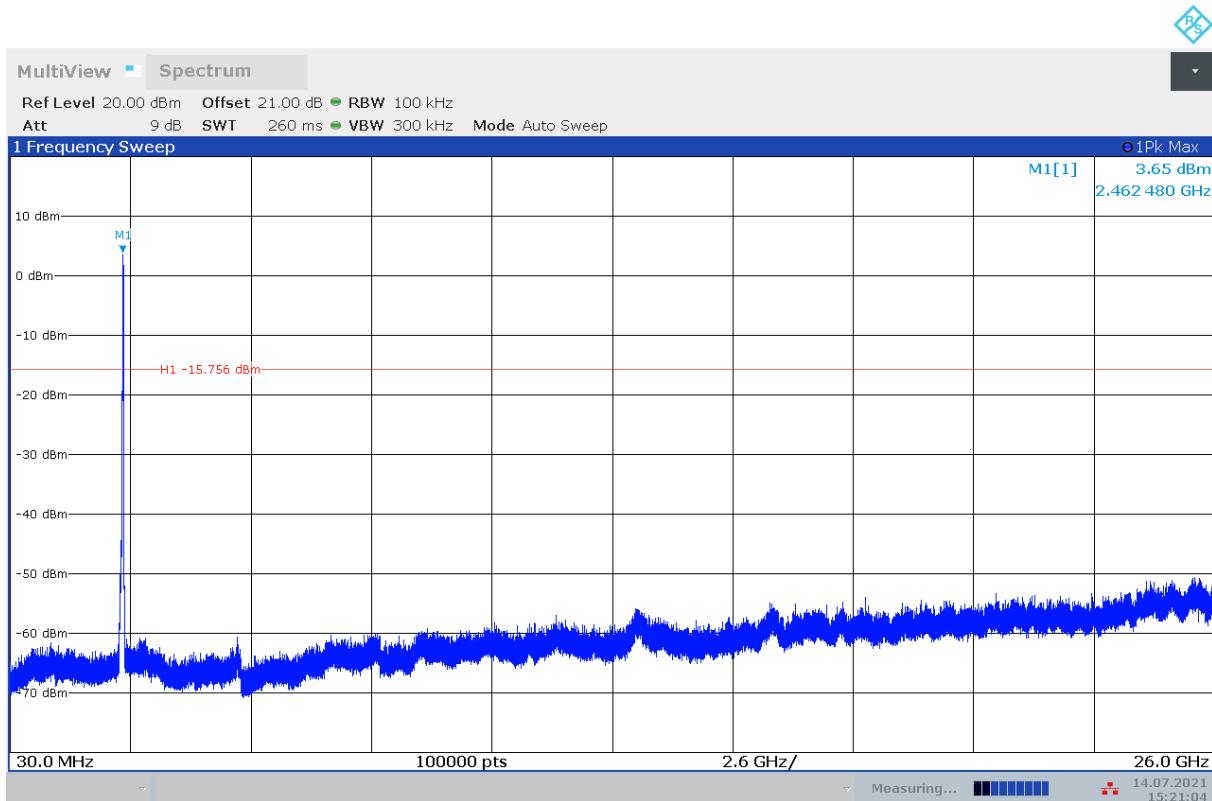

**Fig.A.6.1.18 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 30 MHz-26 GHz)**

## A.6. Transmitter Spurious Emission

### A.6.1 Transmitter Spurious Emission – Conducted

### A.6.2 Transmitter Spurious Emission - Radiated

**Method of Measurement:** See ANSI C63.10-2013-clause 6.4 &6.5 & 6.6

#### **Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

#### **Limit in restricted band:**

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength( $\mu$ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

#### **Test Condition**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

**EUT ID: UT65a**

**Measurement results for Set.1:**
**802.11b mode**

<b>Mode</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11b	1	2.31GHz~2.43GHz---L	Fig.A.6.2.1	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.2	P

**802.11g mode**

<b>Mode</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11g	1	2.31GHz~2.43GHz---L	Fig.A.6.2.3	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.4	P

**802.11n-HT20 mode**

<b>Mode</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11n (HT20)	1	2.31GHz~2.43GHz---L	Fig.A.6.2.5	P
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.6	P

**Conclusion: Pass**
**Note:**

A "reference path loss" is established and the  $A_{RPL}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{RPL} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

**Peak****802.11b**

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17949.500	57.27	-25.50	46.70	36.07	74.00	16.73	V
14682.000	51.92	-28.30	41.30	38.92	74.00	22.08	H
11611.500	47.11	-32.30	38.90	40.51	74.00	26.89	H
8982.500	46.14	-33.30	38.20	41.24	74.00	27.86	H
7452.000	43.91	-35.20	36.70	42.31	74.00	30.09	V
2386.500	57.40	-20.00	28.10	49.40	74.00	16.60	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17927.000	57.39	-25.50	46.70	36.19	74.00	16.61	V
14479.000	51.87	-28.60	42.50	37.97	74.00	22.13	V
12696.000	47.44	-30.50	39.10	38.84	74.00	26.56	V
8970.500	46.03	-33.30	38.20	41.13	74.00	27.97	H
7393.500	44.11	-35.20	36.70	42.51	74.00	29.89	H
4093.000	40.67	-38.00	32.50	46.17	74.00	33.33	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17983.000	57.06	-25.50	46.70	35.86	74.00	16.94	H
14475.500	51.94	-28.60	42.50	38.04	74.00	22.06	V
12340.500	47.67	-31.10	38.90	39.87	74.00	26.33	H
8873.000	45.26	-33.50	38.10	40.66	74.00	28.74	H
7981.500	44.17	-34.80	37.10	41.87	74.00	29.83	H
2485.100	57.51	-20.00	28.30	49.21	74.00	16.49	H

**802.11g**

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17988.000	57.34	-25.50	46.70	36.14	74.00	16.66	V
14199.000	51.90	-29.00	42.00	38.90	74.00	22.10	H
12072.500	46.90	-31.60	39.00	39.50	74.00	27.10	H
9060.500	45.28	-33.80	38.10	40.88	74.00	28.72	H
7978.500	43.71	-34.80	37.10	41.41	74.00	30.29	V
2389.900	65.87	-20.00	28.10	57.87	74.00	8.13	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17944.000	56.75	-25.50	46.70	35.55	74.00	17.25	V
14501.000	51.71	-28.60	42.50	37.81	74.00	22.29	H
12082.500	47.56	-31.60	39.00	40.16	74.00	26.44	V
9921.000	45.34	-33.50	38.10	40.74	74.00	28.66	H
7450.000	44.04	-35.20	36.70	42.44	74.00	29.96	H
4818.000	39.59	-37.50	33.10	43.89	74.00	34.41	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17942.500	57.47	-25.50	46.70	36.27	74.00	16.53	H
14258.500	51.94	-28.40	42.30	38.04	74.00	22.06	H
12660.000	47.06	-30.50	39.10	38.46	74.00	26.94	H
8869.000	45.30	-33.50	38.10	40.70	74.00	28.70	H
7608.000	43.84	-35.00	36.90	42.04	74.00	30.16	V
2486.700	62.39	-20.00	28.30	54.09	74.00	11.61	H

**802.11n-HT20**

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17955.000	56.84	-25.50	46.70	35.64	74.00	17.16	H
14536.000	51.70	-28.60	42.50	37.80	74.00	22.30	V
12210.500	47.56	-31.40	39.00	39.96	74.00	26.44	H
9190.000	45.45	-33.80	38.10	41.25	74.00	28.55	V
7512.000	43.82	-34.50	36.80	41.52	74.00	30.18	H
2389.800	65.27	-20.00	28.10	57.27	74.00	8.73	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17889.000	56.61	-25.50	46.70	35.41	74.00	17.39	H
14578.000	51.42	-27.30	41.90	36.82	74.00	22.58	V
12625.500	47.21	-31.00	39.00	39.31	74.00	26.79	V
9117.500	44.98	-33.80	38.10	40.78	74.00	29.02	H
7452.000	43.76	-35.20	36.70	42.16	74.00	30.24	H
4832.000	39.81	-37.50	33.10	44.11	74.00	34.19	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17994.000	56.76	-25.50	46.70	35.56	74.00	17.24	H
14456.500	52.48	-28.60	42.50	38.58	74.00	21.52	H
11386.000	47.19	-32.40	38.80	40.79	74.00	26.81	V
9719.000	45.38	-33.00	38.00	40.38	74.00	28.62	V
7255.000	43.61	-35.00	36.50	42.01	74.00	30.39	V
2485.100	67.93	-20.00	28.30	59.63	74.00	6.07	H

**Average****802.11b**

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17984.000	45.71	-25.50	46.70	24.51	54.00	8.29	H
14386.500	40.07	-28.40	42.30	26.17	54.00	13.93	V
12447.500	35.65	-31.20	38.90	27.95	54.00	18.35	H
9180.000	33.68	-33.80	38.10	29.48	54.00	20.32	V
7968.500	32.29	-34.80	37.10	29.99	54.00	21.71	H
2389.800	45.28	-20.00	28.10	37.28	54.00	8.72	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.500	45.82	-25.50	46.70	24.62	54.00	8.18	H
14383.000	40.29	-28.40	42.30	26.39	54.00	13.71	V
12938.500	35.66	-30.50	39.20	26.96	54.00	18.34	V
9107.500	33.77	-33.80	38.10	29.57	54.00	20.23	H
7989.500	32.16	-34.80	37.10	29.86	54.00	21.84	V
4951.500	28.58	-37.10	33.30	32.38	54.00	25.42	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.500	45.80	-25.50	46.70	24.60	54.00	8.20	H
14501.000	40.20	-28.60	42.50	26.30	54.00	13.80	H
12454.500	35.59	-31.20	38.90	27.89	54.00	18.41	H
8985.500	33.75	-33.30	38.20	28.85	54.00	20.25	V
7943.500	32.50	-34.80	37.10	30.20	54.00	21.50	H
2486.500	45.60	-20.00	28.30	37.30	54.00	8.40	H

**802.11g**

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17997.500	45.80	-25.50	46.70	24.60	54.00	8.20	V
14504.000	40.08	-28.60	42.50	26.18	54.00	13.92	V
12631.500	35.85	-31.00	39.00	27.95	54.00	18.15	V
8875.000	33.63	-33.50	38.10	29.03	54.00	20.37	H
7927.500	32.25	-34.80	37.10	29.95	54.00	21.75	H
2390.000	48.28	-20.00	28.10	40.28	54.00	5.72	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17998.500	45.74	-25.50	46.70	24.54	54.00	8.26	V
14390.500	40.35	-28.40	42.30	26.45	54.00	13.65	H
12649.000	35.58	-30.50	39.10	26.98	54.00	18.42	H
9289.000	33.84	-33.70	38.00	29.54	54.00	20.16	H
7554.000	32.43	-35.00	36.90	30.63	54.00	21.57	H
4403.000	28.34	-37.90	32.40	33.84	54.00	25.66	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17958.500	45.82	-25.50	46.70	24.62	54.00	8.18	V
14426.000	40.06	-28.60	42.50	26.16	54.00	13.94	V
12434.500	35.75	-31.20	38.90	28.05	54.00	18.25	V
9276.000	33.70	-33.70	38.00	29.40	54.00	20.30	H
7975.500	32.46	-34.80	37.10	30.16	54.00	21.54	H
2485.100	47.48	-20.00	28.30	39.18	54.00	6.52	H

**802.11n-HT20**

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17947.500	45.84	-25.50	46.70	24.64	54.00	8.16	V
14496.000	40.21	-28.60	42.50	26.31	54.00	13.79	H
12641.000	35.67	-31.00	39.00	27.77	54.00	18.33	V
8873.500	33.83	-33.50	38.10	29.23	54.00	20.17	V
7982.000	32.21	-34.80	37.10	29.91	54.00	21.79	V
2389.800	48.95	-20.00	28.10	40.95	54.00	5.05	H


Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17992.500	45.71	-25.50	46.70	24.51	54.00	8.29	H
14363.500	40.18	-28.40	42.30	26.28	54.00	13.82	H
12634.500	35.51	-31.00	39.00	27.61	54.00	18.49	H
8994.000	33.57	-33.30	38.20	28.67	54.00	20.43	H
7901.000	32.34	-34.90	37.10	30.14	54.00	21.66	V
5000.000	28.20	-36.60	33.40	31.40	54.00	25.80	V


Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17993.500	46.02	-25.50	46.70	24.82	54.00	7.98	H
14415.000	40.23	-28.60	42.50	26.33	54.00	13.77	H
12663.500	35.80	-30.50	39.10	27.20	54.00	18.20	V
9532.000	33.93	-33.20	37.90	29.23	54.00	20.07	H
7890.500	32.34	-34.90	37.10	30.14	54.00	21.66	H
2485.200	49.26	-20.00	28.30	40.96	54.00	4.74	H


**Test graphs as below:**

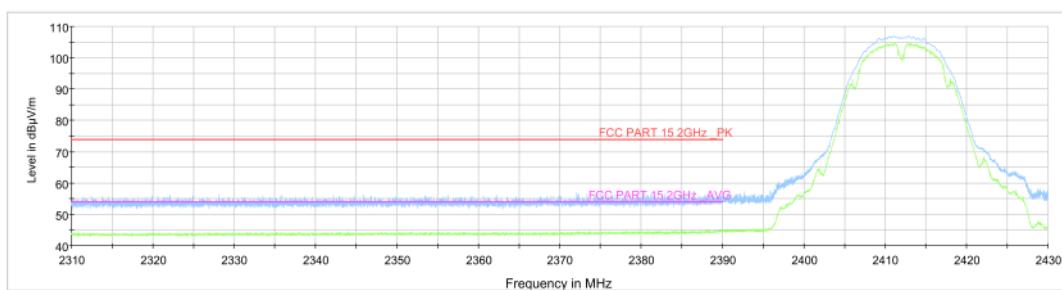


**Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz - 2.45GHz**

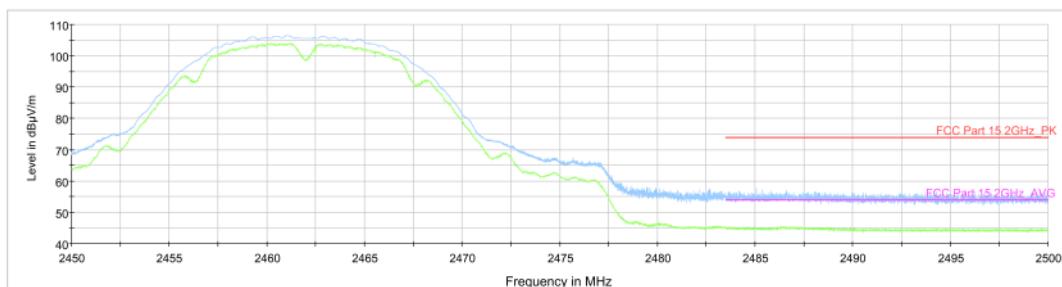


**Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz**

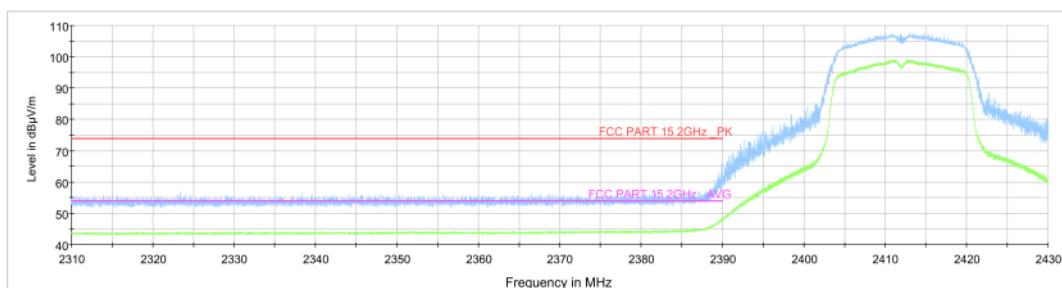


**Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.45GHz**

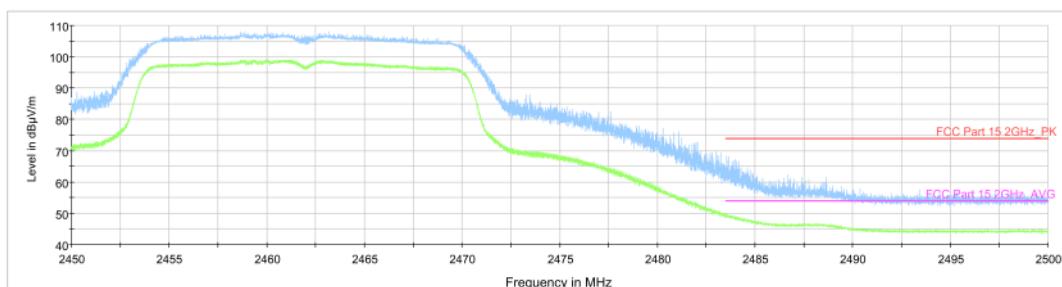

**Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz**

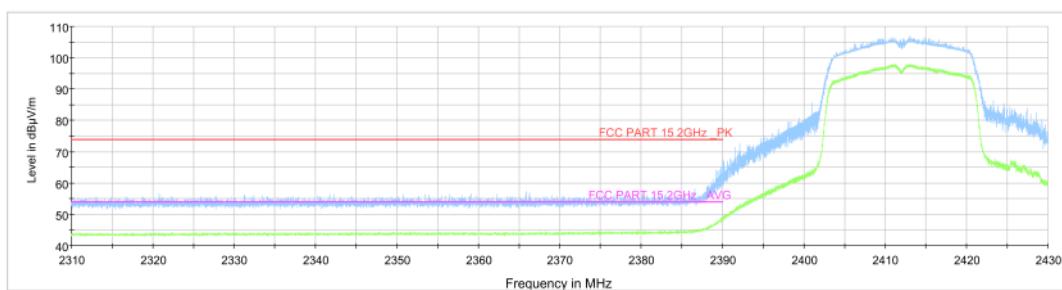

**Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.45GHz**

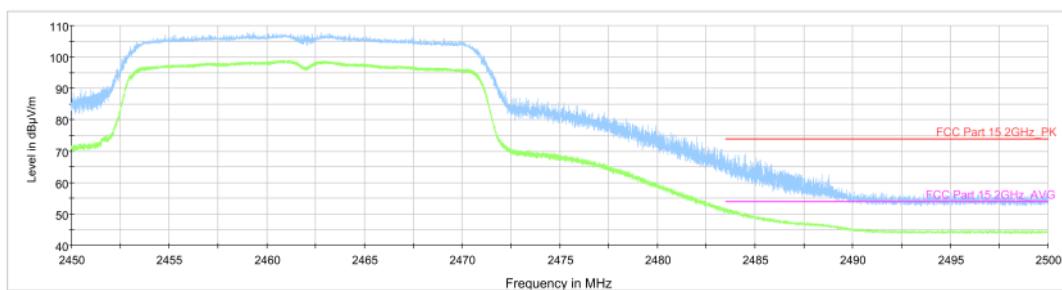

**Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz**

## **A.7. AC Power-line Conducted Emission**

**Method of Measurement: See ANSI C63.10-2013-clause 6.2**

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

**Test Condition:**

<b>Voltage (V)</b>	<b>Frequency (Hz)</b>
120	60

**Measurement Result and limit:**

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion	
		With charger			
		802.11b	Idle		
0.15 to 0.5	66 to 56				
0.5 to 5	56	Fig.A.7.1	Fig.A.7.2	P	
5 to 30	60				


NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion	
		With charger			
		802.11b	Idle		
0.15 to 0.5	56 to 46				
0.5 to 5	46	Fig.A.7.1	Fig.A.7.2	P	
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Conclusion: Pass**
**Test graphs as below:**

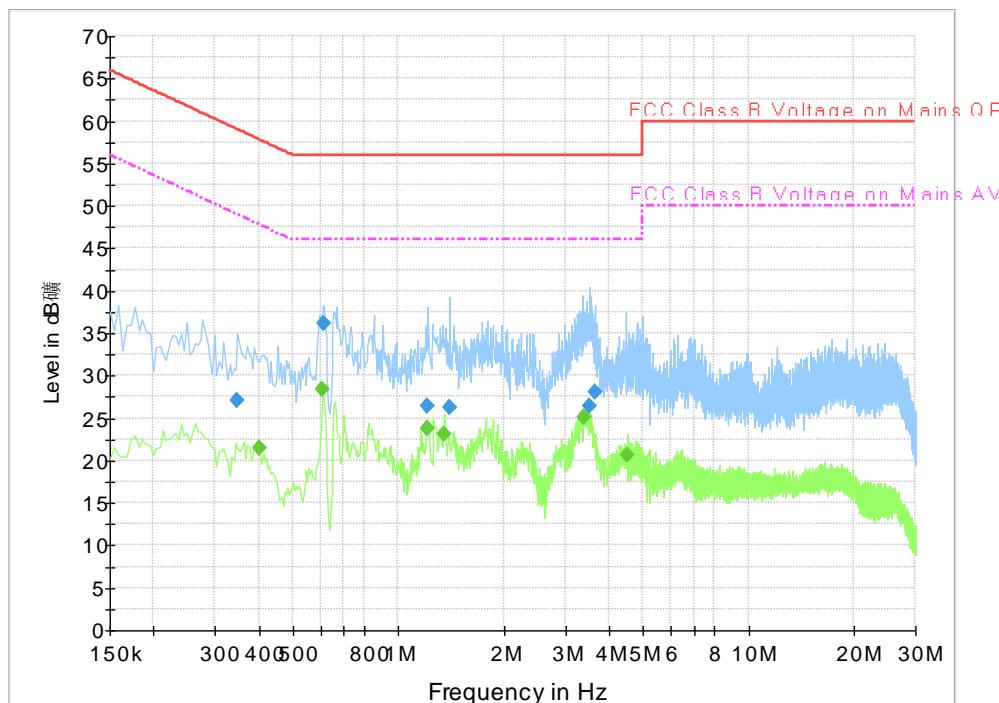**Measurement results for Set.1:**
**Result for Traffic:**

**Fig.A.7.1 AC Powerline Conducted Emission-802.11b**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**


Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.348000	27.1	1000.0	9.000	On	N	19.9	31.9	59.0
0.613500	36.2	1000.0	9.000	On	L1	19.7	19.8	56.0
1.212000	26.5	1000.0	9.000	On	N	19.8	29.5	56.0
1.401000	26.3	1000.0	9.000	On	N	19.8	29.7	56.0
3.516000	26.4	1000.0	9.000	On	N	19.7	29.6	56.0
3.637500	28.1	1000.0	9.000	On	L1	19.5	27.9	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.402000	21.4	1000.0	9.000	On	L1	19.9	26.4	47.8
0.609000	28.4	1000.0	9.000	On	L1	19.7	17.6	46.0
1.207500	23.8	1000.0	9.000	On	L1	19.5	22.2	46.0
1.356000	23.0	1000.0	9.000	On	L1	19.5	23.0	46.0
3.381000	25.1	1000.0	9.000	On	L1	19.5	20.9	46.0
4.497000	20.6	1000.0	9.000	On	L1	19.6	25.4	46.0

### Measurement results for Set.1:

#### Result for Idle:

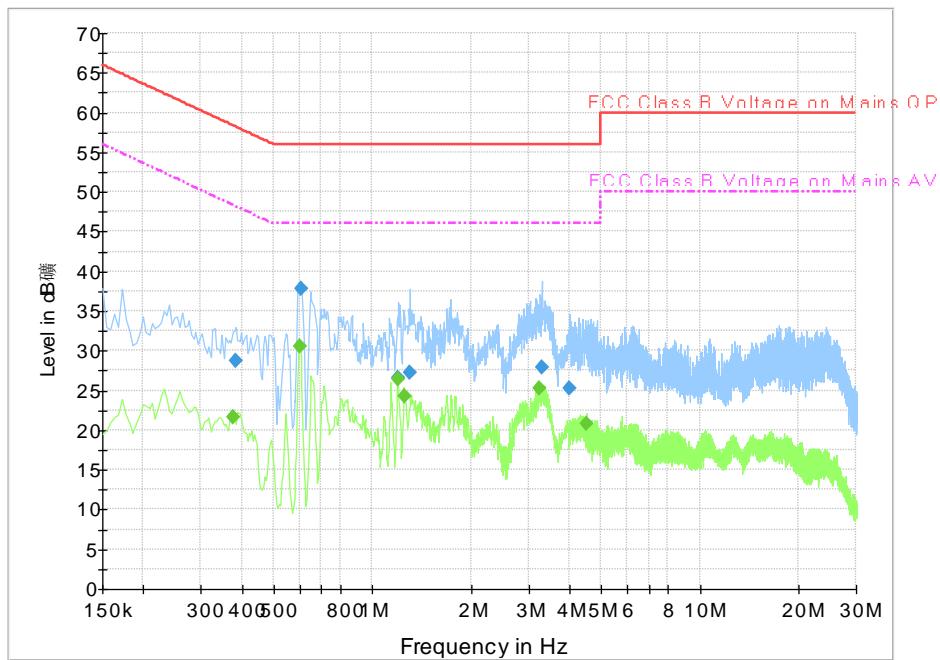

**Fig.A.7.2 AC Powerline Conducted Emission-Idle**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.384000	28.7	1000.0	9.000	On	L1	19.9	29.5	58.2
0.604500	37.8	1000.0	9.000	On	L1	19.8	18.2	56.0
1.203000	26.6	1000.0	9.000	On	N	19.8	29.4	56.0
1.302000	27.2	1000.0	9.000	On	N	19.8	28.8	56.0
3.286500	27.9	1000.0	9.000	On	N	19.7	28.1	56.0
4.020000	25.3	1000.0	9.000	On	N	19.7	30.7	56.0

### Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.375000	21.6	1000.0	9.000	On	L1	20.0	26.8	48.4
0.600000	30.6	1000.0	9.000	On	L1	19.8	15.4	46.0
1.194000	26.4	1000.0	9.000	On	L1	19.5	19.6	46.0
1.252500	24.3	1000.0	9.000	On	L1	19.5	21.7	46.0
3.241500	25.3	1000.0	9.000	On	L1	19.5	20.7	46.0
4.519500	20.8	1000.0	9.000	On	L1	19.6	25.2	46.0

**ANNEX B: Accreditation Certificate**

United States Department of Commerce  
National Institute of Standards and Technology

**Certificate of Accreditation to ISO/IEC 17025:2017**

NVLAP LAB CODE: 600118-0

**Telecommunication Technology Labs, CAICT**  
Beijing  
China

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

**Electromagnetic Compatibility & Telecommunications**


*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009).*

2020-09-29 through 2021-09-30

Effective Dates



For the National Voluntary Laboratory Accreditation Program

A handwritten signature in blue ink that reads "Daniel S. Lamm".

**\*\*\*END OF REPORT\*\*\***