



Report No.: SEWM2304000115RG03

Rev.: 01

Page: 1 of 1

# Appendix B

## Detailed Test Results

1. WLAN2.4G
-------------

WLAN2.4G for E-Field Emission
-------------------------------

Test Laboratory: SGS-SAR Lab

**U380AA HAC-RF-WiFi 2.4G 802.11g 1CH****DUT: U380AA; Type: Smart Phone; Serial: 860719060006628**Communication System: UID 10013 - CAA, IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps);  
Frequency: 2412 MHz; Duty Cycle: 1:8.8308Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2022-06-10
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device 6 3/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 48.80 V/m; Power Drift = -0.06 dB

Applied MIF = -3.16 dB

RF audio interference level = 29.35 dBV/m

**Emission category: M4**

MIF scaled E-field


Grid 1 <b>M4</b> <b>25.73 dBV/m</b>	Grid 2 <b>M4</b> <b>26.7 dBV/m</b>	Grid 3 <b>M4</b> <b>26.55 dBV/m</b>
Grid 4 <b>M4</b> <b>27.79 dBV/m</b>	Grid 5 <b>M4</b> <b>28.89 dBV/m</b>	Grid 6 <b>M4</b> <b>28.54 dBV/m</b>
Grid 7 <b>M4</b> <b>27.83 dBV/m</b>	Grid 8 <b>M4</b> <b>29.35 dBV/m</b>	Grid 9 <b>M4</b> <b>28.93 dBV/m</b>

**Cursor:**

Total = 29.35 dBV/m

E Category: M4

Location: -3.5, 22, 7.7 mm

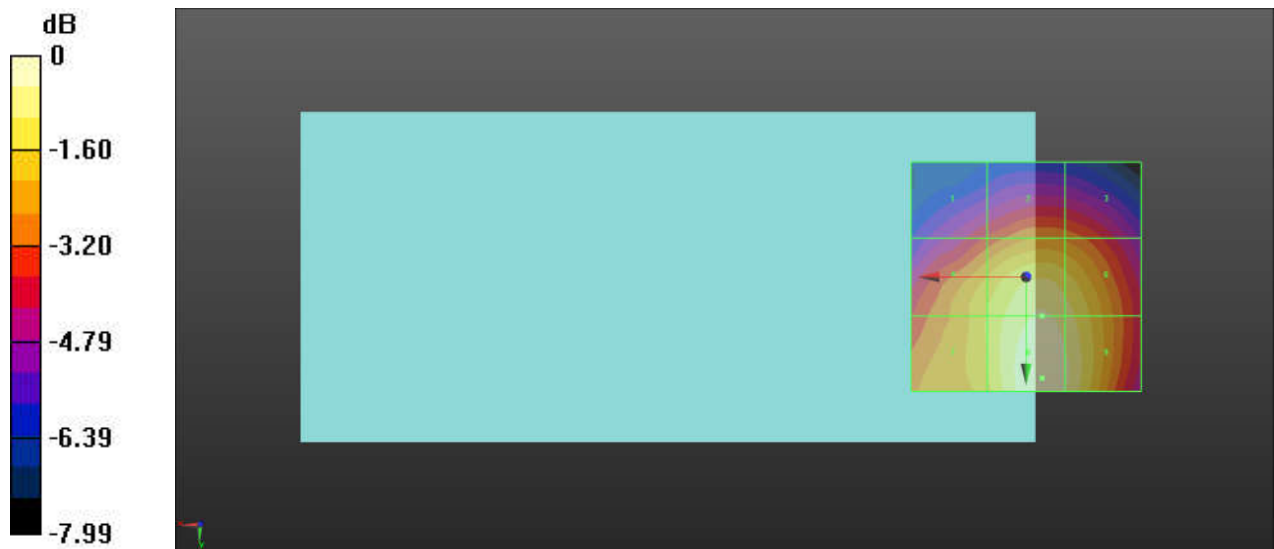

0 dB = 29.33 V/m = 29.35 dBV/m

Test Laboratory: SGS-SAR Lab

## U380AA HAC-RF-WiFi 2.4G 802.11g 6CH

**DUT: U380AA; Type: Smart Phone; Serial: 860719060006628**

Communication System: UID 10013 - CAA, IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps);  
Frequency: 2437 MHz; Duty Cycle: 1:8.8308

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2022-06-10
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device 6 2/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 51.05 V/m; Power Drift = -0.04 dB

Applied MIF = -3.16 dB

RF audio interference level = 29.50 dBV/m

**Emission category: M4**

MIF scaled E-field


Grid 1 <b>M4</b> <b>26.61 dBV/m</b>	Grid 2 <b>M4</b> <b>27.07 dBV/m</b>	Grid 3 <b>M4</b> <b>26.49 dBV/m</b>
Grid 4 <b>M4</b> <b>28.48 dBV/m</b>	Grid 5 <b>M4</b> <b>29.1 dBV/m</b>	Grid 6 <b>M4</b> <b>28.46 dBV/m</b>
Grid 7 <b>M4</b> <b>28.44 dBV/m</b>	Grid 8 <b>M4</b> <b>29.5 dBV/m</b>	Grid 9 <b>M4</b> <b>28.87 dBV/m</b>

**Cursor:**

Total = 29.50 dBV/m

E Category: M4

Location: -1, 20.5, 7.7 mm

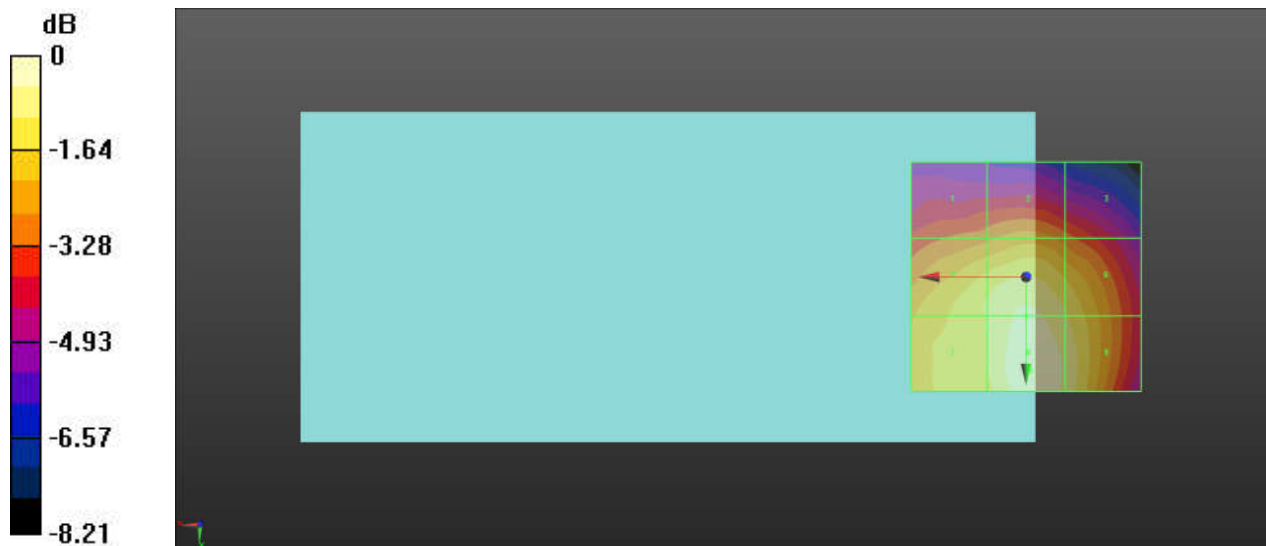

0 dB = 29.84 V/m = 29.50 dBV/m

Test Laboratory: SGS-SAR Lab

**U380AA HAC-RF-WiFi 2.4G 802.11g 11CH****DUT: U380AA; Type: Smart Phone; Serial: 860719060006628**Communication System: UID 10013 - CAA, IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps);  
Frequency: 2462 MHz; Duty Cycle: 1:8.8308Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: RF Section

DASY 5 Configuration:

- Probe: EF3DV3 - SN4051; ConvF(1, 1, 1); Calibrated: 2022-06-10
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

**Device E-Field measurement/E Scan - ER3D: 15 mm from Probe Center to the Device 6 4/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 48.09 V/m; Power Drift = 0.02 dB

Applied MIF = -3.16 dB

RF audio interference level = 29.35 dBV/m

**Emission category: M4**

MIF scaled E-field


Grid 1 <b>M4</b> <b>25.63 dBV/m</b>	Grid 2 <b>M4</b> <b>26.75 dBV/m</b>	Grid 3 <b>M4</b> <b>26.49 dBV/m</b>
Grid 4 <b>M4</b> <b>27.71 dBV/m</b>	Grid 5 <b>M4</b> <b>28.92 dBV/m</b>	Grid 6 <b>M4</b> <b>28.6 dBV/m</b>
Grid 7 <b>M4</b> <b>27.79 dBV/m</b>	Grid 8 <b>M4</b> <b>29.35 dBV/m</b>	Grid 9 <b>M4</b> <b>28.93 dBV/m</b>

**Cursor:**

Total = 29.35 dBV/m

E Category: M4

Location: -3.5, 22, 7.7 mm

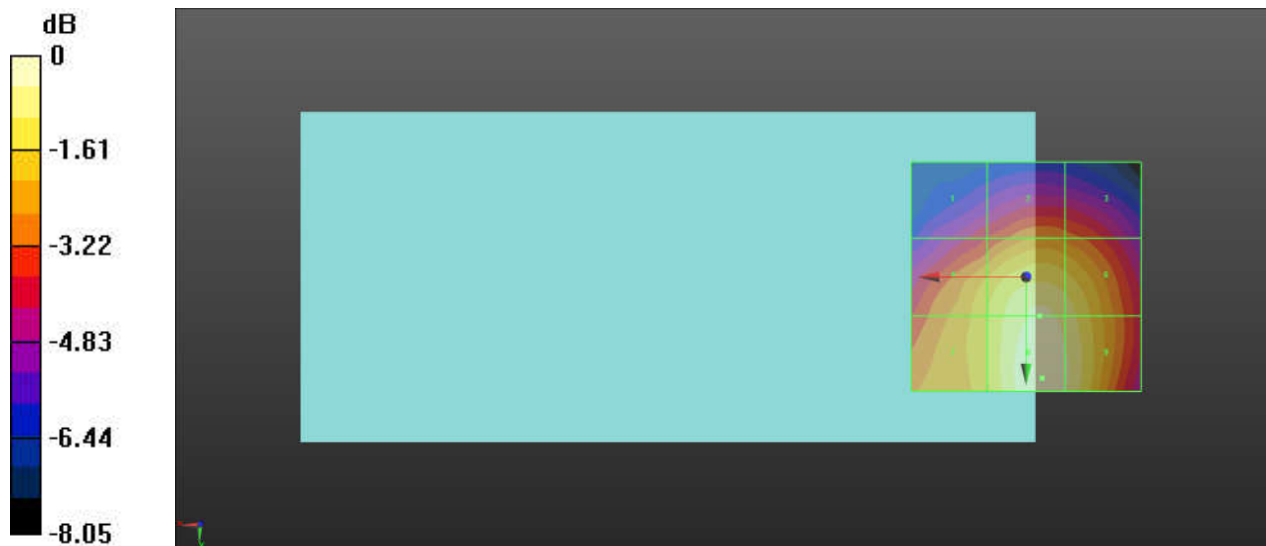

0 dB = 29.34 V/m = 29.35 dBV/m