



# FCC PART 15C TEST REPORT

**BLUETOOTH LOW ENERGY (BLE) PART**

**No. 24T04Z100644-015**

**for**

**Shenzhen Tinnno Mobile Technology Corp.**

**Smart Phone**

**Model Name: U572AA, U572AC**

**FCC ID: XD6U572AA**

**with**

**Hardware Version: 1.0**

**Software Version: U572AAV01.04.10**

**Issued Date: 2024-5-29**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email:[cttl\\_terminals@caict.ac.cn](mailto:cttl_terminals@caict.ac.cn), website: [www.chinattl.com](http://www.chinattl.com)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
24T04Z100644-015	Rev.0	1st edition	2024-5-29

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT.....	6
1.4. PROJECT DATA .....	6
1.5. SIGNATURE .....	6
<b>2. CLIENT INFORMATION.....</b>	<b>7</b>
2.1. APPLICANT INFORMATION .....	7
2.2. MANUFACTURER INFORMATION .....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>8</b>
3.1. ABOUT EUT .....	8
3.2. INTERNAL IDENTIFICATION OF EUT .....	8
3.3. INTERNAL IDENTIFICATION OF AE.....	8
3.4. NORMAL ACCESSORY SETTING.....	8
3.5. GENERAL DESCRIPTION.....	8
<b>4. REFERENCE DOCUMENTS .....</b>	<b>9</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	9
4.2. REFERENCE DOCUMENTS FOR TESTING.....	9
<b>5. TEST RESULTS .....</b>	<b>10</b>
5.1. SUMMARY OF EUT MODE .....	10
5.2. SUMMARY OF TEST RESULTS .....	10
5.3. STATEMENTS.....	10
<b>6. TEST FACILITIES UTILIZED .....</b>	<b>11</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
7.1. PEAK OUTPUT POWER - CONDUCTED.....	12
7.2. FREQUENCY BAND EDGES - CONDUCTED .....	12
7.3. TRANSMITTER SPURIOUS EMISSION - CONDUCTED.....	12
7.4. RADIATED UNWANTED EMISSION.....	12
7.5. 6dB BANDWIDTH .....	12
7.6. MAXIMUM POWER SPECTRAL DENSITY LEVEL.....	12
7.7. AC POWERLINE CONDUCTED EMISSION .....	13
<b>ANNEX A: EUT PARAMETERS.....</b>	<b>14</b>
<b>ANNEX B: DETAILED TEST RESULTS.....</b>	<b>15</b>
B.1. MEASUREMENT METHOD .....	15
B.2. PEAK OUTPUT POWER.....	16
B.3. FREQUENCY BAND EDGES - CONDUCTED .....	17



B.4. TRANSMITTER SPURIOUS EMISSION - CONDUCTED ..... 19

B.5. RADIATED UNWANTED EMISSION ..... 28

B.6. 6dB BANDWIDTH..... 34

B.7. MAXIMUM POWER SPECTRAL DENSITY LEVEL ..... 37

B.8. AC POWERLINE CONDUCTED EMISSION ..... 40

B.9. ANTENNA REQUIREMENT..... 45

**ANNEX C: ACCREDITATION CERTIFICATE ..... 46**



## 1. Test Laboratory

### 1.1. Introduction & Accreditation

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

### 1.2. Testing Location

Conducted testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191


### 1.3. Testing Environment

Normal Temperature: 20-27°C  
Relative Humidity: 20-50%

### 1.4. Project data

Testing Start Date: 2024-4-20  
Testing End Date: 2024-5-29

### 1.5. Signature




---

**Wu Le**  
**(Prepared this test report)**



---

**Sun Zhenyu**  
**(Reviewed this test report)**



---

**Hu Xiaoyu**  
**(Approved this test report)**



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Shenzhen Tinno Mobile Technology Corp.  
27-001, South Side of Tianlong Mobile Headquarters Building,  
Address /Post: Tongfa South Road, Xili Community, Xili Street, Nanshan District,  
Shenzhen ,PRC  
City: Shenzhen  
Postal Code: /  
Country: China  
Telephone: 0755-86095550  
Fax: 0755-86095551

### **2.2. Manufacturer Information**

Company Name: Shenzhen Tinno Mobile Technology Corp.  
27-001, South Side of Tianlong Mobile Headquarters Building,  
Address /Post: Tongfa South Road, Xili Community, Xili Street, Nanshan District,  
Shenzhen ,PRC  
City: Shenzhen  
Postal Code: /  
Country: China  
Telephone: 0755-86095550  
Fax: 0755-86095551

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	Smart Phone
Model Name	U572AA, U572AC
FCC ID	XD6U572AA
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation(LE mode)	GFSK (Bluetooth Low Energy)
Number of Channels(LE mode)	40
Power Supply	3.85V DC by Battery
Antenna gain	0.2dBi

#### 3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT27a(U572AA)	864975070007214	1.0	U572AAV01.04.10	2024-4-25
UT10a(U572AA)	864975070007867	1.0	U572AAV01.04.10	2024-4-20

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE

AE ID*	Description	Model	Manufacturer	Note
AE1	Battery	TNO496386AG-N1	GUANGDONG FENGHUA NEW ENERGY CO.,LTD	---
AE2-1	Charger	TN-050200U3	Guangdong Beicom Electronics Co.,Ltd	First source
AE2-2	Charger	LM-603U-050200U2UL	Chongqing Lianmao Electronics Co.,LTD.	Second source
AE3-1	USB cable	T365-011B-1	Shenzhen Yihuaxing Electronics Co. Ltd.	First source
AE3-2	USB cable	336275	SUNTOPS ELECTRONICS CO.,LTD	Second source

\*AE ID: is used to identify the test sample in the lab internally.

#### 3.4. Normal Accessory setting

Fully charged battery is used during the test.

#### 3.5. General Description

The Equipment Under Test (EUT) is a model of Smart Phone with integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfill the test. Samples undergoing test were selected by the Client.



## 4. Reference Documents

### 4.1. Documents supplied by applicant

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

### 4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	2023
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	June,2013

## 5. Test Results

### 5.1. Summary of EUT Mode

Two modes are provided:

Mode	Conditions
Mode A	1Mbps
Mode B	2Mbps

\*For the test results, the EUT had been tested all conditions. But only the worst case (Mode B) was shown in test report except the " Peak Output Power " test was shown all conditions.

### 5.2. Summary of Test Results

Abbreviations used in this clause:

- P** Pass, The EUT complies with the essential requirements in the standard.
- F** Fail, The EUT does not comply with the essential requirements in the standard
- NA** Not Applicable, The test was not applicable
- NP** Not Performed, The test was not performed by CTTL

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Peak Output Power	15.247 (b)(1)	<b>P</b>
Frequency Band Edges- Conducted	15.247 (d)	<b>P</b>
Transmitter Spurious Emission - Conducted	15.247 (d)	<b>P</b>
Radiated Unwanted Emission	15.247, 15.205, 15.209	<b>P</b>
6dB Bandwidth	15.247 (a)(2)	<b>P</b>
Maximum Power Spectral Density Level	15.247(e)	<b>P</b>
AC Powerline Conducted Emission	15.107, 15.207	<b>P</b>
Antenna Requirement	15.203	<b>P</b>

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.10.

### 5.3. Statements

CTTL has evaluated the test cases requested by the applicant /manufacturer as listed in section 5.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.2

The U572AA is a new product for this testing. The U572AC is a variant product of U572AA and shares the U572AA results. For detail differences between two models please refer the Declaration of Changes document.

## 6. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ26	100024	R&S	1 year	2025-03-09
2	Test Receiver	ESCI	100344	R&S	1 year	2025-04-01
3	LISN	ENV216	101200	R&S	1 year	2025-05-16
4	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103144	R&S	1 year	2024-11-26
2	Test Receiver	ESW44	103023	R&S	1 year	2024-06-08
3	EMI Antenna	VULB 9163	01222	SCHWARZBECK	2 years	2025-01-28
4	EMI Antenna	3115	6914	ETS-Lindgren	2 years	2025-05-07
5	EMI Antenna	3116	2663	ETS-Lindgren	2 years	2024-11-22

### Test software information(HL)

Test Item	Software	Manufacturer
Conducted emission	EMC32 V8.53.0	R&S
Radiated emission	EMC32 V11.50.00	R&S

## 7. Measurement Uncertainty

### 7.1. Peak Output Power - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.2. Frequency Band Edges - Conducted

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------

### 7.3. Transmitter Spurious Emission - Conducted

Measurement Uncertainty:

Frequency Range	Uncertainty (k=2)
30 MHz ~ 8 GHz	1.22dB
8 GHz ~ 12.75 GHz	1.51dB
12.7GHz ~ 26 GHz	1.51dB

### 7.4. Radiated Unwanted Emission

Measurement Uncertainty:

Frequency Range	Uncertainty(dBm) (k=2)
9kHz-30MHz	4.92
$30\text{MHz} \leq f \leq 1\text{GHz}$	4.72
$1\text{GHz} \leq f \leq 18\text{GHz}$	4.84
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.12

### 7.5. 6dB Bandwidth

Measurement Uncertainty:

Measurement Uncertainty (k=2)	61.936Hz
-------------------------------	----------

### 7.6. Maximum Power Spectral Density Level

Measurement Uncertainty:

Measurement Uncertainty (k=2)	0.66dB
-------------------------------	--------



## 7.7. AC Powerline Conducted Emission

### Measurement Uncertainty:

Measurement Uncertainty (k=2)	3.08dB
-------------------------------	--------



## **ANNEX A: EUT parameters**

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.


## **ANNEX B: Detailed Test Results**

### **B.1. Measurement Method**

#### **B.1.1. Conducted Measurements**

The measurement is made according to ANSI C63.10.

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode (Transmitter, receiver or transmitter & receiver).
- 3). Set the EUT to the required channel.
- 4). Set the EUT hopping mode (hopping or hopping off).
- 5). Set the spectrum analyzer to start measurement.
- 6). Record the values. Vector Signal Analyzer



#### **B.1.2. Radiated Emission Measurements**

The measurement is made according to ANSI C63.10

The radiated emission test is performed in semi-anechoic chamber. The EUT was placed on a non-conductive table with 80cm above the ground plane for measurement below 1GHz and 1.5m above the ground plane for measurement above 1GHz. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated from 0° to 360° and the measurement antenna is moved from 1m to 4m to get the maximization result. The maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

## B.2. Peak Output Power

### B.2.1. Peak Output Power - Conducted

**Method of Measurement: See ANSI C63.10-clause 11.9.1.1**

- a) Set the RBW = 3 MHz.
- b) Set VBW = 10 MHz.
- c) Set span = 10 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

**Measurement Limit:**

Standard	Limit (dBm)
FCC Part 15.247(b)(3)	< 30

**Measurement Results:**

**For GFSK**

Sample Rate	Channel No.	Frequency (MHz)	Peak Conducted Output Power (dBm)	Conclusion
1Mbps	0	2402	-3.53	P
	19	2440	-2.32	P
	39	2480	-2.95	P
2Mbps	1	2404	-3.15	P
	19	2440	-2.18	P
	38	2478	-2.52	P

**Conclusion: PASS**

### B.2.2. E.I.R.P.

**The radiated E.I.R.P. is listed below:**

Antenna gain = 0.2dBi

**For GFSK**

Sample Rate	Channel No.	Frequency (MHz)	E.I.R.P. (dBm)	Conclusion
1Mbps	0	2402	-3.33	P
	19	2440	-2.12	P
	39	2480	-2.75	P
2Mbps	1	2404	-2.95	P
	19	2440	-1.98	P
	38	2478	-2.32	P

Note: E.I.R.P. are calculated with the antenna gain.

**Conclusion: PASS**



### B.3. Frequency Band Edges - Conducted

**Method of Measurement: See ANSI C63.10-clause 6.10.4**

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 8MHz
- b) Sweep Time: Auto
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.

**Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	< -20

**Measurement Result:**

**For GFSK**

Channel No.	Frequency (MHz)	Hopping	Band Edge Power ( dBc)		Conclusion
1	2404	Hopping OFF	Fig.1	-52.40	P
38	2478	Hopping OFF	Fig.2	-36.38	P

**Conclusion: PASS**

Test graphs as below

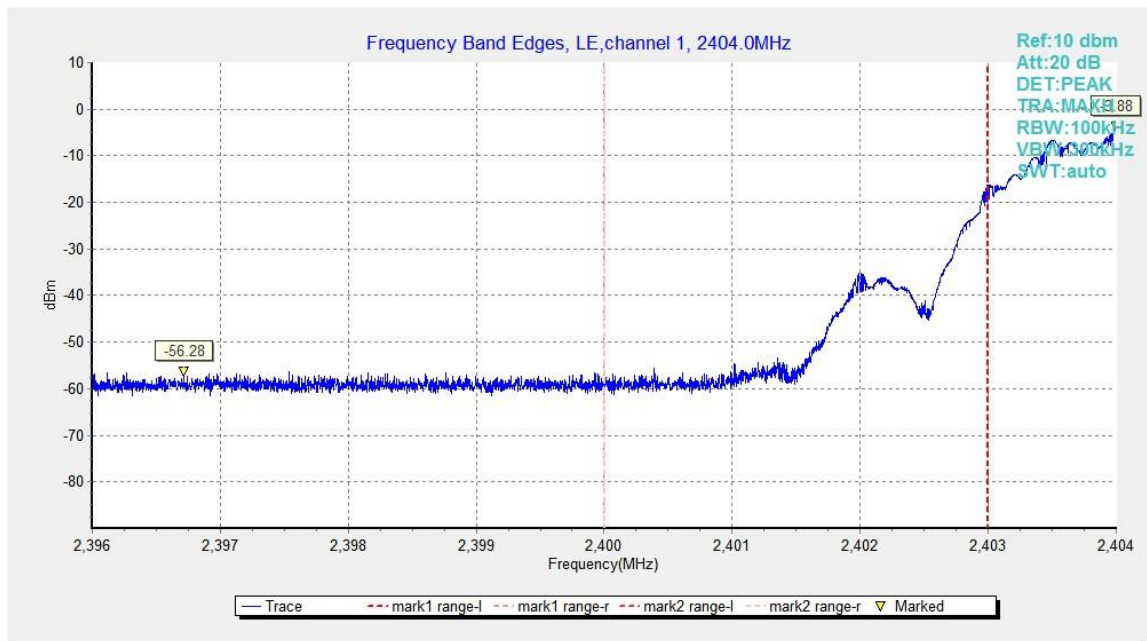


Fig.1. Frequency Band Edges: GFSK, 2404 MHz, Hopping Off

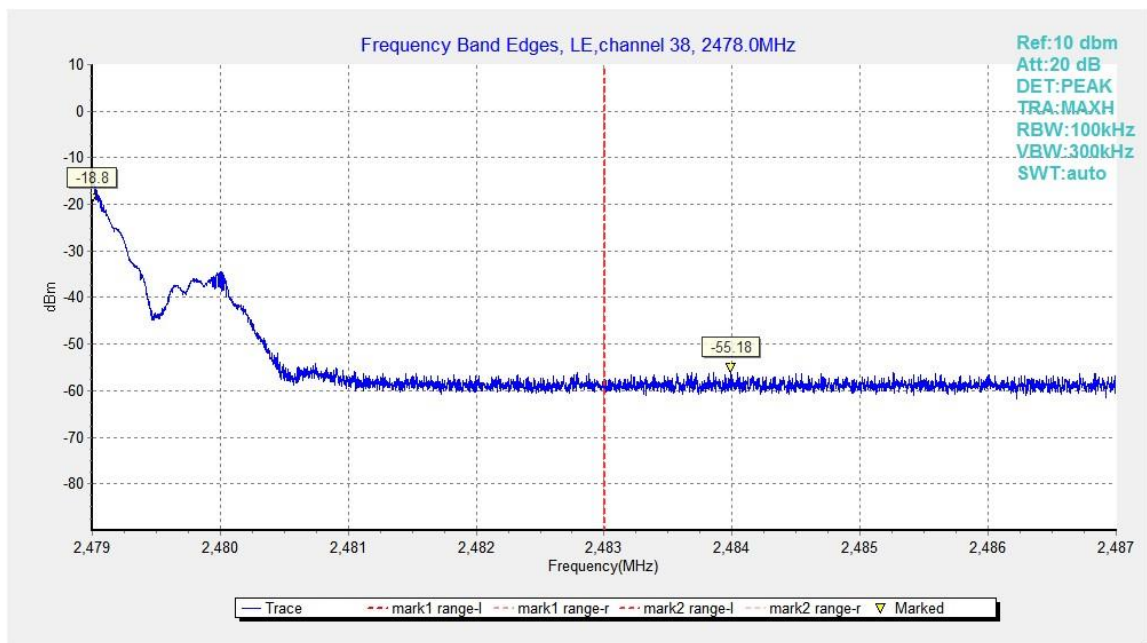


Fig.2. Frequency Band Edges: GFSK, 2478 MHz, Hopping Off

## B.4. Transmitter Spurious Emission - Conducted

**Method of Measurement:** See ANSI C63.10-clause 11.11.2 and clause 11.11.3

### Measurement Procedure – Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW = 300 kHz.
3. Set the span to  $\geq 1.5$  times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum PSD level. Next, determine the power in 100 kHz band segments outside of the authorized frequency band using the following measurement:

### Measurement Procedure - Unwanted Emissions

1. Set RBW = 100 kHz.
2. Set VBW = 300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span). Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified above.

### Measurement Limit:


Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**Measurement Results:  
For GFSK**


Channel No.	Frequency (MHz)	Frequency Range	Test Results	Conclusion
1	2404	Center Frequency	Fig.3	P
		30 MHz ~ 1 GHz	Fig.4	P
		1 GHz ~ 3 GHz	Fig.5	P
		3 GHz ~ 10 GHz	Fig.6	P
		10GHz ~ 26 GHz	Fig.7	P
19	2440	Center Frequency	Fig.8	P
		30 MHz ~ 1 GHz	Fig.9	P
		1 GHz ~ 3 GHz	Fig.10	P
		3 GHz ~ 10 GHz	Fig.11	P
		10GHz ~ 26 GHz	Fig.12	P
38	2478	Center Frequency	Fig.13	P
		30 MHz ~ 1 GHz	Fig.14	P
		1 GHz ~ 3GHz	Fig.15	P
		3 GHz ~ 10 GHz	Fig.16	P
		10 GHz ~ 26 GHz	Fig.17	P

**Conclusion: PASS**


Test graphs as below

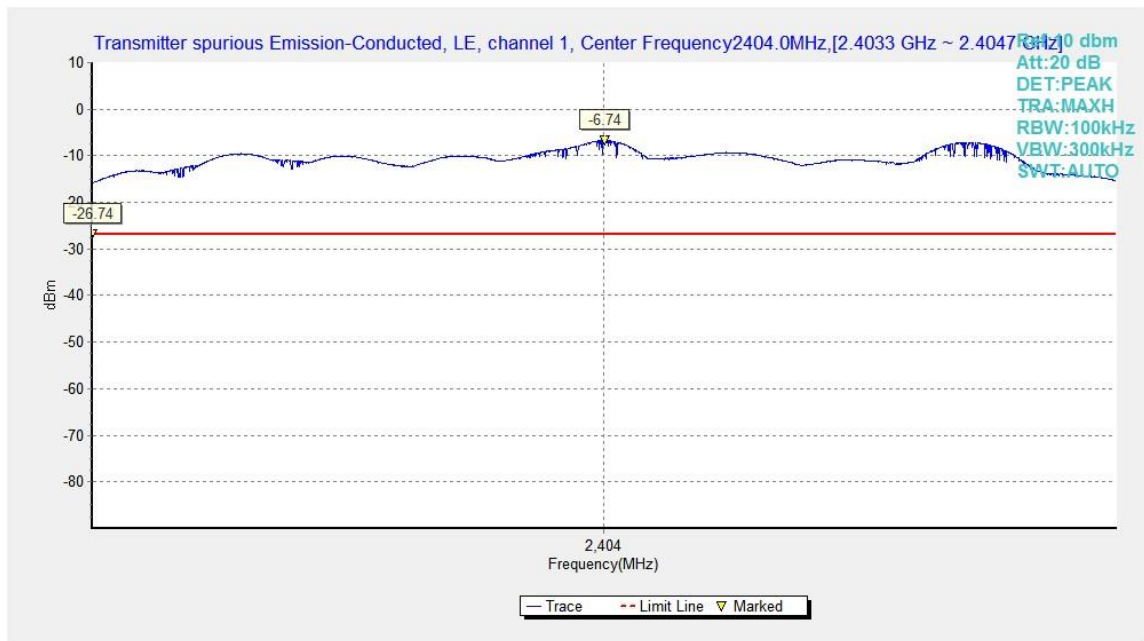


**Fig.3.** Transmitter Spurious Emission - Conducted: GFSK,2404MHz

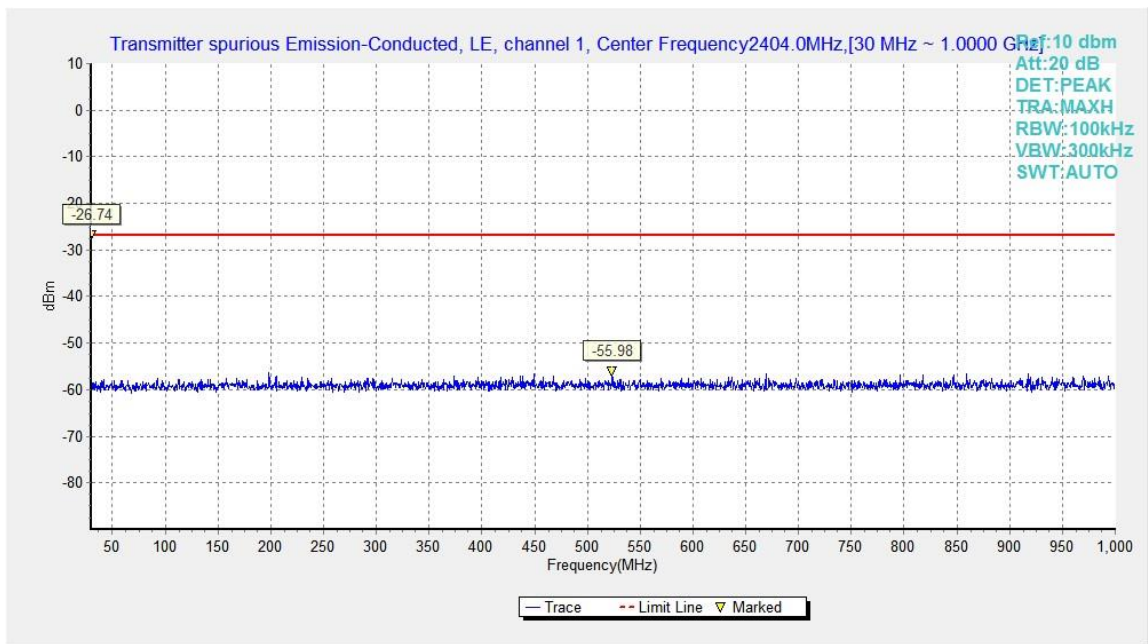


**Fig.4.** Transmitter Spurious Emission - Conducted: GFSK, 2404 MHz, 30MHz - 1GHz

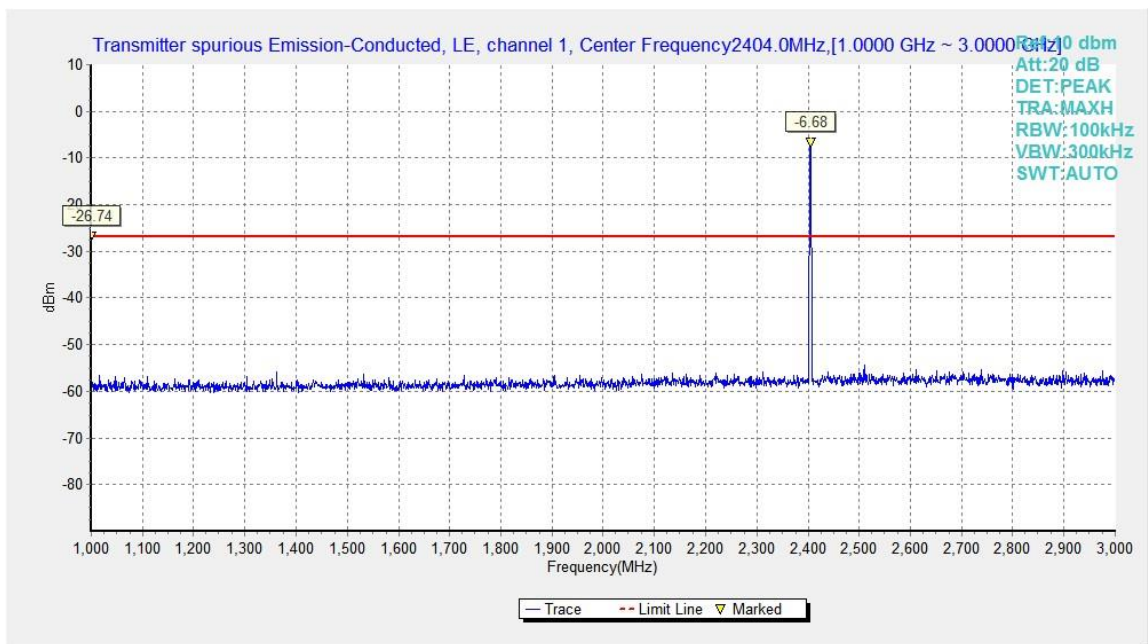

**Fig.5.** Transmitter Spurious Emission - Conducted: GFSK, 2404 MHz, 1GHz - 3GHz

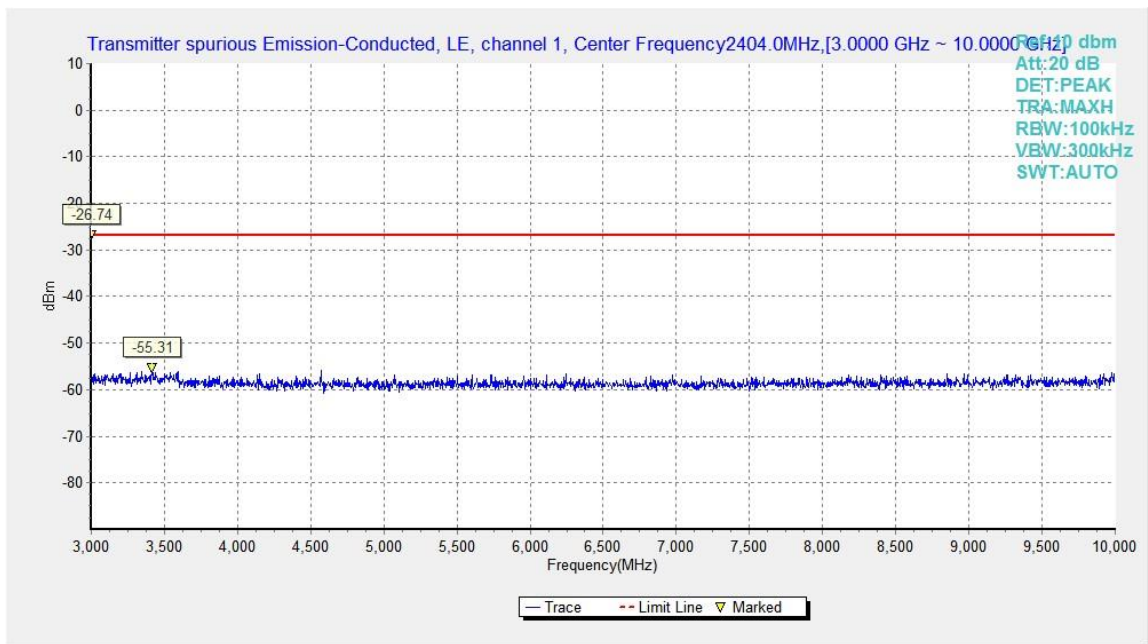


**Fig.6.** Transmitter Spurious Emission - Conducted: GFSK, 2404 MHz, 3GHz - 10GHz

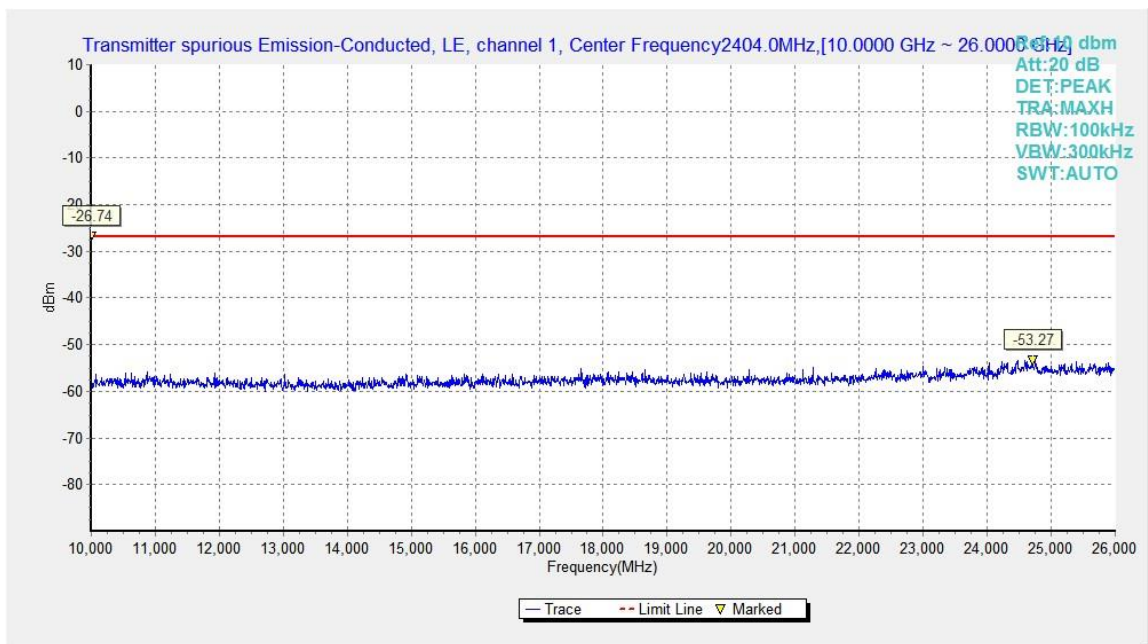


**Fig.7.** Transmitter Spurious Emission - Conducted: GFSK, 2404 MHz, 10GHz - 26GHz




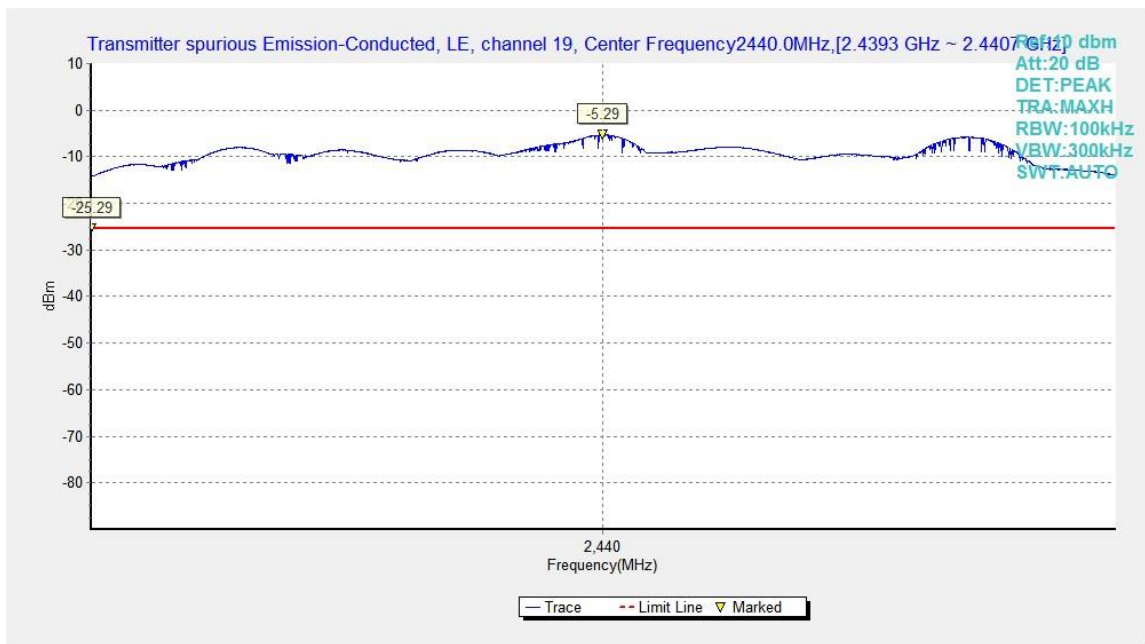


**Fig.8.** Transmitter Spurious Emission - Conducted: GFSK, 2440MHz

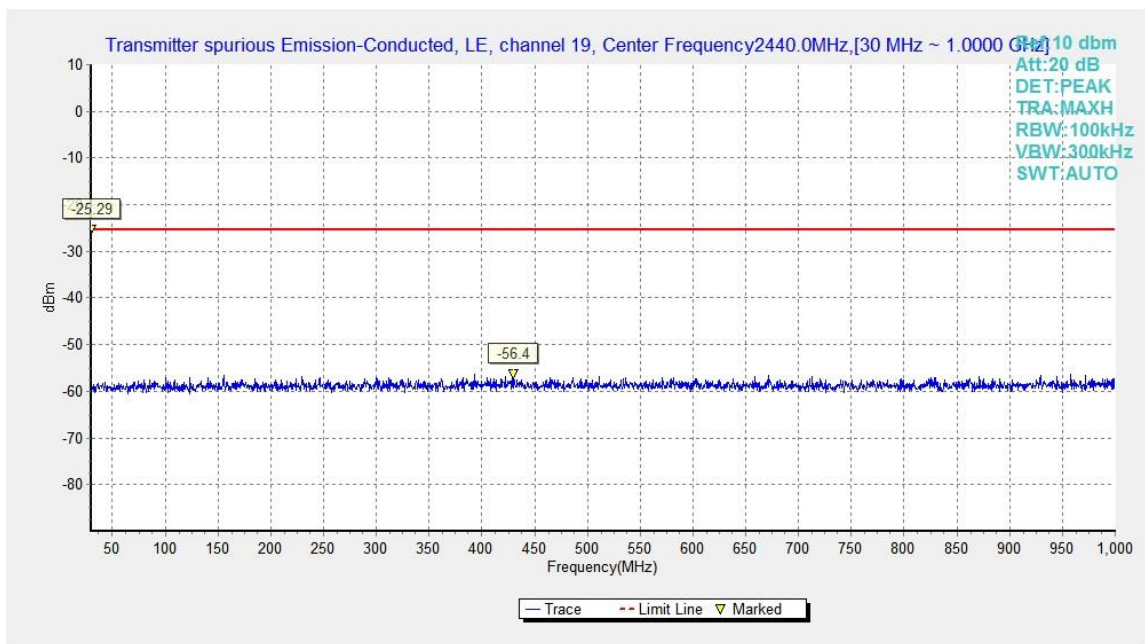

**Fig.9.** Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 30MHz - 1GHz

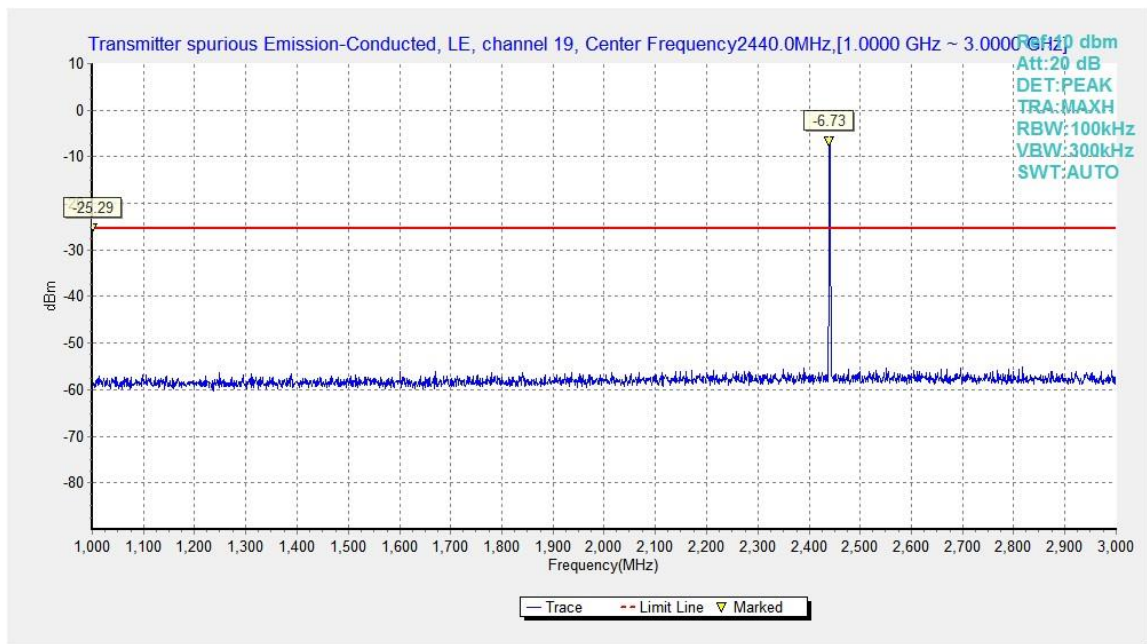


**Fig.10.** Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 1GHz – 3GHz

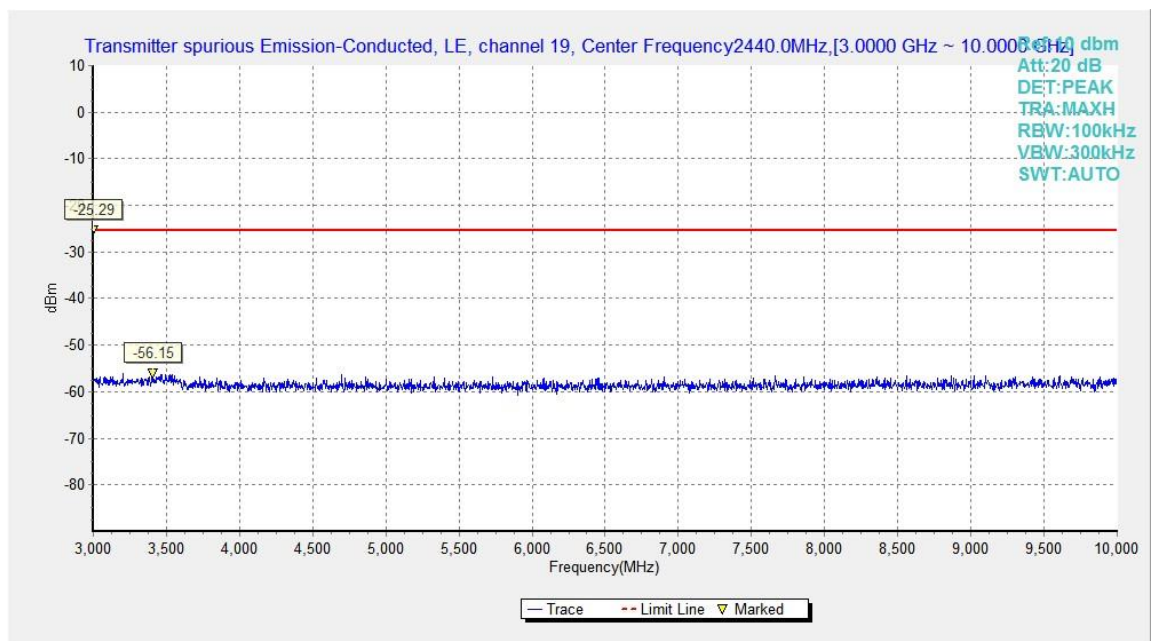


**Fig.11.** Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 3GHz – 10GHz




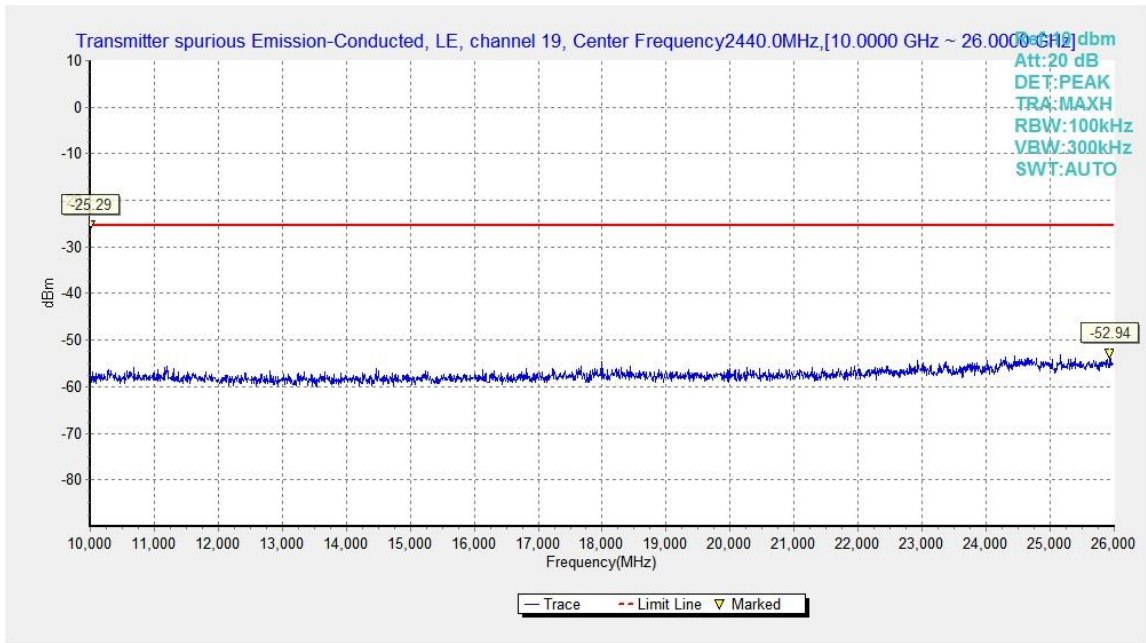


**Fig.12.** Transmitter Spurious Emission - Conducted: GFSK, 2440 MHz, 10GHz – 26GHz

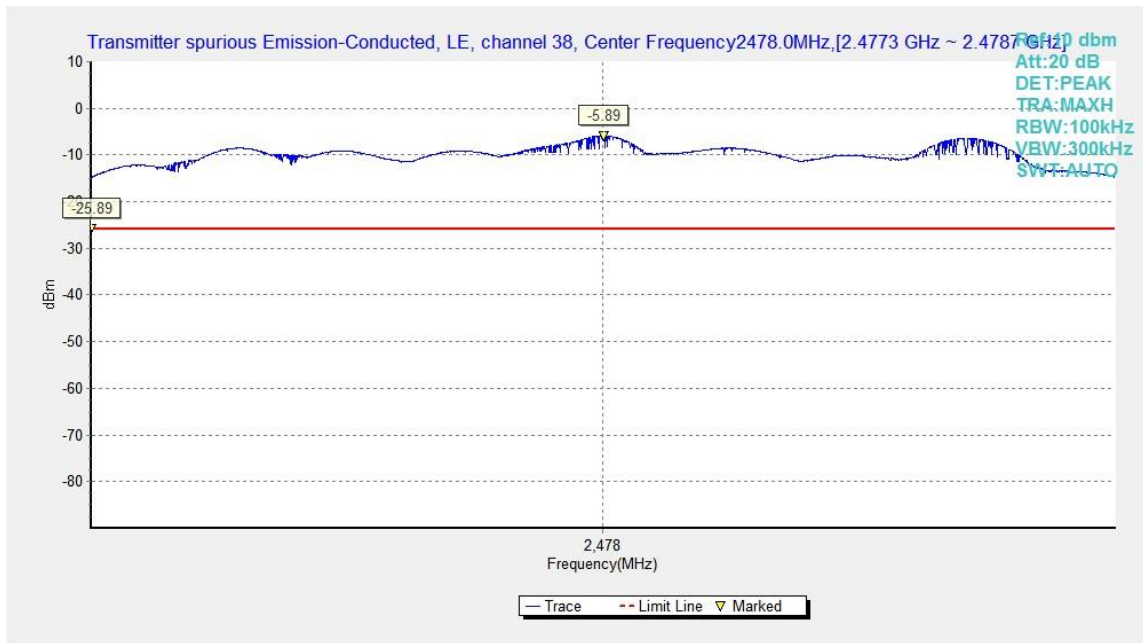


**Fig.13.** Transmitter Spurious Emission - Conducted: GFSK, 2478 MHz

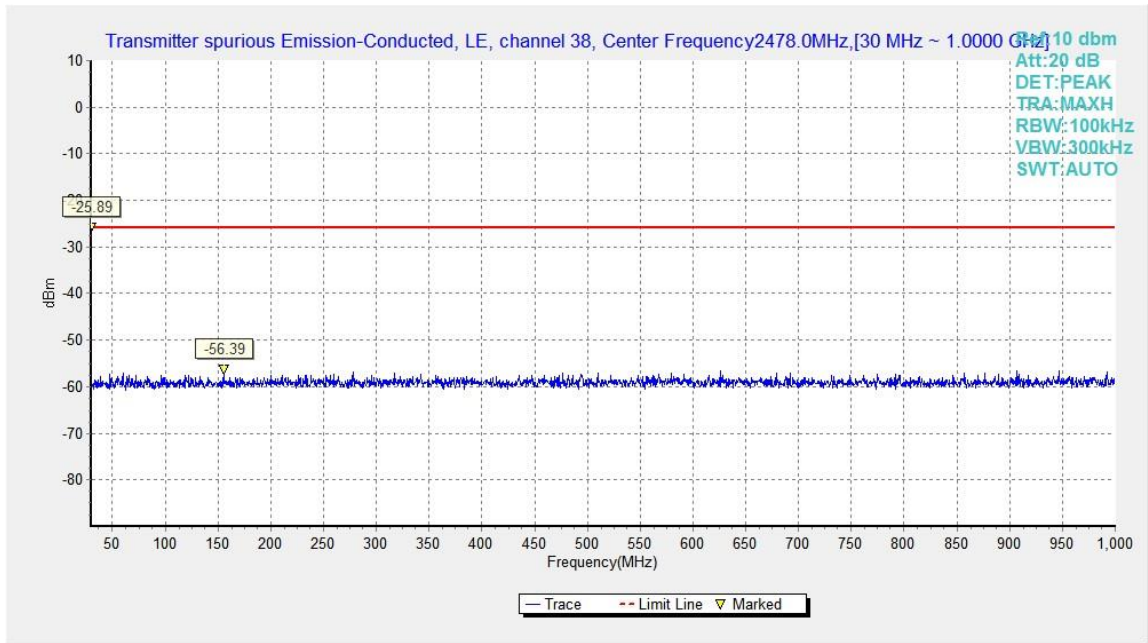


**Fig.14.** Transmitter Spurious Emission - Conducted: GFSK, 2478 MHz, 30MHz - 1GHz

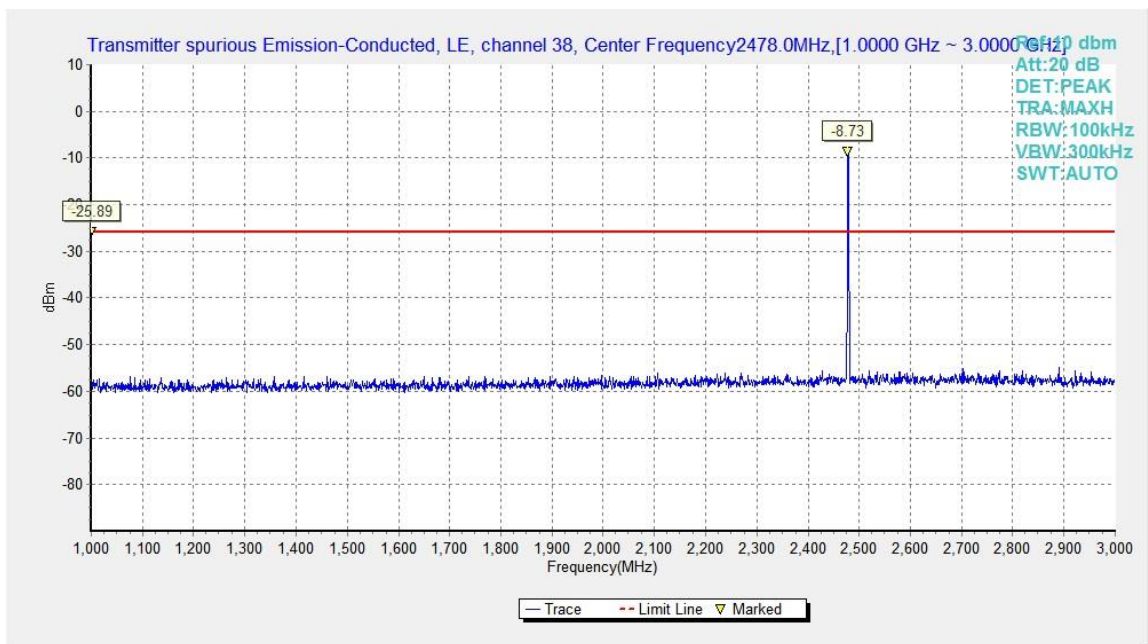

**Fig.15.** Transmitter Spurious Emission - Conducted: GFSK, 2478 MHz, 1GHz - 3GHz

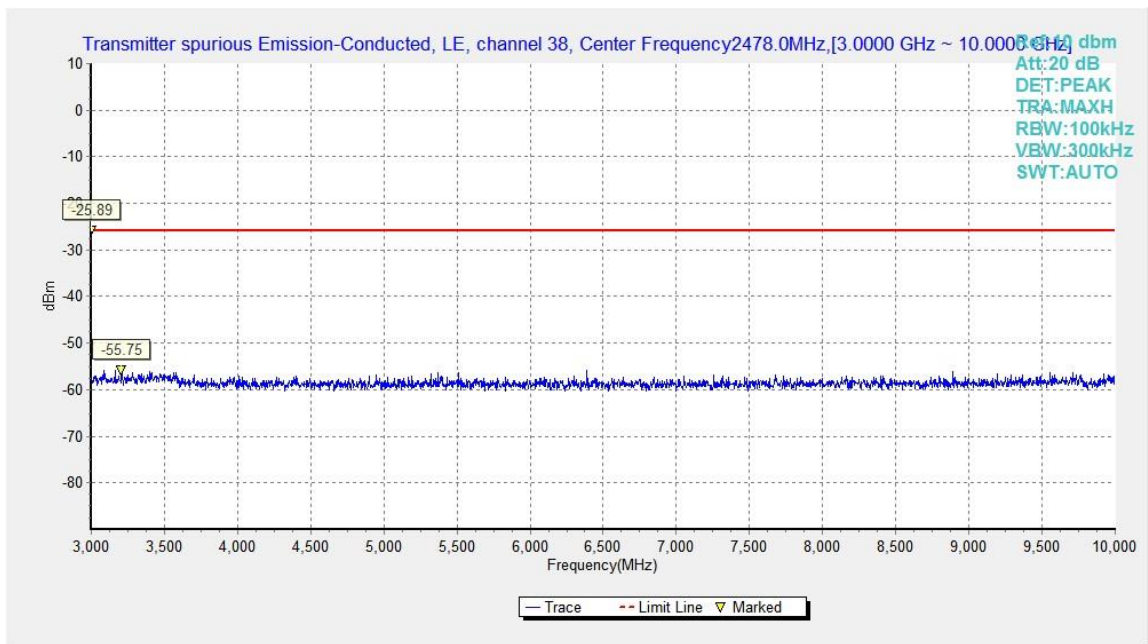

**Fig.16.** Transmitter Spurious Emission - Conducted: GFSK, 2478 MHz, 3GHz - 10GHz

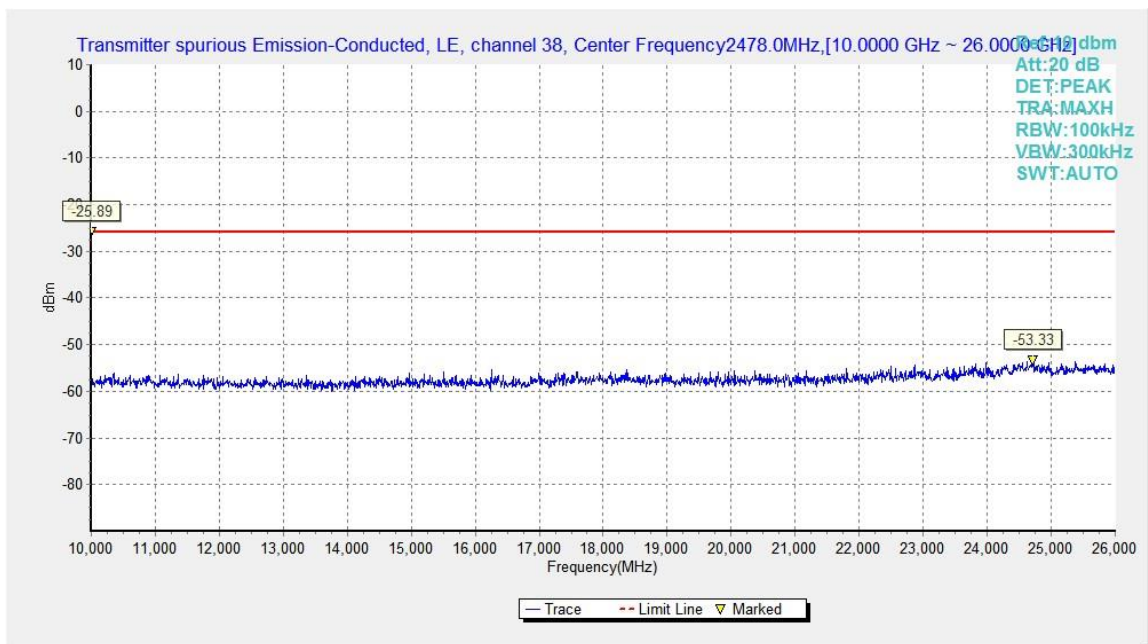

**Fig.17.** Transmitter Spurious Emission - Conducted: GFSK, 2478 MHz, 10GHz - 26GHz

## B.5. Radiated Unwanted Emission

### Limits

Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band

Frequency (MHz)	Field strength( $\mu\text{V}/\text{m}$ )	Measurement distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength ( $\mu\text{V}/\text{m}$ )	Field strength (dB $\mu\text{V}/\text{m}$ )	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor.

### Test setup



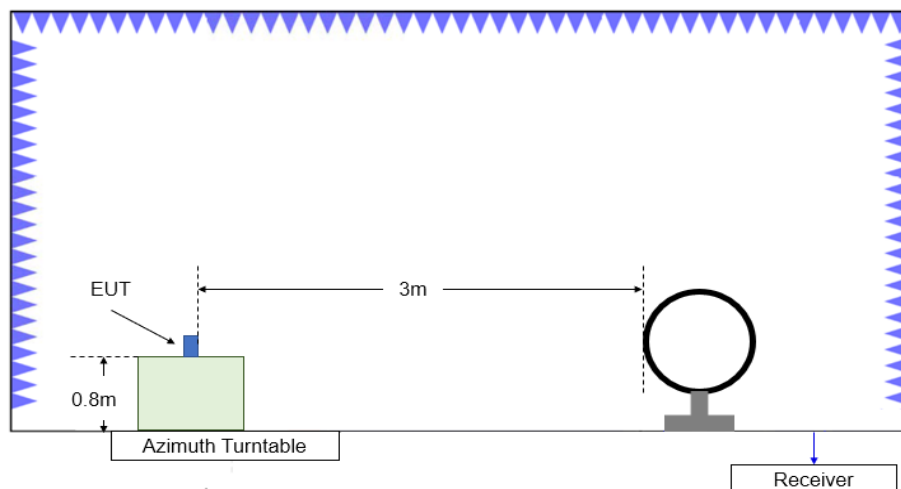


Figure B.5.1. Test Site Diagram (9kHz-30MHz)

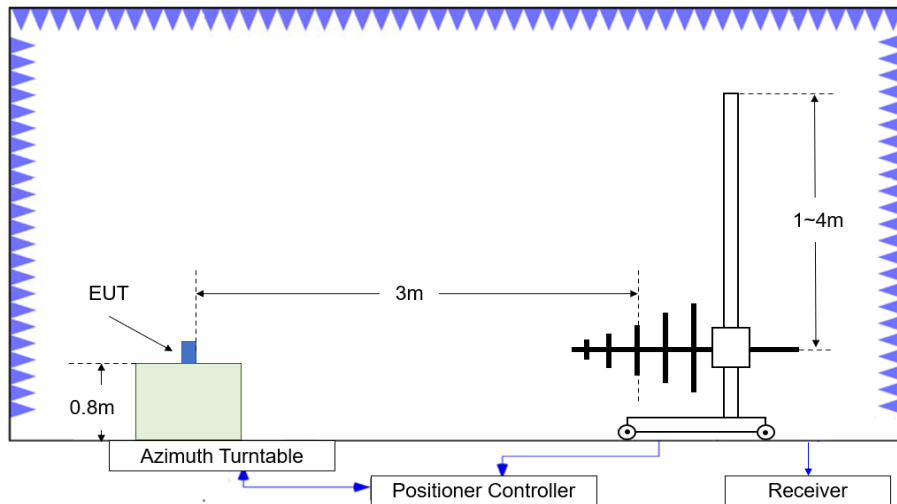

**Figure B.5.2. Test Site Diagram (30MHz-1GHz)**

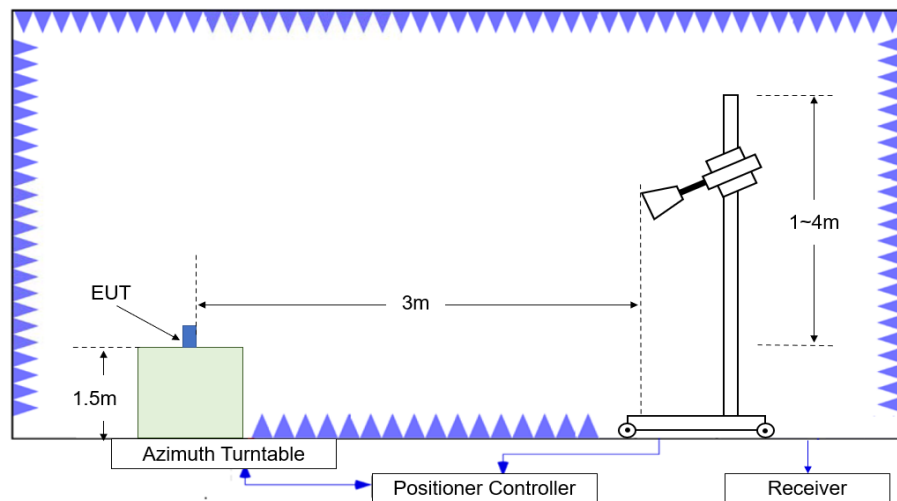

**Figure B.5.3. Test Site Diagram (1GHz-40GHz)**

### **Test Procedures**

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10-2013 (ANSI C63.10-2020).

Test setting

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-3000	1MHz/3MHz	15
3000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

### **Sample Calculation**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + \text{Cable Loss} + \text{Antenna Factor}$$

### Test note

1. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
2. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
3. Measurement frequencies were performed from 9 kHz to the 10<sup>th</sup> harmonic of highest fundamental frequency or 40GHz, whichever is lower.

### Test Result

EUT ID: UT27a

#### Average Measurement results

##### GFSK 2402MHz

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17990.500	45.64	-29.40	46.00	29.04	54.00	8.36	V
14715.000	40.18	-30.20	41.40	29.08	54.00	13.82	H
11861.500	36.70	-32.80	39.10	30.30	54.00	17.30	H
9012.500	34.54	-34.30	37.80	31.04	54.00	19.46	V
7931.000	33.16	-35.40	36.80	31.76	54.00	20.84	V
2343.300	43.59	-19.60	28.20	34.99	54.00	10.41	H

##### GFSK 2440MHz

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17998.500	45.70	-29.40	46.00	29.10	54.00	8.30	H
14586.000	39.77	-29.00	41.90	26.87	54.00	14.23	H
11910.500	36.11	-32.40	39.10	29.41	54.00	17.89	V
8707.500	34.58	-34.40	37.70	31.28	54.00	19.42	H
7299.000	33.11	-35.40	36.60	31.91	54.00	20.89	V
4797.500	30.29	-37.50	33.10	34.69	54.00	23.71	V

##### GFSK 2480MHz

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17966.500	46.15	-29.40	46.00	29.55	54.00	7.85	H
14211.000	39.79	-30.60	41.80	28.69	54.00	14.21	H
11887.000	36.06	-32.40	39.10	29.36	54.00	17.94	V
9114.500	35.01	-34.30	37.70	31.61	54.00	18.99	H
7407.500	33.00	-35.10	36.60	31.50	54.00	21.00	H
2493.400	43.64	-19.70	28.20	35.14	54.00	10.36	H



**Peak Measurement results**
**GFSK 2402MHz**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17998.500	55.32	-29.40	46.00	38.72	74.00	18.68	V
14587.500	50.00	-29.00	41.90	37.10	74.00	24.00	V
11853.500	45.57	-32.80	39.10	39.17	74.00	28.43	H
9026.000	44.35	-34.30	37.80	40.85	74.00	29.65	H
7552.500	43.18	-35.50	36.30	42.38	74.00	30.82	V
2388.700	55.30	-19.80	28.20	46.90	74.00	18.70	H

**GFSK 2440MHz**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17998.000	55.54	-29.40	46.00	38.94	74.00	18.46	H
13598.000	49.56	-31.30	40.80	40.06	74.00	24.44	H
11866.000	46.20	-32.80	39.10	39.80	74.00	27.80	H
8822.000	44.17	-34.50	37.80	40.87	74.00	29.83	H
7314.000	43.17	-35.40	36.60	41.97	74.00	30.83	H
4969.000	40.27	-37.40	33.60	44.07	74.00	33.73	H

**GFSK 2480MHz**

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17966.000	55.37	-29.40	46.00	38.77	74.00	18.63	V
13940.500	49.88	-30.60	41.40	39.08	74.00	24.12	V
11786.000	45.55	-32.00	39.20	38.35	74.00	28.45	V
8994.500	43.86	-34.70	37.70	40.86	74.00	30.14	V
7508.500	42.75	-35.10	36.40	41.45	74.00	31.25	H
2499.100	55.52	-19.70	28.20	47.02	74.00	18.48	H

**Conclusion: PASS**

Note: the spurious emission above 18G is noise only and did not show on the report.


**Band edge compliance**

Mode	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.31GHz ~2.43GHz	Fig.18	P
	39	2.45GHz ~2.5GHz	Fig.19	P

**Conclusion: PASS**

**Test graphs as below**

Full Spectrum

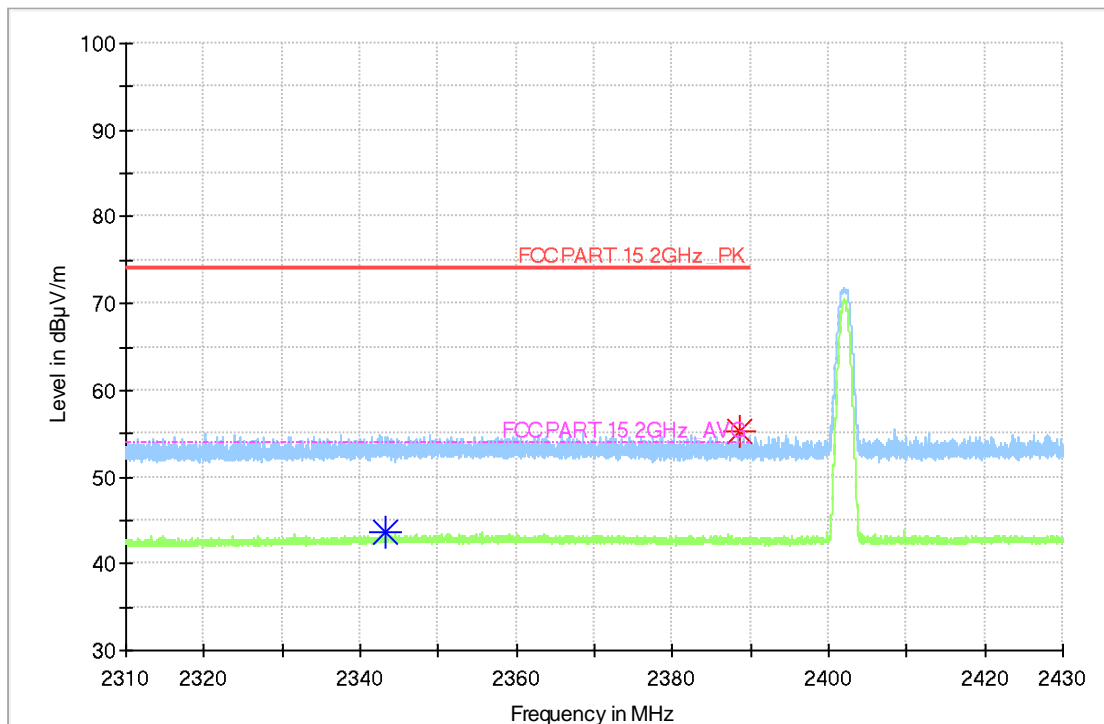

**Fig.18. Frequency Band Edges: GFSK, 2402 MHz, Hopping Off, 2.31 GHz – 2.43GHz**



Full Spectrum

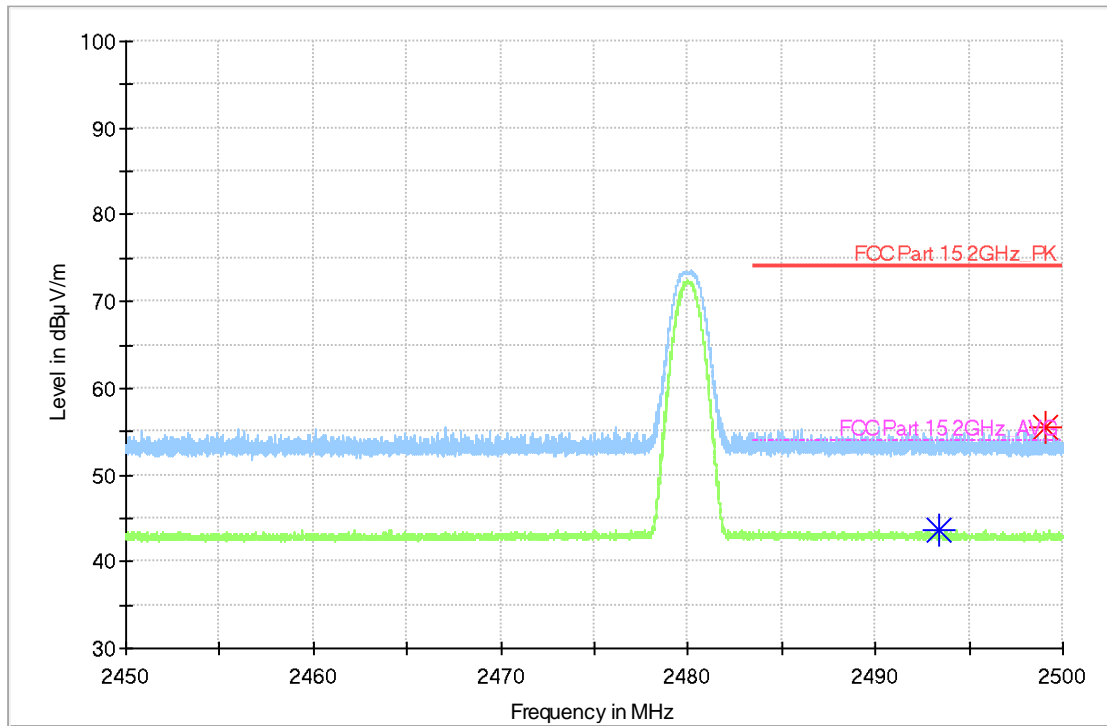


Fig.19. Frequency Band Edges: GFSK, 2480 MHz, Hopping Off , 2.45 GHz - 2.50GHz

## B.6. 6dB Bandwidth

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) = 300 kHz.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(2)	$\geq 500\text{KHz}$


### Measurement Results:

#### For GFSK


Channel No.	Frequency (MHz)	6dB Bandwidth (kHz)		Conclusion
1	2404	Fig.20	1163.50	P
19	2440	Fig.21	1165.50	P
38	2478	Fig.22	1168.00	P

**Conclusion: PASS**


**Test graphs as below:**

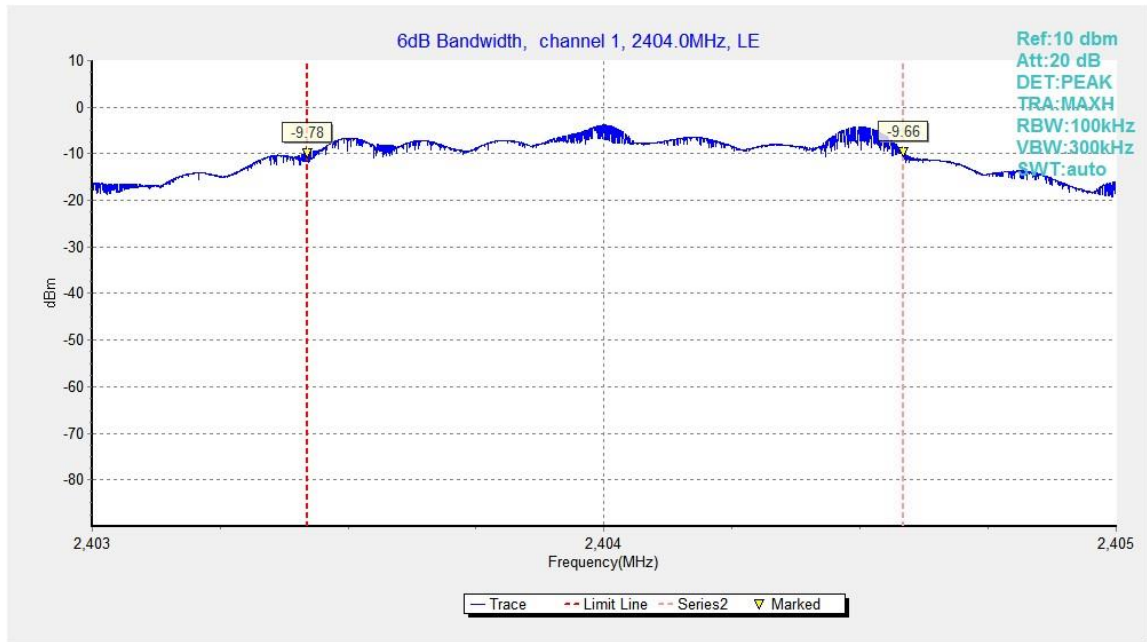

**Fig.20.** 6dB Bandwidth: GFSK, 2404 MHz

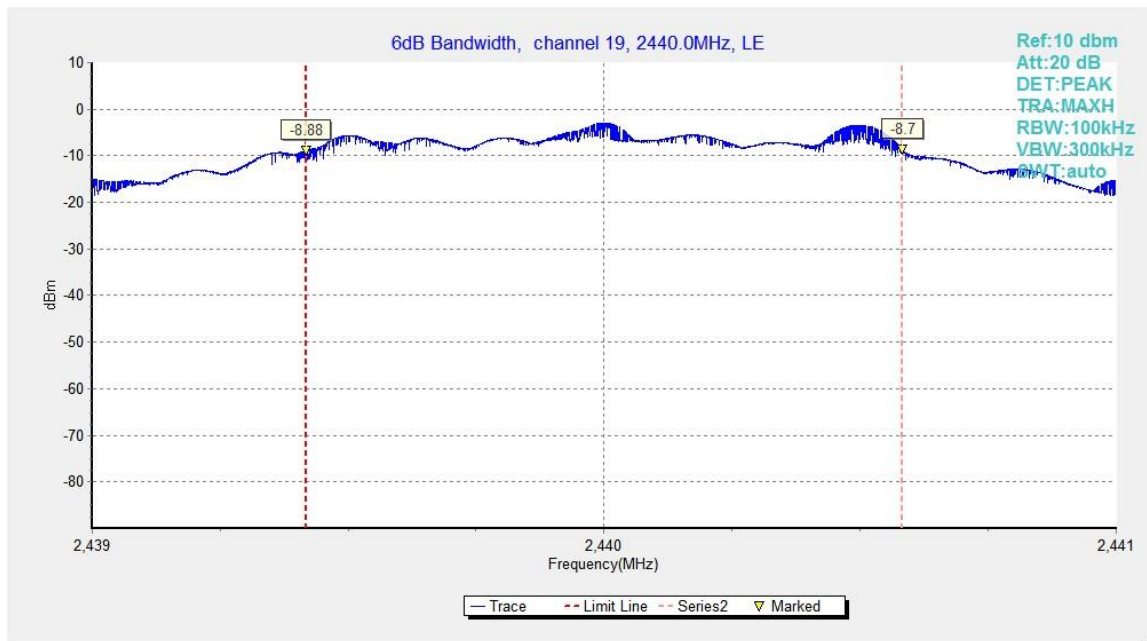

**Fig.21.** 6dB Bandwidth: GFSK, 2440 MHz

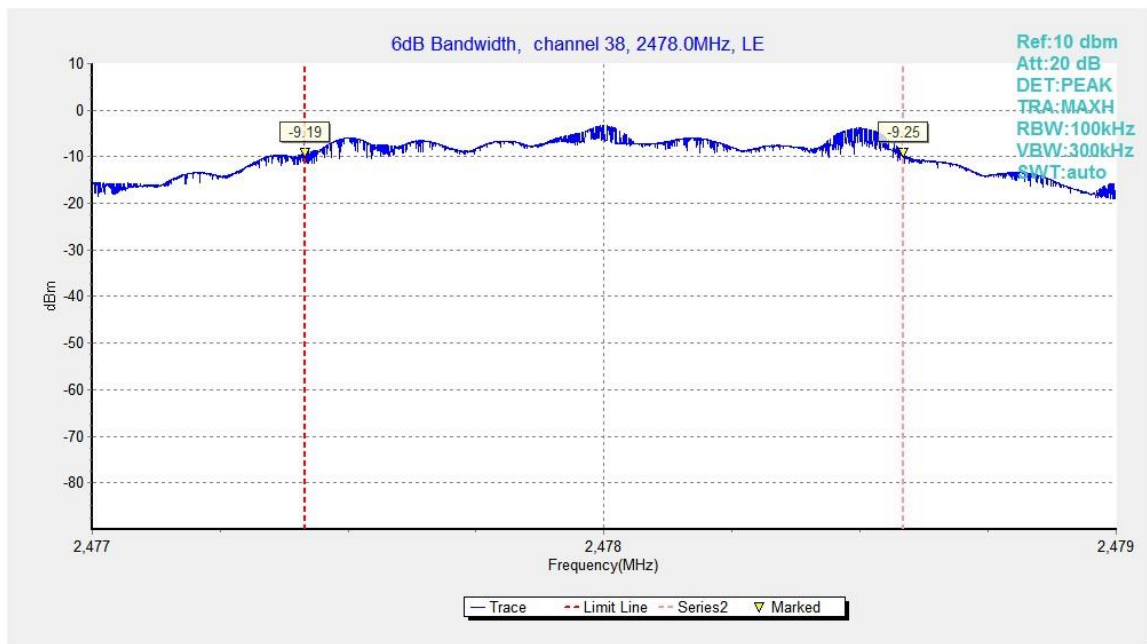

**Fig.22.** 6dB Bandwidth: GFSK, 2478 MHz

## B.7. Maximum Power Spectral Density Level

### Method of Measurement:

The measurement is made according to ANSI C63.10 clause 11.10.2

1. Set the RBW = 3 kHz.
2. Set the VBW = 10 kHz.
3. Set the span to 2 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.

### Measurement Limit:


Standard	Limit
FCC 47 CFR Part 15.247(e)	$\leq 8.0 \text{ dBm/3kHz}$

### Measurement Results:


For GFSK

Channel No.	Frequency (MHz)	Maximum Power Spectral Density Level(dBm/3kHz)		Conclusion
		Fig.	Level	
1	2404	Fig.23	-21.93	P
19	2440	Fig.24	-21.00	P
38	2478	Fig.25	-21.41	P


Test graphs as below:

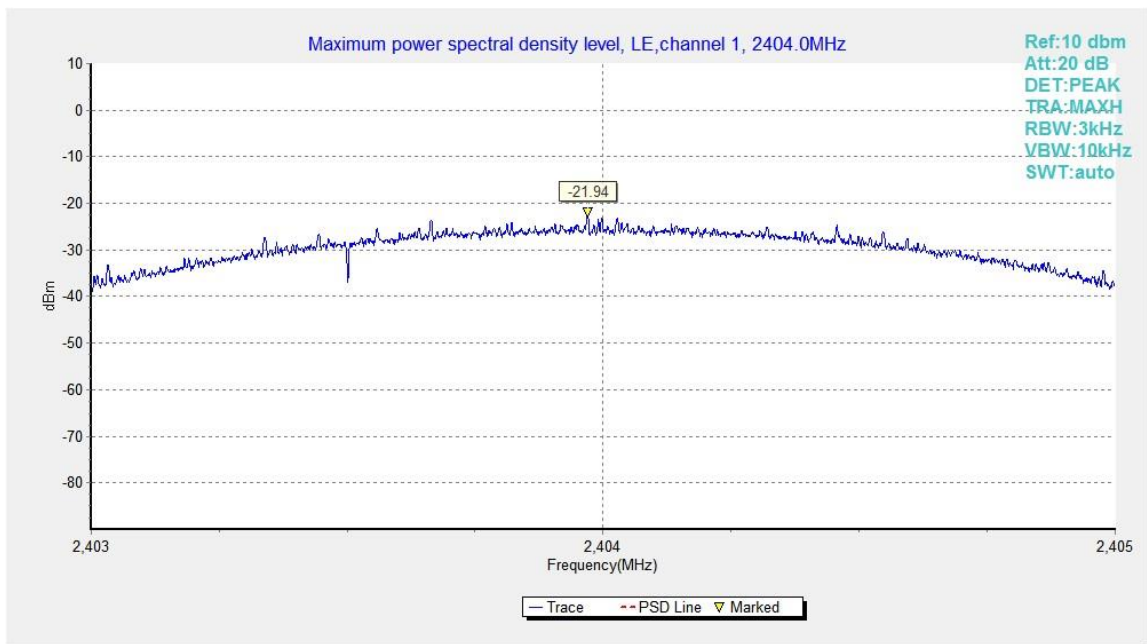

**Fig.23.** Maximum Power Spectral Density Level Function: GFSK, 2404 MHz

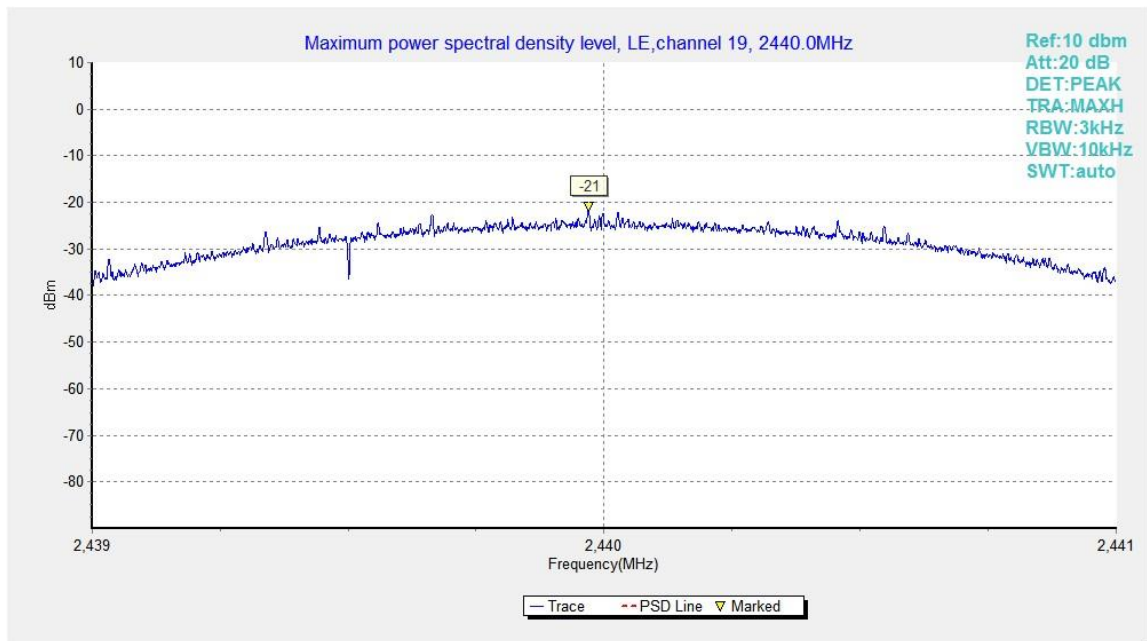

**Fig.24.** Maximum Power Spectral Density Level Function: GFSK, 2440 MHz

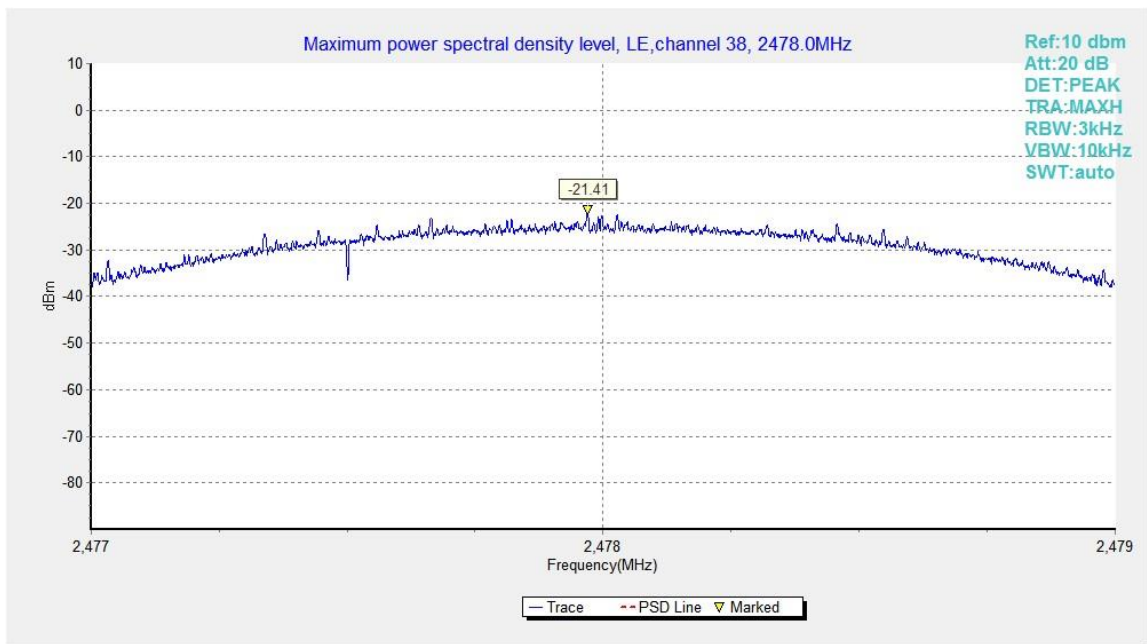

**Fig.25.** Maximum Power Spectral Density Level Function: GFSK, 2478 MHz

## B.8. AC Powerline Conducted Emission

### Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

### Method of Measurement:

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

### Test Condition:

Voltage (V)	Frequency (Hz)
120	60

### Test setup

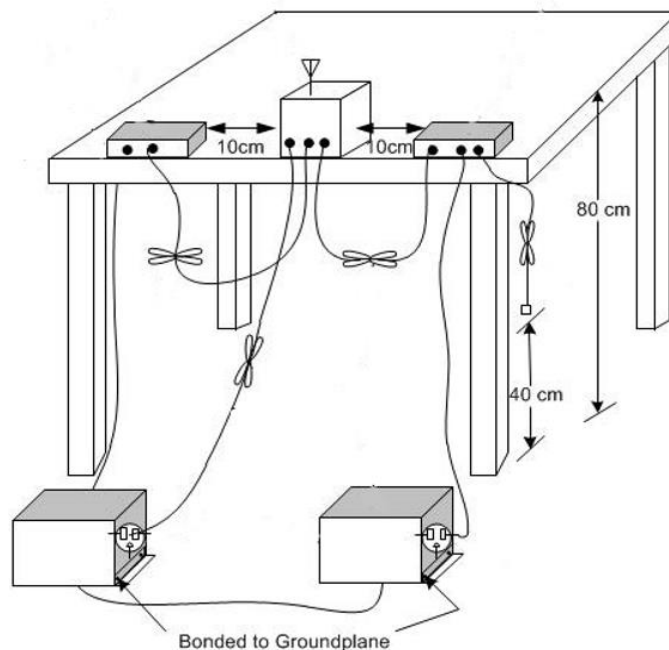

### Measurement Result and limit:



## Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger (First source)		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.B.8.1	Fig. B.8.2	<b>P</b>
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger (First source)		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.8.1	Fig. B.8.2	<b>P</b>
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger (Second source)		
		bluetooth	Idle	
0.15 to 0.5	67 to 56	Fig.B.8.3	/	<b>P</b>
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.


## Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger (Second source)		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.8.3	/	<b>P</b>
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Conclusion: Pass**

**Test graphs as below:**

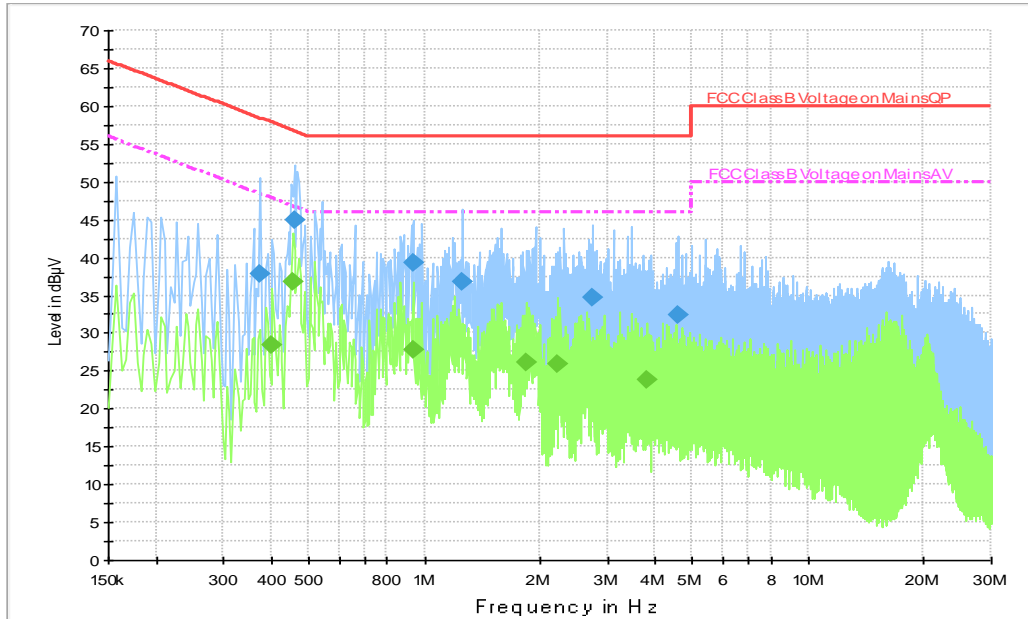

**Fig.B.8.1 AC Powerline Conducted Emission- Bluetooth(First source)**


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.374000	37.8	2000.0	9.000	On	L1	19.8	20.6	58.4
0.458000	45.0	2000.0	9.000	On	N	19.8	11.8	56.7
0.934000	39.3	2000.0	9.000	On	L1	19.7	16.7	56.0
1.254000	36.8	2000.0	9.000	On	N	19.6	19.2	56.0
2.754000	34.8	2000.0	9.000	On	N	19.6	21.2	56.0
4.586000	32.4	2000.0	9.000	On	N	19.6	23.6	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.402000	28.5	2000.0	9.000	On	L1	19.8	19.3	47.8
0.454000	36.8	2000.0	9.000	On	L1	19.8	10.0	46.8
0.934000	27.9	2000.0	9.000	On	L1	19.7	18.1	46.0
1.842000	26.0	2000.0	9.000	On	L1	19.6	20.0	46.0
2.230000	25.9	2000.0	9.000	On	L1	19.6	20.1	46.0
3.798000	23.8	2000.0	9.000	On	L1	19.6	22.2	46.0

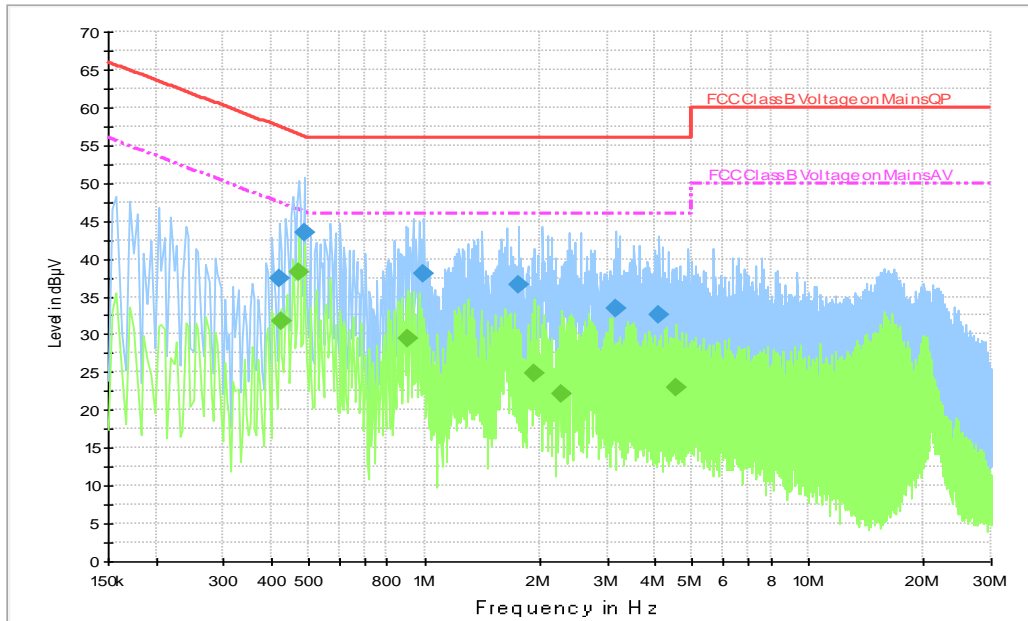

**Fig.B.8.2 AC Powerline Conducted Emission-Idle(First source)**


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.418000	37.4	2000.0	9.000	On	N	19.8	20.1	57.5
0.486000	43.5	2000.0	9.000	On	N	19.8	12.8	56.2
0.998000	38.0	2000.0	9.000	On	N	19.6	18.0	56.0
1.762000	36.6	2000.0	9.000	On	N	19.6	19.4	56.0
3.142000	33.4	2000.0	9.000	On	N	19.6	22.6	56.0
4.098000	32.6	2000.0	9.000	On	N	19.6	23.4	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.422000	31.7	2000.0	9.000	On	L1	19.8	15.7	47.4
0.470000	38.3	2000.0	9.000	On	L1	19.8	8.2	46.5
0.902000	29.6	2000.0	9.000	On	L1	19.7	16.4	46.0
1.938000	24.9	2000.0	9.000	On	L1	19.6	21.1	46.0
2.286000	22.2	2000.0	9.000	On	L1	19.6	23.8	46.0
4.526000	23.0	2000.0	9.000	On	L1	19.6	23.0	46.0

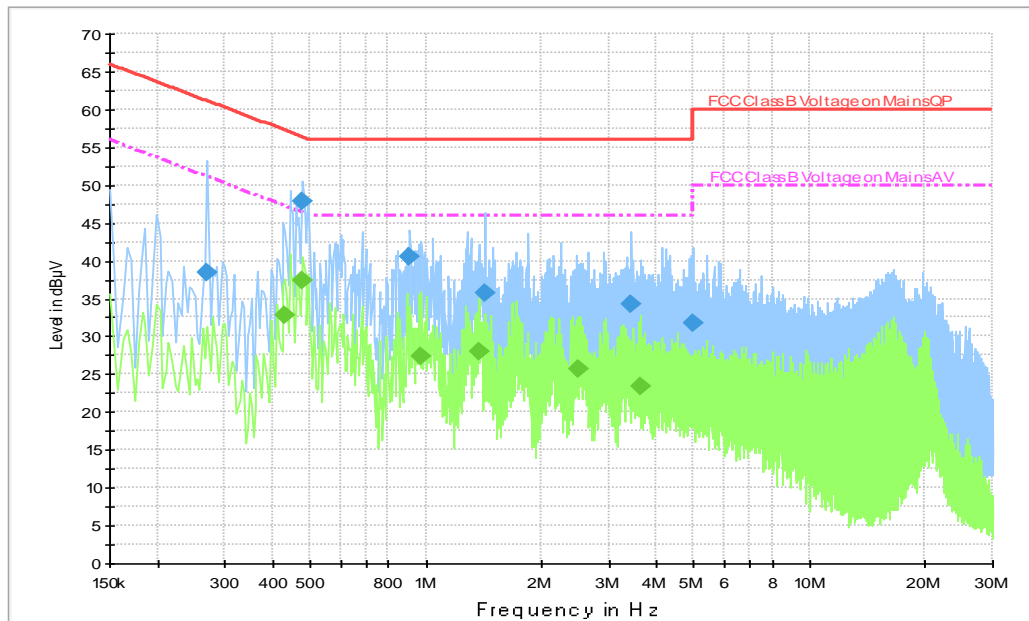

**Fig.B.8.3 AC Powerline Conducted Emission- Bluetooth(Second source)**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.270000	38.5	2000.0	9.000	On	N	19.7	22.6	61.1
0.478000	47.8	2000.0	9.000	On	L1	19.8	8.6	56.4
0.910000	40.6	2000.0	9.000	On	L1	19.7	15.4	56.0
1.430000	35.8	2000.0	9.000	On	N	19.6	20.2	56.0
3.442000	34.4	2000.0	9.000	On	N	19.6	21.6	56.0
4.982000	31.9	2000.0	9.000	On	N	19.6	24.1	56.0

**Final Result 2**

Frequency (MHz)	CAverage (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.430000	32.9	2000.0	9.000	On	L1	19.8	14.4	47.3
0.478000	37.5	2000.0	9.000	On	L1	19.8	8.9	46.4
0.974000	27.4	2000.0	9.000	On	L1	19.6	18.6	46.0
1.370000	28.0	2000.0	9.000	On	L1	19.6	18.0	46.0
2.490000	25.7	2000.0	9.000	On	L1	19.6	20.3	46.0
3.634000	23.4	2000.0	9.000	On	L1	19.6	22.6	46.0



## **B.9. Antenna Requirement**

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

## ANNEX C: Accreditation Certificate



### Accredited Laboratory

A2LA has accredited

#### TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China

for technical competence in the field of

#### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 26<sup>th</sup> day of June 2023.

Mr. Trace McInturf, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 7049.01  
Valid to July 31, 2024

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

\*\*\*END OF REPORT\*\*\*