



FCC PART 15C TEST REPORT No.24T04Z100644-007

for

Shenzhen Tinno Mobile Technology Corp.

Smart Phone

U572AA, U572AC

FCC ID:XD6U572AA

with

Hardware Version: V1.0

Software Version: U572AAV01.04.10

Issued Date: 2024-05-28

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04Z100644-007	Rev.0	1st edition	2024-05-28

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	6
1.4. PROJECT DATE.....	6
1.5. SIGNATURE	6
2. CLIENT INFORMATION.....	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION	7
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1. ABOUT EUT.....	8
3.2. INTERNAL IDENTIFICATION OF EUT	8
3.3. INTERNAL IDENTIFICATION OF AE.....	8
3.4. GENERAL DESCRIPTION.....	9
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	9
4. REFERENCE DOCUMENTS.....	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	9
4.2. REFERENCE DOCUMENTS FOR TESTING	9
5. LABORATORY ENVIRONMENT.....	10
6. TEST RESULTS.....	10
6.1. SUMMARY OF TEST RESULTS	10
6.3. STATEMENTS.....	10
6.4. TEST CONDITIONS	10
7. TEST FACILITIES UTILIZED	11
8. MEASUREMENT UNCERTAINTY	12
8.1. MAXIMUM OUTPUT POWER.....	12
8.2. PEAK POWER SPECTRAL DENSITY.....	12
8.3. DTS 6-DB SIGNAL BANDWIDTH.....	12
8.4. BAND EDGES COMPLIANCE.....	12
8.5. TRANSMITTER SPURIOUS EMISSION	12
8.6. AC POWER-LINE CONDUCTED EMISSION	12
ANNEX A: DETAILED TEST RESULTS.....	13
A.1. MEASUREMENT METHOD.....	13
A.2. MAXIMUM OUTPUT POWER.....	14



A.2.1 ANTENNA GAIN14

A.2.2. PEAK OUTPUT POWER-CONDUCTED14

A.3. PEAK POWER SPECTRAL DENSITY.....15

A.4. DTS 6-DB SIGNAL BANDWIDTH20

A.5. BAND EDGES COMPLIANCE25

A.6. TRANSMITTER SPURIOUS EMISSION.....28

 A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED28

 A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED43

A.7. AC POWER-LINE CONDUCTED EMISSION54

A.8. ANTENNA REQUIREMENT59

ANNEX B: EUT PARAMETERS.....59

ANNEX C: ACCREDITATION CERTIFICATE59



1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Location 1:CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Location 2:CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
100191, P. R. China

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%


1.4. Project date

Testing Start Date: 2024-04-20
Testing End Date: 2024-05-20

1.5. Signature



Yao Xingyu
(Prepared this test report)



Zheng Wei
(Reviewed this test report)



Pang Shuai
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Shenzhen Tinno Mobile Technology Corp.
27-001, South Side of Tianlong Mobile Headquarters Building,
Address: Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen, PRC
City: Shenzhen
Postal Code: /
Country: China
Telephone: 0755-86095550
Fax: 0755-86095551

2.2. Manufacturer Information

Company Name: Shenzhen Tinno Mobile Technology Corp.
27-001, South Side of Tianlong Mobile Headquarters Building,
Address: Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen, PRC
City: Shenzhen
Postal Code: /
Country: China
Telephone: 0755-86095550
Fax: 0755-86095551

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart Phone
Model name	U572AA, U572AC
FCC ID	XD6U572AA
With WLAN Function	Yes
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	24.65dBm
Nominal Voltage	3.85V
Extreme High Voltage	4.4V
Extreme Low Voltage	3.5V

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT18a	864975070007818	V1.0	U572AAV01.04.10	2024-05-07
UT27a	864975070007214	V1.0	U572AAV01.04.10	2024-04-25

*EUT ID: is used to identify the test sample in the lab internally.

UT18a is used for Conduction test, UT27a is used for Radiation test.

3.3. Internal Identification of AE

AE ID*	Description	Model	Manufacturer	Note
AE1	Battery	TNO496386AG-N1	GUANGDONG FENGHUA NEW ENERGY CO.,LTD	---
AE2-1	Charger	TN-050200U3	Guangdong Beicom Electronics Co.,Ltd	First source
AE2-2	Charger	LM-603U-05020 0U02UL	Chongqing Lianmao Electronics Co.,LTD.	Second source
AE3-1	USB cable	T365-011B-1	Shenzhen Yihuaxing Electronics Co. Ltd.	First source
AE3-2	USB cable	336275	SUNTOPS ELECTRONICS CO.,LTD	Second source

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of Mobile Phone with integrated antenna and inbuilt battery.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2021
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Federal Communications Commission Office of Engineering and Technology Laboratory Division	2013
KDB 558074 D01	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019

5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. Test Results

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
DTS 6-dB Signal Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.85V
Humidity	44%

7. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSW67	104051	Rohde & Schwarz	1 year	2025-04-01
2	Test Receiver	ESCI	100344	R&S	1 year	2025-04-01
3	LISN	ENV216	101200	R&S	1 year	2025-05-16
4	Attenuator	10dB/2W	/	Rosenberger	/	/
5	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103144	R&S	1 year	2024-11-26
2	Test Receiver	ESW44	103023	R&S	1 year	2024-06-08
3	EMI Antenna	VULB 9163	01222	SCHWARZBE CK	2 years	2025-01-28
4	EMI Antenna	3115	6914	ETS-Lindgren	2 years	2025-05-07
5	EMI Antenna	3116	2663	ETS-Lindgren	2 years	2024-11-22

Test software information(HL)

Test Item	Software	Manufacturer
Conducted emission	EMC32 V8.53.0	R&S
Radiated emission	EMC32 V11.50.00	R&S

8. Measurement Uncertainty

8.1. Maximum Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3. DTS 6-dB Signal Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5. Transmitter Spurious Emission

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	4.92
$30\text{MHz} \leq f \leq 1\text{GHz}$	4.72
$1\text{GHz} \leq f \leq 18\text{GHz}$	4.84
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.12

8.6. AC Power-line Conducted Emission

Measurement Uncertainty : 3.08dB,k=2

ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

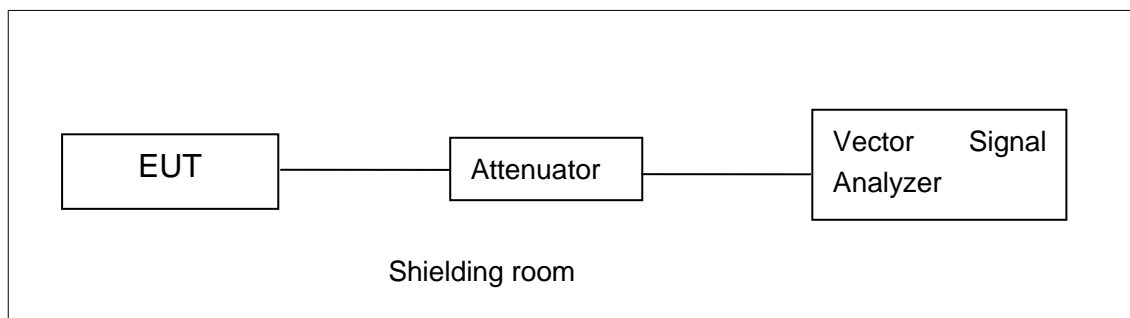


Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements

A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 3MHz;

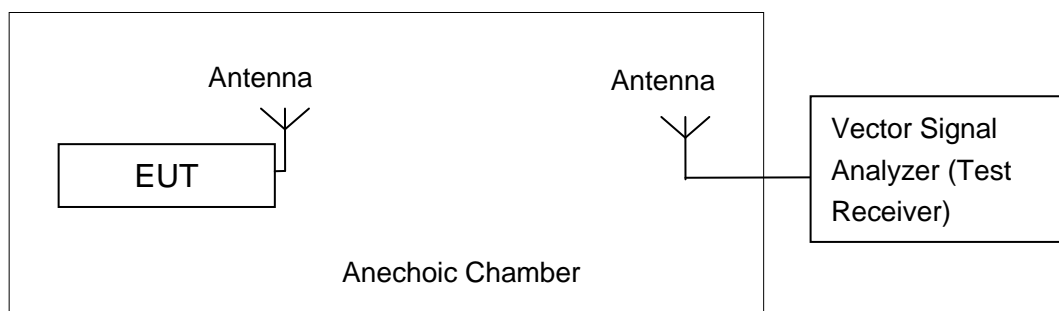


Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements

A.2. Maximum Output Power

Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

A.2.1 Antenna Gain

Antenna gain is 0.2dBi and the value is supplied by the applicant or manufacturer.

A.2.2. Peak Output Power-conducted

EUT ID: UT18a

Measurement Results:

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	20.02	19.95	19.93
802.11g	6	24.63	24.31	24.34

The data rate 1Mbps and 6Mbps are selected as worst condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	MCS0	24.65	24.31	24.26

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

The duty cycle of all mode are 100%

Conclusion: Pass

A.3. Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-2013-clause 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to RBW = 3 kHz.
- d) Set the VBW = 10 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

Measurement Limit:


Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

EUT ID: UT18a

Measurement Results:

TestMode	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-4.46	≤8.00	PASS
	2437	-4.70	≤8.00	PASS
	2462	-4.35	≤8.00	PASS
11G	2412	-7.70	≤8.00	PASS
	2437	-7.47	≤8.00	PASS
	2462	-8.33	≤8.00	PASS
11N20SISO	2412	-7.97	≤8.00	PASS
	2437	-7.98	≤8.00	PASS
	2462	-8.04	≤8.00	PASS

Test graphs as below:

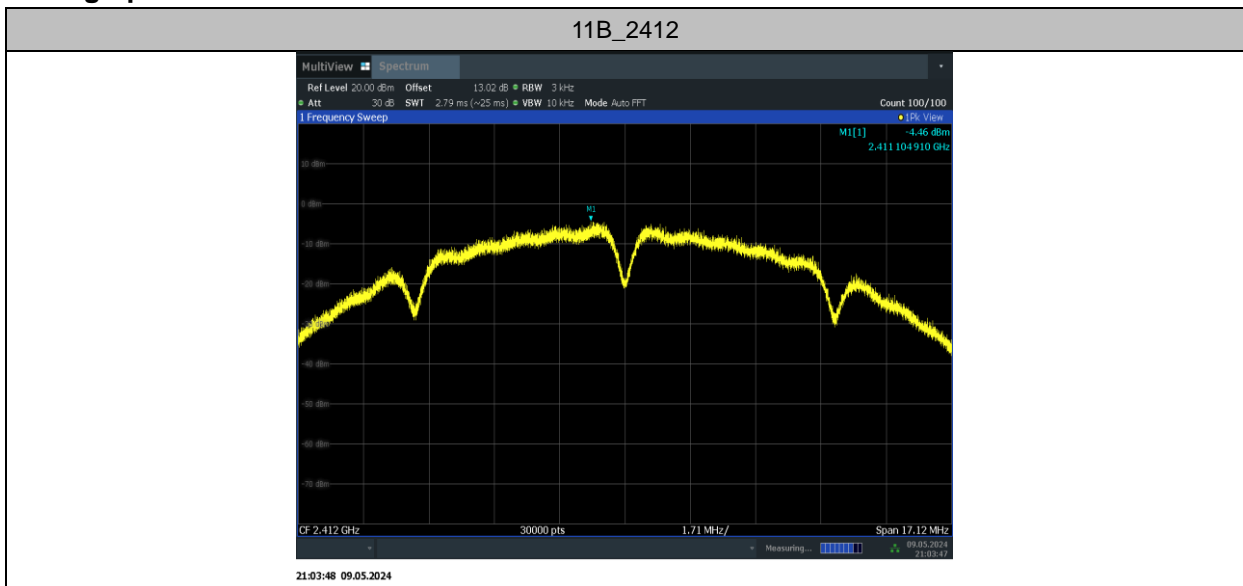


11B_2437



21:02:17 09.05.2024

11B_2462

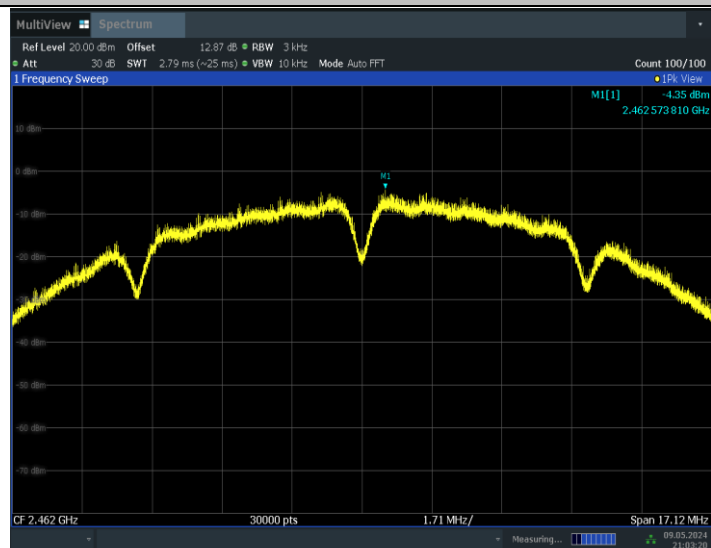


21:03:20 09.05.2024


11G_2412




11G_2437

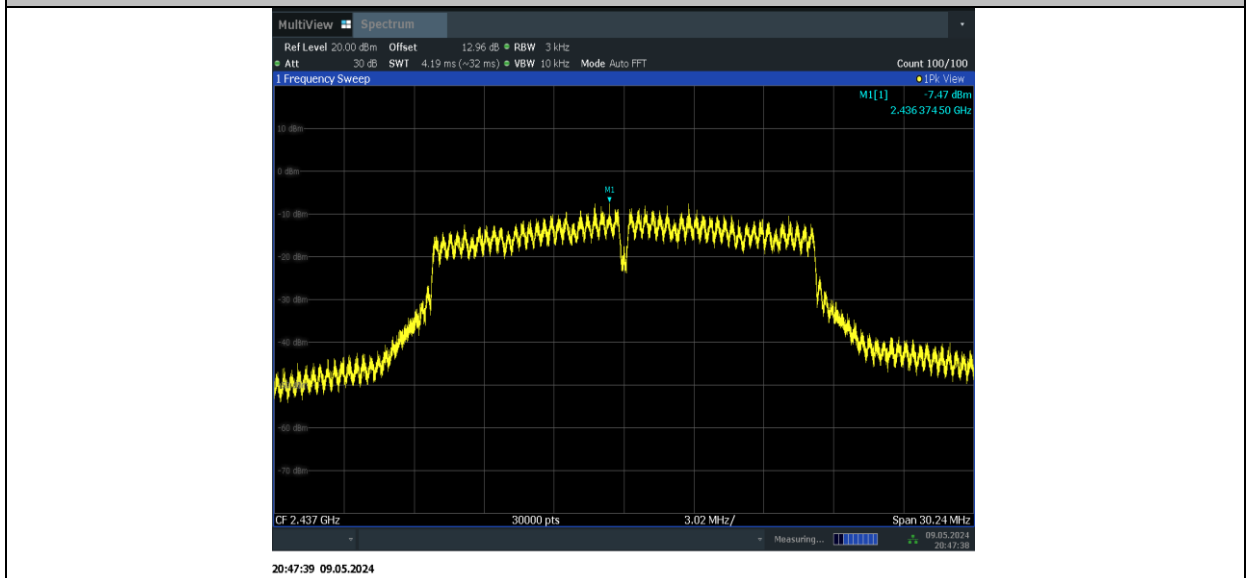


11G_2462

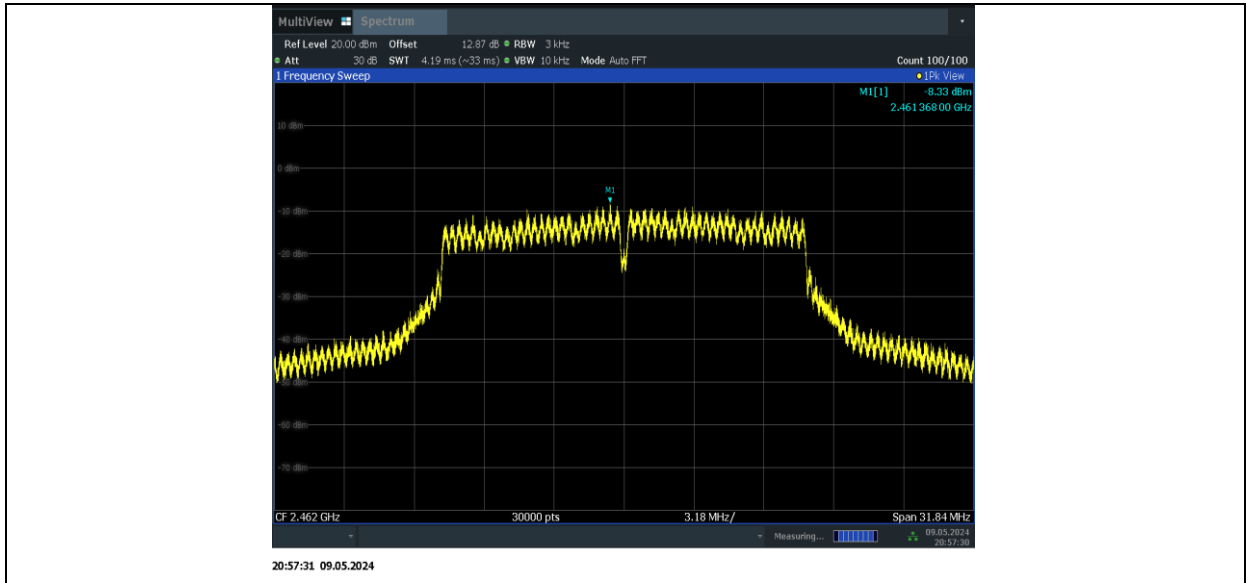

11N20SISO_2412

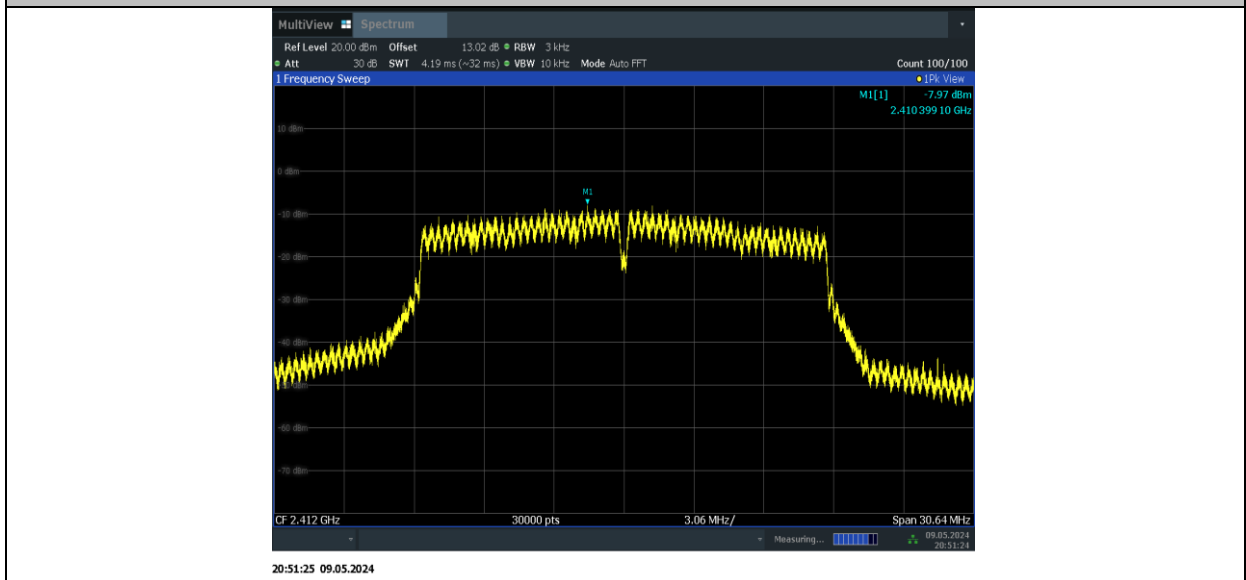

11N20SISO_2437

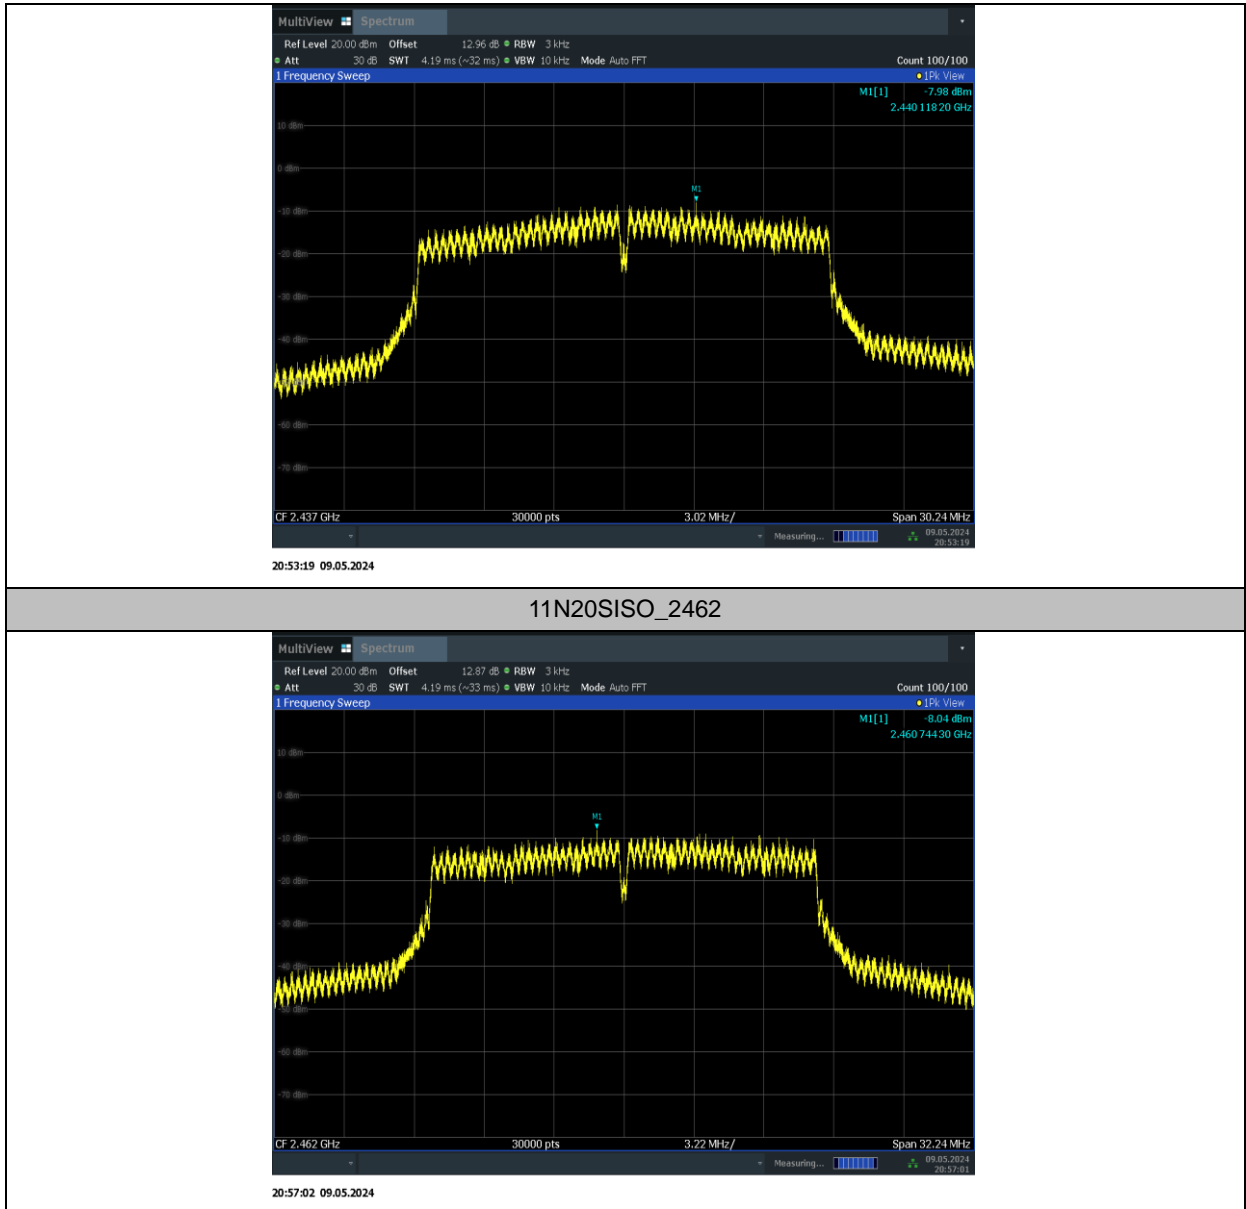

Conclusion: Pass

A.4. DTS 6-dB Signal Bandwidth

Method of Measurement: See ANSI C63.10-2013 section 11.8.1.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) = 300 kHz.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Limit:


Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

EUT ID: UT18a


Measurement Result:

TestMode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	8.56	2407.44	2416.00	0.5	PASS
	2437	8.04	2432.96	2441.00	0.5	PASS
	2462	8.56	2457.96	2466.52	0.5	PASS
11G	2412	15.72	2403.84	2419.56	0.5	PASS
	2437	15.12	2429.44	2444.56	0.5	PASS
	2462	15.92	2454.20	2470.12	0.5	PASS
11N20SISO	2412	15.32	2404.20	2419.52	0.5	PASS
	2437	15.12	2429.44	2444.56	0.5	PASS
	2462	16.12	2454.40	2470.52	0.5	PASS

Test graphs as below:

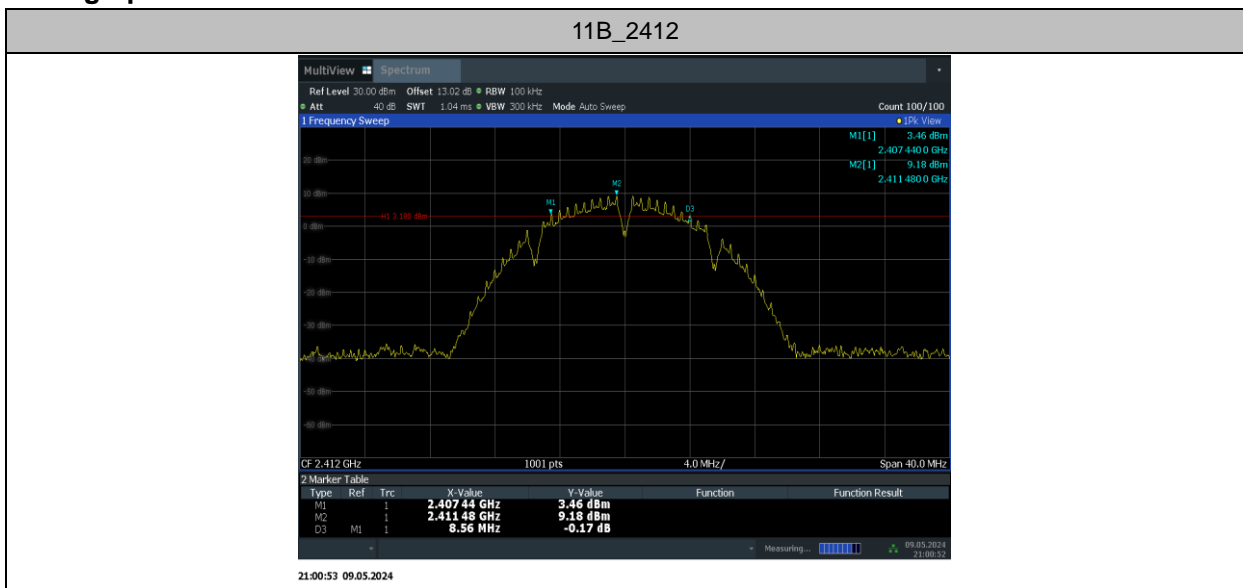


11B_2437

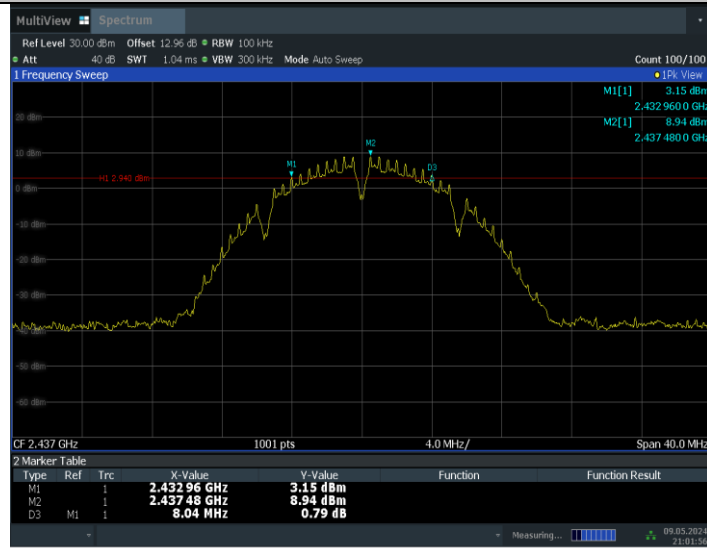


21:01:56 09.05.2024

11B_2462

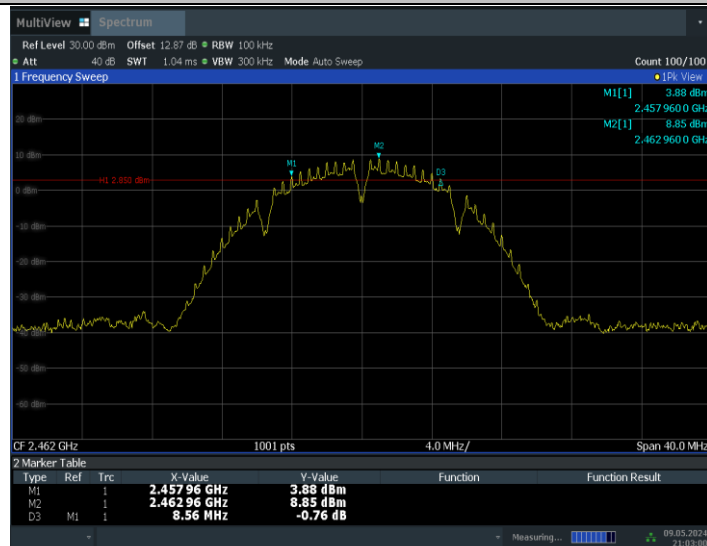


21:03:00 09.05.2024


11G_2412

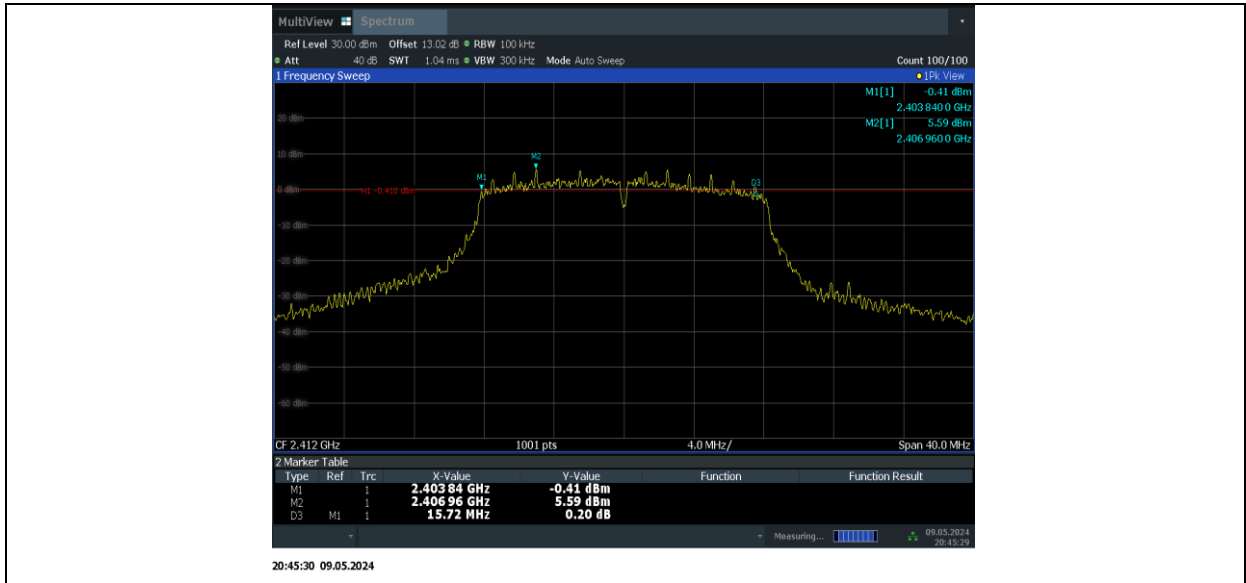


11G_2437

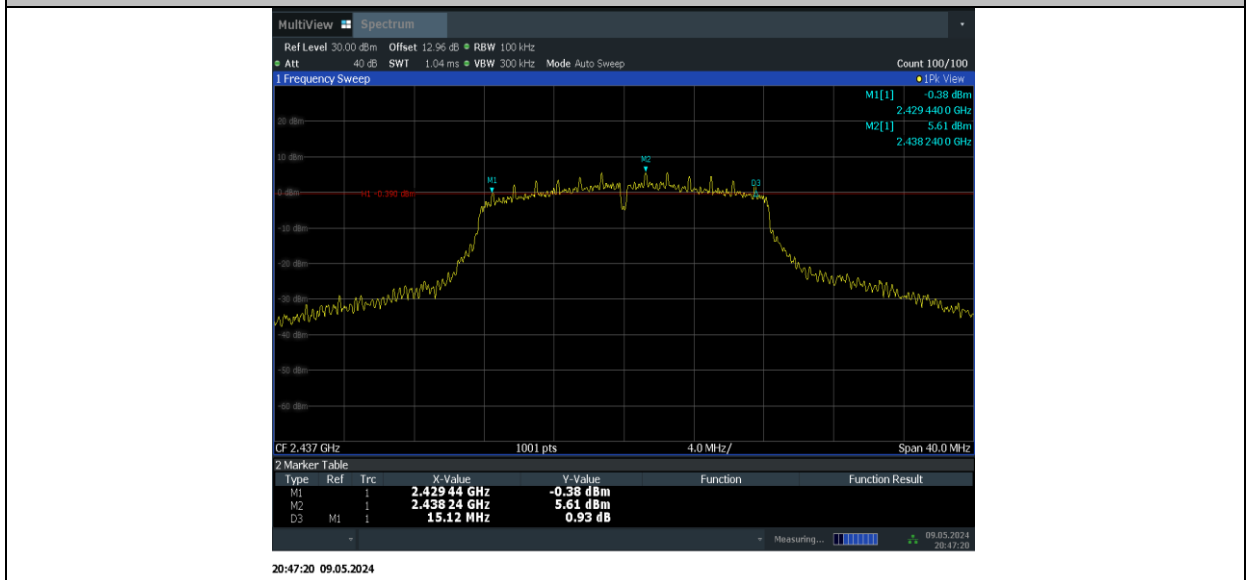


11G_2462

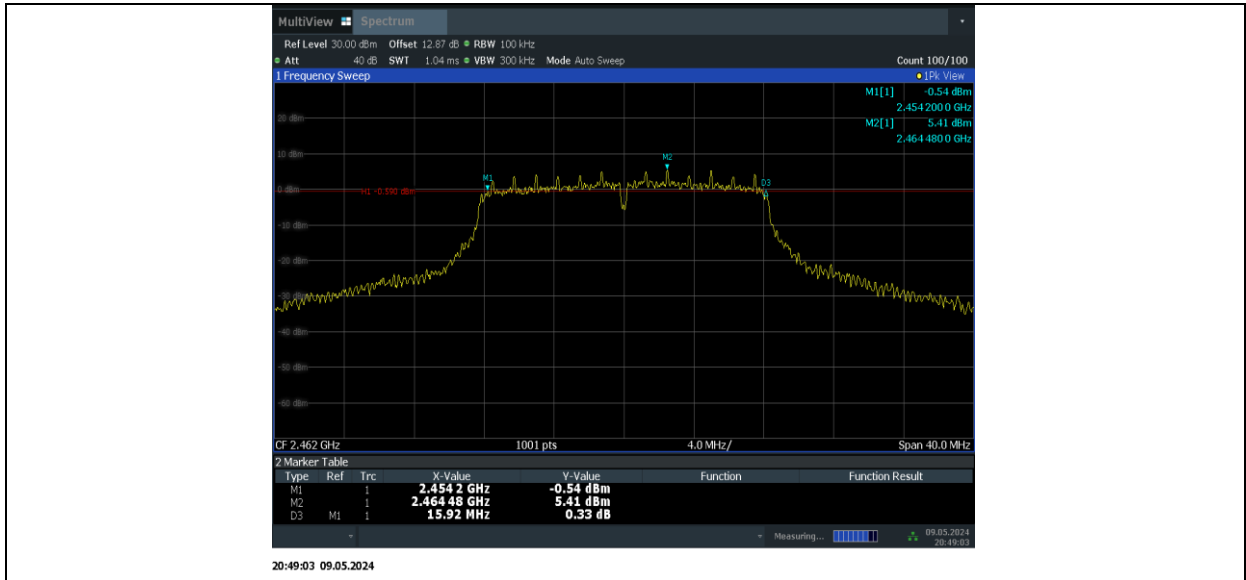


11N20SISO_2412

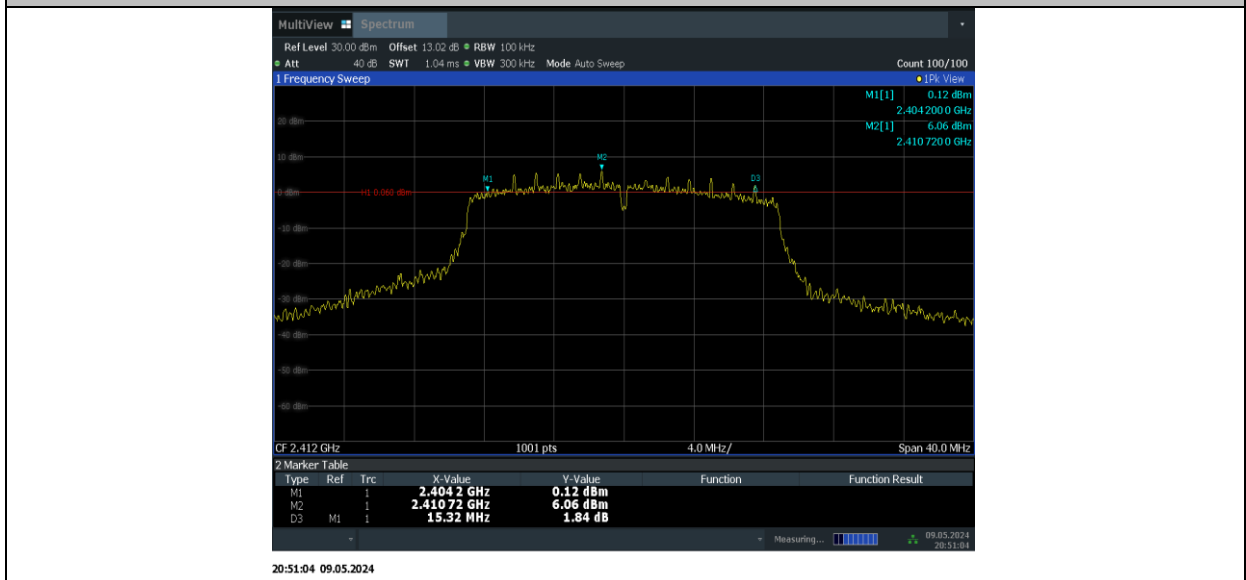

11N20SISO_2437

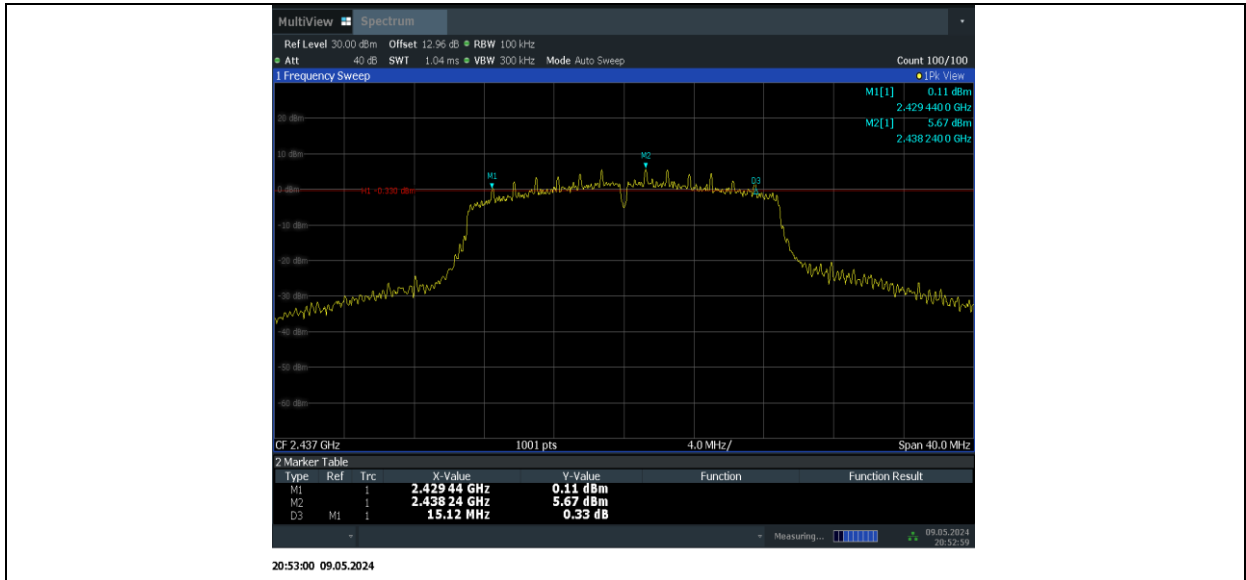

11N20SISO_2462

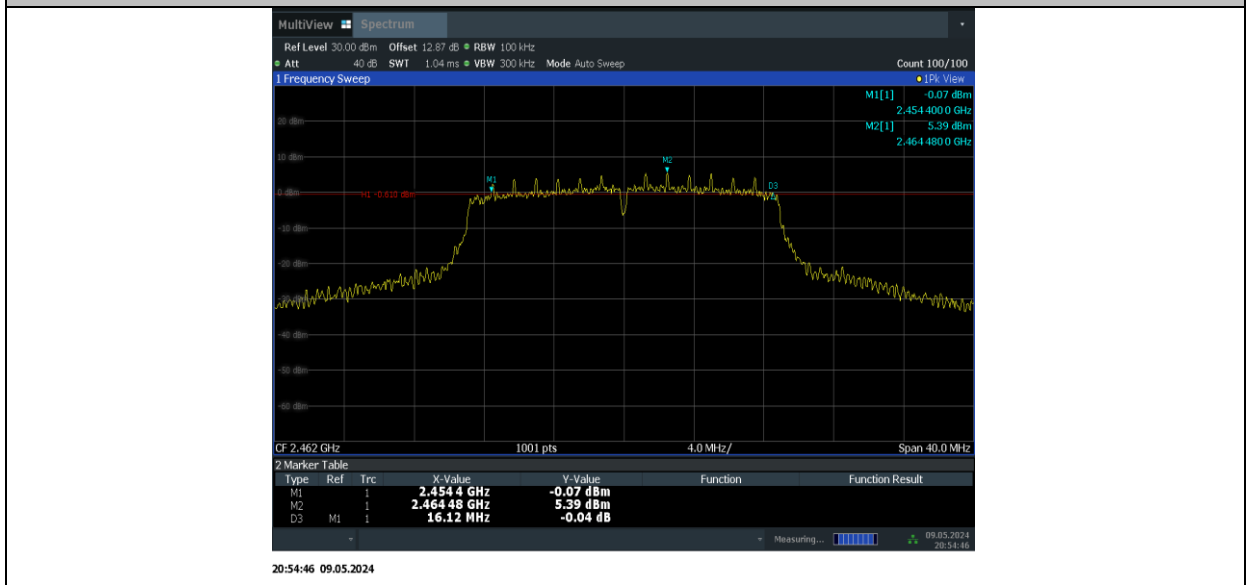

Conclusion: Pass

A.5. Band Edges Compliance

Method of Measurement: See ANSI C63.10-2013-clause 6.10.4

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 100MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

Measurement Limit:


Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20


EUT ID: UT18a

Measurement Result:


TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	9.20	-39.05	≤-10.8	PASS
	High	2462	8.97	-46.12	≤-11.03	PASS
11G	Low	2412	6.09	-24.16	≤-13.91	PASS
	High	2462	5.42	-37.58	≤-14.58	PASS
11N20SISO	Low	2412	5.71	-24.2	≤-14.29	PASS
	High	2462	5.37	-34.68	≤-14.63	PASS

Test graphs as below:

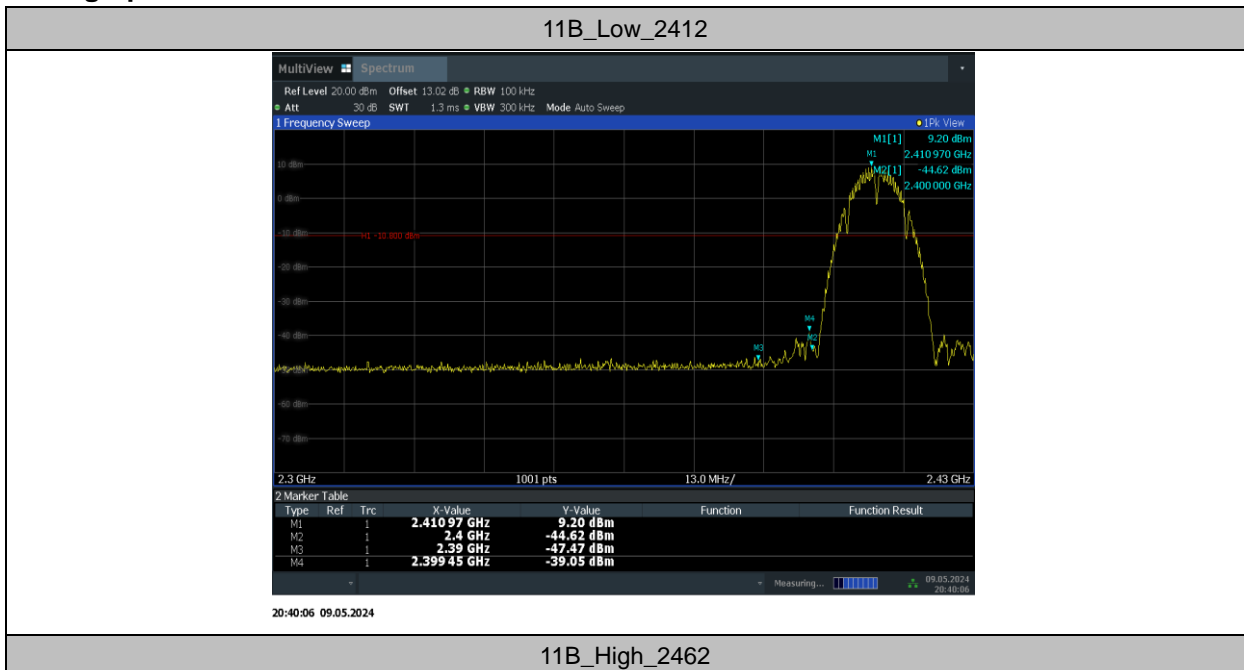


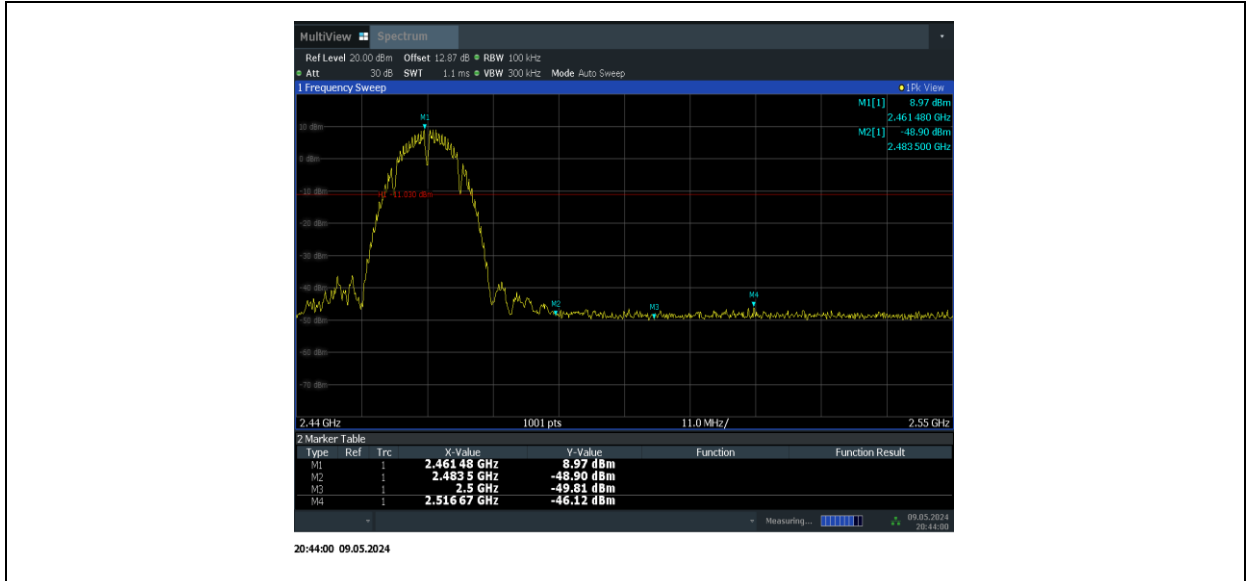

11G_Low_2412

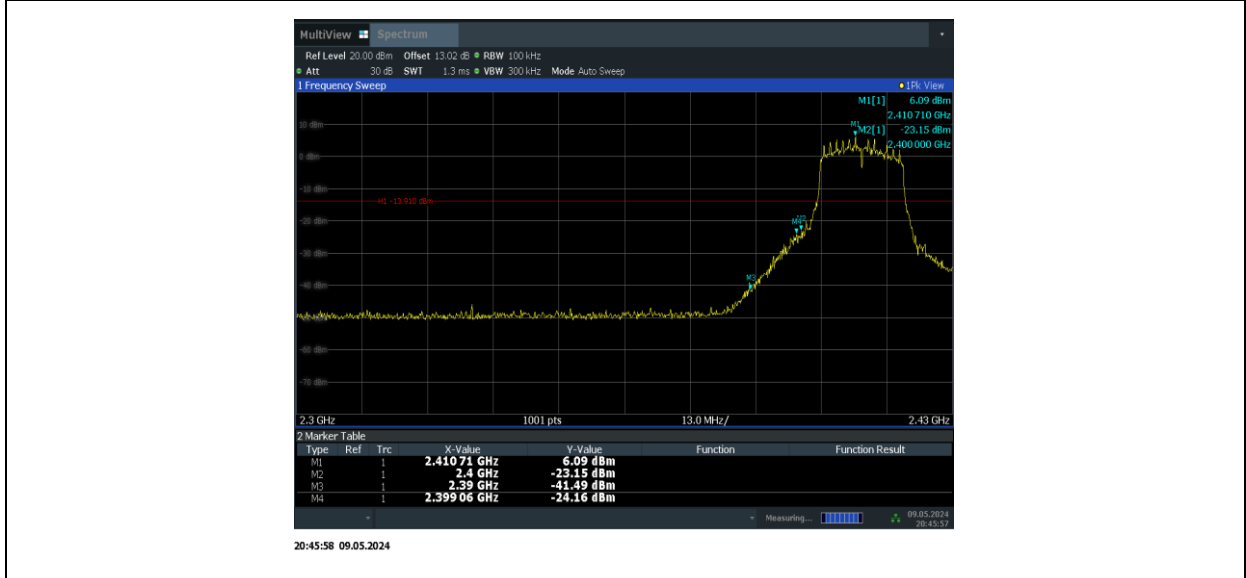

11G_High_2462

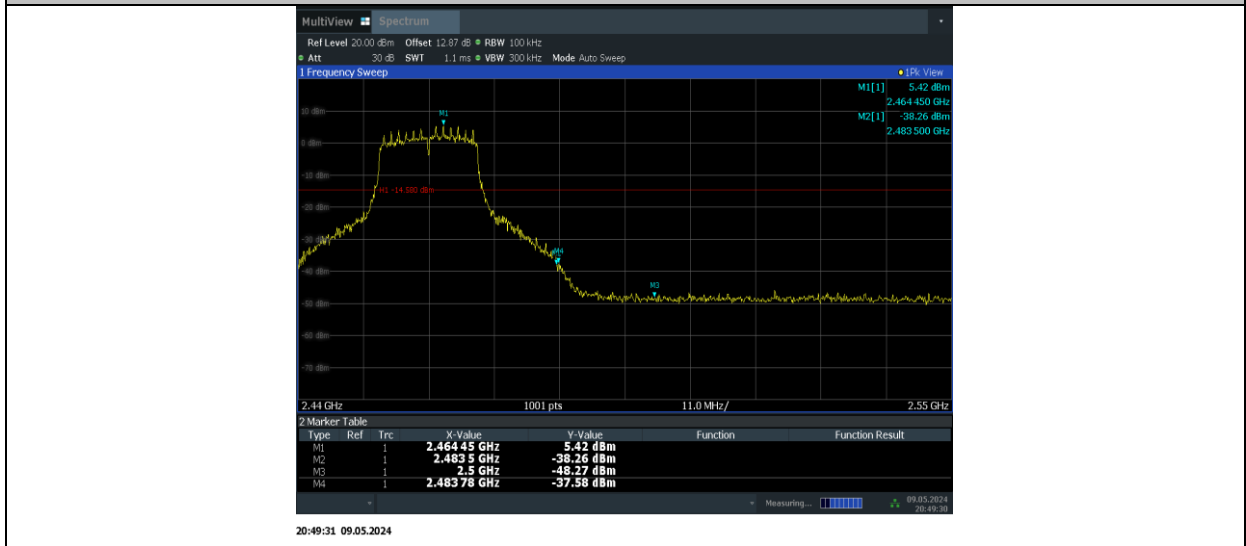


11N20SISO_Low_2412



20:51:35 09.05.2024

11N20SISO_High_2462

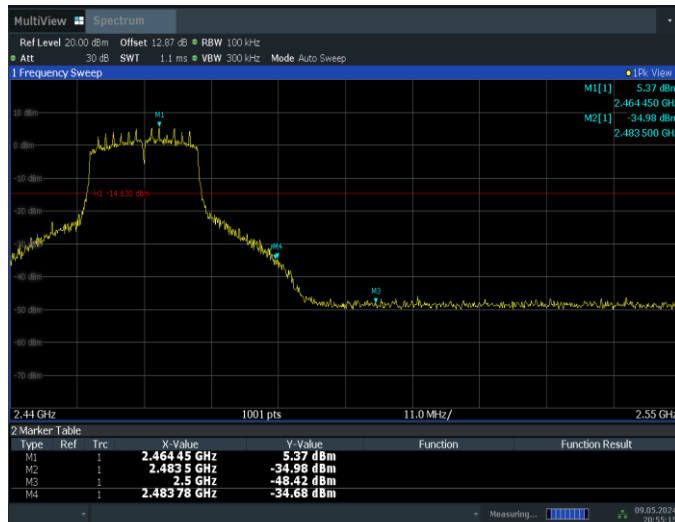

20:55:15 09.05.2024

Conclusion: Pass

A.6. Transmitter Spurious Emission

A.6.1 Transmitter Spurious Emission – Conducted

Method of Measurement: See ANSI C63.10-2013-clause 11.11

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency
- b) Set the span to ≥ 1.5 times the DTS bandwidth
- c) Set the RBW= 100 kHz
- d) Set the VBW= 300 kHz
- e) Detector = Peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW = 300 kHz.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth


EUT ID: UT18a


Measurement Results:

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	9.70	9.70	---	PASS
		30~1000	9.70	-56.84	≤ -10.3	PASS
		1000~26500	9.70	-43.52	≤ -10.3	PASS
	2437	Reference	9.05	9.05	---	PASS
		30~1000	9.05	-56.67	≤ -10.95	PASS

	2462	1000~26500	9.05	-43.84	≤ -10.95	PASS	
		Reference	9.09	9.09	---	PASS	
		30~1000	9.09	-57.15	≤ -10.91	PASS	
		1000~26500	9.09	-43.14	≤ -10.91	PASS	
11G	2412	Reference	6.28	6.28	---	PASS	
		30~1000	6.28	-56.81	≤ -13.72	PASS	
		1000~26500	6.28	-43.27	≤ -13.72	PASS	
	2437	Reference	5.86	5.86	---	PASS	
		30~1000	5.86	-56.66	≤ -14.14	PASS	
		1000~26500	5.86	-43.76	≤ -14.14	PASS	
	2462	Reference	5.38	5.38	---	PASS	
		30~1000	5.38	-56.48	≤ -14.62	PASS	
		1000~26500	5.38	-43.74	≤ -14.62	PASS	
	11N20SISO	2412	Reference	6.46	6.46	---	PASS
			30~1000	6.46	-56.11	≤ -13.54	PASS
			1000~26500	6.46	-43.54	≤ -13.54	PASS
2437		Reference	5.84	5.84	---	PASS	
		30~1000	5.84	-56.25	≤ -14.16	PASS	
		1000~26500	5.84	-44.18	≤ -14.16	PASS	
2462		Reference	5.37	5.37	---	PASS	
		30~1000	5.37	-56.76	≤ -14.63	PASS	
		1000~26500	5.37	-44.4	≤ -14.63	PASS	

Test graphs as below:

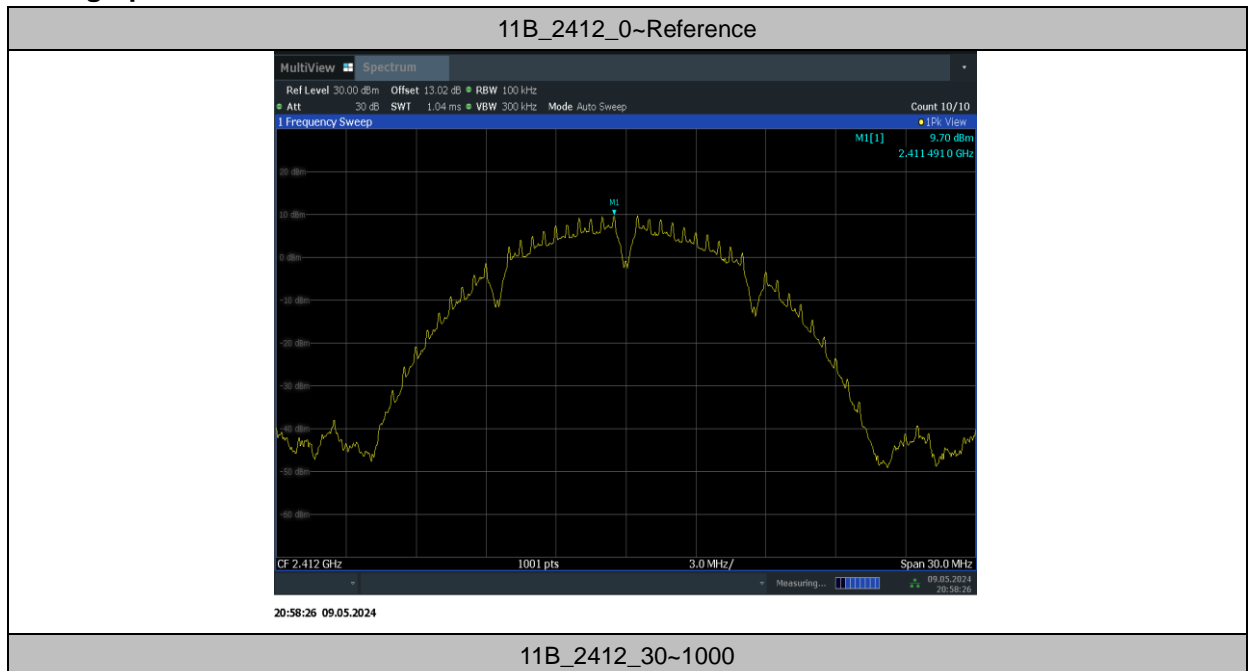


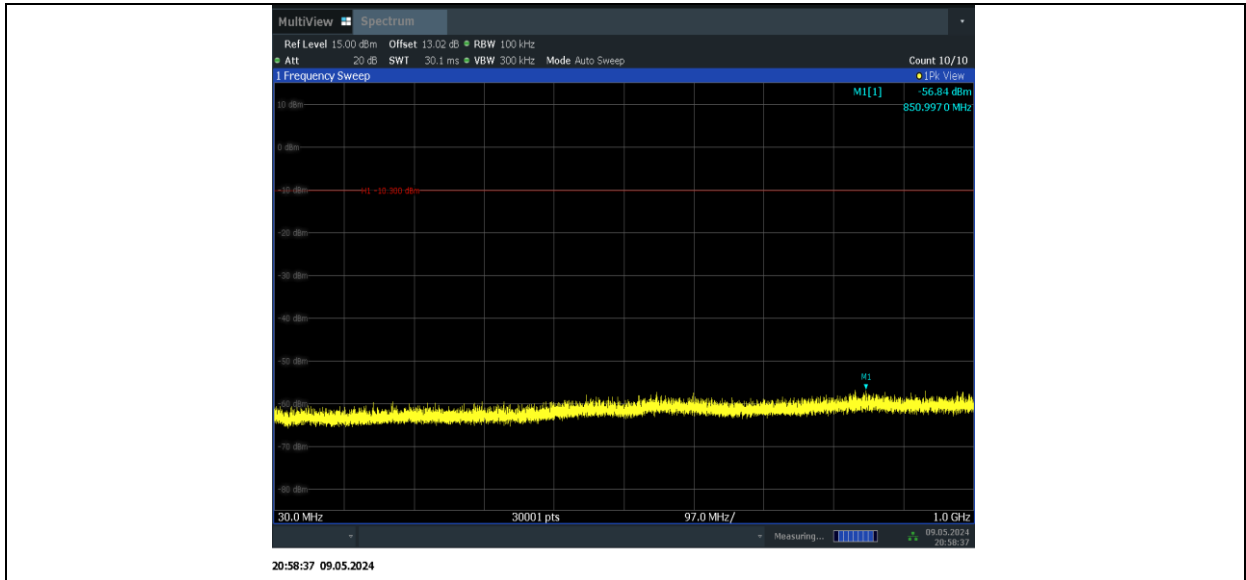


11B_2412_1000~26500




11B_2437_0~Reference

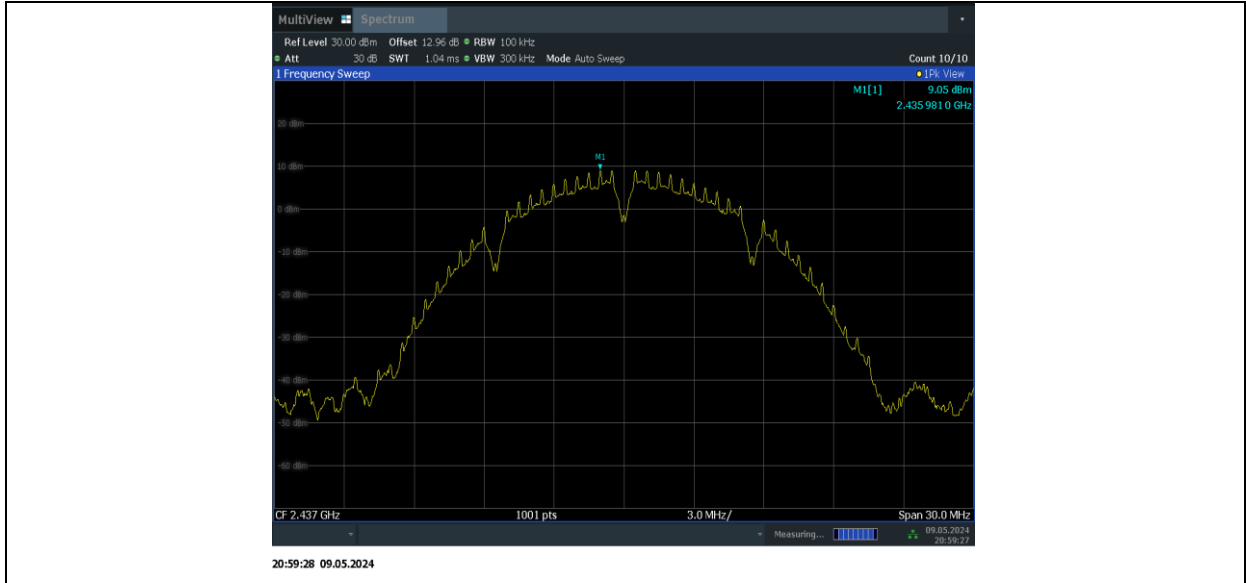


11B_2437_30~1000

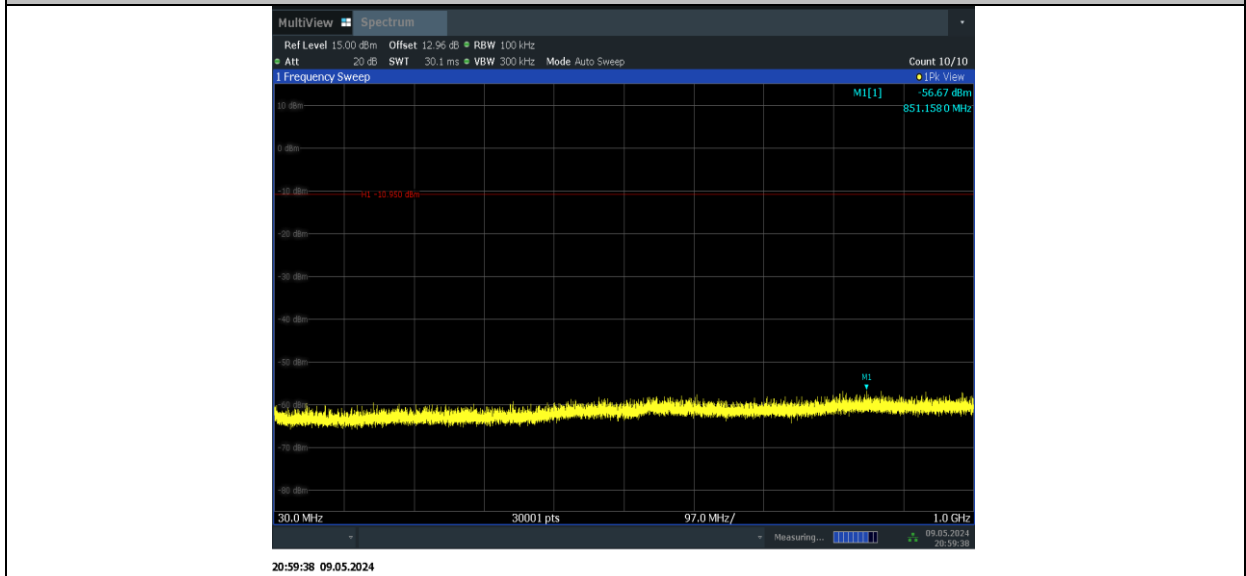


11B_2437_1000~26500

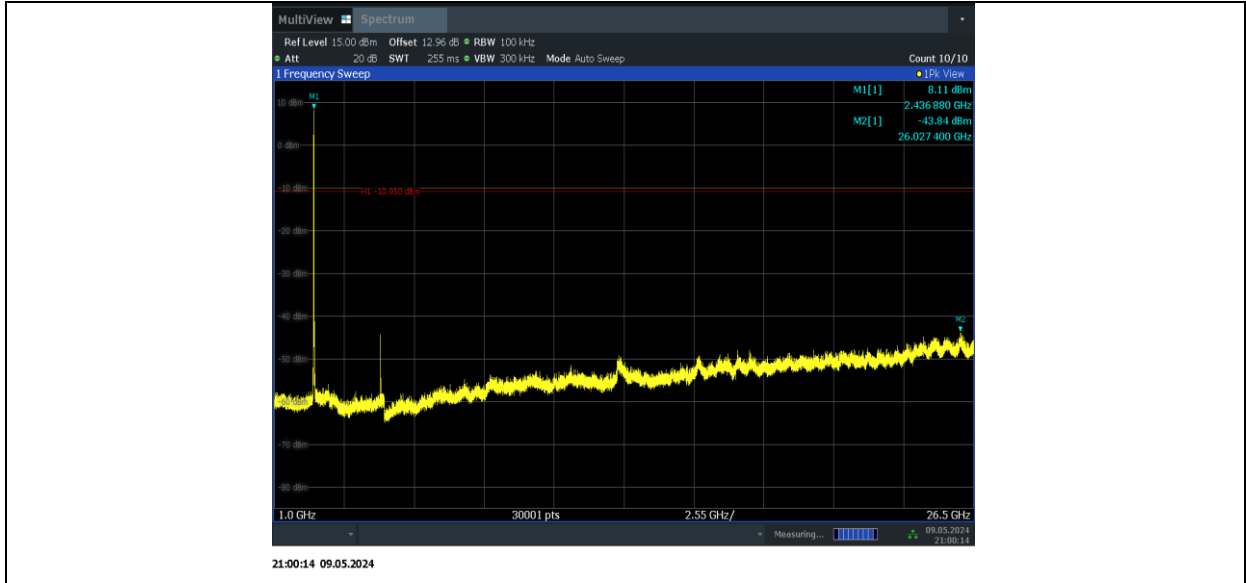

11B_2462_0~Reference

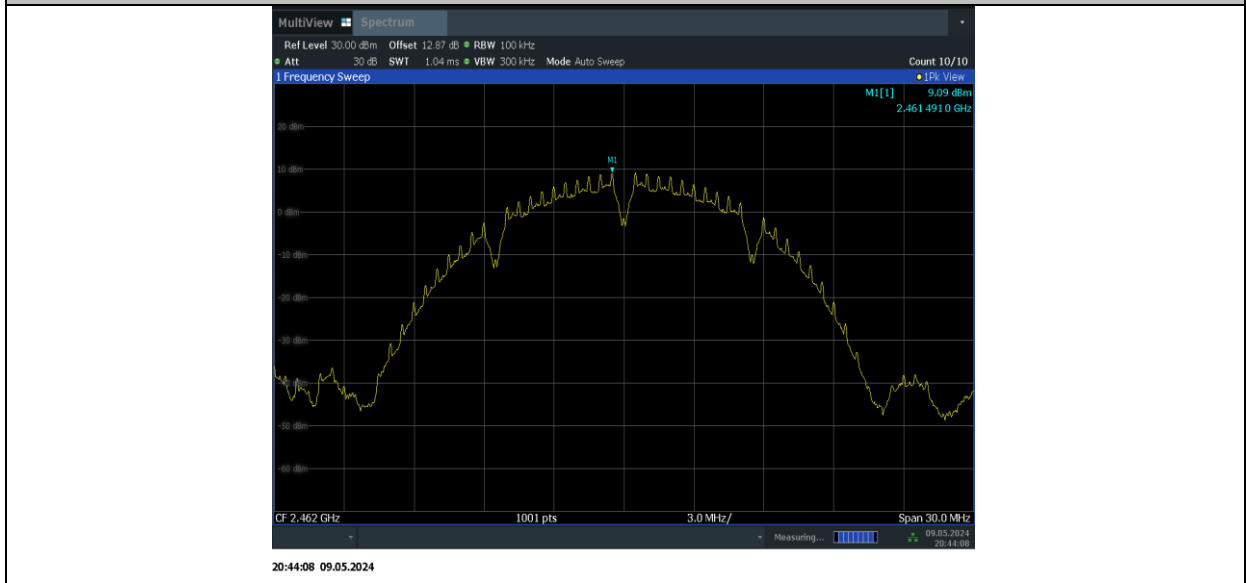


11B_2462_30~1000

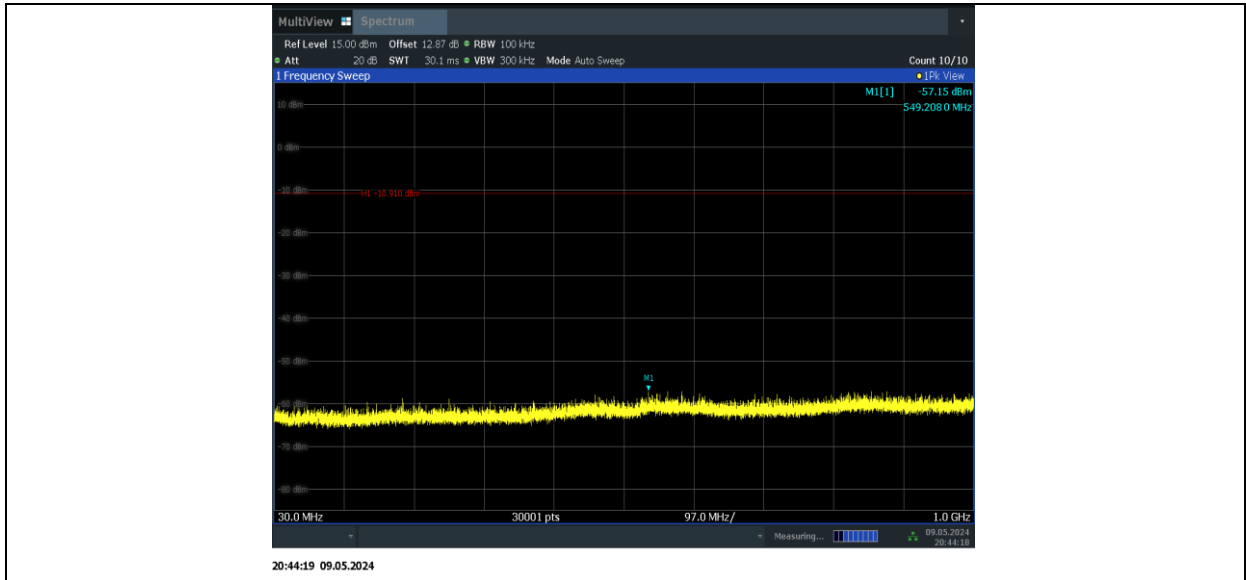


11B_2462_1000~26500



11G_2412_0~Reference

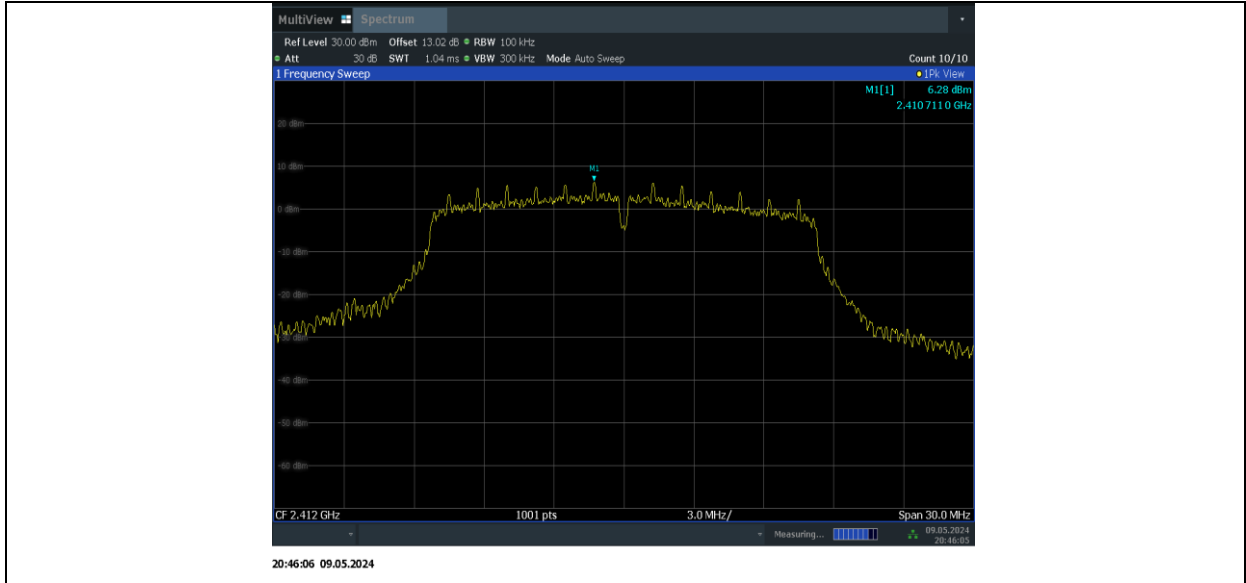


11G_2412_30~1000

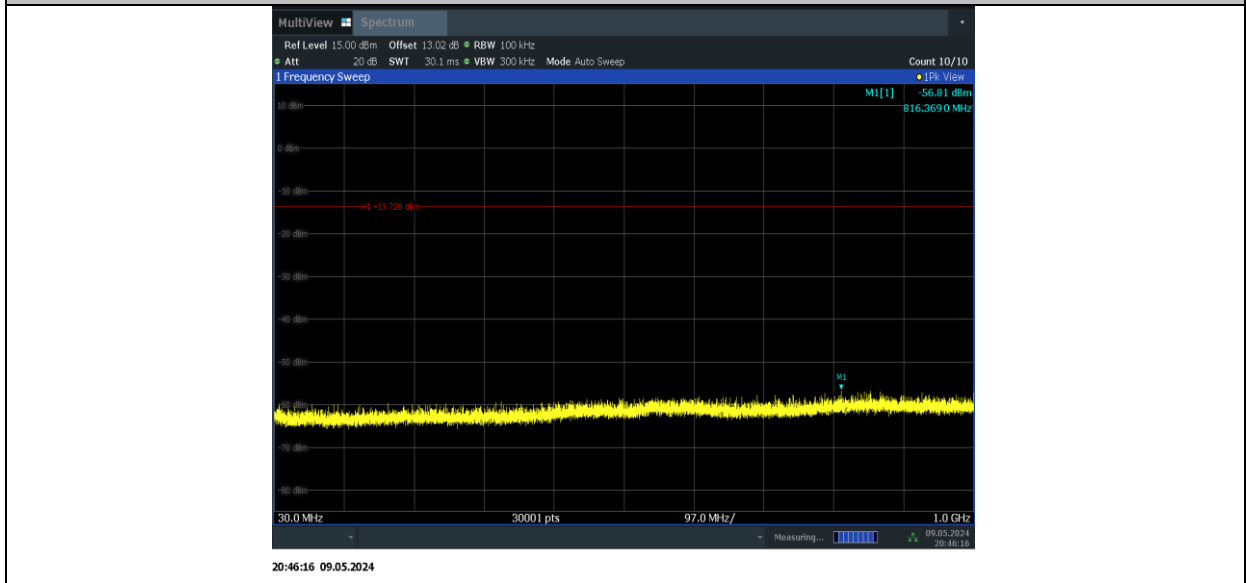


11G_2412_1000~26500




11G_2437_0~Reference

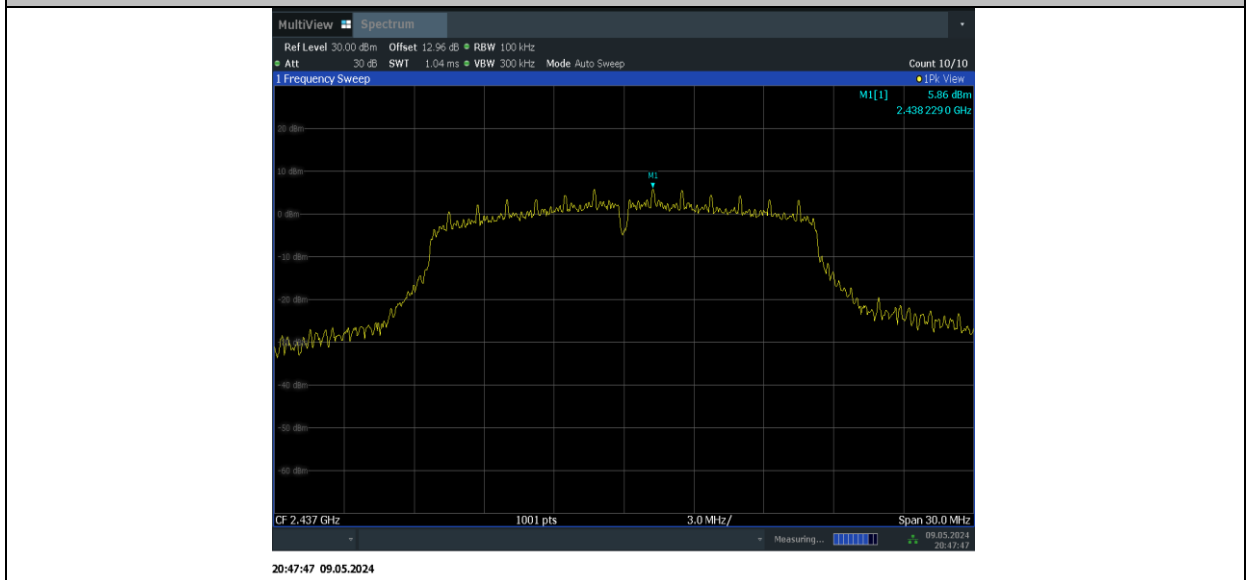


11G_2437_30~1000

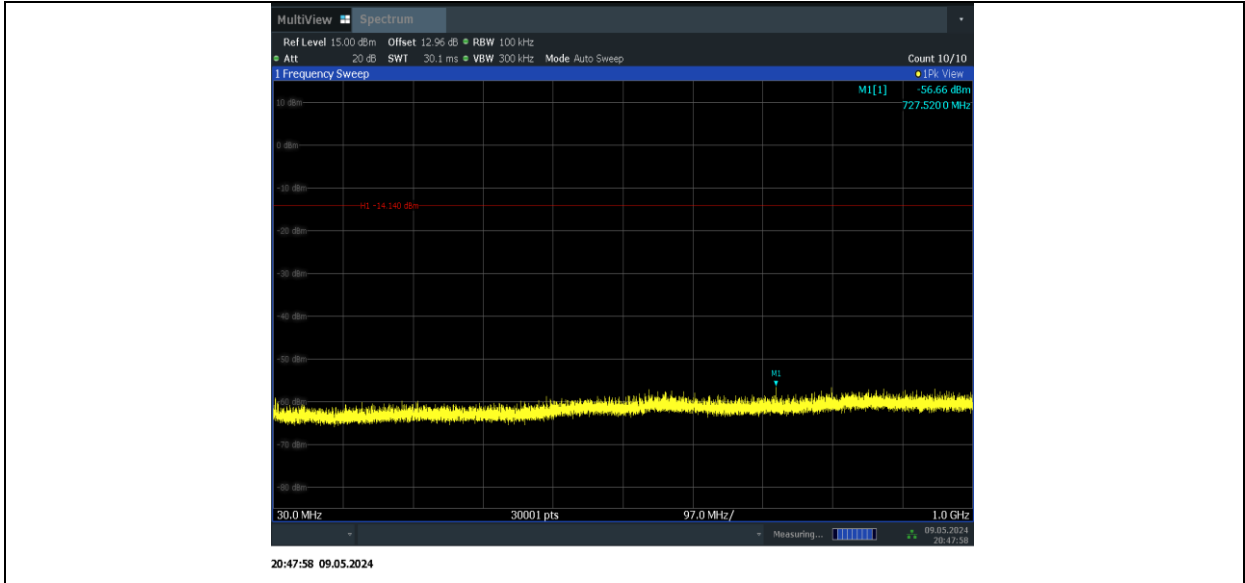


11G_2437_1000~26500

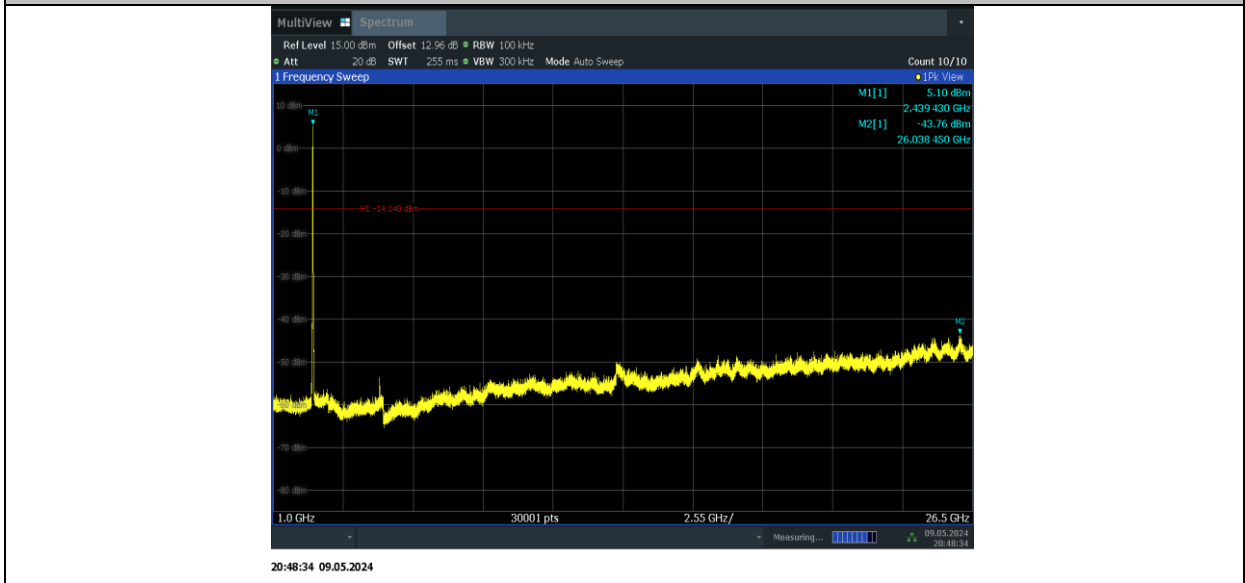

11G_2462_0~Reference

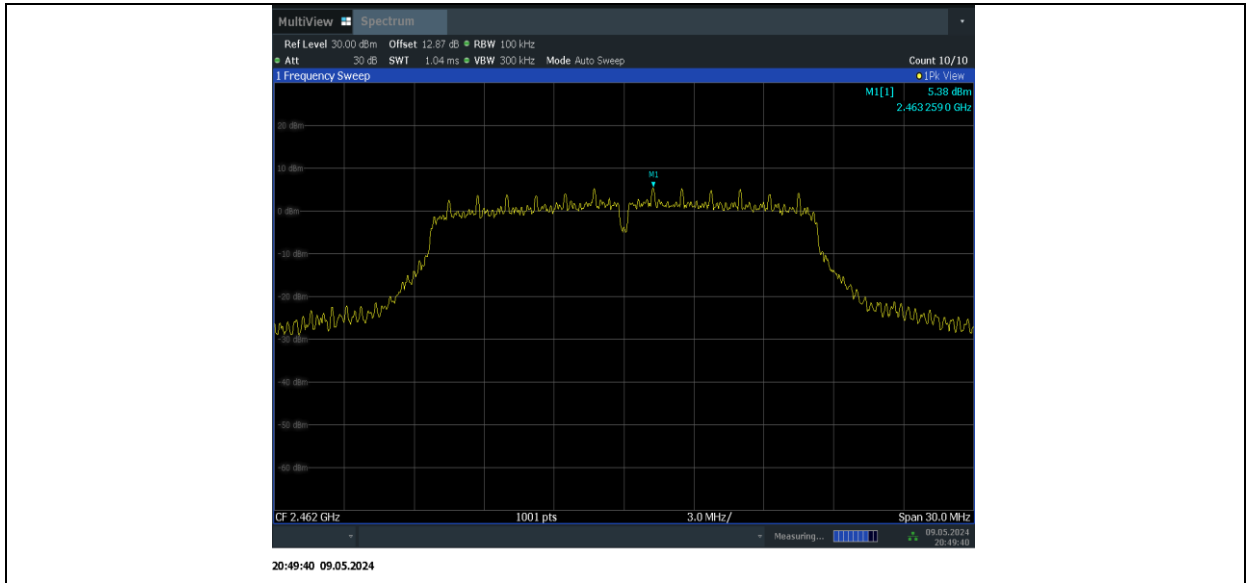


11G_2462_30~1000

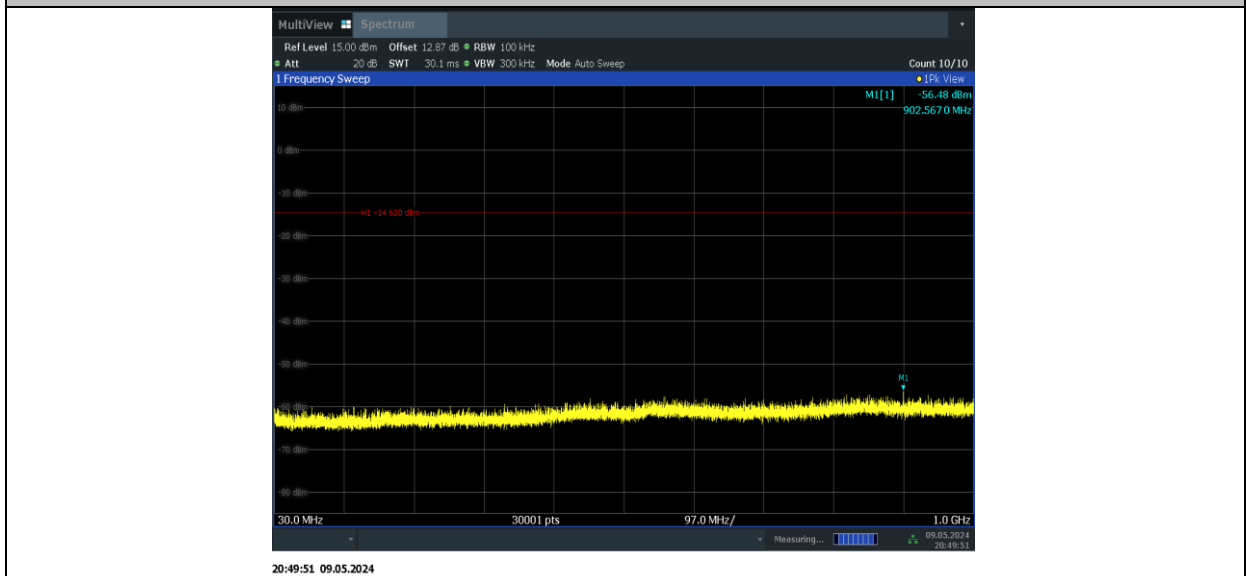


11G_2462_1000~26500



11N20SISO_2412_0~Reference

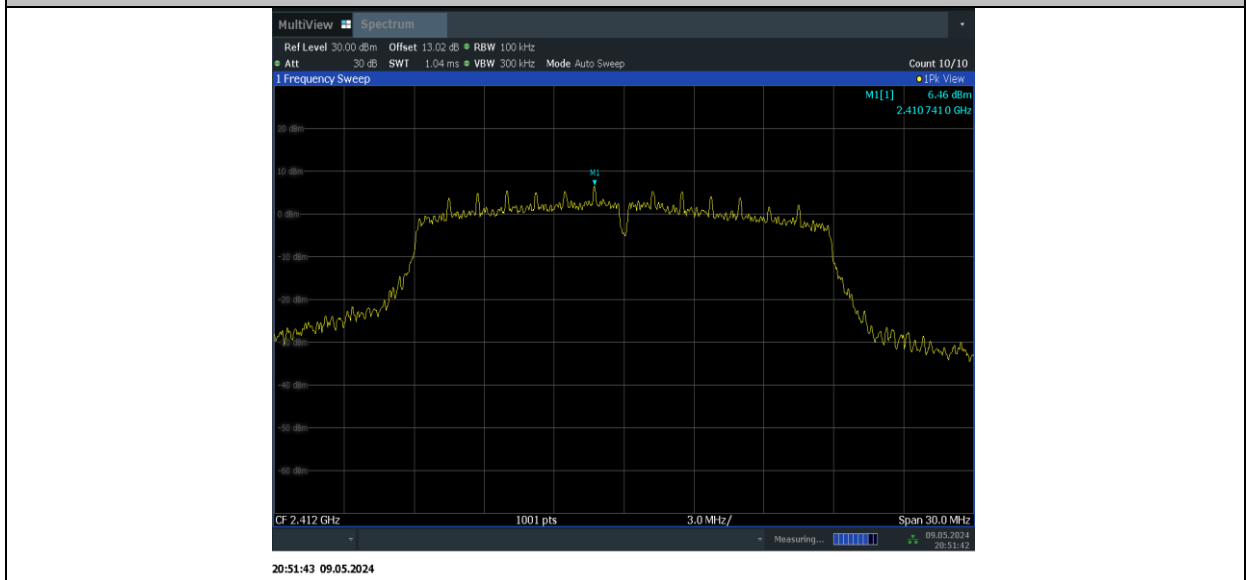


11N20SISO_2412_30~1000

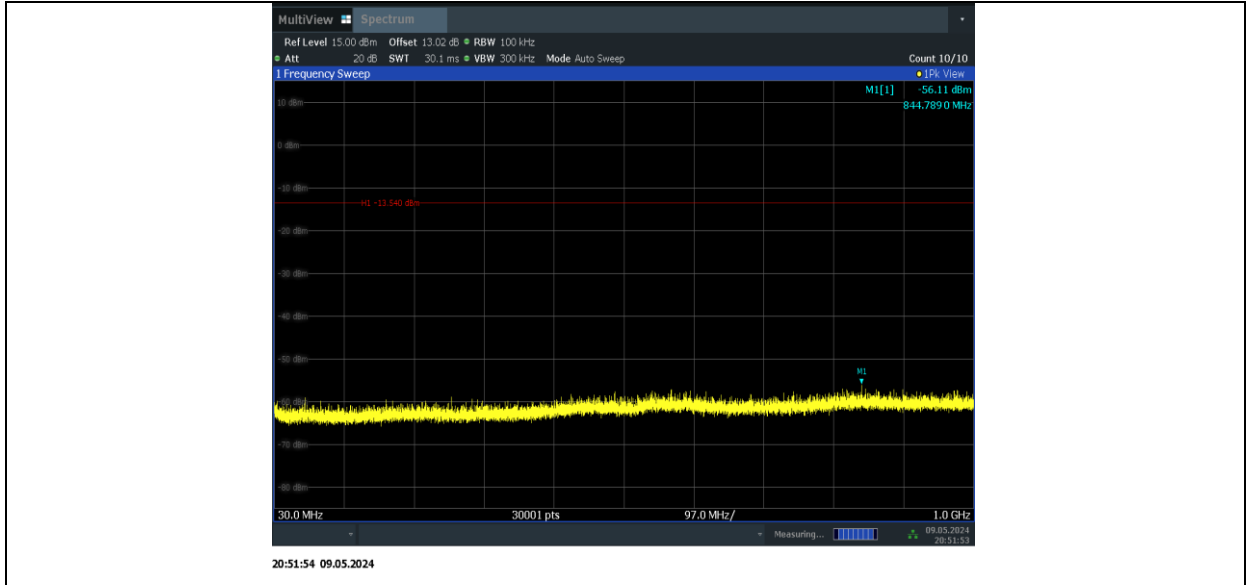


11N20SISO_2412_1000~26500




11N20SISO_2437_0~Reference

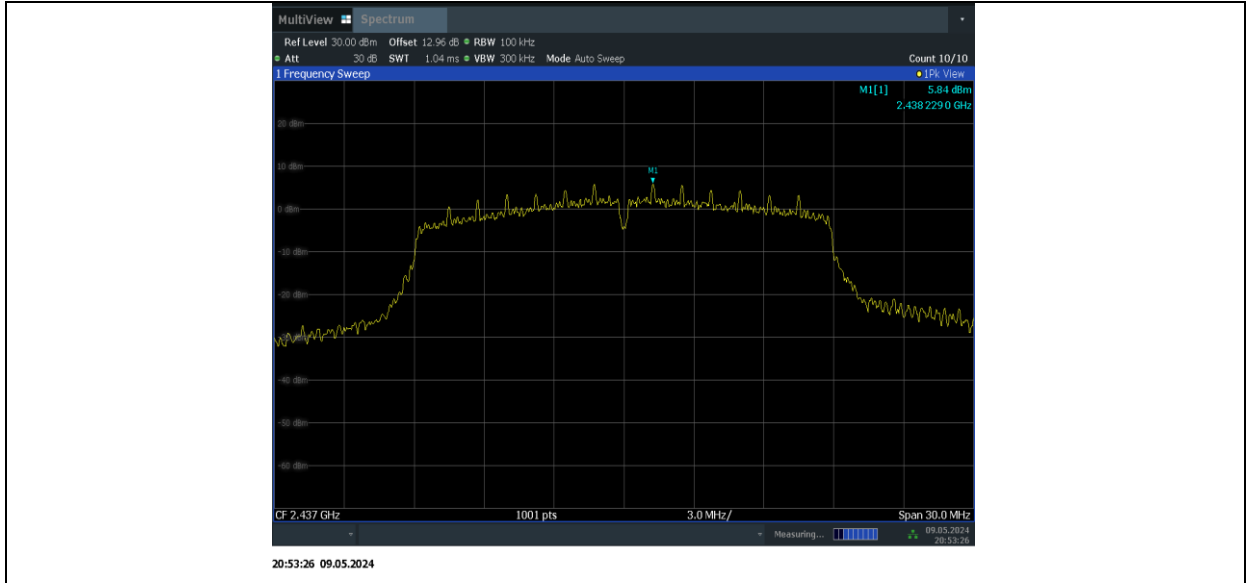


11N20SISO_2437_30~1000

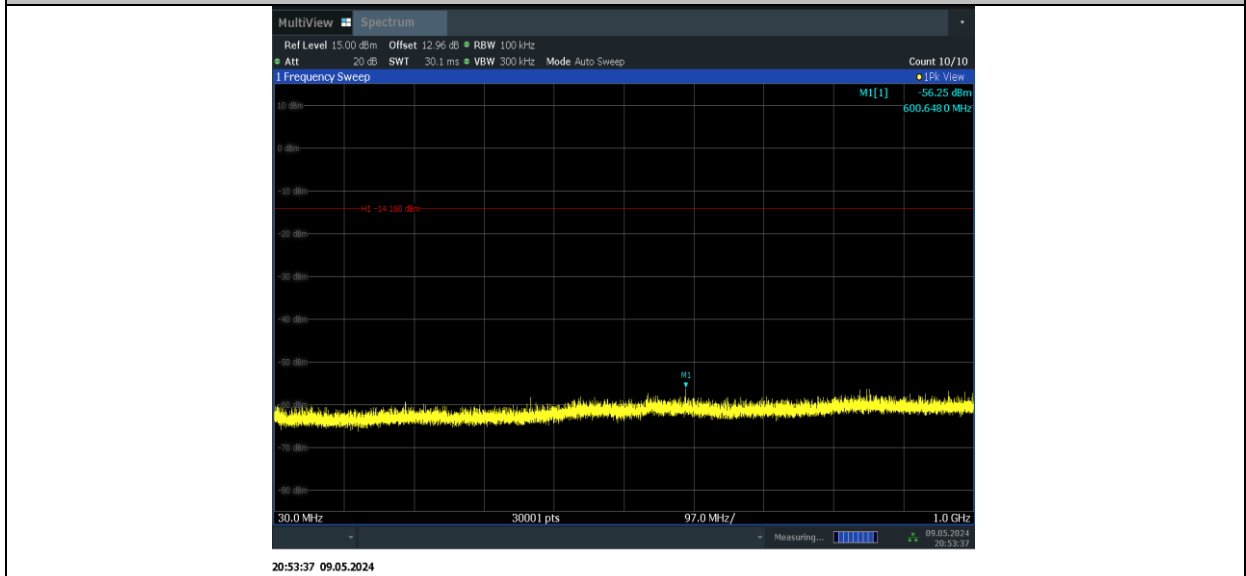


11N20SISO_2437_1000~26500

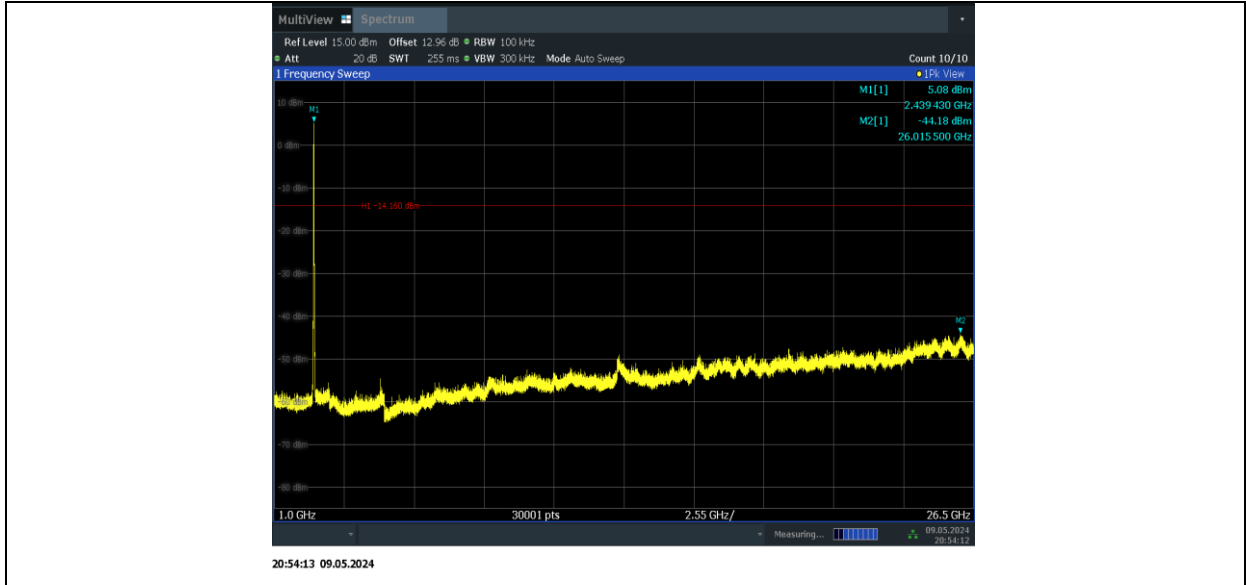

11N20SISO_2462_0~Reference

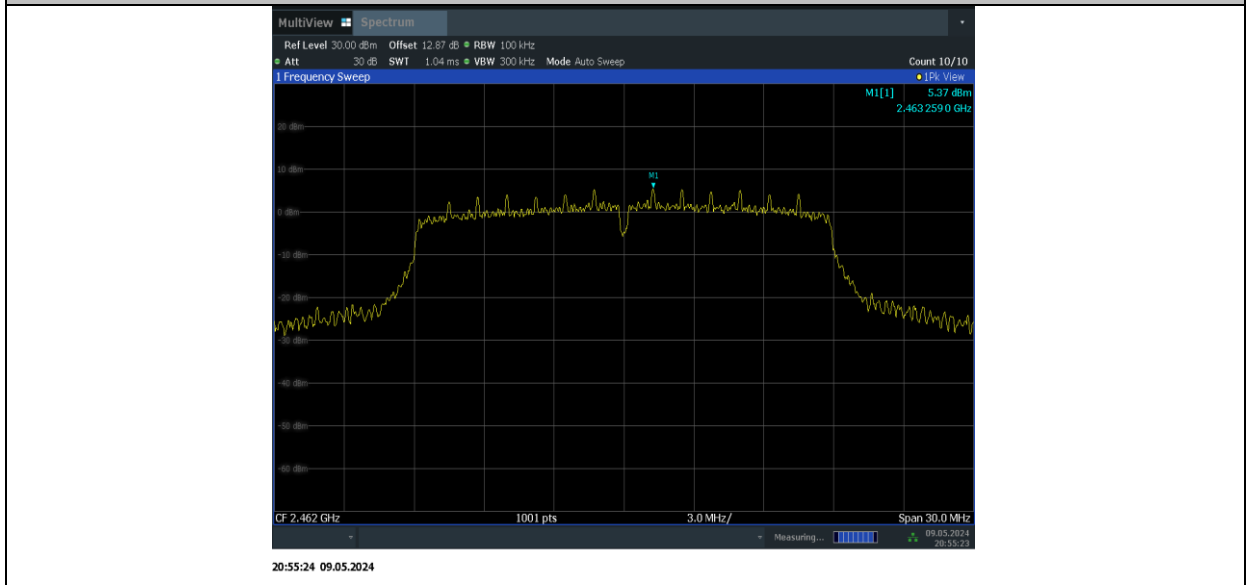

11N20SISO_2462_30~1000

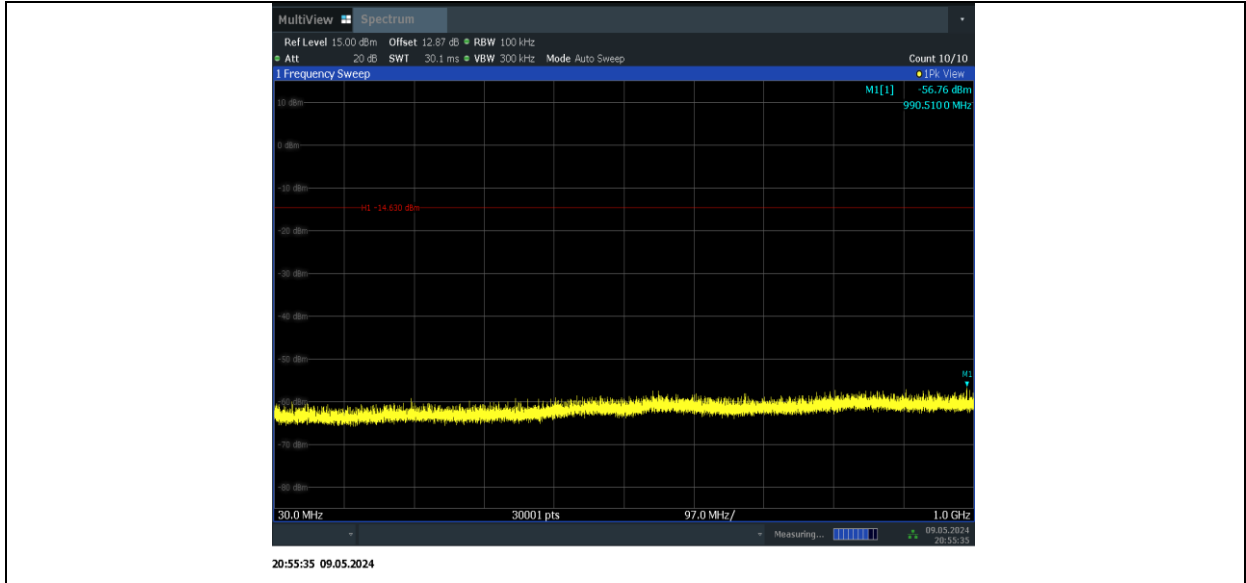

11N20SISO_2462_1000~26500



Conclusion: Pass

A.6.2 Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength($\mu\text{V}/\text{m}$)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength($\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

EUT ID:UT27a

Measurement Results:**802.11b mode**

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.6.2.1	P
	11	Fig.A.6.2.2	P

802.11g mode

Mode	Channel	Test Results	Conclusion
802.11g	1	Fig.A.6.2.3	P
	11	Fig.A.6.2.4	P

802.11n-HT20 mode

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.6.2.5	P
	11	Fig.A.6.2.6	P

Conclusion: Pass**Note:**

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

Peak
802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17945.000	53.88	-29.40	46.00	37.28	74.00	20.12	H
14700.000	48.11	-30.00	41.50	36.61	74.00	25.89	H
4823.500	48.09	-37.70	33.00	52.79	74.00	25.91	H
12828.500	44.35	-31.90	39.90	36.35	74.00	29.65	V
8998.500	42.52	-34.70	37.70	39.52	74.00	31.48	V
2351.600	54.27	-19.60	28.20	45.67	74.00	19.73	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17939.000	53.89	-29.40	46.00	37.29	74.00	20.11	H
14190.000	47.86	-30.20	41.70	36.36	74.00	26.14	H
4874.000	47.66	-37.50	33.40	51.76	74.00	26.34	H
11905.500	44.99	-32.40	39.10	38.29	74.00	29.01	H
9422.500	43.49	-33.60	37.90	39.19	74.00	30.51	H
7796.000	40.64	-35.60	36.50	39.74	74.00	33.36	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.500	54.68	-29.40	46.00	38.08	74.00	19.32	H
14599.000	47.79	-29.00	41.90	34.89	74.00	26.21	V
4924.000	47.41	-37.60	33.30	51.71	74.00	26.59	V
12400.000	43.50	-31.90	38.90	36.50	74.00	30.50	V
9014.000	41.60	-34.30	37.80	38.10	74.00	32.40	H
2493.100	54.94	-19.70	28.20	46.44	74.00	19.06	H

802.11g

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17976.000	54.94	-29.40	46.00	38.34	74.00	19.06	V
14100.500	48.34	-30.20	41.70	36.84	74.00	25.66	H
4824.000	45.64	-37.70	33.00	50.34	74.00	28.36	H
11936.500	44.16	-32.40	39.00	37.56	74.00	29.84	V
9122.000	42.53	-34.30	37.70	39.13	74.00	31.47	V
2359.800	54.15	-19.60	28.20	45.55	74.00	19.85	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17996.500	54.39	-29.40	46.00	37.79	74.00	19.61	H
13668.500	47.72	-31.00	41.00	37.72	74.00	26.28	H
11968.000	44.33	-32.40	39.00	37.73	74.00	29.67	V
4870.000	43.38	-37.50	33.40	47.48	74.00	30.62	V
8716.000	42.42	-34.80	37.90	39.32	74.00	31.58	H
7304.500	40.67	-35.40	36.60	39.47	74.00	33.33	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17973.000	54.24	-29.40	46.00	37.64	74.00	19.76	V
14225.500	48.62	-30.60	41.80	37.52	74.00	25.38	V
12765.500	44.24	-31.80	39.60	36.34	74.00	29.76	H
4927.500	43.46	-37.60	33.30	47.76	74.00	30.54	V
8905.000	42.91	-34.80	37.80	39.91	74.00	31.09	H
2495.700	54.56	-19.70	28.20	46.06	74.00	19.44	V

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17931.500	54.43	-29.40	46.00	37.83	74.00	19.57	H
14405.500	49.16	-30.30	41.90	37.56	74.00	24.84	V
4825.500	45.88	-37.70	33.00	50.58	74.00	28.12	H
11786.500	45.16	-32.00	39.20	37.96	74.00	28.84	V
9123.500	42.87	-34.30	37.70	39.47	74.00	31.13	V
2389.900	65.89	-19.80	28.20	57.49	74.00	8.11	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17970.000	54.61	-29.40	46.00	38.01	74.00	19.39	H
14184.000	48.26	-30.20	41.70	36.76	74.00	25.74	H
12793.000	45.21	-31.50	39.80	36.91	74.00	28.79	V
4870.500	44.00	-37.50	33.40	48.10	74.00	30.00	H
8973.000	42.83	-34.70	37.70	39.83	74.00	31.17	V
7942.000	41.11	-35.40	36.80	39.71	74.00	32.89	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17948.500	54.42	-29.40	46.00	37.82	74.00	19.58	H
14595.500	48.64	-29.00	41.90	35.74	74.00	25.36	V
11873.000	44.93	-32.80	39.10	38.53	74.00	29.07	V
4932.000	44.35	-37.60	33.30	48.65	74.00	29.65	H
9205.000	42.41	-34.70	37.70	39.41	74.00	31.59	H
2485.300	71.06	-19.70	28.20	62.56	74.00	2.94	H

Average
802.11b

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
4824.000	44.97	-37.70	33.00	49.67	54.00	9.03	H
17989.000	44.71	-29.40	46.00	28.11	54.00	9.29	H
14238.000	38.67	-30.60	41.80	27.57	54.00	15.33	H
11845.500	34.69	-32.80	39.10	28.29	54.00	19.31	V
8907.000	32.64	-34.80	37.80	29.64	54.00	21.36	H
2352.800	42.06	-19.60	28.20	33.46	54.00	11.94	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17967.500	45.43	-29.40	46.00	28.83	54.00	8.57	H
4874.000	45.30	-37.50	33.40	49.40	54.00	8.70	H
14198.000	38.87	-30.20	41.70	27.37	54.00	15.13	H
11838.000	34.36	-32.80	39.10	27.96	54.00	19.64	H
9135.500	32.39	-34.30	37.70	28.99	54.00	21.61	V
7903.500	31.10	-35.20	36.70	29.60	54.00	22.90	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
4924.000	45.00	-37.60	33.30	49.30	54.00	9.00	H
17977.500	44.97	-29.40	46.00	28.37	54.00	9.03	V
14189.000	38.09	-30.20	41.70	26.59	54.00	15.91	V
12803.000	34.15	-31.50	39.80	25.85	54.00	19.85	V
8884.500	32.26	-34.80	37.80	29.26	54.00	21.74	V
2486.300	43.82	-19.70	28.20	35.32	54.00	10.18	H

802.11g
Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.000	44.89	-29.40	46.00	28.29	54.00	9.11	V
4824.000	42.75	-37.70	33.00	47.45	54.00	11.25	H
14700.500	38.51	-30.00	41.50	27.01	54.00	15.49	V
12650.000	34.47	-31.80	39.40	26.87	54.00	19.53	V
9119.500	32.63	-34.30	37.70	29.23	54.00	21.37	H
2380.100	42.41	-19.80	28.20	34.01	54.00	11.59	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17970.000	44.76	-29.40	46.00	28.16	54.00	9.24	H
14190.500	38.78	-30.20	41.70	27.28	54.00	15.22	H
11897.500	34.88	-32.40	39.10	28.18	54.00	19.12	H
4878.500	34.74	-37.50	33.40	38.84	54.00	19.26	H
9006.500	32.80	-34.70	37.70	29.80	54.00	21.20	H
7290.500	31.46	-35.40	36.60	30.26	54.00	22.54	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17954.500	44.91	-29.40	46.00	28.31	54.00	9.09	H
14168.500	39.21	-30.20	41.70	27.71	54.00	14.79	V
11931.000	34.77	-32.40	39.00	28.17	54.00	19.23	V
4928.000	33.88	-37.60	33.30	38.18	54.00	20.12	H
8991.500	32.97	-34.70	37.70	29.97	54.00	21.03	V
2486.400	43.32	-19.70	28.20	34.82	54.00	10.68	H

802.11n-HT20

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17981.000	44.97	-29.40	46.00	28.37	54.00	9.03	V
14175.500	39.21	-30.20	41.70	27.71	54.00	14.79	V
4821.500	35.84	-37.70	33.00	40.54	54.00	18.16	H
11763.000	35.07	-32.90	39.20	28.77	54.00	18.93	V
8913.000	33.02	-33.90	37.70	29.22	54.00	20.98	V
2389.600	45.62	-19.80	28.20	37.22	54.00	8.38	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17947.500	45.08	-29.40	46.00	28.48	54.00	8.92	V
14706.000	38.70	-30.20	41.40	27.60	54.00	15.30	H
12996.000	35.18	-31.90	40.10	26.98	54.00	18.82	H
4877.500	34.26	-37.50	33.40	38.36	54.00	19.74	H
8445.500	33.31	-35.10	37.40	31.01	54.00	20.69	V
7938.000	31.27	-35.40	36.80	29.87	54.00	22.73	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17991.000	44.82	-29.40	46.00	28.22	54.00	9.18	V
14102.000	38.78	-30.20	41.70	27.28	54.00	15.22	V
11890.000	35.10	-32.40	39.10	28.40	54.00	18.90	H
4928.000	33.38	-37.60	33.30	37.68	54.00	20.62	H
9035.000	32.82	-34.30	37.80	29.32	54.00	21.18	H
2485.200	51.60	-19.70	28.20	43.10	54.00	2.40	H

Test graphs as below:

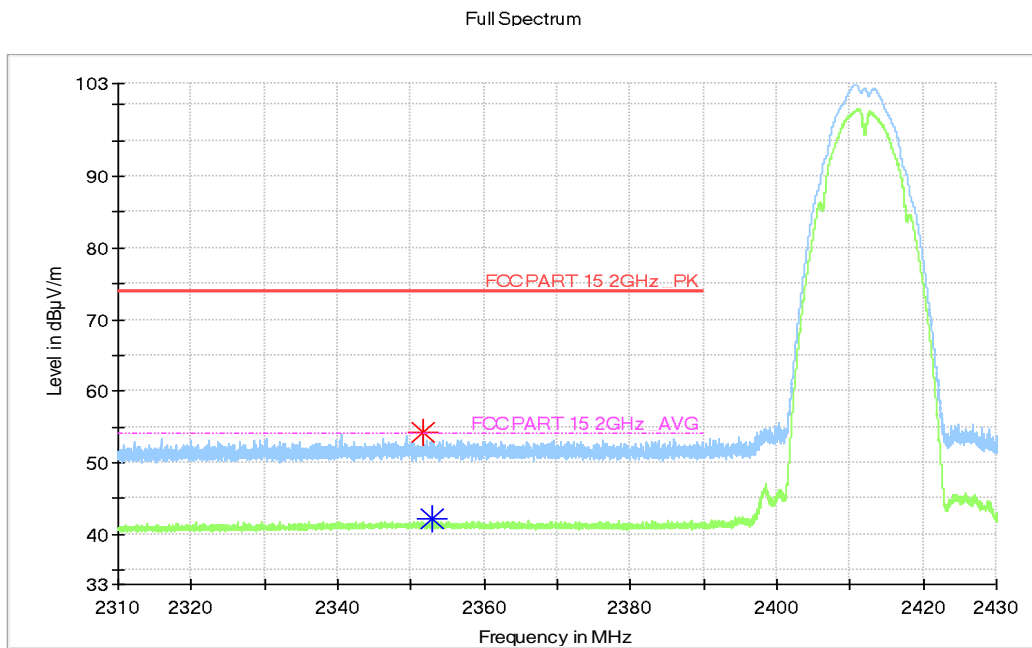


Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.43GHz

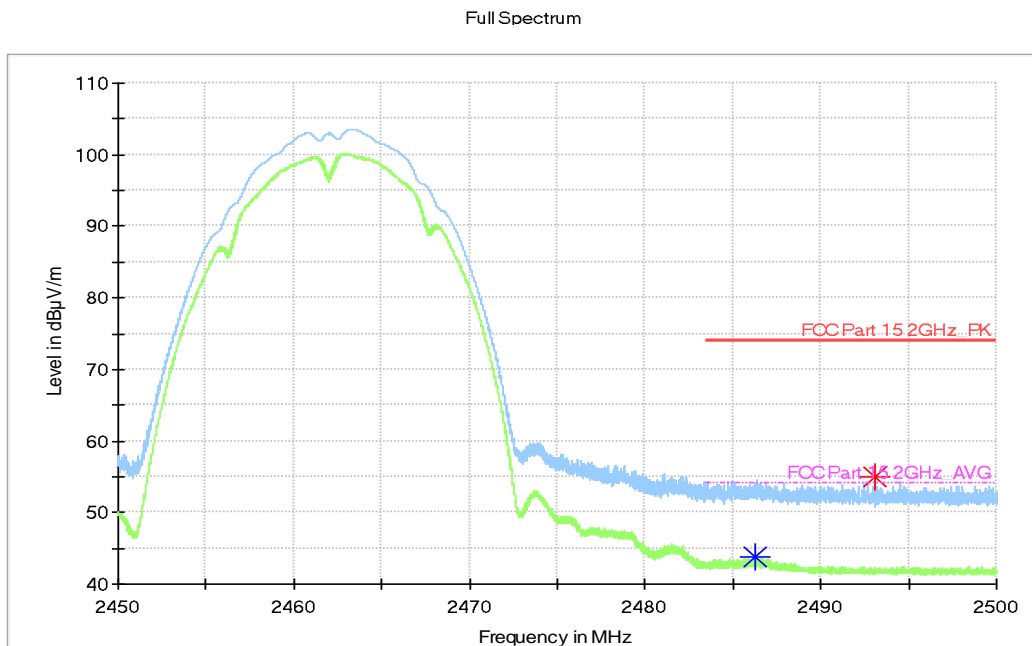


Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

Full Spectrum

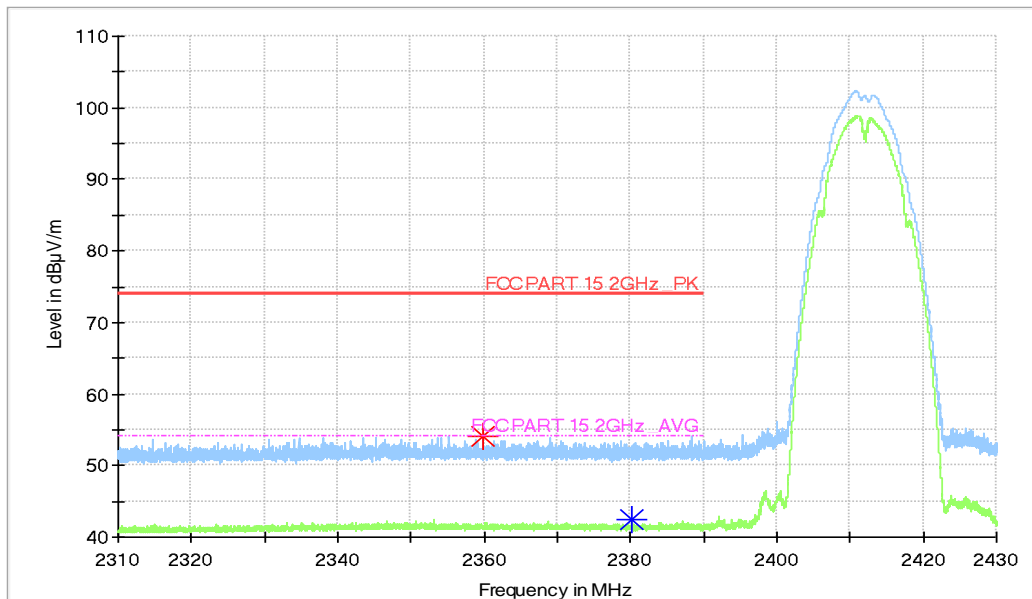


Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.43GHz

Full Spectrum

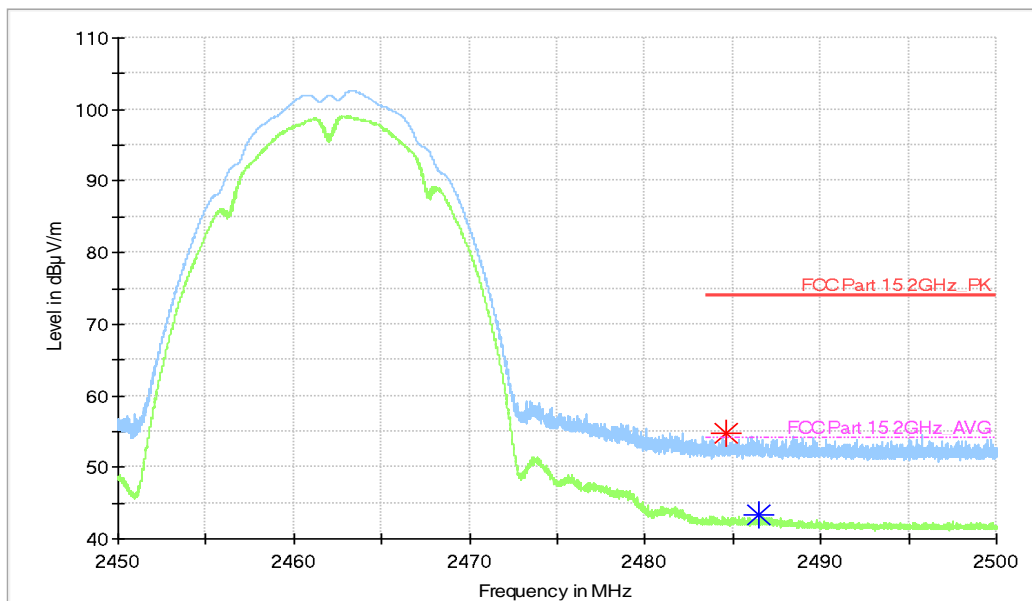


Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

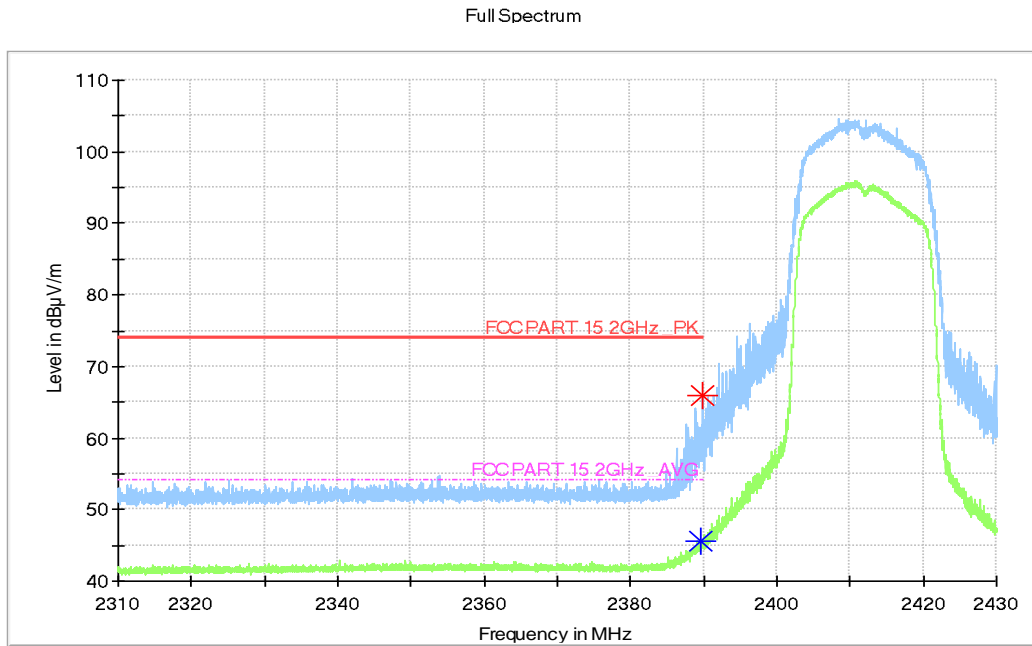


Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.43GHz

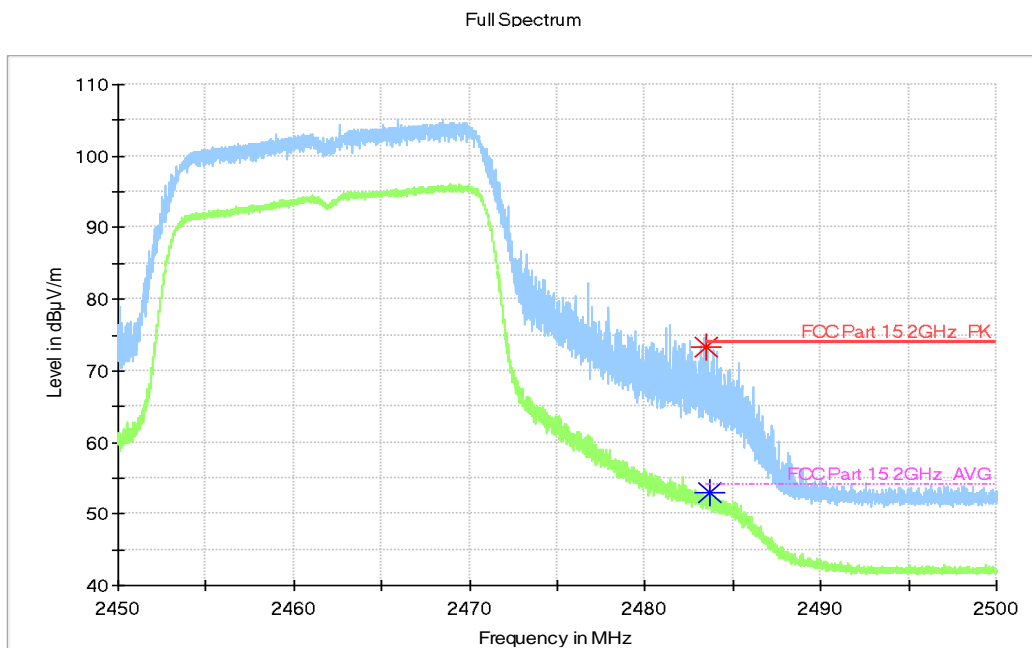


Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz

A.7. AC Power-line Conducted Emission

Method of Measurement: See ANSI C63.10-2013-clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger (First source)		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger (First source)		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger (Second source)		
		802.11b	Idle	
0.15 to 0.5	67 to 56	Fig.A.7.3	/	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger (Second source)		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.3	/	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass

Test graphs as below:

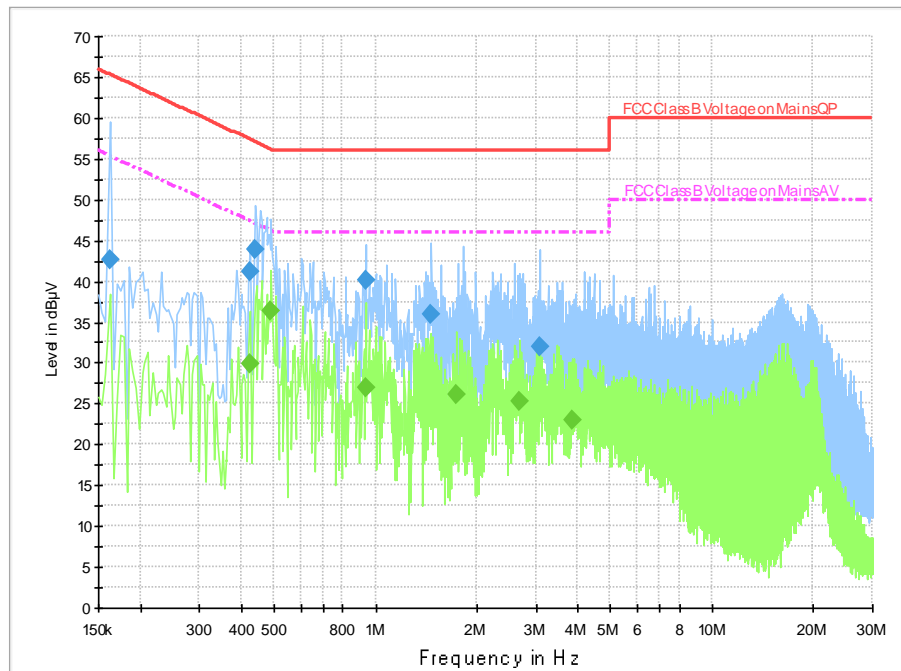


Fig.A.7.1 AC Powerline Conducted Emission-802.11b(First source)

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.162000	42.7	2000.0	9.000	On	L1	19.8	22.7	65.4
0.426000	41.3	2000.0	9.000	On	L1	19.8	16.1	57.3
0.438000	43.9	2000.0	9.000	On	L1	19.8	13.2	57.1
0.938000	40.2	2000.0	9.000	On	L1	19.7	15.8	56.0
1.466000	36.0	2000.0	9.000	On	N	19.6	20.0	56.0
3.090000	32.0	2000.0	9.000	On	N	19.6	24.0	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.422000	30.0	2000.0	9.000	On	L1	19.8	17.4	47.4
0.490000	36.3	2000.0	9.000	On	L1	19.8	9.9	46.2
0.938000	26.9	2000.0	9.000	On	L1	19.7	19.1	46.0
1.746000	26.2	2000.0	9.000	On	L1	19.6	19.8	46.0
2.674000	25.2	2000.0	9.000	On	L1	19.6	20.8	46.0
3.862000	22.9	2000.0	9.000	On	L1	19.6	23.1	46.0

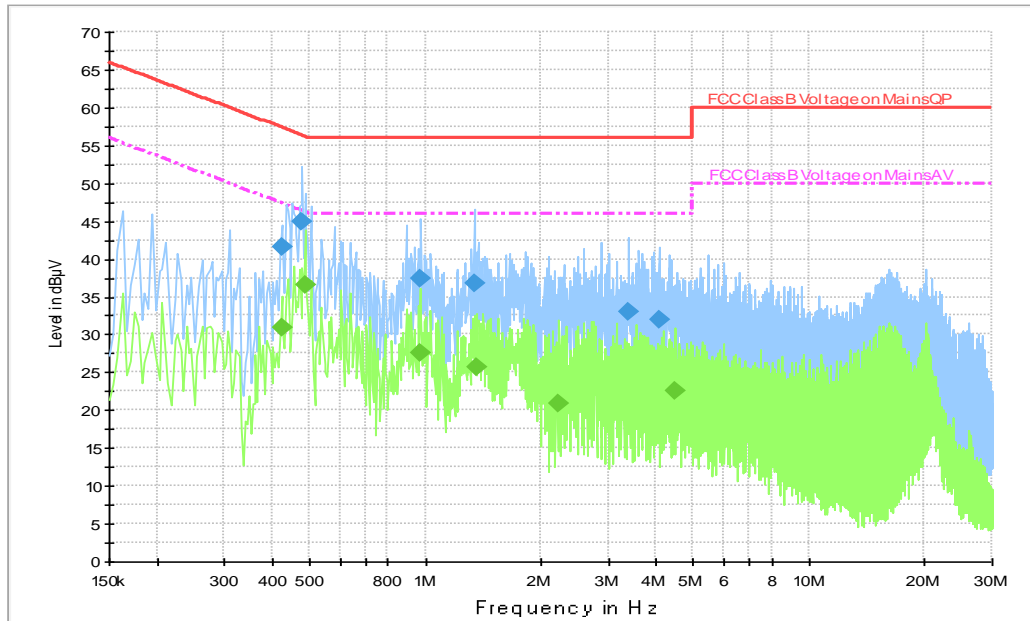


Fig.A.7.2 AC Powerline Conducted Emission-Idle(First source)

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.422000	41.5	2000.0	9.000	On	L1	19.8	15.9	57.4
0.478000	44.8	2000.0	9.000	On	N	19.8	11.5	56.4
0.974000	37.3	2000.0	9.000	On	N	19.6	18.7	56.0
1.338000	36.8	2000.0	9.000	On	N	19.6	19.2	56.0
3.382000	33.0	2000.0	9.000	On	N	19.6	23.0	56.0
4.058000	32.0	2000.0	9.000	On	N	19.6	24.0	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.422000	31.0	2000.0	9.000	On	L1	19.8	16.4	47.4
0.486000	36.5	2000.0	9.000	On	L1	19.8	9.7	46.2
0.966000	27.5	2000.0	9.000	On	L1	19.6	18.5	46.0
1.354000	25.7	2000.0	9.000	On	N	19.6	20.3	46.0
2.234000	20.9	2000.0	9.000	On	L1	19.6	25.1	46.0
4.502000	22.6	2000.0	9.000	On	L1	19.6	23.4	46.0

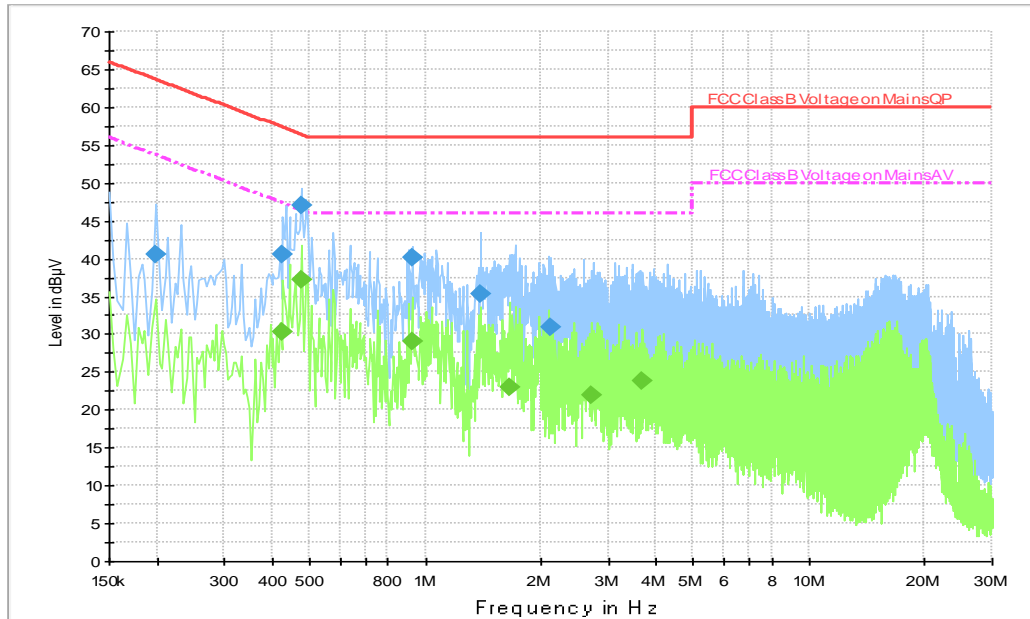


Fig.A.7.3 AC Powerline Conducted Emission-802.11b(Second source)

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.198000	40.5	2000.0	9.000	On	L1	19.7	23.2	63.7
0.426000	40.4	2000.0	9.000	On	L1	19.8	16.9	57.3
0.474000	47.0	2000.0	9.000	On	L1	19.8	9.4	56.4
0.926000	40.2	2000.0	9.000	On	L1	19.7	15.8	56.0
1.394000	35.4	2000.0	9.000	On	N	19.6	20.6	56.0
2.122000	30.9	2000.0	9.000	On	L1	19.6	25.1	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.426000	30.4	2000.0	9.000	On	L1	19.8	17.0	47.3
0.474000	37.2	2000.0	9.000	On	L1	19.8	9.2	46.4
0.922000	29.1	2000.0	9.000	On	L1	19.7	16.9	46.0
1.654000	23.0	2000.0	9.000	On	L1	19.6	23.0	46.0
2.710000	21.9	2000.0	9.000	On	N	19.6	24.1	46.0
3.690000	23.8	2000.0	9.000	On	L1	19.6	22.2	46.0

A.8. Antenna Requirement

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT
Beijing, People's Republic of China

for technical competence in the field of
Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 26th day of June 2023.



Mr. Trace McInturf, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2024

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

END OF REPORT