



# TEST REPORT

## No. I20Z61820-WMD06

for

**Shenzhen Tinno Mobile Technology Corp.**

**Smart Phone**

**Model Name: Wiko U614AS**

**FCC ID: XD6U614AS**

with

**Hardware Version: V1.0**

**Software Version: U614ASV02.06.10**

**Issued Date: 2021-01-07**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [cttl\\_terminals@caict.ac.cn](mailto:cttl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I20Z61820-WMD06	Rev.0	1 <sup>st</sup> edition	2021-01-07

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY.....</b>	<b>4</b>
1.1. INTRODUCTION & ACCREDITATION .....	4
1.2. TESTING LOCATION .....	4
1.3. TESTING ENVIRONMENT .....	5
1.4. PROJECT DATA.....	5
1.5. SIGNATURE .....	5
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
2.1. APPLICANT INFORMATION.....	6
2.2. MANUFACTURER INFORMATION.....	6
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
3.1. ABOUT EUT .....	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
<b>4. REFERENCE DOCUMENTS .....</b>	<b>8</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	8
4.2. REFERENCE DOCUMENTS FOR TESTING.....	8
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULT .....</b>	<b>10</b>
<b>7. TEST EQUIPMENT UTILIZED .....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>12</b>
A.1 OUTPUT POWER .....	12
A.2 EMISSION LIMIT.....	23
A.3 FREQUENCY STABILITY .....	28
A.4 OCCUPIED BANDWIDTH .....	30
A.5 EMISSION BANDWIDTH .....	41
A.6 BAND EDGE COMPLIANCE .....	52
A.7 CONDUCTED SPURIOUS EMISSION .....	89
A.8 PEAK-TO-AVERAGE POWER RATIO .....	91
<b>ANNEX B: ACCREDITATION CERTIFICATE .....</b>	<b>92</b>

## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District,  
Beijing, P. R. China 100191

### 1.3. Testing Environment

Normal Temperature: 15-35℃  
Relative Humidity: 20-75%

### 1.4. Project Data

Testing Start Date: 2020-10-22  
Testing End Date: 2021-01-06

### 1.5. Signature



---

**Dong Yuan**  
**(Prepared this test report)**



---

**Zhou Yu**  
**(Reviewed this test report)**



---

**Zhao Hui Lin**  
**Deputy Director of the laboratory**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Shenzhen Tinno Mobile Technology Corp.  
Address /Post: 4/F, H-3 Building,OCT Eastern Industrial Park. NO.1 XiangShan East  
Road, Nan Shan District,Shenzhen, P.R.China  
Contact: xiaoping.li  
Email: xiaoping.li@tinno.com  
Telephone: 0755-86095550

### **2.2. Manufacturer Information**

Company Name: Shenzhen Tinno Mobile Technology Corp.  
Address /Post: 4/F, H-3 Building,OCT Eastern Industrial Park. NO.1 XiangShan East  
Road, Nan Shan District,Shenzhen, P.R.China  
Contact: xiaoping.li  
Email: xiaoping.li@tinno.com  
Telephone: 0755-86095550

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	Smart Phone
Model Name	Wiko U614AS
FCC ID	XD6U614AS
Antenna	Embedded
Output power	28.33dBm maximum EIRP measured for LTE CA_41C
Extreme vol. Limits	3.5VDC to 4.4VDC (nominal: 3.8VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT13a	868657050002011	V1.0	U614ASV01.08.10	2020-10-22
UT35a	868657050017365	V1.0	U614ASV02.06.10	2020-11-25

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description
--------	-------------

AE1	Battery
AE2	Battery

##### **AE1**

Model	PT34H406082J
Manufacturer	Ningbo Veken Battery Co., Ltd.
Capacitance	3310mAh

##### **AE2**

Model	PT34H406082W
Manufacturer	Shenzhen BYD Lithium Battery Company Limited
Capacitance	3330mAh

\*AE ID: is used to identify the test sample in the lab internally.

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-19 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01



## 5. Laboratory Environment

**Semi-anechoic chamber 2 / Fully-anechoic chamber 3** (10 meters×6.7 meters×6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	>2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	<±3.5 dB, 3 m distance
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

## 6. Summary Of Test Result

### LTE CA\_41C

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

#### Terms used in Verdict column

P	Pass. The EUT complies with the essential requirements in the standard.
NP	Not Performed. The test was not performed by CTTL.
NA	Not Applicable. The test was not applicable.
BR	Re-use test data from basic model report.
F	Fail. The EUT does not comply with the essential requirements in the standard.

LTE CA\_41C is tested by power class 2.

#### Explanation of worst-case configuration

The worst-case scenario for all measurements is based on the conducted output power measurement investigation results. Output power was measured on QPSK, 16QAM and 64QAM modulations. It was found that QPSK was the worst case. All testing was performed using QPSK modulations to represent the worst case unless otherwise stated. The test results shown in the following sections represent the worst case emission.

## 7. Test Equipment Utilized

Description	Type	Series Number	Manufacture	Cal Due Date	Calibration Interval
Spectrum Analyzer	FSU	200030	R&S	2021-06-01	1 year
Radio Communication Analyzer	MT8821C	6201763159	Anritsu	2021-08-12	1 year
Climate Chamber	SH-242	93008556	ESPEC	2023-12-23	3 years
Test Receiver	E4440A	MY48250642	Agilent	2021-03-12	1 year
EMI Antenna	VULB9163	9163-301	Schwarzbeck	2021-08-04	1 year
EMI Antenna	3117	00119024	ETS-Lindgren	2021-05-08	1 year
EMI Antenna	3117	00119021	ETS-Lindgren	2021-02-06	1 year
EMI Antenna	9117	167	Schwarzbeck	2021-08-19	1 year
Signal Generator	N5183A	MY49060052	Agilent	2021-07-01	1 year
Power Amplifier	5S1G4	0341863	AR	/	/
Universal Radio Communication Tester	CMW500	143008	R&S	2022-01-01	1 year
Test Receiver	E4440A	MY48250642	Agilent	2021-03-12	1 year

## **Annex A: Measurement Results**

### **A.1 Output Power**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

##### **A.1.2.2 Measurement Result**

#### **LTE CA\_41C**

Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB		SCC RB		Conducted Power(dBm)
				Size	Offset	Size	Offset	
5MHz/ 20MHz	2499.3	2511.0	QPSK	1	24	1	0	26.35
				25	0	100	0	24.23
			16QAM	1	24	1	0	25.76
				25	0	100	0	23.18
			64QAM	1	24	1	0	23.58
				25	0	100	0	23.21
	2583.8	2595.5	QPSK	1	24	1	0	26.11
				25	0	100	0	24.21
			16QAM	1	24	1	0	25.55
				25	0	100	0	23.19
			64QAM	1	24	1	0	23.37
				25	0	100	0	23.18
20MHz/ 5MHz	2506.0	2517.7	QPSK	1	24	1	0	26.08
				25	0	100	0	24.32
			16QAM	1	24	1	0	25.45
				25	0	100	0	23.25
			64QAM	1	24	1	0	23.27
				25	0	100	0	23.18
			QPSK	1	99	1	0	26.32
				100	0	25	0	24.31
			16QAM	1	99	1	0	25.77
				100	0	25	0	23.23

			64QAM	1	99	1	0	23.52
				100	0	25	0	23.18
	2590.5	2602.2	QPSK	1	99	1	0	26.08
				100	0	25	0	24.11
			16QAM	1	99	1	0	25.53
				100	0	25	0	23.19
			64QAM	1	99	1	0	23.28
				100	0	25	0	23.09
	2675.0	2686.7	QPSK	1	99	1	0	26.73
				100	0	25	0	24.34
			16QAM	1	99	1	0	25.97
				100	0	25	0	23.26
			64QAM	1	99	1	0	23.89
				100	0	25	0	23.22
10MHz/ 15MHz	2501.3	2513.3	QPSK	1	49	1	0	26.34
				50	0	75	0	24.26
			16QAM	1	49	1	0	25.82
				50	0	75	0	23.29
			64QAM	1	49	1	0	23.45
				50	0	75	0	23.22
	2585.9	2597.9	QPSK	1	49	1	0	26.05
				50	0	75	0	24.16
			16QAM	1	49	1	0	25.52
				50	0	75	0	23.19
			64QAM	1	49	1	0	23.31
				50	0	75	0	23.11
	2670.5	2682.5	QPSK	1	49	1	0	26.07
				50	0	75	0	24.22
			16QAM	1	49	1	0	25.51
				50	0	75	0	23.29
			64QAM	1	49	1	0	23.34
				50	0	75	0	23.22
15MHz/ 10MHz	2503.5	2515.5	QPSK	1	74	1	0	26.51
				75	0	50	0	24.43
			16QAM	1	74	1	0	25.92
				75	0	50	0	23.34
			64QAM	1	74	1	0	23.62
				75	0	50	0	23.31
	2588.1	2600.1	QPSK	1	74	1	0	26.19
				75	0	50	0	24.29
			16QAM	1	74	1	0	25.66
				75	0	50	0	23.34
			64QAM	1	74	1	0	23.35

	2672.7	2684.7	QPSK	75	0	50	0	23.21
				1	74	1	0	26.53
				75	0	50	0	24.45
			16QAM	1	74	1	0	25.87
				75	0	50	0	23.41
			64QAM	1	74	1	0	23.67
				75	0	50	0	23.38
10MHz/ 20MHz	2501.5	2515.9	QPSK	1	49	1	0	26.56
				50	0	100	0	24.45
			16QAM	1	49	1	0	25.98
				50	0	100	0	23.52
			64QAM	1	49	1	0	23.74
				50	0	100	0	23.47
	2583.6	2598.0	QPSK	1	49	1	0	26.23
				50	0	100	0	24.35
			16QAM	1	49	1	0	25.72
				50	0	100	0	23.34
			64QAM	1	49	1	0	23.42
				50	0	100	0	23.27
	2665.6	2680.0	QPSK	1	49	1	0	26.18
				50	0	100	0	24.29
			16QAM	1	49	1	0	25.63
				50	0	100	0	23.36
			64QAM	1	49	1	0	23.37
				50	0	100	0	23.28
20MHz/ 10MHz	2506.0	2520.4	QPSK	1	99	1	0	26.41
				100	0	50	0	24.52
			16QAM	1	99	1	0	25.95
				100	0	50	0	23.53
			64QAM	1	99	1	0	23.65
				100	0	50	0	23.41
	2588.1	2602.5	QPSK	1	99	1	0	26.25
				100	0	50	0	24.32
			16QAM	1	99	1	0	25.71
				100	0	50	0	23.35
			64QAM	1	99	1	0	23.43
				100	0	50	0	23.31
	2670.1	2684.5	QPSK	1	99	1	0	26.58
				100	0	50	0	24.35
			16QAM	1	99	1	0	25.95
				100	0	50	0	23.36
			64QAM	1	99	1	0	23.72
				100	0	50	0	23.28

15MHz/ 15MHz	2503.5	2518.5	QPSK	1	74	1	0	26.43
				75	0	75	0	24.46
			16QAM	1	74	1	0	25.93
				75	0	75	0	23.43
			64QAM	1	74	1	0	23.68
				75	0	75	0	23.37
	2585.5	2600.5	QPSK	1	74	1	0	26.25
				75	0	75	0	24.27
			16QAM	1	74	1	0	25.66
				75	0	75	0	23.34
			64QAM	1	74	1	0	23.39
				75	0	75	0	23.30
15MHz/ 20MHz	2503.8	2520.9	QPSK	1	74	1	0	26.47
				75	0	100	0	24.41
			16QAM	1	74	1	0	25.92
				75	0	100	0	23.39
			64QAM	1	74	1	0	23.67
				75	0	100	0	23.36
	2583.3	2600.4	QPSK	1	74	1	0	26.14
				75	0	100	0	24.32
			16QAM	1	74	1	0	25.67
				75	0	100	0	23.34
			64QAM	1	74	1	0	23.44
				75	0	100	0	23.35
20MHz/ 15MHz	2506	2523.1	QPSK	1	99	1	0	26.46
				100	0	75	0	24.46
			16QAM	1	99	1	0	25.92
				100	0	75	0	23.53
			64QAM	1	99	1	0	23.69
				100	0	75	0	23.35
	2585.6	2602.7	QPSK	1	99	1	0	26.23

				100	0	75	0	24.26
			16QAM	1	99	1	0	25.68
				100	0	75	0	23.31
			64QAM	1	99	1	0	23.44
				100	0	75	0	23.25
			2665.1	2682.2	QPSK	1	99	1
	100	0				75	0	24.25
	16QAM	1			99	1	0	25.67
		100			0	75	0	23.26
	20MHz/ 20MHz	2506	2525.8	QPSK	1	99	1	0
100					0	100	0	24.27
16QAM				1	99	1	0	25.82
				100	0	100	0	23.33
64QAM				1	99	1	0	23.51
				100	0	100	0	23.28
2583.1		2602.9	QPSK	1	99	1	0	26.11
				100	0	100	0	24.22
			16QAM	1	99	1	0	25.59
				100	0	100	0	23.18
			64QAM	1	99	1	0	23.36
				100	0	100	0	23.16
2660.2		2680.0	QPSK	1	99	1	0	26.09
				100	0	100	0	24.13
			16QAM	1	99	1	0	25.46
				100	0	100	0	23.09
			64QAM	1	99	1	0	23.21
				100	0	100	0	23.06



### **A.1.3 Radiated**

#### **A.1.3.1 Description**

This is the test for the maximum radiated power from the EUT.

Part 27.50(h)(2) specifies "Mobile stations are limited to 2.0 watts EIRP".

#### **A.1.3.2 Method of Measurement**

According to KDB 412172 D01 and ANSI C63.26 the relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$ERP \text{ or } EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

ERP or EIRP                      effective radiated power or equivalent isotropically radiated power,  
respectively

(expressed in the same units as  $P_{Mea}$ , e.g., dBm or dBW)

$P_T$  = transmitter output power in dBm;

$G_T$  = gain of the transmitting antenna, in dBd(ERP) or dBi(EIRP);

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Disclaimer: The antenna gain provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

#### **A.1.3.3 Measurement result**

**LTE CA\_41C -EIRP**

Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB		SCC RB		Conducted Power(dBm)	Radiated Power (dBm) (G <sub>T</sub> – L <sub>C</sub> = 1.6)
				Size	Offset	Size	Offset		
5MHz/ 20MHz	2499.3	2511.0	QPSK	1	24	1	0	26.35	27.95
				25	0	100	0	24.23	25.83
			16QAM	1	24	1	0	25.76	27.36
				25	0	100	0	23.18	24.78
			64QAM	1	24	1	0	23.58	25.18
				25	0	100	0	23.21	24.81
	2583.8	2595.5	QPSK	1	24	1	0	26.11	27.71
				25	0	100	0	24.21	25.81
			16QAM	1	24	1	0	25.55	27.15
				25	0	100	0	23.19	24.79
			64QAM	1	24	1	0	23.37	24.97
				25	0	100	0	23.18	24.78
	2668.3	2680.0	QPSK	1	24	1	0	26.08	27.68
				25	0	100	0	24.32	25.92
			16QAM	1	24	1	0	25.45	27.05
				25	0	100	0	23.25	24.85
			64QAM	1	24	1	0	23.27	24.87
				25	0	100	0	23.18	24.78
20MHz/ 5MHz	2506.0	2517.7	QPSK	1	99	1	0	26.32	27.92
				100	0	25	0	24.31	25.91
			16QAM	1	99	1	0	25.77	27.37
				100	0	25	0	23.23	24.83
			64QAM	1	99	1	0	23.52	25.12
				100	0	25	0	23.18	24.78
	2590.5	2602.2	QPSK	1	99	1	0	26.08	27.68
				100	0	25	0	24.11	25.71
			16QAM	1	99	1	0	25.53	27.13
				100	0	25	0	23.19	24.79
			64QAM	1	99	1	0	23.28	24.88
				100	0	25	0	23.09	24.69
	2675.0	2686.7	QPSK	1	99	1	0	26.73	28.33
				100	0	25	0	24.34	25.94
			16QAM	1	99	1	0	25.97	27.57
				100	0	25	0	23.26	24.86
			64QAM	1	99	1	0	23.89	25.49
				100	0	25	0	23.22	24.82
10MHz/	2501.3	2513.3	QPSK	1	49	1	0	26.34	27.94

15MHz				50	0	75	0	24.26	25.86
				1	49	1	0	25.82	27.42
			16QAM	50	0	75	0	23.29	24.89
				1	49	1	0	23.45	25.05
	2585.9	2597.9	64QAM	50	0	75	0	23.22	24.82
				1	49	1	0	26.05	27.65
			QPSK	50	0	75	0	24.16	25.76
				1	49	1	0	25.52	27.12
			16QAM	50	0	75	0	23.19	24.79
				1	49	1	0	23.31	24.91
	2670.5	2682.5	64QAM	50	0	75	0	23.11	24.71
				1	49	1	0	26.07	27.67
			QPSK	50	0	75	0	24.22	25.82
				1	49	1	0	25.51	27.11
			16QAM	50	0	75	0	23.29	24.89
				1	49	1	0	23.34	24.94
15MHz/ 10MHz	2503.5	2515.5	64QAM	50	0	75	0	23.22	24.82
				1	49	1	0	23.34	24.94
			QPSK	1	74	1	0	26.51	28.11
				75	0	50	0	24.43	26.03
			16QAM	1	74	1	0	25.92	27.52
				75	0	50	0	23.34	24.94
	2588.1	2600.1	64QAM	1	74	1	0	23.62	25.22
				75	0	50	0	23.31	24.91
			QPSK	1	74	1	0	26.19	27.79
				75	0	50	0	24.29	25.89
			16QAM	1	74	1	0	25.66	27.26
				75	0	50	0	23.34	24.94
	2672.7	2684.7	64QAM	1	74	1	0	23.35	24.95
				75	0	50	0	23.21	24.81
			QPSK	1	74	1	0	26.53	28.13
				75	0	50	0	24.45	26.05
			16QAM	1	74	1	0	25.87	27.47
				75	0	50	0	23.41	25.01
10MHz/ 20MHz	2501.5	2515.9	64QAM	1	74	1	0	23.67	25.27
				75	0	50	0	23.38	24.98
			QPSK	1	74	1	0	26.56	28.16
				50	0	100	0	24.45	26.05
			16QAM	1	49	1	0	25.98	27.58
				50	0	100	0	23.52	25.12
	2583.6	2598.0	QPSK	1	49	1	0	23.74	25.34
				50	0	100	0	23.47	25.07
				1	49	1	0	26.23	27.83
				50	0	100	0	24.35	25.95

			16QAM	1	49	1	0	25.72	27.32
				50	0	100	0	23.34	24.94
			64QAM	1	49	1	0	23.42	25.02
				50	0	100	0	23.27	24.87
	2665.6	2680.0	QPSK	1	49	1	0	26.18	27.78
				50	0	100	0	24.29	25.89
			16QAM	1	49	1	0	25.63	27.23
				50	0	100	0	23.36	24.96
			64QAM	1	49	1	0	23.37	24.97
				50	0	100	0	23.28	24.88
20MHz/ 10MHz	2506.0	2520.4	QPSK	1	99	1	0	26.41	28.01
				100	0	50	0	24.52	26.12
			16QAM	1	99	1	0	25.95	27.55
				100	0	50	0	23.53	25.13
			64QAM	1	99	1	0	23.65	25.25
				100	0	50	0	23.41	25.01
	2588.1	2602.5	QPSK	1	99	1	0	26.25	27.85
				100	0	50	0	24.32	25.92
			16QAM	1	99	1	0	25.71	27.31
				100	0	50	0	23.35	24.95
			64QAM	1	99	1	0	23.43	25.03
				100	0	50	0	23.31	24.91
	2670.1	2684.5	QPSK	1	99	1	0	26.58	28.18
				100	0	50	0	24.35	25.95
			16QAM	1	99	1	0	25.95	27.55
				100	0	50	0	23.36	24.96
			64QAM	1	99	1	0	23.72	25.32
				100	0	50	0	23.28	24.88
15MHz/ 15MHz	2503.5	2518.5	QPSK	1	74	1	0	26.43	28.03
				75	0	75	0	24.46	26.06
			16QAM	1	74	1	0	25.93	27.53
				75	0	75	0	23.43	25.03
			64QAM	1	74	1	0	23.68	25.28
				75	0	75	0	23.37	24.97
	2585.5	2600.5	QPSK	1	74	1	0	26.25	27.85
				75	0	75	0	24.27	25.87
			16QAM	1	74	1	0	25.66	27.26
				75	0	75	0	23.34	24.94
			64QAM	1	74	1	0	23.39	24.99
				75	0	75	0	23.30	24.9
	2667.5	2682.5	QPSK	1	74	1	0	26.26	27.86
				75	0	75	0	24.31	25.91
			16QAM	1	74	1	0	25.62	27.22
				75	0	75	0	23.34	25.03

15MHz/ 20MHz			64QAM	75	0	75	0	23.31	24.91
				1	74	1	0	23.41	25.01
				75	0	75	0	23.28	24.88
	2503.8	2520.9	QPSK	1	74	1	0	26.47	28.07
				75	0	100	0	24.41	26.01
			16QAM	1	74	1	0	25.92	27.52
				75	0	100	0	23.39	24.99
			64QAM	1	74	1	0	23.67	25.27
				75	0	100	0	23.36	24.96
	2583.3	2600.4	QPSK	1	74	1	0	26.14	27.74
				75	0	100	0	24.32	25.92
			16QAM	1	74	1	0	25.67	27.27
				75	0	100	0	23.34	24.94
			64QAM	1	74	1	0	23.44	25.04
				75	0	100	0	23.35	24.95
	2662.9	2680.0	QPSK	1	74	1	0	26.15	27.75
				75	0	100	0	24.25	25.85
			16QAM	1	74	1	0	25.56	27.16
				75	0	100	0	23.26	24.86
			64QAM	1	74	1	0	23.42	25.02
				75	0	100	0	23.22	24.82
20MHz/ 15MHz	2506	2523.1	QPSK	1	99	1	0	26.46	28.06
				100	0	75	0	24.46	26.06
			16QAM	1	99	1	0	25.92	27.52
				100	0	75	0	23.53	25.13
			64QAM	1	99	1	0	23.69	25.29
				100	0	75	0	23.35	24.95
	2585.6	2602.7	QPSK	1	99	1	0	26.23	27.83
				100	0	75	0	24.26	25.86
			16QAM	1	99	1	0	25.68	27.28
				100	0	75	0	23.31	24.91
			64QAM	1	99	1	0	23.44	25.04
				100	0	75	0	23.25	24.85
	2665.1	2682.2	QPSK	1	99	1	0	26.27	27.87
				100	0	75	0	24.25	25.85
			16QAM	1	99	1	0	25.67	27.27
				100	0	75	0	23.26	24.86
			64QAM	1	99	1	0	23.45	25.05
				100	0	75	0	23.22	24.82
20MHz/ 20MHz	2506	2525.8	QPSK	1	99	1	0	26.37	27.97
				100	0	100	0	24.27	25.87
			16QAM	1	99	1	0	25.82	27.42
				100	0	100	0	23.33	24.93

			64QAM	1	99	1	0	23.51	25.11
				100	0	100	0	23.28	24.88
	2583.1	2602.9	QPSK	1	99	1	0	26.11	27.71
				100	0	100	0	24.22	25.82
			16QAM	1	99	1	0	25.59	27.19
				100	0	100	0	23.18	24.78
			64QAM	1	99	1	0	23.36	24.96
				100	0	100	0	23.16	24.76
	2660.2	2680.0	QPSK	1	99	1	0	26.09	27.69
				100	0	100	0	24.13	25.73
			16QAM	1	99	1	0	25.46	27.06
				100	0	100	0	23.09	24.69
			64QAM	1	99	1	0	23.21	24.81
				100	0	100	0	23.06	24.66

Note: The measurement results showed here are worst cases of the combinations of different Main Antenna and Diversity Antenna.

## A.2 Emission Limit


### A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of each LTE Band.

#### The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5-meter-high non-conductive stand at a 3-meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360 and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

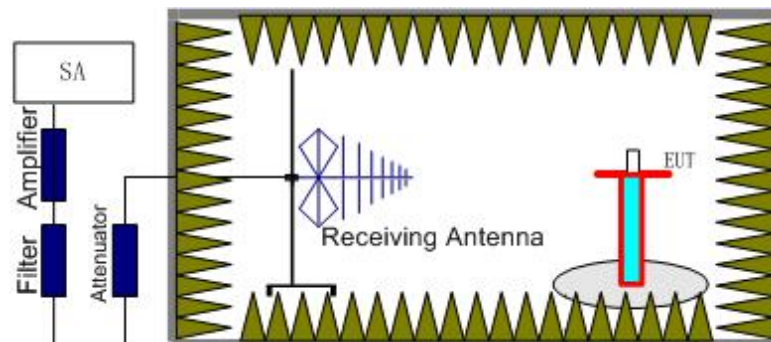

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

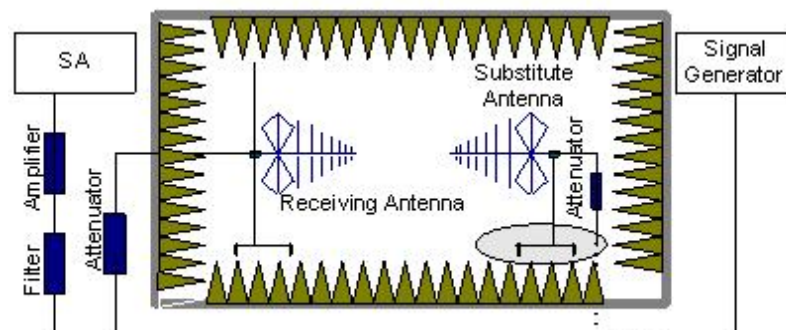

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere

with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dB}$ .

### A.2.2 Measurement Limit

Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of each LTE Band. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of each LTE Band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The range of evaluated frequency is from 30MHz to 26GHz.

Note: The measurement results showed here are worst cases.



**LTE CA\_41C, 5MHz+20MHz, QPSK, CH40065**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5008.02	-50.64	6.59	9.91	-47.32	-25.00	22.32	H
7508.01	-44.29	8.36	12.21	-40.44	-25.00	15.44	V
10023.01	-52.21	9.25	12.91	-48.55	-25.00	23.55	V
12537.01	-48.55	10.28	13.22	-45.61	-25.00	20.61	H
15026.00	-45.45	11.25	13.98	-42.72	-25.00	17.72	V
17556.00	-43.78	12.94	14.98	-41.74	-25.00	16.74	V

**LTE CA\_41C, 5MHz+20MHz, QPSK, CH40620**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
6463.02	-54.69	7.54	10.96	-51.27	-25.00	26.27	V
7752.01	-54.36	8.35	12.40	-50.31	-25.00	25.31	V
10335.01	-52.11	9.70	13.03	-48.78	-25.00	23.78	V
12918.01	-49.12	10.50	13.45	-46.17	-25.00	21.17	H
15502.00	-45.24	11.53	13.70	-43.07	-25.00	18.07	H
16795.00	-41.97	12.10	13.72	-40.35	-25.00	15.35	V

**LTE CA\_41C, 5MHz+20MHz, QPSK, CH41215**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5344.02	-52.42	6.95	10.38	-48.99	-25.00	23.99	H
8016.01	-53.34	8.32	12.61	-49.05	-25.00	24.05	H
10641.01	-51.53	9.29	13.13	-47.69	-25.00	22.69	V
13344.01	-47.75	10.57	13.98	-44.34	-25.00	19.34	H
15971.00	-43.23	11.76	13.70	-41.29	-25.00	16.29	H
17325.00	-43.69	12.40	14.52	-41.57	-25.00	16.57	H

**LTE CA\_41C, 20MHz+5MHz, QPSK, CH40140**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5015.02	-53.51	6.58	9.92	-50.17	-25.00	25.17	H
7519.01	-48.27	8.31	12.22	-44.36	-25.00	19.36	H
10000.01	-52.33	9.18	12.90	-48.61	-25.00	23.61	V
12548.01	-49.15	10.31	13.23	-46.23	-25.00	21.23	V
15008.00	-46.00	11.23	14.00	-43.23	-25.00	18.23	H
17536.00	-44.00	12.86	14.95	-41.91	-25.00	16.91	H

**LTE CA\_41C, 20MHz+5MHz, QPSK, CH40620**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5184.02	-51.04	6.94	10.16	-47.82	-25.00	22.82	V
7778.01	-49.16	8.32	12.42	-45.06	-25.00	20.06	H
10390.01	-51.66	9.79	13.06	-48.39	-25.00	23.39	H
12952.01	-48.57	10.49	13.47	-45.59	-25.00	20.59	V
15549.00	-44.31	11.51	13.70	-42.12	-25.00	17.12	H
16837.00	-42.35	12.07	13.73	-40.69	-25.00	15.69	V

**LTE CA\_41C, 20MHz+5MHz, QPSK, CH41140**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5355.02	-49.32	6.92	10.40	-45.84	-25.00	20.84	H
8031.01	-49.09	8.32	12.62	-44.79	-25.00	19.79	H
10701.01	-50.94	9.31	13.14	-47.11	-25.00	22.11	V
13362.01	-48.21	10.57	14.01	-44.77	-25.00	19.77	V
16033.00	-43.04	11.83	13.69	-41.18	-25.00	16.18	V
17381.00	-43.83	12.47	14.64	-41.66	-25.00	16.66	H

**LTE CA\_41C, 20MHz+20MHz, QPSK, CH40140**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5035.02	-54.95	6.59	9.95	-51.59	-25.00	26.59	H
7546.01	-44.80	8.20	12.24	-40.76	-25.00	15.76	V
10027.01	-51.61	9.26	12.91	-47.96	-25.00	22.96	V
12555.01	-48.54	10.33	13.23	-45.64	-25.00	20.64	V
15009.00	-45.15	11.23	13.99	-42.39	-25.00	17.39	H
17570.00	-43.46	12.99	15.00	-41.45	-25.00	16.45	V

**LTE CA\_41C, 20MHz+20MHz, QPSK, CH40620**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
6458.02	-54.33	7.54	10.96	-50.91	-25.00	25.91	V
7776.01	-38.66	8.32	12.42	-34.56	-25.00	9.56	H
10349.01	-51.25	9.72	13.04	-47.93	-25.00	22.93	V
12923.01	-48.71	10.50	13.45	-45.76	-25.00	20.76	H
15482.00	-44.39	11.51	13.71	-42.19	-25.00	17.19	V
16813.00	-42.06	12.10	13.73	-40.43	-25.00	15.43	H

**LTE CA\_41C, 20MHz+20MHz, QPSK, CH41140**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5344.02	-51.03	6.95	10.38	-47.60	-25.00	22.60	H
8008.01	-52.46	8.32	12.61	-48.17	-25.00	23.17	H
10629.01	-50.89	9.29	13.13	-47.05	-25.00	22.05	V
13311.01	-48.23	10.58	13.94	-44.87	-25.00	19.87	V
15973.00	-42.84	11.77	13.70	-40.91	-25.00	15.91	V
17277.00	-42.84	12.37	14.41	-40.80	-25.00	15.80	H

Note1: The measurement results showed here are worst cases.

Note2: The maximum value of expanded measurement uncertainty for this test item is  $U = 5.16$  dB,  $k = 2$ .

## **A.3 Frequency Stability**

### **A.3.1 Method of Measurement**

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as  $F_L$  and  $F_H$  respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of CMW500.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500, and in a simulated call on middle channel for each LTE band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the center channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

### A.3.2 Measurement results

LTE CA\_41C, 20MHz+20MHz bandwidth QPSK(worst case of all bandwidths)

#### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.85	2496.062	2689.942		
50				0.51	0.0002
40				1.61	0.0006
30				2.01	0.0008
10				2.91	0.0011
0				-0.89	0.0003
-10				-5.39	0.0021
-20				2.71	0.0010
-30				-0.69	0.0003

#### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.5	20	2496.062	2689.942	0.71	0.0003
4.4				2.21	0.0009

#### **A.4 Occupied Bandwidth**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the mid frequencies frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

### LTE CA\_41C, 5MHz+20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	23637.82	23477.56

### LTE CA\_41C, 5MHz+20MHz Bandwidth, QPSK (99% BW)

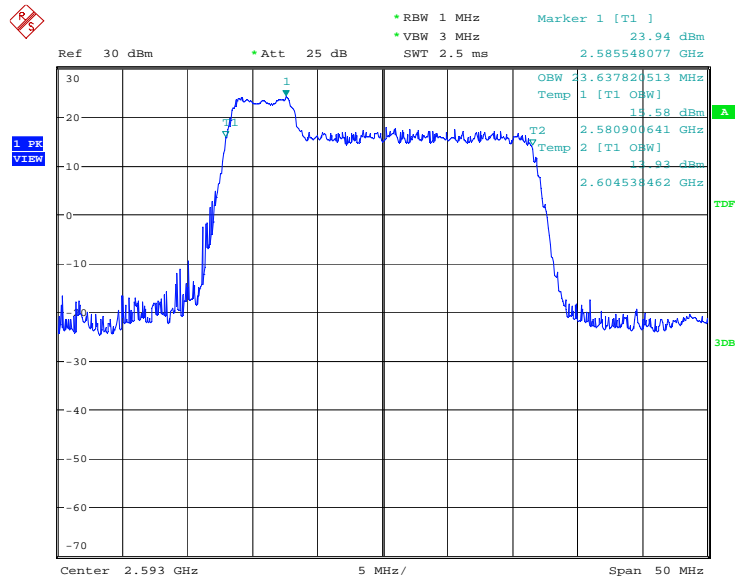

Date: 28.OCT.2020 07:51:36

### LTE CA\_41C, 5MHz+20MHz Bandwidth,16QAM (99% BW)

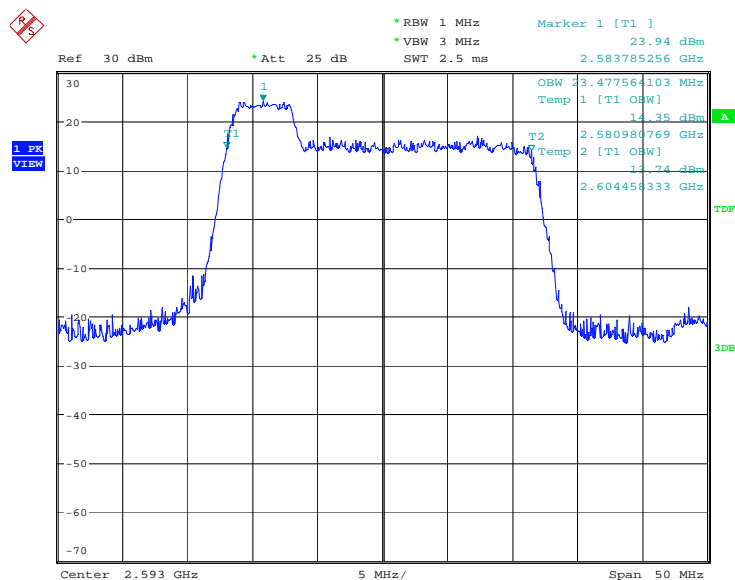


Date: 28.OCT.2020 07:54:09

### LTE CA\_41C, 20MHz+5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	23557.69	23477.56

### LTE CA\_41C, 20MHz+5MHz Bandwidth, QPSK (99% BW)

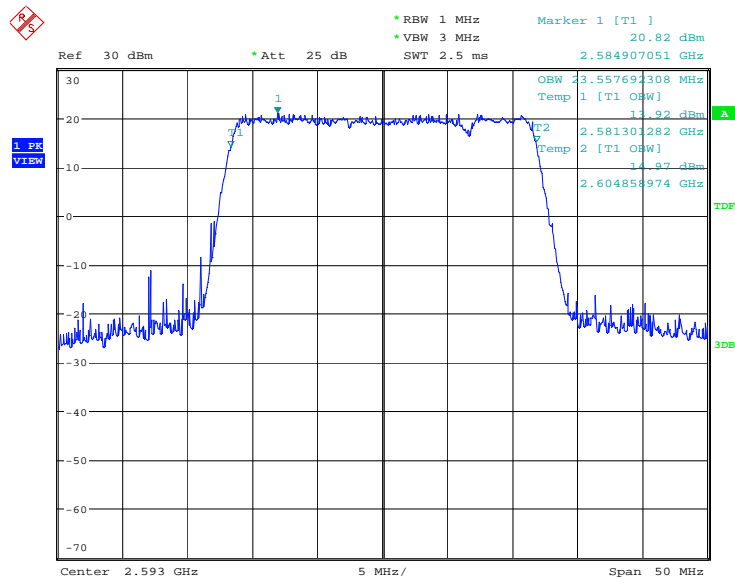

Date: 28.OCT.2020 07:57:27

### LTE CA\_41C, 20MHz+5MHz Bandwidth,16QAM (99% BW)

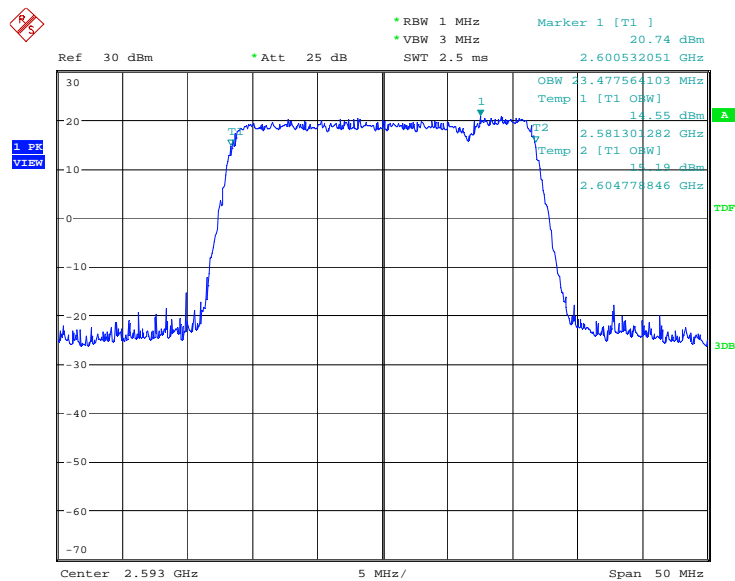


Date: 28.OCT.2020 07:55:50



### LTE CA\_41C, 10MHz+15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	23637.82	23637.82

### LTE CA\_41C, 10MHz+15MHz Bandwidth, QPSK (99% BW)

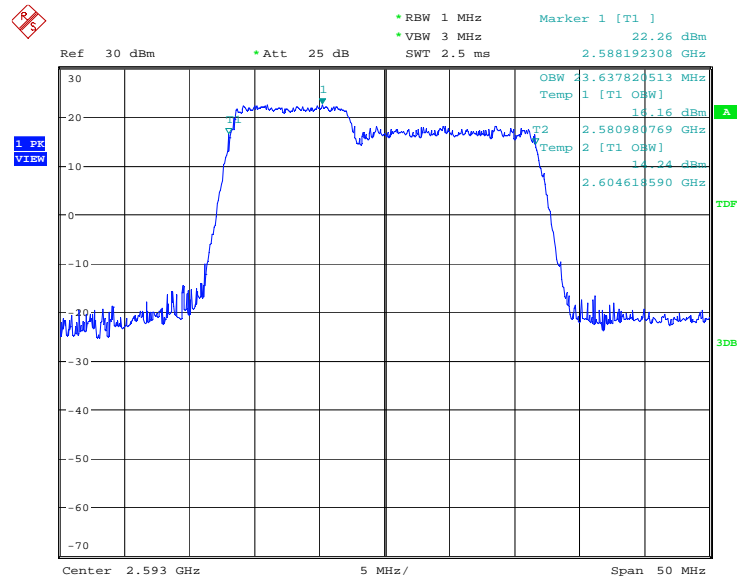

Date: 28.OCT.2020 07:59:11

### LTE CA\_41C, 10MHz+15MHz Bandwidth, 16QAM (99% BW)

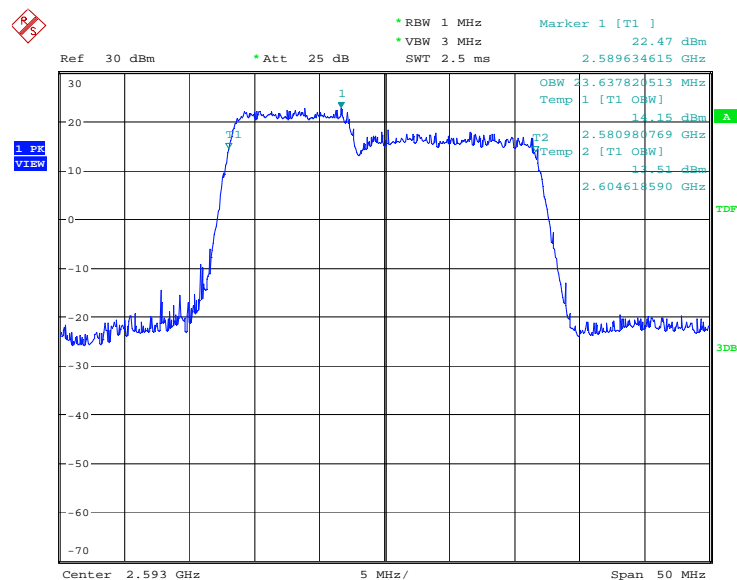


Date: 28.OCT.2020 08:00:32

### LTE CA\_41C, 15MHz+10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	23717.95	23717.95

### LTE CA\_41C, 15MHz+10MHz Bandwidth, QPSK (99% BW)

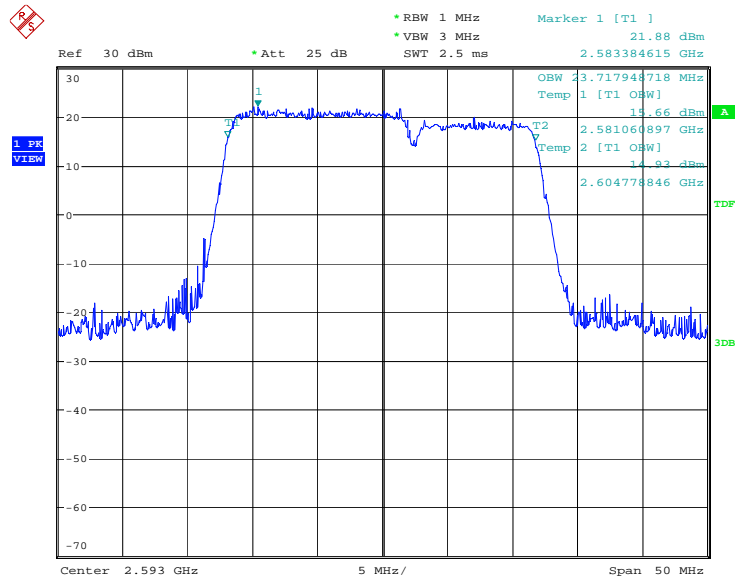

Date: 28.OCT.2020 08:03:45

### LTE CA\_41C, 15MHz+10MHz Bandwidth, 16QAM (99% BW)

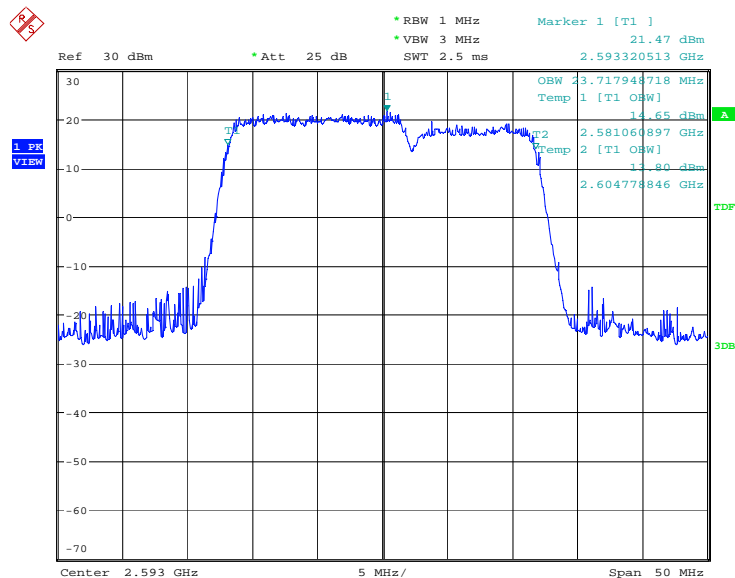


Date: 28.OCT.2020 08:02:01

### LTE CA\_41C, 10MHz+20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	28205.13	28205.13

### LTE CA\_41C, 10MHz+20MHz Bandwidth, QPSK (99% BW)

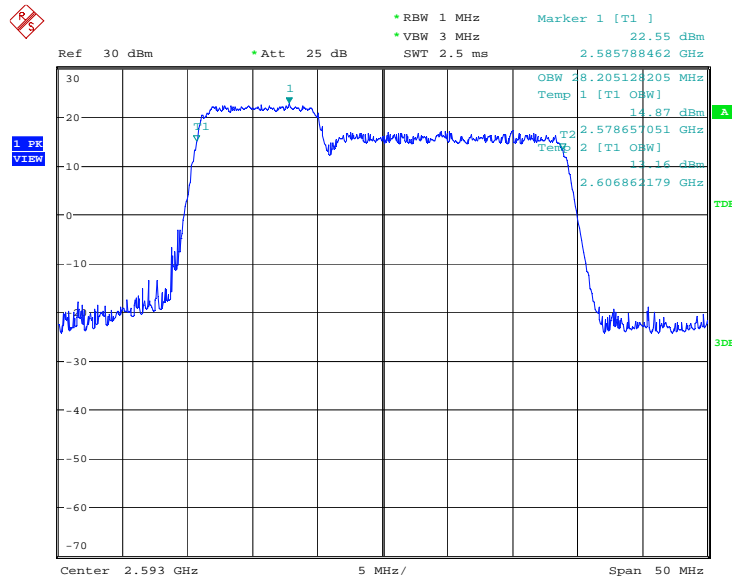

Date: 28.OCT.2020 08:05:18

### LTE CA\_41C, 10MHz+20MHz Bandwidth, 16QAM (99% BW)

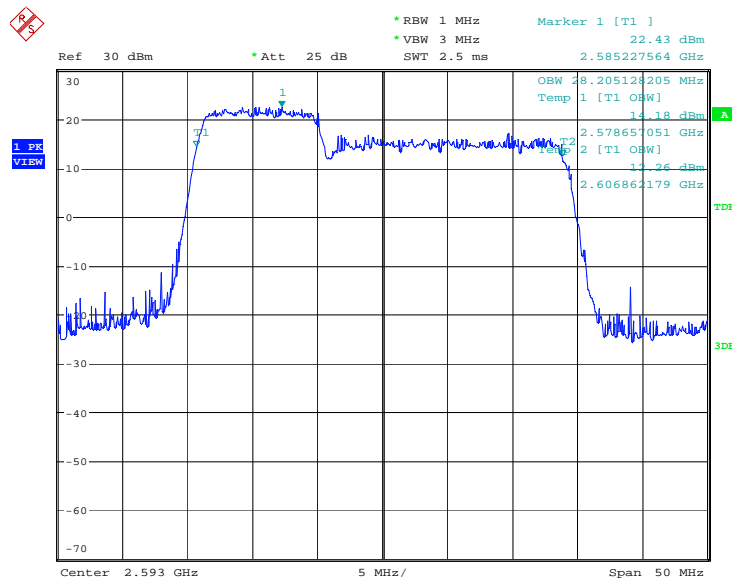


Date: 28.OCT.2020 08:06:44

### LTE CA\_41C, 20MHz+10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	28285.26	28285.26

### LTE CA\_41C, 20MHz+10MHz Bandwidth, QPSK (99% BW)

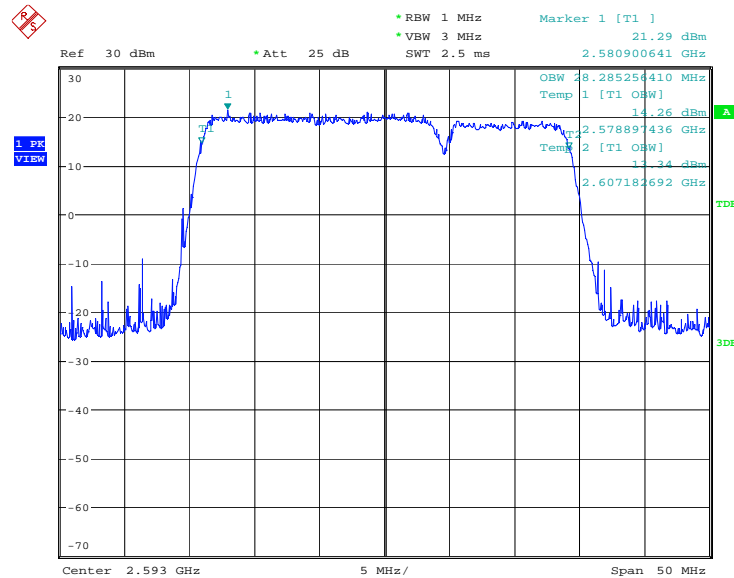

Date: 28.OCT.2020 08:10:59

### LTE CA\_41C, 20MHz+10MHz Bandwidth, 16QAM (99% BW)

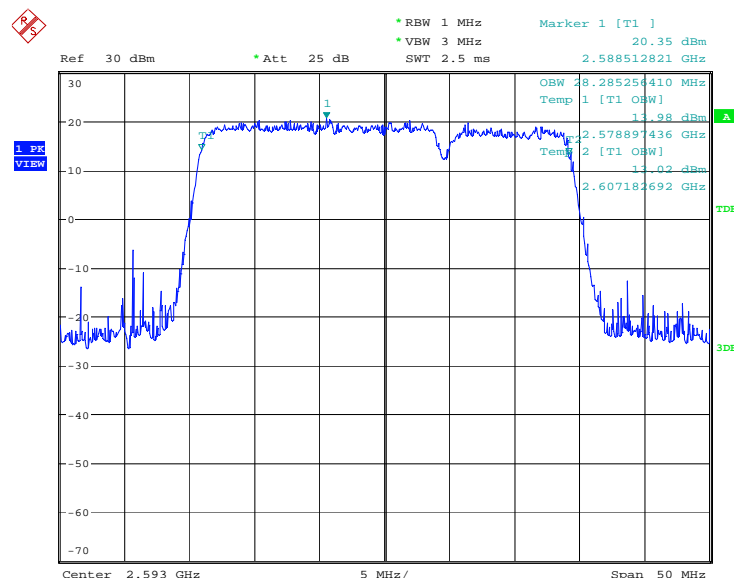


Date: 28.OCT.2020 08:09:34

### LTE CA\_41C, 15MHz+15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	28766.03	28685.90

### LTE CA\_41C, 15MHz+15MHz Bandwidth, QPSK (99% BW)

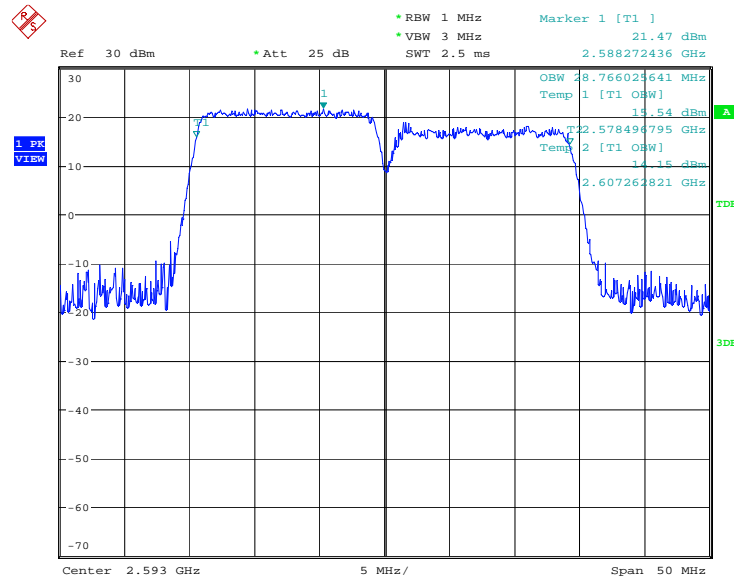

Date: 28.OCT.2020 08:11:59

### LTE CA\_41C, 15MHz+15MHz Bandwidth, 16QAM (99% BW)

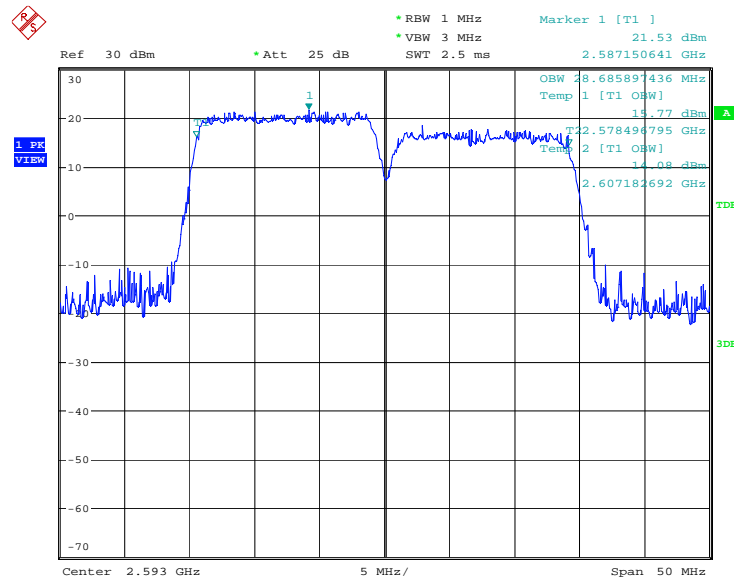


Date: 28.OCT.2020 08:13:27

### LTE CA\_41C, 15MHz+20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	33012.82	33012.82

### LTE CA\_41C, 15MHz+20MHz Bandwidth, QPSK (99% BW)

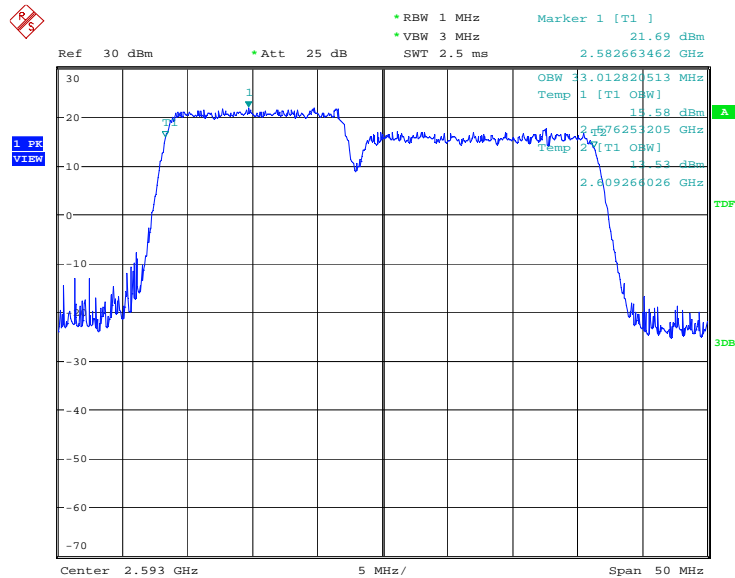

Date: 28.OCT.2020 08:17:42

### LTE CA\_41C, 15MHz+20MHz Bandwidth, 16QAM (99% BW)

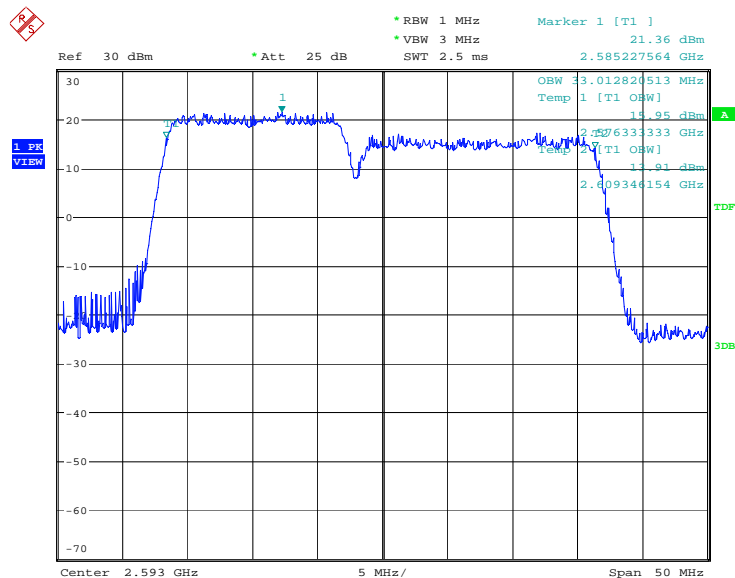


Date: 28.OCT.2020 08:17:07

### LTE CA\_41C, 20MHz+15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	33092.95	33012.82

### LTE CA\_41C, 20MHz+15MHz Bandwidth, QPSK (99% BW)

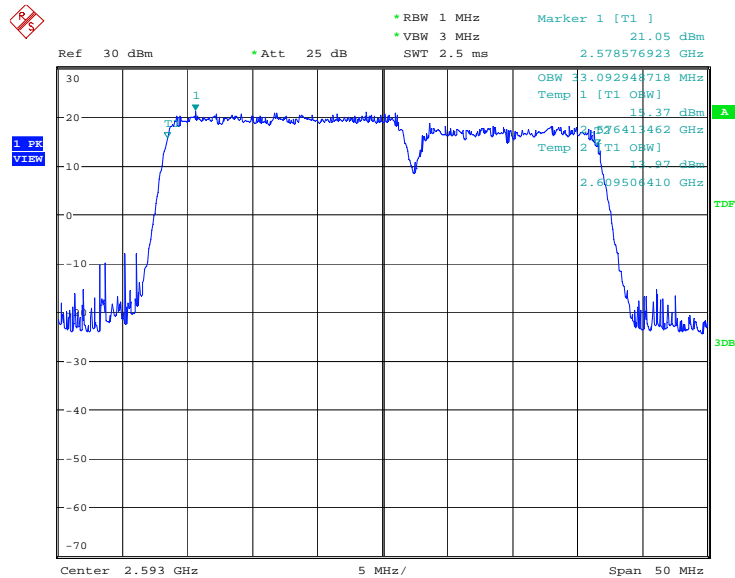

Date: 28.OCT.2020 08:19:49

### LTE CA\_41C, 20MHz+15MHz Bandwidth, 16QAM (99% BW)

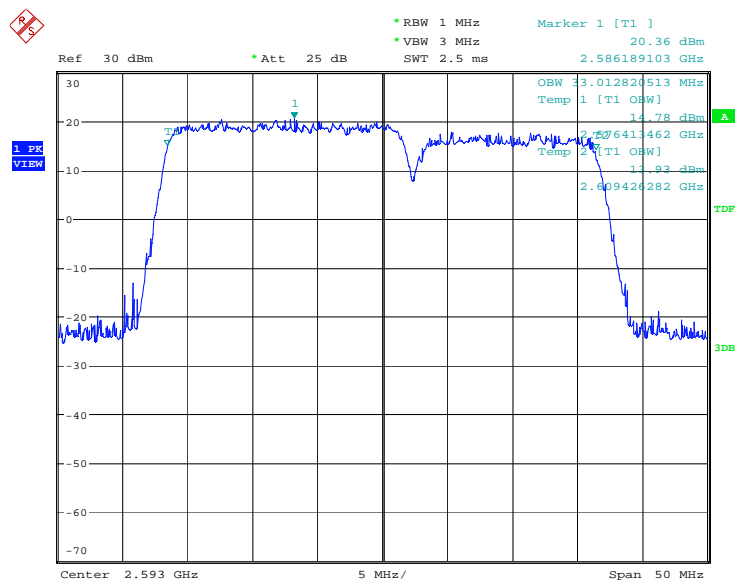


Date: 28.OCT.2020 08:21:11

### LTE CA\_41C, 20MHz+20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	37820.51	37820.51

### LTE CA\_41C, 20MHz+20MHz Bandwidth, QPSK (99% BW)

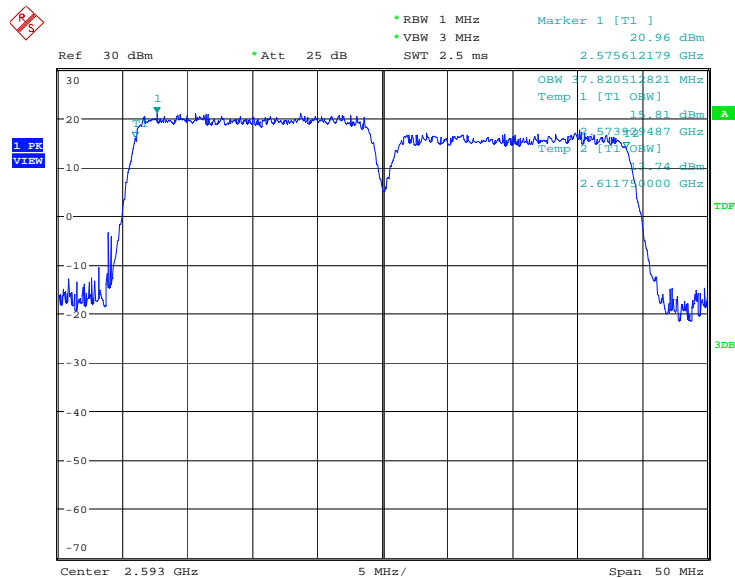

Date: 28.OCT.2020 08:25:09

### LTE CA\_41C, 20MHz+20MHz Bandwidth, 16QAM (99% BW)

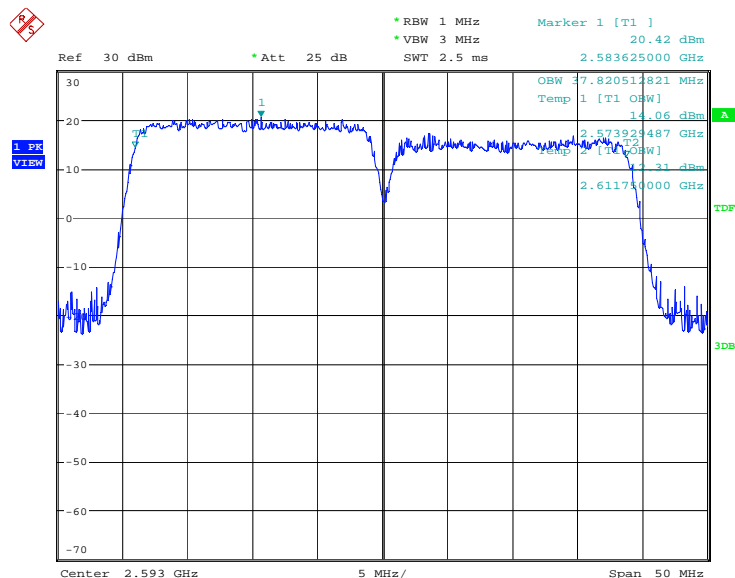

Date: 28.OCT.2020 08:22:32



## **A.5 Emission Bandwidth**

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

### LTE CA\_41C, 5MHz+20MHz (-26dBc BW)


Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(KHz)	
2593.0	QPSK	16QAM
	25881.41	25480.77

### LTE CA\_41C, 5MHz+20MHz Bandwidth, QPSK (-26dBc BW BW)

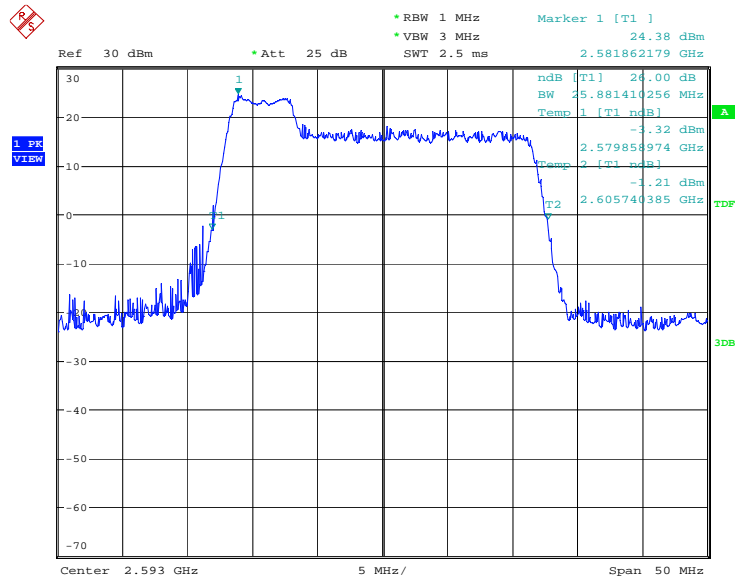

Date: 28.OCT.2020 07:51:57

### LTE CA\_41C, 5MHz+20MHz Bandwidth,16QAM (-26dBc BW BW)

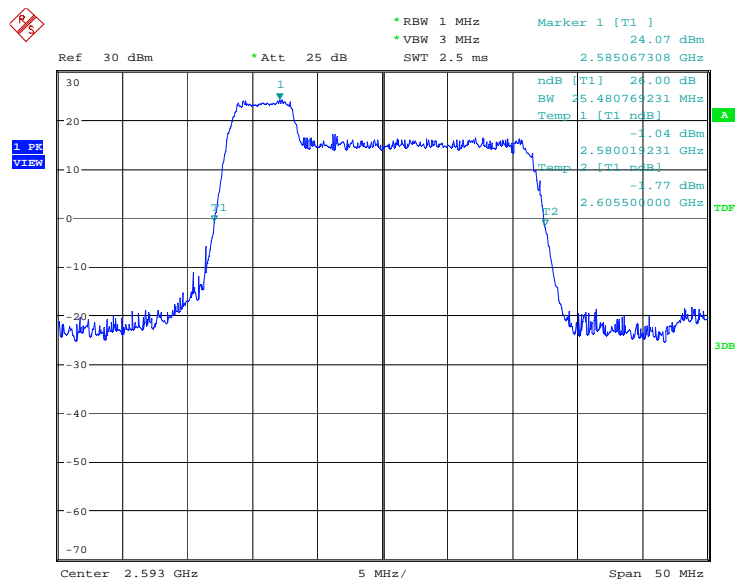


Date: 28.OCT.2020 07:52:34

### LTE CA\_41C, 20MHz+5MHz (-26dBc BW)


Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(KHz)	
2593.0	QPSK	16QAM
	26121.79	26041.67

### LTE CA\_41C, 20MHz+5MHz Bandwidth, QPSK (-26dBc BW BW)

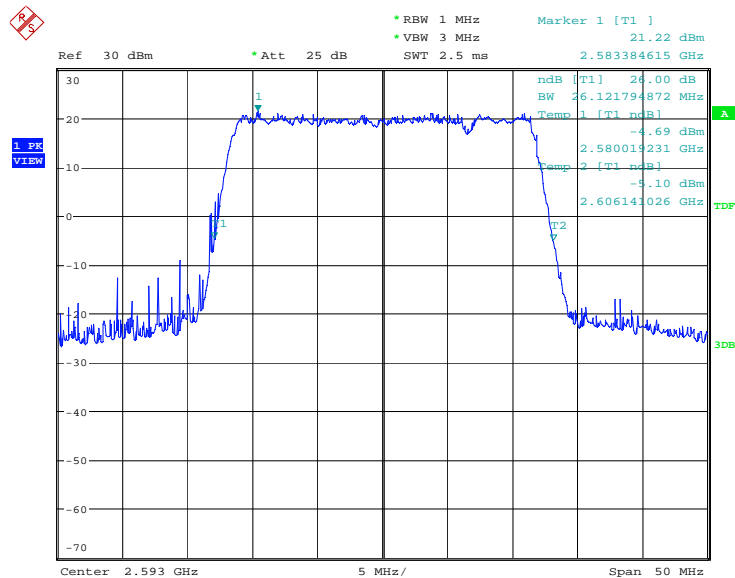

Date: 28.OCT.2020 07:57:06

### LTE CA\_41C,20MHz+5MHz Bandwidth,16QAM (-26dBc BW BW)

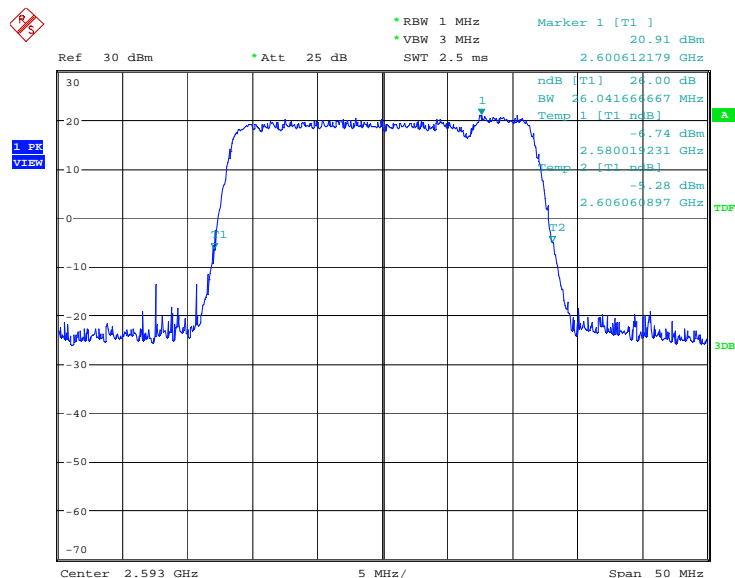


Date: 28.OCT.2020 07:56:22

### LTE CA\_41C, 10MHz+15MHz (-26dBc BW)


Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(KHz)	
2593.0	QPSK	16QAM
	26201.92	26041.67

### LTE CA\_41C, 10MHz+15MHz Bandwidth, QPSK (-26dBc BW BW)

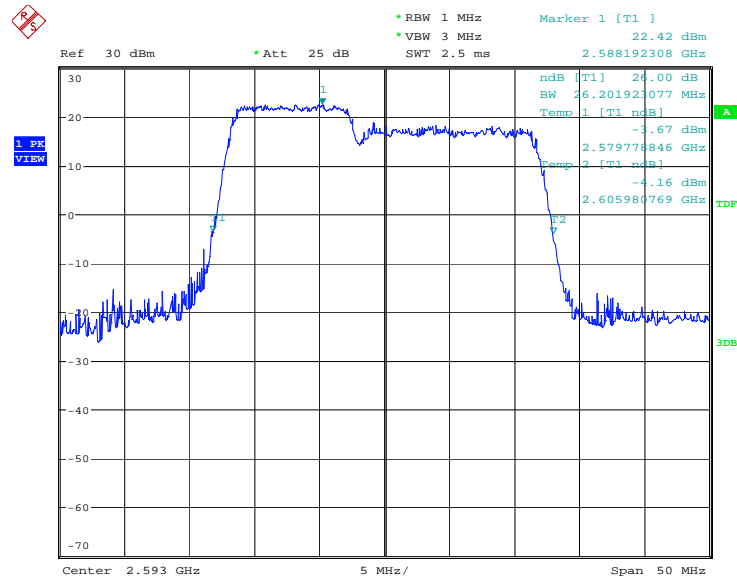

Date: 28.OCT.2020 07:59:33

### LTE CA\_41C, 10MHz+15MHz Bandwidth,16QAM (-26dBc BW BW)

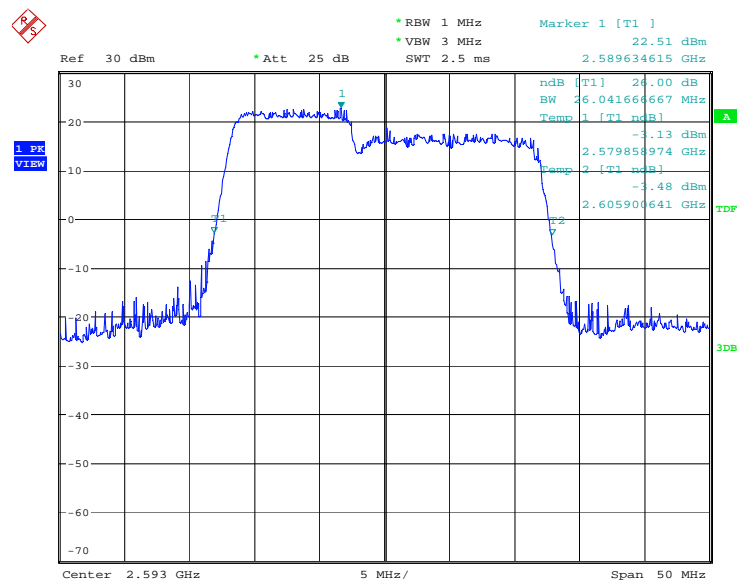


Date: 28.OCT.2020 08:31:48

### LTE CA\_41C, 15MHz+10MHz (-26dBc BW)


Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(KHz)	
2593.0	QPSK	16QAM
	26201.92	26282.05

### LTE CA\_41C, 15MHz+10MHz Bandwidth, QPSK (-26dBc BW BW)

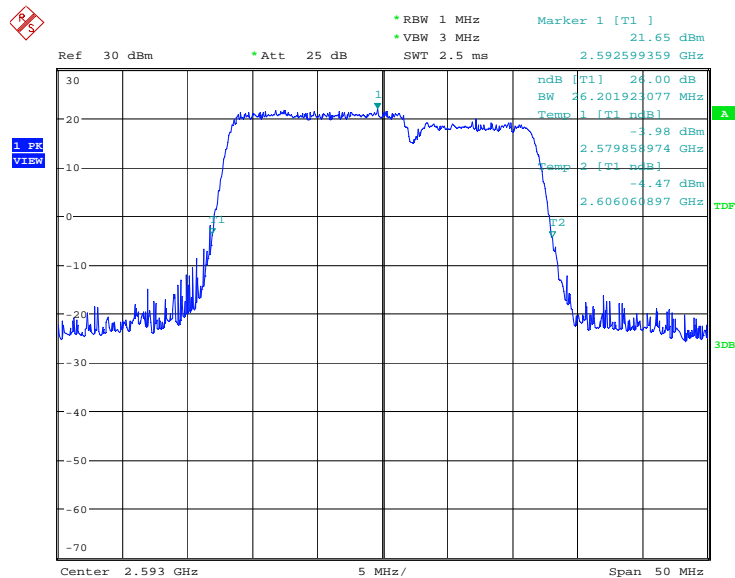

Date: 28.OCT.2020 08:03:22

### LTE CA\_41C, 15MHz+10MHz Bandwidth,16QAM (-26dBc BW BW)

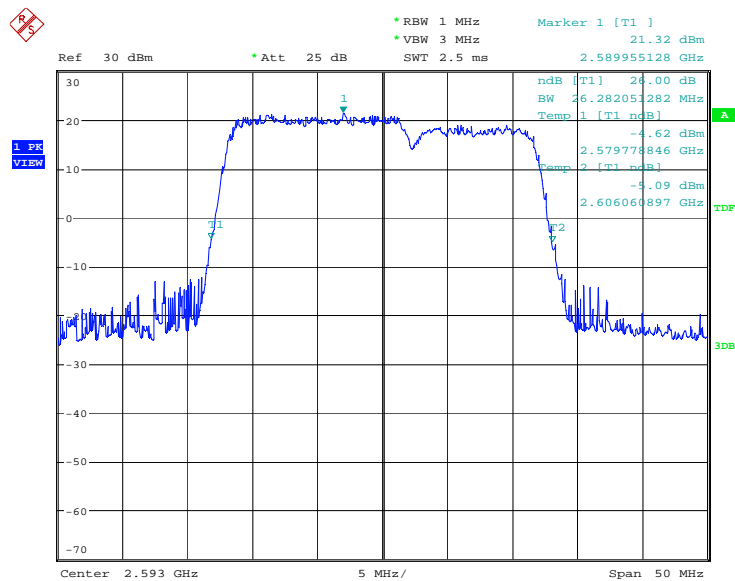


Date: 28.OCT.2020 08:29:38

### LTE CA\_41C, 10MHz+20MHz (-26dBc BW)


Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(KHz)	
2593.0	QPSK	16QAM
	30689.10	30769.23

### LTE CA\_41C, 10MHz+20MHz Bandwidth, QPSK (-26dBc BW BW)

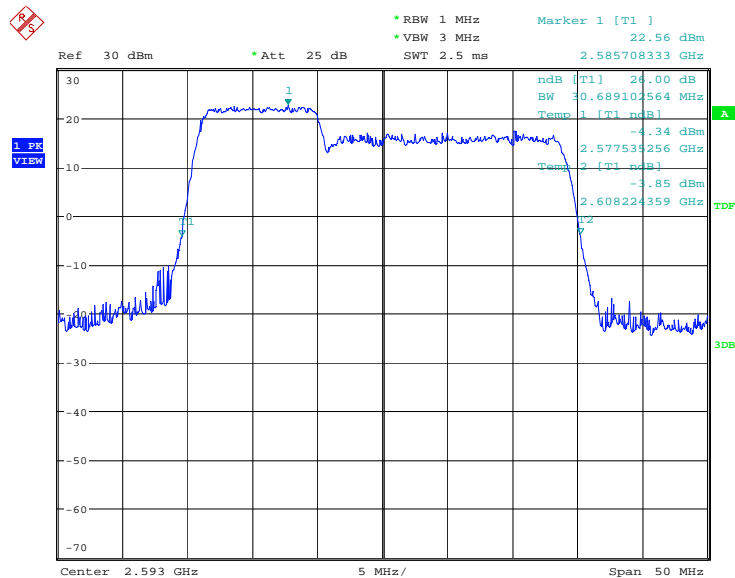

Date: 28.OCT.2020 08:05:41

### LTE CA\_41C, 10MHz+20MHz Bandwidth,16QAM (-26dBc BW BW)

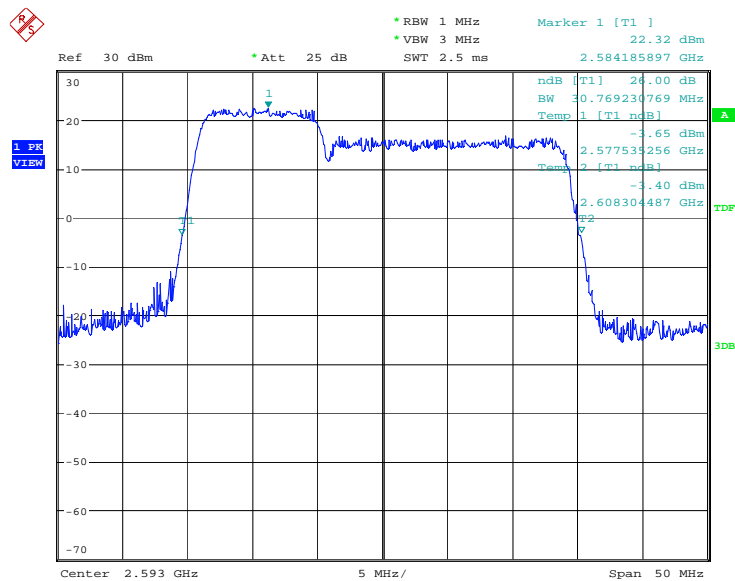


Date: 28.OCT.2020 08:06:23

### LTE CA\_41C, 20MHz+10MHz (-26dBc BW)


Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(KHz)	
2593.0	QPSK	16QAM
	30849.36	30929.49

### LTE CA\_41C, 20MHz+10MHz Bandwidth, QPSK (-26dBc BW BW)

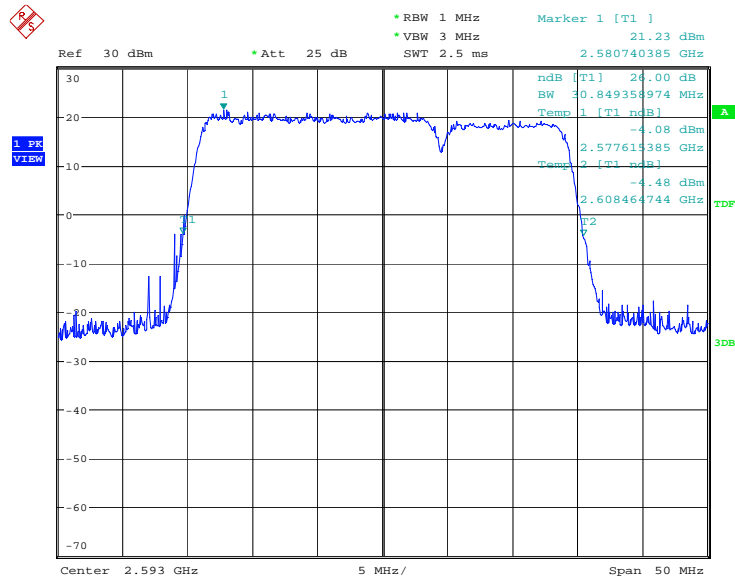

Date: 28.OCT.2020 08:10:36

### LTE CA\_41C, 20MHz+10MHz Bandwidth,16QAM (-26dBc BW BW)

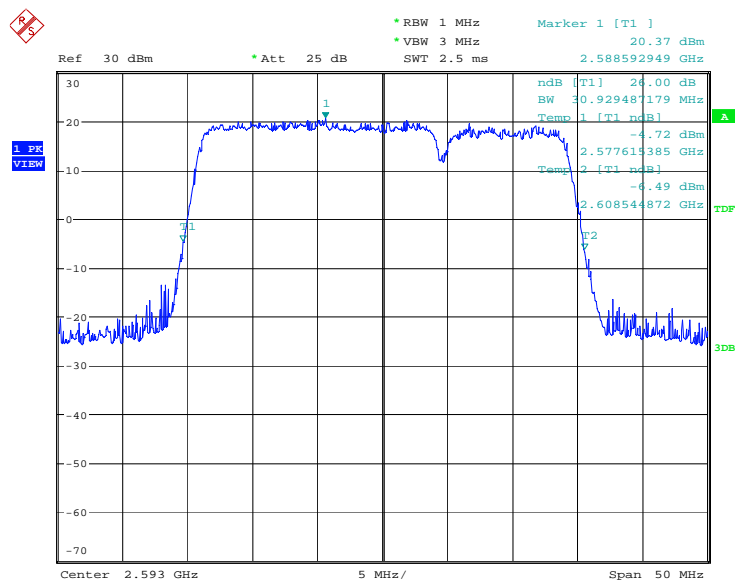


Date: 28.OCT.2020 08:09:55

### LTE CA\_41C, 15MHz+15MHz (-26dBc BW)


Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(KHz)	
2593.0	QPSK	16QAM
	31410.26	31330.13

### LTE CA\_41C, 15MHz+15MHz Bandwidth, QPSK (-26dBc BW BW)

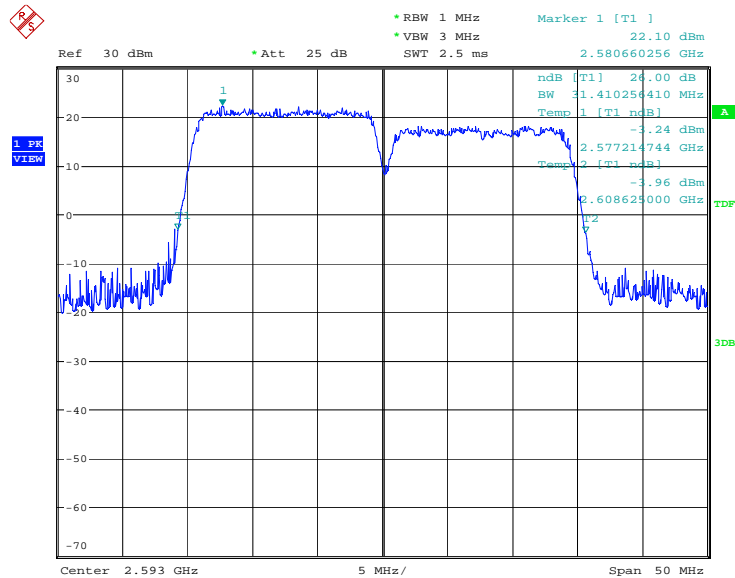

Date: 28.OCT.2020 08:12:21

### LTE CA\_41C, 15MHz+15MHz Bandwidth, 16QAM (-26dBc BW BW)

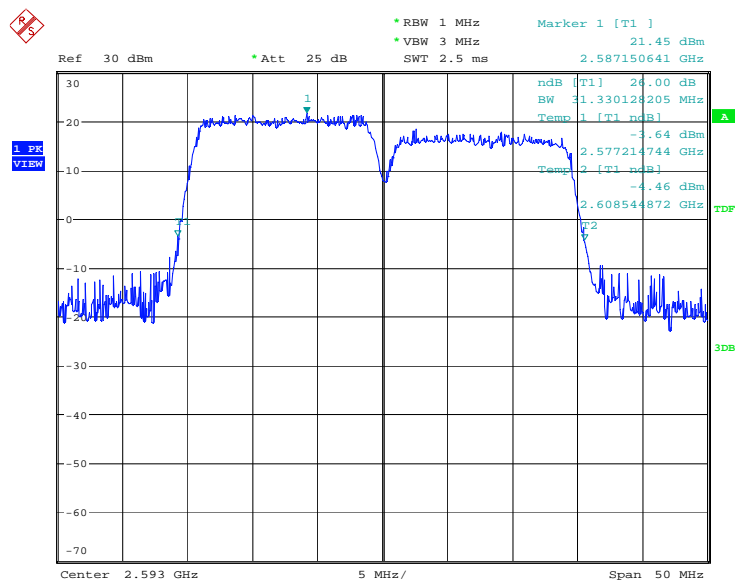


Date: 28.OCT.2020 08:13:06



### LTE CA\_41C, 15MHz+20MHz (-26dBc BW)


Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(KHz)	
2593.0	QPSK	16QAM
	35657.05	35657.05

### LTE CA\_41C, 15MHz+20MHz Bandwidth, QPSK (-26dBc BW BW)

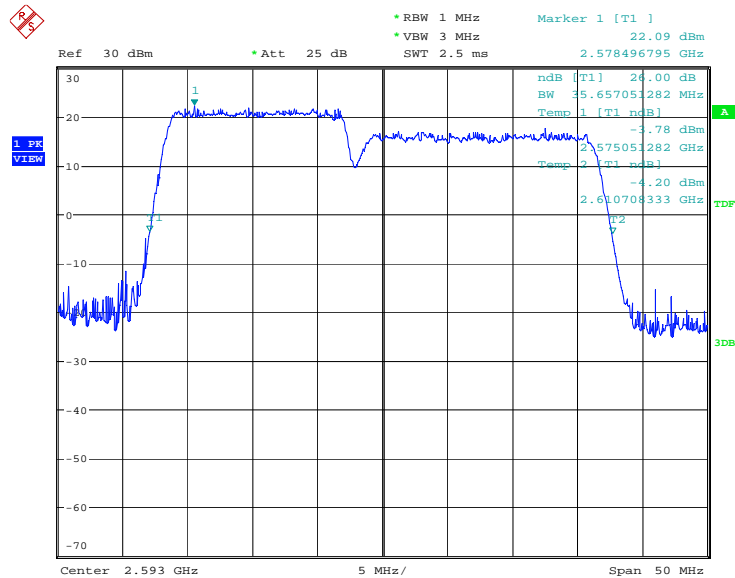

Date: 28.OCT.2020 08:17:59

### LTE CA\_41C, 15MHz+20MHz Bandwidth,16QAM (-26dBc BW BW)

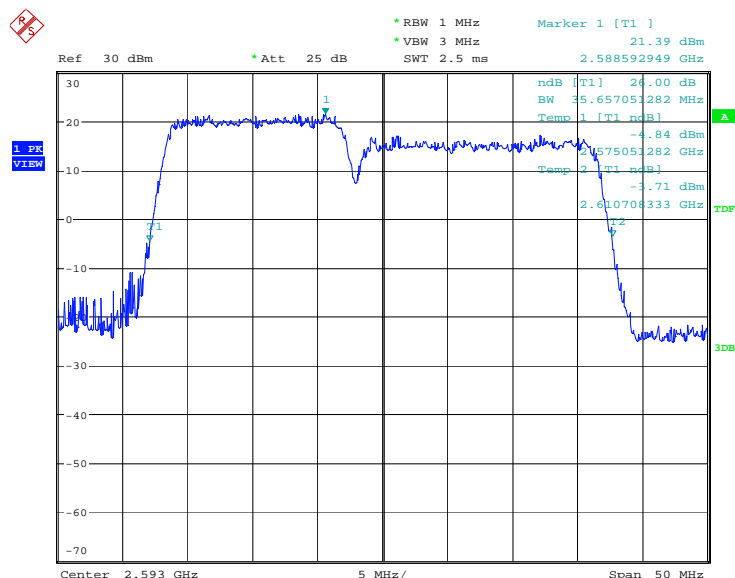


Date: 28.OCT.2020 08:16:45

### LTE CA\_41C, 20MHz+15MHz (-26dBc BW)


Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(KHz)	
2593.0	QPSK	16QAM
	35897.44	35737.18

### LTE CA\_41C, 20MHz+15MHz Bandwidth, QPSK (-26dBc BW BW)

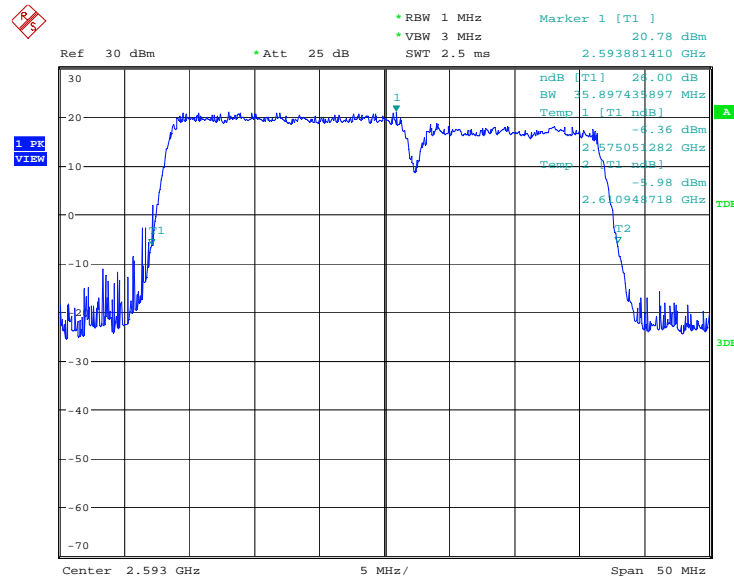

Date: 28.OCT.2020 08:28:06

### LTE CA\_41C, 20MHz+15MHz Bandwidth,16QAM (-26dBc BW BW)

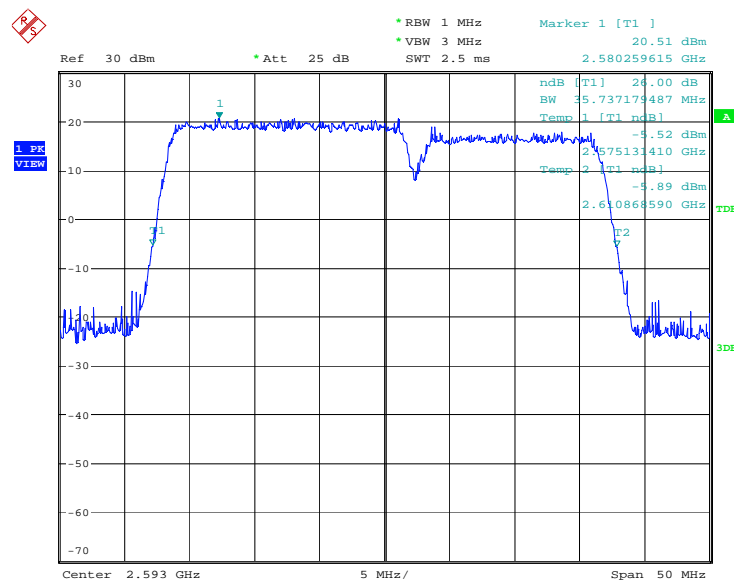


Date: 28.OCT.2020 08:20:47

### LTE CA\_41C, 20MHz+20MHz (-26dBc BW)


Frequency(MHz)	Occupied Bandwidth (-26dBc BW)(KHz)	
2593.0	QPSK	16QAM
	40625.00	40785.26

### LTE CA\_41C, 20MHz+20MHz Bandwidth, QPSK (-26dBc BW BW)

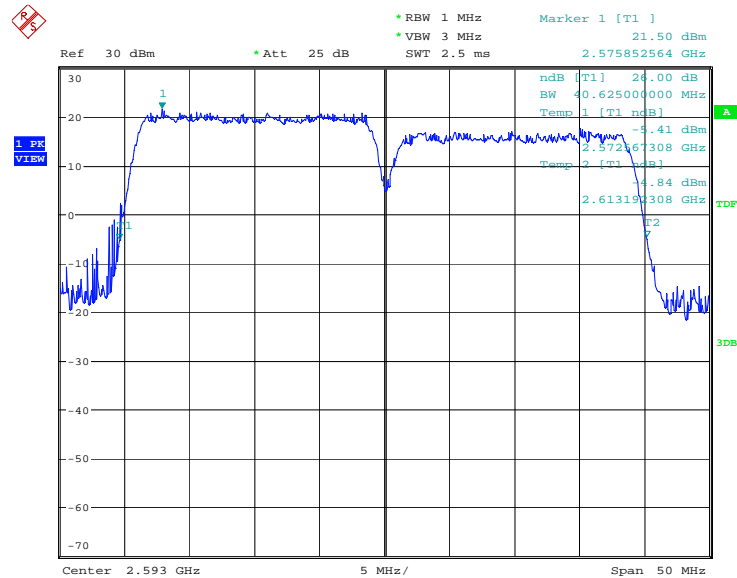

Date: 28.OCT.2020 08:25:25

### LTE CA\_41C, 20MHz+20MHz Bandwidth,16QAM (-26dBc BW BW)

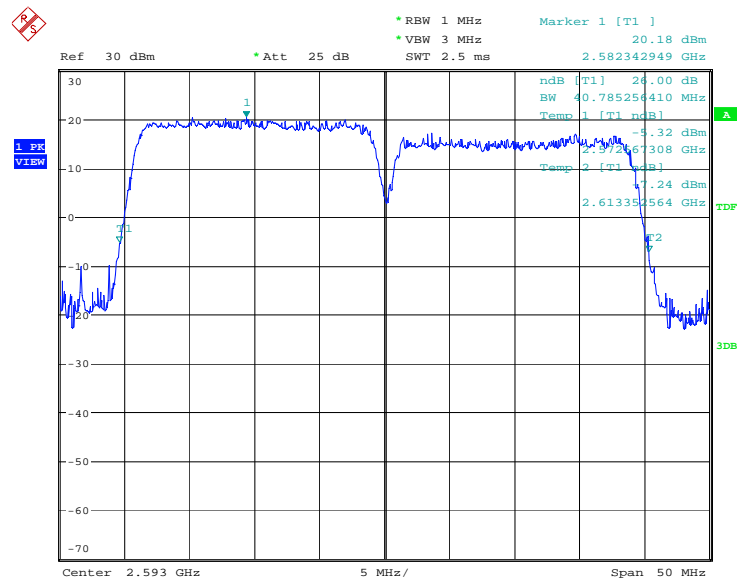

Date: 28.OCT.2020 08:24:35

## **A.6 Band Edge Compliance**

### **A.6.1 Measurement limit**

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

## A.6.2 Measurement result


Only the worst case result is given below

LTE CA\_41C


LOW BAND EDGE BLOCK-5MHz+20MHz-1RB

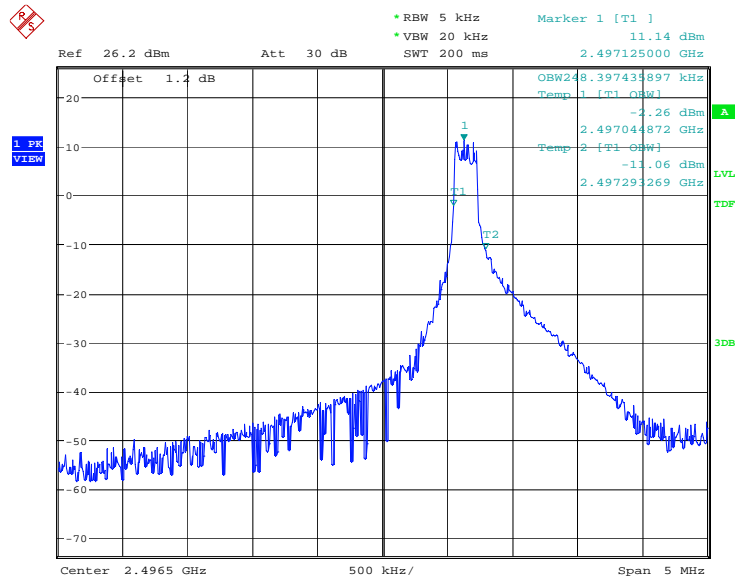

Date: 28.OCT.2020 12:59:40

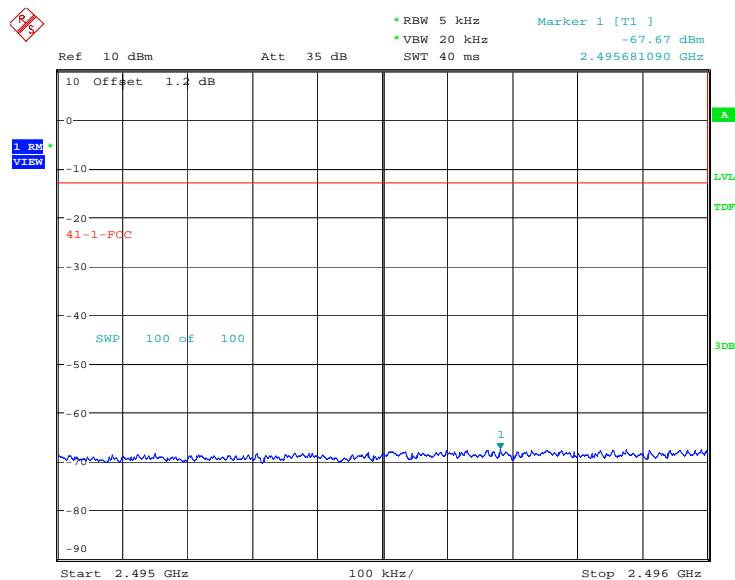


Date: 28.OCT.2020 13:00:43

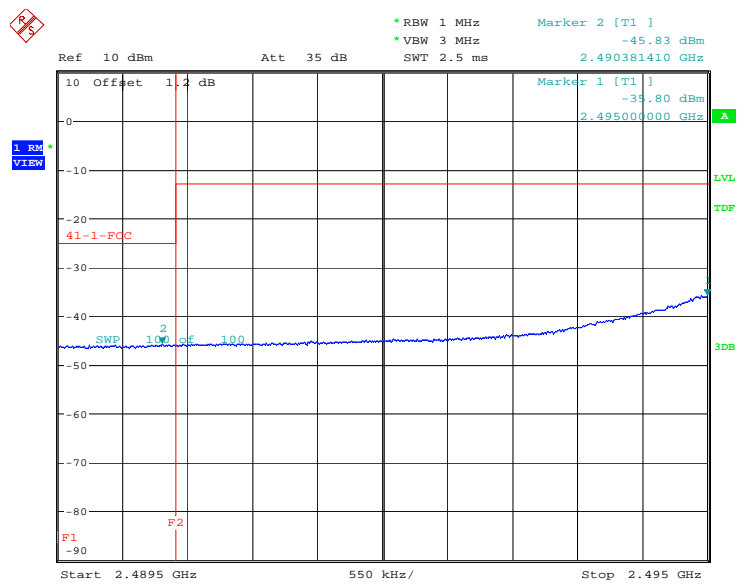


Date: 28.OCT.2020 13:01:45

## LOW BAND EDGE BLOCK-5MHz+20MHz -100%RB

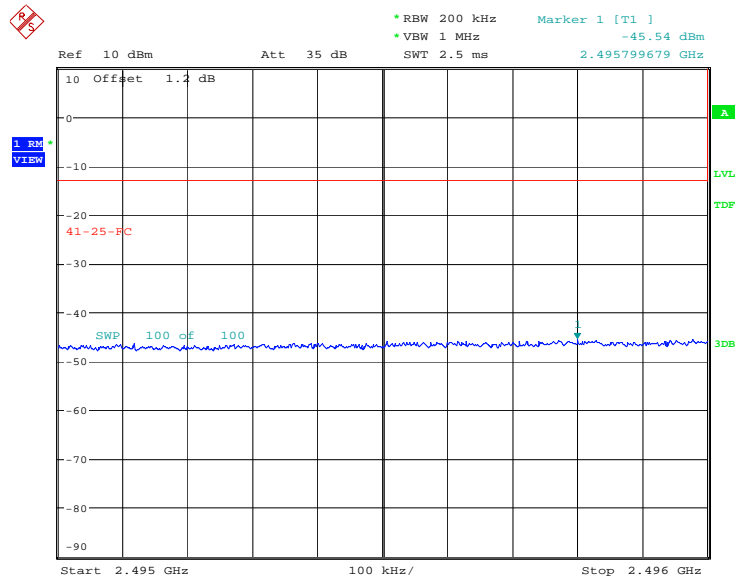


Date: 28.OCT.2020 12:58:01

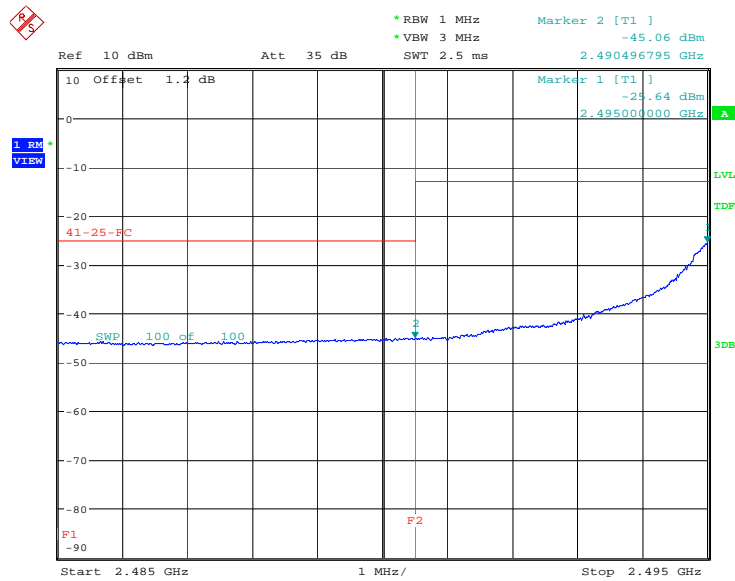


Date: 28.OCT.2020 12:58:34

## LOW BAND EDGE BLOCK-10MHz+15MHz-1RB

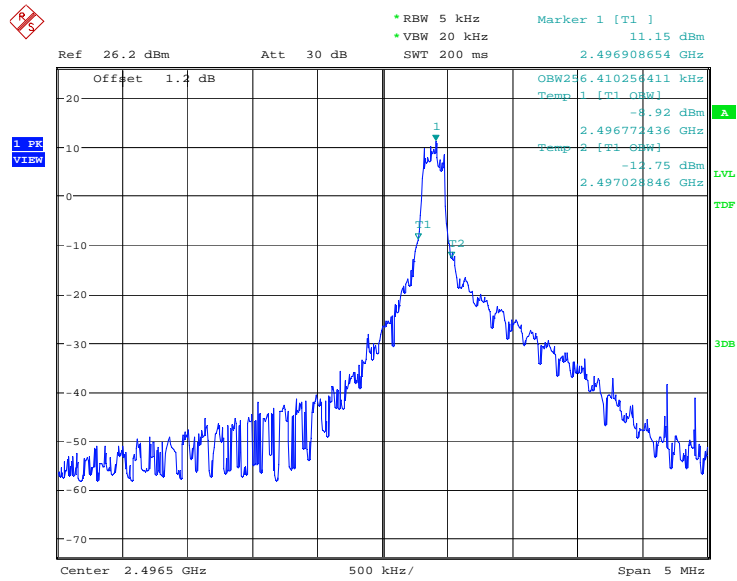


Date: 28.OCT.2020 12:48:58

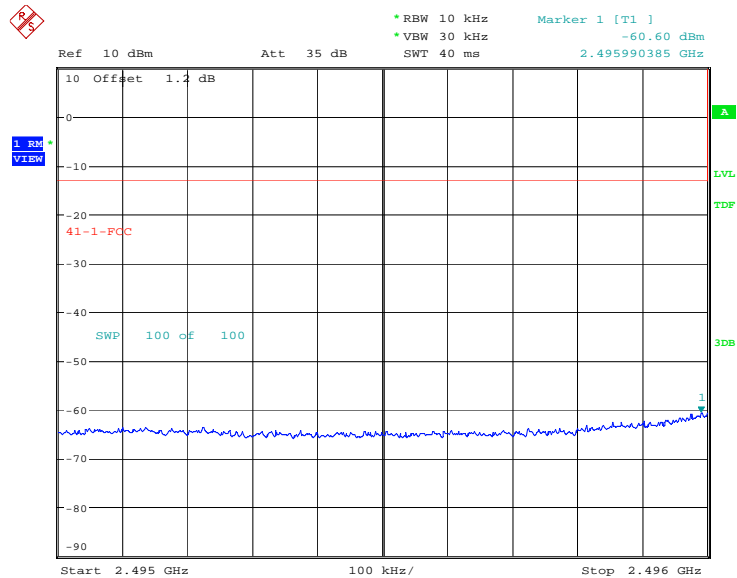


Date: 28.OCT.2020 12:50:00



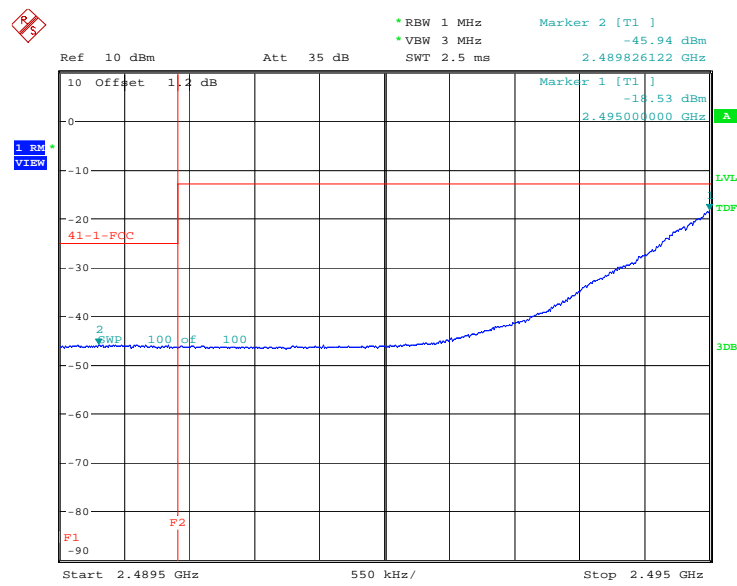


Date: 28.OCT.2020 12:51:03

## LOW BAND EDGE BLOCK-10MHz+15MHz -100%RB

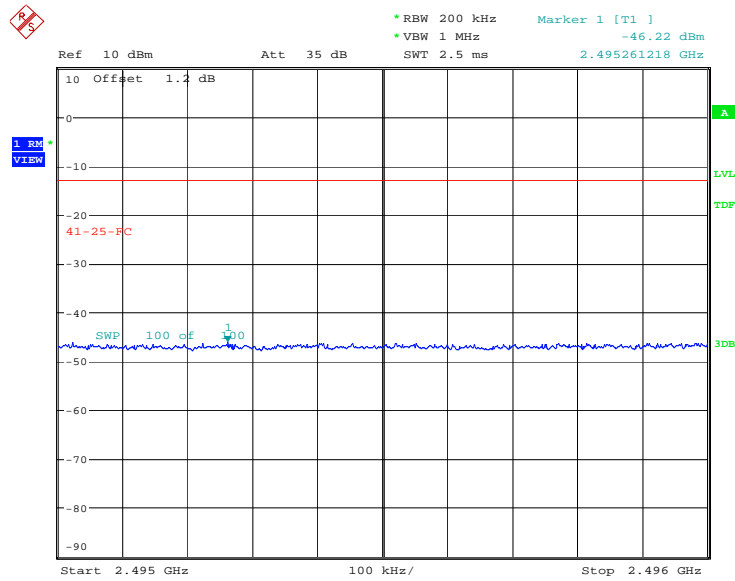


Date: 28.OCT.2020 12:24:26

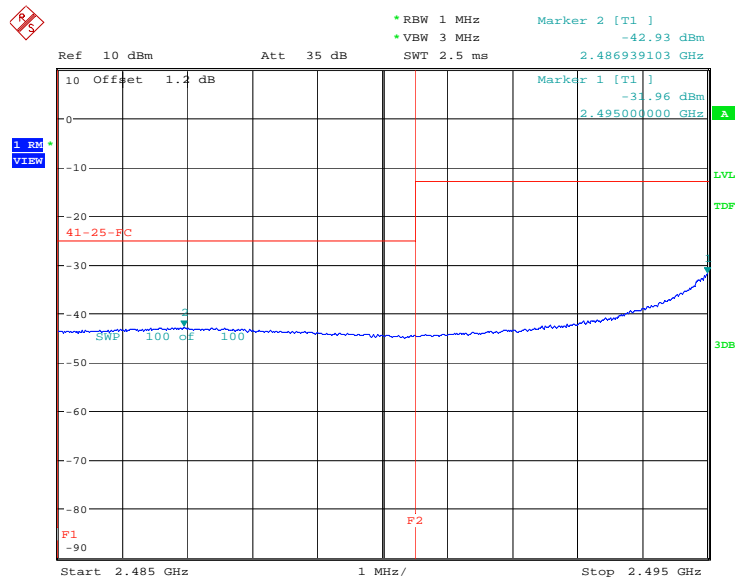


Date: 28.OCT.2020 12:24:59


# LOW BAND EDGE BLOCK-10MHz+20MHz-1RB

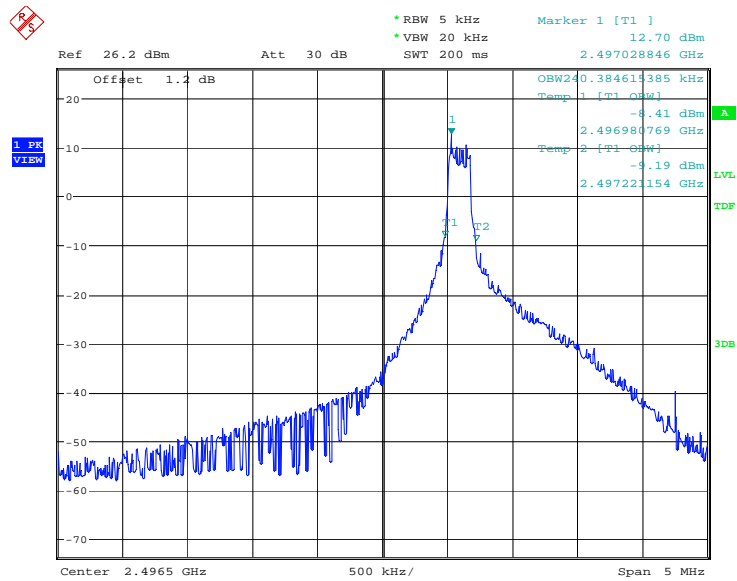

Date: 28.OCT.2020 13:07:24

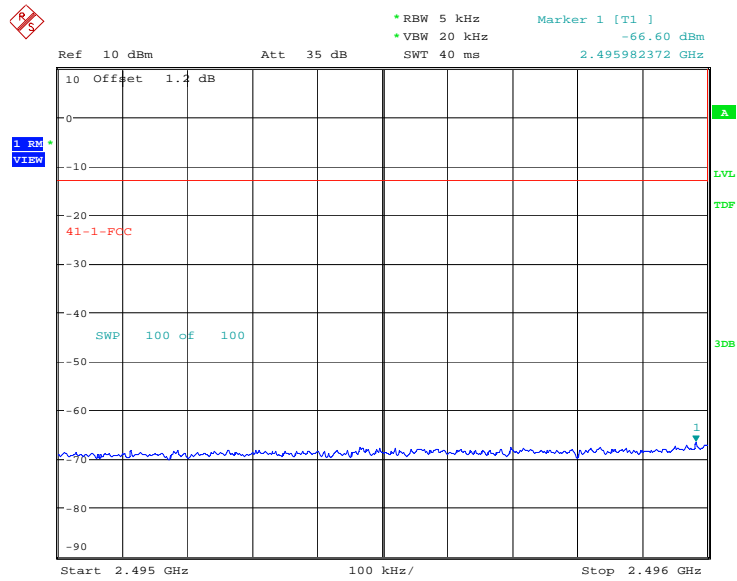


Date: 28.OCT.2020 13:08:26

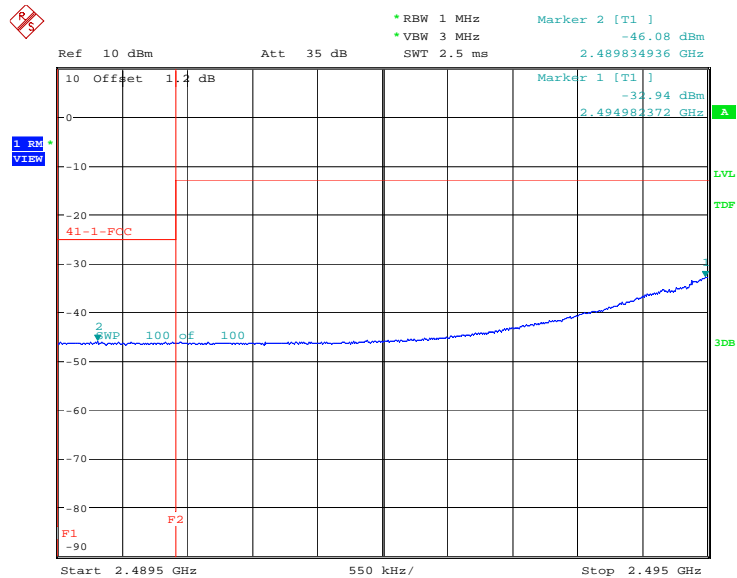


Date: 28.OCT.2020 13:09:29

# LOW BAND EDGE BLOCK-10MHz+20MHz -100%RB

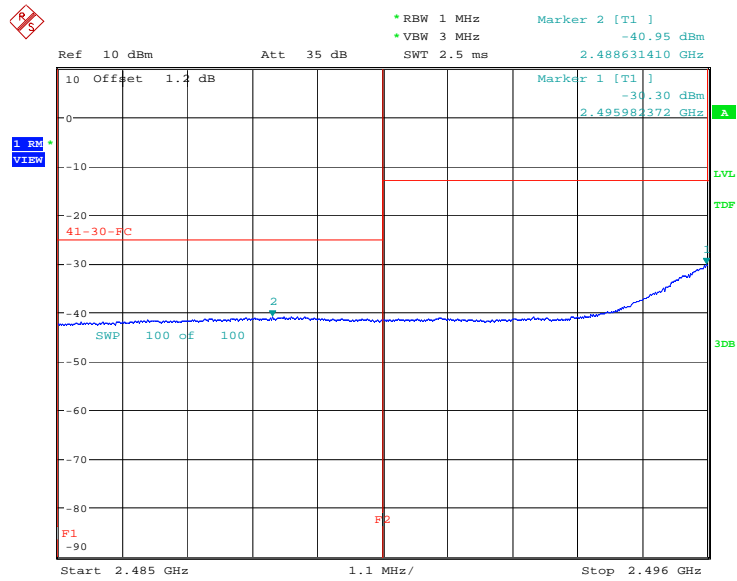


Date: 28.OCT.2020 13:03:58


# LOW BAND EDGE BLOCK-15MHz+15MHz-1RB

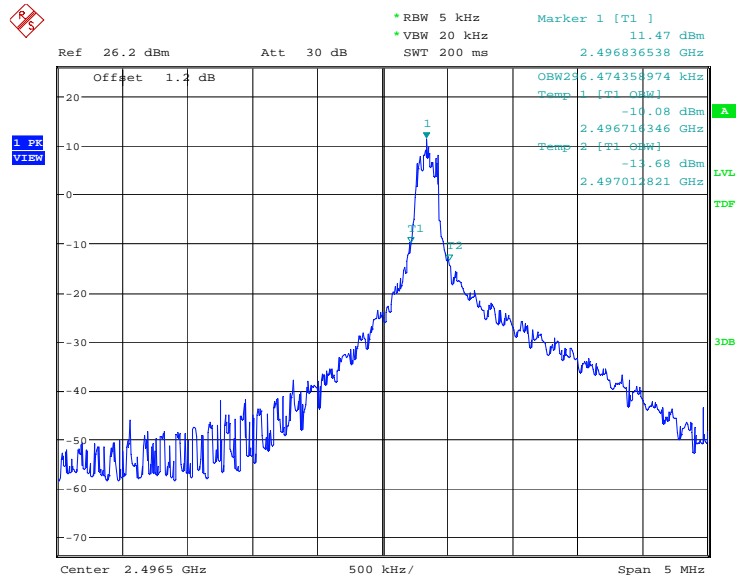

Date: 29.OCT.2020 13:25:11

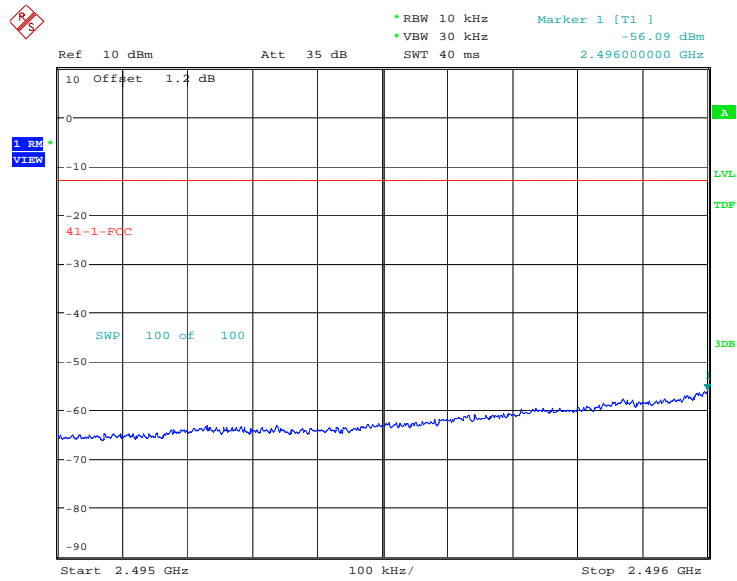


Date: 29.OCT.2020 13:26:13

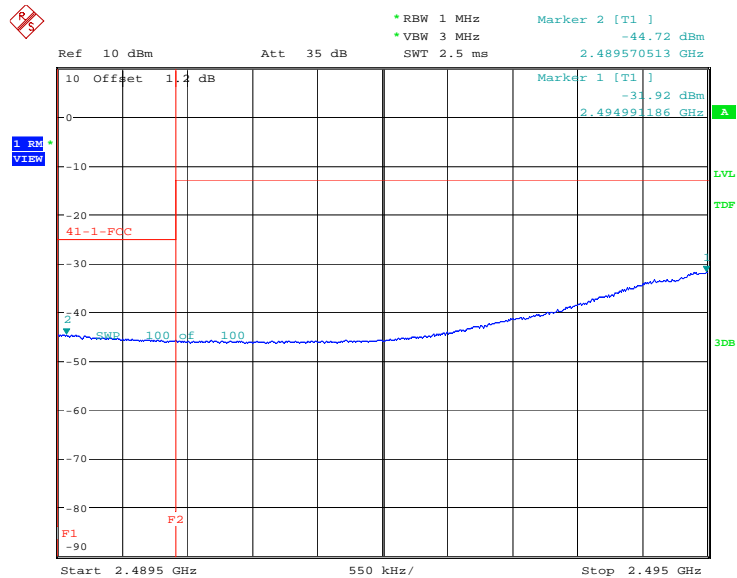

Date: 29.OCT.2020 13:27:16


## LOW BAND EDGE BLOCK-15MHz+15MHz -100%RB

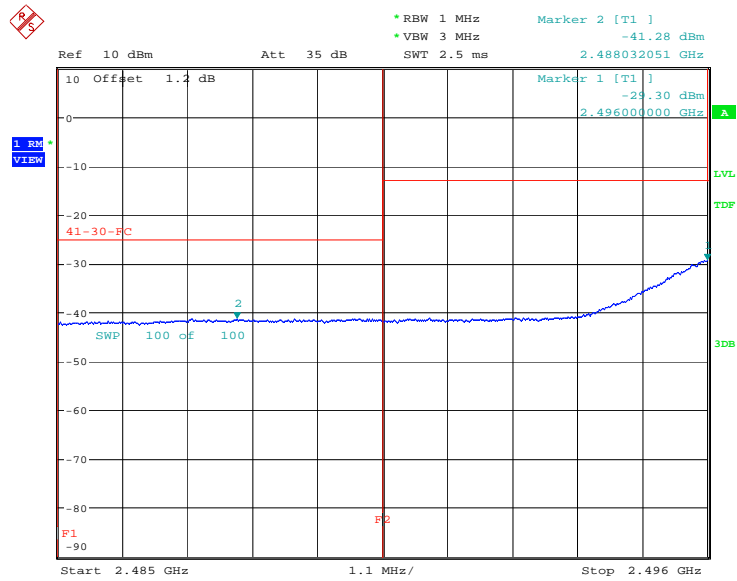


Date: 29.OCT.2020 13:20:37




# LOW BAND EDGE BLOCK-15MHz+20MHz-1RB

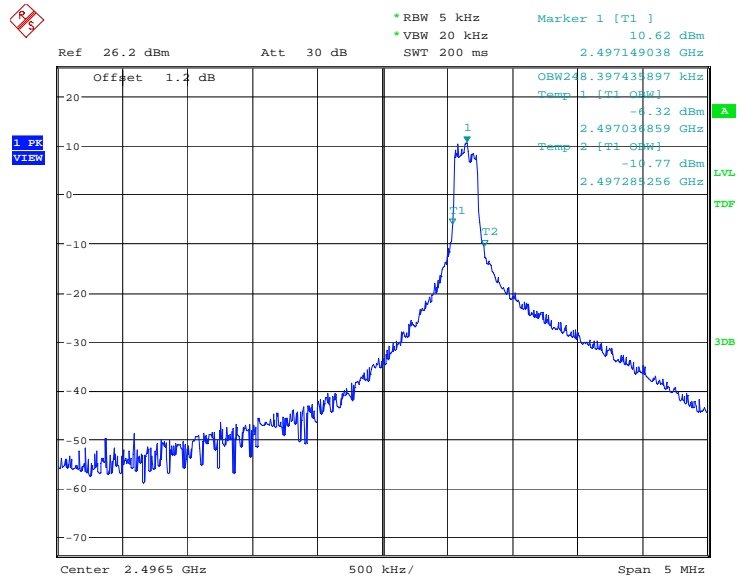

Date: 29.OCT.2020 13:32:39

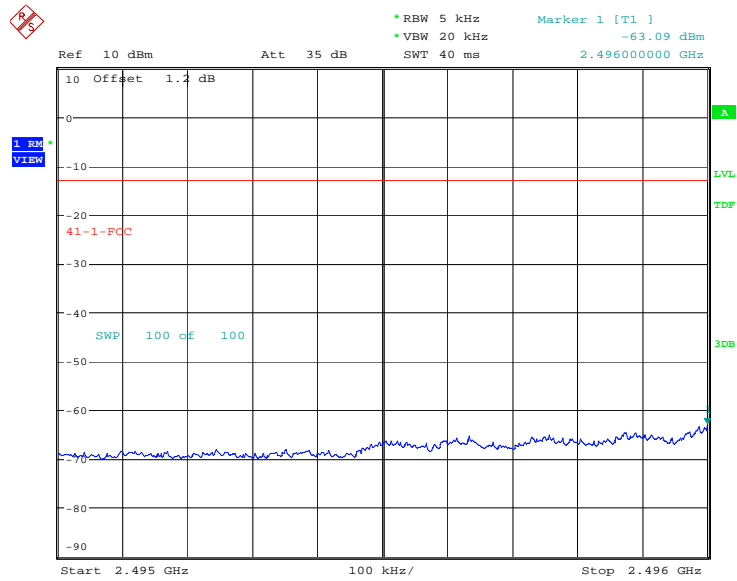

Date: 29.OCT.2020 13:33:42

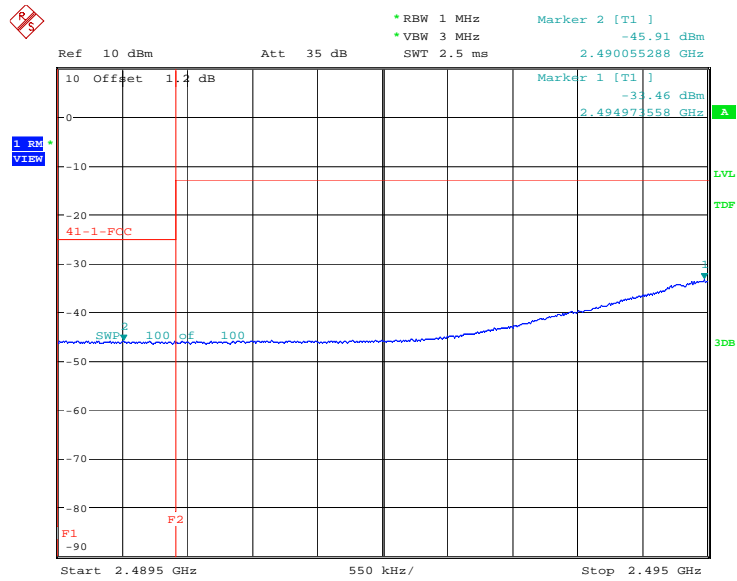

Date: 29.OCT.2020 13:34:44



Ref 10 dBm Att 35 dB

10 Offset 1.2 dB

Marker 1 [T1] -30.67 dBm  
2.490482372 GHz

Marker 2 [T1] -41.81 dBm

\* RBW 1 MHz  
\* VBW 3 MHz  
SWT 2.5 ms

1 RM VIEW

41-35-FC

SWP 100 OF 100

F1 -90


F2

Start 2.485 GHz 1.1 MHz/ Stop 2.496 GHz


LVL TDF 3DB

Page 67 of 92


# LOW BAND EDGE BLOCK-20MHz+20MHz-1RB

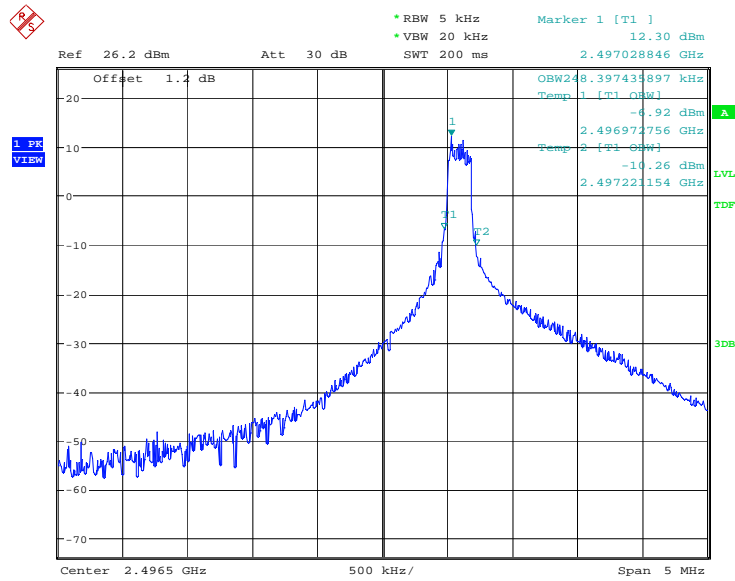

Date: 29.OCT.2020 13:37:53

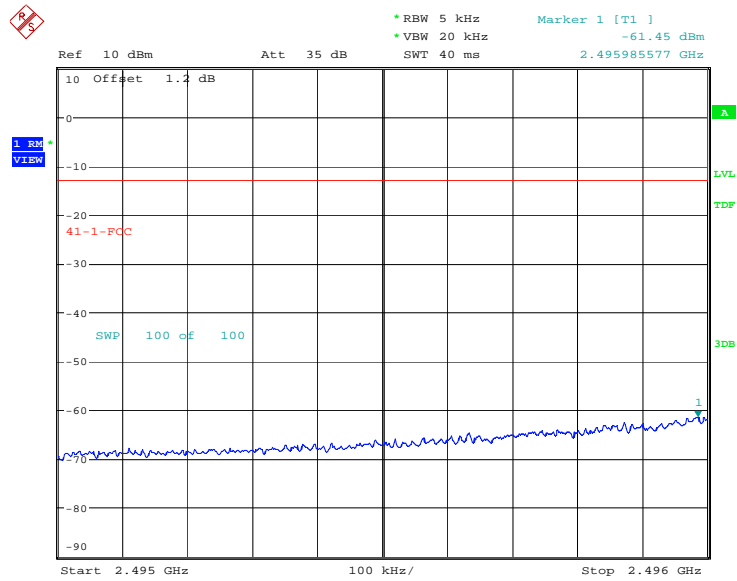


Date: 29.OCT.2020 13:38:55

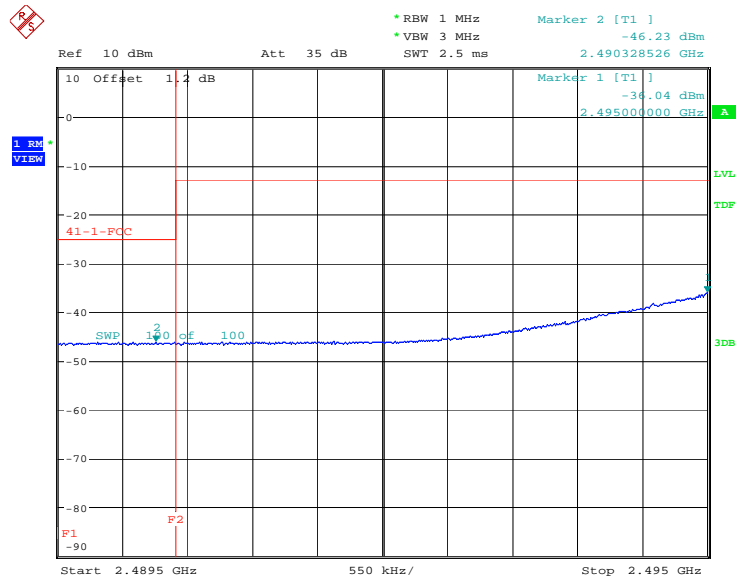


Date: 29.OCT.2020 13:39:58

## LOW BAND EDGE BLOCK-20MHz+20MHz -100%RB

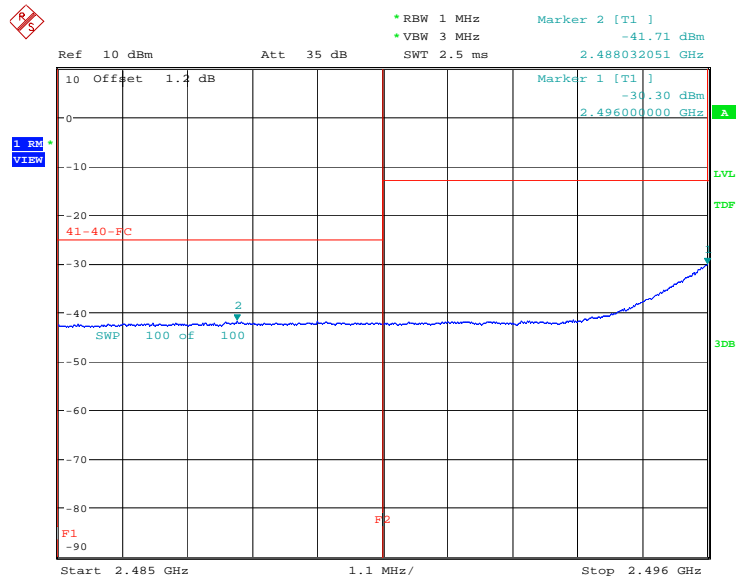


Date: 29.OCT.2020 13:37:12


## HIGH BAND EDGE BLOCK-20MHz+5MHz-1RB

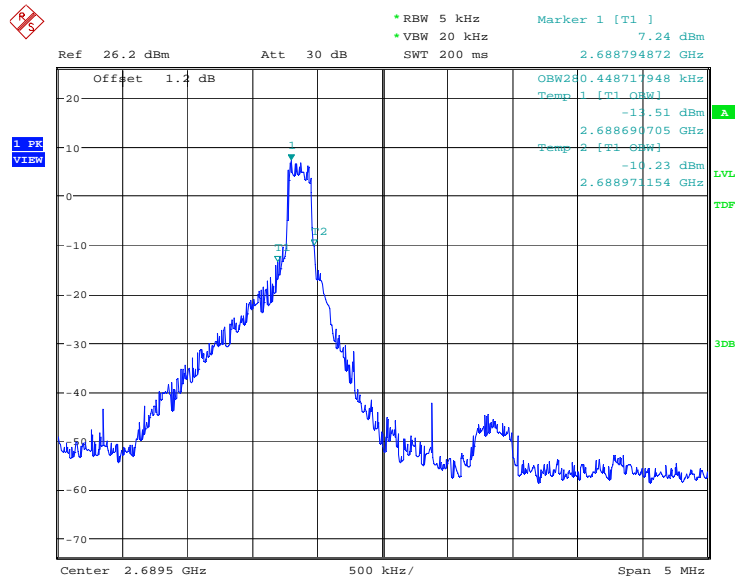

Date: 29.OCT.2020 13:44:36

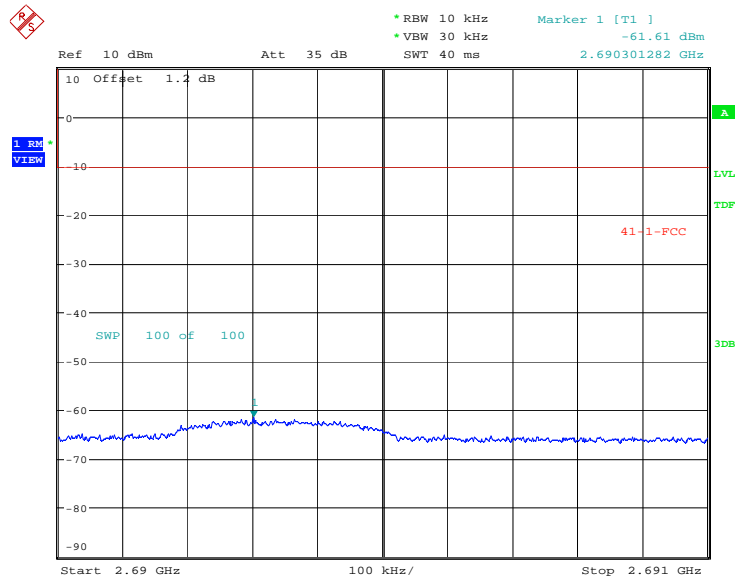

Date: 29.OCT.2020 13:45:38

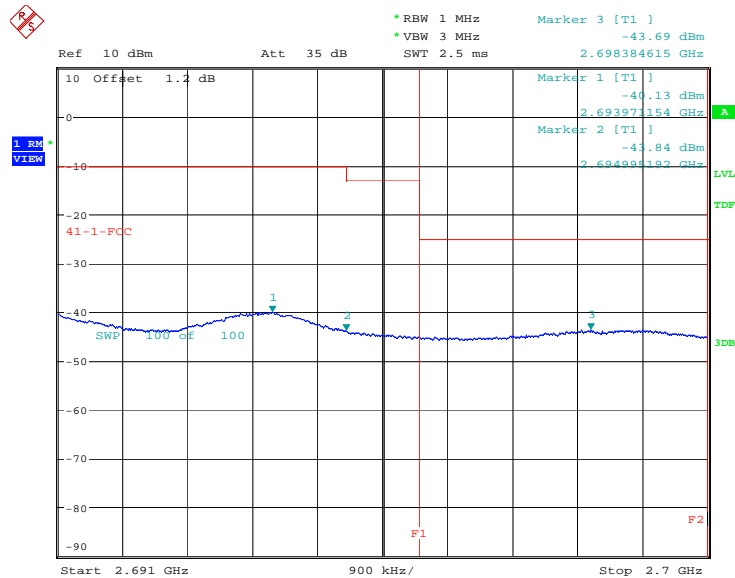

Date: 29.OCT.2020 13:46:40



Ref 10 dBm Att 35 dB

RBW 500 kHz VBW 2 MHz SWT 2.5 ms

Marker 1 [T1] -41.37 dBm

2.690338141 GHz

Offset 1.2 dB

1 BW VIEW

LVL

TDF

41-25-FC

3DB

Start 2.69 GHz 100 kHz/ Stop 2.691 GHz

\* RBW 1 MHz  
 \* VBW 3 MHz  
 SWT 2.5 ms

Marker 3 [T1]  
 -42.90 dBm  
 2.717304487 GHz

Ref 10 dBm  
 Att 35 dB

10 Offset 1.2 dB

Marker 1 [T1]  
 -39.54 dBm  
 2.691000000 GHz

Marker 2 [T1]  
 -41.09 dBm  
 2.695136218 GHz

41-25-FC

SWP 100 off 100

Start 2.691 GHz  
 2.9 MHz/  
 Stop 2.72 GHz


F1 F2

1.5M VIEW


LVL  
 TDP  
 3DB

Page 73 of 92


# HIGH BAND EDGE BLOCK-15MHz+10MHz-1RB

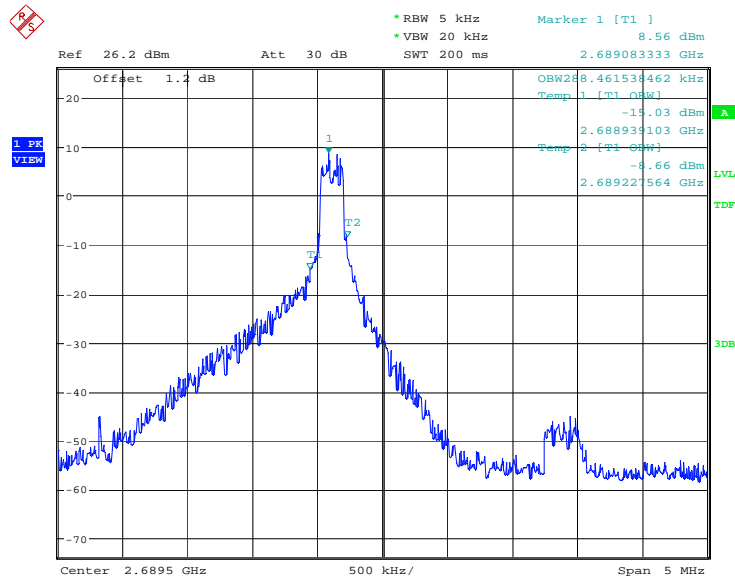

Date: 29.OCT.2020 13:50:41

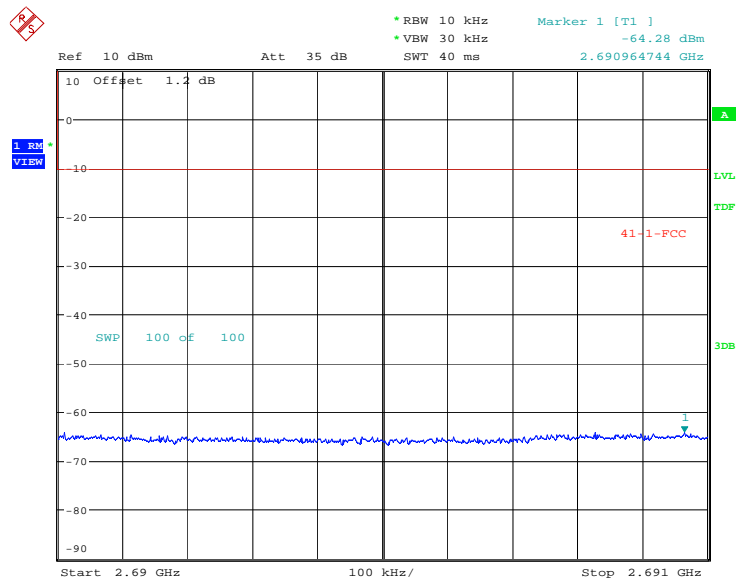


Date: 29.OCT.2020 13:51:44

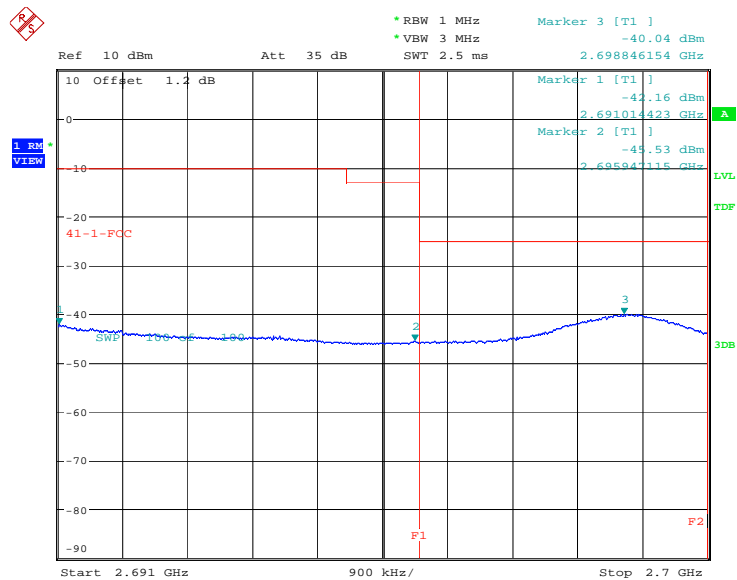


Date: 29.OCT.2020 13:52:46

## HIGH BAND EDGE BLOCK-15MHz+10MHz -100%RB

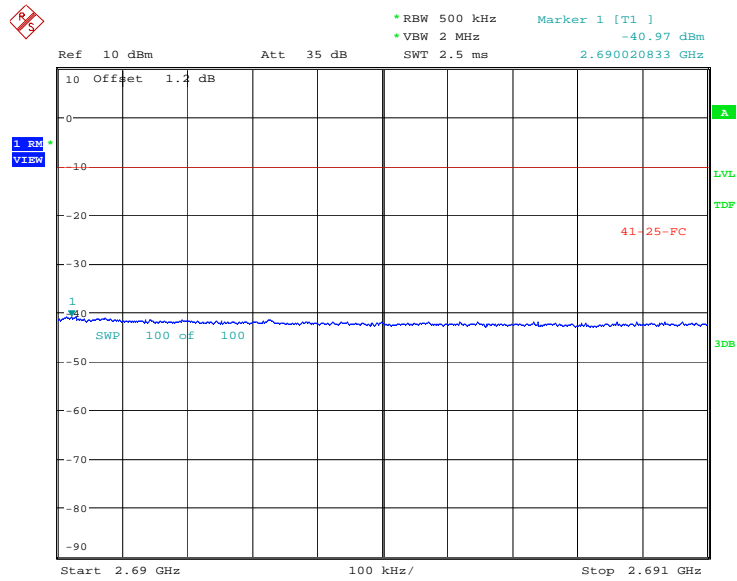


Date: 29.OCT.2020 13:49:25

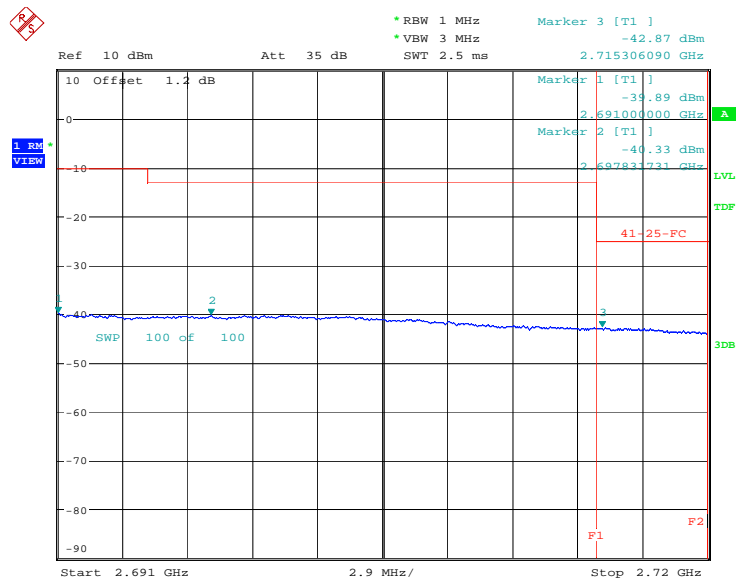


Date: 29.OCT.2020 13:49:57


# HIGH BAND EDGE BLOCK-20MHz+10MHz-1RB

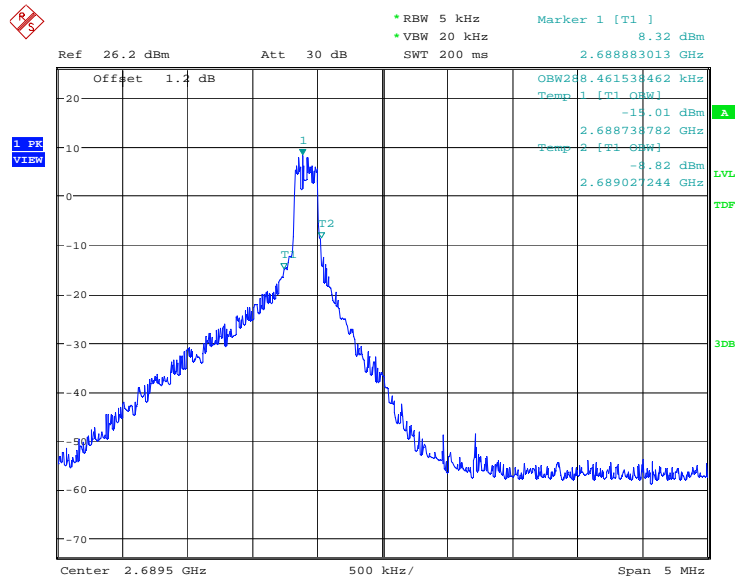

Date: 29.OCT.2020 13:57:48

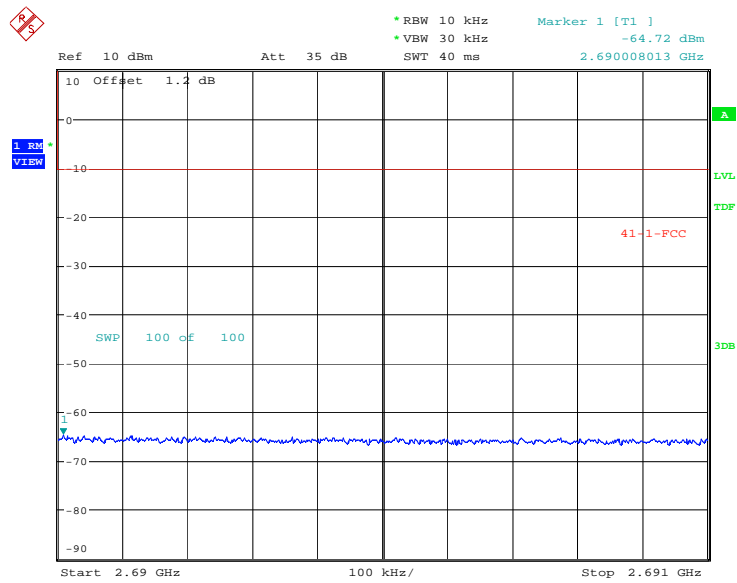


Date: 29.OCT.2020 13:58:50

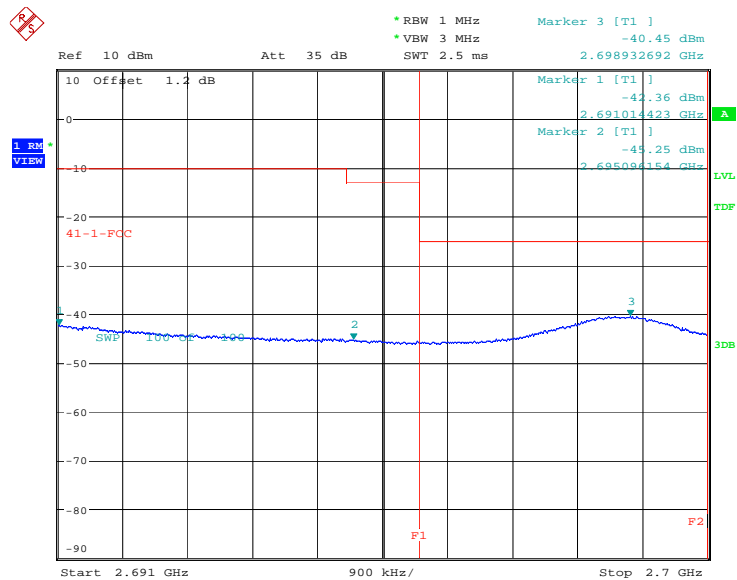


Date: 29.OCT.2020 13:59:52

## HIGH BAND EDGE BLOCK-20MHz+10MHz -100%RB

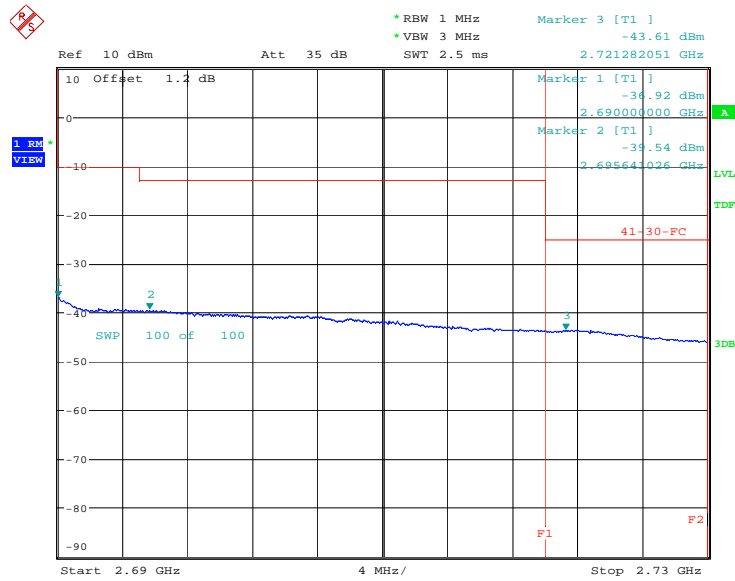


Date: 29.OCT.2020 14:00:50

# HIGH BAND EDGE BLOCK-15MHz+15MHz-1RB

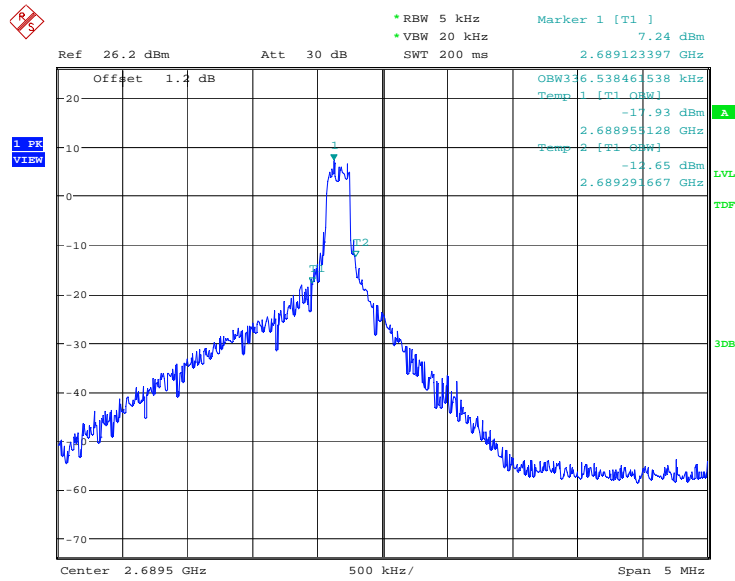


Date: 29.OCT.2020 14:03:17



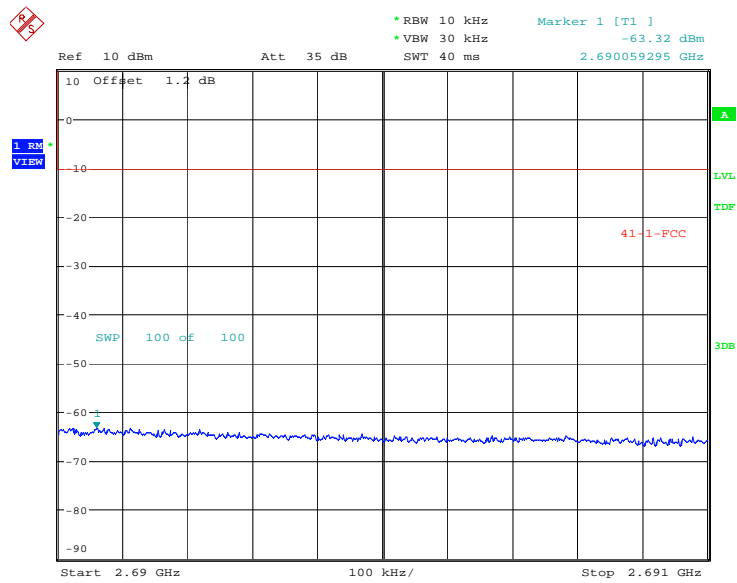


Date: 29.OCT.2020 14:04:19

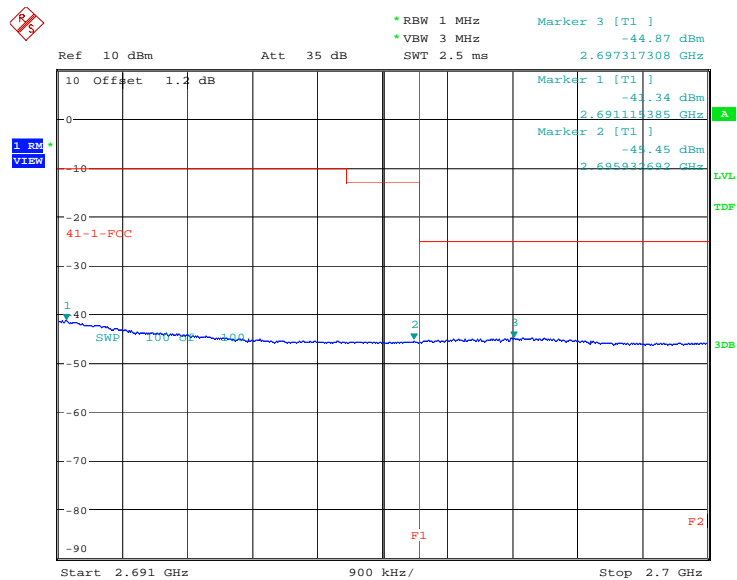


Date: 29.OCT.2020 14:05:21

## HIGH BAND EDGE BLOCK-15MHz+15MHz -100%RB

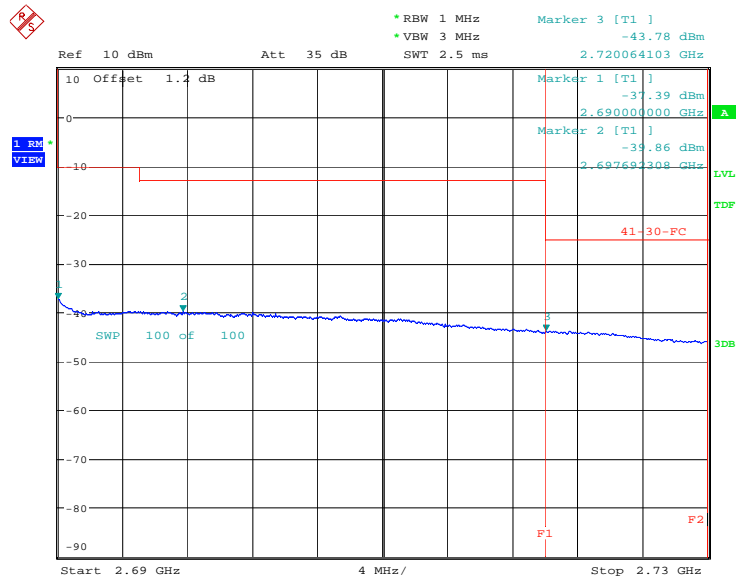


Date: 29.OCT.2020 14:02:27


# HIGH BAND EDGE BLOCK-20MHz+15MHz-1RB

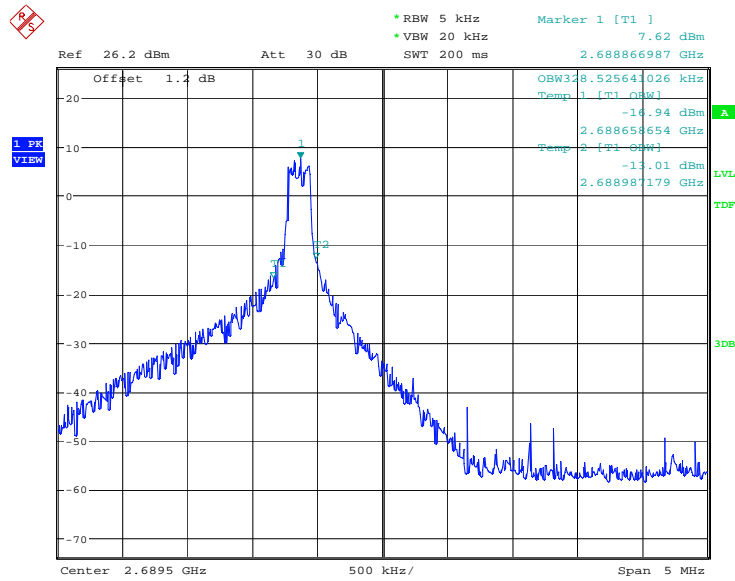

Date: 29.OCT.2020 14:06:34

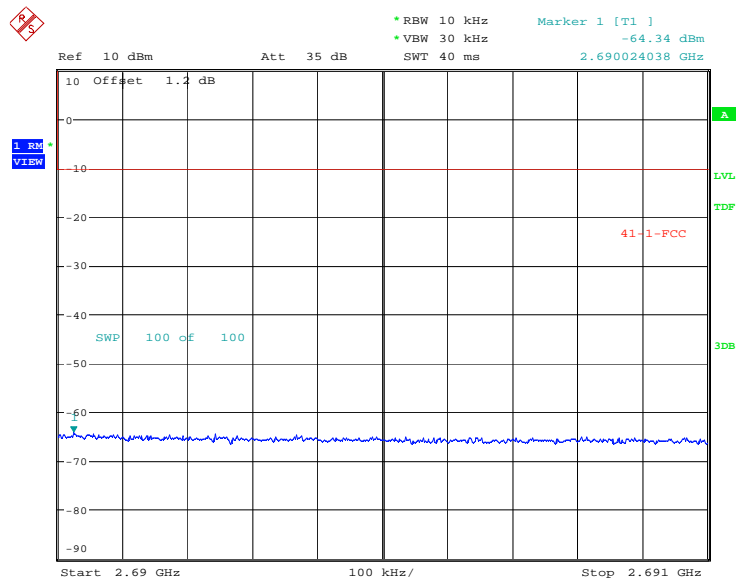


Date: 29.OCT.2020 14:07:36

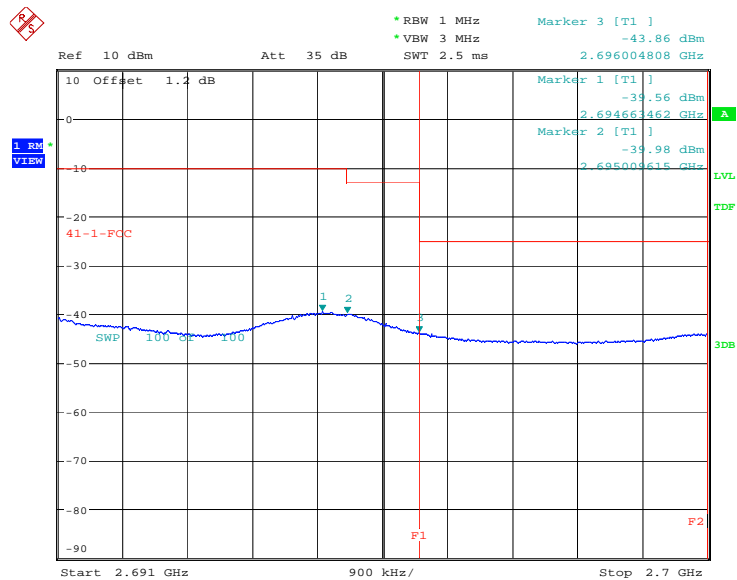

Date: 29.OCT.2020 14:08:38

## HIGH BAND EDGE BLOCK-20MHz+15MHz -100%RB

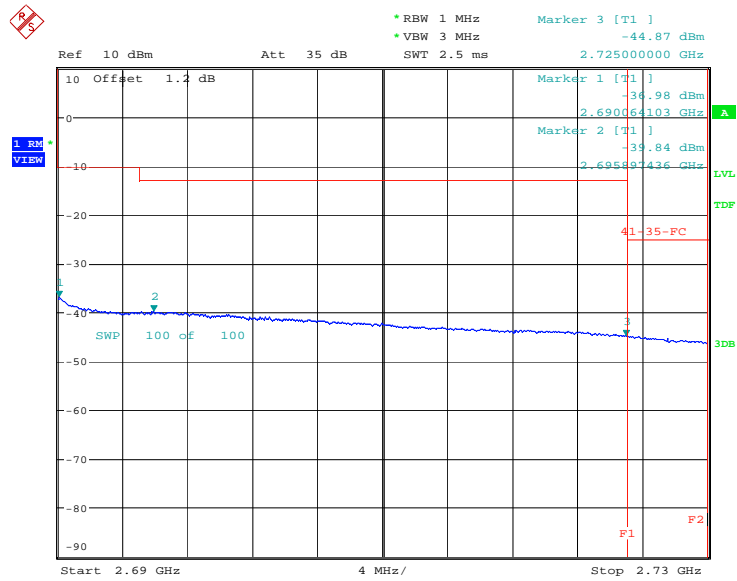

Date: 29.OCT.2020 14:09:37



1 PK  
VIEW

Ref 26.2 dBm Att 30 dB SWT 200 ms


Marker 1 [T1]  
9.08 dBm  
2.688883013 GHz

Offset 1.2 dB


OBW256.410254410 kHz  
Temp 1 [T1 OBW]  
-14.62 dBm  
2.688762821 GHz  
Temp 2 [T1 OBW]  
-10.67 dBm  
2.689014231 GHz

Center 2.6895 GHz 500 kHz/ Span 5 MHz

Page 86 of 92

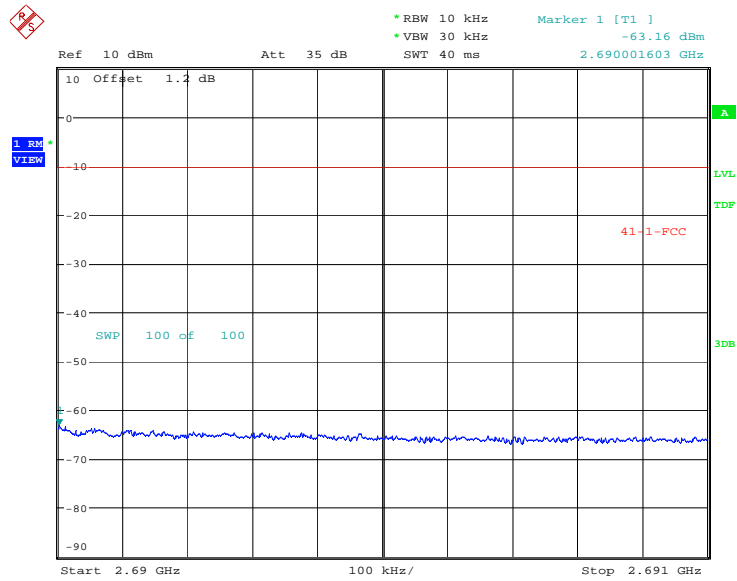


Date: 29.OCT.2020 14:12:41

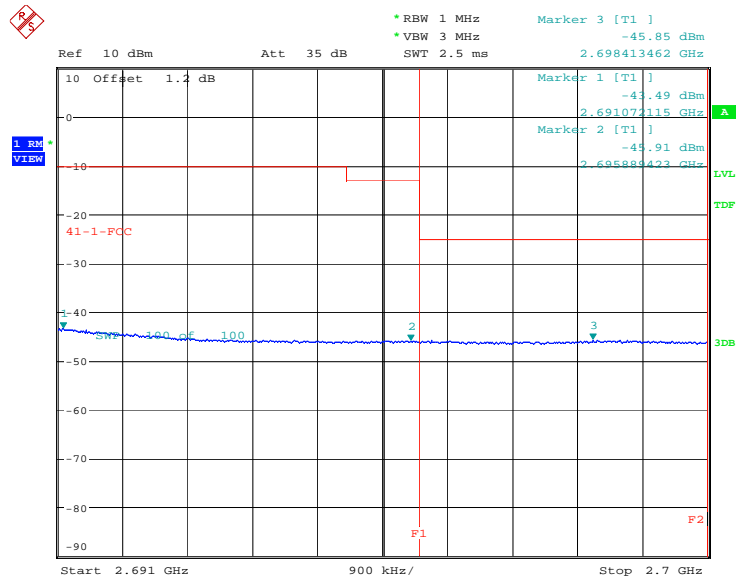

Date: 29.OCT.2020 14:13:43

## HIGH BAND EDGE BLOCK-20MHz+20MHz -100%RB

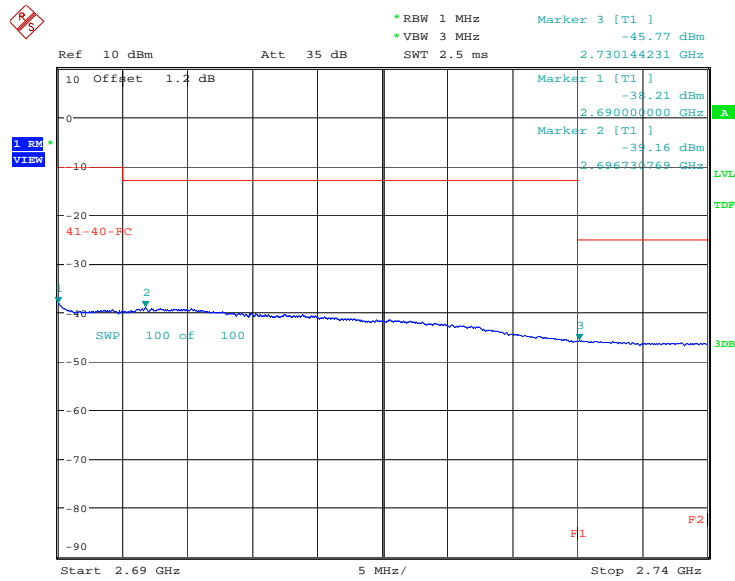

Date: 29.OCT.2020 14:10:55



## **A.7 Conducted Spurious Emission**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
  - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
  - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

### **A. 7.2 Measurement Limit**

Part 22.917, Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### A. 7.3 Measurement result

Only the worst case result is given below

LTE CA\_41C: 30MHz – 26.5GHz

NOTE: peak above the limit line is the carrier frequency.

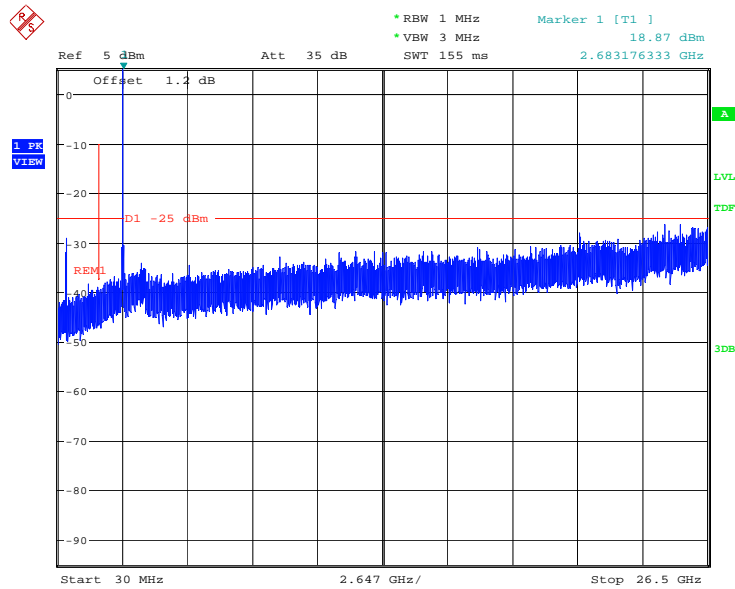

Date: 4.NOV.2020 08:45:36

### **A.8 Peak-to-Average Power Ratio**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

#### **LTE CA\_41C, 20MHz+20MHz**

Frequency(MHz)	PAPR(dB)		
	QPSK	16QAM	64QAM
2593.0	8.94	9.17	9.36

## Annex B: Accreditation Certificate

<p><b>United States Department of Commerce National Institute of Standards and Technology</b></p> <div style="display: flex; justify-content: space-around; align-items: center;"><div style="font-size: 4em; font-weight: bold; letter-spacing: 0.1em;">NVLAP<sup>®</sup></div><div style="text-align: center;"> <b>ilac-MRA</b></div></div> <hr style="border: 1px solid black;"/> <p style="font-size: 1.2em; font-weight: bold; text-align: center;">Certificate of Accreditation to ISO/IEC 17025:2017</p> <hr style="border: 1px solid black;"/>	
<p><b>NVLAP LAB CODE: 600118-0</b></p>	
<p><b>Telecommunication Technology Labs, CAICT</b> Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p><b>Electromagnetic Compatibility &amp; Telecommunications</b></p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<p>2020-09-29 through 2021-09-30 <i>Effective Dates</i></p>	<div style="display: flex; justify-content: space-between; align-items: center;"><div style="text-align: center;"> <small>DEPARTMENT OF COMMERCE UNITED STATES OF AMERICA</small></div><div style="text-align: center;"> <small>For the National Voluntary Laboratory Accreditation Program</small></div></div>

\*\*\*END OF REPORT\*\*\*