



FCC 15B TEST REPORT

No. I20Z61820-EMC01

for

Shenzhen Tinno Mobile Technology Corp.

Smart Phone

Model Name: Wiko U614AS

FCC ID: XD6U614AS

with

Hardware Version: V1.0

Software Version: U614ASV01.14.10

Issued Date: 2021-01-08

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I20Z61820-EMC01	Rev.0	1 st edition	2021-01-08

CONTENTS

1. TEST LABORATORY.....	4
1.1. TESTING LOCATION.....	4
1.2. TESTING ENVIRONMENT.....	4
1.3. PROJECT DATA.....	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS.....	7
4. REFERENCE DOCUMENTS.....	8
4.1. REFERENCE DOCUMENTS FOR TESTING.....	8
5. LABORATORY ENVIRONMENT.....	9
6. SUMMARY OF TEST RESULTS.....	10
7. TEST EQUIPMENTS UTILIZED.....	11
ANNEX A: MEASUREMENT RESULTS.....	12
ANNEX B: PERSONS INVOLVED IN THIS TESTING.....	26

1. Test Laboratory

1.1. Testing Location

Location 1: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2020-12-18

Testing End Date: 2020-12-31

1.4. Signature




An Hui

(Prepared this test report)



Zhang Ying

(Reviewed this test report)



Zhang Xia

Deputy Director of the laboratory

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Shenzhen Tinno Mobile Technology Corp.
Address /Post: 4/F, H-3 Building,OCT Eastern Industrial Park. NO.1 XiangShan East Road, Nan Shan District,Shenzhen, P.R.China
Contact: xiaoping.li
Email: xiaoping.li@tinno.com
Telephone: 0755-86095550

2.2. Manufacturer Information

Company Name: Shenzhen Tinno Mobile Technology Corp.
Address /Post: 4/F, H-3 Building,OCT Eastern Industrial Park. NO.1 XiangShan East Road, Nan Shan District,Shenzhen, P.R.China
Contact: xiaoping.li
Email: xiaoping.li@tinno.com
Telephone: 0755-86095550

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart Phone
Model Name	Wiko U614AS
FCC ID	XD6U614AS

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	868657050017506	V1.0	U614ASV01.14.10

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Battery	/	/
AE3	charger	/	/
AE4	charger	/	/
AE5	USB Cable	/	/
AE6	USB Cable	/	/

AE1

Model	PT34H406082J
Manufacturer	Ningbo Veken Battery Co., Ltd.
Capacity	3310mAh
Nominal Voltage	3.85V

AE2

Model	PT34H406082W
Manufacturer	Shenzhen BYD Lithium Battery Company Limited
Capacity	3330mAh
Nominal Voltage	3.85V

AE3

Model	TN-050200U5
Manufacturer	Guangdong Beicom Electronics Co.,Ltd.
Supplier PN	P101-BMZ130-000



AE4

Model TN-050200U5
Manufacturer Dong Guan City GangQi Electronic Co., Ltd.
Supplier PN P101-BTC130-000

AE5

Model STN-A108A
Manufacturer Saibao(jiangxi) Industrial Company Limited
Supplier PN P103-BP6130-010

AE6

Model T365-010
Manufacturer Shenzhen Yihuaxing Electronics CO.,Ltd.
Supplier PN P103-BP6130-000

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1/AE2 + AE3+ AE5/AE6	Charger1
Set.2	EUT1+ AE1/AE2 + AE4+ AE5/AE6	Charger2
Set.3	EUT1+ AE1/AE2 + AE5/AE6	USB

Note:

The device contains receivers which tune and operate between 30MHz-960MHz in the following bands: GSM850, WCDMA850, LTE Band 5/12/13/26.The measurement results showed here are worst cases of different bands.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2019
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters × 17meters × 10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
	BR	Re-use test data from basic model report.

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	A.1	P	CTTL(huayuan North Road)
2	Conducted Emission	15.107(a)	A.2	P	CTTL(huayuan North Road)

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	LISN	ENV216	101200	Rohde & Schwarz	2021-05-19	1 Year
2	Test Receiver	ESCI 7	100344	Rohde & Schwarz	2021-02-26	1 Year
3	Test Receiver	ESU26	100235	Rohde & Schwarz	2021-03-03	1 Year
4	BiLog Antenna	VULB9163	9163-1223	Schwarzbeck	2021-03-18	1 Year
5	Dual-Ridge Waveguide Horn Antenna	3115	6914	ETS-Lindgren	2021-01-14	1 Year
6	Universal Radio Communication Tester	CMW500	159408	R&S	2021-03-04	1 Year
7	PC	M4000e-17	M706GWXD	Lenovo	N/A	N/A
8	Printer	P1606dn	VNC3L52122	HP	N/A	N/A

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01.0	R&S
Conducted Emission	EMC32 V8.52.0	R&S

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (charging mode of MS) at distances of 10 meters (for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in Section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V}/\text{m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): 30MHz-1GHz: 5.16dB, 1GHz-18GHz: 5.44dB, $k=2$.

Measurement results for Set.1:

EUT1 Charger1+ Rear CAMERA+GNSS+GSM850 idle Mode/QP detector

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
42.254000	20.02	30.00	9.98	125.0	V	252.0
45.224000	18.41	30.00	11.59	211.0	V	7.0
54.347000	21.22	30.00	8.78	106.0	V	30.0
83.867000	10.36	30.00	19.64	184.0	V	284.0
103.554000	8.17	33.50	25.35	325.0	V	260.0
304.117000	12.88	36.00	23.14	100.0	V	60.0

EUT1 Charger1+ Rear CAMERA+GNSS+GSM850 idle Mode /Average detector

Frequency (MHz)	Result (dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity	Limit (dB μ V/m)	Margin (dB)
17996.033	47.9	-17.7	45.6	20.000	H	54	6.1
17976.200	47.7	-17.7	45.6	19.800	H	54	6.3
17847.567	47.5	-18.5	45.6	20.400	V	54	6.5
17945.600	47.4	-17.7	45.6	19.500	H	54	6.6
17938.800	47.3	-17.7	45.6	19.400	H	54	6.7
17993.200	47.3	-17.7	45.6	19.400	H	54	6.7

EUT1 Charger1+ Rear CAMERA+GNSS+GSM850 idle Mode /Peak detector

Frequency (MHz)	Result (dB μ V/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dB μ V)	Polarity	Limit (dB μ V/m)	Margin (dB)
17953.533	56.6	-17.7	45.6	28.700	H	74	17.4
17964.300	56.1	-17.7	45.6	28.200	H	74	17.9
17985.267	56.1	-17.7	45.6	28.200	V	74	17.9
17933.700	56.0	-17.7	45.6	28.100	H	74	18
17938.800	55.9	-17.7	45.6	28.000	H	74	18.1
17928.033	55.9	-17.7	45.6	28.000	H	74	18.1

Measurement results for Set.2:
EUT1 Charger1+MP4+WCDMA850 idle Mode/QP detector

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
41.769000	19.06	30.00	10.94	279.0	V	-24.0
44.855000	18.88	30.00	11.12	183.0	V	210.0
53.225000	21.15	30.00	8.85	106.0	V	30.0
79.082000	8.23	30.00	21.77	214.0	V	-5.0
164.687000	8.87	33.50	24.65	225.0	V	-18.0
383.186000	13.15	36.00	22.87	284.0	V	79.0

EUT1 Charger1+MP4+WCDMA850 idle Mode/Average detector

Frequency (MHz)	Result (dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity	Limit (dB μ V/m)	Margin (dB)
17912.733	47.9	-18.5	45.6	20.800	H	54	6.1
17905.933	47.7	-18.5	45.6	20.600	H	54	6.3
17987.533	47.7	-17.7	45.6	19.800	V	54	6.3
17938.233	47.7	-17.7	45.6	19.800	H	54	6.3
17933.133	47.6	-17.7	45.6	19.700	H	54	6.4
17930.867	47.5	-17.7	45.6	19.600	H	54	6.5

EUT1 Charger1+MP4+WCDMA850 idle Mode/Peak detector

Frequency (MHz)	Result (dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity	Limit (dB μ V/m)	Margin (dB)
17977.900	56.6	-17.7	45.6	28.700	H	74	17.4
17892.900	56.5	-18.5	45.6	29.400	H	74	17.5
17953.533	56.5	-17.7	45.6	28.600	V	74	17.5
17943.900	56.0	-17.7	45.6	28.100	H	74	18
17949.000	56.0	-17.7	45.6	28.100	H	74	18
17912.167	55.9	-18.5	45.6	28.800	H	74	18.1

Measurement results for Set.3:
EUT1 Charger2+front CAMERA +CDMA BC0/10 idle Mode/QP detector

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
42.388000	18.16	30.00	11.84	287.0	V	-25.0
53.904000	21.43	30.00	8.57	100.0	V	66.0
79.733000	9.12	30.00	20.88	178.0	V	280.0
98.828000	8.23	33.50	25.29	125.0	V	-27.0
164.294000	7.09	33.50	26.43	325.0	V	120.0
300.048000	16.90	36.00	19.12	212.0	V	63.0

EUT1 Charger2+front CAMERA +CDMA BC0/10 idle Mode /Average detector

Frequency (MHz)	Result (dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity	Limit (dB μ V/m)	Margin (dB)
17950.133	47.8	-17.7	45.6	19.900	H	54	6.2
17975.067	47.7	-17.7	45.6	19.800	H	54	6.3
17994.900	47.6	-17.7	45.6	19.700	V	54	6.4
17925.200	47.6	-17.7	45.6	19.700	H	54	6.4
17922.933	47.6	-17.7	45.6	19.700	H	54	6.4
17997.733	47.4	-17.7	45.6	19.500	H	54	6.6

EUT1 Charger2+front CAMERA +CDMA BC0/10 idle Mode /Peak detector

Frequency (MHz)	Result (dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity	Limit (dB μ V/m)	Margin (dB)
17997.733	57.1	-17.7	45.6	29.200	H	74	16.9
17969.400	56.5	-17.7	45.6	28.600	H	74	17.5
17968.833	55.8	-17.7	45.6	27.900	V	74	18.2
17929.733	55.7	-17.7	45.6	27.800	H	74	18.3
17951.267	55.6	-17.7	45.6	27.700	H	74	18.4
17897.433	55.6	-18.5	45.6	28.500	H	74	18.4

Measurement results for Set.4:
EUT1 USB mode +LTE FDD Bands 12/13/26/71 idle Mode/QP detector

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)
43.386000	17.35	30.00	12.65	108.0	V	17.0
84.255000	17.59	30.00	12.41	125.0	V	69.0
107.794000	23.47	33.50	10.05	120.0	V	30.0
148.691000	17.56	33.50	15.96	179.0	V	-30.0
240.120000	19.81	36.00	16.21	109.0	V	9.0
673.244000	28.91	36.00	7.11	195.0	V	-29.0

EUT1 USB mode +LTE FDD Bands 12/13/26/71 idle Mode /Average detector

Frequency (MHz)	Result (dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity	Limit (dB μ V/m)	Margin (dB)
17977.333	47.6	-17.7	45.6	19.700	H	54	6.4
17925.767	47.6	-17.7	45.6	19.700	H	54	6.4
17941.633	47.5	-17.7	45.6	19.600	V	54	6.5
17975.633	47.4	-17.7	45.6	19.500	H	54	6.6
17955.233	47.4	-17.7	45.6	19.500	H	54	6.6
17997.733	47.4	-17.7	45.6	19.500	H	54	6.6

EUT1 USB mode +LTE FDD Bands 12/13/26/71 idle Mode /Peak detector

Frequency (MHz)	Result (dB μ V/m)	G _{PL} (dB)	G _A (dB/m)	P _{Mea} (dB μ V)	Polarity	Limit (dB μ V/m)	Margin (dB)
17930.300	57.3	-17.7	45.6	29.400	H	74	16.7
17959.767	56.6	-17.7	45.6	28.700	H	74	17.4
17963.733	56.5	-17.7	45.6	28.600	V	74	17.5
17958.633	56.4	-17.7	45.6	28.500	H	74	17.6
17944.467	56.3	-17.7	45.6	28.400	H	74	17.7
17837.933	56.2	-18.5	45.6	29.100	H	74	17.8

EUT1 Charger1+ Rear CAMERA+GNSS+GSM850 idle Mode,Set.1

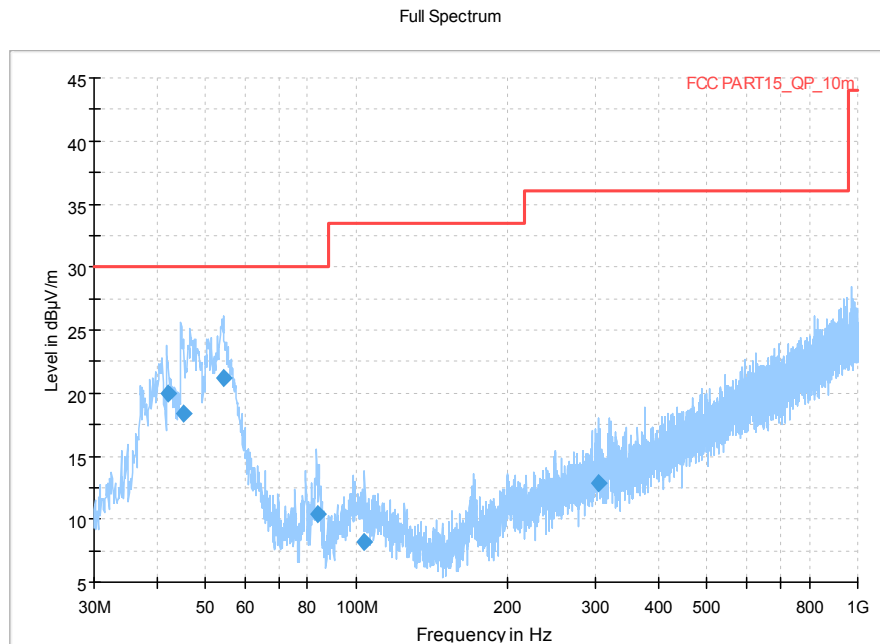


Figure A.1 Radiated Emission from 30MHz to 1GHz

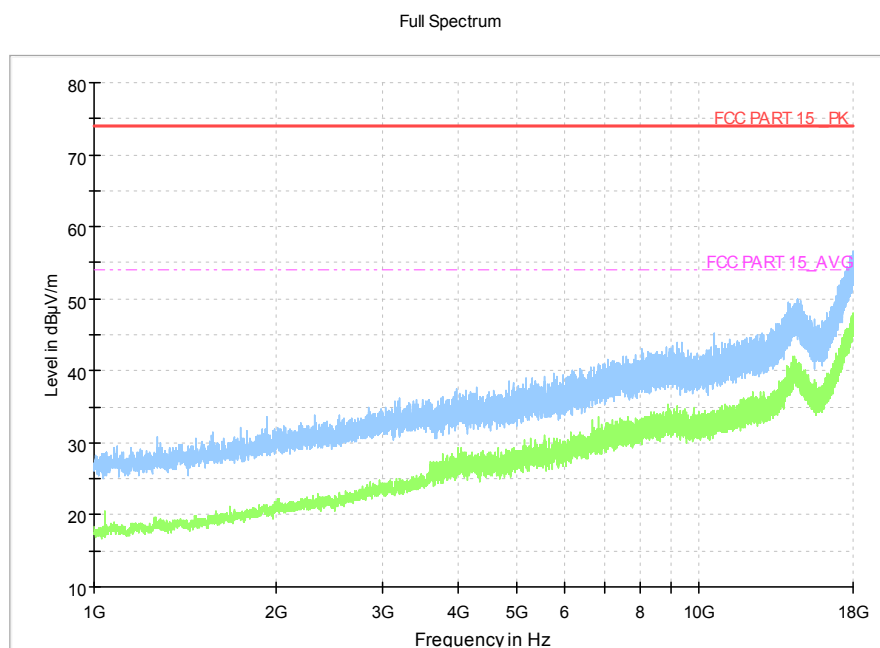


Figure A.2 Radiated Emission from 1GHz to 18GHz

EUT1 Charger1+MP4+WCDMA850 idle Mode,Set.2

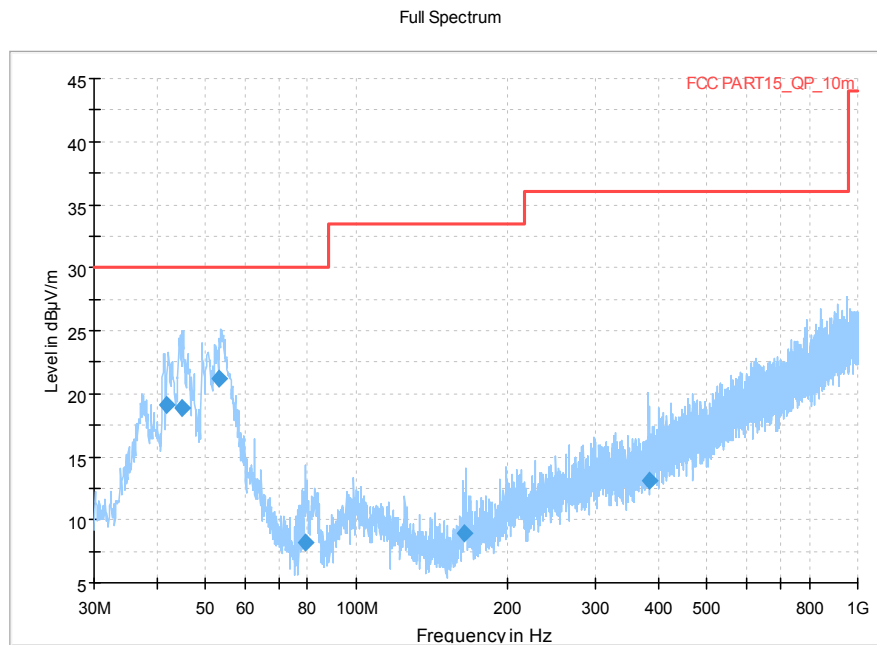


Figure A.3 Radiated Emission from 30MHz to 1GHz

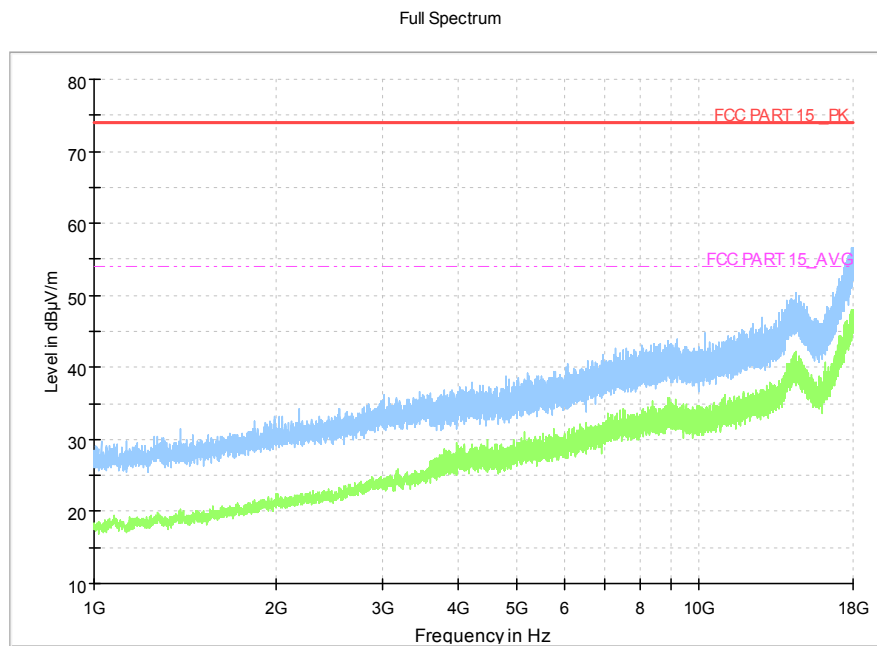


Figure A.4 Radiated Emission from 1GHz to 18GHz

EUT1 Charger2+front CAMERA +CDMA BC0/10 idle Mode,Set.3

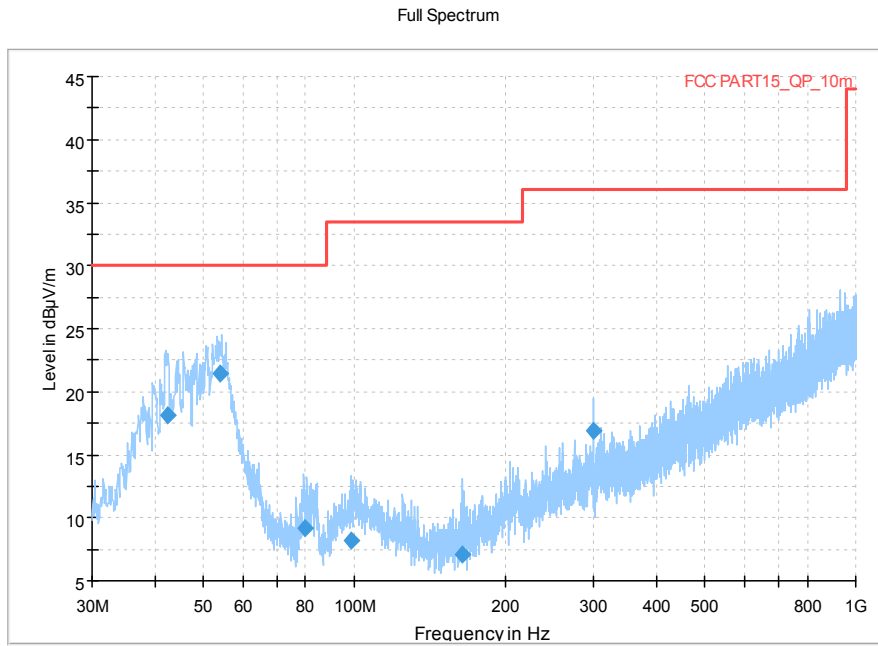


Figure A.5 Radiated Emission from 30MHz to 1GHz

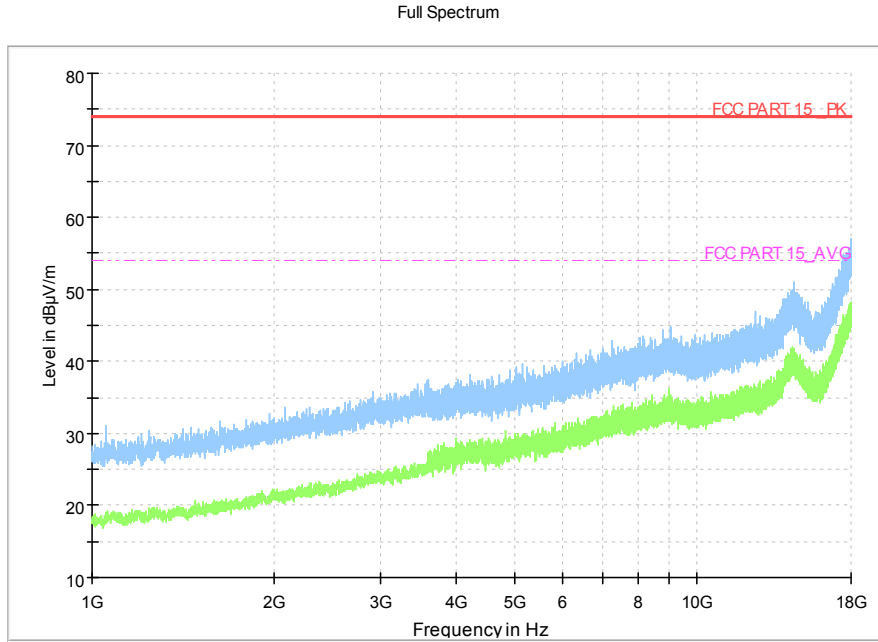


Figure A.6 Radiated Emission from 1GHz to 18GHz

EUT1 USB mode +LTE FDD Bands 12/13/26/71 idle Mode,Set.4

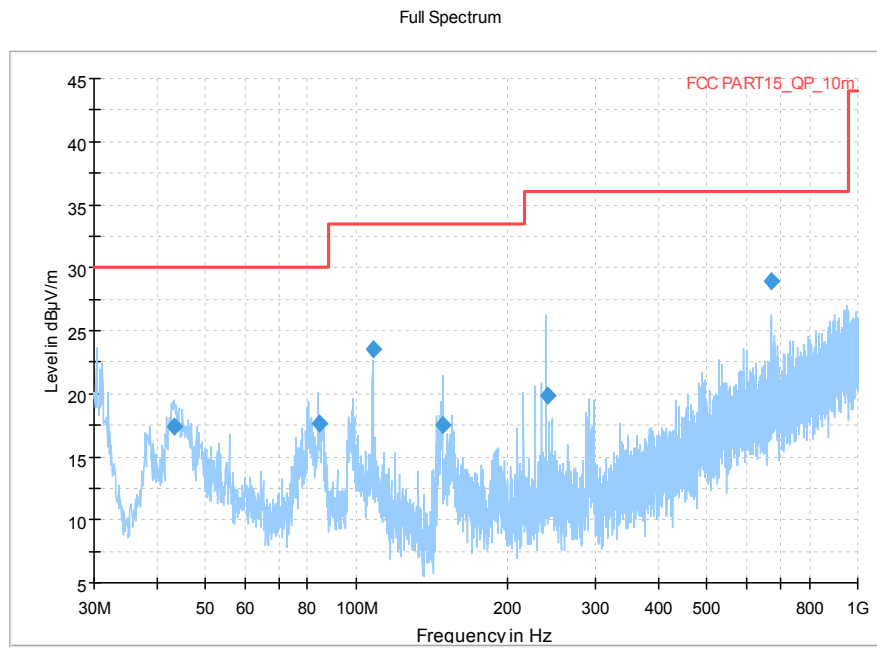


Figure A.7 Radiated Emission from 30MHz to 1GHz

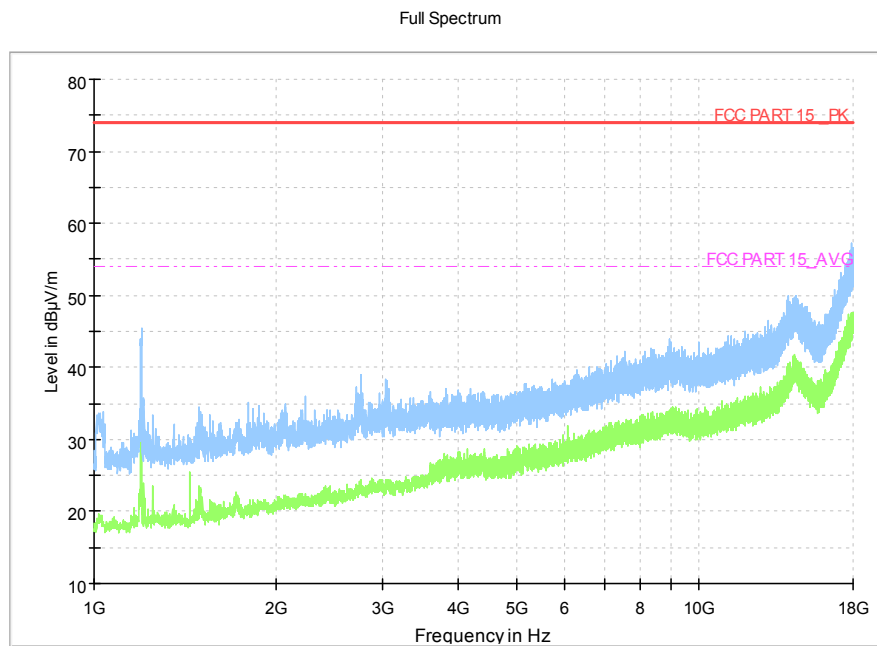


Figure A.8 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U=3.08\text{dB}$, $k=2$.

EUT1 Charger1+ Rear CAMERA+GNSS+GSM850 idle Mode,Set.1

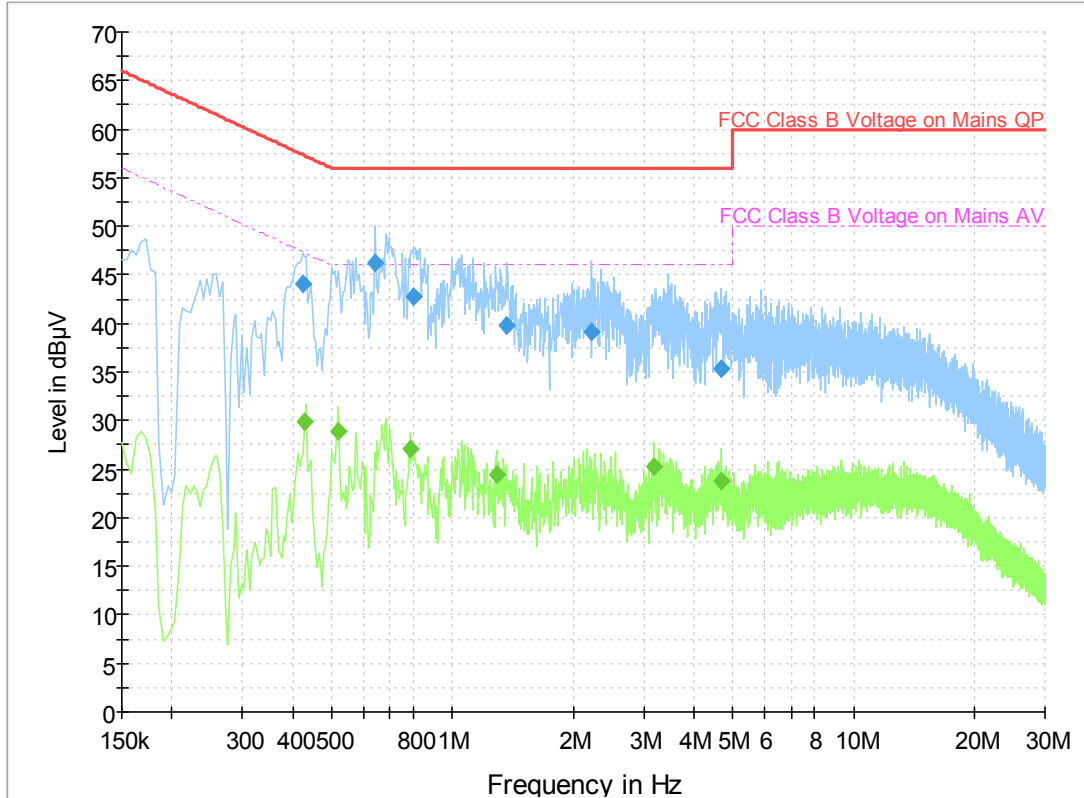


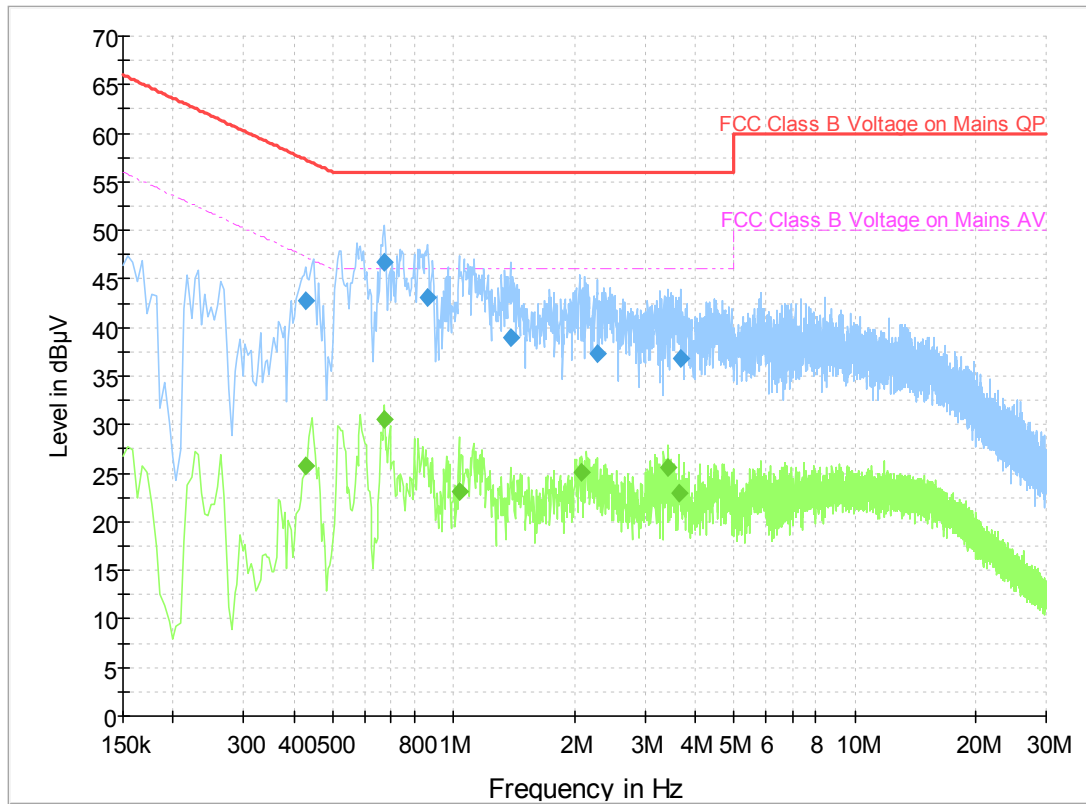
Figure A.9 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.424500	44.1	L1	19.6	13.2	57.4
0.640500	46.3	L1	19.6	9.7	56.0
0.802500	42.8	L1	19.6	13.2	56.0
1.369500	39.7	L1	19.6	16.3	56.0
2.224500	39.1	L1	19.6	16.9	56.0
4.677000	35.4	L1	19.8	20.6	56.0

Final Result 2

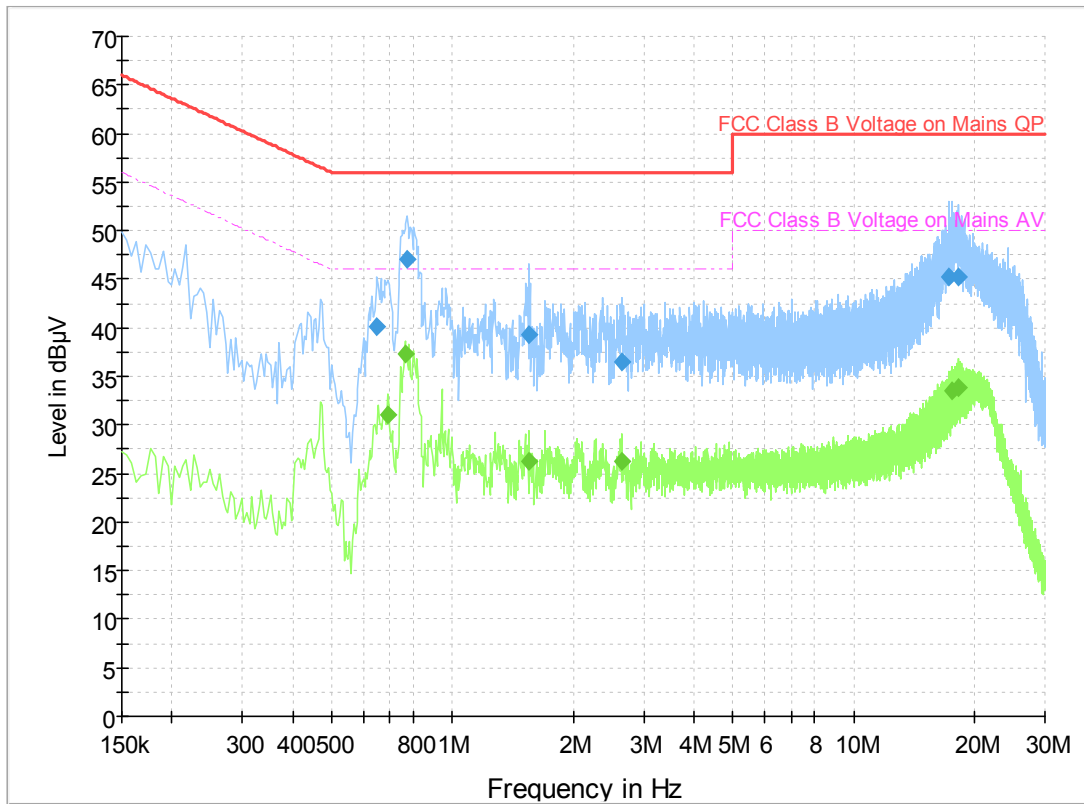
Frequency (MHz)	Average (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.429000	29.8	L1	19.6	17.4	47.3
0.519000	28.9	L1	19.6	17.1	46.0
0.789000	27.1	L1	19.6	18.9	46.0
1.288500	24.4	L1	19.6	21.6	46.0
3.178500	25.2	L1	19.7	20.8	46.0
4.686000	23.8	L1	19.8	22.2	46.0

EUT1 Charger1+MP4+WCDMA850 idle Mode,Set.2

Figure A.10 Conducted Emission
Final Result 1

Frequency (MHz)	Average (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.429000	42.7	L1	19.6	14.6	57.3
0.672000	46.8	L1	19.6	9.2	56.0
0.861000	43.1	L1	19.6	12.9	56.0
1.387500	38.9	L1	19.6	17.1	56.0
2.287500	37.3	L1	19.6	18.7	56.0
3.682500	36.9	L1	19.7	19.1	56.0

Final Result 2

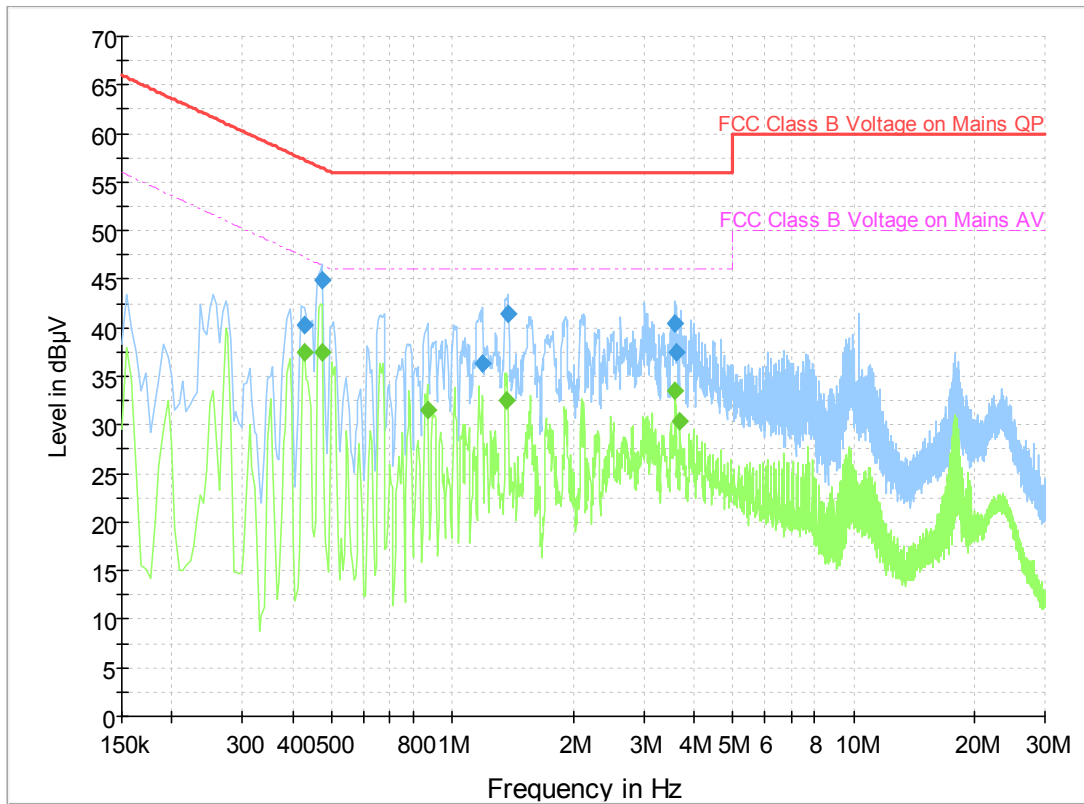
Frequency (MHz)	Average (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.429000	25.8	L1	19.6	21.5	47.3
0.672000	30.5	L1	19.6	15.5	46.0
1.032000	23.1	L1	19.6	22.9	46.0
2.089500	25.1	L1	19.5	20.9	46.0
3.435000	25.6	L1	19.7	20.4	46.0
3.655500	23.0	L1	19.7	23.0	46.0

EUT1 Charger2+front CAMERA +CDMA BC0/10 idle Mode ,Set.3

Figure A.11 Conducted Emission
Final Result 1

Frequency (MHz)	Average (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.649500	40.2	L1	19.6	15.8	56.0
0.771000	47.1	L1	19.6	8.9	56.0
1.549500	39.2	L1	19.6	16.8	56.0
2.652000	36.4	L1	19.6	19.6	56.0
17.313000	45.2	L1	19.8	14.8	60.0
18.298500	45.2	L1	19.8	14.8	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.690000	31.0	L1	19.6	15.0	46.0
0.762000	37.3	L1	19.6	8.7	46.0
1.549500	26.3	L1	19.6	19.7	46.0
2.652000	26.3	L1	19.6	19.7	46.0
17.650500	33.6	L1	19.8	16.4	50.0
18.204000	33.8	L1	19.8	16.2	50.0

EUT1 USB mode +LTE FDD Bands 12/13/26/71 idle Mode ,Set.4

Figure A.12 Conducted Emission
Final Result 1

Frequency (MHz)	Average (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.429000	40.2	L1	19.6	17.1	57.3
0.474000	44.9	L1	19.6	11.6	56.4
1.189500	36.4	L1	19.6	19.6	56.0
1.378500	41.5	L1	19.6	14.5	56.0
3.597000	40.4	L1	19.7	15.6	56.0
3.615000	37.4	N	19.6	18.6	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.429000	37.4	L1	19.6	9.8	47.3
0.474000	37.5	L1	19.6	9.0	46.4
0.865500	31.6	N	19.5	14.4	46.0
1.369500	32.5	L1	19.6	13.5	46.0
3.597000	33.6	N	19.6	12.4	46.0
3.696000	30.3	L1	19.7	15.7	46.0



ANNEX B: Persons involved in this testing

Test Item	Tester
Conducted Continuous Emission	Wang Huan
Radiated Continuous Emission	Yan Hanchen

*****END OF REPORT*****