

Appendix B

Detailed Test Results

GSM850 for Head, Body
GSM1900 for Head, Body
WCDMA Band II for Head, Body
WCDMA Band IV for Head, Body
WCDMA Band V for Head, Body
LTE Band 2 for Head, Body
LTE Band 5 for Head, Body
LTE Band 12 for Head, Body
LTE Band 14 for Head, Body
LTE Band 26 for Head, Body
LTE Band 30 for Head, Body & Limbs
LTE Band 48 for Head, Body
LTE Band 66 for Head, Body
LTE Band 71 for Head, Body
N2 for Head, Body
N5 for Head, Body
N25 for Head, Body
N26 for Head, Body
N30 for Head, Body & Limbs
N41 for Head, Body & Limbs
N48 for Head, Body
N66 for Head, Body
N70 for Head, Body
N71 for Head, Body
n77 for Head, Body & Limbs
WIFI 2.4G for Head, Body
WIFI 5G for Head, Body & Limbs
BT for Head, Body

Test Laboratory: SGS-SAR Lab

Celero3 5G GSM 850 GPRS 4TS 190CH Right cheek Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.332$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.328 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.969 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.371 W/kg

SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.329 W/kg

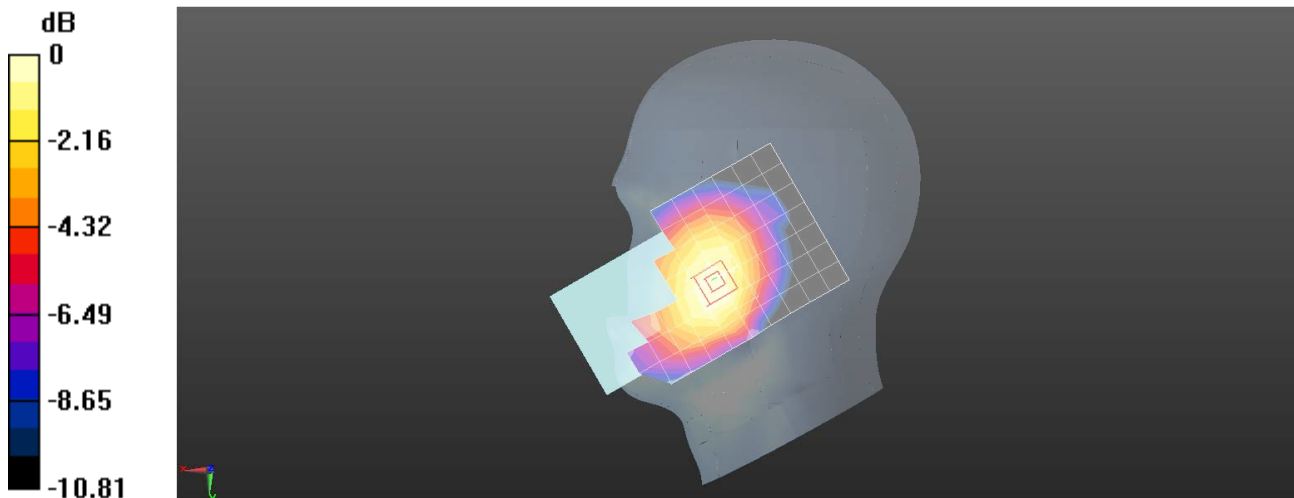

0 dB = 0.329 W/kg = -4.83 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G GSM 850 GPRS 4TS 190CH Back side 15mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.332$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.331 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.05 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

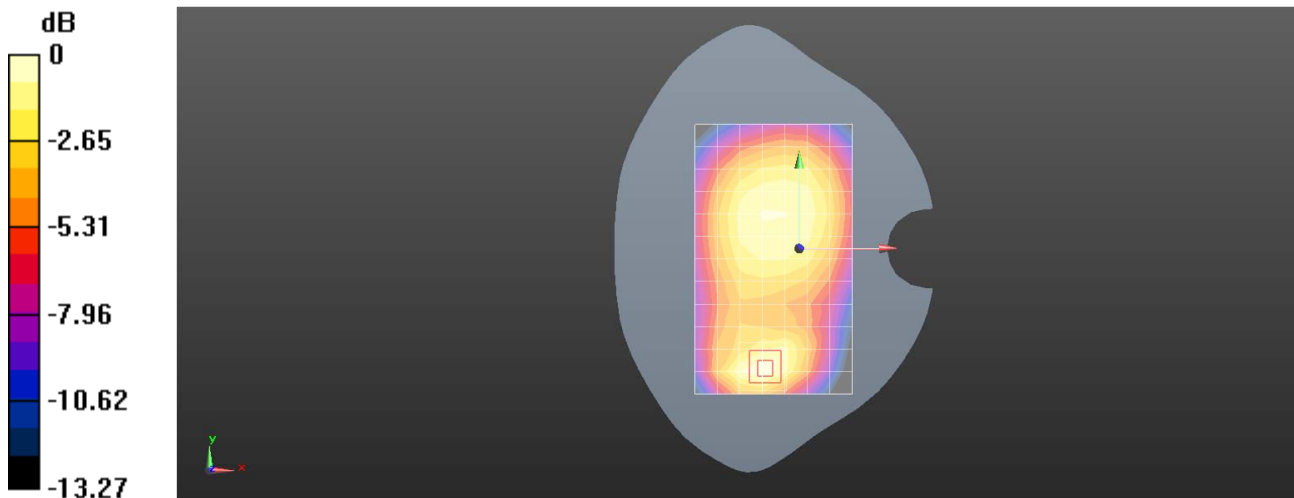

0 dB = 0.333 W/kg = -4.78 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G GSM 850 GPRS 4TS 190CH Back side 10mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.332$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.683 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.87 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.969 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.769 W/kg

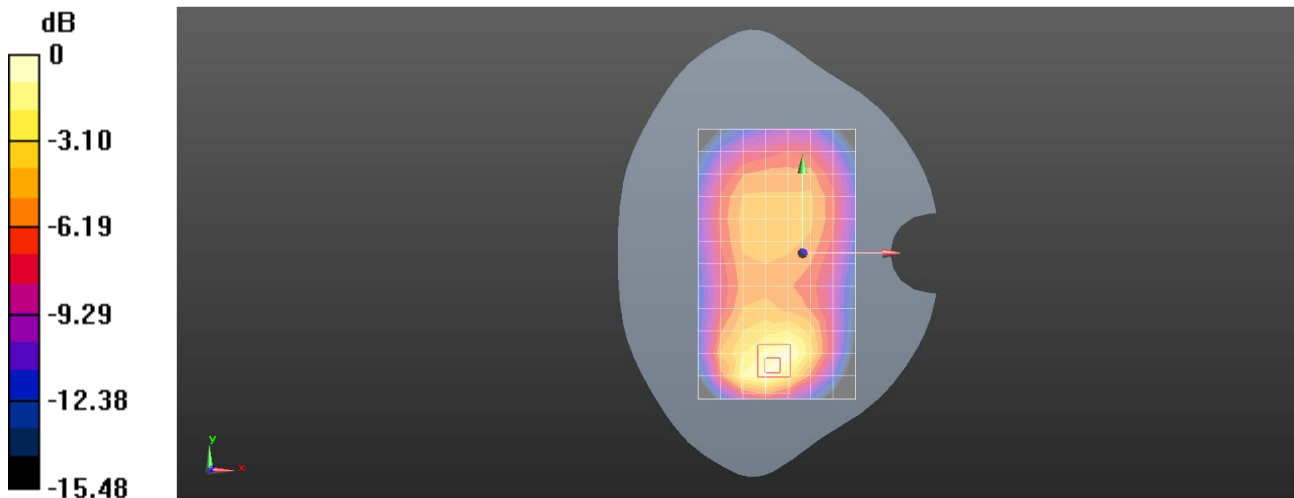

0 dB = 0.769 W/kg = -1.14 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G GSM1900 GPRS 4TX 661CH Left cheek Ant2-M6

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.215 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.393 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

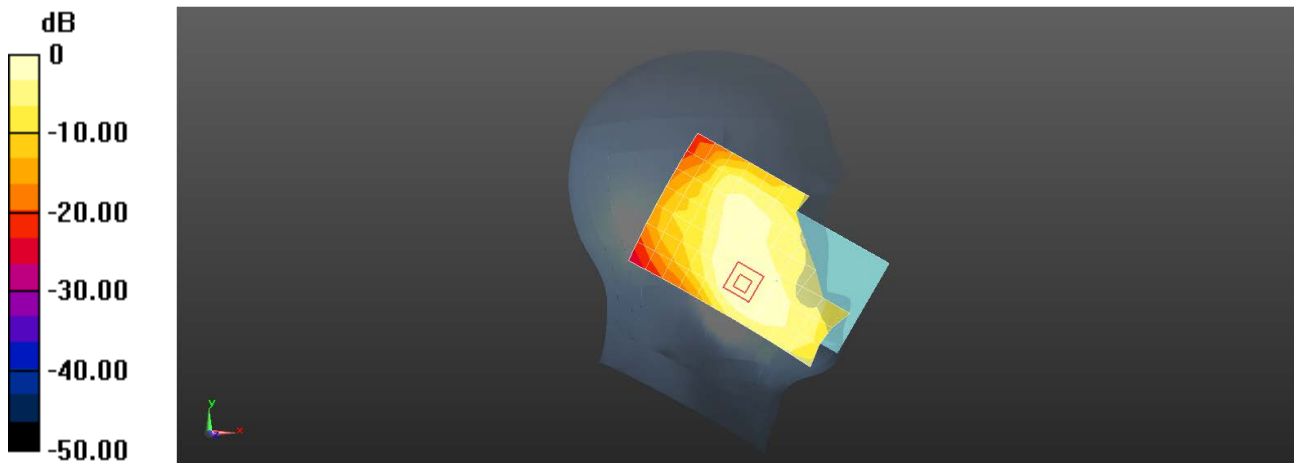

0 dB = 0.215 W/kg = -6.68 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G GSM1900 GPRS 4TX 661CH Back side 15mm Ant2**DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.323 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.411 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.339 W/kg

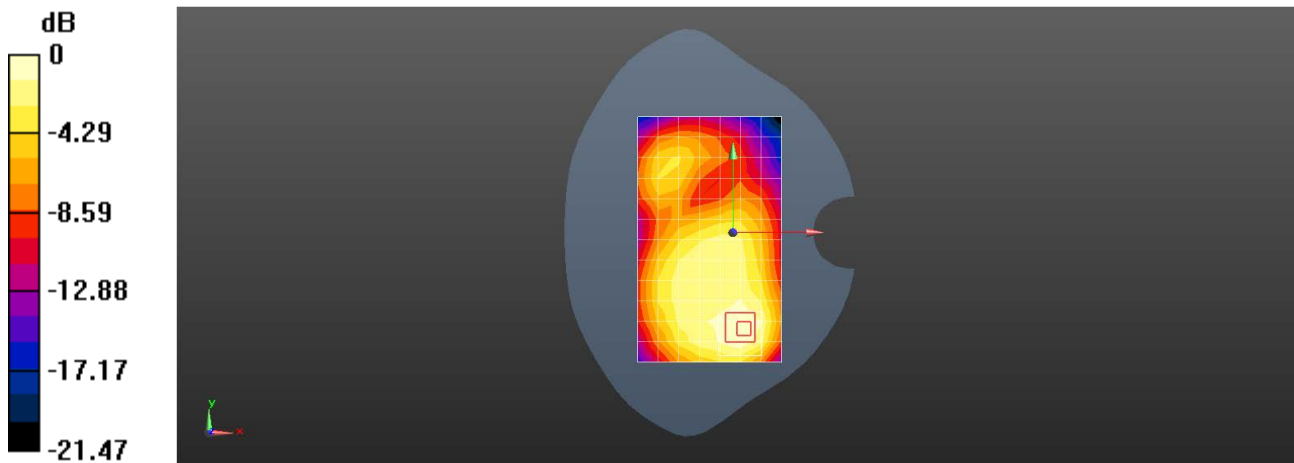

0 dB = 0.323 W/kg = -4.91 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G GSM1900 GPRS 4TX 661CH Back side 10mm Ant2**DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.534 W/kg


Configuration/Body/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.16 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.570 W/kg

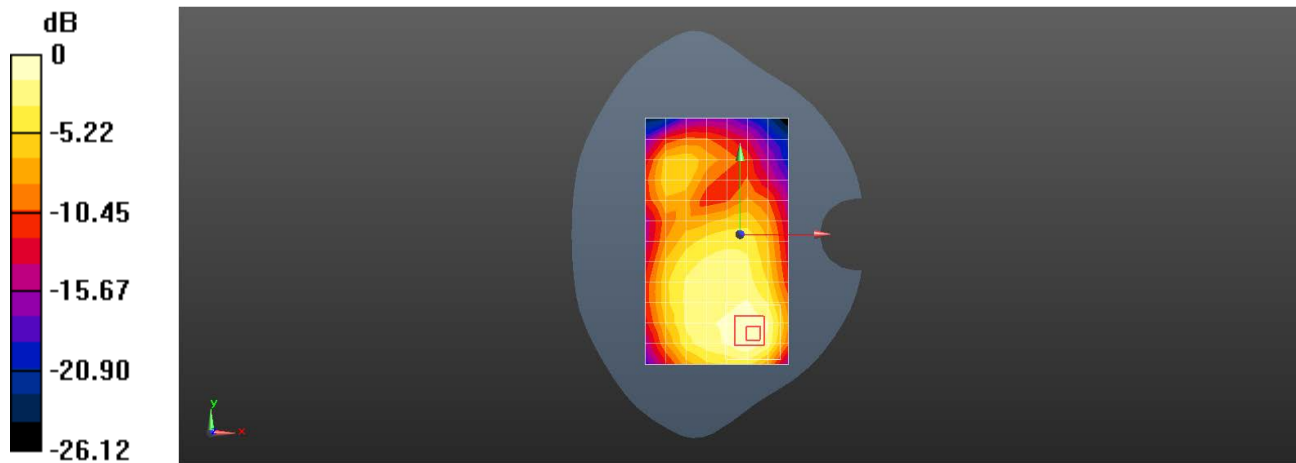

0 dB = 0.534 W/kg = -2.72 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WCDMA Band II RMC 9400CH Left cheek Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 39.667$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.358 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.063 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.426 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.369 W/kg

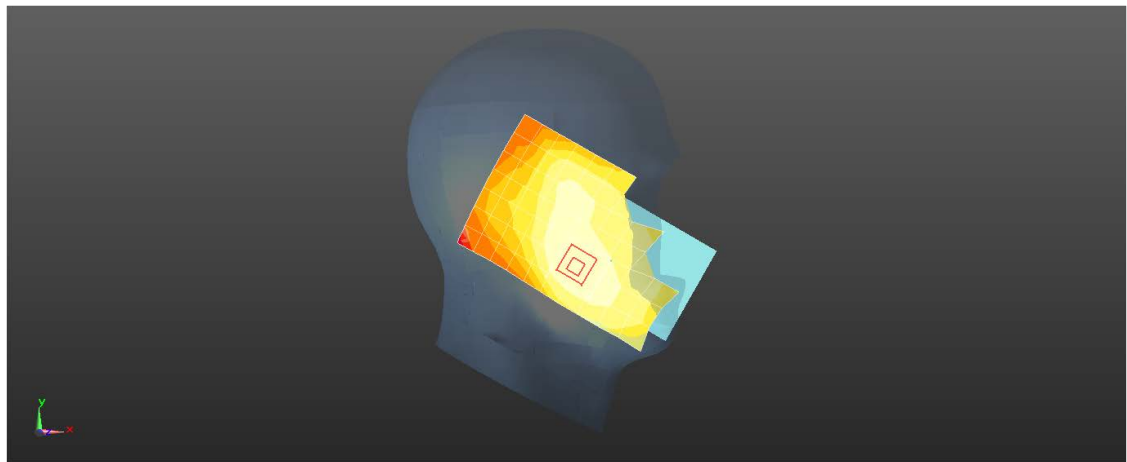

0 dB = 0.358 W/kg = -4.46 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WCDMA Band II RMC 9400CH Back side 15mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017414

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 39.667$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.542 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.94 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.242 W/kg

Maximum value of SAR (measured) = 0.573 W/kg

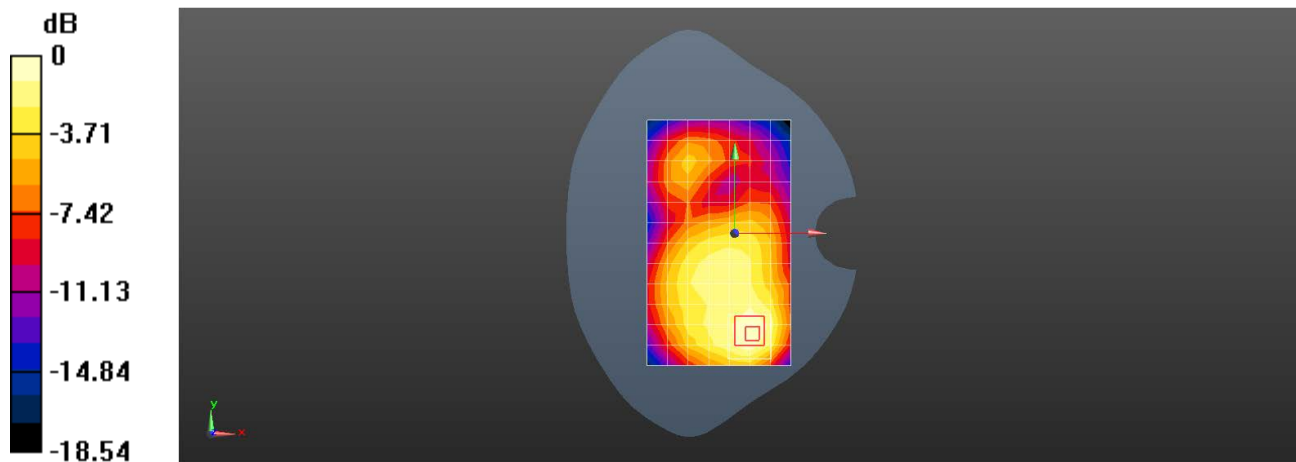

0 dB = 0.542 W/kg = -2.66 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WCDMA Band II RMC 9400CH Back side 10mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017414

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 39.667$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.05 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.67 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.435 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

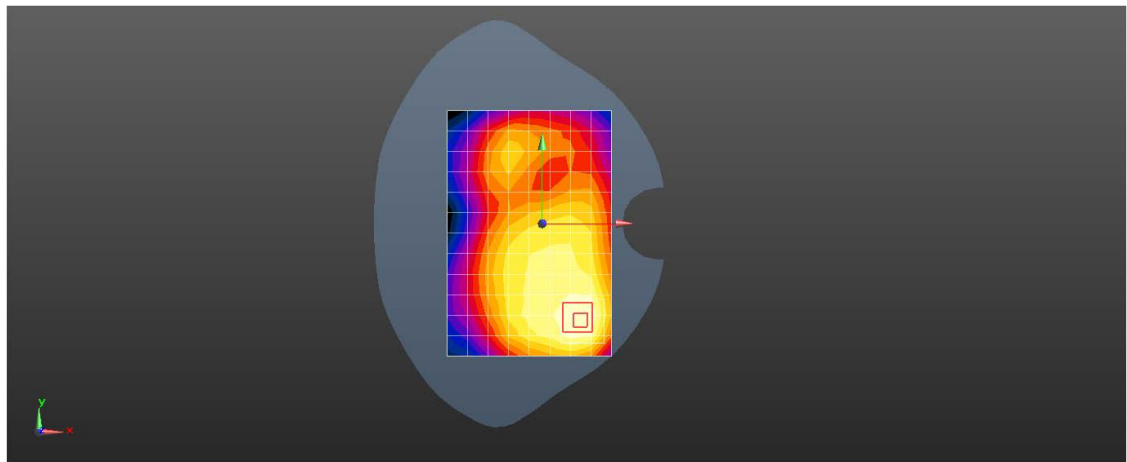

0 dB = 1.05 W/kg = 0.23 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WCDMA Band IV RMC 1412CH Left cheek Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.303$ S/m; $\epsilon_r = 40.415$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.331 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.932 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

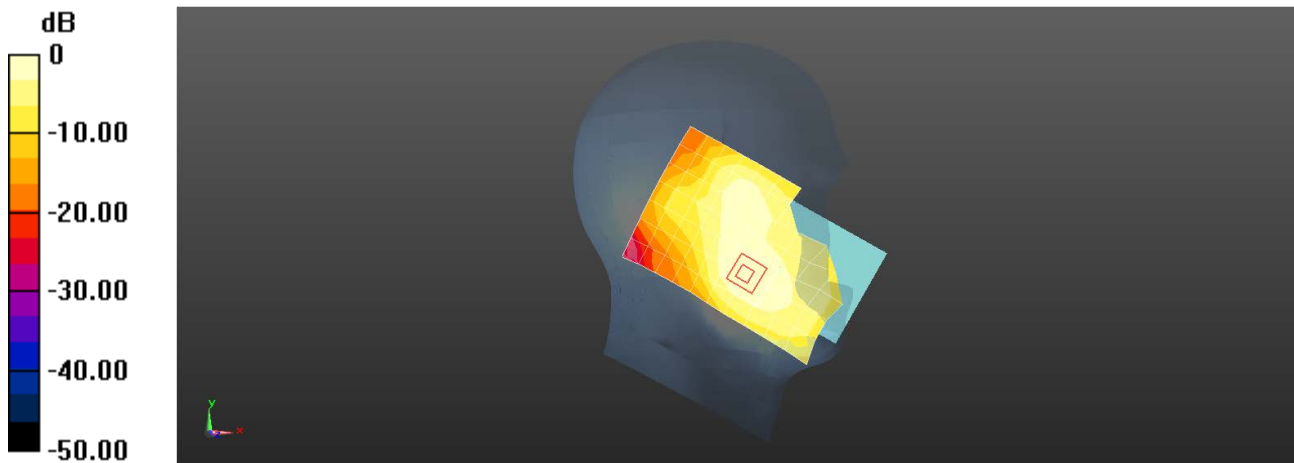

0 dB = 0.331 W/kg = -4.81 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WCDMA Band IV RMC 1412CH Front side 15mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.303$ S/m; $\epsilon_r = 40.415$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.338 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.834 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.345 W/kg

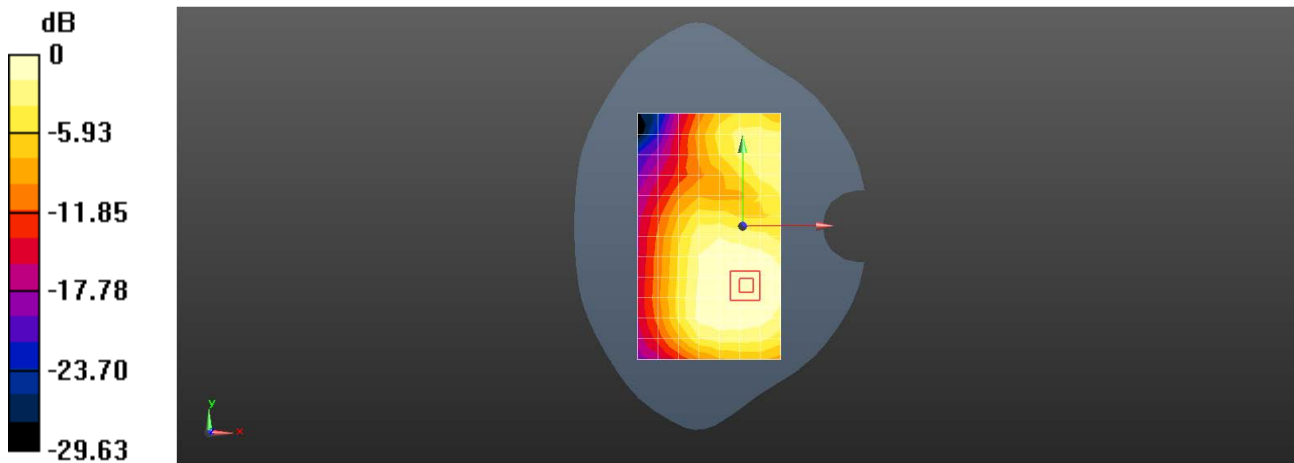

0 dB = 0.338 W/kg = -4.71 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WCDMA Band IV RMC 1412CH Back side 10mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.303$ S/m; $\epsilon_r = 40.415$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.681 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.790 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.892 W/kg

SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 0.735 W/kg

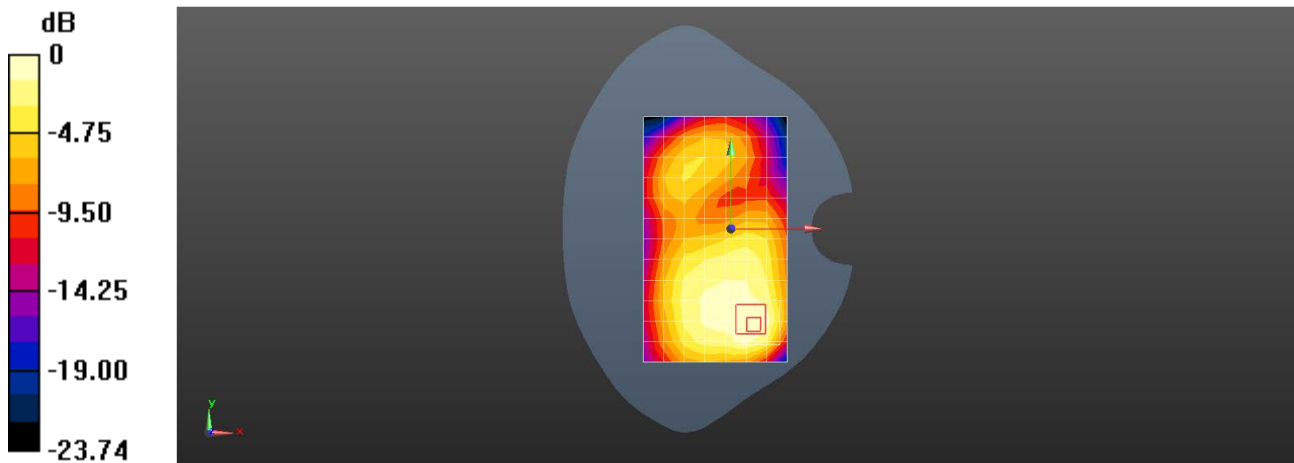

Test Laboratory: SGS-SAR Lab

Celero3 5G WCDMA Band V RMC 4182CH Right cheek Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.335$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.463 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.219 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.541 W/kg

SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.481 W/kg

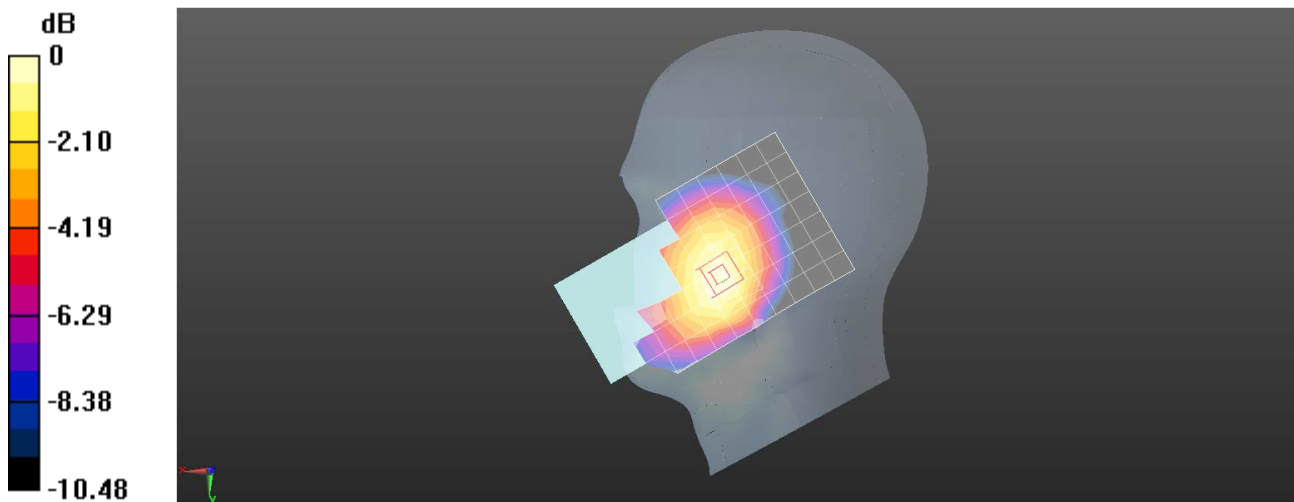

0 dB = 0.481 W/kg = -3.18 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WCDMA Band V RMC 4182CH Back side 15mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.335$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.410 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.38 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.457 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.407 W/kg

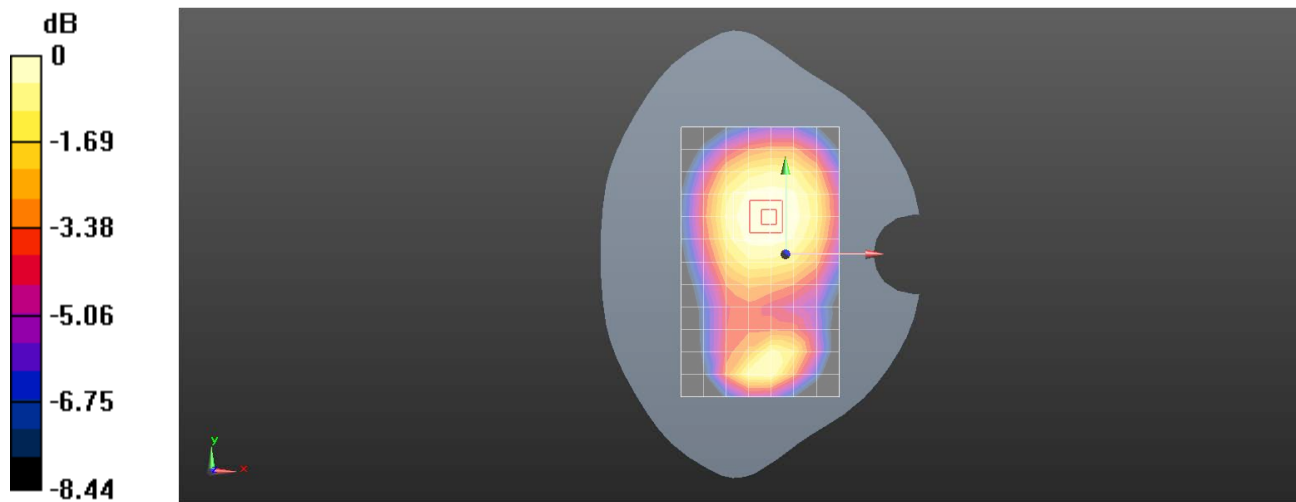

0 dB = 0.407 W/kg = -3.90 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WCDMA Band V RMC 4182CH Back side 10mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.335$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.798 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.53 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.342 W/kg

Maximum value of SAR (measured) = 0.907 W/kg

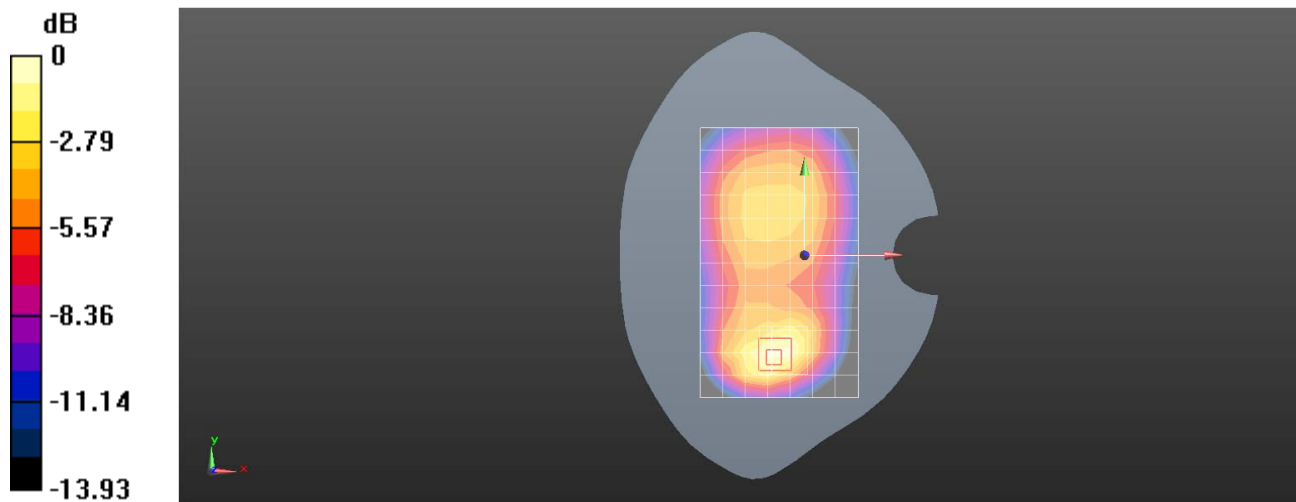

0 dB = 0.907 W/kg = -0.42 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 2 20M QPSK 1RB50 19100CH Right tilted Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1900 MHz;Duty Cycle: 1:1

Medium: HSL1900;Medium parameters used: $f = 1900$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.64$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.57 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.24 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.97 W/kg

SAR(1 g) = 0.962 W/kg; SAR(10 g) = 0.443 W/kg

Maximum value of SAR (measured) = 1.51 W/kg

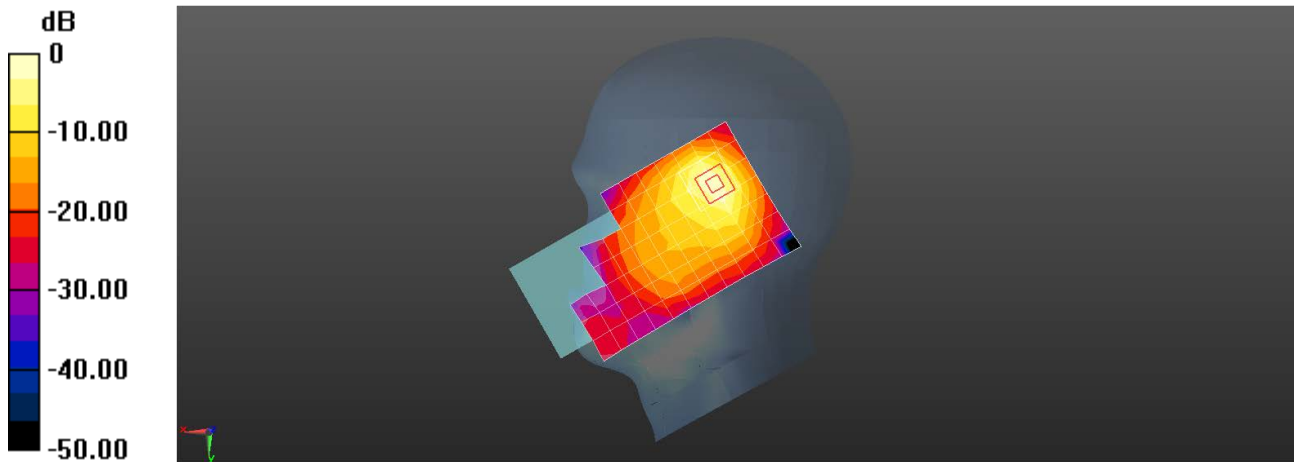

0 dB = 1.57 W/kg = 1.95 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 2 20M QPSK 1RB0 18700CH Back side 15mm Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz;Duty Cycle: 1:1

Medium: HSL1900;Medium parameters used: $f = 1860$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.814$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.678 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.36 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.871 W/kg

SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.292 W/kg

Maximum value of SAR (measured) = 0.736 W/kg

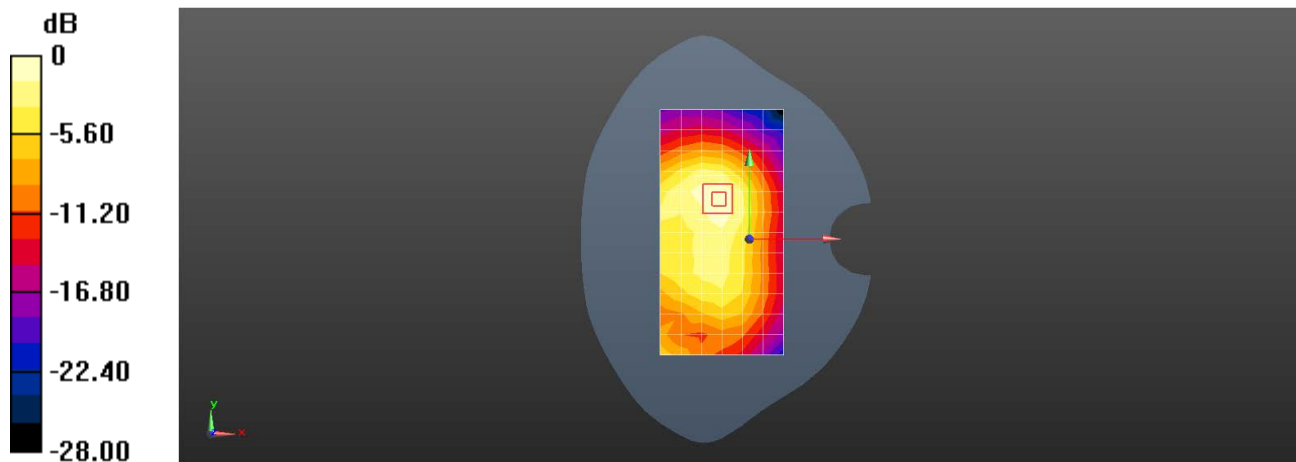

0 dB = 0.678 W/kg = -1.69 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 2 20M QPSK 1RB50 19100CH Top side 10mm Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1900 MHz;Duty Cycle: 1:1

Medium: HSL1900;Medium parameters used: $f = 1900$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.64$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.37 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.21 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.982 W/kg; SAR(10 g) = 0.511 W/kg

Maximum value of SAR (measured) = 1.49 W/kg

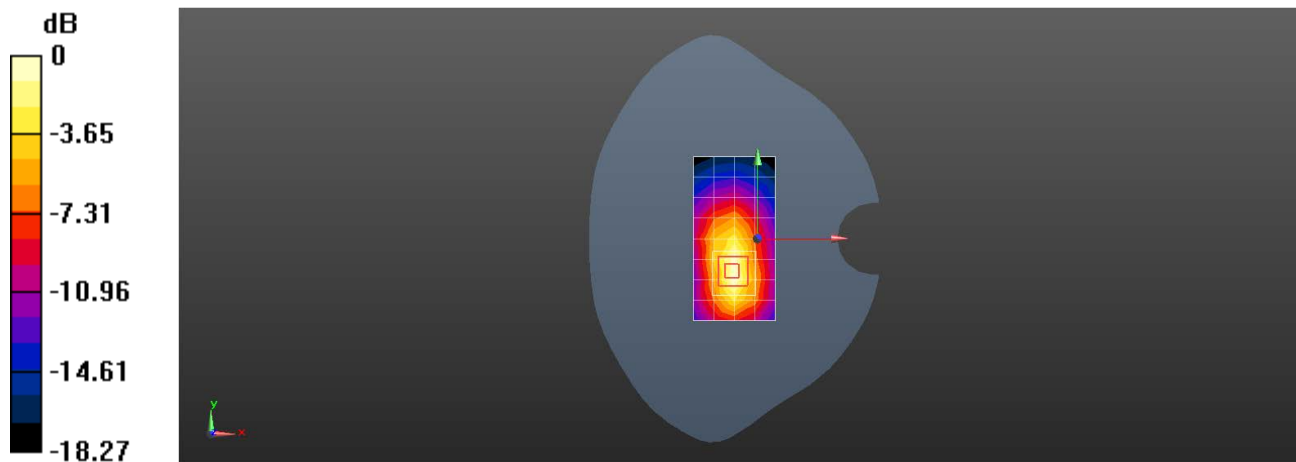

0 dB = 1.37 W/kg = 1.37 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 5 10M QPSK 1RB25 20450CH Right cheek Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 829 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used: $f = 829$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 43.393$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.808 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.96 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.291 W/kg

Maximum value of SAR (measured) = 0.770 W/kg

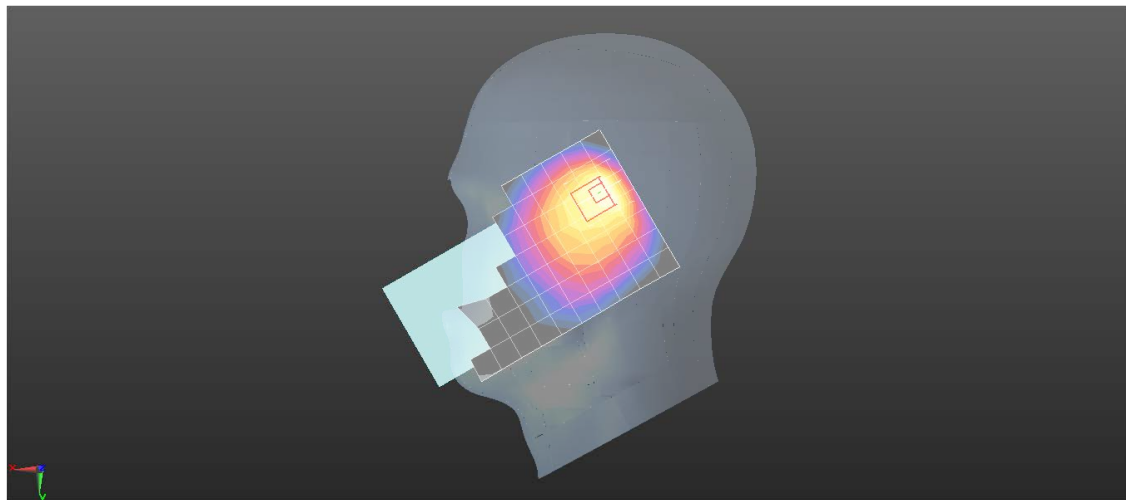

0 dB = 0.770 W/kg = -1.14 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 5 10M QPSK 1RB25 20450CH Back side 15mm Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 829$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 43.393$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.172 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.10 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.156 W/kg

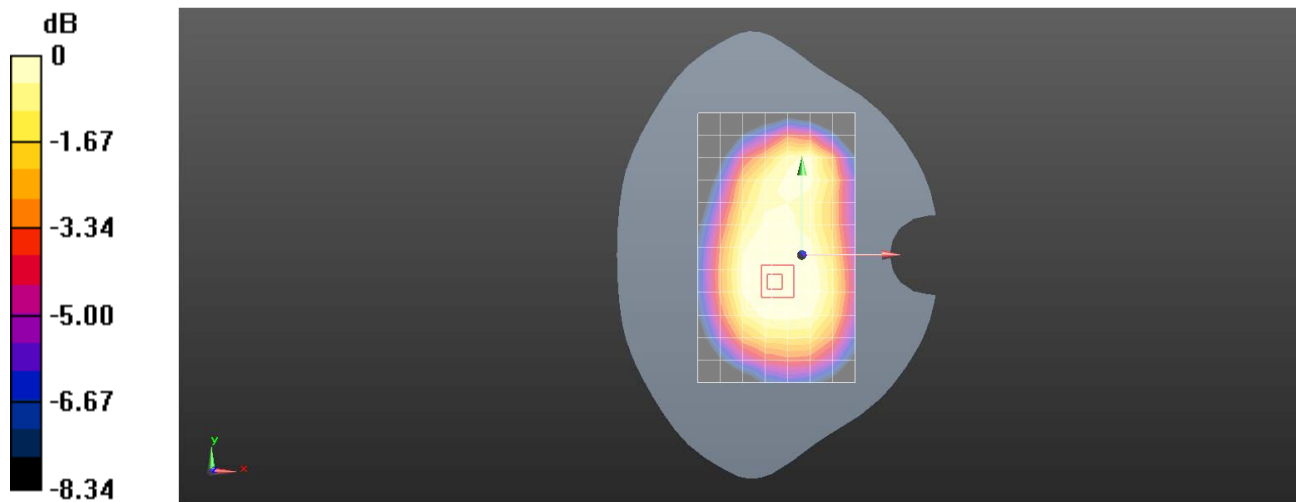

0 dB = 0.156 W/kg = -8.07 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 5 10M QPSK 1RB25 20450CH Back side 10mm Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 829 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 829$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 43.393$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.293 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.37 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.132 W/kg

Maximum value of SAR (measured) = 0.300 W/kg

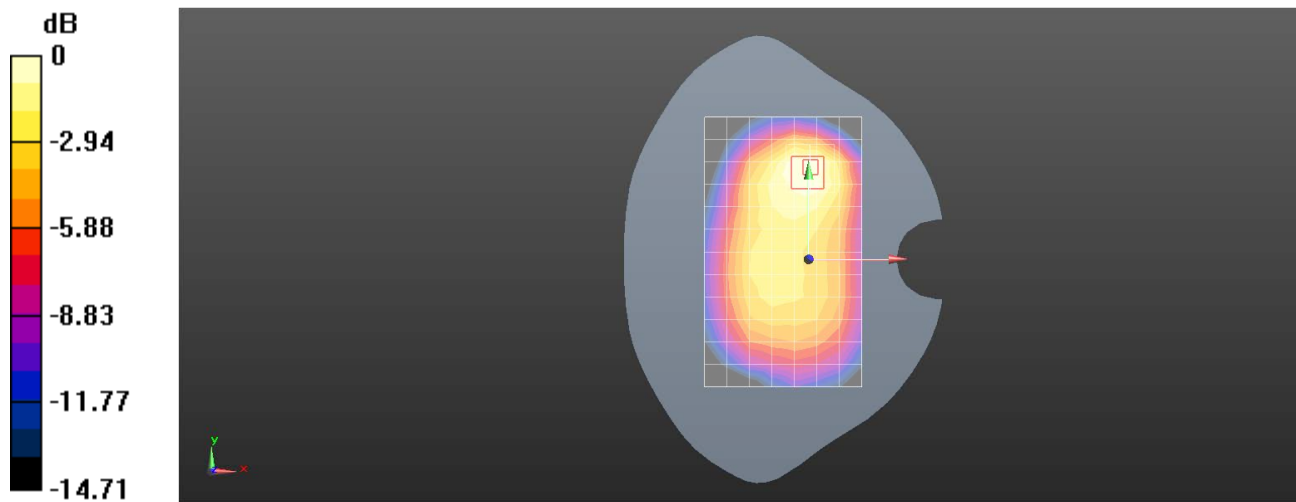

0 dB = 0.300 W/kg = -5.23 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 12 10M QPSK 1RB25 23130CH Right cheek Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 711$ MHz; $\sigma = 0.855$ S/m; $\epsilon_r = 44.058$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.283 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.567 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.244 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

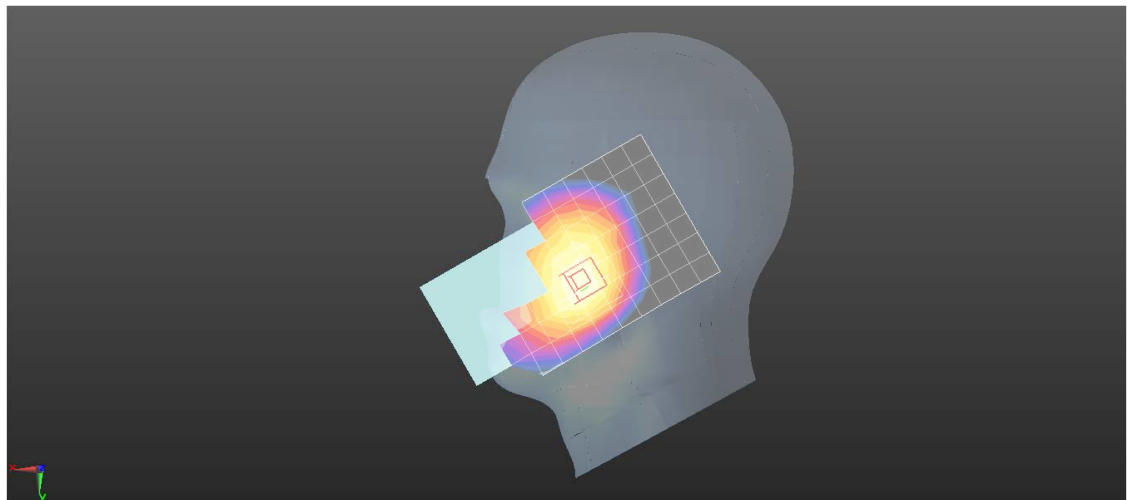

0 dB = 0.295 W/kg = -5.30 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 12 10M QPSK 1RB25 23130CH Back side 15mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 711$ MHz; $\sigma = 0.855$ S/m; $\epsilon_r = 44.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.418 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.48 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 0.418 W/kg

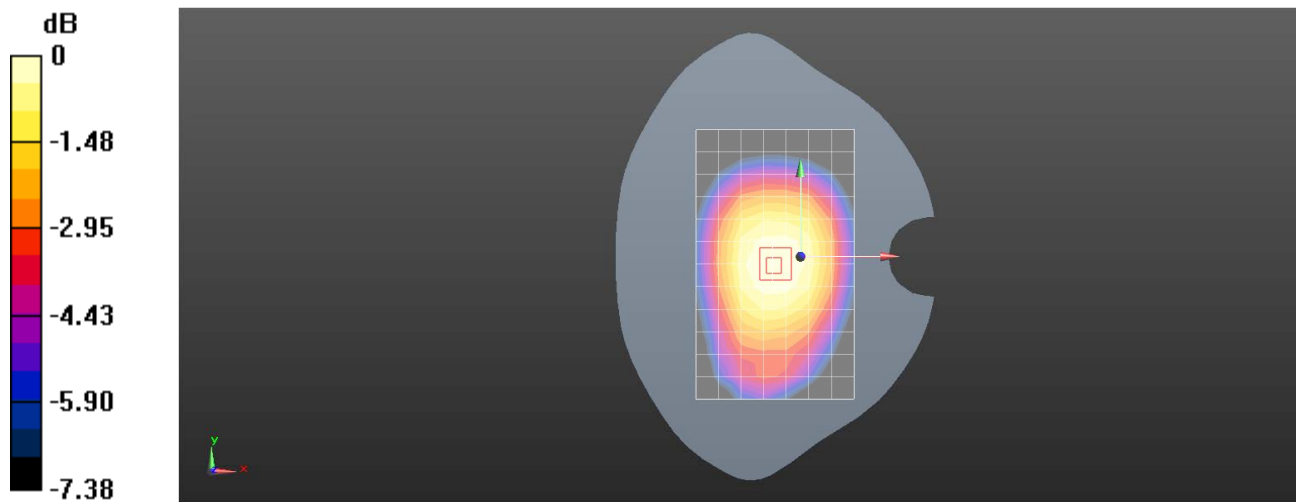

0 dB = 0.418 W/kg = -3.79 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 12 10M QPSK 1RB25 23130CH Right side 10mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 711 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 711$ MHz; $\sigma = 0.855$ S/m; $\epsilon_r = 44.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.492 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.38 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.281 W/kg

Maximum value of SAR (measured) = 0.537 W/kg

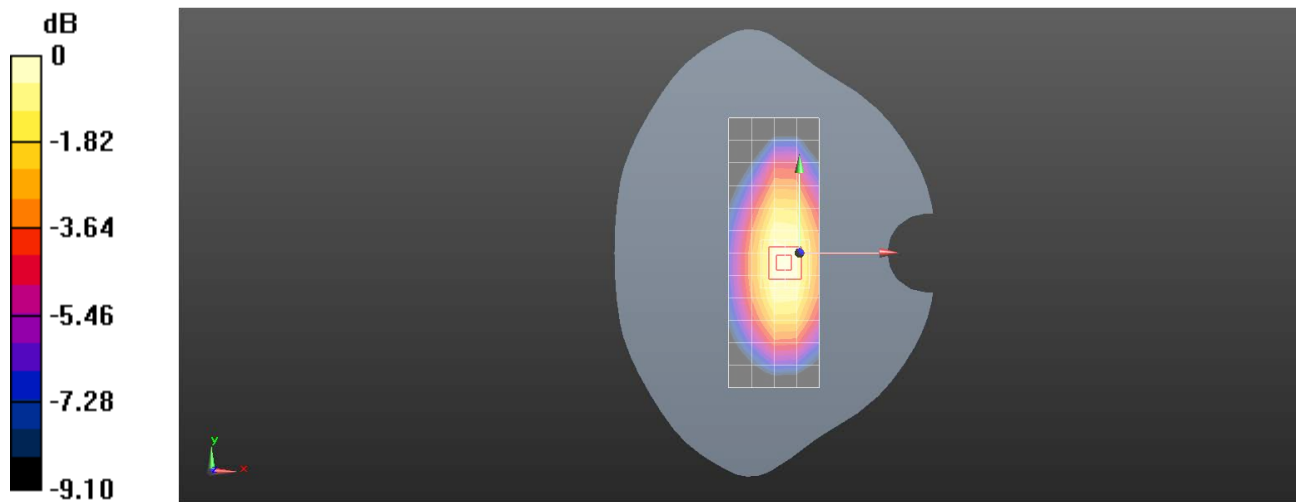

0 dB = 0.537 W/kg = -2.70 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE B14 10M QPSK 1RB25 23330CH Right cheek Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 793 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 793$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 43.579$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.375 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.635 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.438 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.246 W/kg

Maximum value of SAR (measured) = 0.393 W/kg

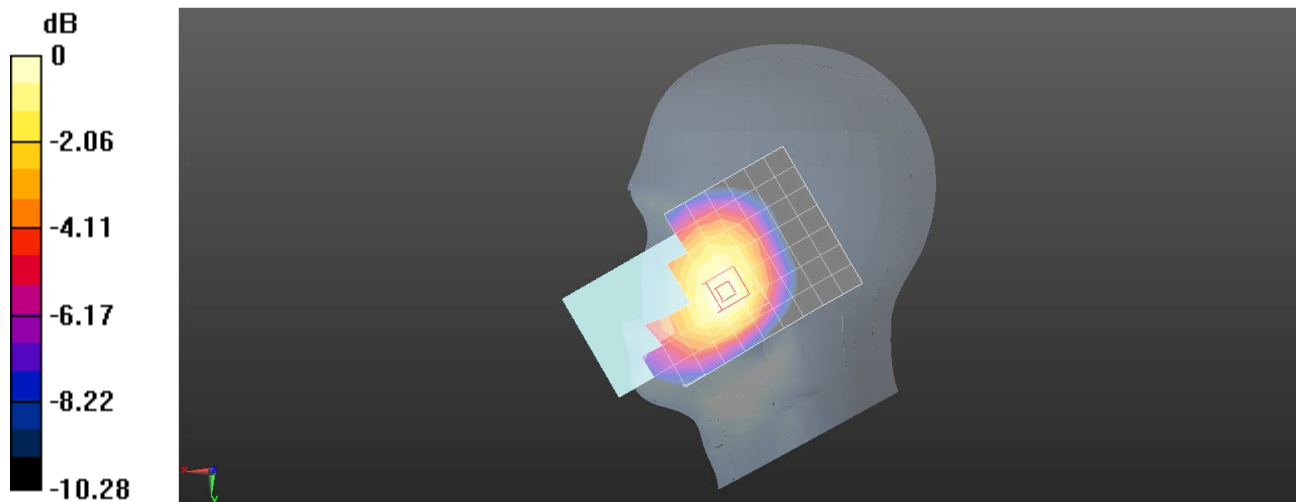

0 dB = 0.393 W/kg = -4.06 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE B14 10M QPSK 1RB25 23330CH Front side 15mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 793 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 793$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 43.579$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.446 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.46 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.503 W/kg

SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 0.452 W/kg

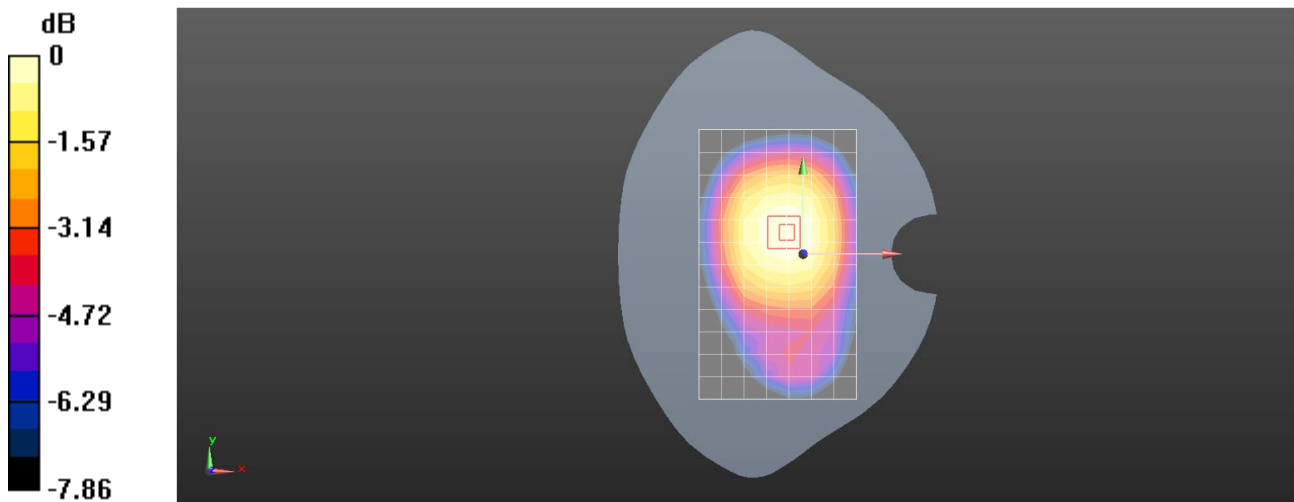

0 dB = 0.452 W/kg = -3.45 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE B14 10M QPSK 1RB25 23330CH Back side 10mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 793$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 43.579$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.604 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.60 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.849 W/kg

SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.262 W/kg

Maximum value of SAR (measured) = 0.663 W/kg

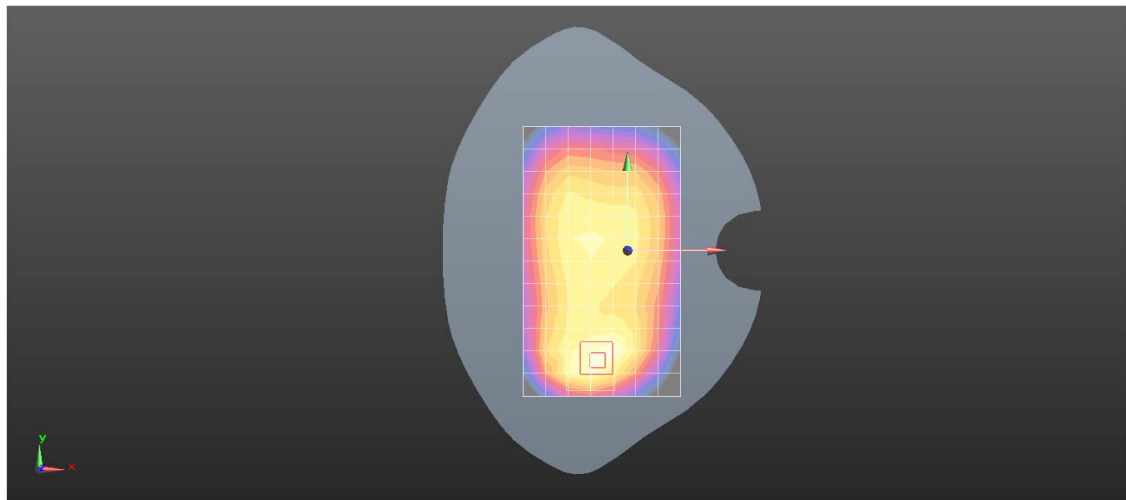

0 dB = 0.663 W/kg = -1.78 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE B26 15M QPSK 1RB74 26865CH Right cheek Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 43.363$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.383 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.753 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.395 W/kg

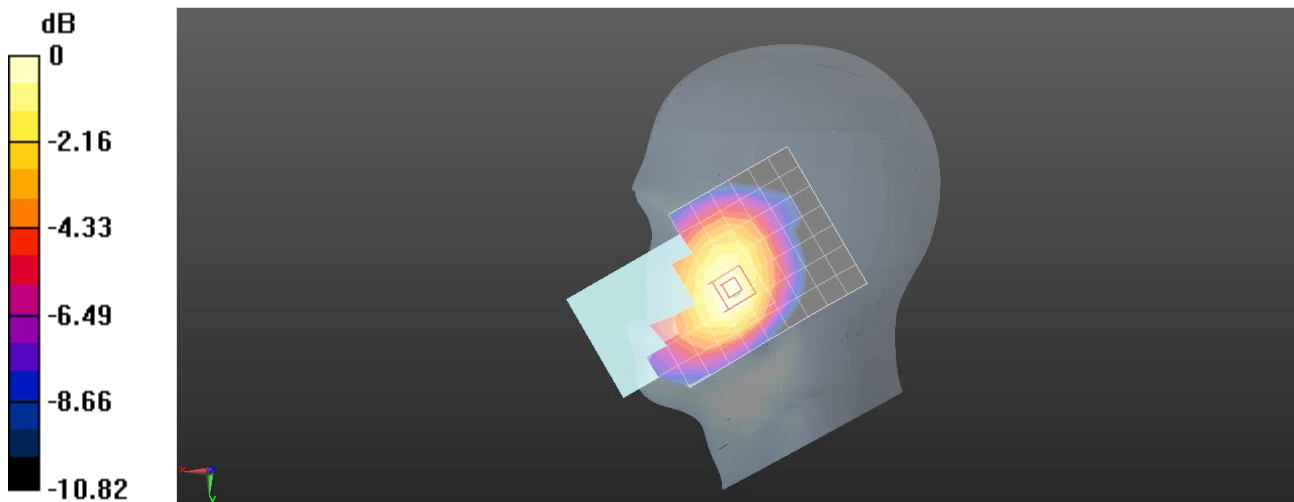

0 dB = 0.395 W/kg = -4.03 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE B26 15M QPSK 1RB74 26865CH Front side 15mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 43.363$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.327 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.24 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.333 W/kg

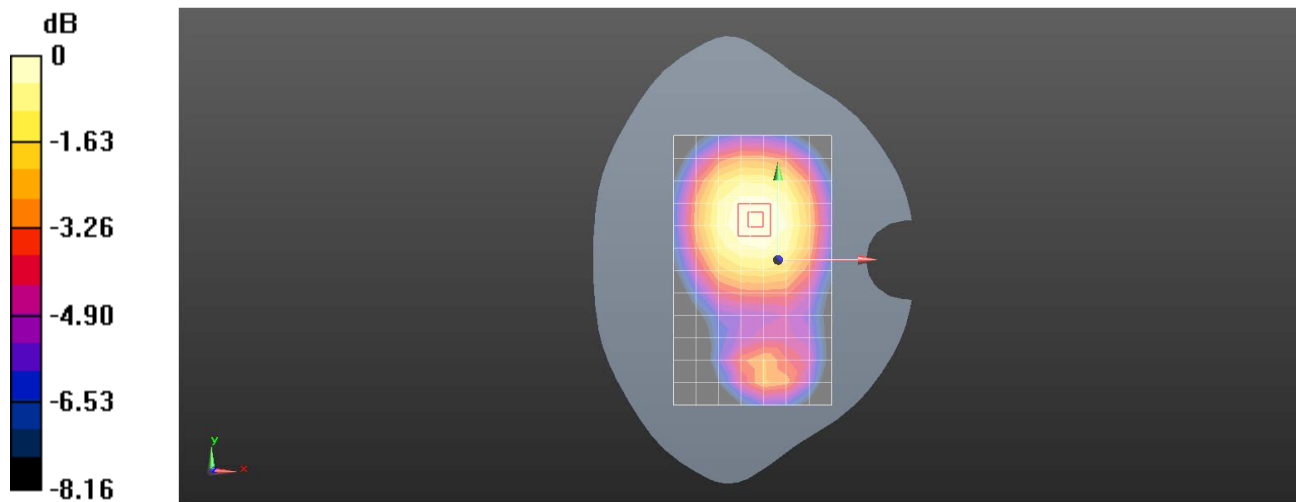

0 dB = 0.333 W/kg = -4.78 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE B26 15M QPSK 1RB74 26865CH Back side 10mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 43.363$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.653 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.22 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.949 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.745 W/kg

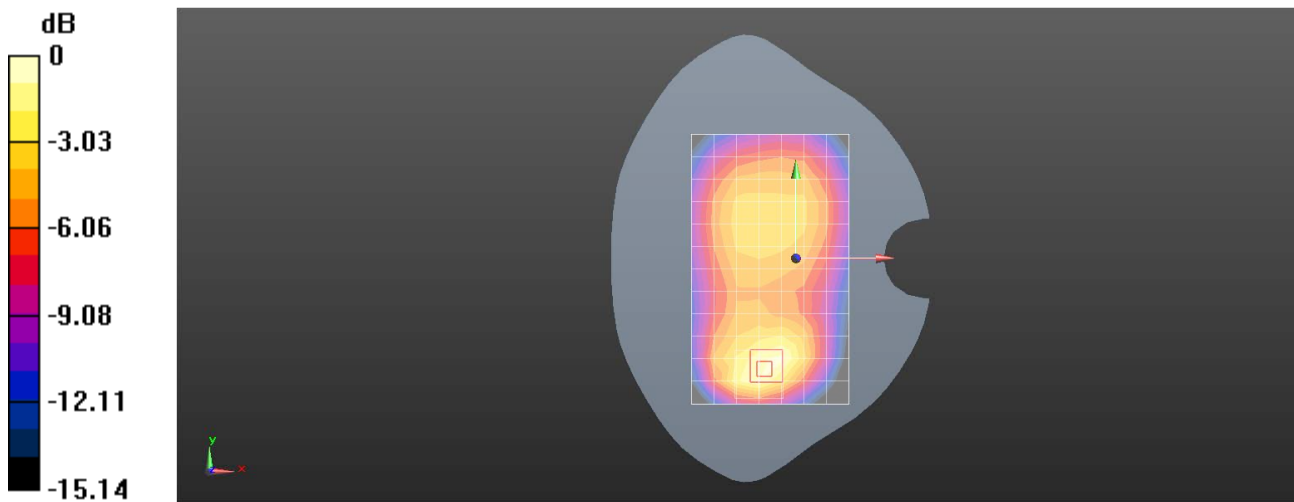

0 dB = 0.745 W/kg = -1.28 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE B30 10M QPSK 50RB0 27710CH Right tilted Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: HSL2300;Medium parameters used: $f = 2310$ MHz; $\sigma = 1.703$ S/m; $\epsilon_r = 38.509$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.46, 8.46, 8.46); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.01 W/kg



Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.72 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.756 W/kg; SAR(10 g) = 0.304 W/kg

Maximum value of SAR (measured) = 1.38 W/kg

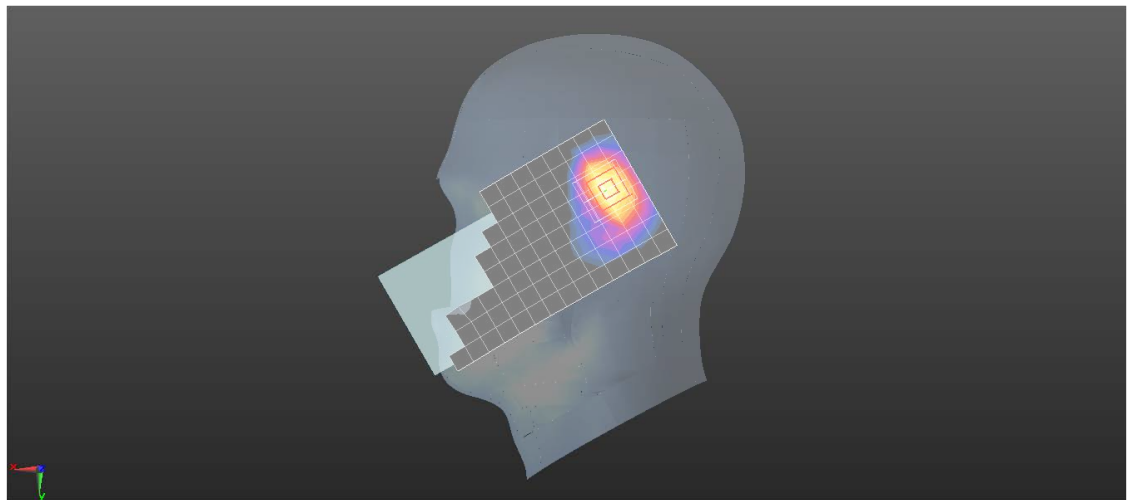

0 dB = 1.38 W/kg = 1.40 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE B30 10M QPSK 25RB0 27710CH Back side 15mm Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: HSL2300;Medium parameters used: $f = 2310$ MHz; $\sigma = 1.703$ S/m; $\epsilon_r = 38.509$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.46, 8.46, 8.46); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.01 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.731 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 1.03 W/kg

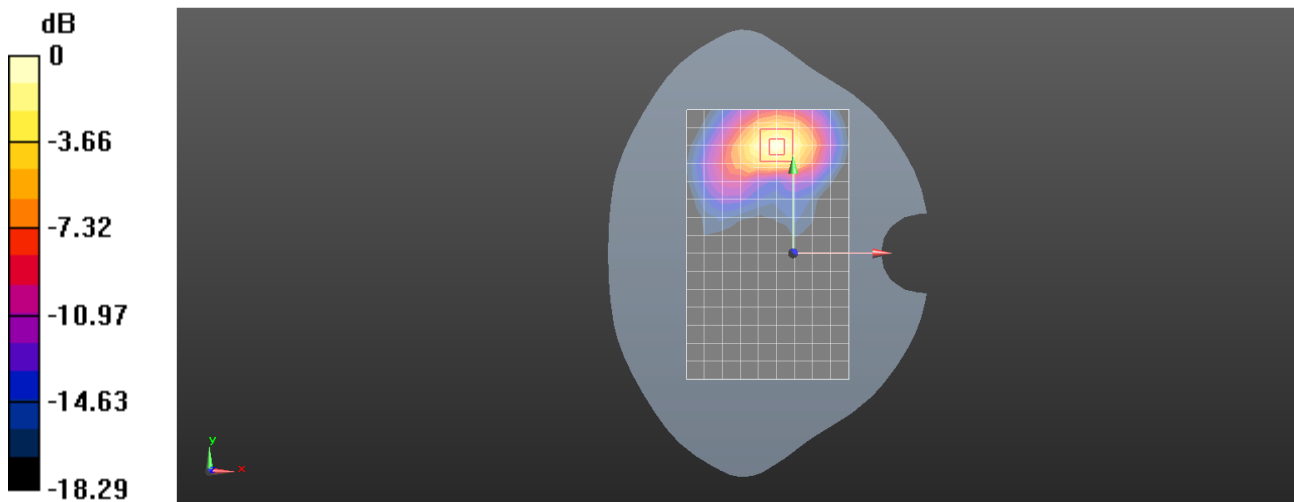

0 dB = 1.03 W/kg = 0.13 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE B30 10M QPSK 25RB25 27710CH Top side 10mm Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: HSL2300;Medium parameters used: $f = 2310$ MHz; $\sigma = 1.703$ S/m; $\epsilon_r = 38.509$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.46, 8.46, 8.46); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.964 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.44 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.358 W/kg

Maximum value of SAR (measured) = 1.22 W/kg

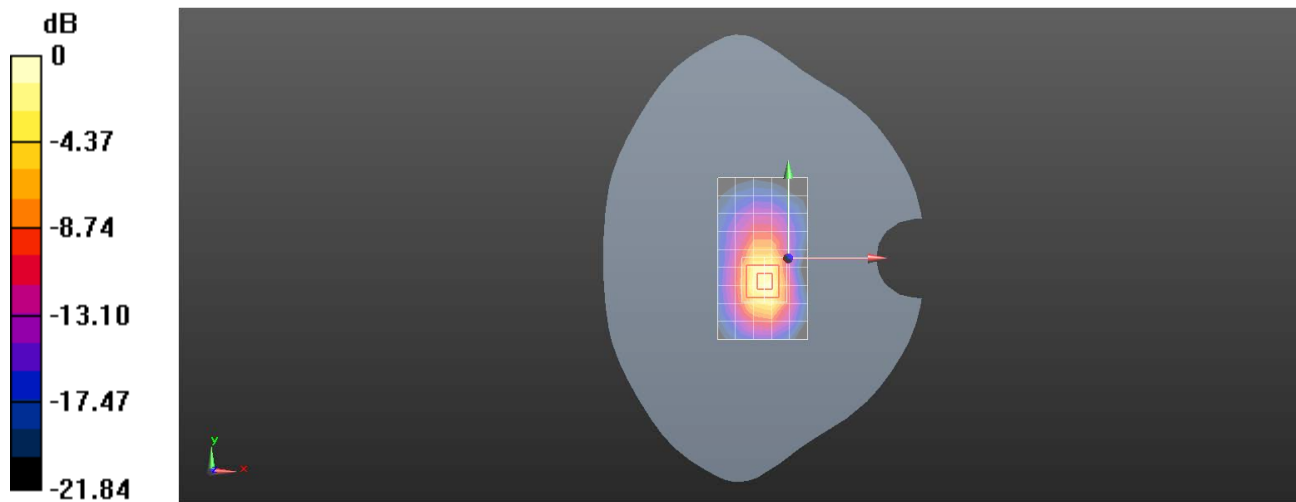

0 dB = 1.22 W/kg = 0.86 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE B30 10M QPSK 25RB0 27710CH Back side 0mm Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.703$ S/m; $\epsilon_r = 38.509$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.46, 8.46, 8.46); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 6.17 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.006 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 6.44 W/kg; SAR(10 g) = 2.48 W/kg

Maximum value of SAR (measured) = 11.9 W/kg

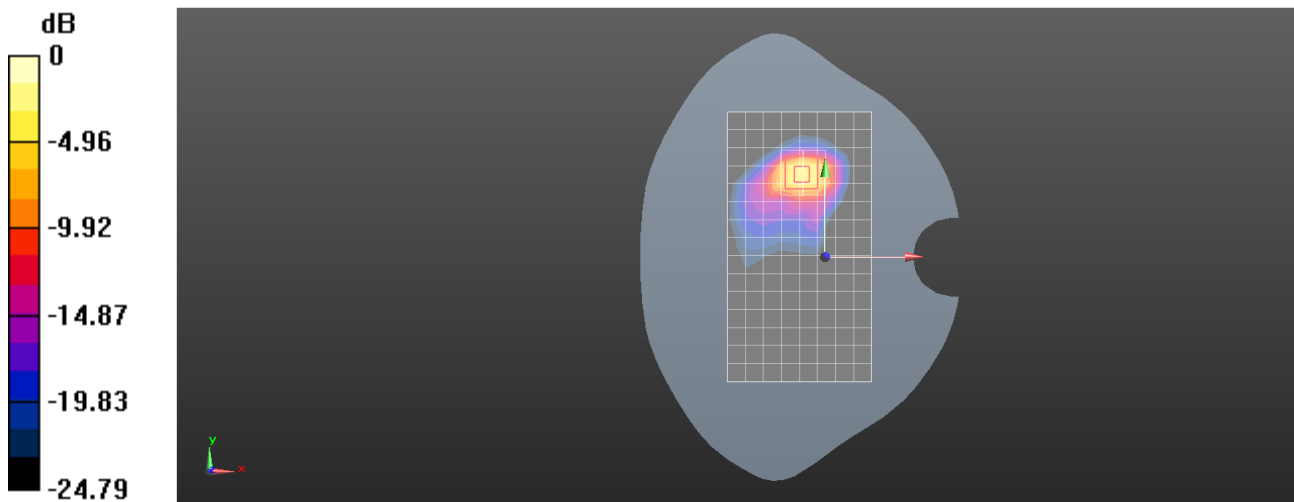

0 dB = 11.9 W/kg = 10.76 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 48 20M QPSK 1RB0 55990CH Right cheek Ant5

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58016

Medium: HSL3700;Medium parameters used: $f = 3625$ MHz; $\sigma = 2.965$ S/m; $\epsilon_r = 37.332$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7, 7, 7); Calibrated: 2023/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2023/3/27
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.09 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.209 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.640 W/kg; SAR(10 g) = 0.276 W/kg

Maximum value of SAR (measured) = 1.18 W/kg

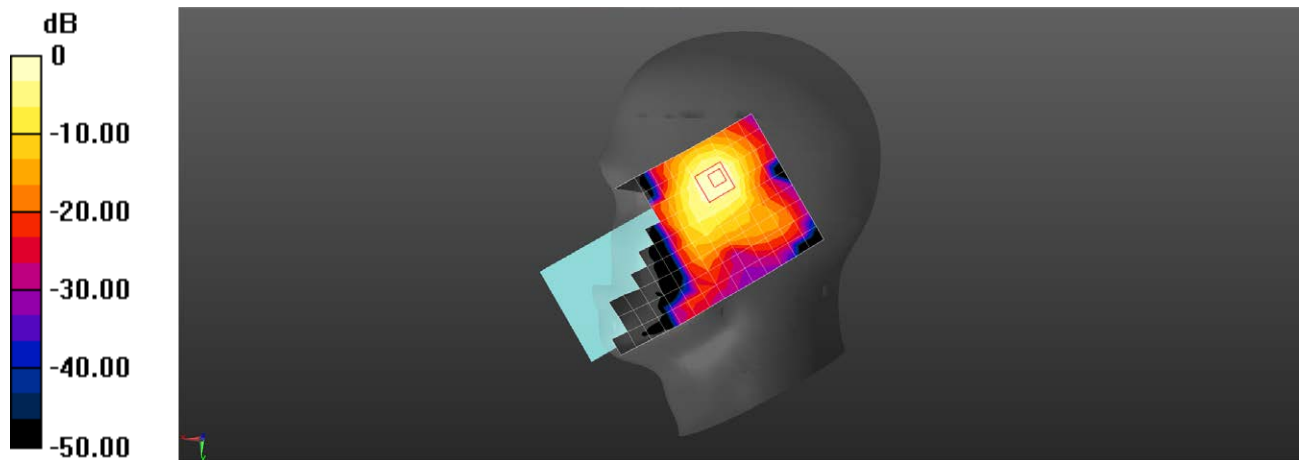

0 dB = 1.09 W/kg = 0.38 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 LTE Band 48 20M QPSK 1RB0 55990CH Front side 15mm Ant5

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3625 MHz;Duty Cycle: 1:1.58016

Medium: HSL3700;Medium parameters used: $f = 3625$ MHz; $\sigma = 2.965$ S/m; $\epsilon_r = 37.332$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7, 7, 7); Calibrated: 2023/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2023/3/27
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.592 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.070 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.848 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.635 W/kg

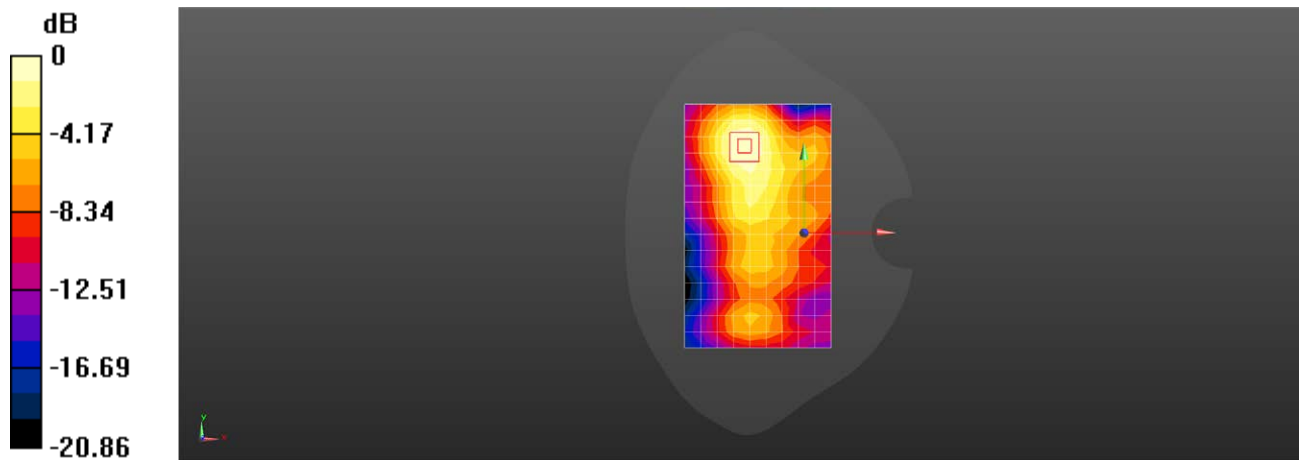

0 dB = 0.592 W/kg = -2.27 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 48 20M QPSK 1RB99 55340CH Left side 10mm Ant5

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3560 MHz;Duty Cycle: 1:1.58016

Medium: HSL3500;Medium parameters used: $f = 3560$ MHz; $\sigma = 2.904$ S/m; $\epsilon_r = 37.561$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.2, 7.2, 7.2); Calibrated: 2023/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2023/3/27
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.70 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.46 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.48 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.449 W/kg

Maximum value of SAR (measured) = 1.84 W/kg

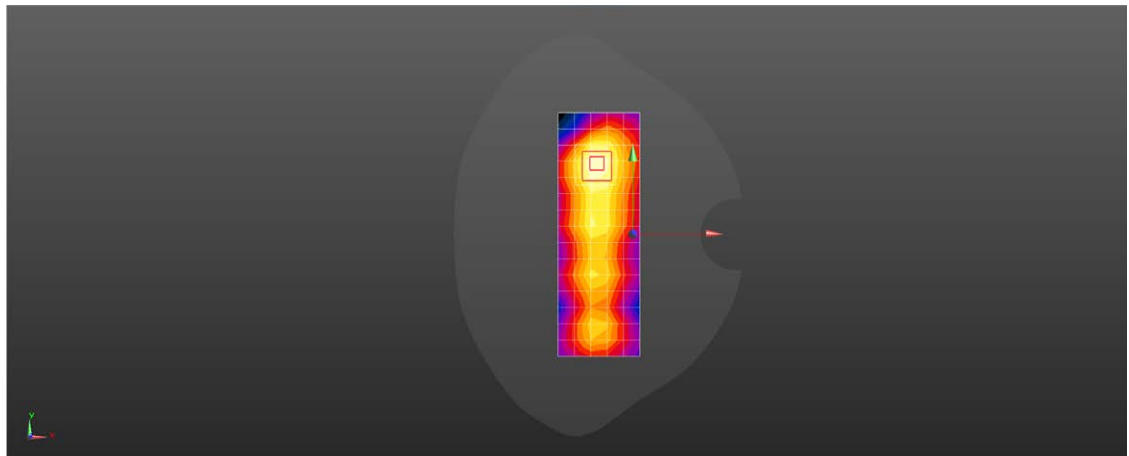

0 dB = 1.70 W/kg = 2.31 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 66 20M QPSK 1RB0 132572CH Right tilted Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1770 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1770$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 40.638$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.39 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.90 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.897 W/kg; SAR(10 g) = 0.413 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

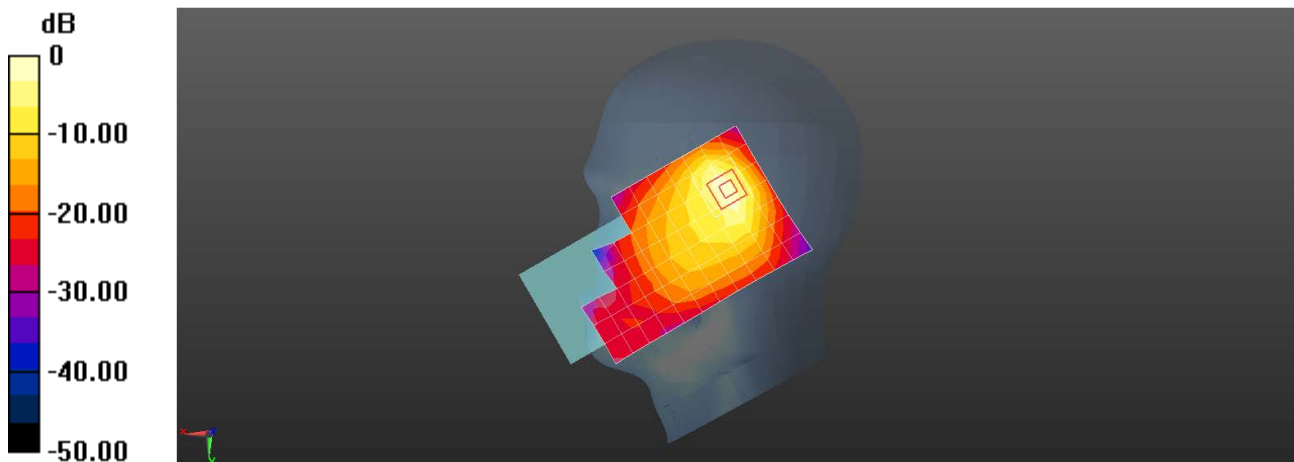

0 dB = 1.39 W/kg = 1.43 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 66 20M QPSK 1RB99 132072CH Back side 15mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1720 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1720$ MHz; $\sigma = 1.292$ S/m; $\epsilon_r = 40.459$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.477 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.212 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.480 W/kg

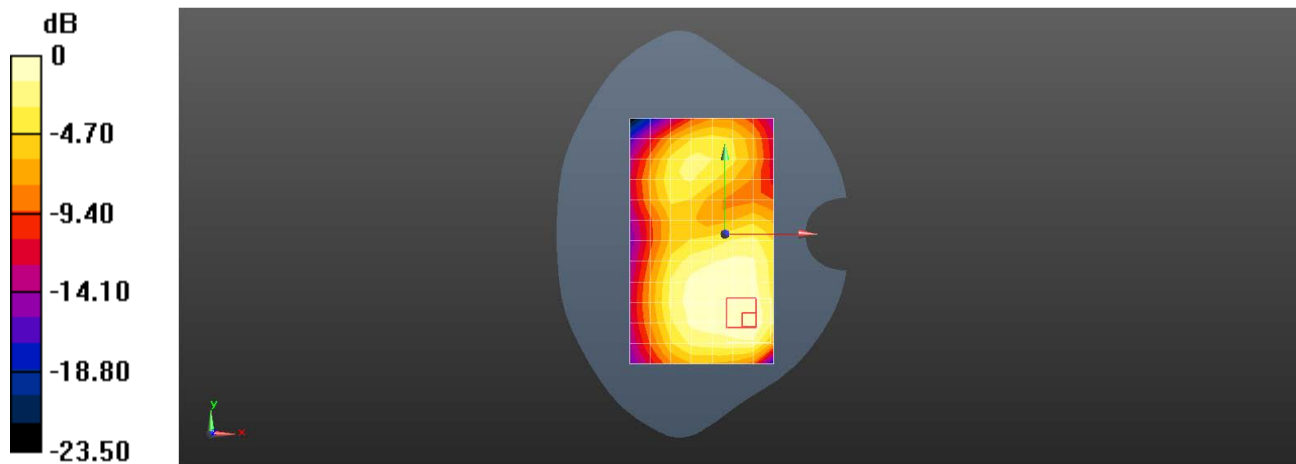

0 dB = 0.477 W/kg = -3.21 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 66 20M QPSK 1RB99 132072CH Back side 10mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1720 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1720$ MHz; $\sigma = 1.292$ S/m; $\epsilon_r = 40.459$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.825 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.41 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.365 W/kg

Maximum value of SAR (measured) = 0.878 W/kg

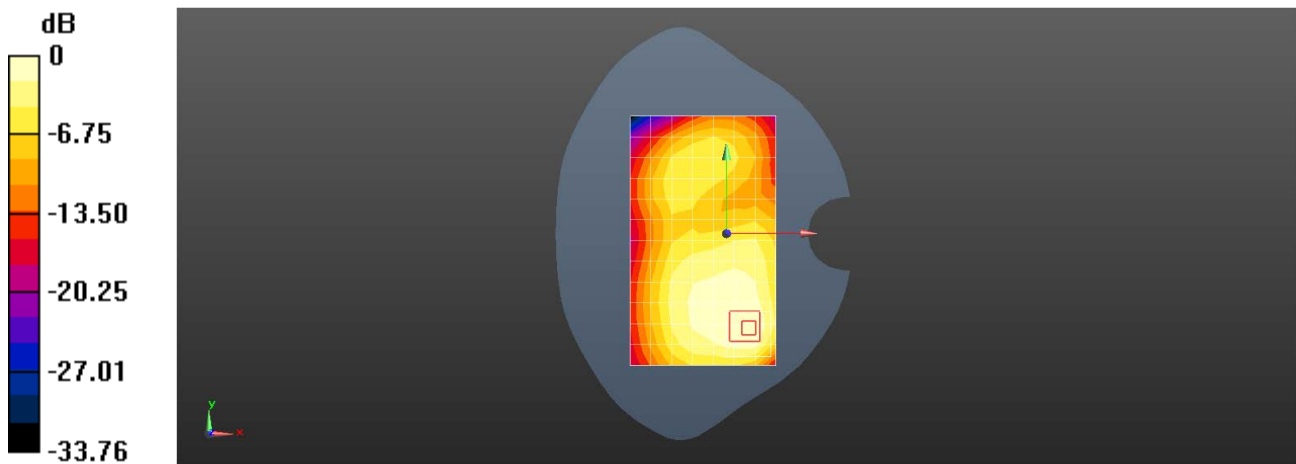

0 dB = 0.825 W/kg = -0.83 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 71 20M QPSK 1RB50 133322CH Right cheek Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 683$ MHz; $\sigma = 0.849$ S/m; $\epsilon_r = 43.038$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.326 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.915 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 0.330 W/kg

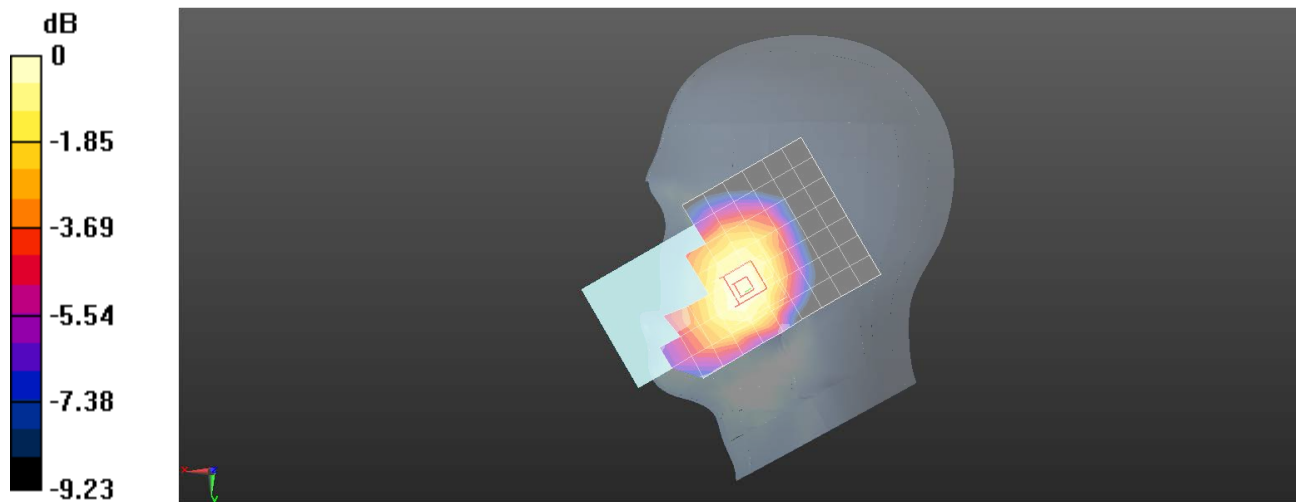

0 dB = 0.330 W/kg = -4.81 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 71 20M QPSK 1RB50 133322CH Back side 15mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 683 \text{ MHz}$; $\sigma = 0.849 \text{ S/m}$; $\epsilon_r = 43.038$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.405 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.98 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 0.409 W/kg

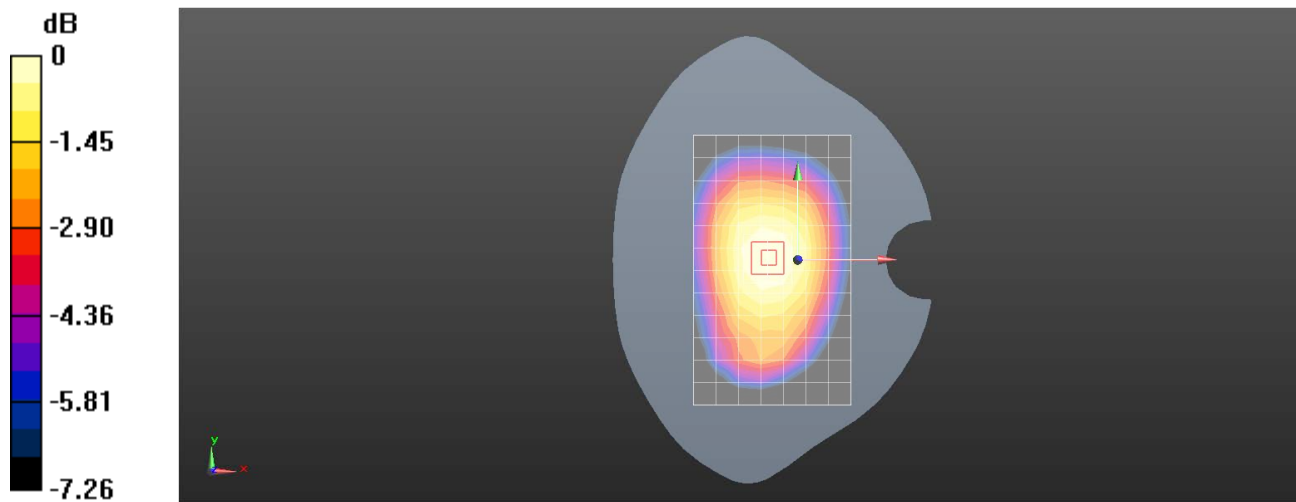

0 dB = 0.409 W/kg = -3.88 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G LTE Band 71 20M QPSK 1RB50 133322CH Right side 10mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 683$ MHz; $\sigma = 0.849$ S/m; $\epsilon_r = 43.038$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.701 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.18 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.846 W/kg

SAR(1 g) = 0.535 W/kg; SAR(10 g) = 0.370 W/kg

Maximum value of SAR (measured) = 0.724 W/kg

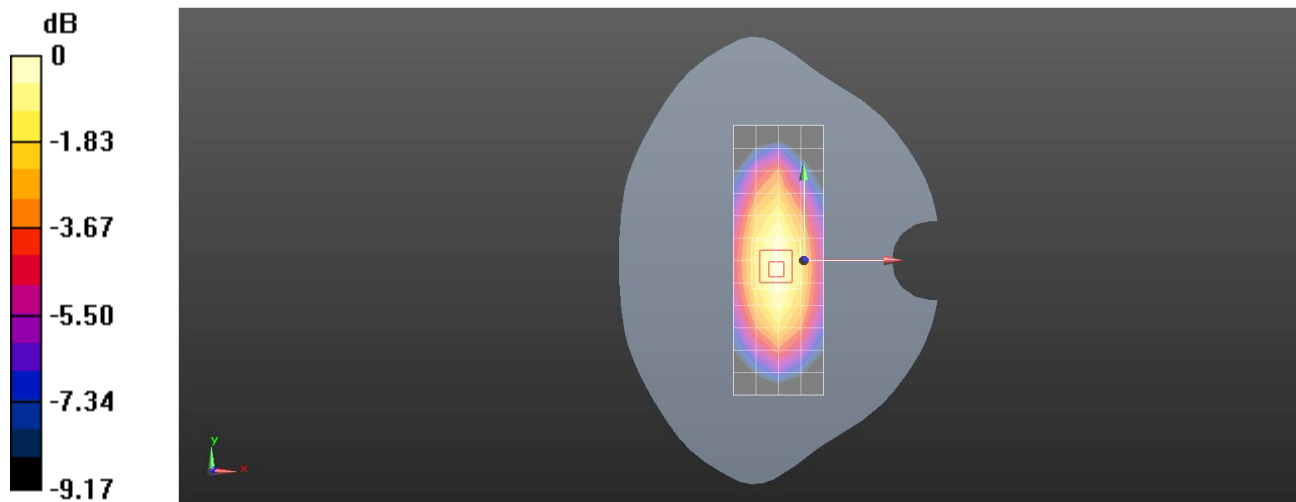

0 dB = 0.724 W/kg = -1.40 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N2 20M QPSK 25RB13 376000CH Right tilted Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.38 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.95 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.954 W/kg; SAR(10 g) = 0.437 W/kg

Maximum value of SAR (measured) = 1.47 W/kg

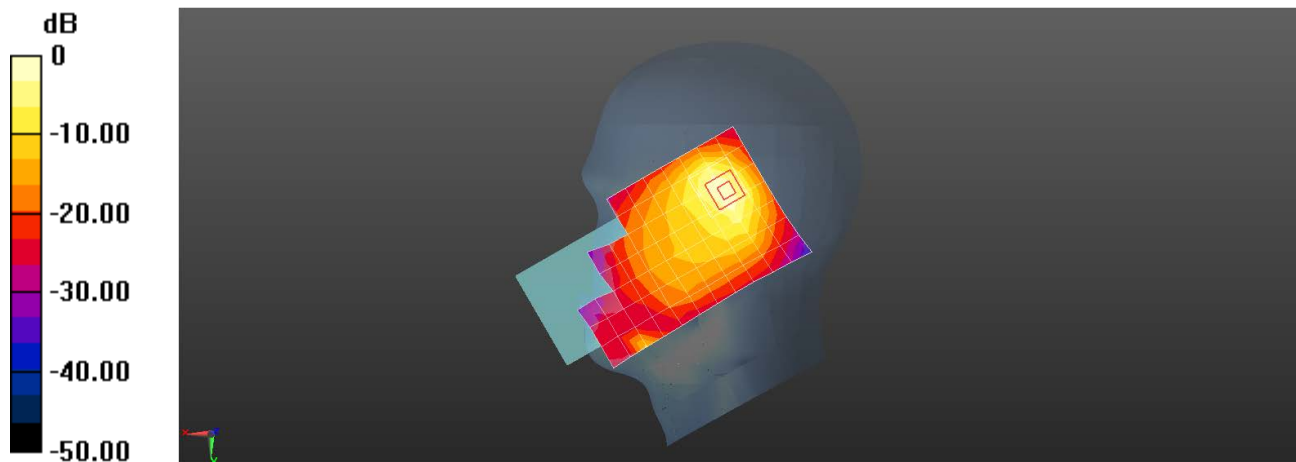

0 dB = 1.38 W/kg = 1.40 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N2 20M QPSK 25RB13 372000CH Back side 15mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017414

Communication System: UID 0, NR (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1860$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.814$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.692 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.76 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.856 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.691 W/kg

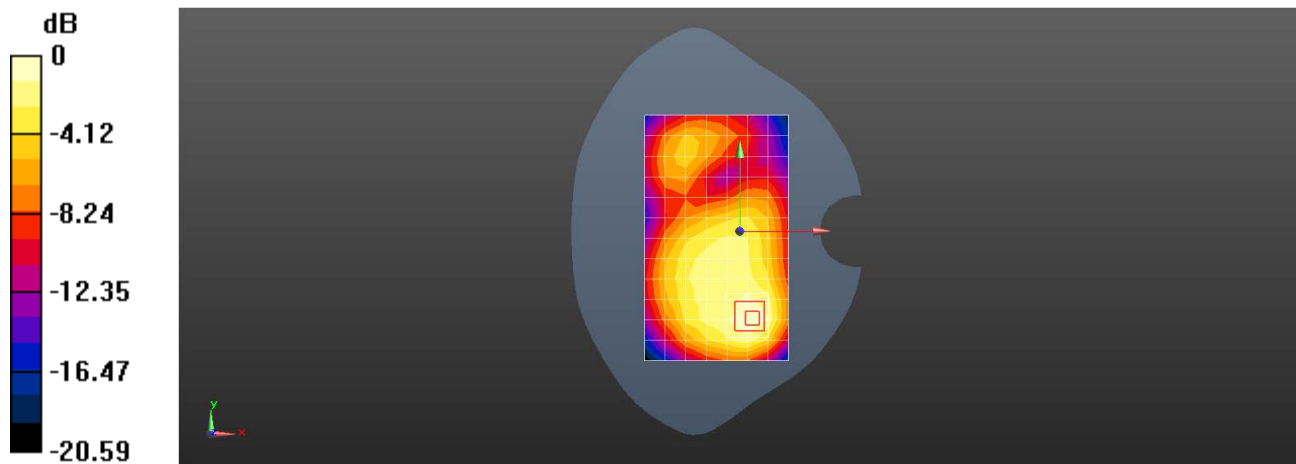

0 dB = 0.692 W/kg = -1.60 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N2 20M QPSK 1RB26 376000CH Back side 10mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.732$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.950 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.17 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.431 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

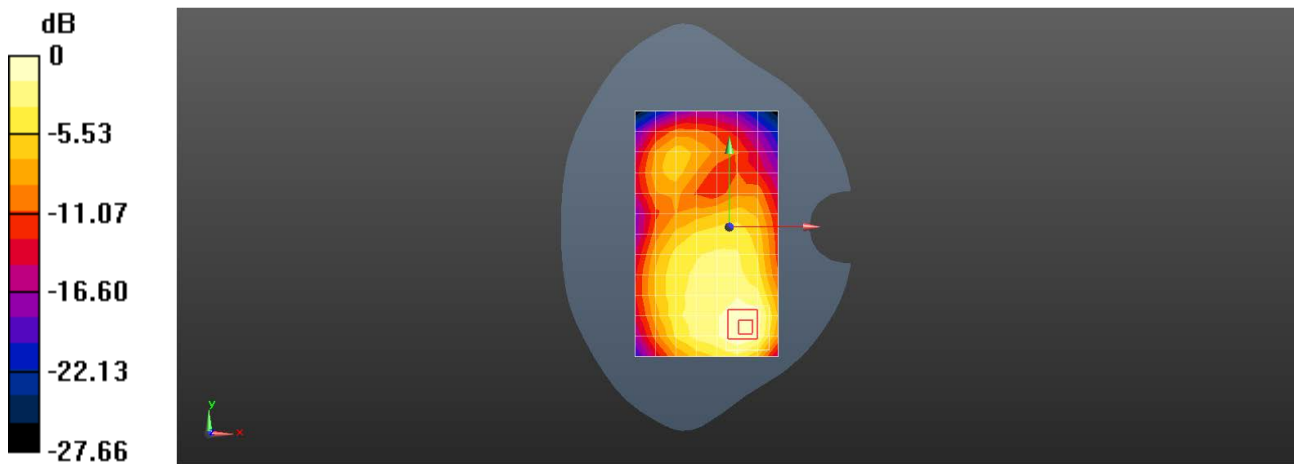

0 dB = 0.950 W/kg = -0.22 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N5 20M QPSK 1RB26 166800CH Right cheek Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, NR (0); Frequency: 834 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 834$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 43.216$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.370 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.188 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.390 W/kg

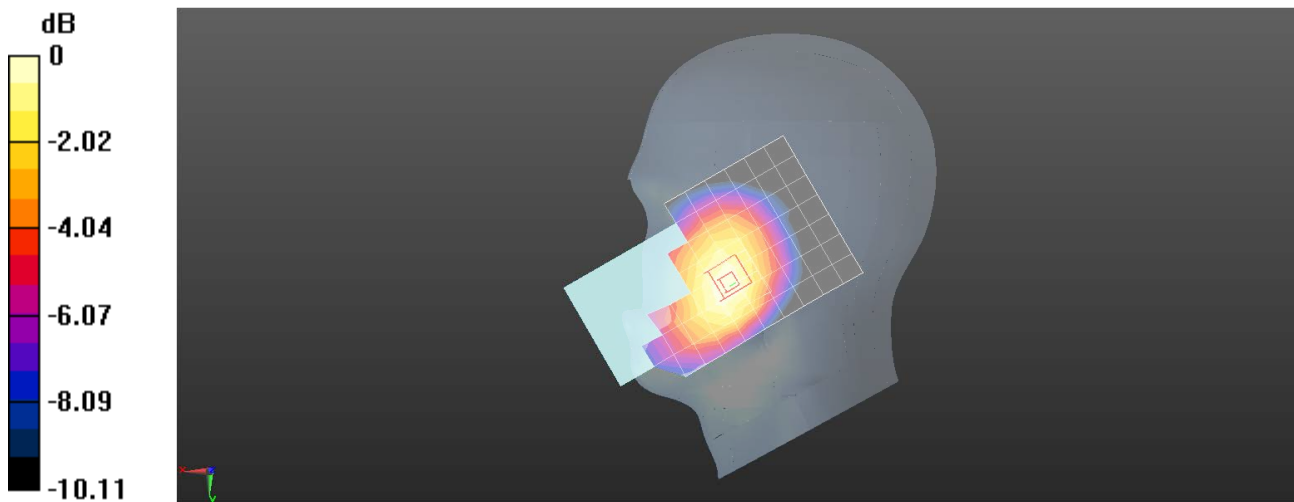

0 dB = 0.390 W/kg = -4.09 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N5 20M QPSK 1RB26 166800CH Back side 15mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, NR (0); Frequency: 834 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 834$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 43.216$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.340 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.62 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.337 W/kg

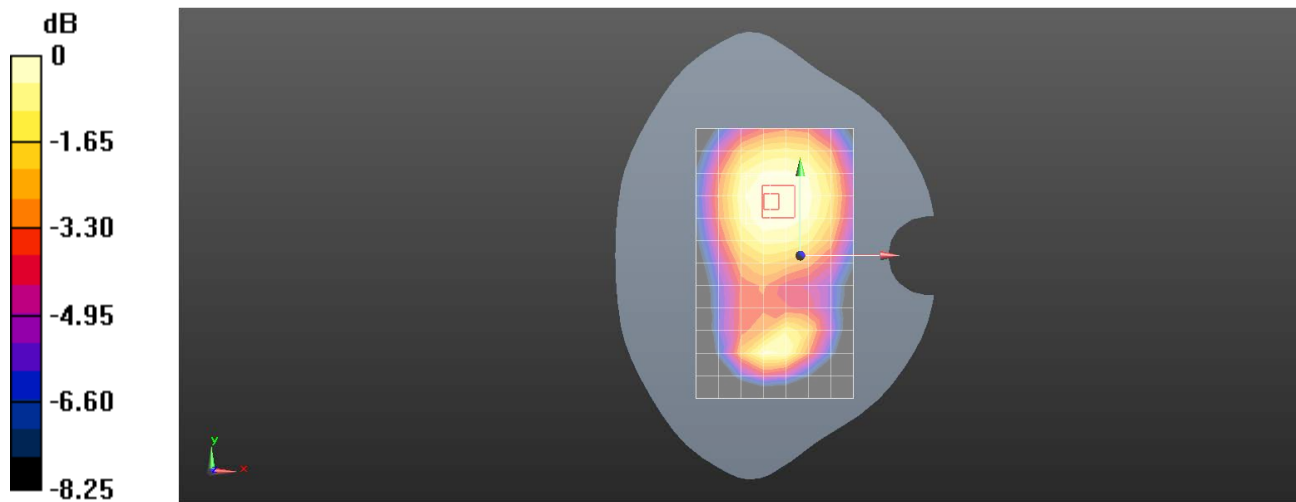

0 dB = 0.337 W/kg = -4.72 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N5 20M QPSK 25RB13 166800CH Back side 10mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 834 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 834 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 43.216$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.762 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.98 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.974 W/kg

SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.290 W/kg

Maximum value of SAR (measured) = 0.774 W/kg

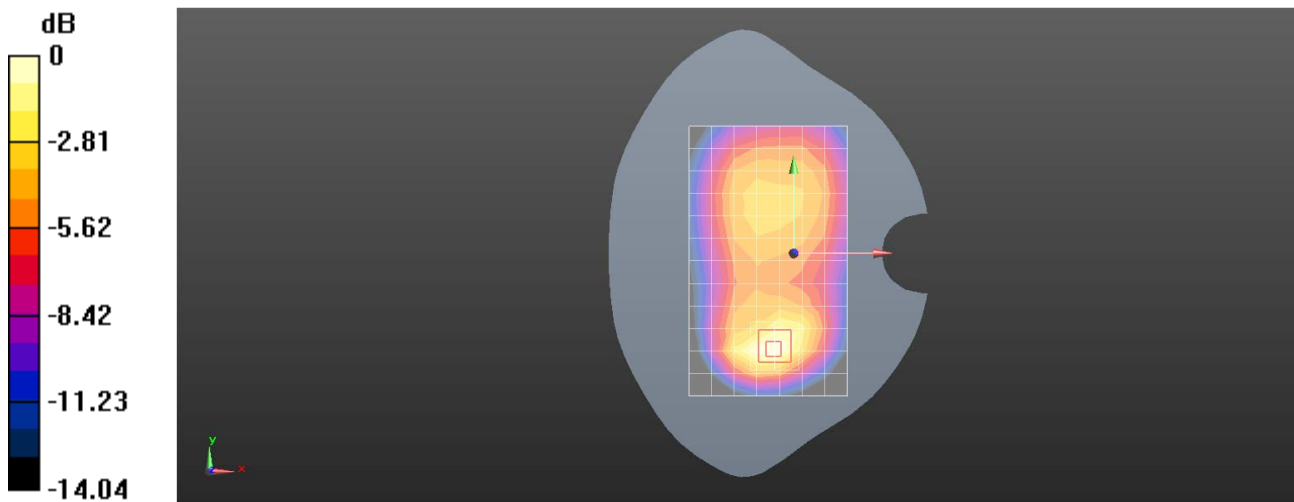

0 dB = 0.774 W/kg = -1.11 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N25 40M QPSK 50RB28 379000CH Right tilted Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 1895 MHz;Duty Cycle: 1:1

Medium: HSL1900;Medium parameters used: $f = 1895$ MHz; $\sigma = 1.361$ S/m; $\epsilon_r = 40.571$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.34 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.69 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.989 W/kg; SAR(10 g) = 0.458 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

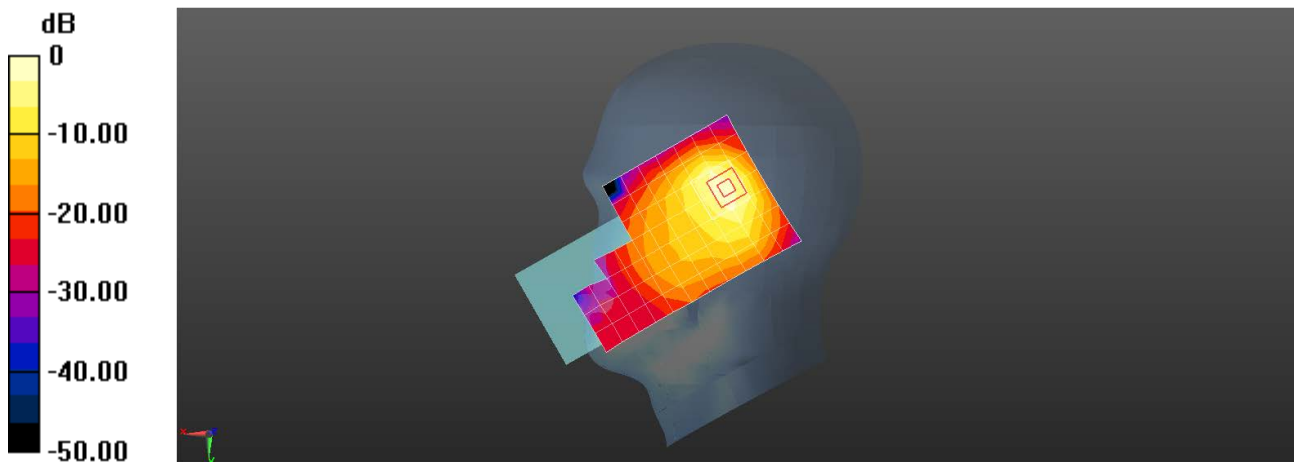

0 dB = 1.34 W/kg = 1.27 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N25 40M QPSK 50RB28 376500CH Back side 15mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.362$ S/m; $\epsilon_r = 40.623$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.529 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.59 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.653 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.229 W/kg

Maximum value of SAR (measured) = 0.552 W/kg

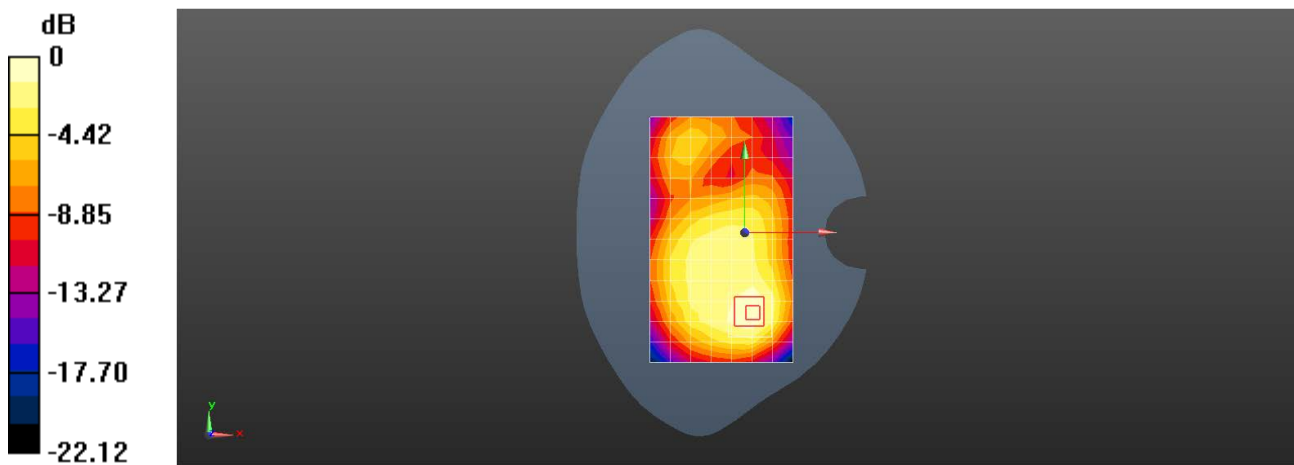

0 dB = 0.529 W/kg = -2.77 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N25 40M QPSK 50RB28 374000CH Back side 10mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 1870 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1870$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 40.738$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.3, 8.3, 8.3); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.941 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.85 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.674 W/kg; SAR(10 g) = 0.385 W/kg

Maximum value of SAR (measured) = 0.928 W/kg

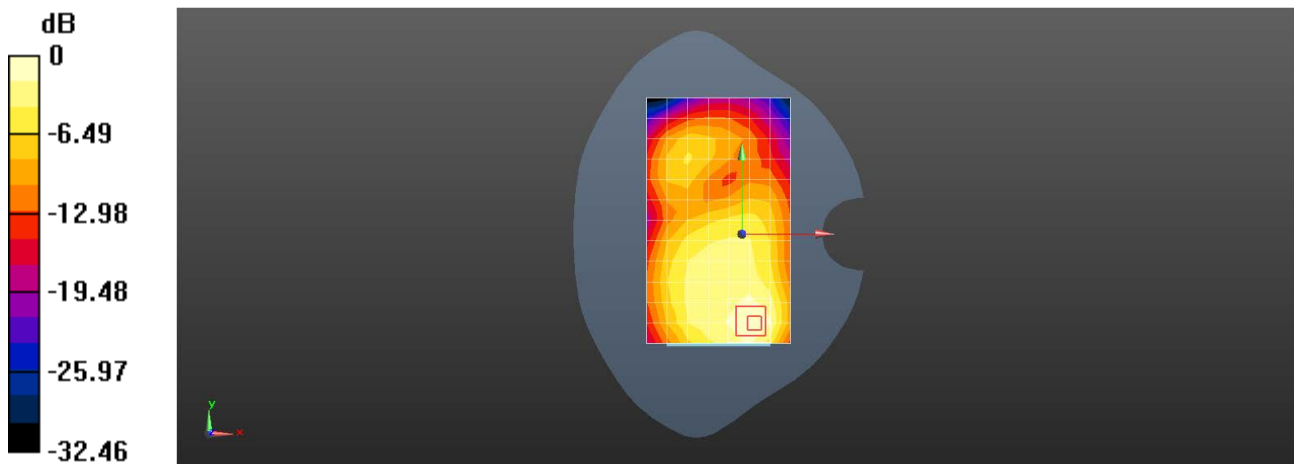

0 dB = 0.941 W/kg = -0.27 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N26 20M QPSK 25RB13 166300CH Right cheek Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, NR (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 43.23$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.361 W/kg



Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.967 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.231 W/kg

Maximum value of SAR (measured) = 0.359 W/kg

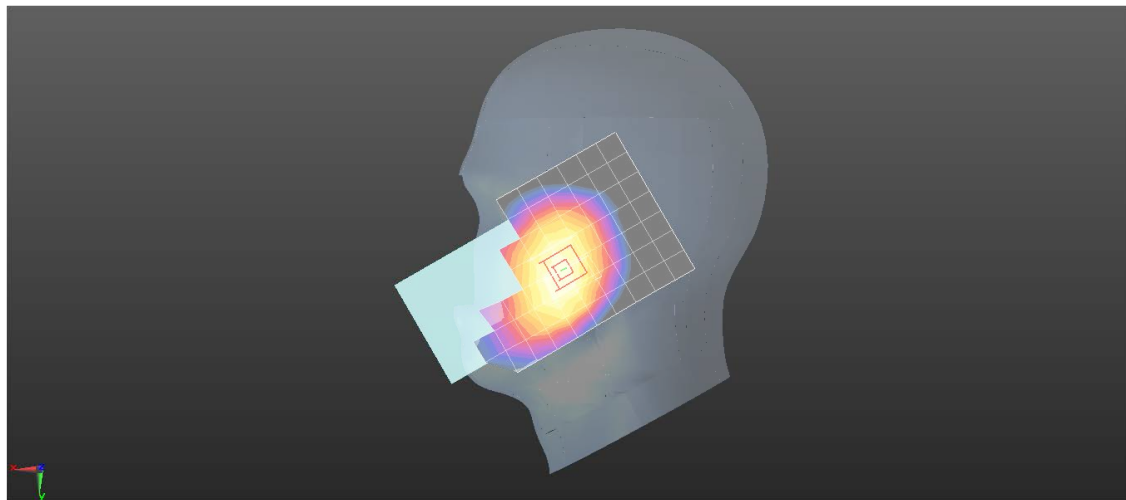

0 dB = 0.359 W/kg = -4.45 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N26 20M QPSK 1RB1 167800CH Front side 15mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, NR (0); Frequency: 839 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 839$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.185$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.348 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.98 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.350 W/kg

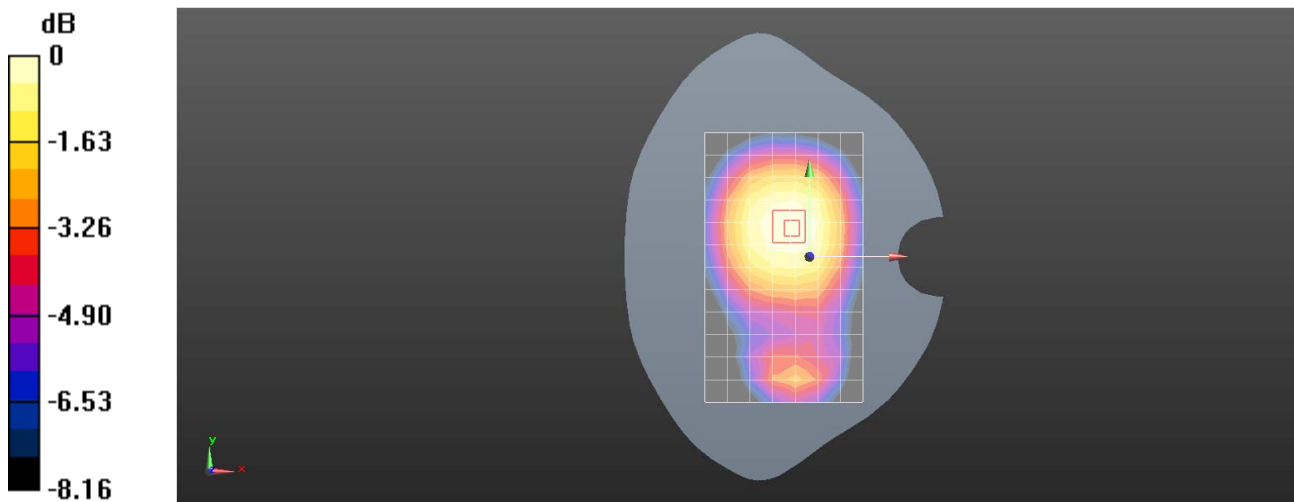

0 dB = 0.350 W/kg = -4.56 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N26 20M QPSK 25RB13 166300CH Back side 10mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, NR (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 43.23$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.73, 10.73, 10.73); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.702 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.39 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.541 W/kg; SAR(10 g) = 0.311 W/kg

Maximum value of SAR (measured) = 0.854 W/kg

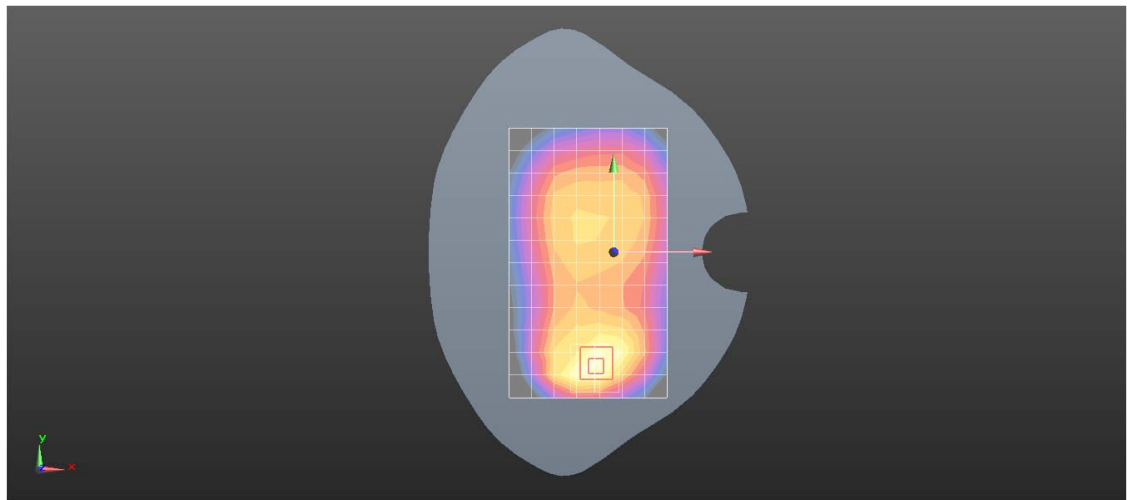

0 dB = 0.854 W/kg = -0.69 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N30 10M QPSK 1RB1 462000CH Right tilted Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.701$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.46, 8.46, 8.46); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.48 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.84 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 0.933 W/kg; SAR(10 g) = 0.370 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

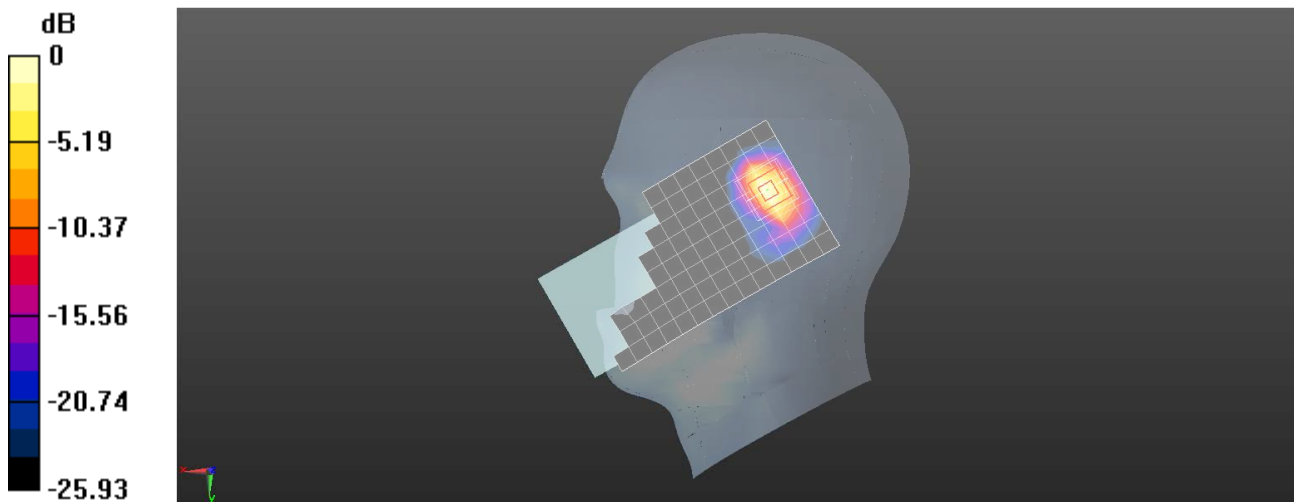

0 dB = 1.69 W/kg = 2.28 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N30 10M QPSK 12RB6 462000CH Back side 15mm Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.701$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.46, 8.46, 8.46); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.956 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.657 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.700 W/kg; SAR(10 g) = 0.365 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

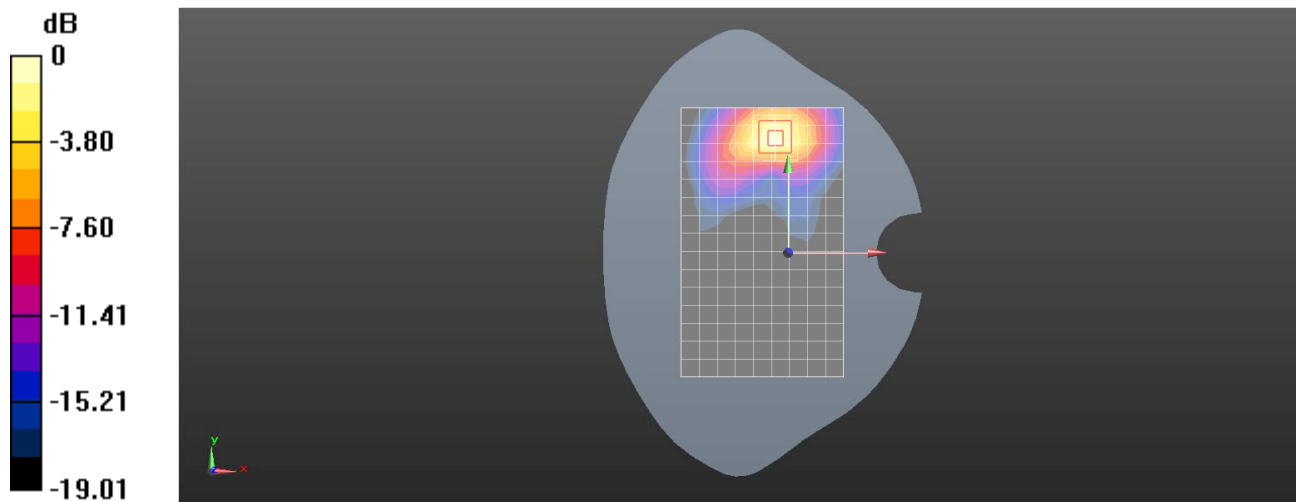

0 dB = 1.07 W/kg = 0.29 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N30 10M QPSK 12RB6 462000CH Top side 10mm Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.701$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.46, 8.46, 8.46); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.22 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.65 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.70 W/kg

SAR(1 g) = 0.848 W/kg; SAR(10 g) = 0.395 W/kg

Maximum value of SAR (measured) = 1.39 W/kg

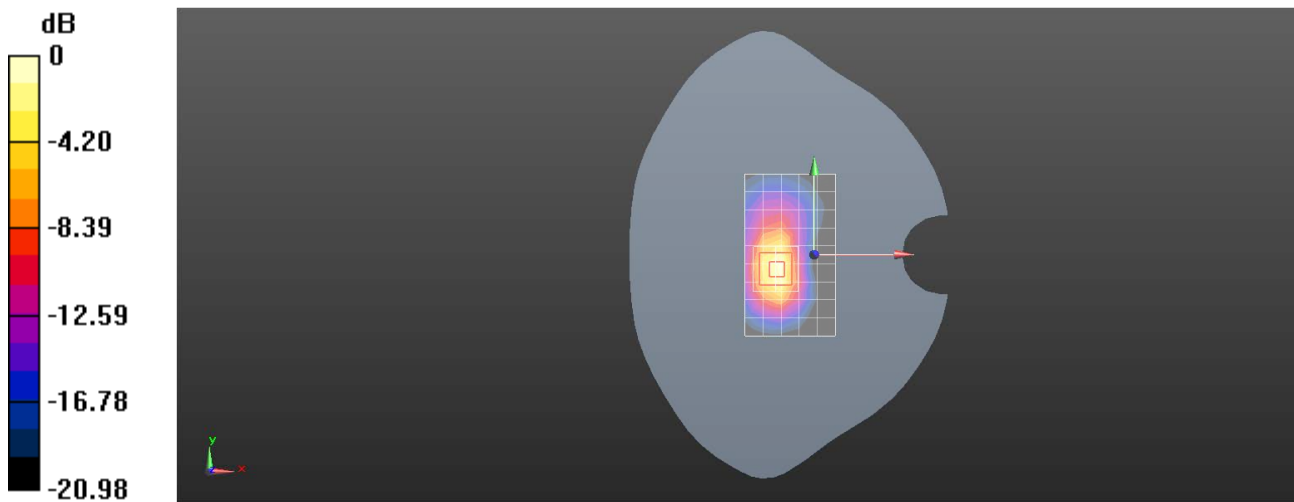

0 dB = 1.39 W/kg = 1.43 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N30 10M QPSK 12RB6 462000CH Back side 0mm Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.701$ S/m; $\epsilon_r = 39.601$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.46, 8.46, 8.46); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 7.76 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.004 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 13.1 W/kg

SAR(1 g) = 5.42 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 10.2 W/kg

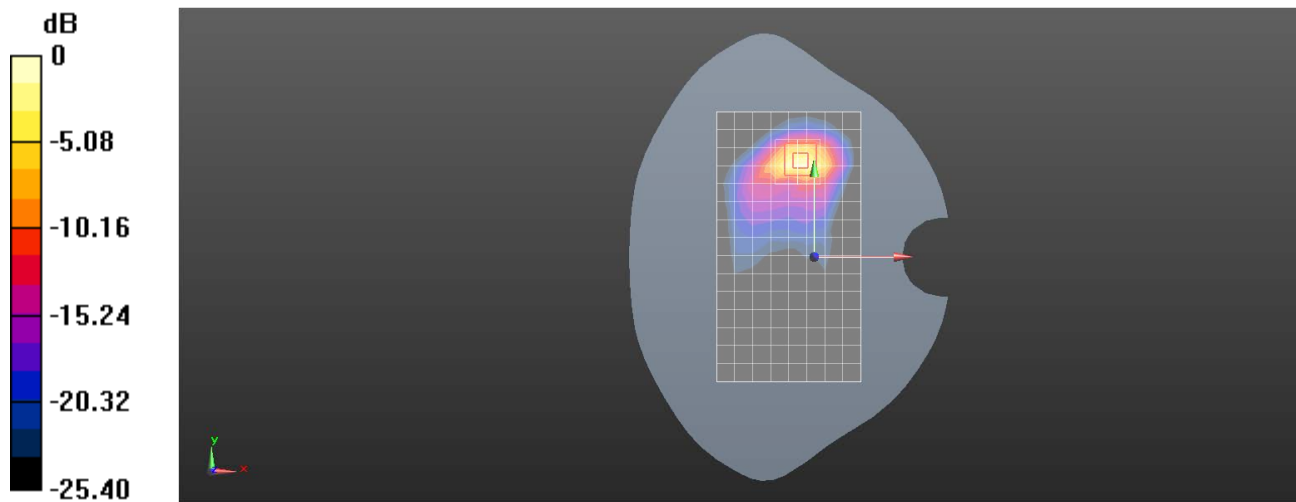

0 dB = 10.2 W/kg = 10.09 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N41 100M QPSK 135RB69 513900CH Right tilted Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, NR (0); Frequency: 2569.5 MHz;Duty Cycle: 1:1.039

Medium: HSL2600;Medium parameters used: $f = 2569.5$ MHz; $\sigma = 1.996$ S/m; $\epsilon_r = 38.326$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8, 8, 8); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.01 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.773 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.749 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

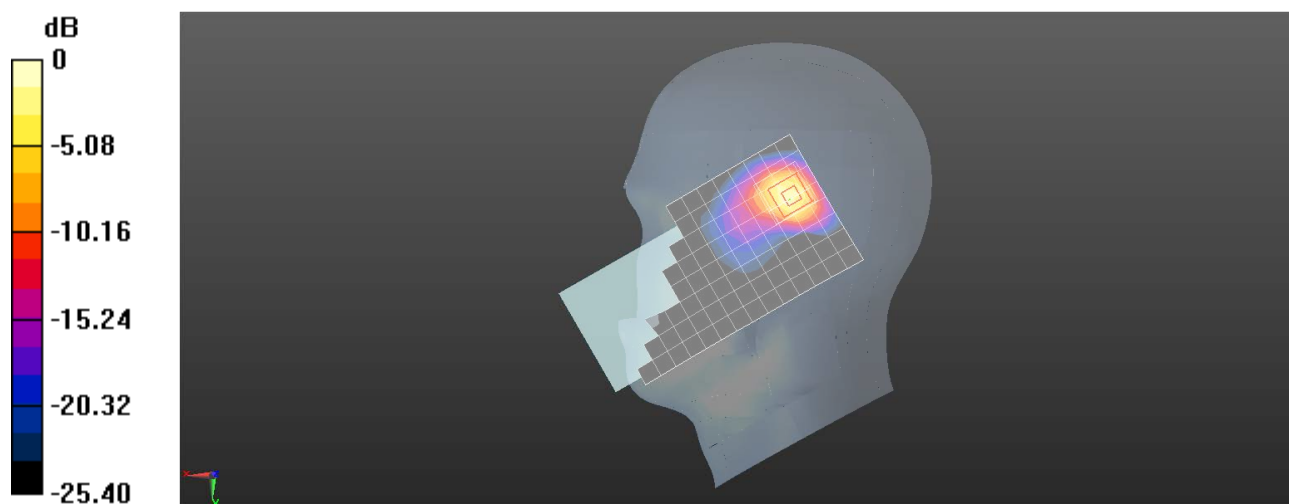

0 dB = 1.43 W/kg = 1.55 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N41 100M QPSK 135RB69 509202CH Back side 15mm Ant3**DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164**

Communication System: UID 0, NR (0); Frequency: 2546.01 MHz; Duty Cycle: 1:1.039

Medium: HSL2600; Medium parameters used: $f = 2546.01$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.389$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8, 8, 8); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.785 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.562 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.562 W/kg; SAR(10 g) = 0.271 W/kg

Maximum value of SAR (measured) = 0.897 W/kg

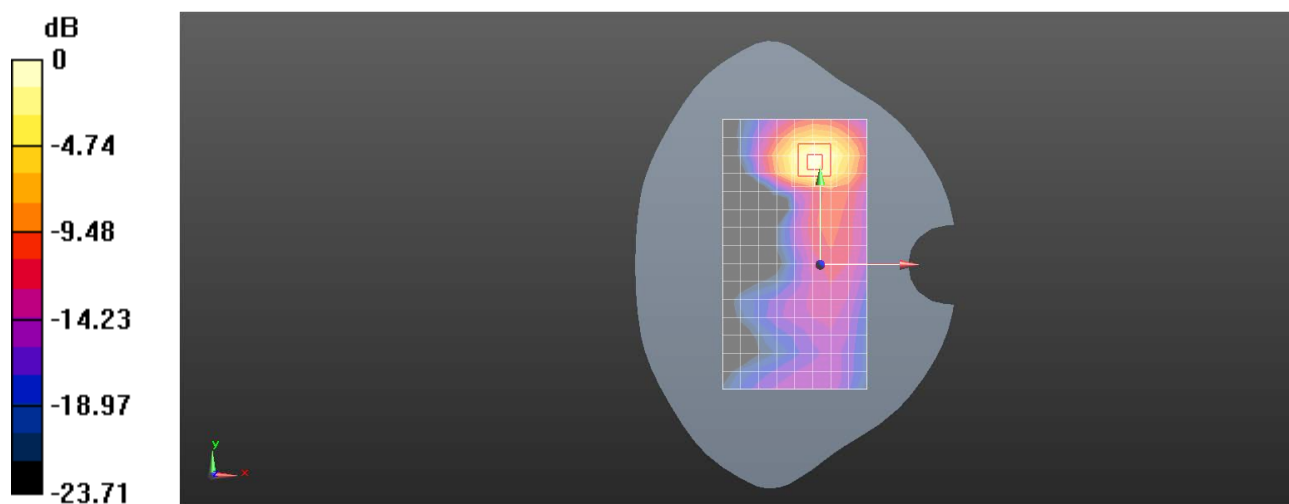

0 dB = 0.897 W/kg = -0.47 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N41 100M QPSK 135RB69 518598CH Bottom side 10mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1.039

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 2.024$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8, 8, 8); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.55 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.13 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.421 W/kg

Maximum value of SAR (measured) = 1.67 W/kg

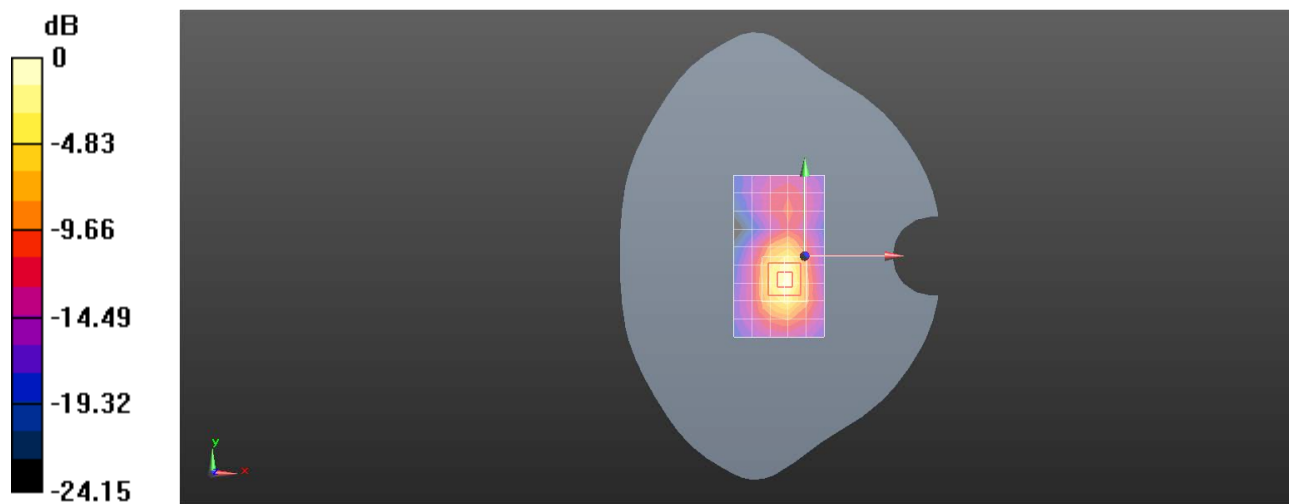

0 dB = 1.67 W/kg = 2.23 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N41 100M QPSK 135RB69 509202CH Back side 0mm Ant3**DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858**

Communication System: UID 0, NR (0); Frequency: 2546.01 MHz; Duty Cycle: 1:1.039

Medium: HSL2600; Medium parameters used: $f = 2546.01$ MHz; $\sigma = 1.963$ S/m; $\epsilon_r = 38.389$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8, 8, 8); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 11.9 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.290 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 6.19 W/kg; SAR(10 g) = 2.3 W/kg

Maximum value of SAR (measured) = 11.3 W/kg

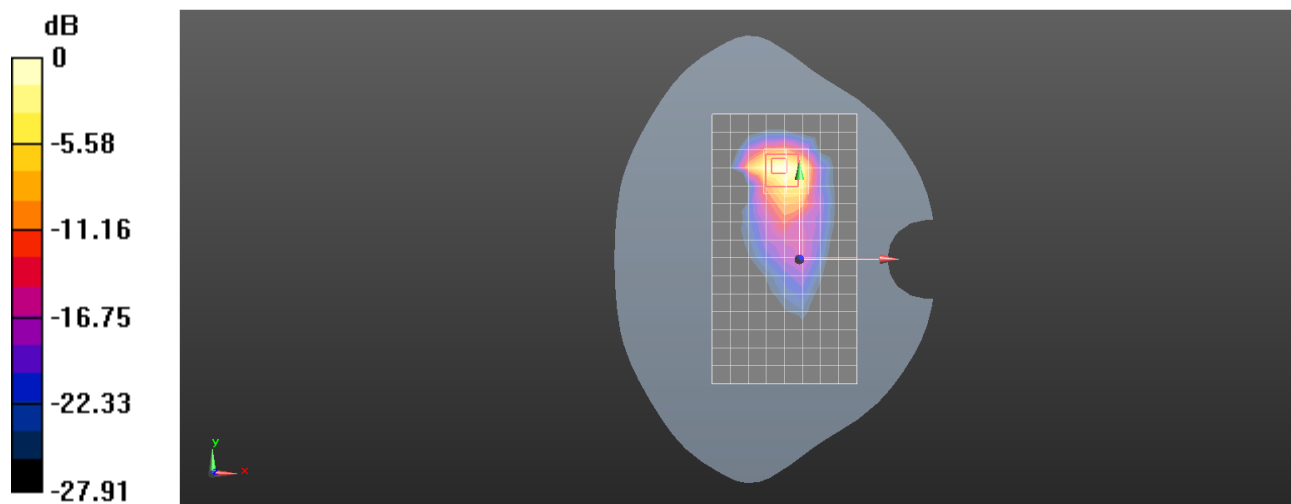

0 dB = 11.3 W/kg = 10.53 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N48 40M QPSK 50RB28 641666CH Right cheek Ant5

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz;Duty Cycle: 1:1.039

Medium: HSL3700;Medium parameters used: $f = 3625$ MHz; $\sigma = 2.965$ S/m; $\epsilon_r = 37.332$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7, 7, 7); Calibrated: 2023/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2023/3/27
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.17 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.888 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.315 W/kg

Maximum value of SAR (measured) = 1.47 W/kg

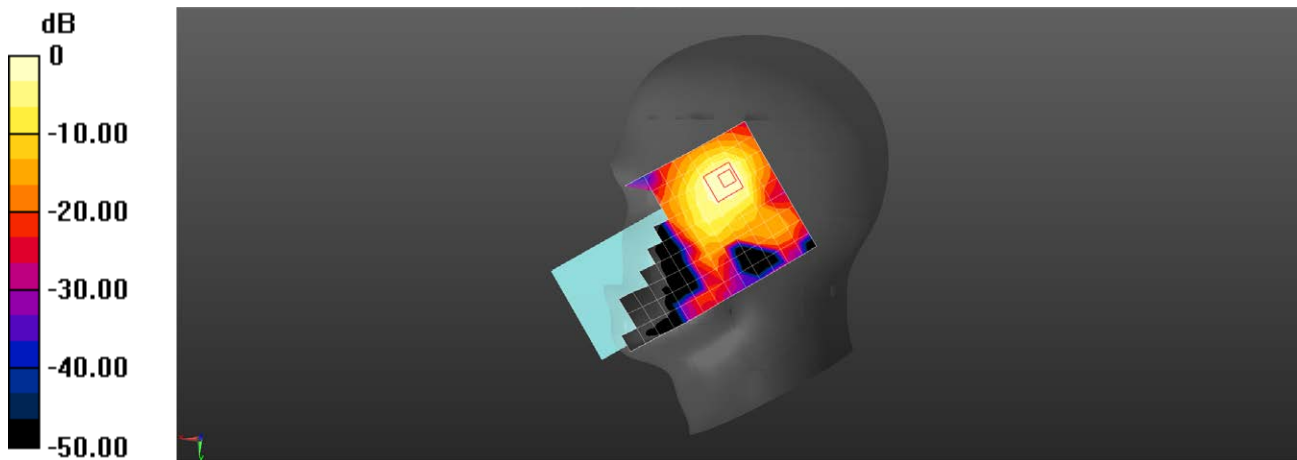

0 dB = 1.17 W/kg = 0.68 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N48 40M QPSK 50RB28 641666CH Back side 15mm Ant5

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1.039

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 2.965$ S/m; $\epsilon_r = 37.332$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7, 7, 7); Calibrated: 2023/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2023/3/27
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.480 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.117 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.690 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.496 W/kg

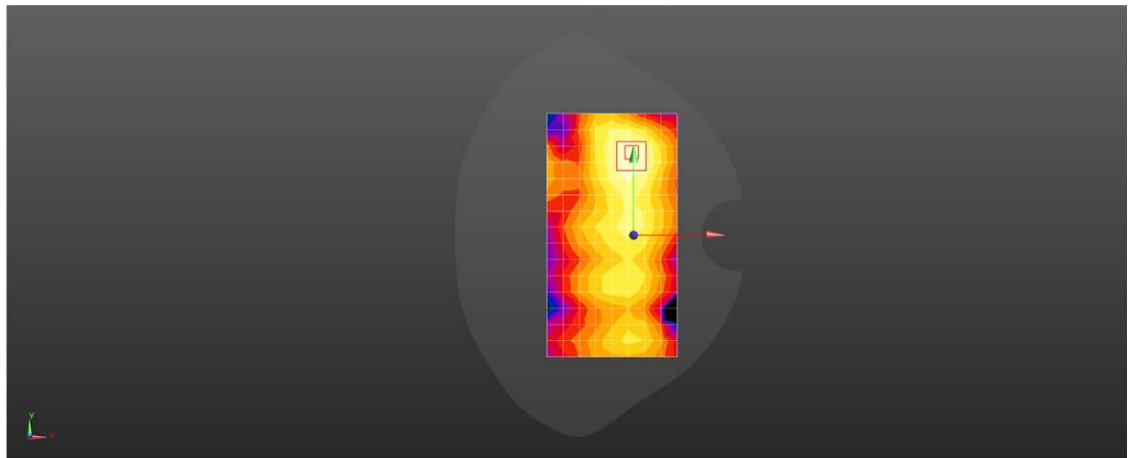

0 dB = 0.496 W/kg = -3.05 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N48 40M QPSK 50RB28 643332CH Left side 10mm Ant5

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 3649.98 MHz;Duty Cycle: 1:1.039

Medium: HSL3700;Medium parameters used: $f = 3650$ MHz; $\sigma = 2.988$ S/m; $\epsilon_r = 37.242$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7, 7, 7); Calibrated: 2023/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2023/3/27
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (5x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.51 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.87 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.824 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 1.55 W/kg

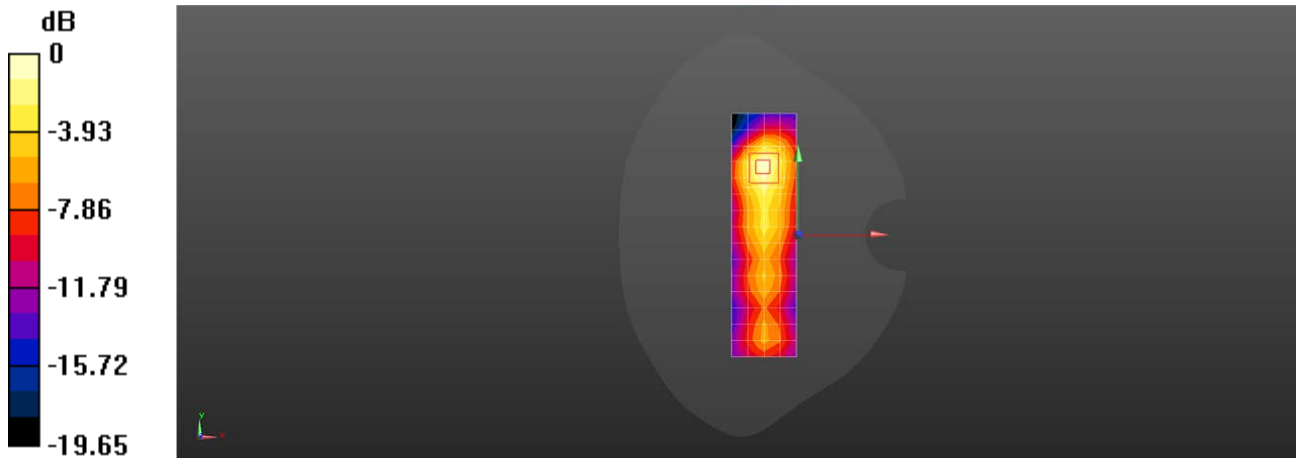

0 dB = 1.51 W/kg = 1.79 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N66 40M QPSK 1RB104 352000CH Right tilted Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, NR (0); Frequency: 1760 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1760$ MHz; $\sigma = 1.349$ S/m; $\epsilon_r = 40.666$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.36 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.58 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.430 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

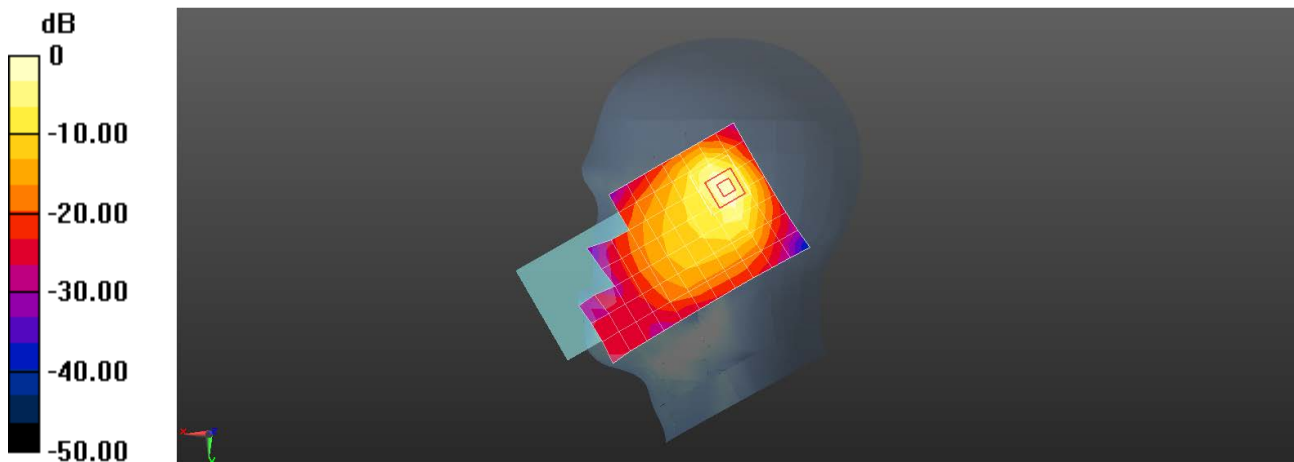

0 dB = 1.36 W/kg = 1.34 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N66 40M QPSK 1RB1 346000CH Back side 15mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, NR (0); Frequency: 1730 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1730$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 40.757$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.406 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.215 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.409 W/kg

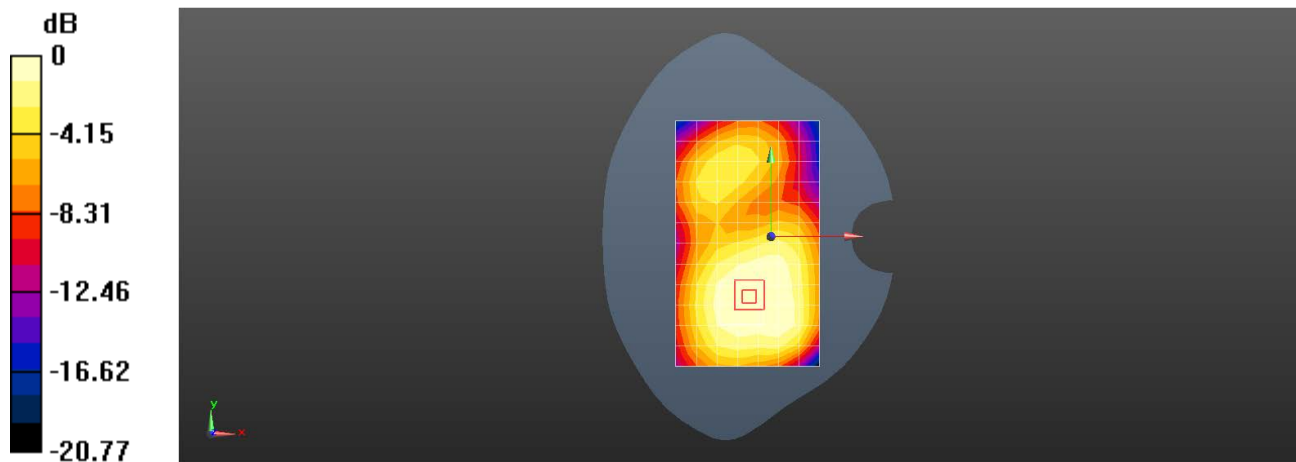

0 dB = 0.406 W/kg = -3.91 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N66 40M QPSK 50RB28 346000CH Back side 10mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 1730 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1730$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 40.757$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.821 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.89 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.359 W/kg

Maximum value of SAR (measured) = 0.854 W/kg

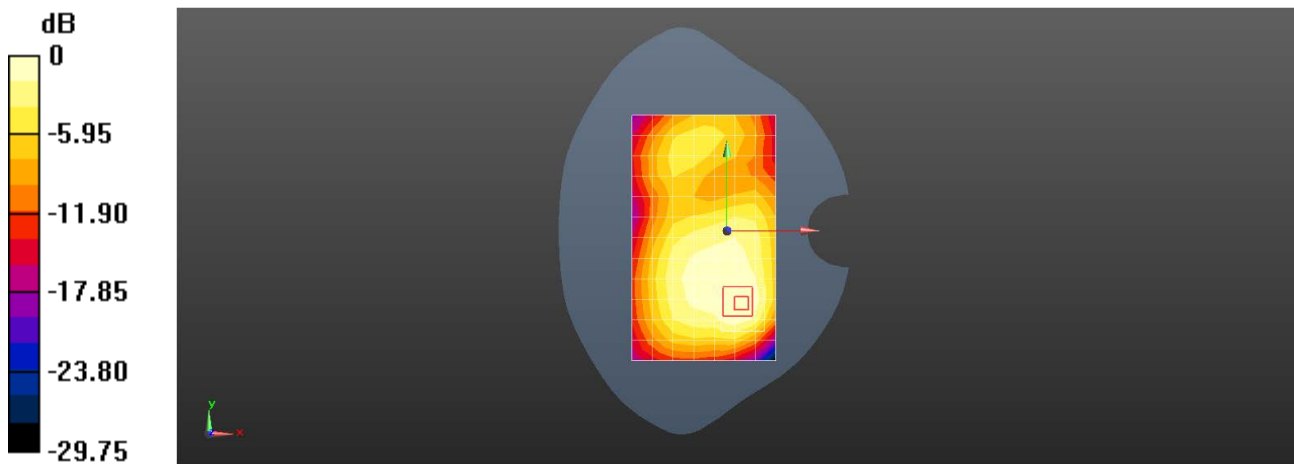

0 dB = 0.821 W/kg = -0.86 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N70 15M QPSK 18RB10 340500CH Right tilted Ant3

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 1702.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1702.5$ MHz; $\sigma = 1.266$ S/m; $\epsilon_r = 40.499$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.43 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.91 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 0.996 W/kg; SAR(10 g) = 0.478 W/kg

Maximum value of SAR (measured) = 1.56 W/kg

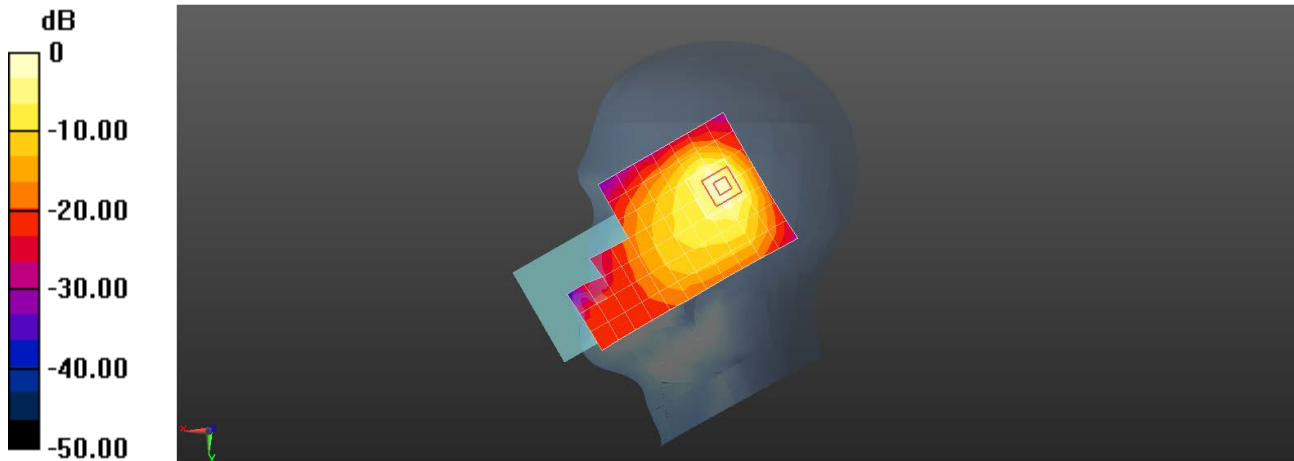

0 dB = 1.43 W/kg = 1.57 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N70 15M QPSK 1RB19 340500CH Back side 15mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, NR (0); Frequency: 1702.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1702.5$ MHz; $\sigma = 1.266$ S/m; $\epsilon_r = 40.499$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.423 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.59 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.419 W/kg

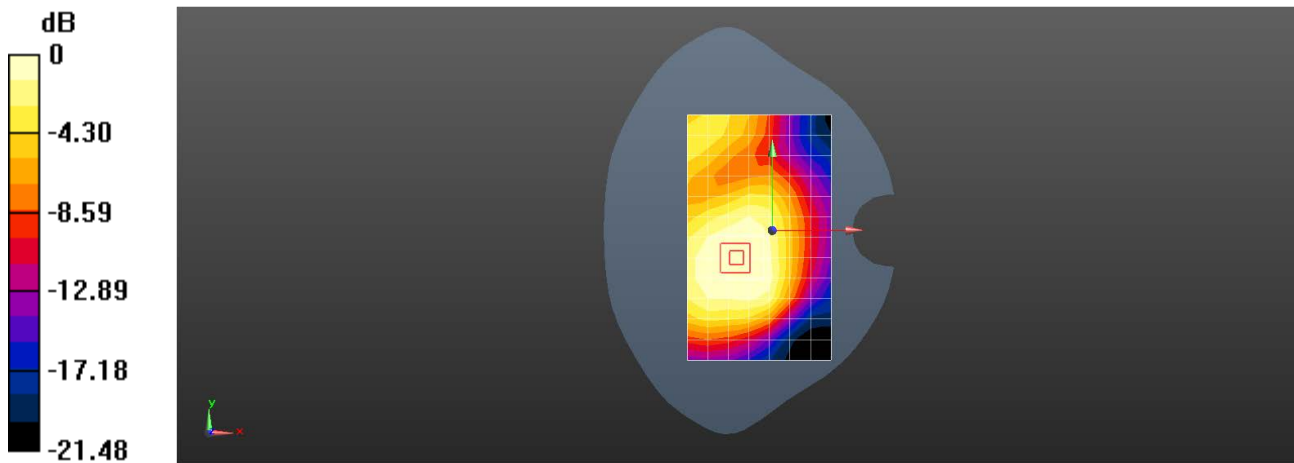

0 dB = 0.423 W/kg = -3.74 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N70 15M QPSK 1RB19 340500CH Back side 10mm Ant2

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, NR (0); Frequency: 1702.5 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used (interpolated): $f = 1702.5$ MHz; $\sigma = 1.266$ S/m; $\epsilon_r = 40.499$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.729 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.30 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.874 W/kg

SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 0.716 W/kg

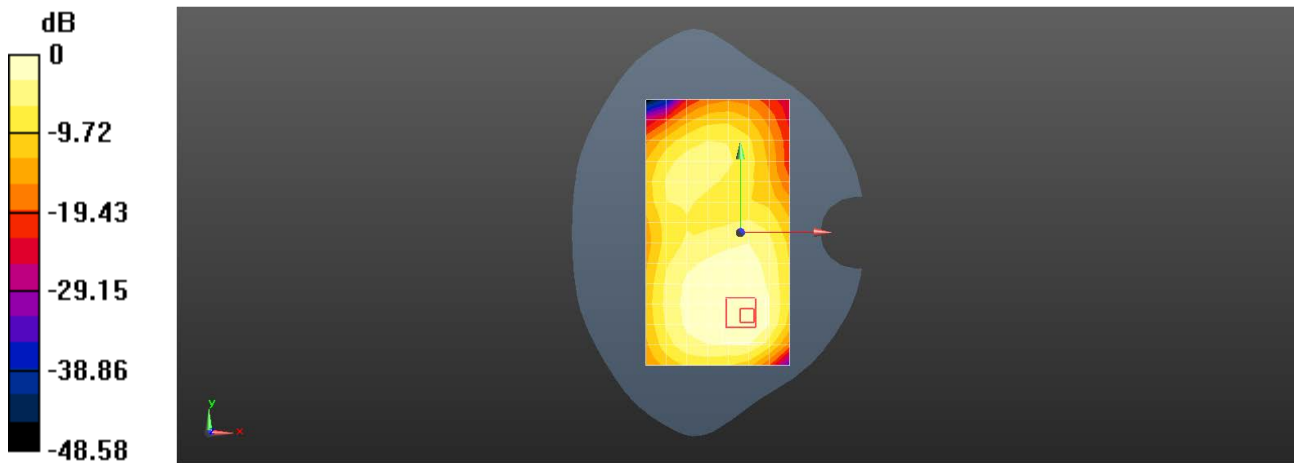

0 dB = 0.729 W/kg = -1.37 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N71 20M QPSK 25RB13 134600CH Right cheek Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, NR (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 673$ MHz; $\sigma = 0.844$ S/m; $\epsilon_r = 43.084$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.301 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.578 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.353 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.316 W/kg

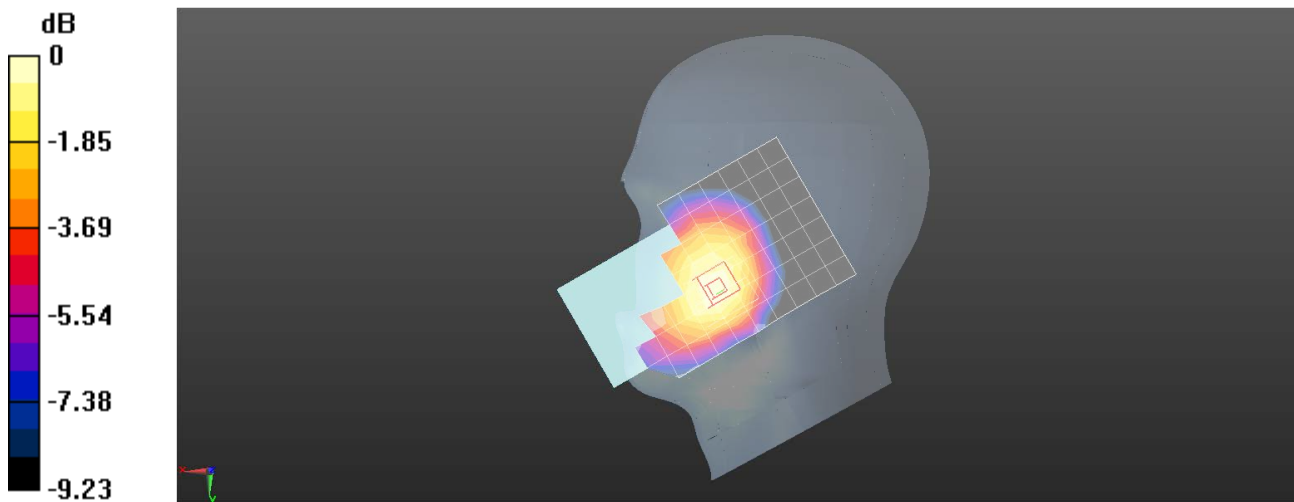

0 dB = 0.316 W/kg = -5.00 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N71 20M QPSK 25RB13 134600CH Back side 15mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 673 \text{ MHz}$; $\sigma = 0.844 \text{ S/m}$; $\epsilon_r = 43.084$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.395 W/kg



Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.80 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.449 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.253 W/kg

Maximum value of SAR (measured) = 0.402 W/kg

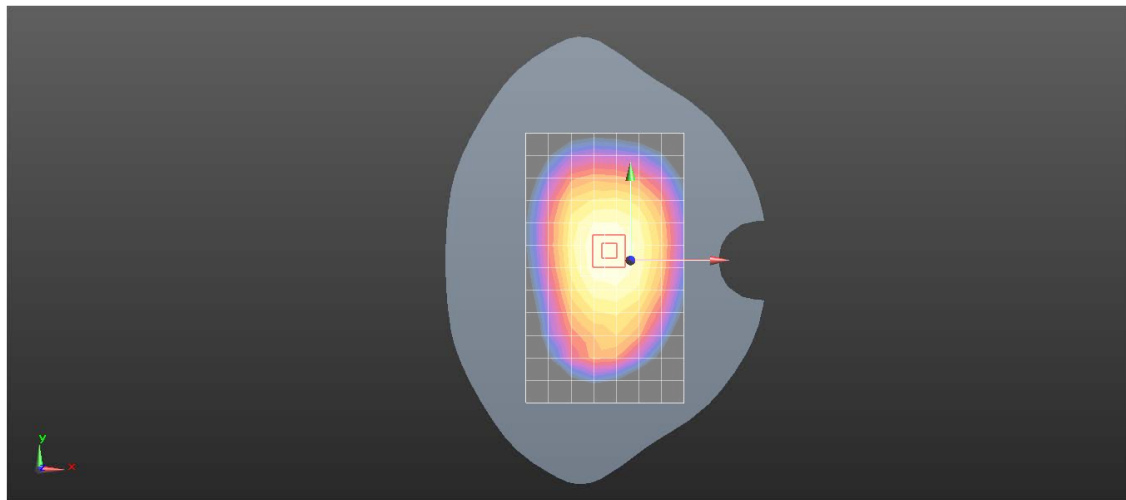

0 dB = 0.402 W/kg = -3.96 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N71 20M QPSK 25RB13 134600CH Right side 10mm Ant1

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 673$ MHz; $\sigma = 0.844$ S/m; $\epsilon_r = 43.084$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(11.13, 11.13, 11.13); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.626 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.85 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.731 W/kg

SAR(1 g) = 0.470 W/kg; SAR(10 g) = 0.327 W/kg

Maximum value of SAR (measured) = 0.630 W/kg

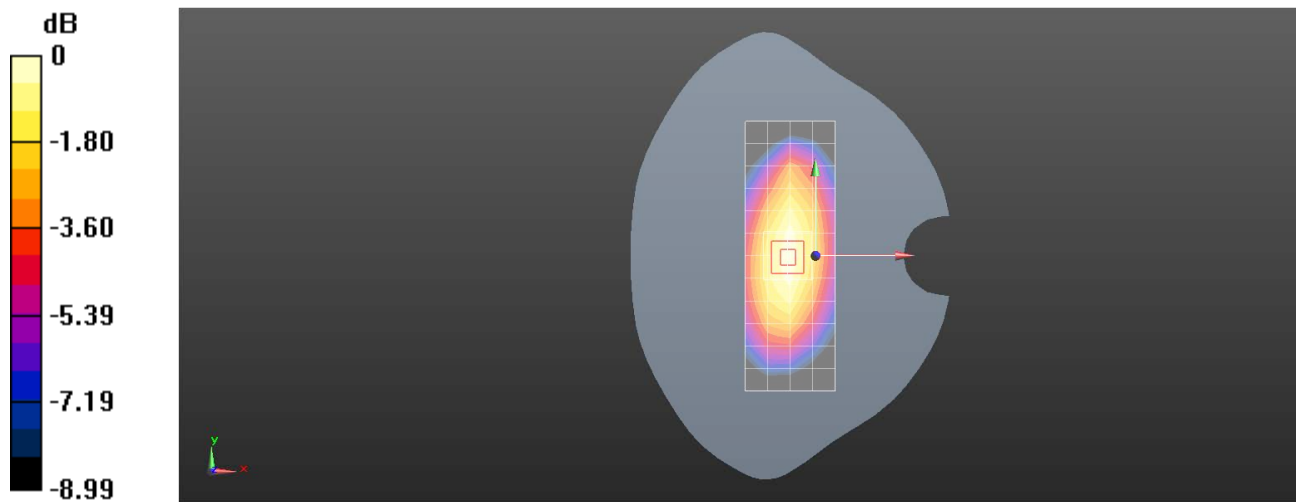

0 dB = 0.630 W/kg = -2.01 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N77 100M QPSK 1RB137 650000CH Right cheek Ant5

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 3750 MHz; Duty Cycle: 1:1.039

Medium: HSL3700; Medium parameters used: $f = 3750$ MHz; $\sigma = 3.089$ S/m; $\epsilon_r = 36.755$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7, 7, 7); Calibrated: 2023/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2023/3/27
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Head/Area Scan (10x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.50 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.655 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.56 W/kg

SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.355 W/kg

Maximum value of SAR (measured) = 1.77 W/kg

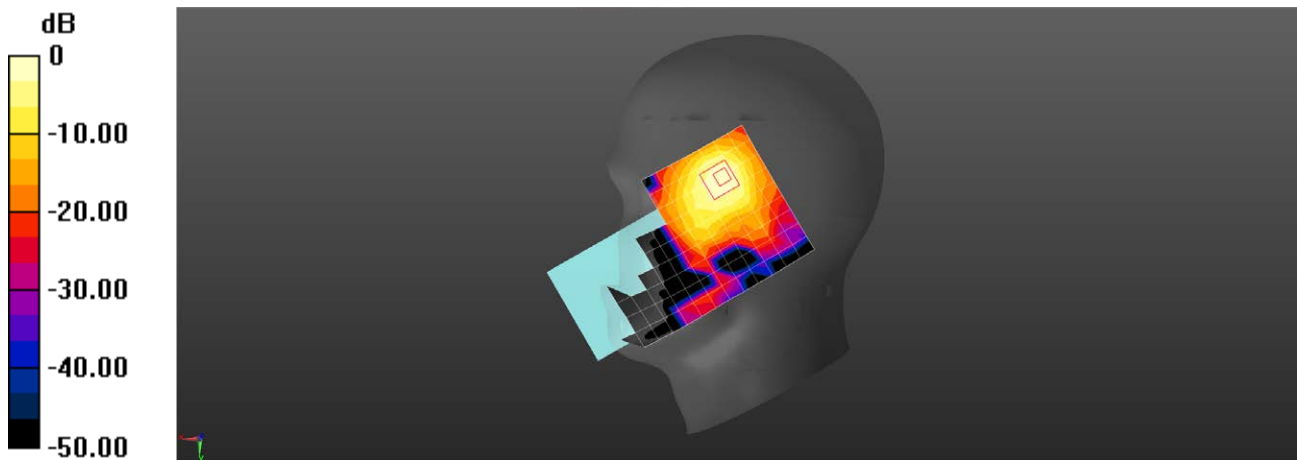

0 dB = 1.50 W/kg = 1.76 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N77 100M QPSK 135RB69 633334CH Back side 15mm Ant5

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1.039

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.864$ S/m; $\epsilon_r = 37.875$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.2, 7.2, 7.2); Calibrated: 2023/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2023/3/27
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.598 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.628 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.873 W/kg

SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.646 W/kg

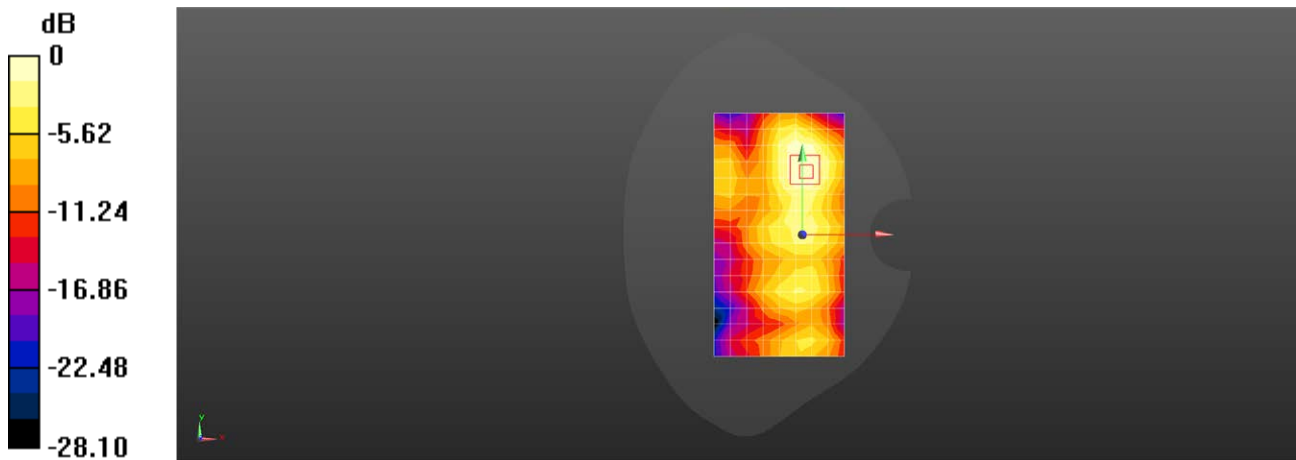

0 dB = 0.598 W/kg = -2.23 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N77 100M QPSK 135RB69 633334CH Left side 10mm Ant5

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1.039

Medium: HSL3500;Medium parameters used: $f = 3500$ MHz; $\sigma = 2.864$ S/m; $\epsilon_r = 37.875$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.2, 7.2, 7.2); Calibrated: 2023/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2023/3/27
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (5x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.63 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.61 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.878 W/kg; SAR(10 g) = 0.377 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

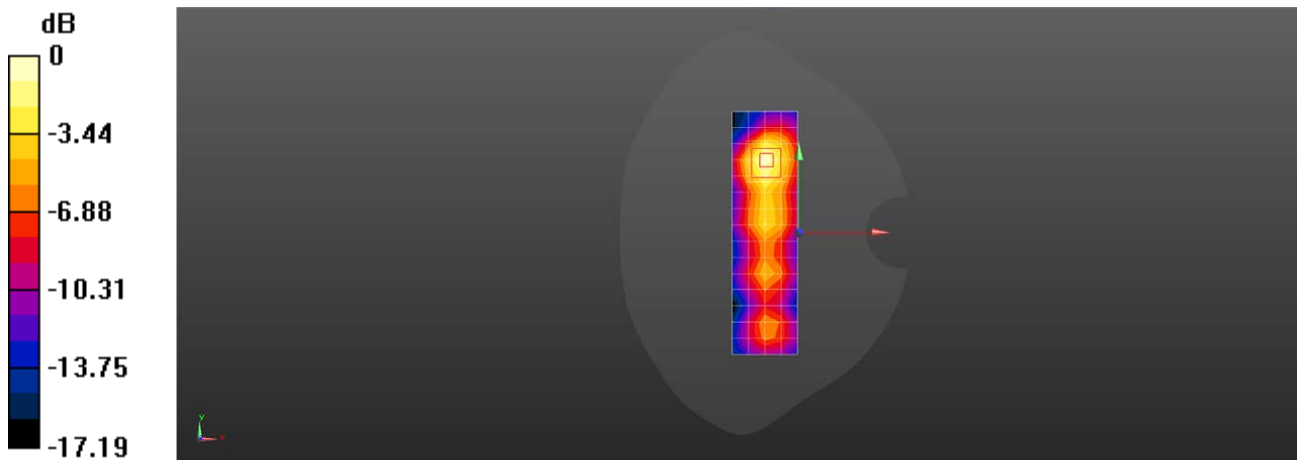

0 dB = 1.63 W/kg = 2.11 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G 5G NR N77 100M QPSK 1RB271 633334CH Left side 0mm Ant5

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1.039

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.864$ S/m; $\epsilon_r = 37.875$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7636; ConvF(7.2, 7.2, 7.2); Calibrated: 2023/6/5
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1663; Calibrated: 2023/3/27
- Phantom: SAM 3; Type: SAM Twin; Serial: 2031
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Configuration/Body/Area Scan (5x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 14.4 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.53 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 24.7 W/kg

SAR(1 g) = 7.46 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 16.4 W/kg

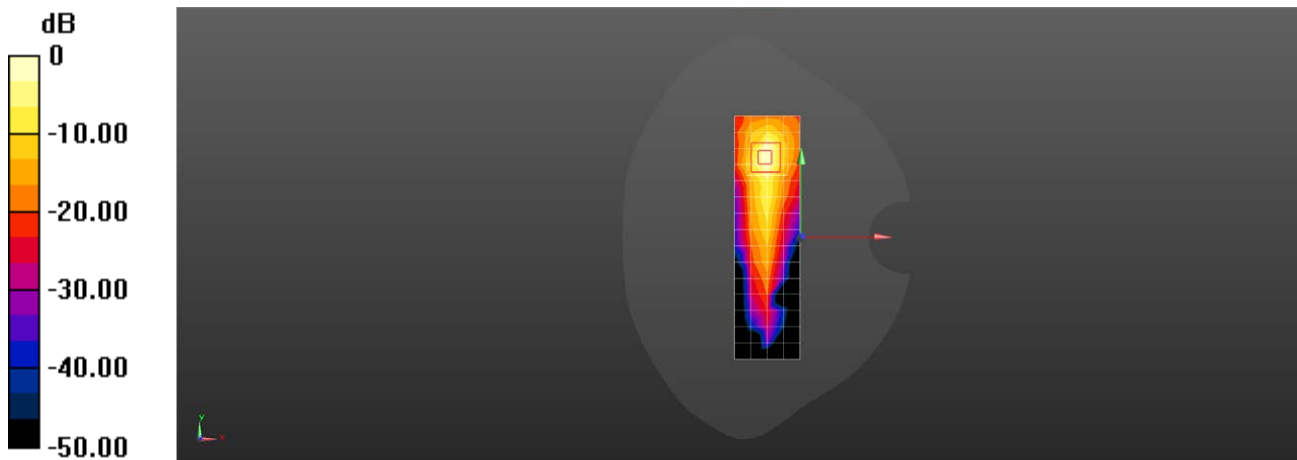

0 dB = 14.4 W/kg = 11.59 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WIFI 2.4G 802.11n HT20 6CH Left cheek MIMO

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.035

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 38.791$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.2, 8.2, 8.2); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.37 W/kg


Configuration/Head/Zoom Scan (7x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.63 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.913 W/kg; SAR(10 g) = 0.477 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

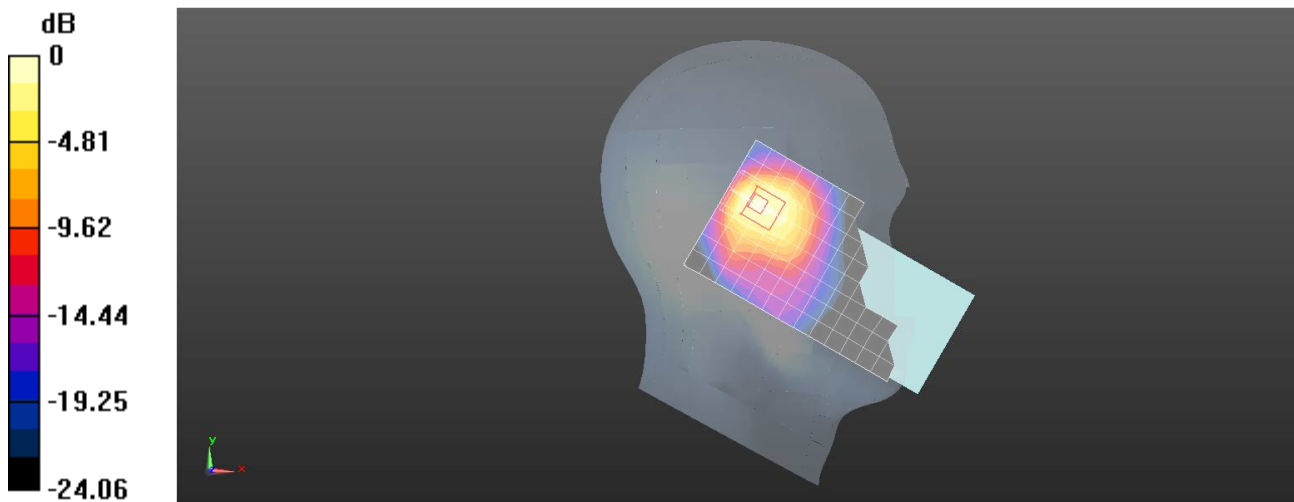

0 dB = 1.43 W/kg = 1.55 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WIFI 2.4G 802.11n HT20 6CH Back side 15mm MIMO

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.035

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 38.791$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.2, 8.2, 8.2); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.300 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.331 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.323 W/kg

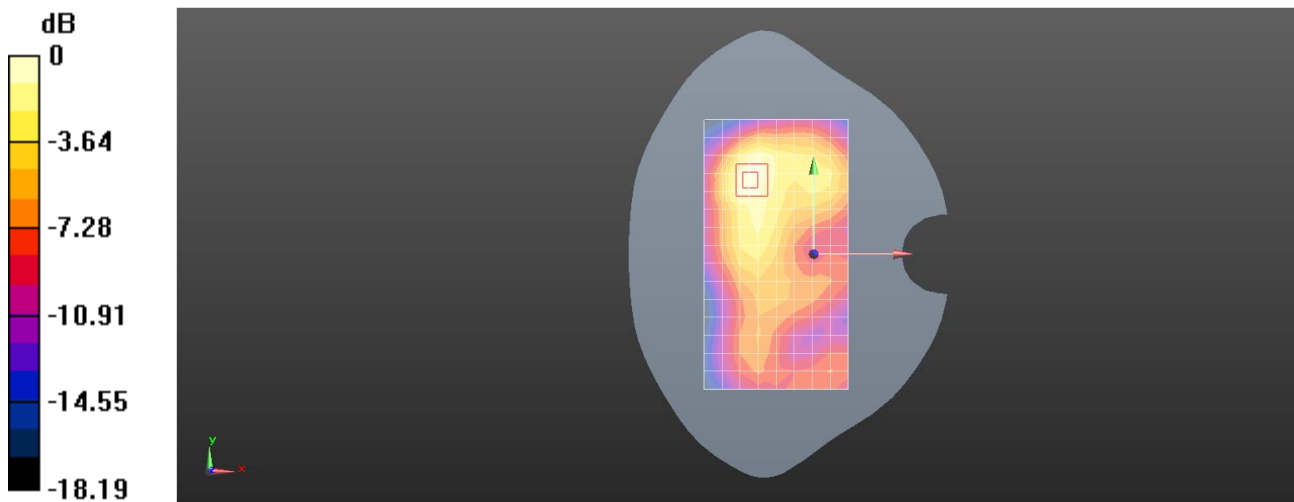

0 dB = 0.323 W/kg = -4.91 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WIFI 2.4G 802.11b 6CH Right side 10mm Ant7

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1.005

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.839$ S/m; $\epsilon_r = 38.791$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.2, 8.2, 8.2); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.625 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.470 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.202 W/kg

Maximum value of SAR (measured) = 0.623 W/kg

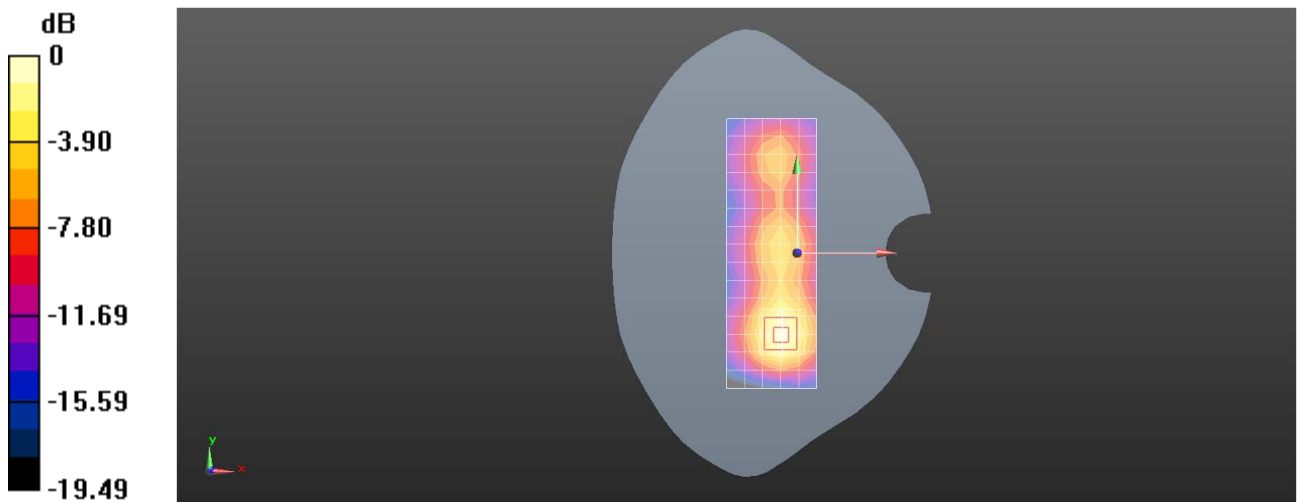

0 dB = 0.623 W/kg = -2.06 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WIFI 5G 802.11n-HT20 64CH Left tilted MIMO

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5320 MHz;Duty Cycle: 1:1.035

Medium: HSL5G;Medium parameters used: $f = 5320$ MHz; $\sigma = 4.706$ S/m; $\epsilon_r = 35.306$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(5.65, 5.65, 5.65); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.12 W/kg


Configuration/Body/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.098 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.97 W/kg

SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.298 W/kg

Maximum value of SAR (measured) = 2.37 W/kg

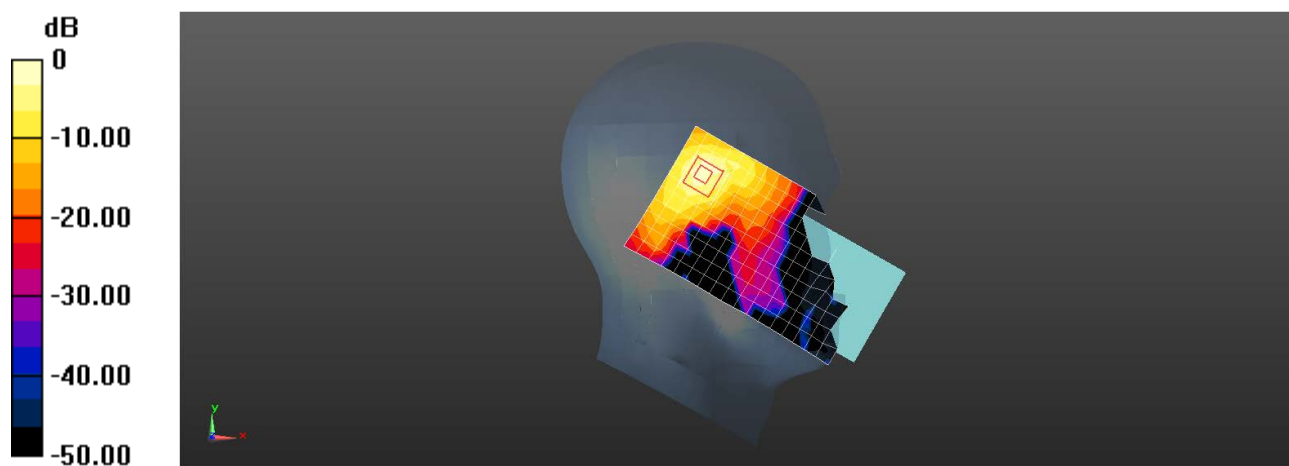

0 dB = 2.12 W/kg = 3.27 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WIFI 5G 802.11a 157CH Back side 15mm Ant9

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060014858

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5785 MHz;Duty Cycle: 1:1.032

Medium: HSL5G;Medium parameters used: $f = 5785$ MHz; $\sigma = 5.328$ S/m; $\epsilon_r = 34.375$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(5.03, 5.03, 5.03); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.15 W/kg


Configuration/Body/Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.850 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.84 W/kg

SAR(1 g) = 0.968 W/kg; SAR(10 g) = 0.360 W/kg

Maximum value of SAR (measured) = 2.22 W/kg

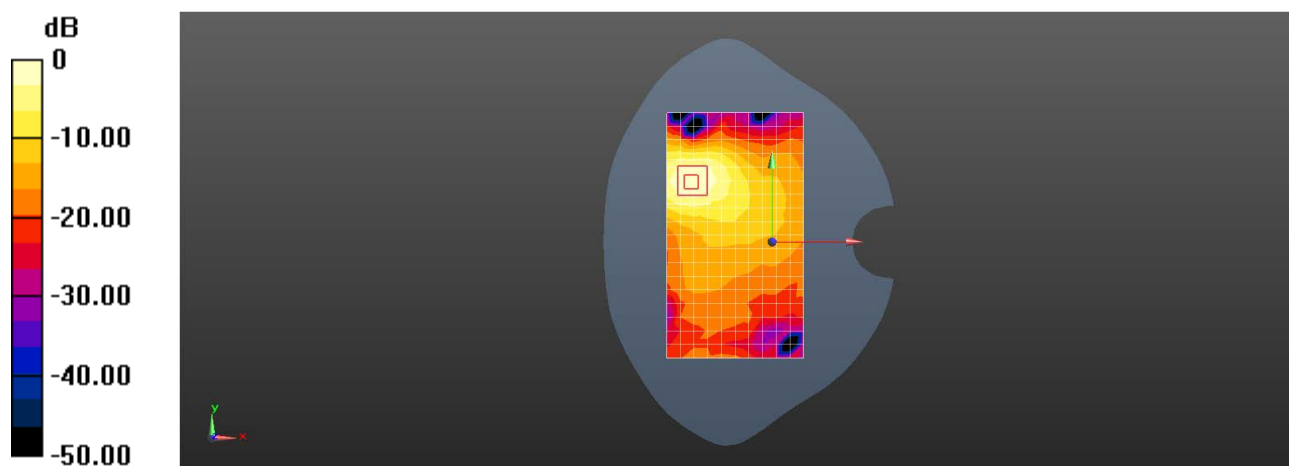

0 dB = 2.15 W/kg = 3.32 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WIFI 5G 802.11n-HT20 44CH Back side 10mm MIMO

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5220 MHz;Duty Cycle: 1:1.035

Medium: HSL5G;Medium parameters used: $f = 5220$ MHz; $\sigma = 4.569$ S/m; $\epsilon_r = 35.55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(5.65, 5.65, 5.65); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.663 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.4230 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 0.710 W/kg

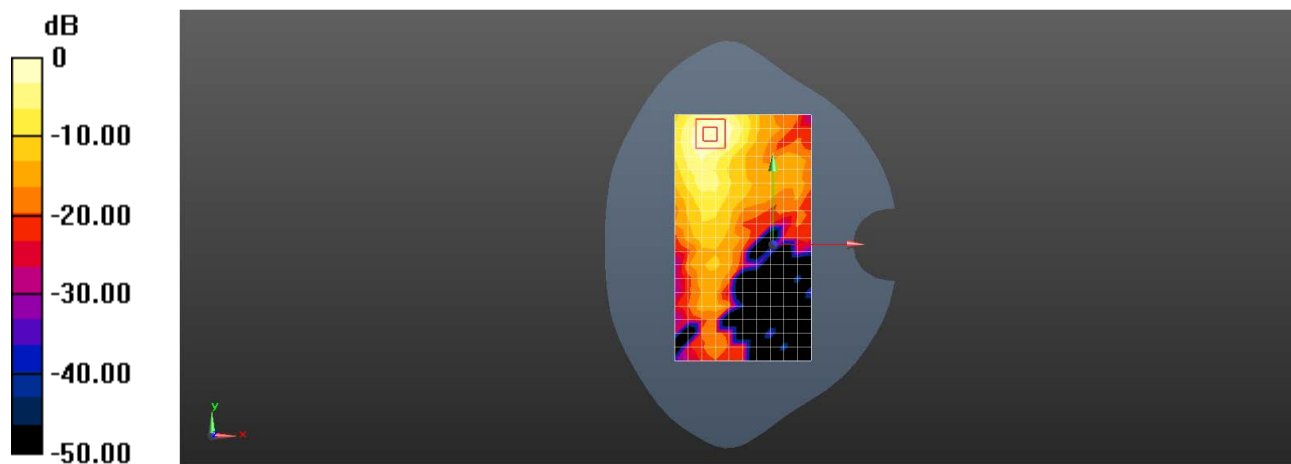

0 dB = 0.663 W/kg = -1.78 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G WIFI 5G 802.11a 100CH Top side 0mm Ant7

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5500 MHz;Duty Cycle: 1:1.032

Medium: HSL5G;Medium parameters used: $f = 5500$ MHz; $\sigma = 4.913$ S/m; $\epsilon_r = 34.923$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3624; ConvF(5.06, 5.06, 5.06); Calibrated: 2023/5/17
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn896; Calibrated: 2023/3/17
- Phantom: SAM 6; Type: SAM Twin; Serial: 1913
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 12.5 W/kg


Configuration/Body/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.079 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 81.0 W/kg

SAR(1 g) = 10.7 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 35.6 W/kg

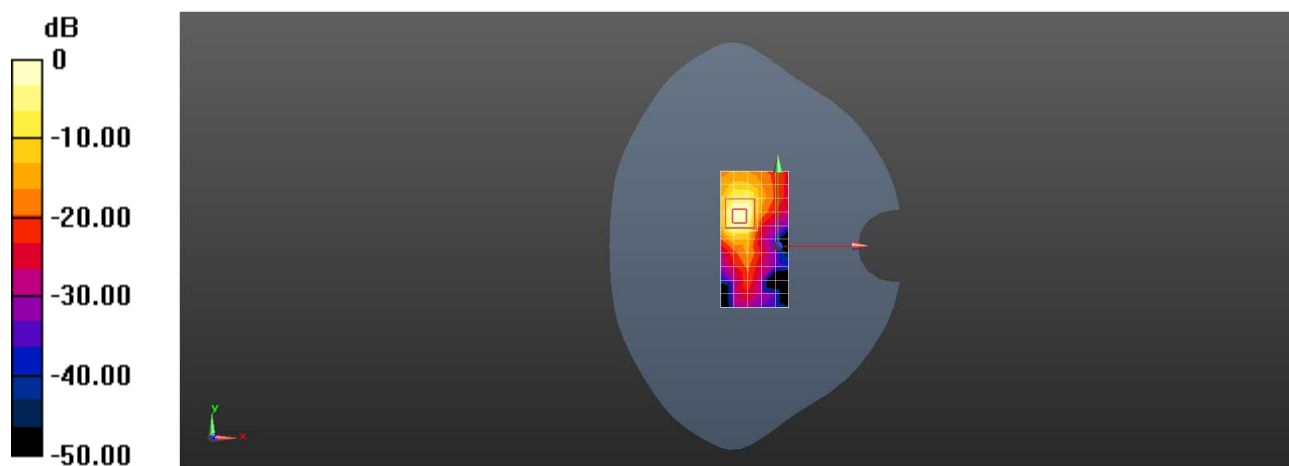

0 dB = 12.5 W/kg = 10.97 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G Bluetooth DH5 39CH Left cheek Ant7

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060017737

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.848$ S/m; $\epsilon_r = 38.764$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.2, 8.2, 8.2); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0965 W/kg


Configuration/Head/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.531 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.111 W/kg

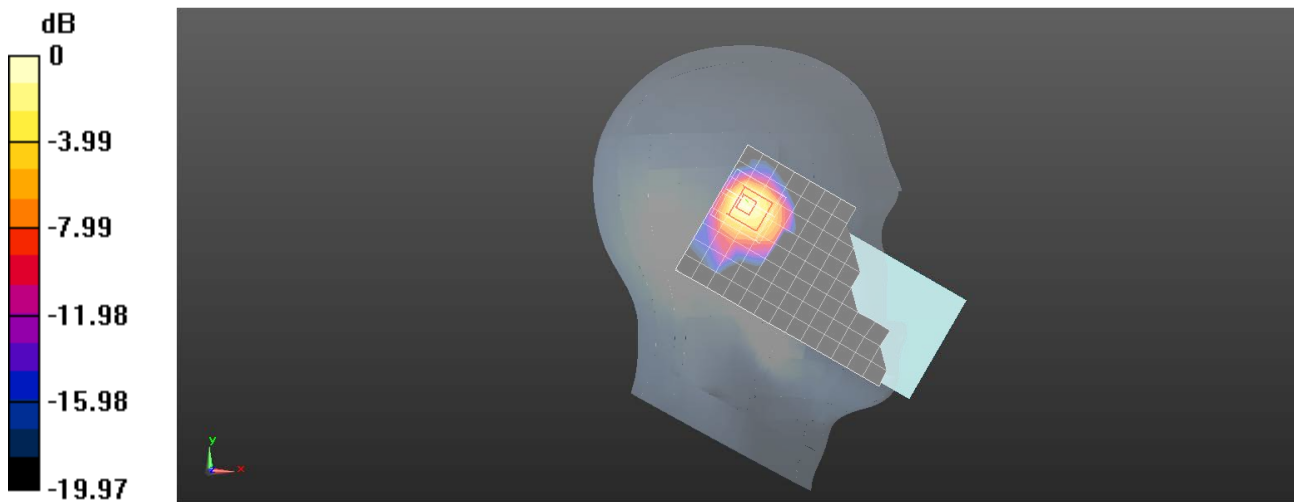

0 dB = 0.111 W/kg = -9.55 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G Bluetooth DH5 39CH Back side 15mm Ant7

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.848$ S/m; $\epsilon_r = 38.764$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.2, 8.2, 8.2); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0176 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00643 W/kg

Maximum value of SAR (measured) = 0.0191 W/kg

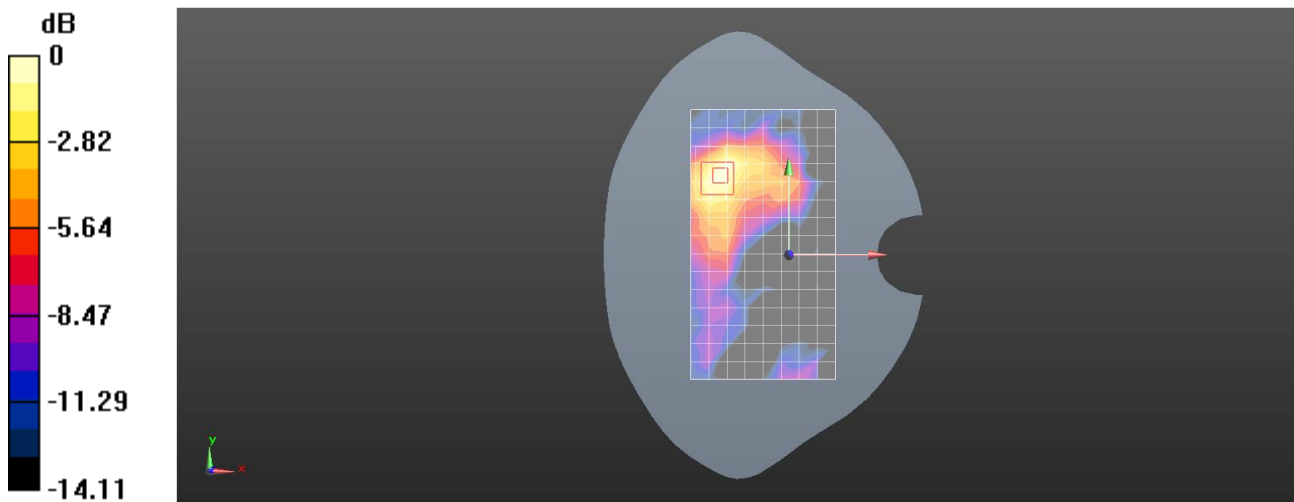

0 dB = 0.0191 W/kg = -17.19 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G Bluetooth DH5 39CH Back side 10mm Ant7

DUT: Celero3 5G; Type: Smart Phone; Serial: 860284060018164

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.3

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.848$ S/m; $\epsilon_r = 38.764$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.2, 8.2, 8.2); Calibrated: 2022/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1267; Calibrated: 2022/12/10
- Phantom: SAM 2; Type: SAM Twin; Serial: 1640
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x16x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0212 W/kg



Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0340 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00751 W/kg

Maximum value of SAR (measured) = 0.0240 W/kg

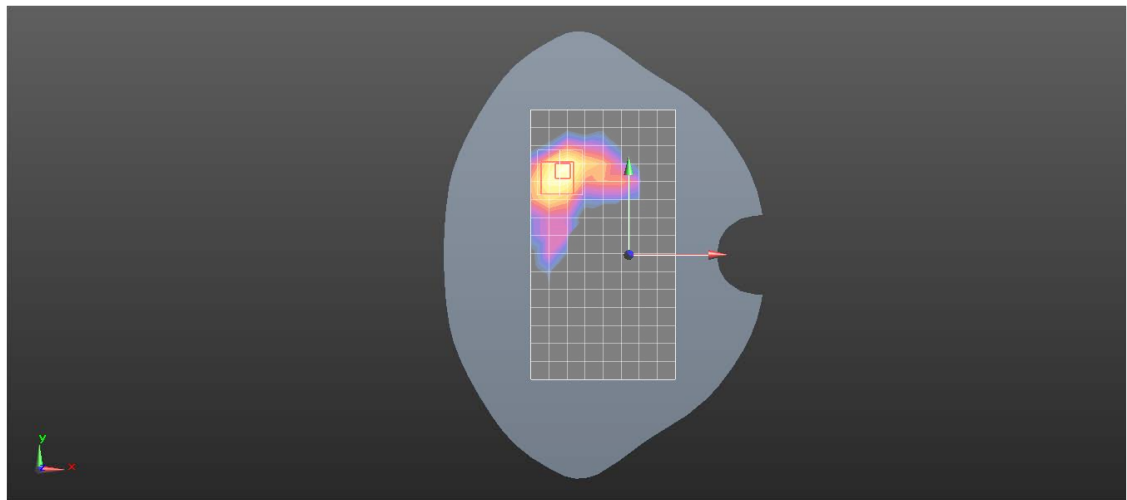

0 dB = 0.0240 W/kg = -16.20 dBW/kg