

Test Laboratory: SGS-SAR Lab

Celero3 5G+ 5G NR n77 100M QPSK 135RB69 656000CH Left side 0mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004857

Communication System: UID 0, NR (0); Frequency: 3840 MHz;Duty Cycle: 1:1

Medium: HSL3900;Medium parameters used: $f = 3840$ MHz; $\sigma = 3.383$ S/m; $\epsilon_r = 37.166$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(6.19, 6.19, 6.19); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 15.6 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.324 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 23.7 W/kg

SAR(1 g) = 6.72 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 15.5 W/kg

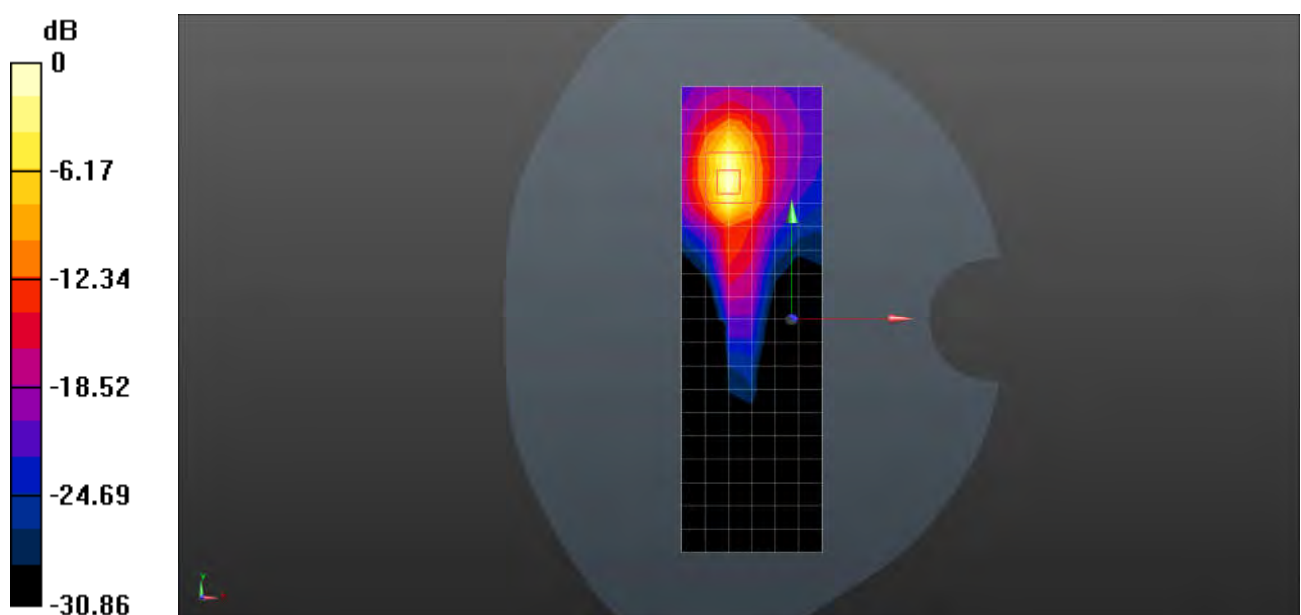

0 dB = 15.5 W/kg = 11.90 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI2.4G 802.11b 11CH Left Cheek

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2462$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 40.115$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.26, 7.26, 7.26); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.56 W/kg


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.80 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.513 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

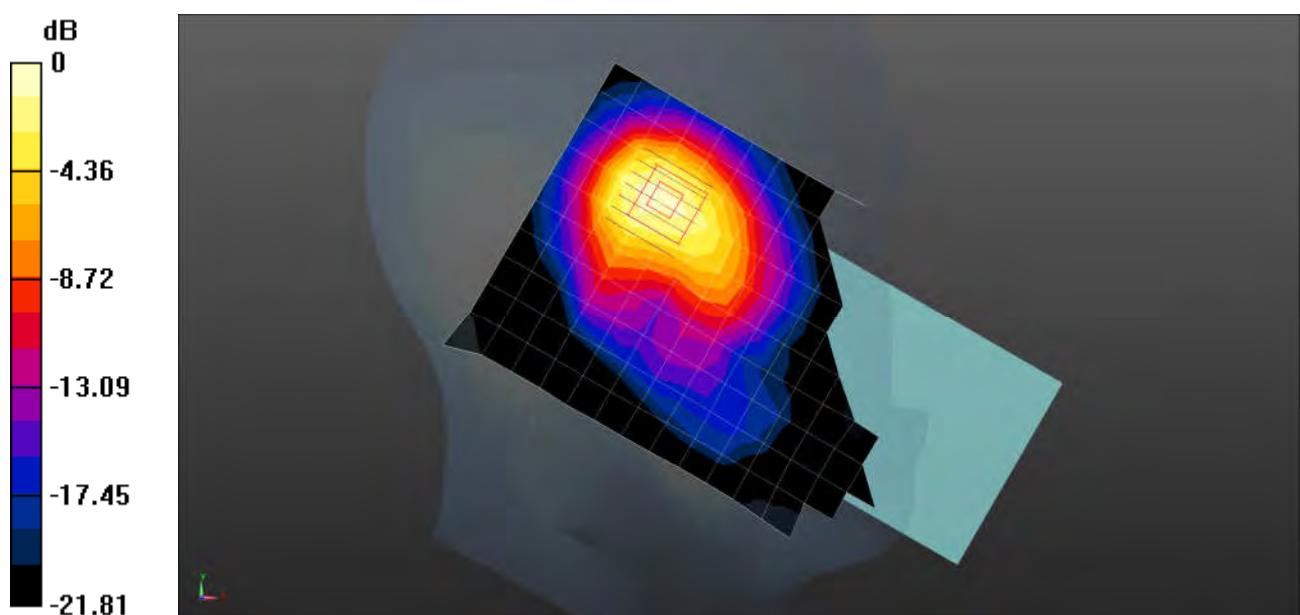

0 dB = 1.61 W/kg = 2.07 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI2.4G 802.11b 6CH Back side 10mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 40.163$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.26, 7.26, 7.26); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.449 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.387 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.386 W/kg

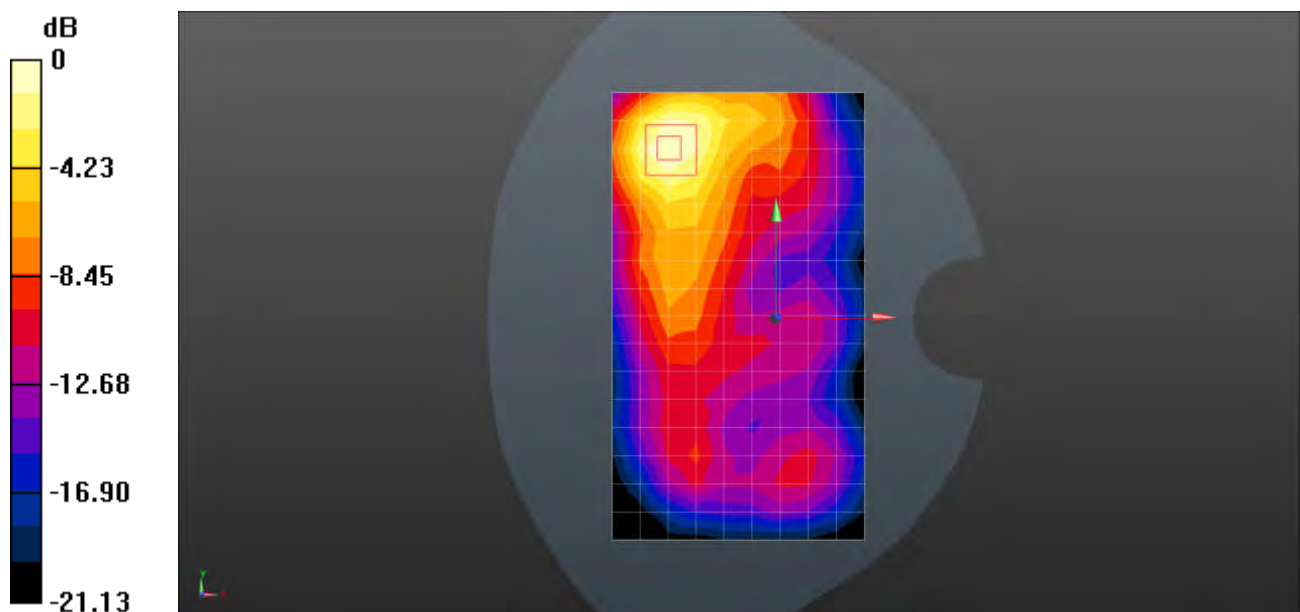

0 dB = 0.386 W/kg = -4.13 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI2.4G 802.11n HT20 6CH Back side 15mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 40.163$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.26, 7.26, 7.26); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.922 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.627 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 0.957 W/kg

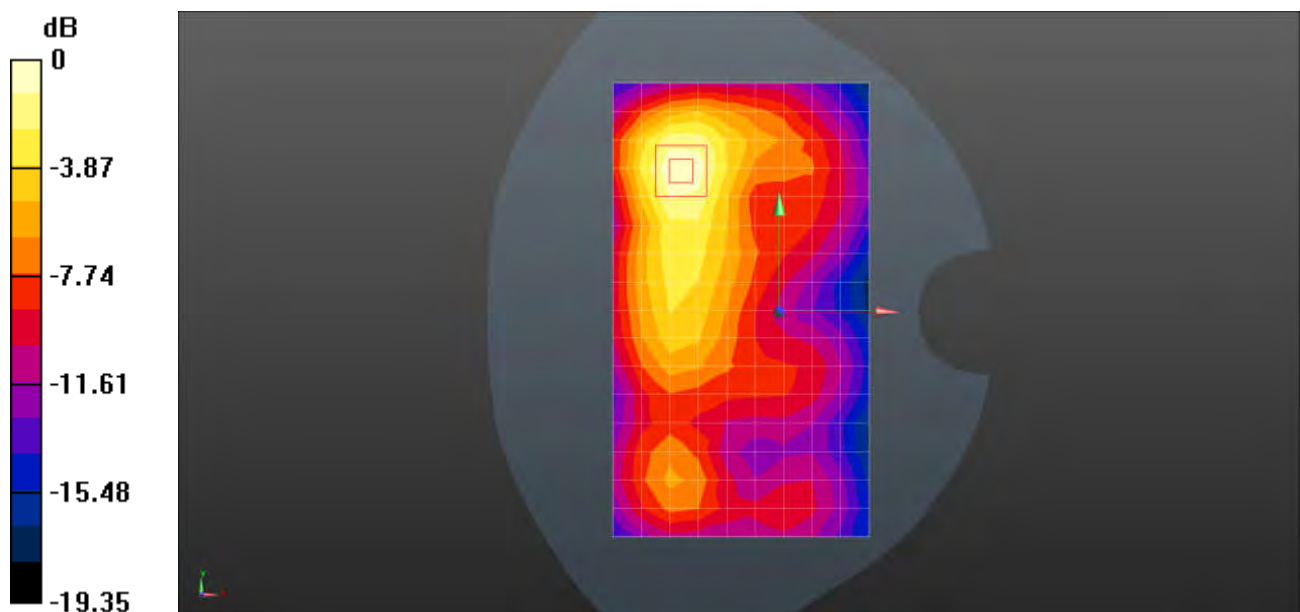

0 dB = 0.957 W/kg = -0.19 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI2.4G 802.11n HT20 6CH Back side 0mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: HSL2450;Medium parameters used: $f = 2437$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 40.163$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.26, 7.26, 7.26); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 5.92 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.38 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 8.40 W/kg

SAR(1 g) = 3.76 W/kg; SAR(10 g) = 1.88 W/kg

Maximum value of SAR (measured) = 6.33 W/kg

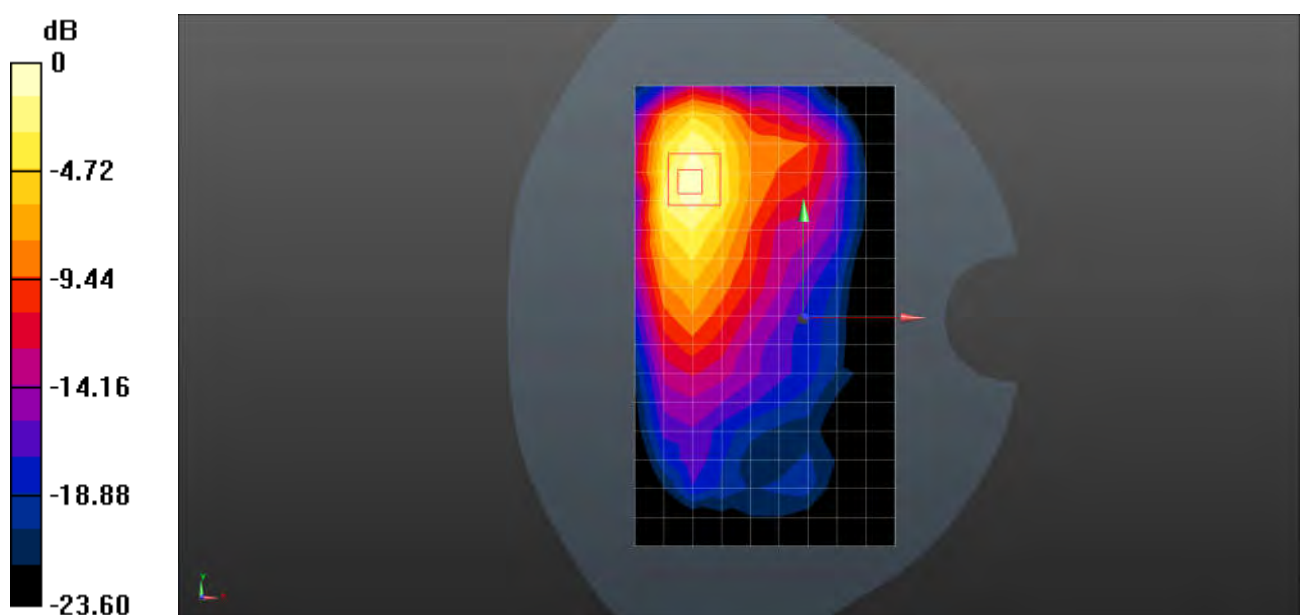

0 dB = 6.33 W/kg = 8.01 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI5G 802.11a 64CH Left tilted

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5320 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5320$ MHz; $\sigma = 4.926$ S/m; $\epsilon_r = 36.153$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(5.2, 5.2, 5.2); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x17x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.49 W/kg


Configuration/Head/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.382 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.276 W/kg

Maximum value of SAR (measured) = 2.23 W/kg

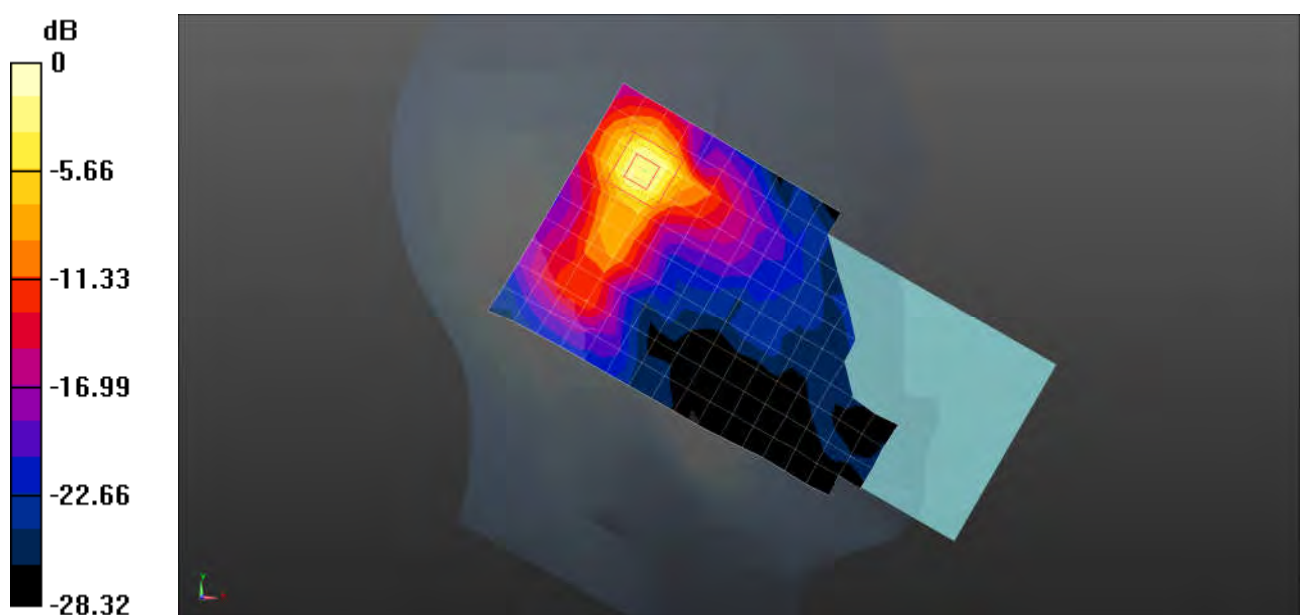

0 dB = 2.23 W/kg = 3.48 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI5G 802.11ac-80M 106CH Left cheek

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5530 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5530$ MHz; $\sigma = 5.163$ S/m; $\epsilon_r = 35.895$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.56, 4.56, 4.56); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x17x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.06 W/kg


Configuration/Head/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.033 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 4.10 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.306 W/kg

Maximum value of SAR (measured) = 2.60 W/kg

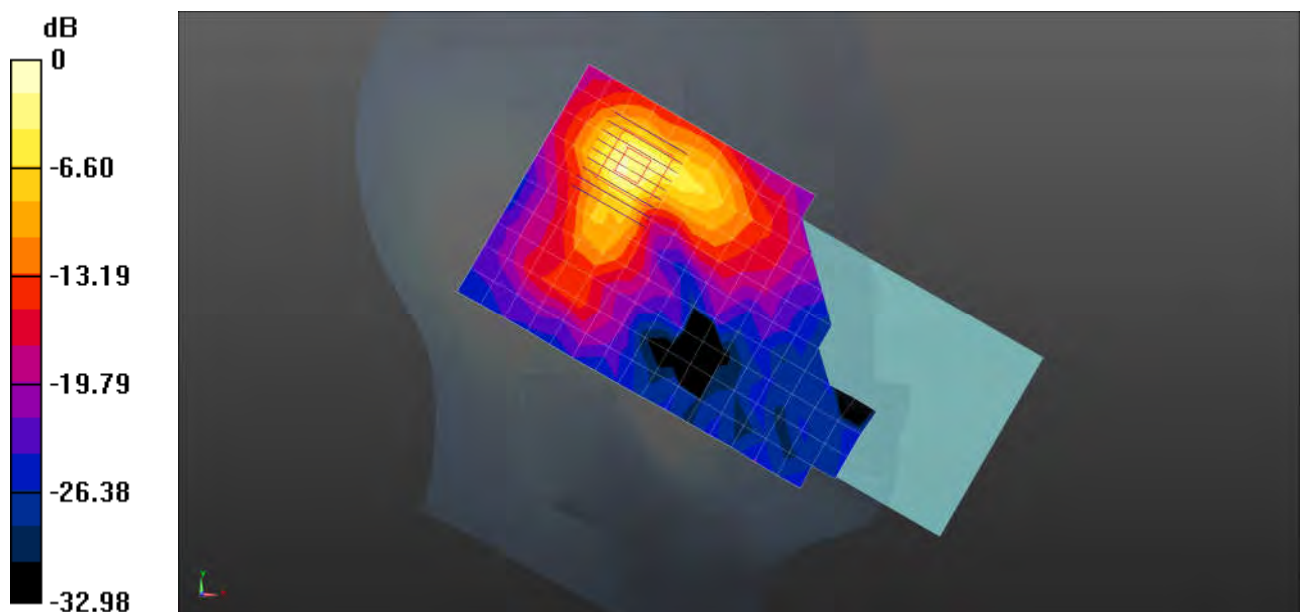

0 dB = 2.60 W/kg = 4.15 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI5G 802.11ac-80M 155CH Left Tilted

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5775 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5775$ MHz; $\sigma = 5.462$ S/m; $\epsilon_r = 35.419$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.64, 4.64, 4.64); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x17x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.14 W/kg


Configuration/Head/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.148 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.45 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 2.81 W/kg

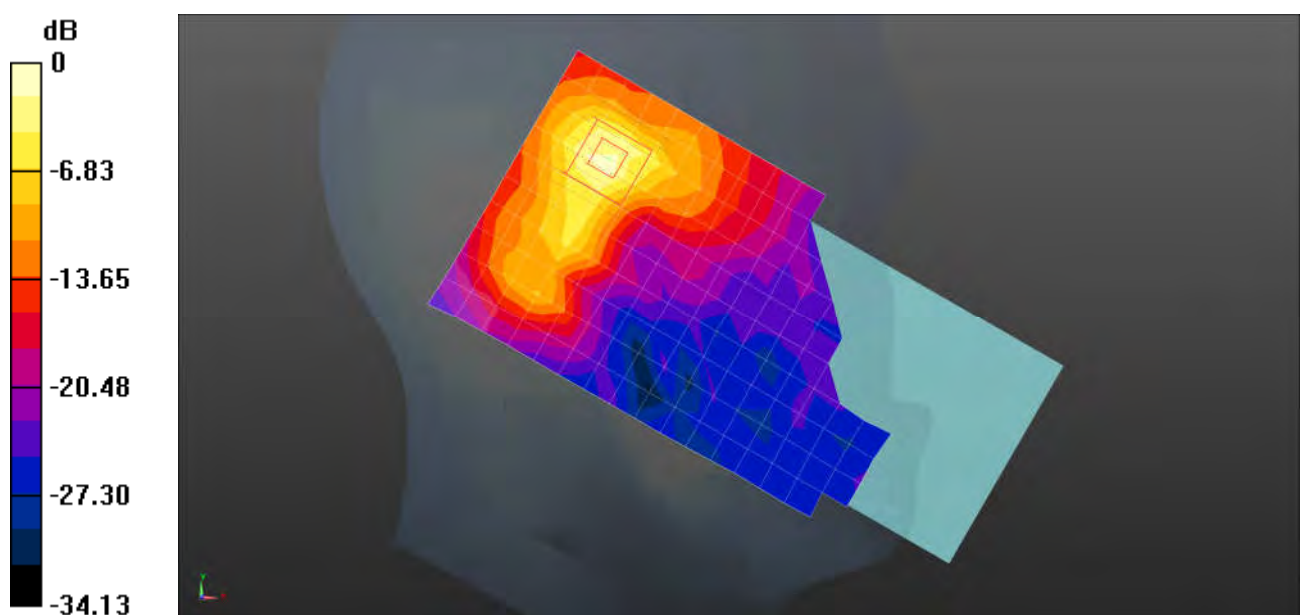

0 dB = 2.81 W/kg = 4.49 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI5G 802.11n-20M 64CH Back side 15mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5320 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5320$ MHz; $\sigma = 4.926$ S/m; $\epsilon_r = 36.153$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(5.2, 5.2, 5.2); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.30 W/kg


Configuration/Body/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.363 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.632 W/kg; SAR(10 g) = 0.258 W/kg

Maximum value of SAR (measured) = 1.38 W/kg

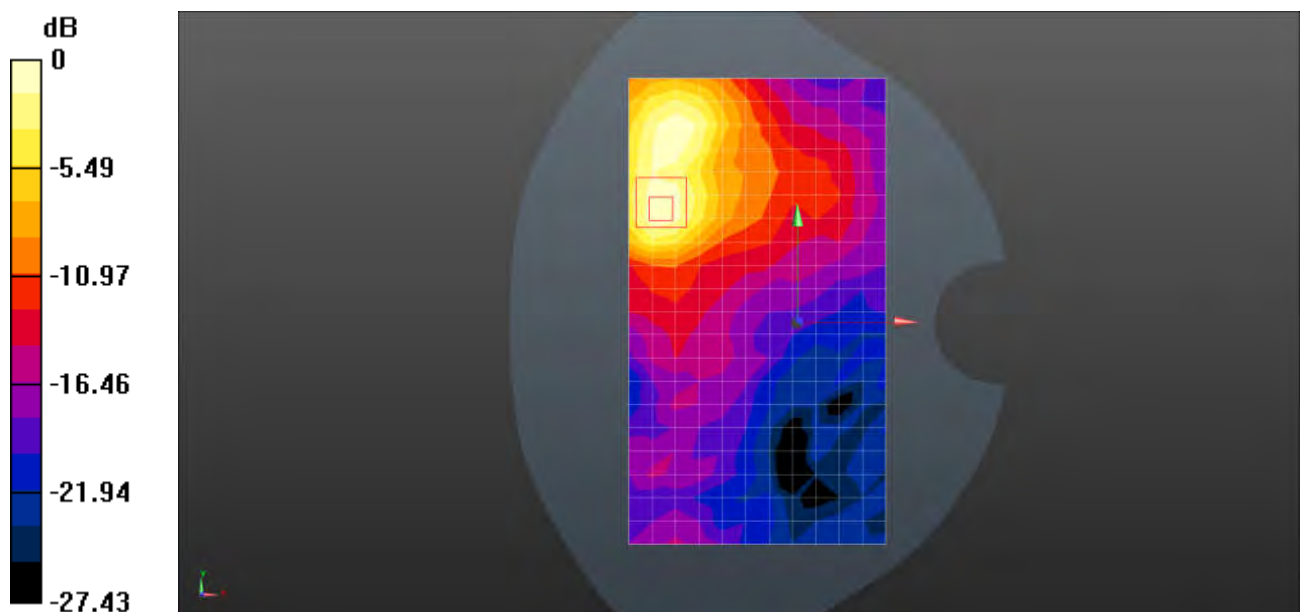

0 dB = 1.38 W/kg = 1.40 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI5G 802.11n-20M 104CH Back side 15mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5520 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5520$ MHz; $\sigma = 5.164$ S/m; $\epsilon_r = 35.972$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.56, 4.56, 4.56); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.20 W/kg


Configuration/Body/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.7880 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.429 W/kg

Maximum value of SAR (measured) = 2.41 W/kg

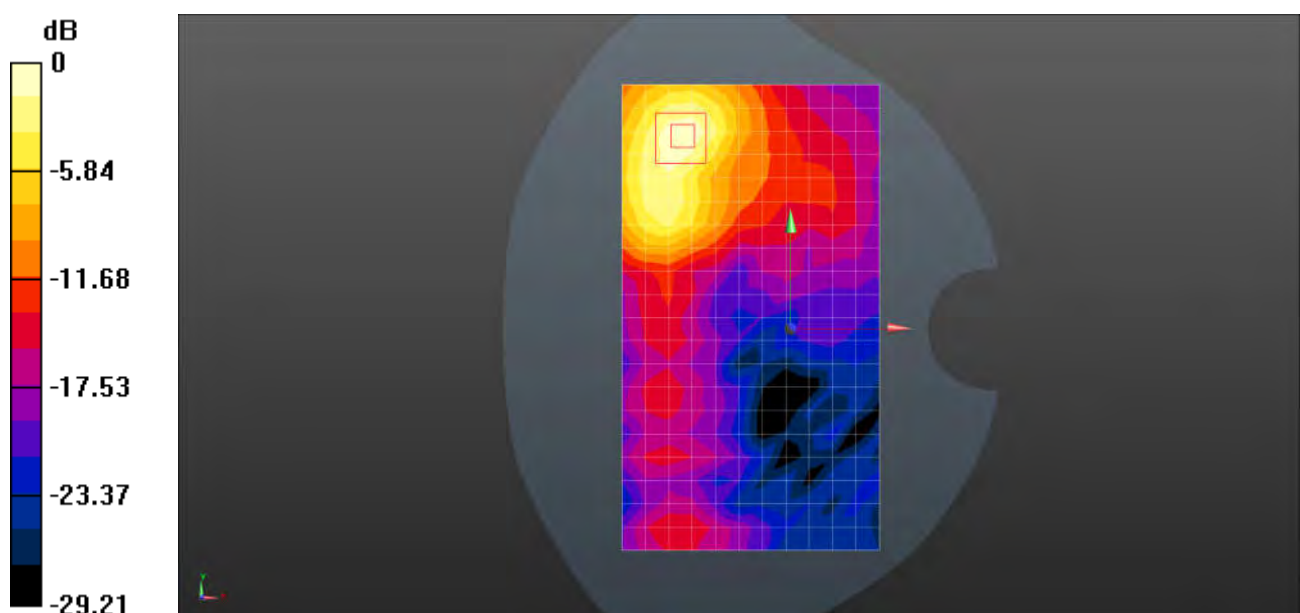

0 dB = 2.41 W/kg = 3.82 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI5G 802.11n-20M 157CH Back side 15mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5785$ MHz; $\sigma = 5.459$ S/m; $\epsilon_r = 35.332$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.64, 4.64, 4.64); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (12x21x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.99 W/kg


Configuration/Body/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.709 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 0.981 W/kg; SAR(10 g) = 0.391 W/kg

Maximum value of SAR (measured) = 2.21 W/kg

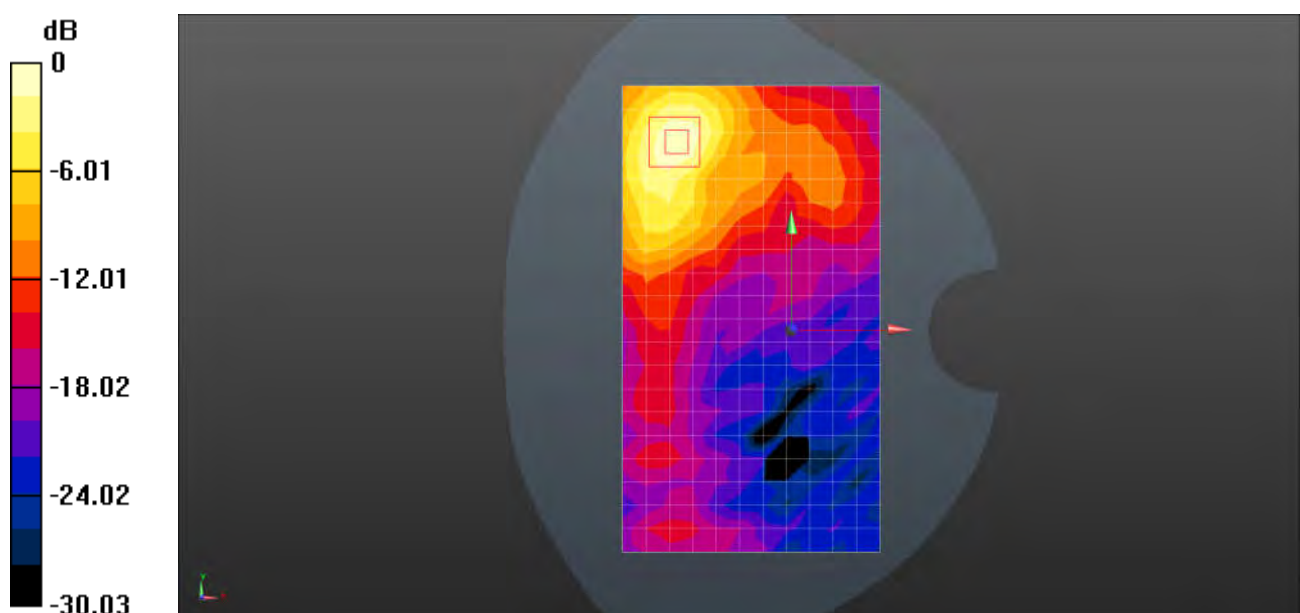

0 dB = 2.21 W/kg = 3.44 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI5G 802.11n-20M 64CH Right side 0mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5320 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5320$ MHz; $\sigma = 4.926$ S/m; $\epsilon_r = 36.153$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(5.2, 5.2, 5.2); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x21x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 6.50 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.236 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 3.98 W/kg; SAR(10 g) = 1.03 W/kg

Maximum value of SAR (measured) = 11.3 W/kg

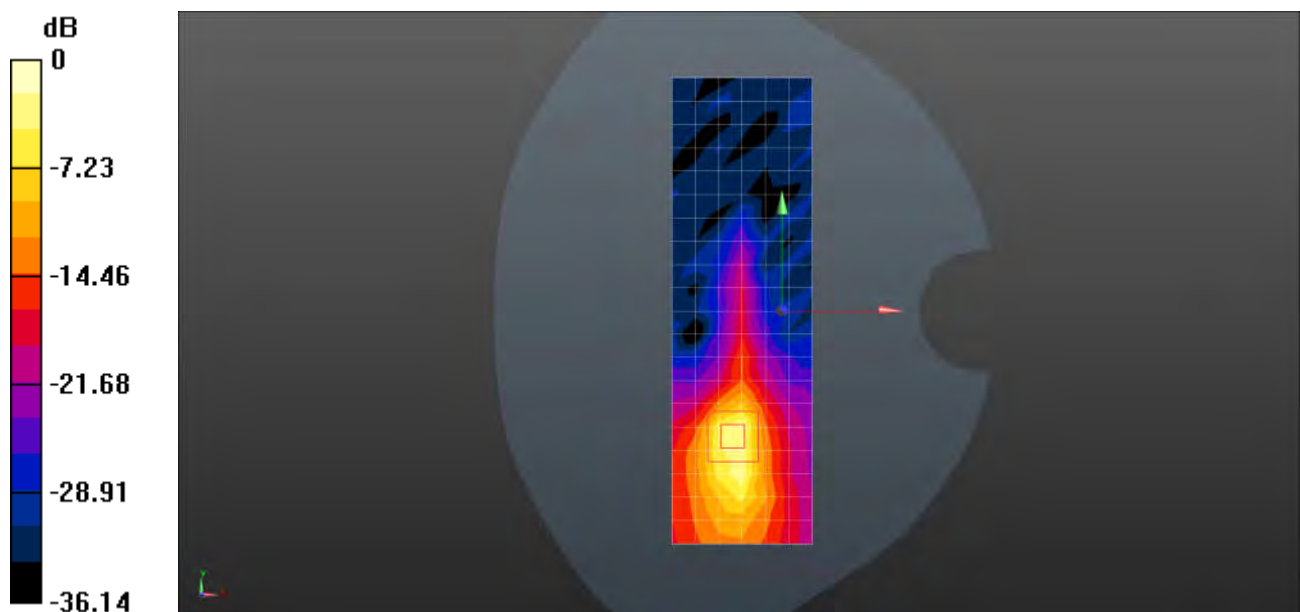

0 dB = 11.3 W/kg = 10.53 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI5G 802.11n-20M 100CH Right side 0mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5500 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5500$ MHz; $\sigma = 5.153$ S/m; $\epsilon_r = 35.998$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.56, 4.56, 4.56); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x21x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 12.1 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.181 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 21.6 W/kg

SAR(1 g) = 4.89 W/kg; SAR(10 g) = 1.46 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

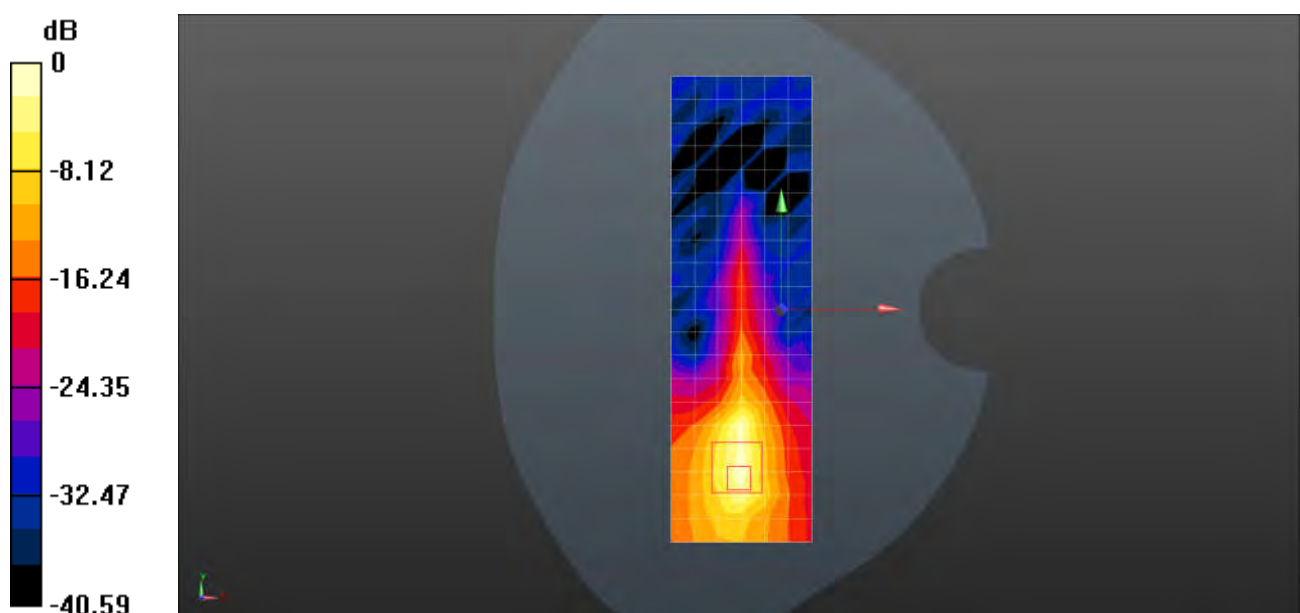

0 dB = 13.8 W/kg = 11.40 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ WIFI5G 802.11n-20M 153CH Back side 0mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5765 MHz;Duty Cycle: 1:1

Medium: HSL5G;Medium parameters used: $f = 5765$ MHz; $\sigma = 5.458$ S/m; $\epsilon_r = 35.473$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.64, 4.64, 4.64); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 12.0 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.762 V/m; Power Drift = 1.11 dB

Peak SAR (extrapolated) = 24.5 W/kg

SAR(1 g) = 6.33 W/kg; SAR(10 g) = 1.9 W/kg

Maximum value of SAR (measured) = 15.6 W/kg

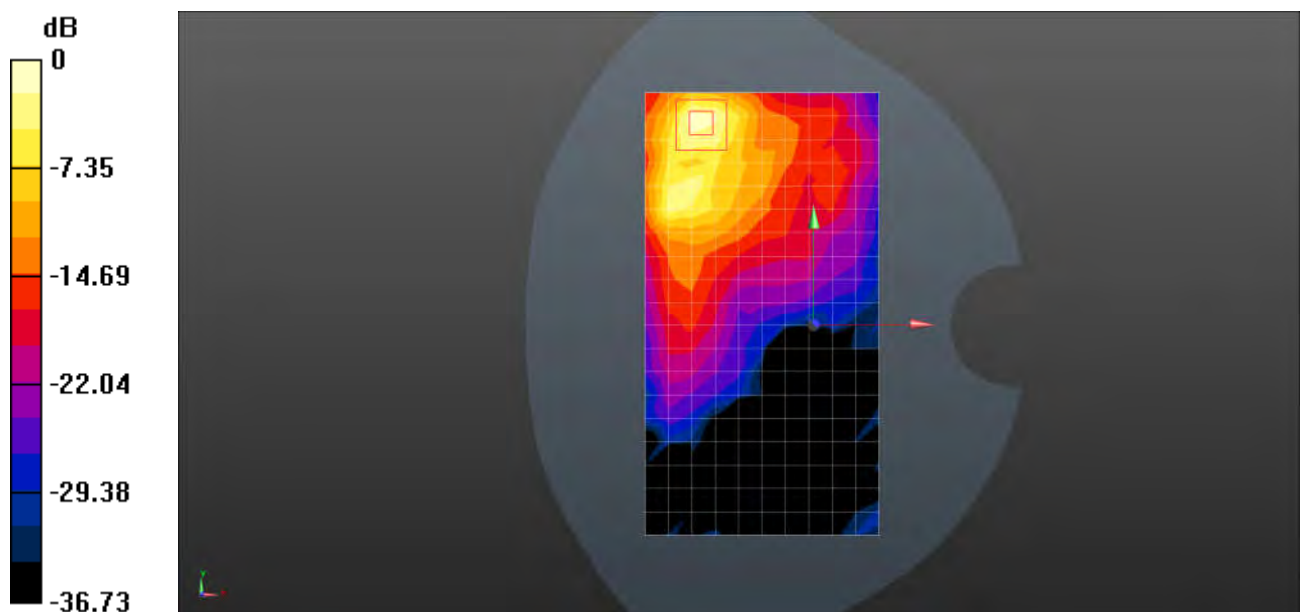

0 dB = 15.6 W/kg = 11.93 dBW/kg

Date: 2023-09-22

Measurement Report for Device, TILT, U-NII-8, IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle), Channel 215 (7025.0 MHz)

Communication System: U-NII-8; Frequency: 7025.0

Medium: HSL. Medium parameters used: $f = 7025.0$ MHz; $\sigma = 6.79$ S/m; $\epsilon_r = 32.8$

DASY8 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(5.05, 5.05, 5.05); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1374; Calibrated: 2022-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 195.0 mm): Measurement Grid: 7.5 mm x 7.5 mm

SAR (1g) = 1.00 W/kg; SAR (10g) = 0.292 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.0 mm x 3.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.882 W/kg; SAR (10g) = 0.261 W/kg;

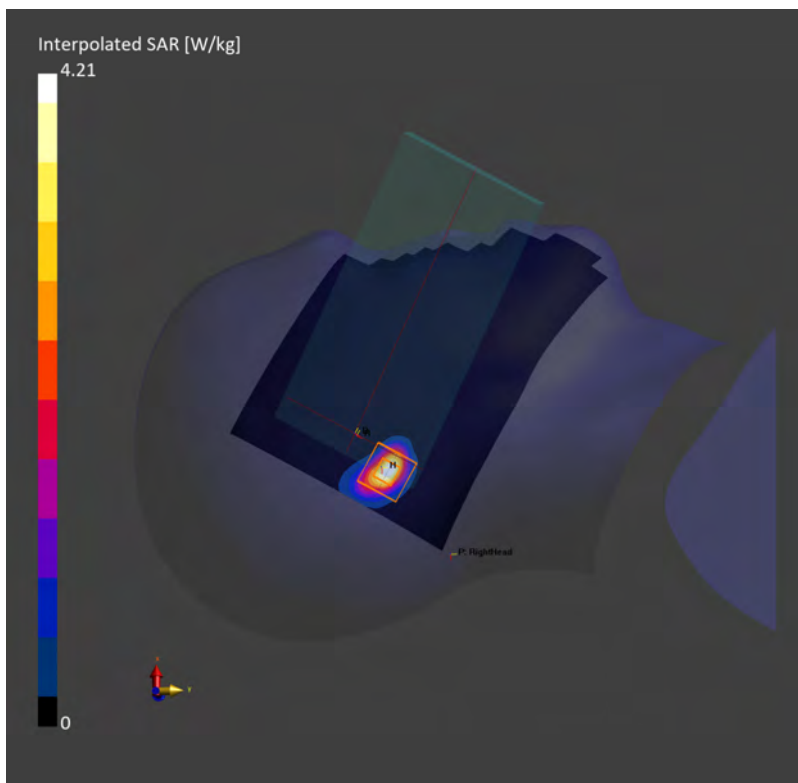

Measurement Report for Device, BACK, U-NII-8, IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle), Channel 215 (7025.0 MHz)

Communication System: U-NII-8; Frequency: 7025.0

Medium: HSL. Medium parameters used: $f = 7025.0$ MHz; $\sigma = 6.71$ S/m; $\epsilon_r = 33.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(5.05, 5.05, 5.05); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1374; Calibrated: 2022-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 195.0 mm): Measurement Grid: 7.5 mm x 7.5 mm

SAR (1g) = 0.466 W/kg; SAR (10g) = 0.169 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.0 mm x 3.0 mm x 1.4 mm

Power Drift = 0.16 dB

SAR (1g) = 0.481 W/kg; SAR (10g) = 0.175 W/kg;

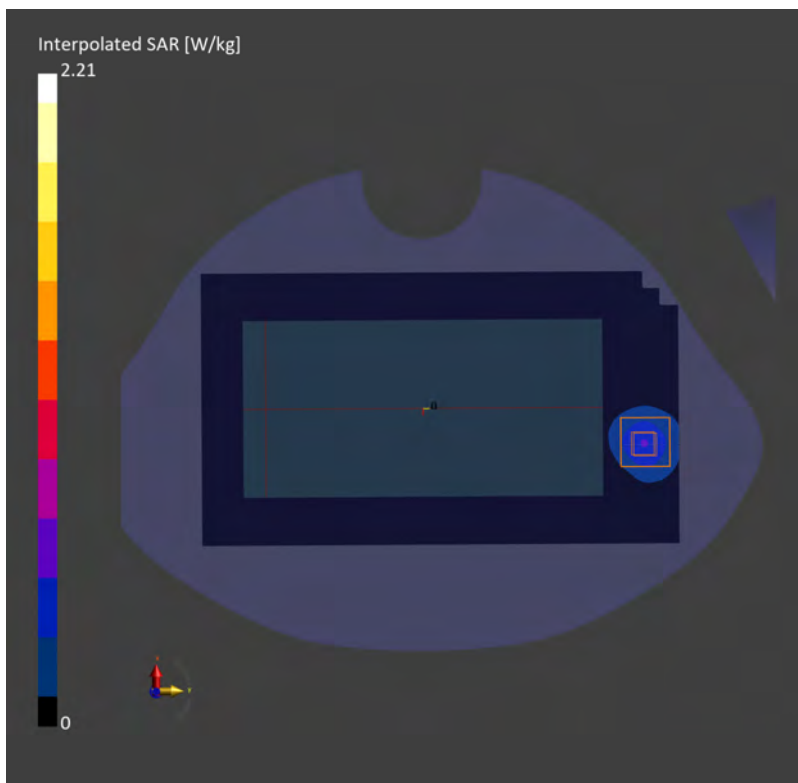

Measurement Report for Device, BACK, U-NII-8, IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle), Channel 215 (7025.0 MHz)

Communication System: U-NII-8; Frequency: 7025.0

Medium: HSL. Medium parameters used: $f = 7025.0$ MHz; $\sigma = 6.71$ S/m; $\epsilon_r = 33.1$

DASY8 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(5.05, 5.05, 5.05); Calibrated: 2022-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1374; Calibrated: 2022-06-05
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2103
- Measurement Software: cDASY8 V16.2.0.1425


Area Scan (120.0 mm x 195.0 mm): Measurement Grid: 7.5 mm x 7.5 mm

SAR (1g) = 0.299 W/kg; SAR (10g) = 0.095 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.0 mm x 3.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 0.302 W/kg; SAR (10g) = 0.097 W/kg;

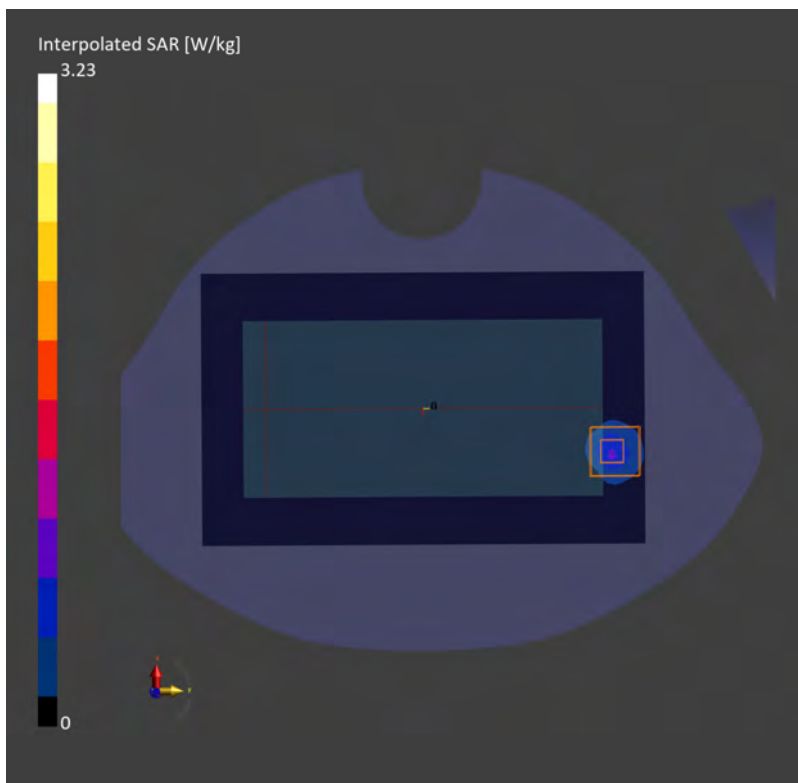

Test Laboratory: SGS-SAR Lab

Celero3 5G+ Bluetooth DH5 39CH Left Cheek

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.766$ S/m; $\epsilon_r = 40.165$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.26, 7.26, 7.26); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Head/Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0823 W/kg


Configuration/Head/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.921 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0812 W/kg

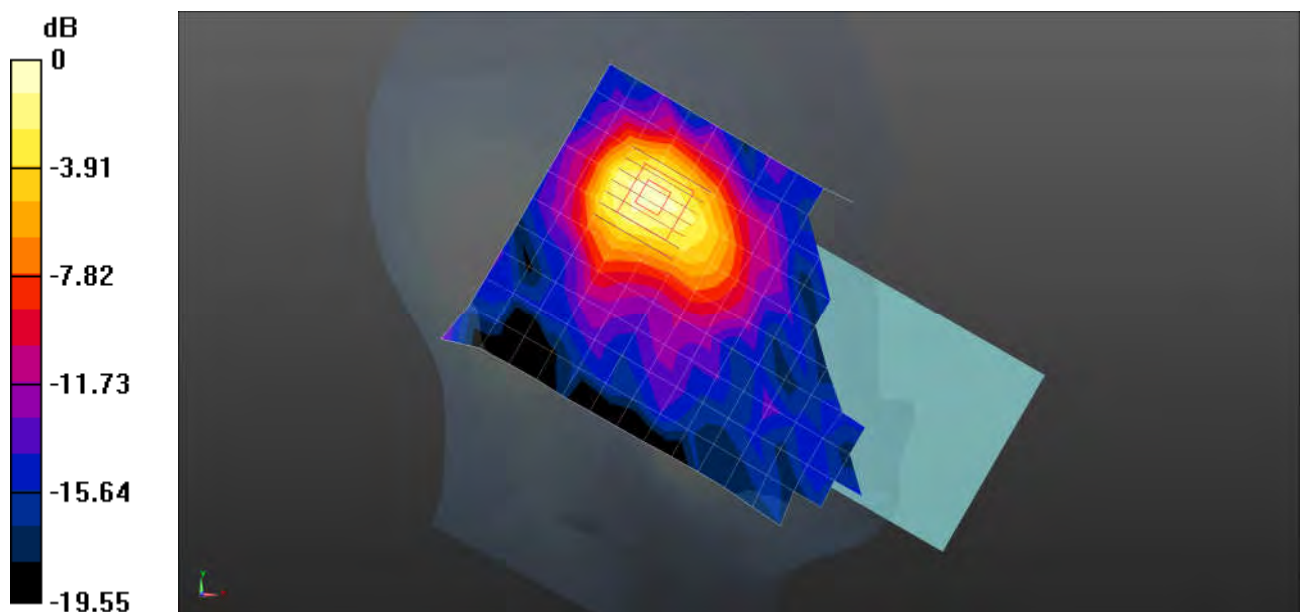

0 dB = 0.0812 W/kg = -10.90 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ Bluetooth DH5 39CH Back side 15mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.766$ S/m; $\epsilon_r = 40.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.26, 7.26, 7.26); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0164 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.198 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00596 W/kg

Maximum value of SAR (measured) = 0.0169 W/kg

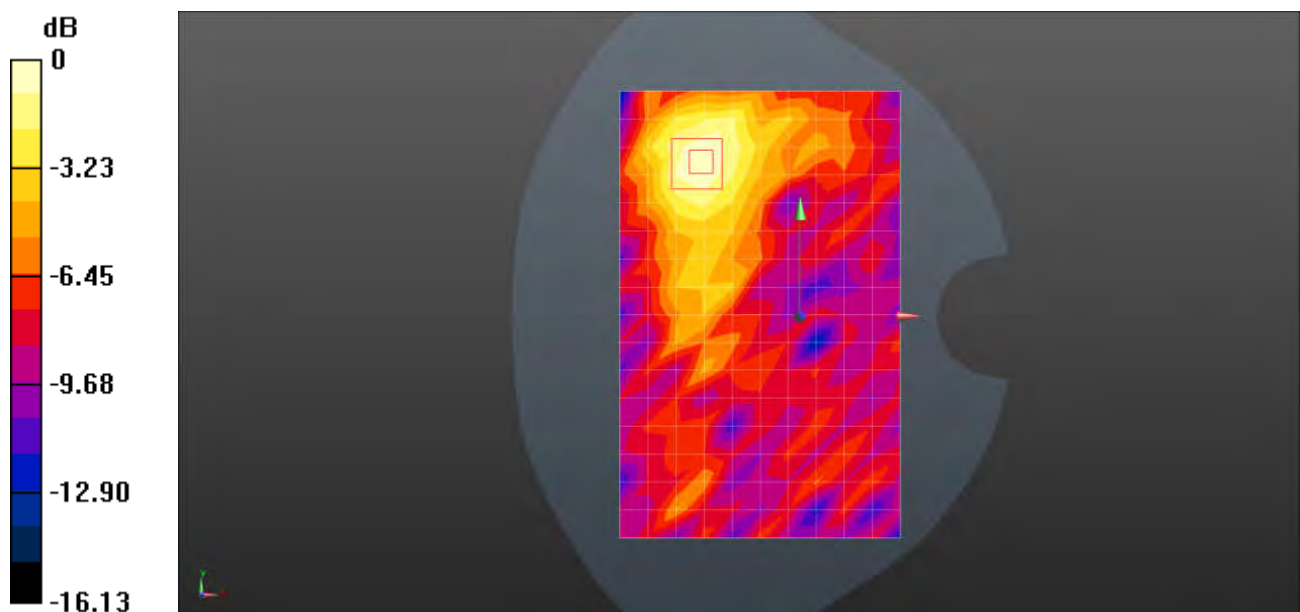

0 dB = 0.0169 W/kg = -17.72 dBW/kg

Test Laboratory: SGS-SAR Lab

Celero3 5G+ Bluetooth DH5 39CH Right side 10mm

DUT: Celero3 5G+; Type: Smart Phone; Serial: 867222065004865

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.766$ S/m; $\epsilon_r = 40.165$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.26, 7.26, 7.26); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2023-06-05
- Phantom: SAM 3; Type: QD000P40CD; Serial: TP:1770
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0169 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.873 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00644 W/kg

Maximum value of SAR (measured) = 0.0188 W/kg

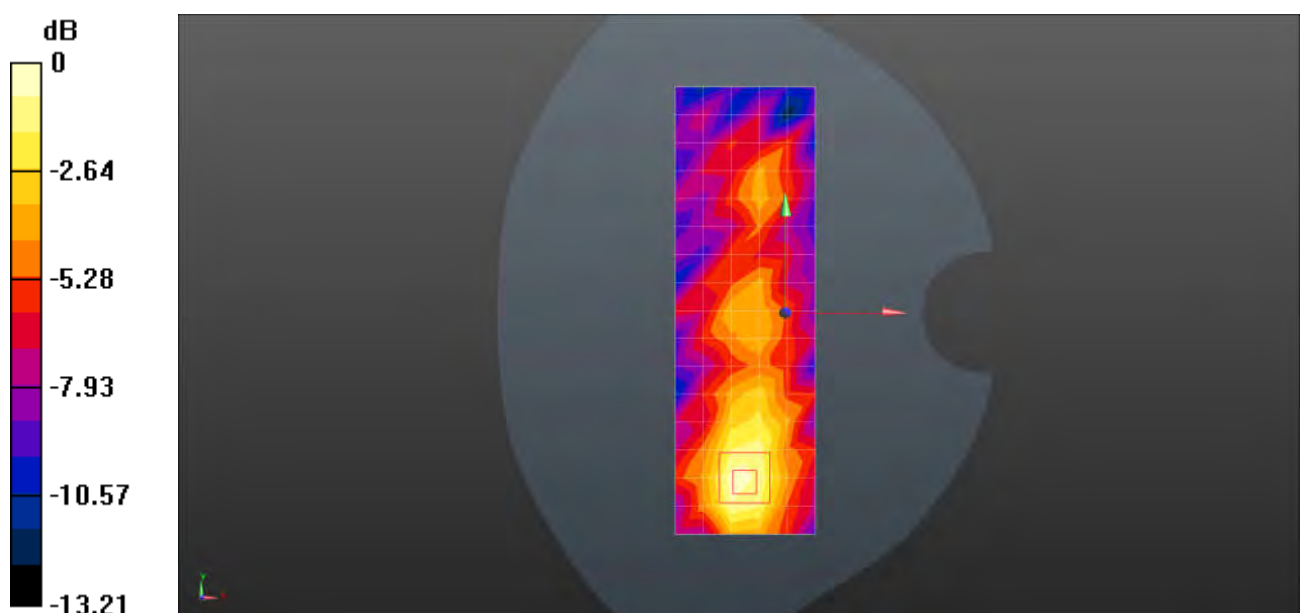

0 dB = 0.0188 W/kg = -17.26 dBW/kg

Test Laboratory: SGS-SAR Lab

U695DS NFC 13.56MHz Back side 0mm

DUT: U695DS; Type: Smart Phone; Serial: 867222060001254

Communication System: UID 0, NFC (0); Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: HSL_13.56; Medium parameters used: $f = 13.56$ MHz; $\sigma = 0.738$ S/m; $\epsilon_r = 54.02$; $\rho = 800$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(15.3, 15.3, 15.3); Calibrated: 2022-09-30
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: SAR 8-2; Type: EL4; Serial: TP:1143
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Ch/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.397 W/kg


Configuration/Ch/Zoom Scan (6x7x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.719 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.378 W/kg

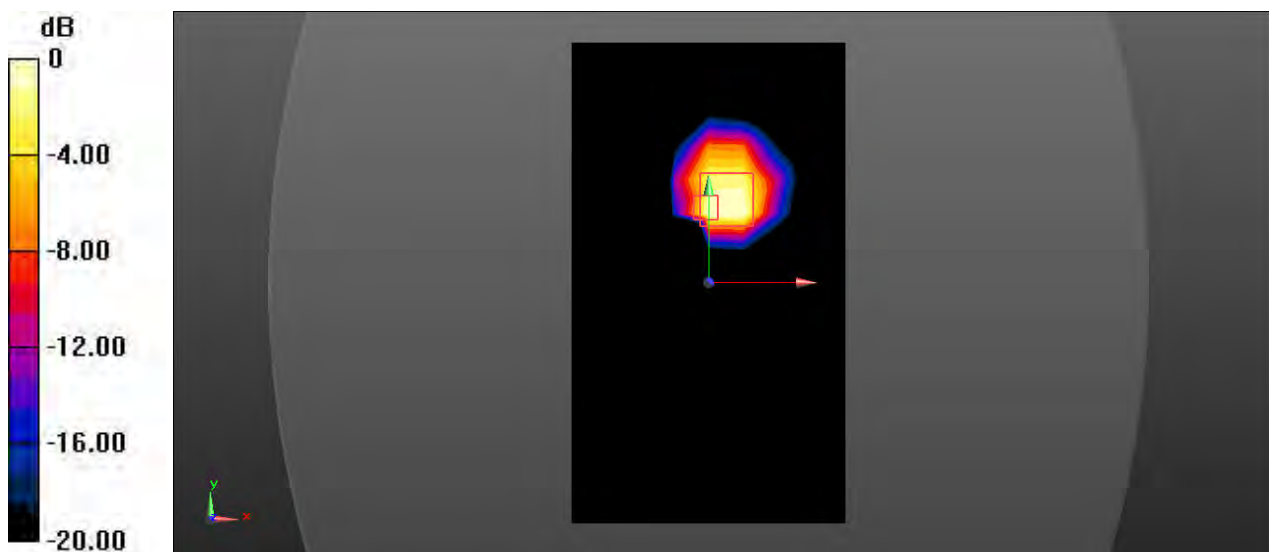

0 dB = 0.397 W/kg = -4.01 dBW/kg