



Report No.: SEWM2308000313RG11

Rev.: 01

Page: 1 of 1

# Appendix A

## Detailed Test Results

1. GSM
GSM850
GSM1900
2. WCDMA
WCDMA Band II
WCDMA Band IV
WCDMA Band V
3. LTE
LTE Band 2
LTE Band 4
LTE Band 5
LTE Band 12
LTE Band 14
LTE Band 17
LTE band 26
LTE Band 30
LTE Band 66
LTE Band 71
LTE Band 48
4. WLAN
WLAN 2.4GHz
WLAN 5GHz
5. OTT
GSM850
WCDMA Band II
LTE Band 4
LTE Band 48
WLAN 2.4GHz
WLAN 5GHz

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-GSM850 GSM Voice 190CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, GSM Only Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 35.50 dB

ABM1 comp = 0.99 dBA/m

BWC Factor = 0.23 dB


Location: 3.8, -11.7, 3.7 mm

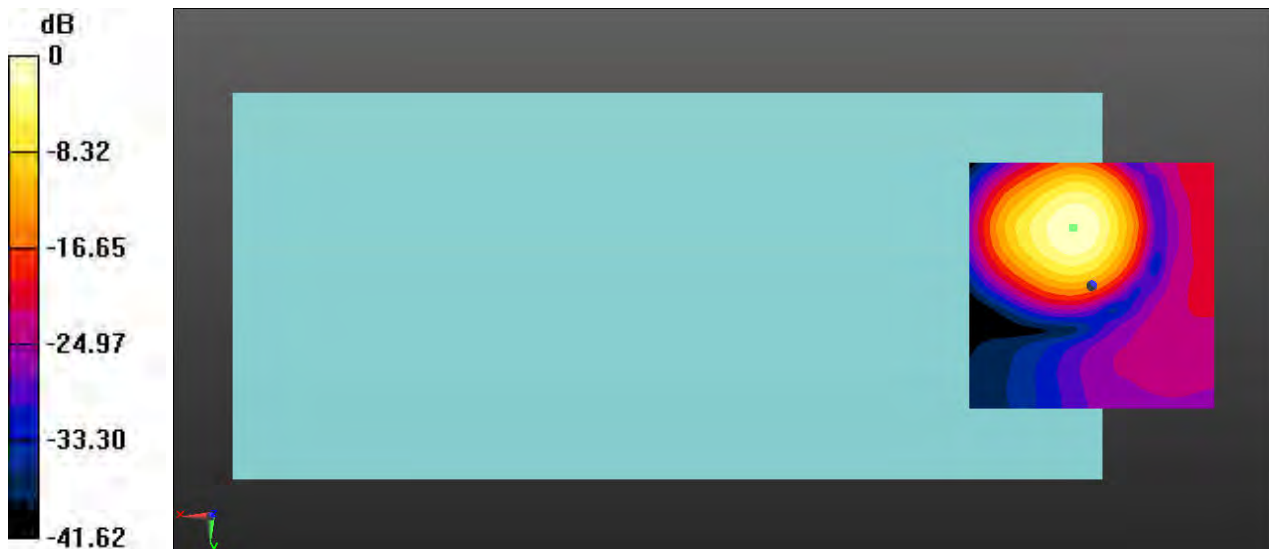

0 dB = 59.54 = 35.50 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 3.8, -11.7, 3.7 mm Diff: 1.56dB

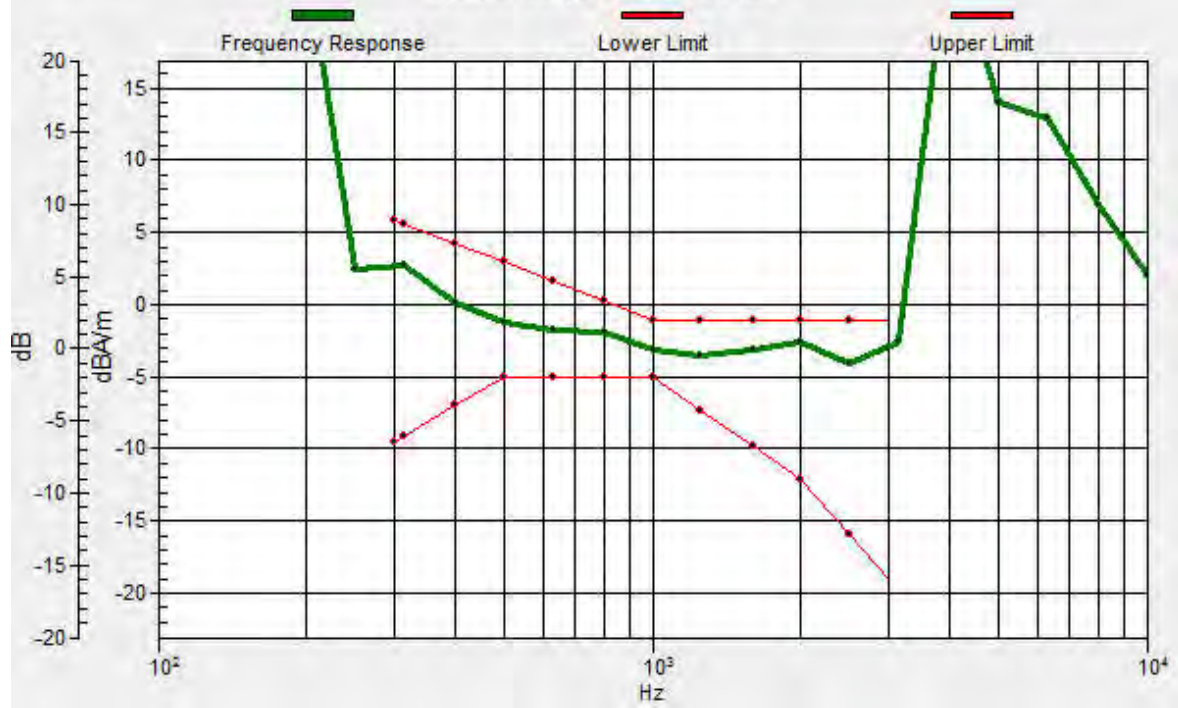

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-GSM850 GSM Voice 190CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, GSM Only Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 40.61 dB

ABM1 comp = -4.05 dBA/m

BWC Factor = 0.23 dB

Location: 5.8, -21.3, 3.7 mm

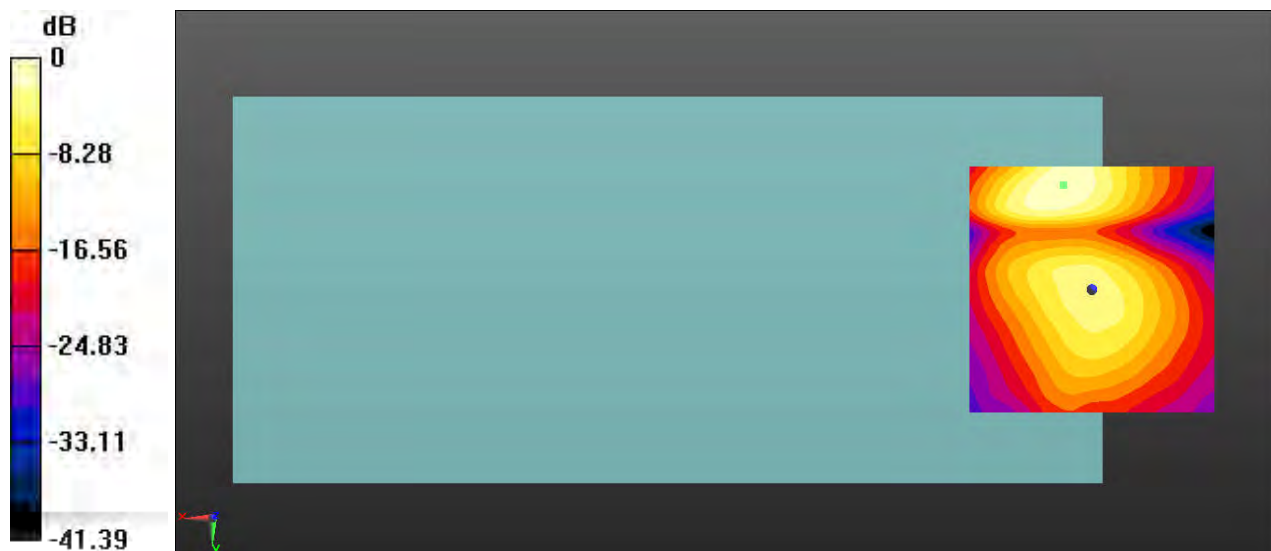

0 dB = 107.3 = 40.61 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-GSM1900 GSM Voice 661CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, GSM Only Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 37.73 dB

ABM1 comp = 1.04 dBA/m

BWC Factor = 0.34 dB


Location: 3.8, -11.7, 3.7 mm

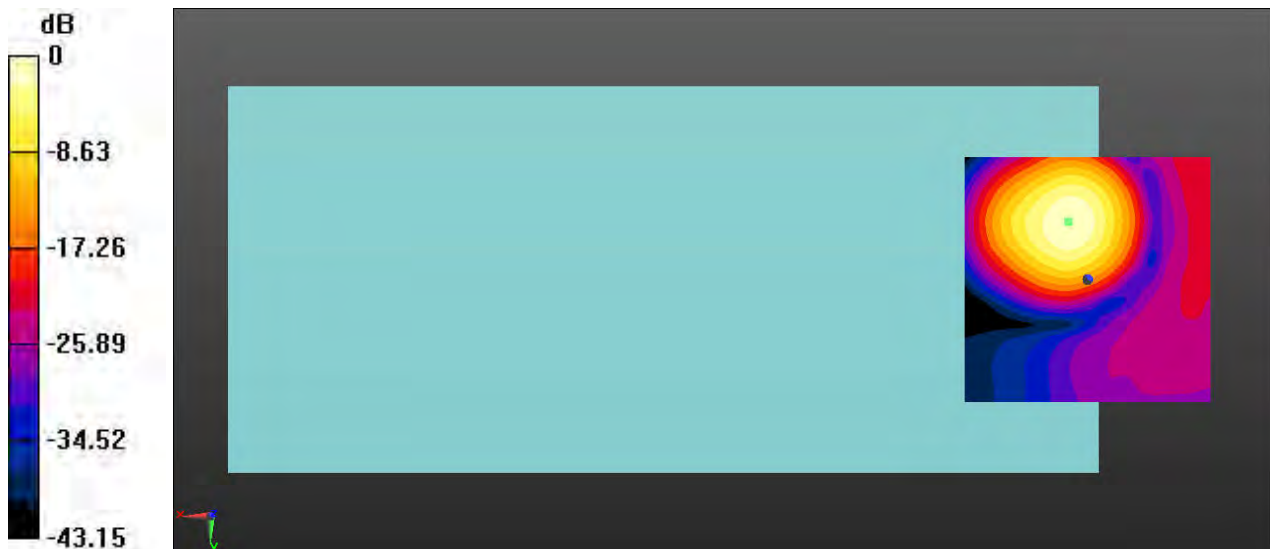

0 dB = 77.02 = 37.73 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 4, -11.8, 3.7 mm Diff: 1.31dB

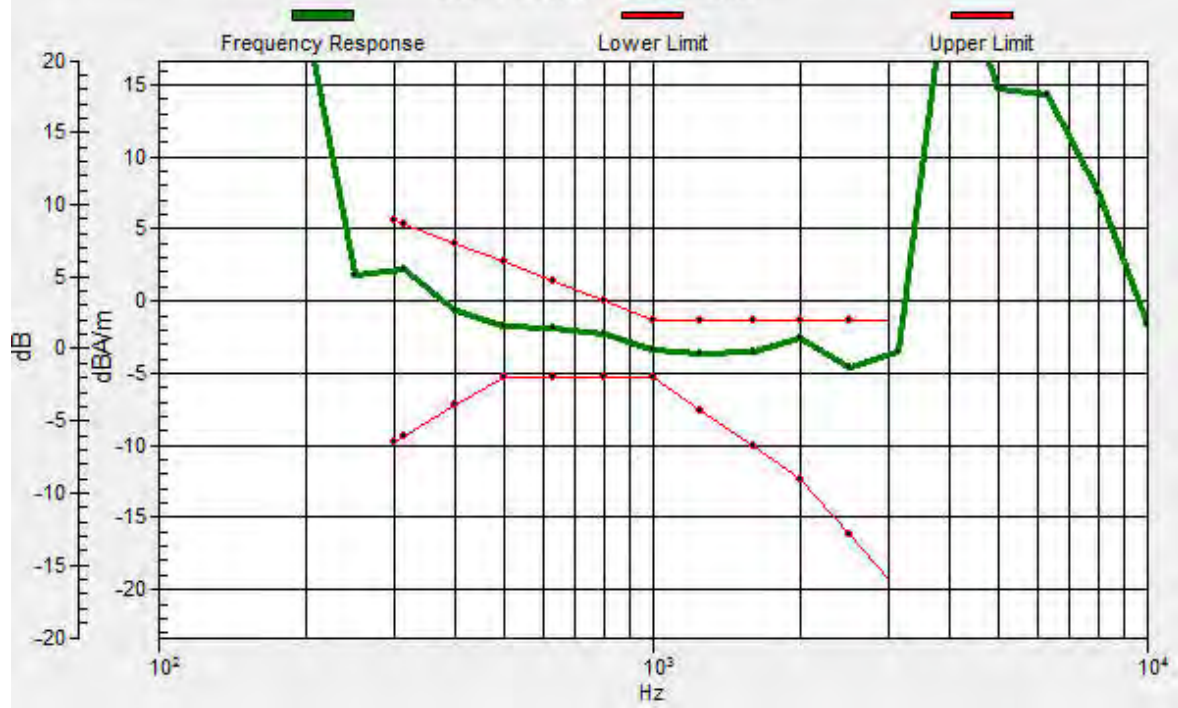

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-GSM1900 GSM Voice 661CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, GSM Only Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 38.77 dB

ABM1 comp = -4.93 dBA/m

BWC Factor = 0.34 dB

Location: 4.2, -21.3, 3.7 mm

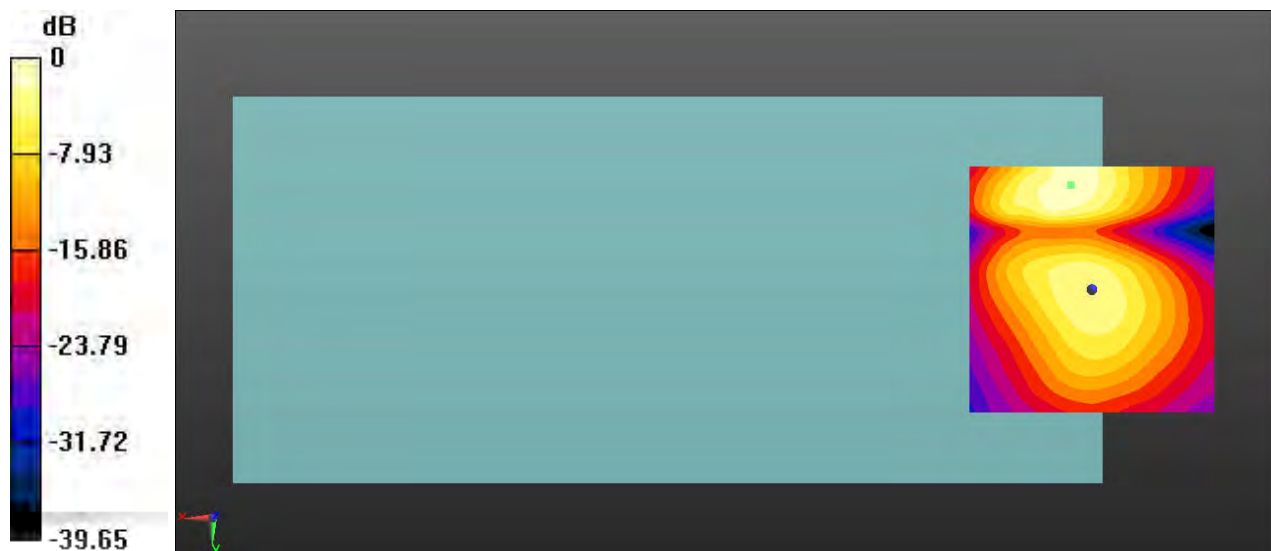

0 dB = 86.82 = 38.77 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WCDMA Band II AMR Voice 9400CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System:UMTS-FDD (WCDMA); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 35.08 dB

ABM1 comp = -6.54 dBA/m

BWC Factor = 1.03 dB

Location: 13.3, -12.1, 3.7 mm

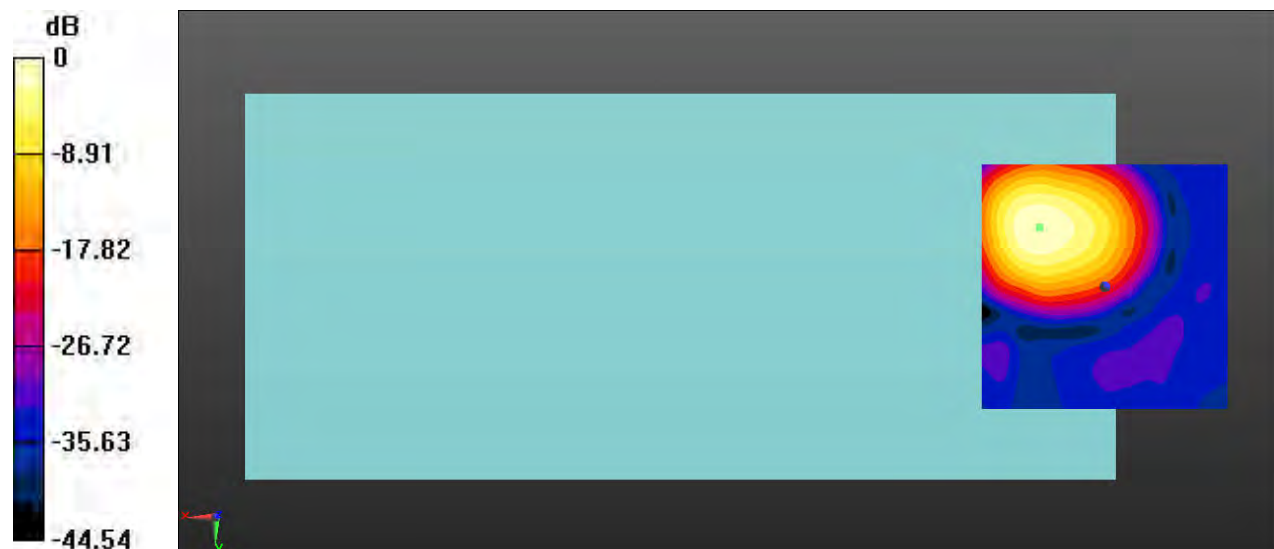


0 dB = 56.76 = 35.08 dB



# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 13.2, -12, 3.7 mm Diff: 1.84dB

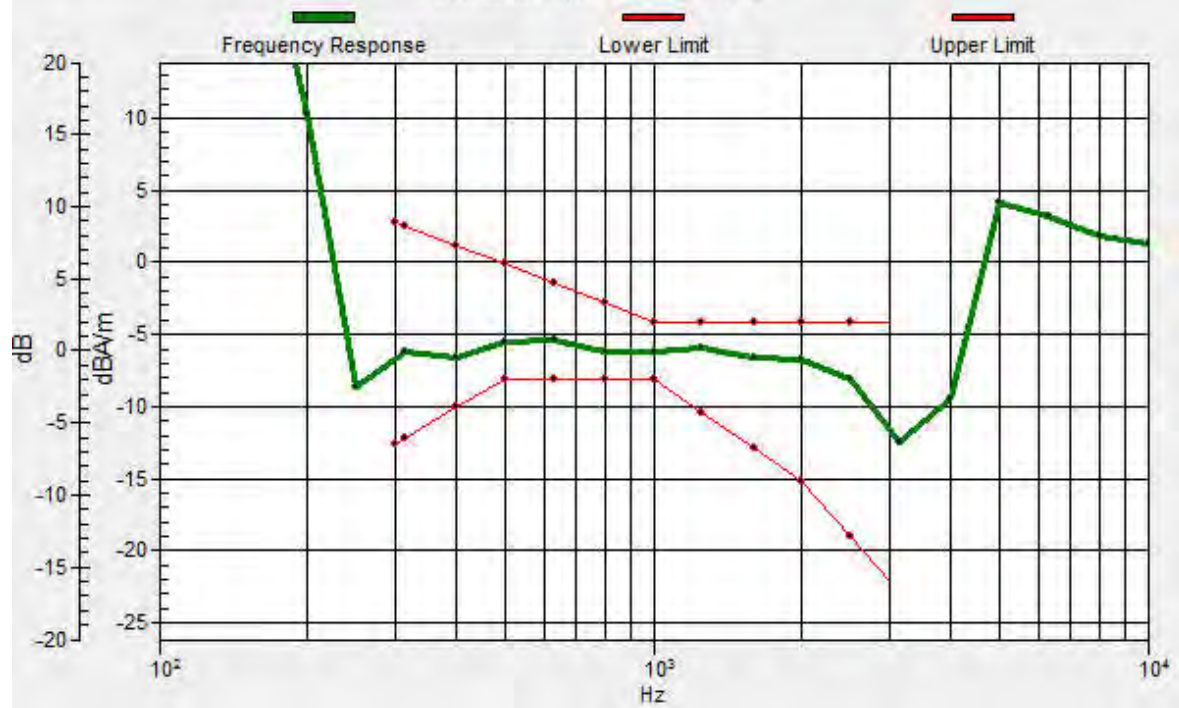

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WCDMA Band II AMR Voice 9400CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 28.69 dB

ABM1 comp = -13.89 dBA/m

BWC Factor = 1.03 dB

Location: 15.8, -3.8, 3.7 mm

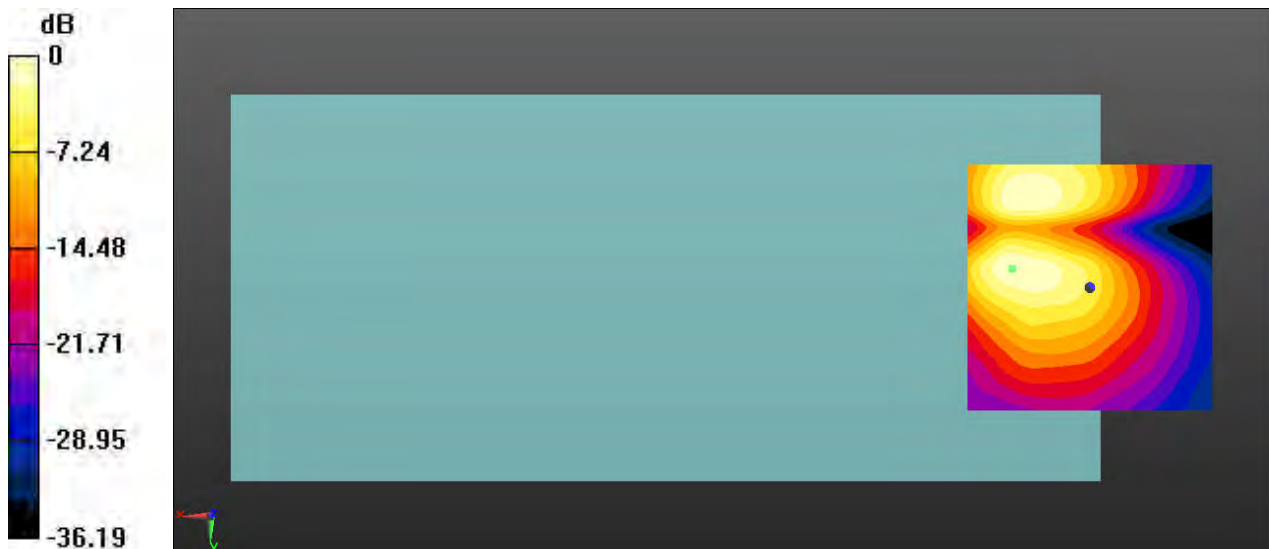

0 dB = 27.18 = 28.69 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WCDMA Band IV AMR Voice 1412CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 36.27 dB

ABM1 comp = -6.37 dBA/m

BWC Factor = 0.88 dB


Location: 12.9, -12.1, 3.7 mm

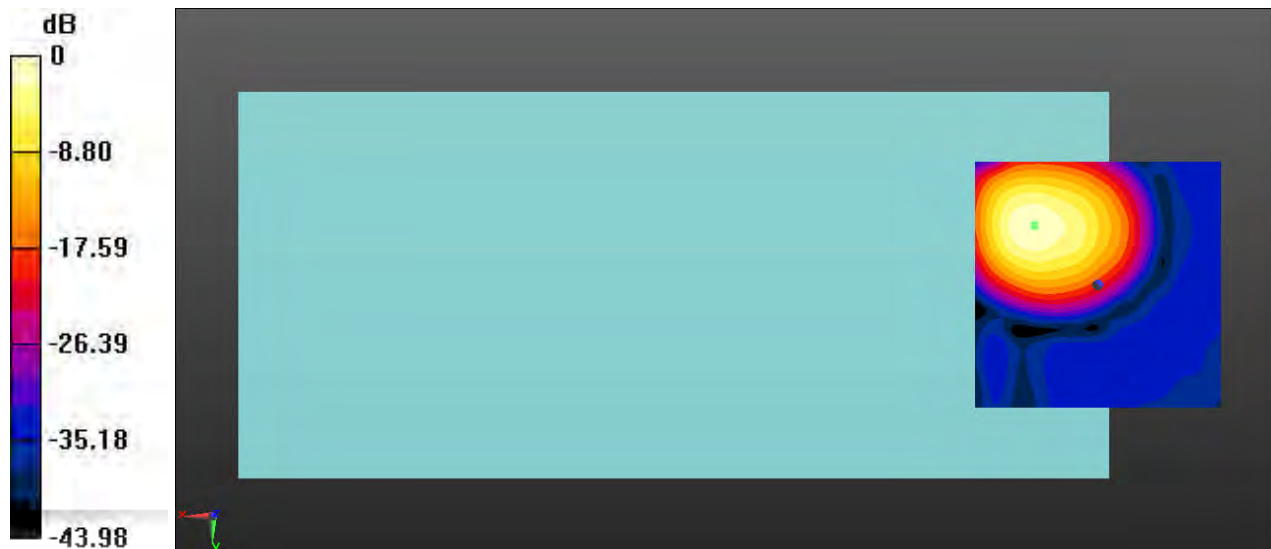

0 dB = 65.11 = 36.27 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 12.8, -12.2, 3.7 mm Diff: 0.99dB

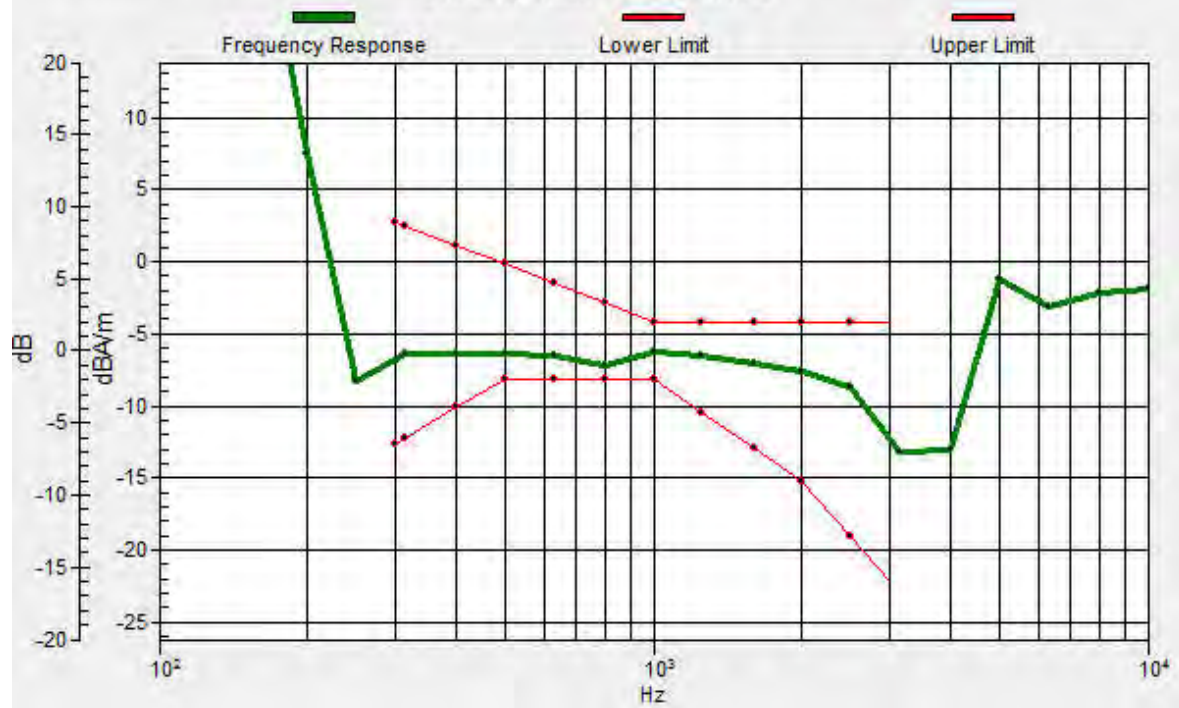

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WCDMA Band IV AMR Voice 1412CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 28.79 dB

ABM1 comp = -13.94 dBA/m

BWC Factor = 0.88 dB

Location: 16.3, -3.8, 3.7 mm

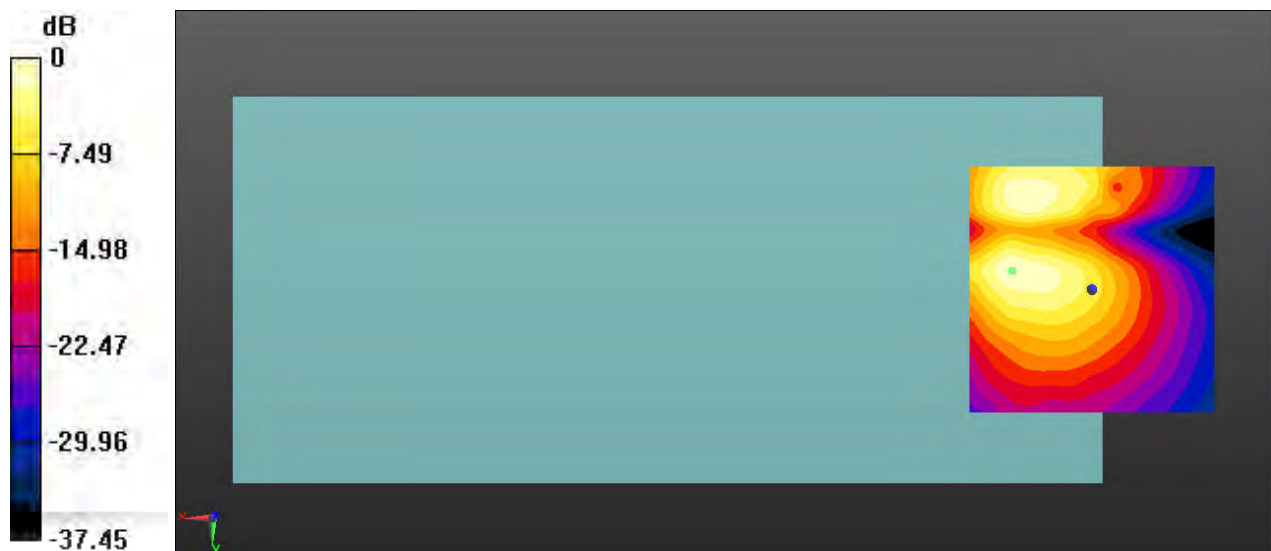

0 dB = 27.52 = 28.79 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WCDMA Band V AMR Voice 4182CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 35.54 dB

ABM1 comp = -6.99 dBA/m

BWC Factor = 0.95 dB


Location: 12.1, -11.7, 3.7 mm

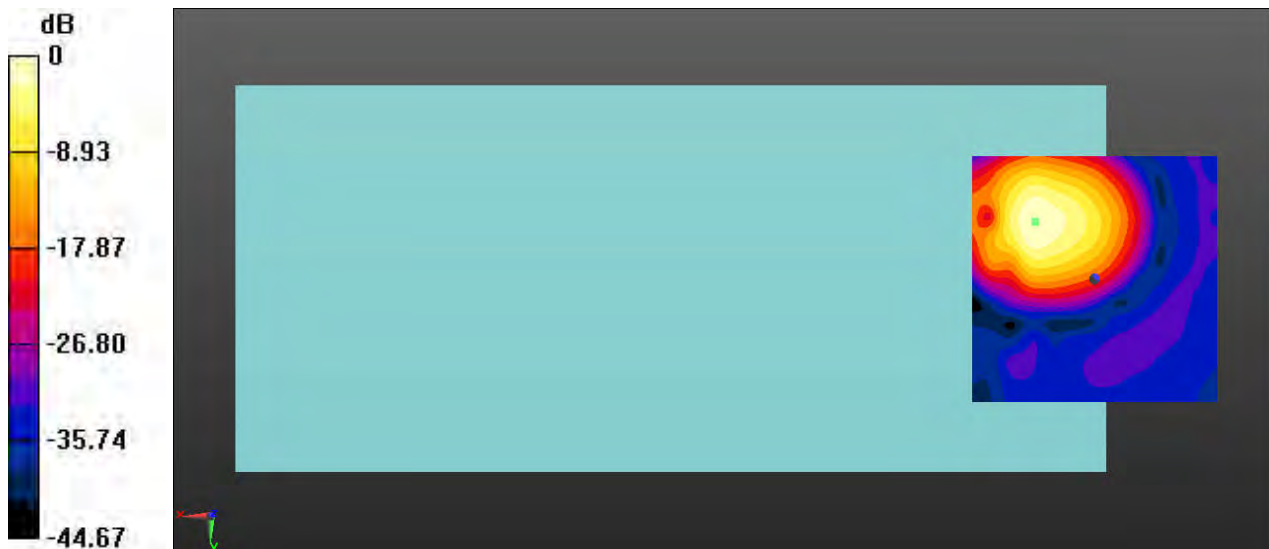

0 dB = 59.82 = 35.54 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 12, -11.5, 3.7 mm Diff: 1.47dB

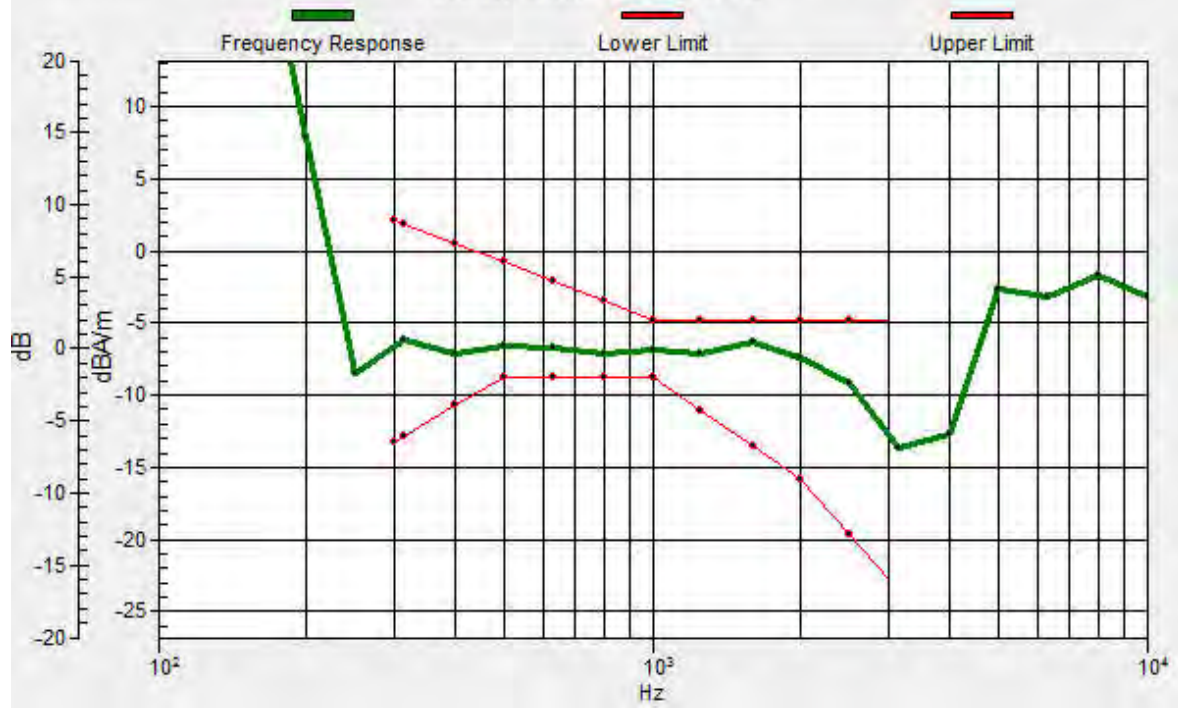

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WCDMA Band V AMR Voice 4182CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 29.05 dB

ABM1 comp = -13.82 dBA/m

BWC Factor = 0.95 dB

Location: 15.8, -3.8, 3.7 mm

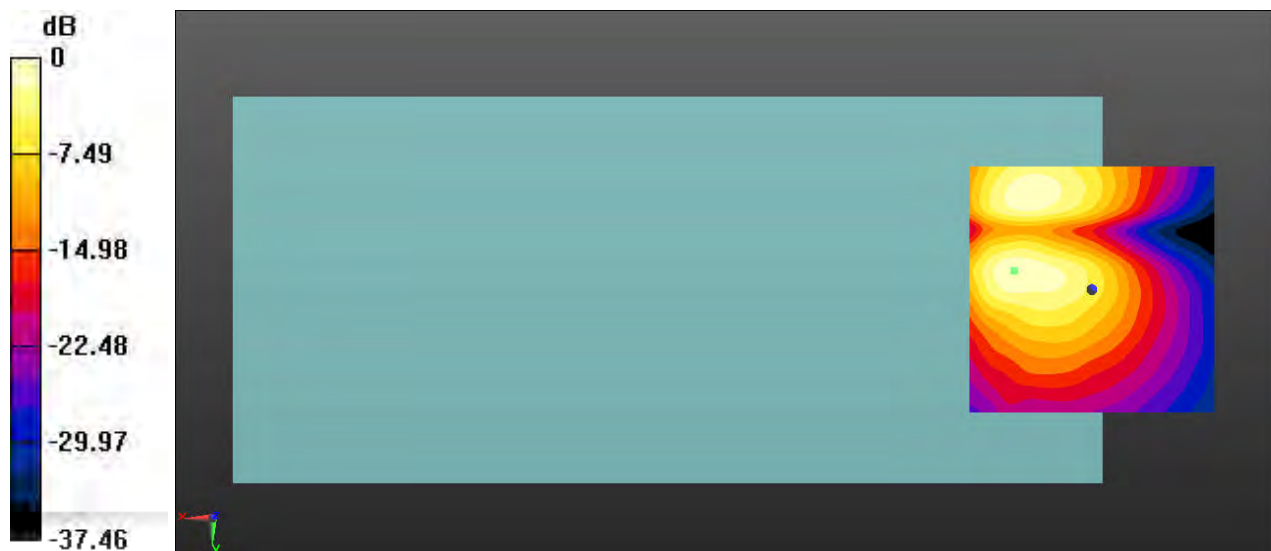

0 dB = 28.34 = 29.05 dB



Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 2 20M QPSK 100RB0 18900CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)

**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 46.51 dB

ABM1 comp = 0.15 dBA/m

BWC Factor = 0.36 dB


Location: 4.2, -11.3, 3.7 mm



0 dB = 211.5 = 46.51 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 4.2, -11.2, 3.7 mm Diff: 0.88dB

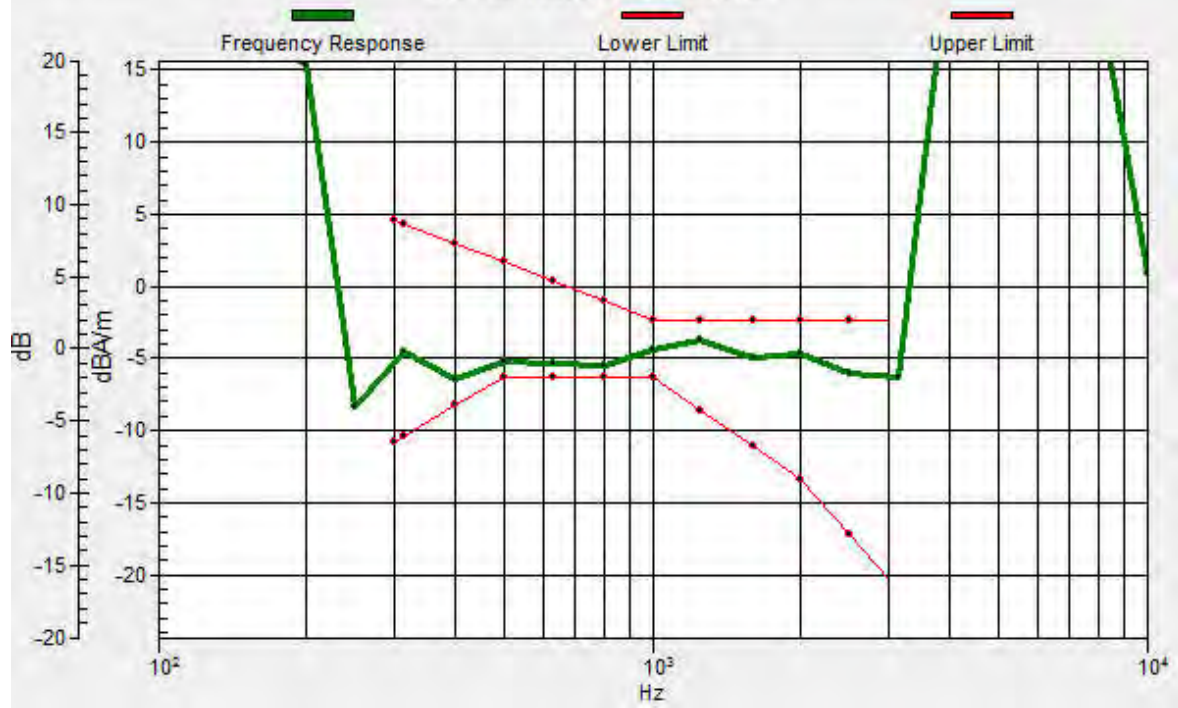

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 2 20M QPSK 100RB0 18900CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 38.57 dB

ABM1 comp = -7.67 dBA/m

BWC Factor = 0.36 dB

Location: 2.9, -3.3, 3.7 mm

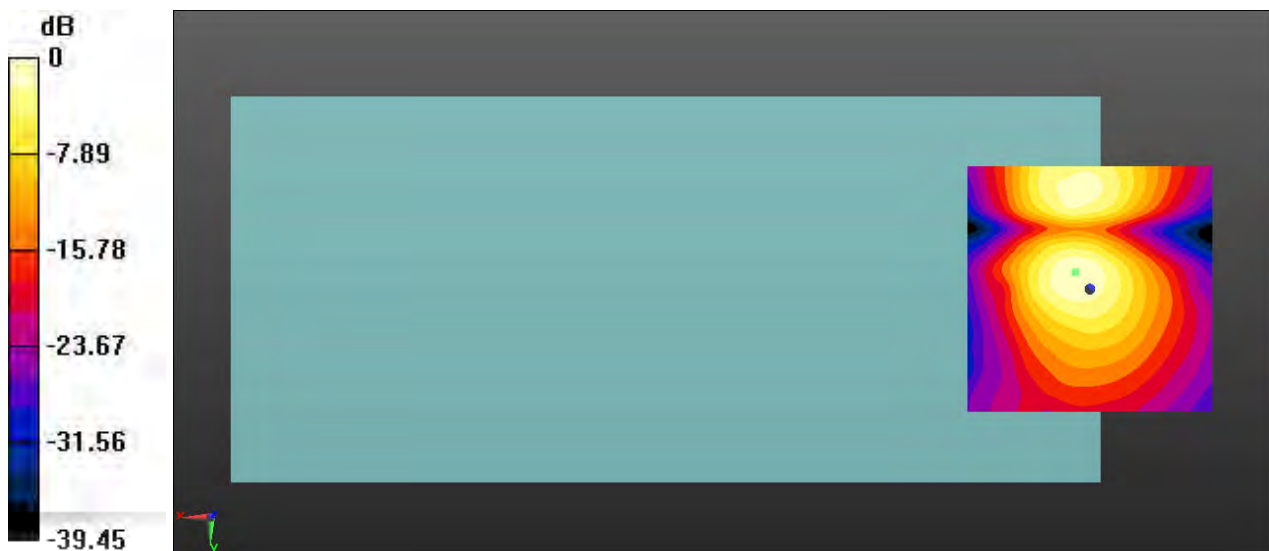

0 dB = 84.81 = 38.57 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 4 20M QPSK 100RB0 20175CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 42.06 dB

ABM1 comp = -2.38 dBA/m

BWC Factor = 0.36 dB


Location: 4.6, -11.3, 3.7 mm

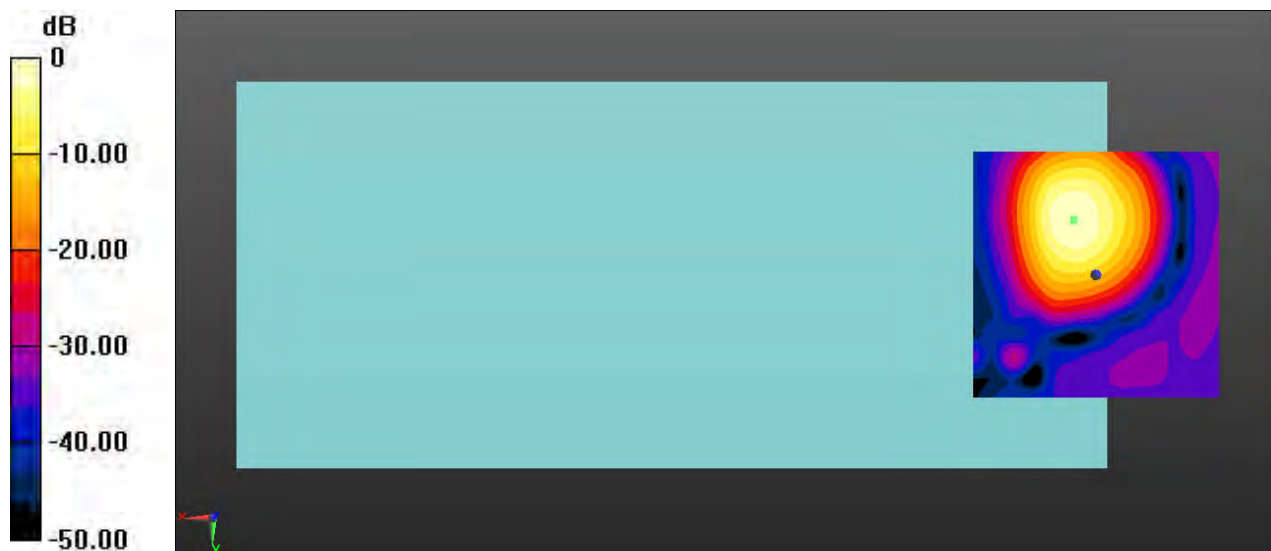

0 dB = 190.6 = 45.60 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 4.5, -11, 3.7 mm Diff: 1.28dB

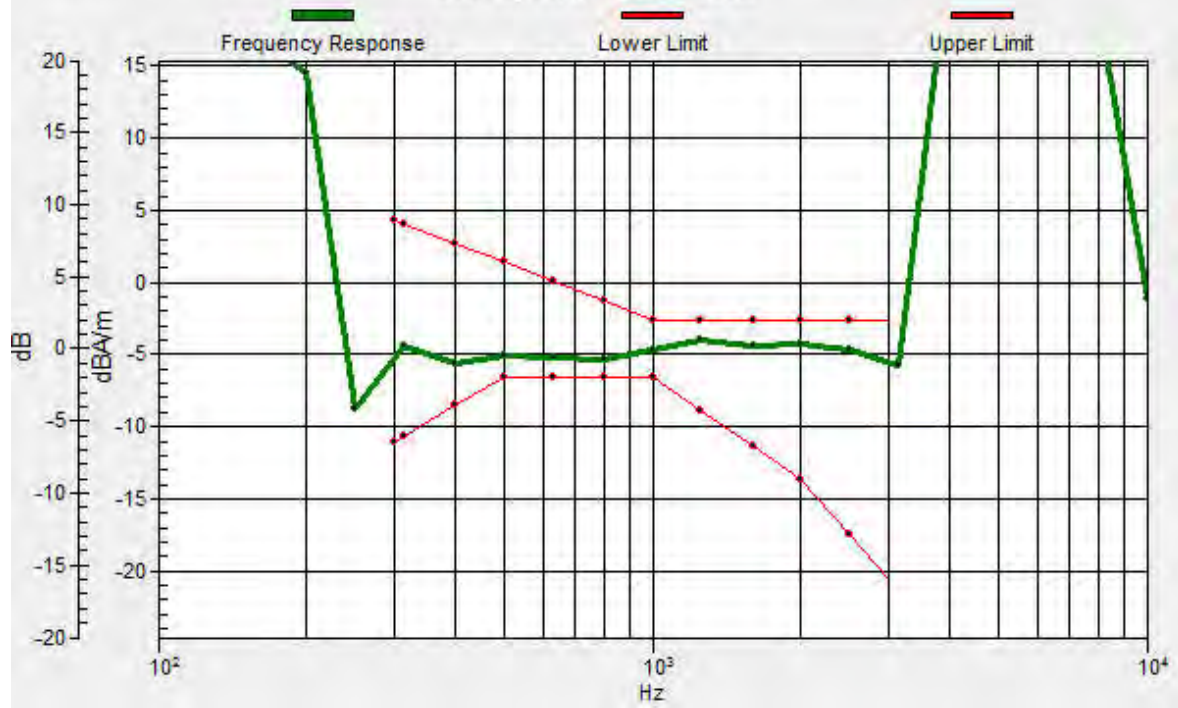

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 4 20M QPSK 100RB0 20175CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 38.87 dB

ABM1 comp = -7.26 dBA/m

BWC Factor = 0.36 dB

Location: 3.8, -3.3, 3.7 mm

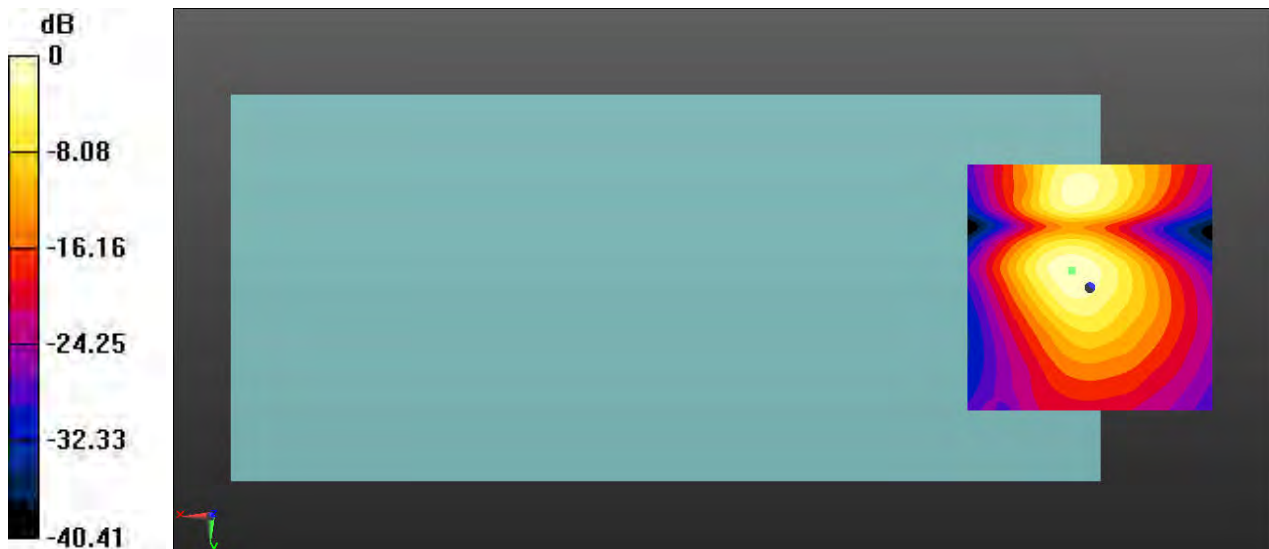

0 dB = 87.80 = 38.87 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 5 10M QPSK 50RB0 20525CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 46.76 dB

ABM1 comp = 0.39 dBA/m

BWC Factor = 0.37 dB

Location: 3.8, -12.5, 3.7 mm

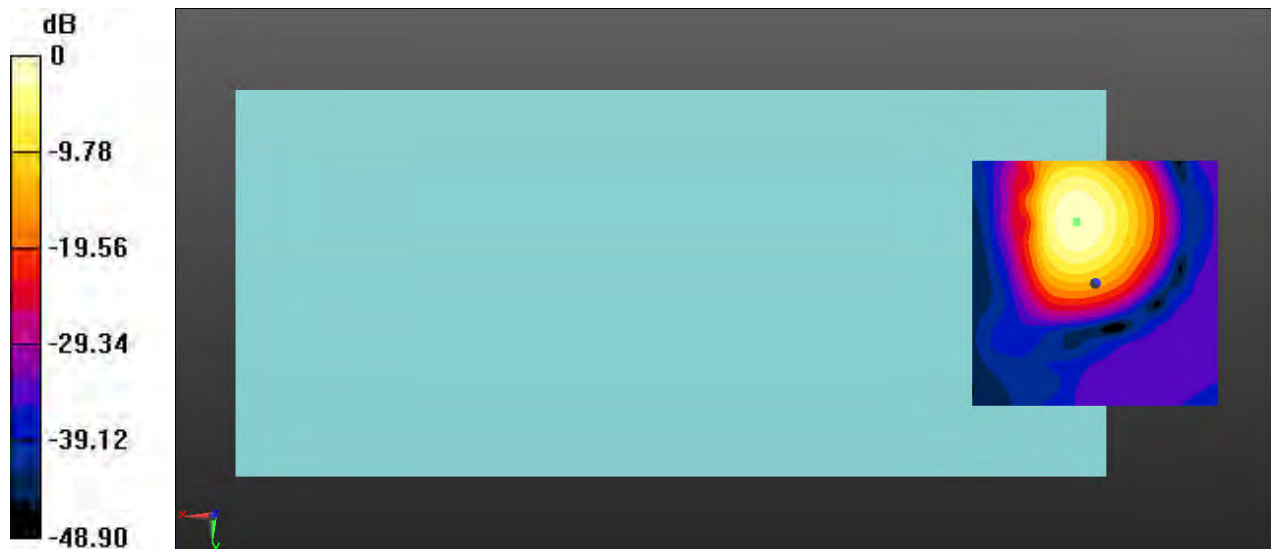

0 dB = 217.8 = 46.76 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 3.7, -12.6, 3.7 mm Diff: 0.62dB





Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 5 10M QPSK 50RB0 20525CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 40.68 dB

ABM1 comp = -6.24 dBA/m

BWC Factor = 0.37 dB

Location: 3.3, -4.2, 3.7 mm

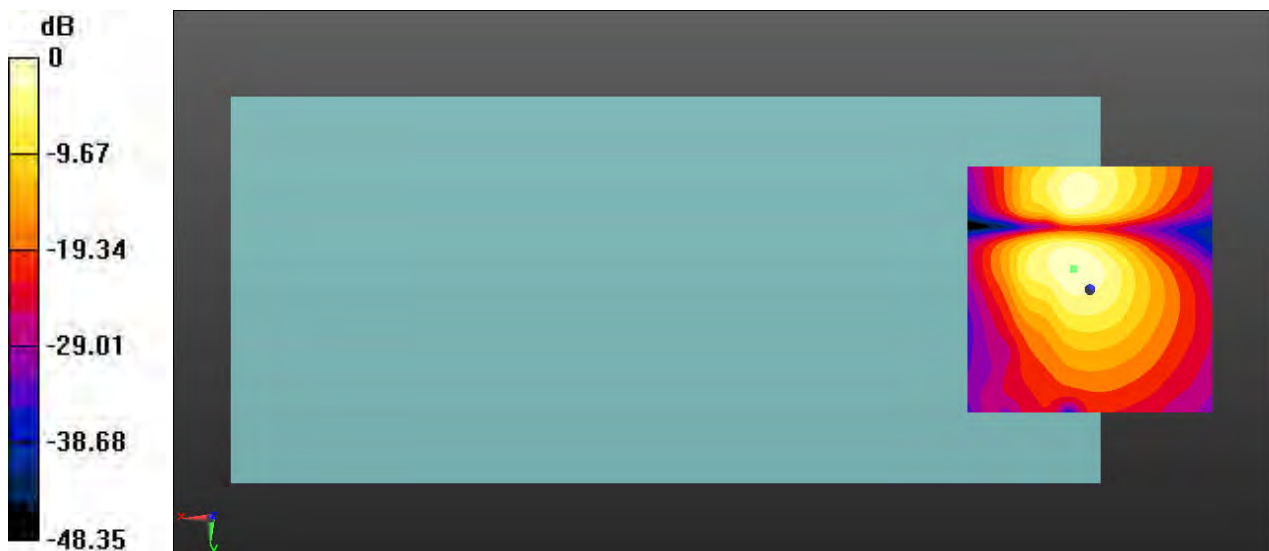

0 dB = 108.2 = 40.68 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 12 10M QPSK 50RB0 23095CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 46.67 dB

ABM1 comp = 0.35 dBA/m

BWC Factor = 0.37 dB


Location: 3.8, -12.9, 3.7 mm

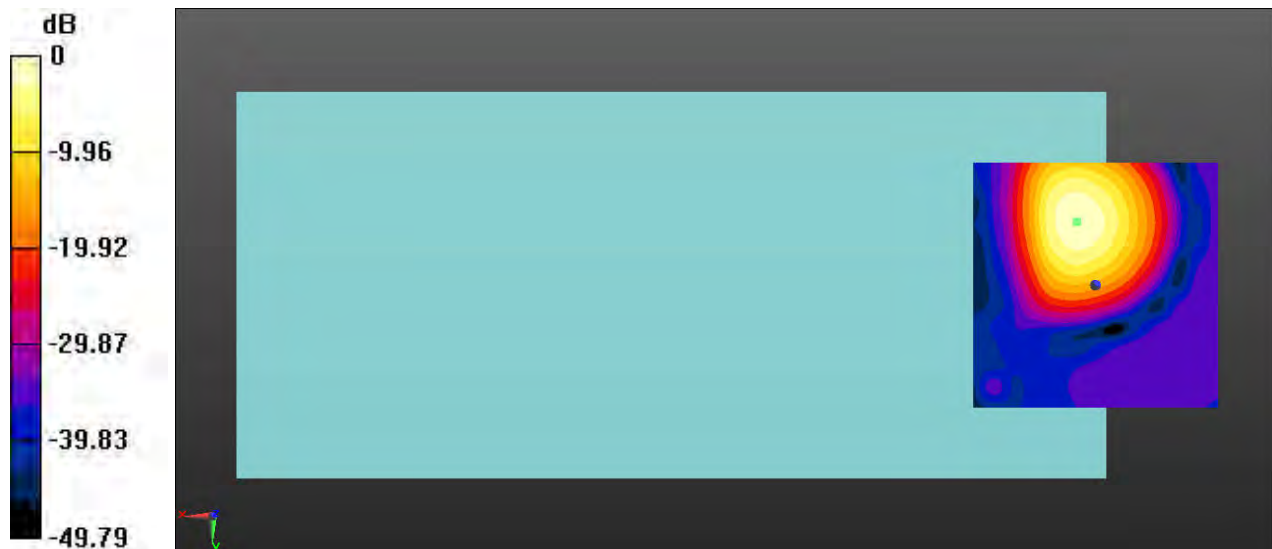

0 dB = 215.4 = 46.67 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 3.8, -12.8, 3.7 mm Diff: 0.66dB

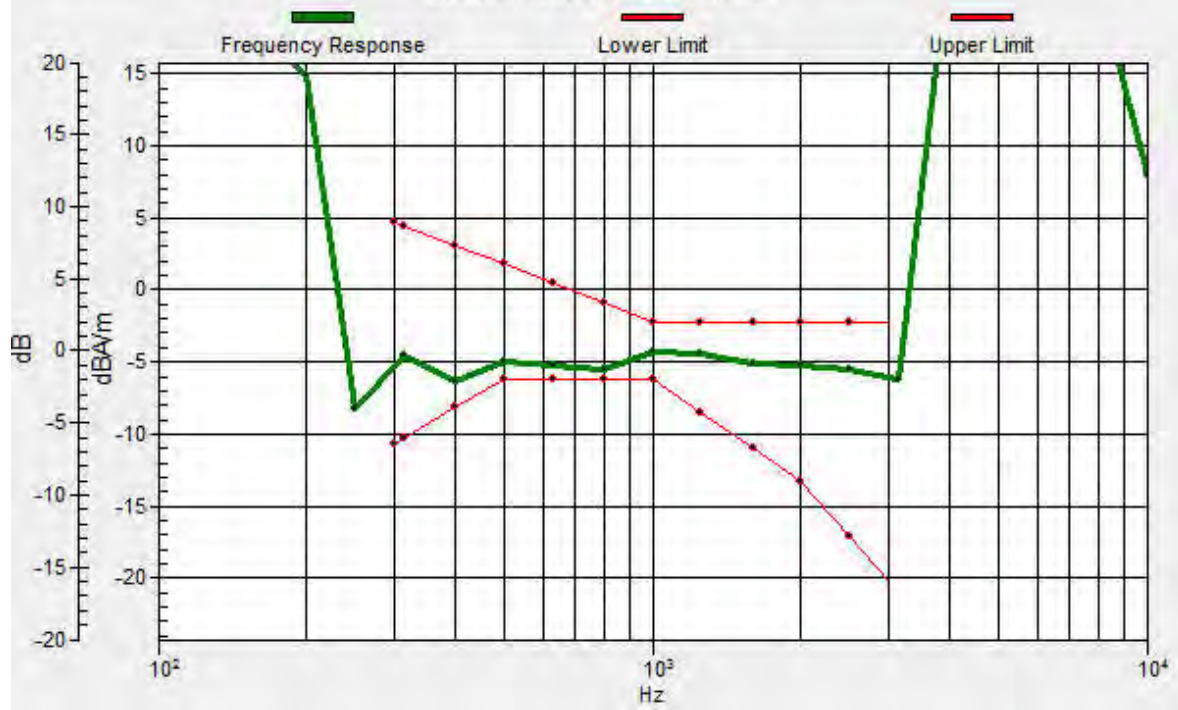

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 12 10M QPSK 50RB0 23095CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 40.54 dB

ABM1 comp = -6.13 dBA/m

BWC Factor = 0.37 dB

Location: 3.8, -4.2, 3.7 mm

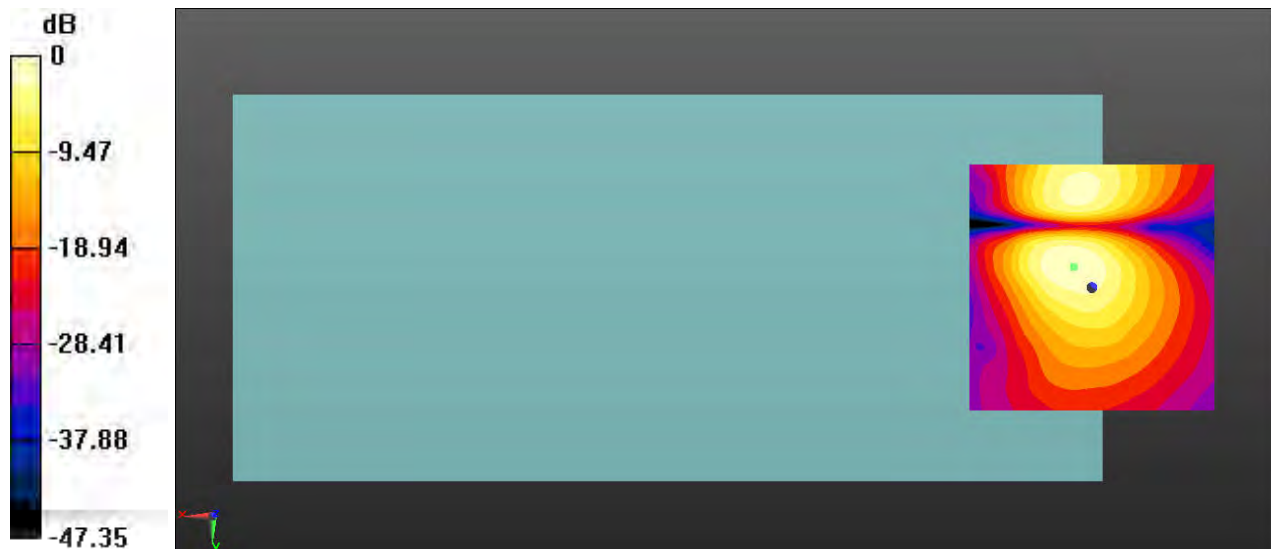

0 dB = 106.4 = 40.54 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 14 10M QPSK 50RB0 23330CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 793 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 47.02 dB

ABM1 comp = 0.40 dBA/m

BWC Factor = 0.37 dB


Location: 3.8, -12.5, 3.7 mm

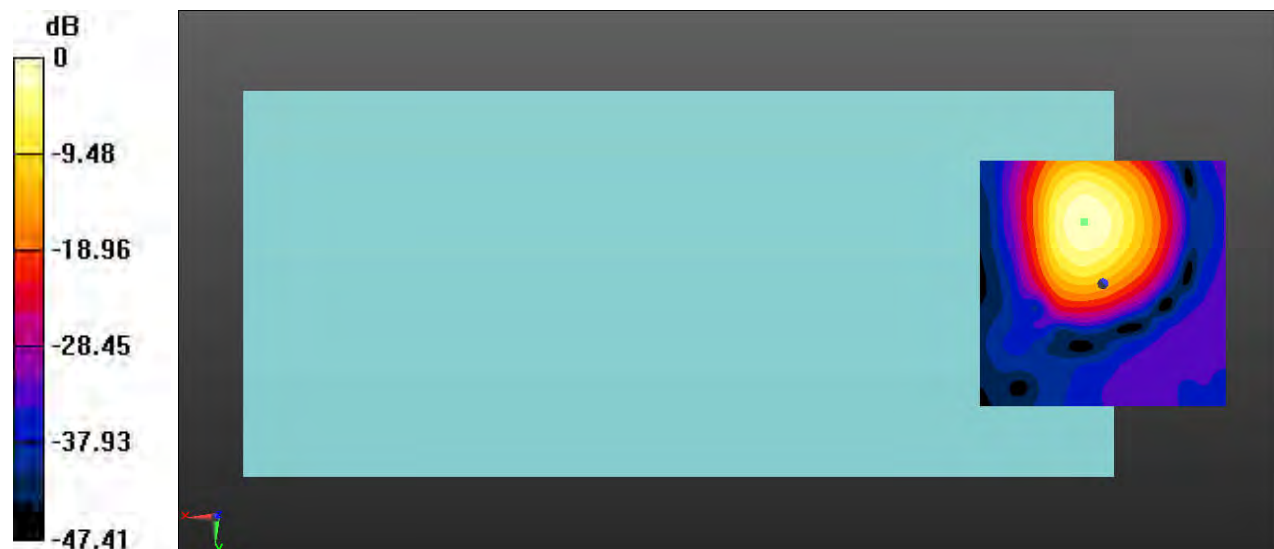

0 dB = 224.4 = 47.02 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 3.7, -12.5, 3.7 mm Diff: 0.21dB

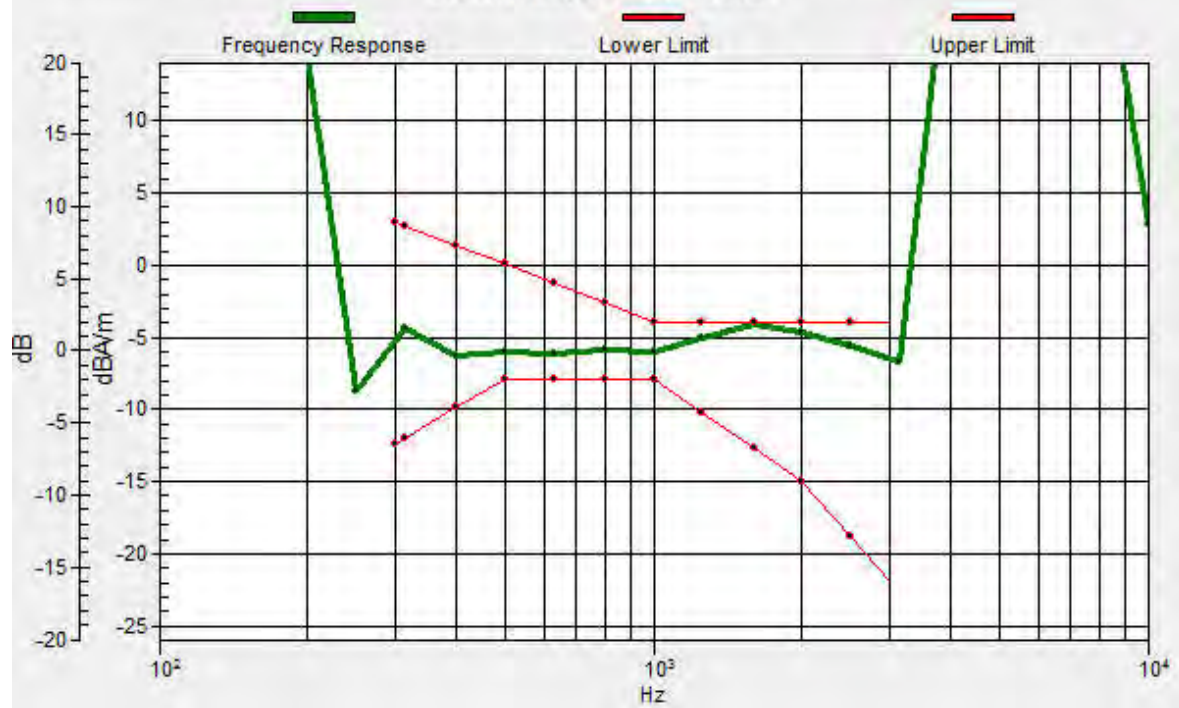

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 14 10M QPSK 50RB0 23330CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 793 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 41.40 dB

ABM1 comp = -5.97 dBA/m

BWC Factor = 0.37 dB

Location: 3.8, -3.8, 3.7 mm

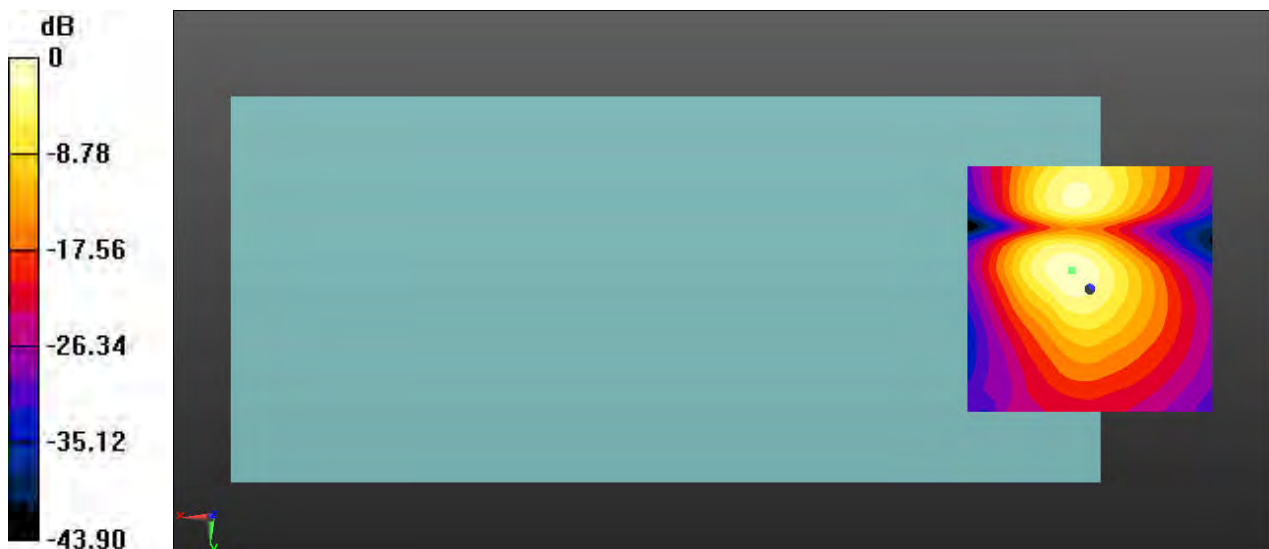

0 dB = 117.5 = 41.40 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 17 10M QPSK 50RB0 23790CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 710 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 47.12 dB

ABM1 comp = 0.39 dBA/m

BWC Factor = 0.37 dB

Location: 3.8, -12.1, 3.7 mm

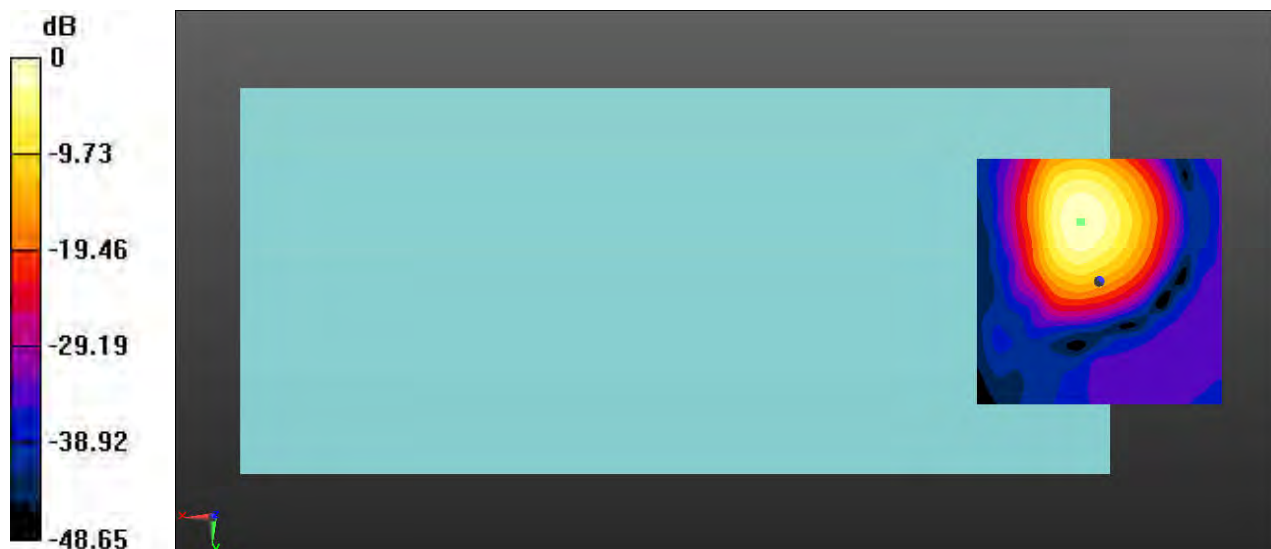


0 dB = 227.0 = 47.12 dB



# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 3.8, -12.1, 3.7 mm Diff: 0.04dB

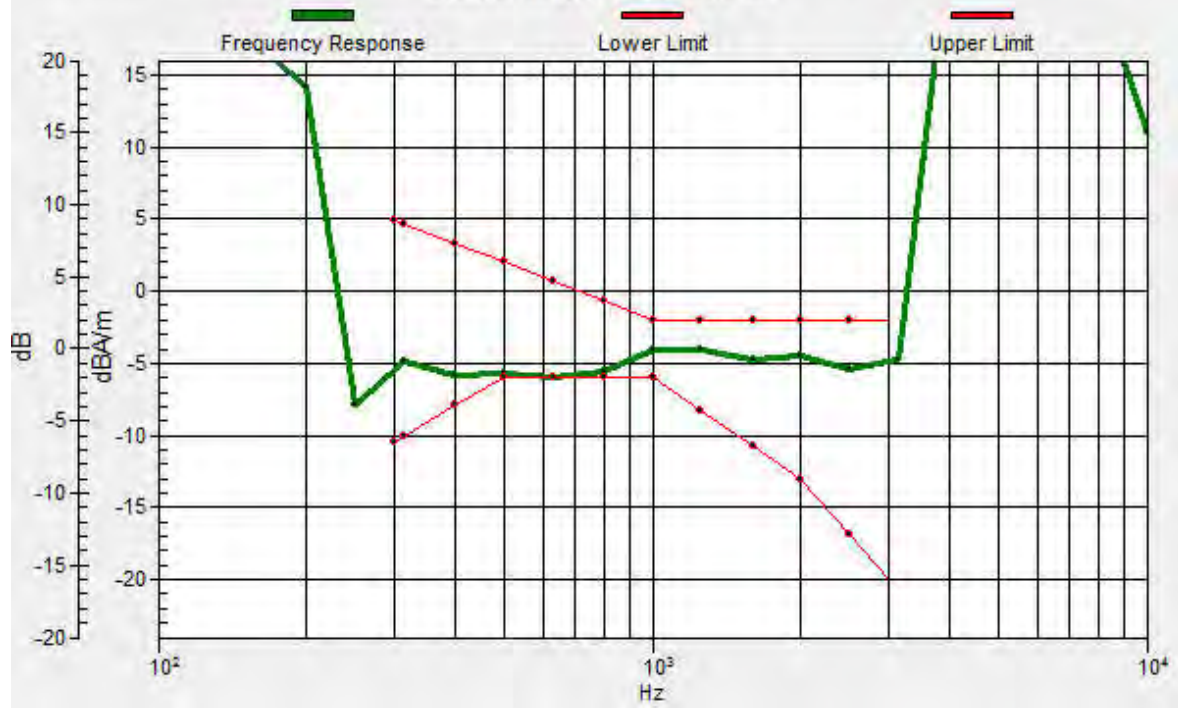

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 17 10M QPSK 50RB0 23790CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 710 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 40.67 dB

ABM1 comp = -5.90 dBA/m

BWC Factor = 0.37 dB

Location: 4.2, -3.8, 3.7 mm

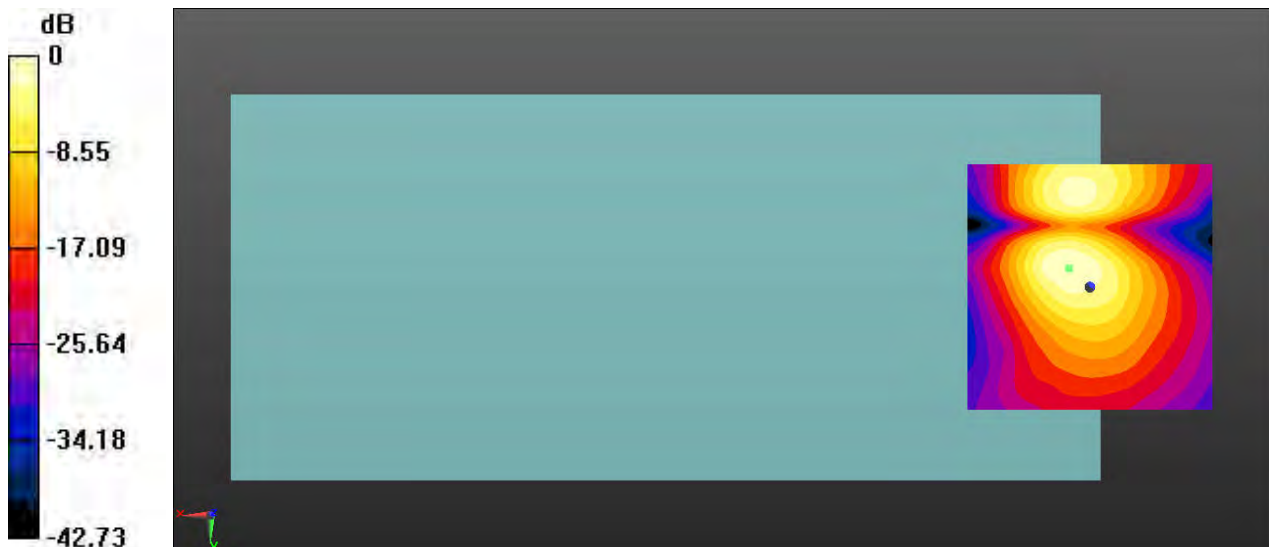

0 dB = 108.0 = 40.67 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 26 15M QPSK 75RB0 26865CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 46.89 dB

ABM1 comp = 0.26 dBA/m

BWC Factor = 0.37 dB


Location: 2.9, -12.5, 3.7 mm

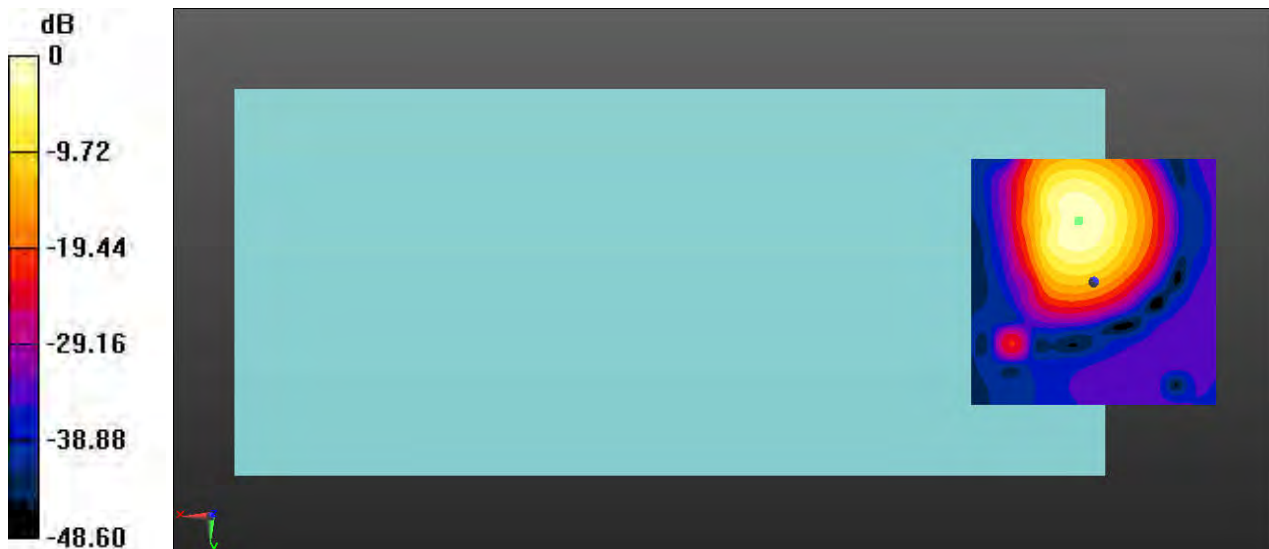

0 dB = 221.2 = 46.89 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 3.1, -12.3, 3.7 mm Diff: 0.99dB

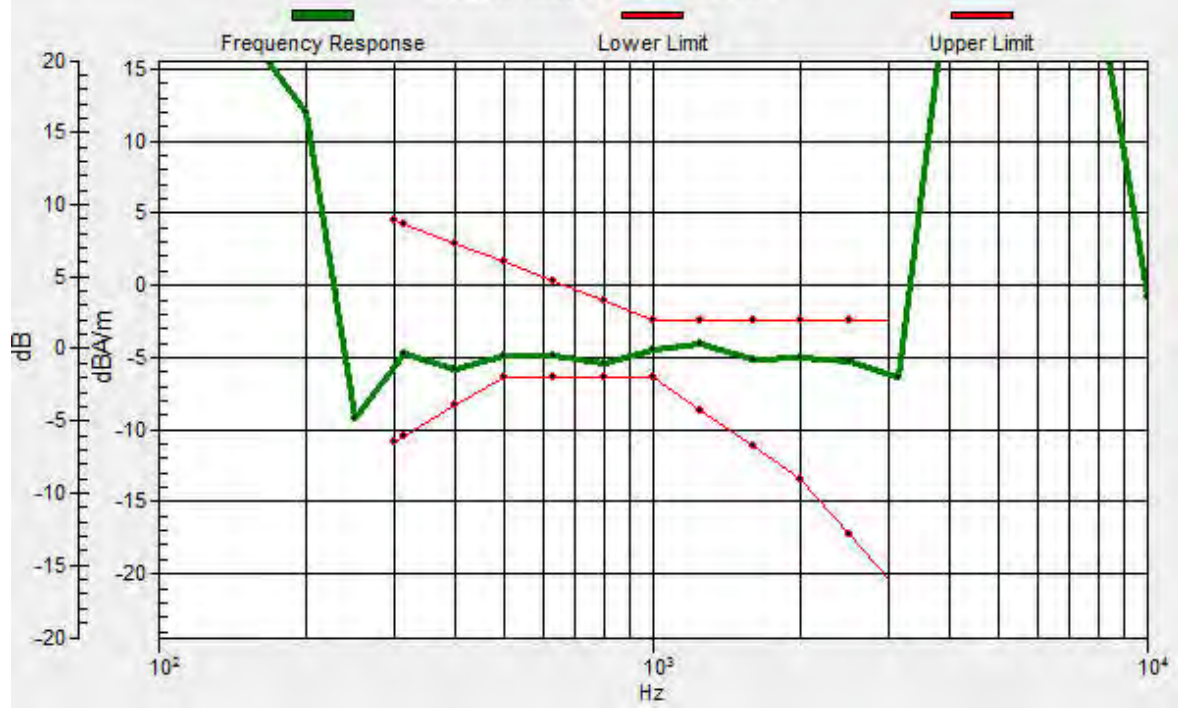

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 26 15M QPSK 75RB0 26865CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 41.39 dB

ABM1 comp = -5.77 dBA/m

BWC Factor = 0.37 dB

Location: 4.2, -3.8, 3.7 mm

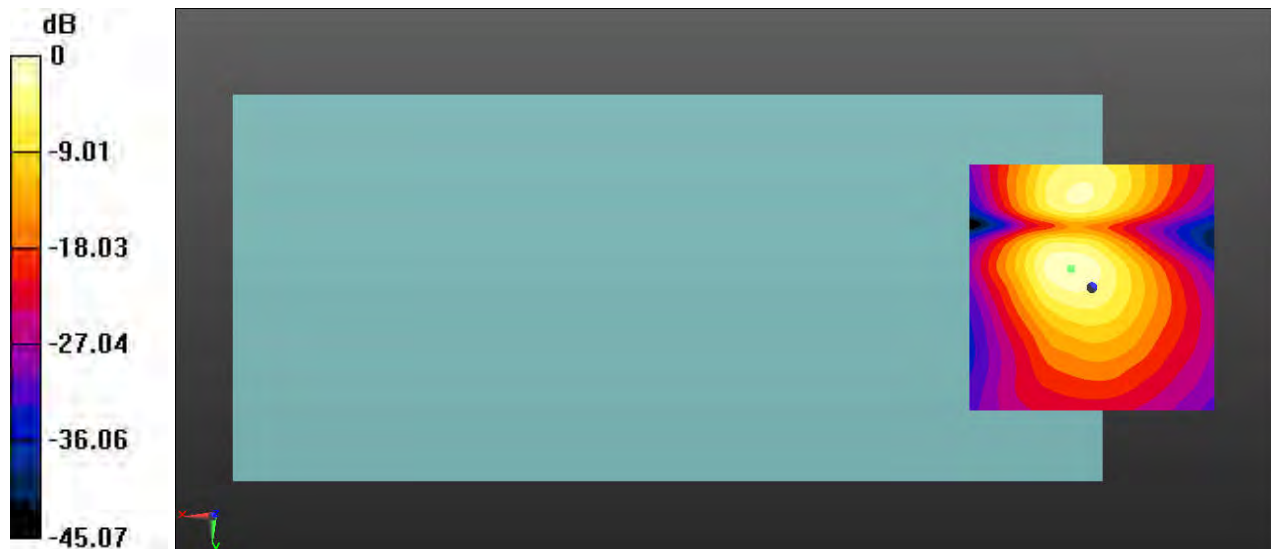

0 dB = 117.3 = 41.39 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 30 10M QPSK 50RB0 27710CH

DUT: U695DS; Type: Smart Phone; Serial: 867222060001254

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


(121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 42.08 dB

ABM1 comp = -4.16 dBA/m

BWC Factor = 0.37 dB


Location: 3.3, -10.8, 3.7 mm

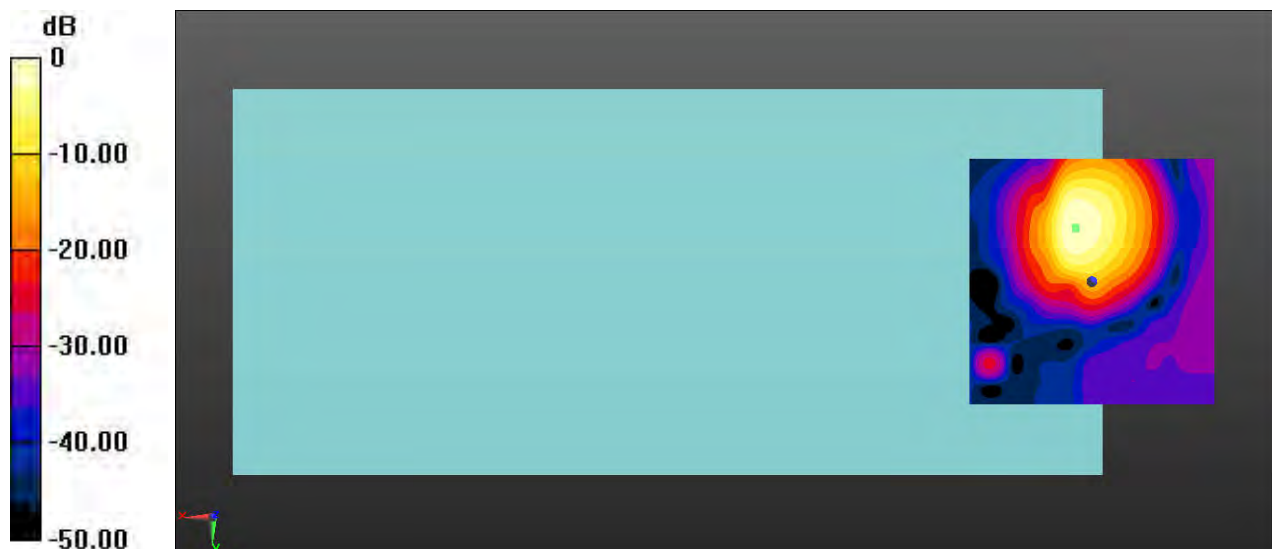

0 dB = 127.0 = 42.08 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 3.2, -11, 3.7 mm Diff: 0.94dB

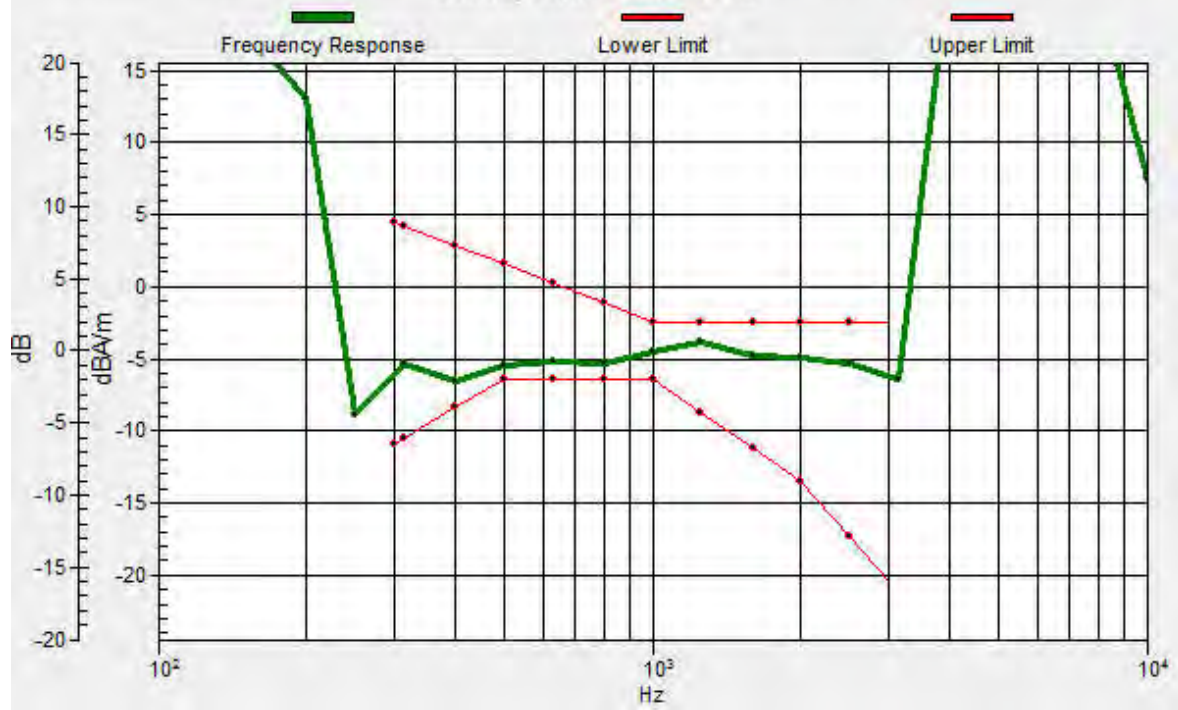

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 30 10M QPSK 50RB0 27710CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 39.16 dB

ABM1 comp = -6.27 dBA/m

BWC Factor = 0.37 dB

Location: 3.3, -2.9, 3.7 mm

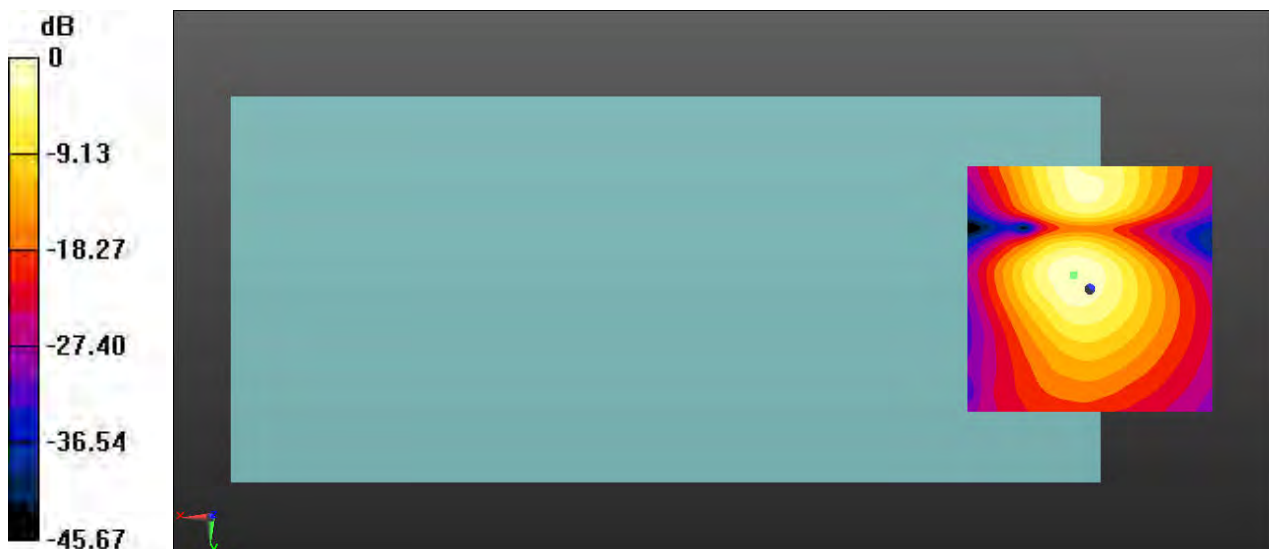

0 dB = 90.75 = 39.16 dB



Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 66 20M QPSK 100RB0 132322CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 46.23 dB

ABM1 comp = 0.40 dBA/m

BWC Factor = 0.36 dB


Location: 4.2, -11.7, 3.7 mm

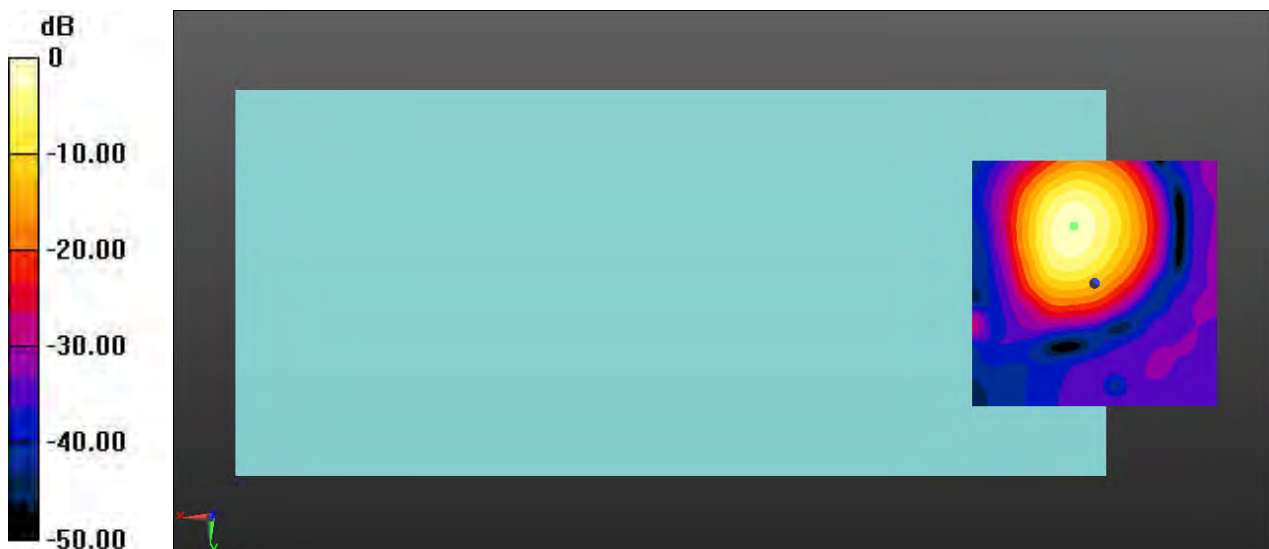

0 dB = 204.8 = 46.23 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 4.2, -11.5, 3.7 mm Diff: 0.75dB

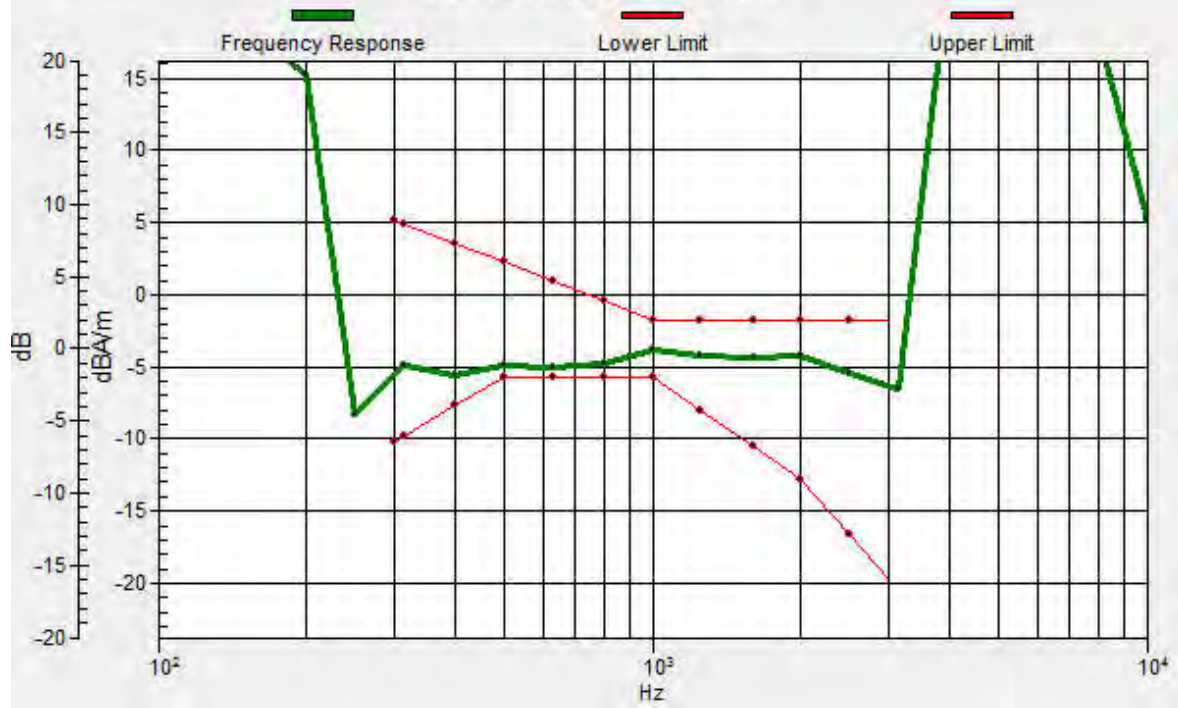

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 66 20M QPSK 100RB0 132322CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 38.59 dB

ABM1 comp = -7.18 dBA/m

BWC Factor = 0.36 dB

Location: 3.8, -2.9, 3.7 mm

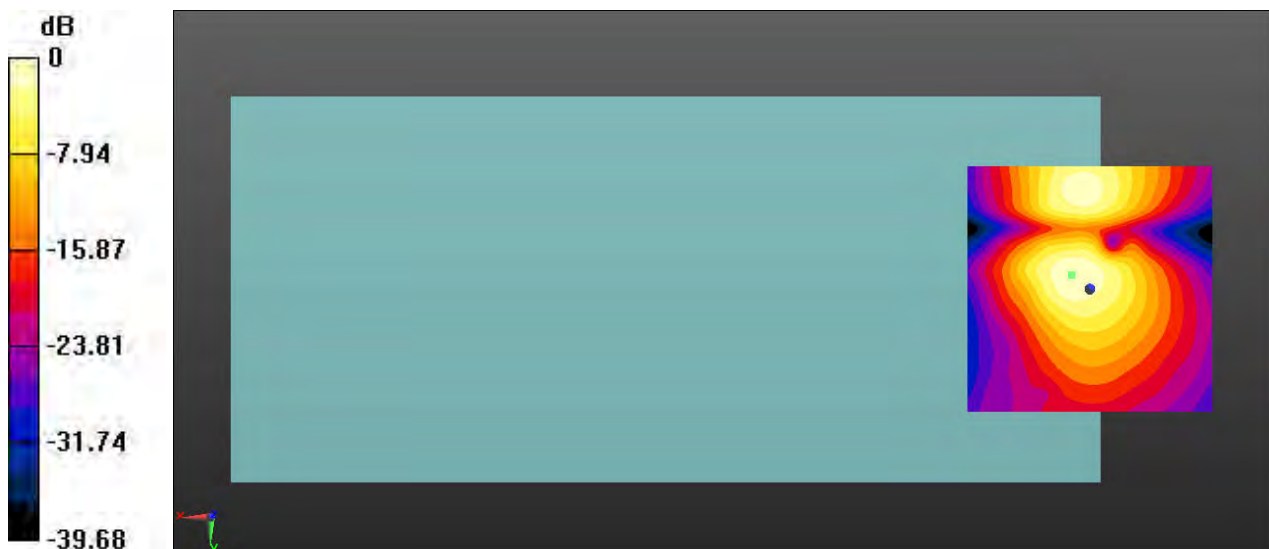

0 dB = 85.04 = 38.59 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 71 20M QPSK 100RB0 133297CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 680.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 45.56 dB

ABM1 comp = -0.28 dBA/m

BWC Factor = 0.37 dB


Location: 3.8, -9.6, 3.7 mm

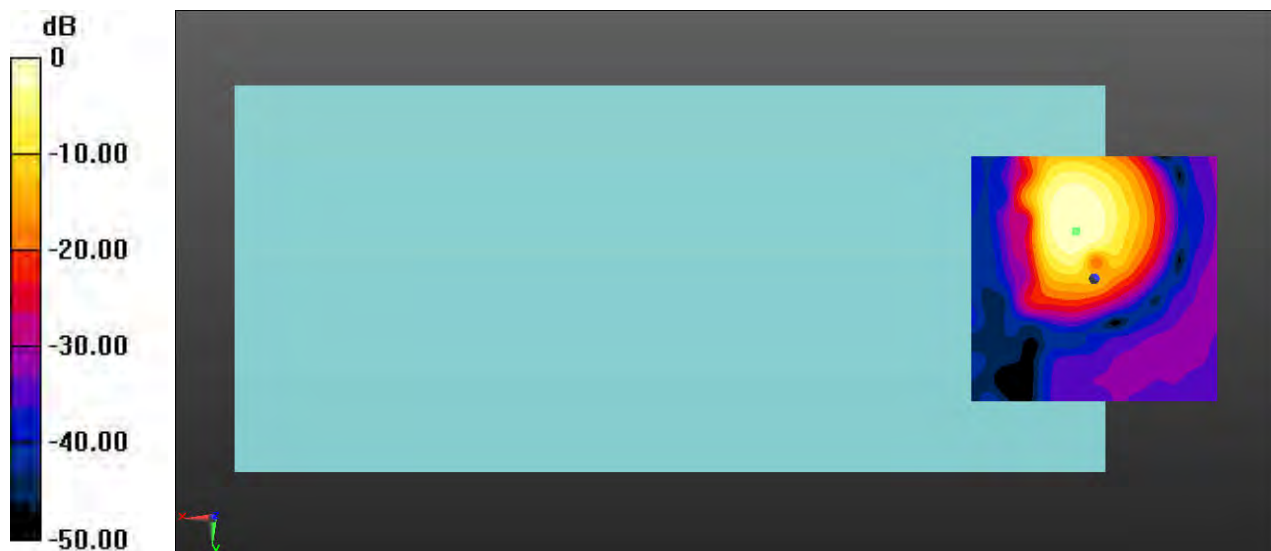

0 dB = 189.7 = 45.56 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 3.5, -9.7, 3.7 mm Diff: 1.18dB

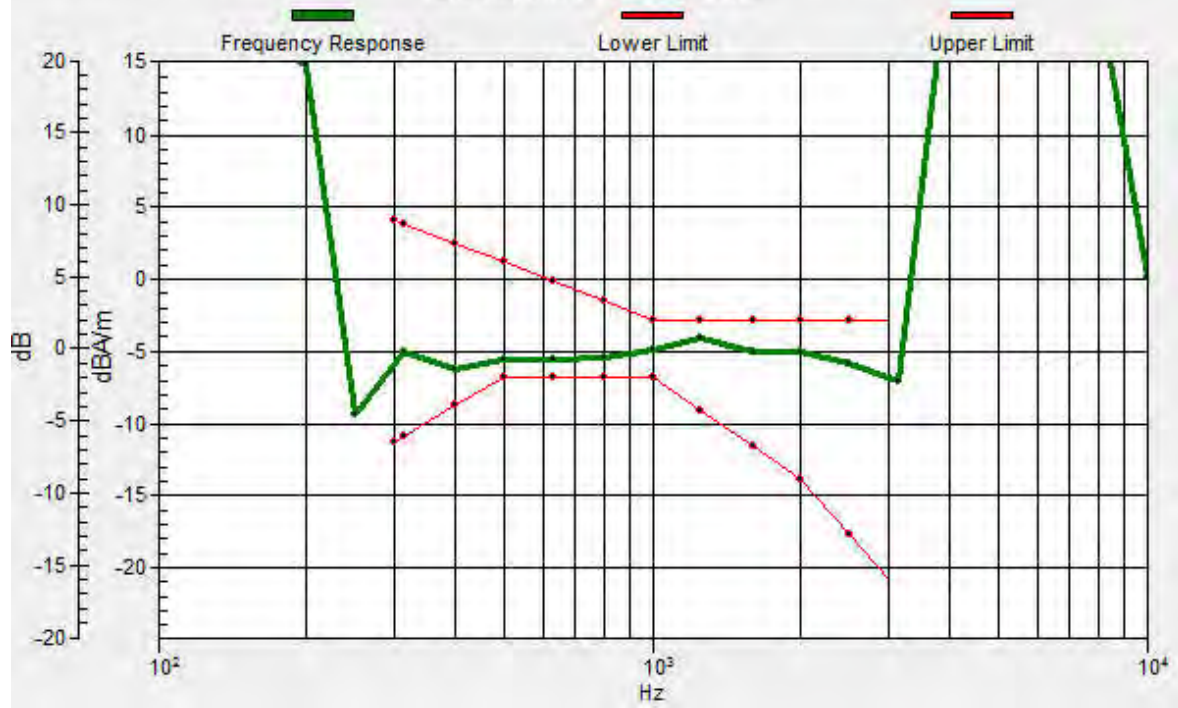

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 71 20M QPSK 100RB0 133297CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 680.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 39.84 dB

ABM1 comp = -6.86 dBA/m

BWC Factor = 0.37 dB

Location: 1.7, -3.3, 3.7 mm

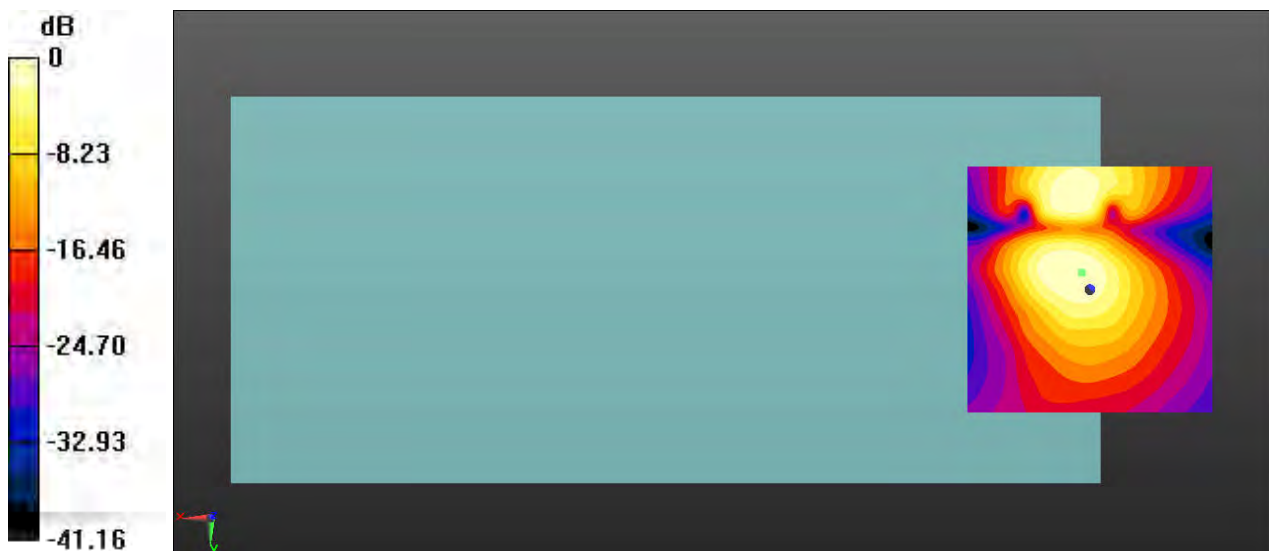

0 dB = 98.21 = 39.84 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 48 20M QPSK 100RB0 55830CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3609 MHz; Duty Cycle: 1:1.57906

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 40.24 dB

ABM1 comp = -0.06 dBA/m

BWC Factor = 0.38 dB


Location: 3.8, -10.8, 3.7 mm

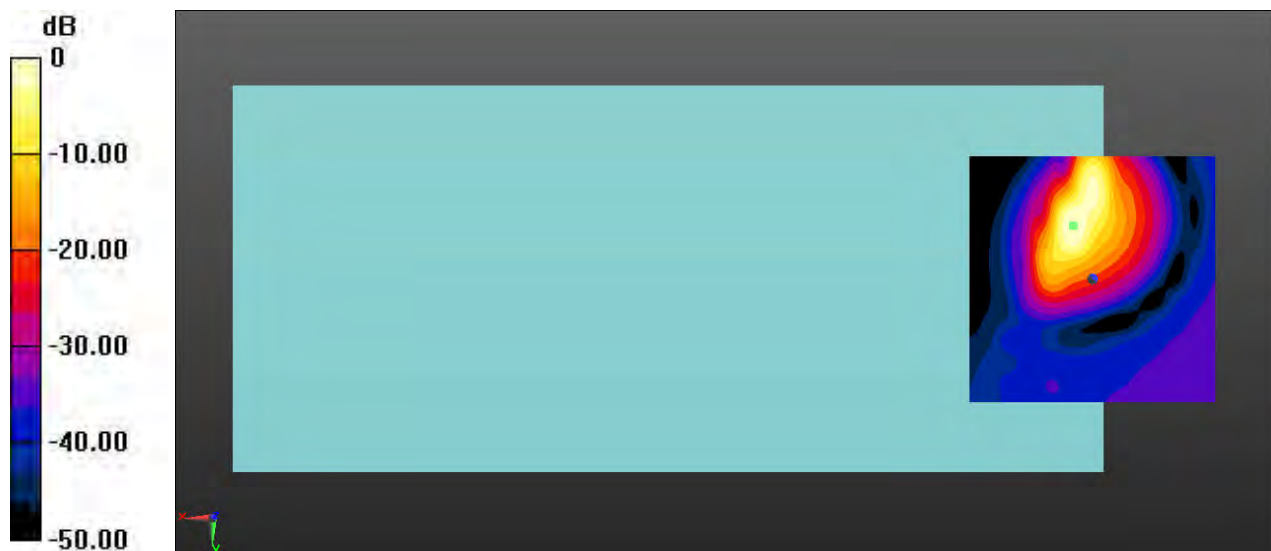

0 dB = 102.8 = 40.24 dB

# General Scans/z (axial) wideband at best S/N 3/ABM Freq Resp(x,y,z,f)

Loc: 4, -11, 3.7 mm Diff: 1.05dB

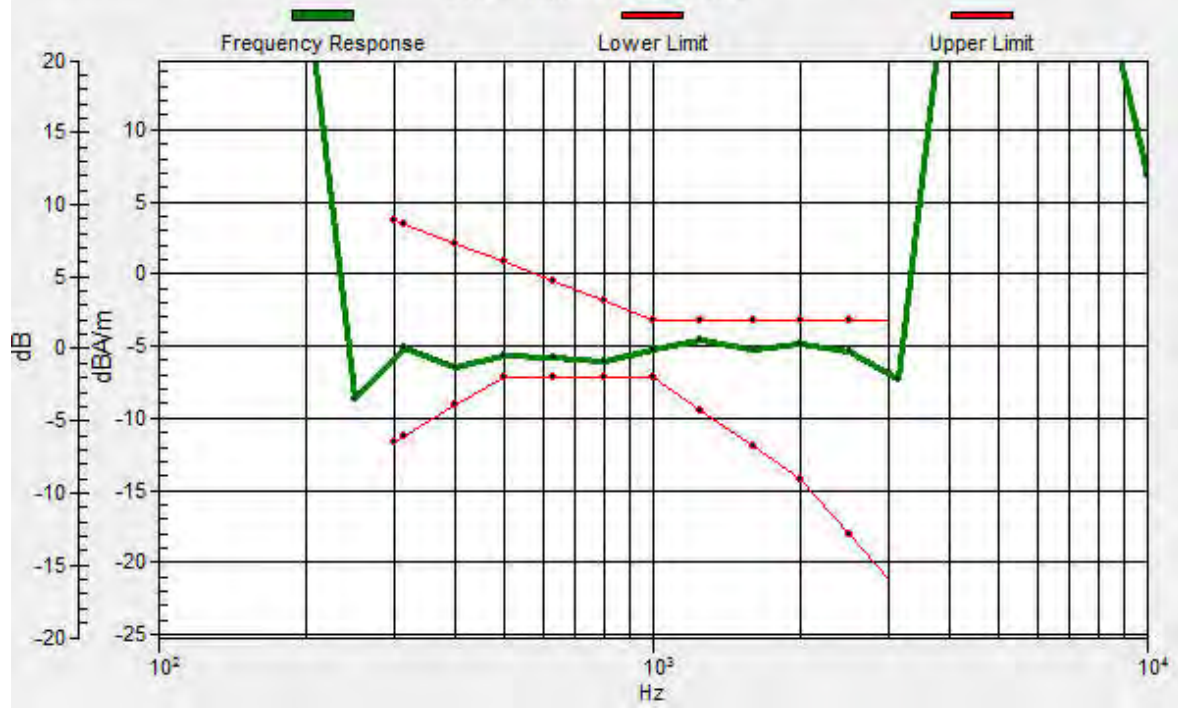



Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-LTE Band 48 20M QPSK 100RB0 55830CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3609 MHz;Duty Cycle: 1:1.57906

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 33.05 dB

ABM1 comp = -9.56 dBA/m

BWC Factor = 0.38 dB

Location: -0.4, -25, 3.7 mm

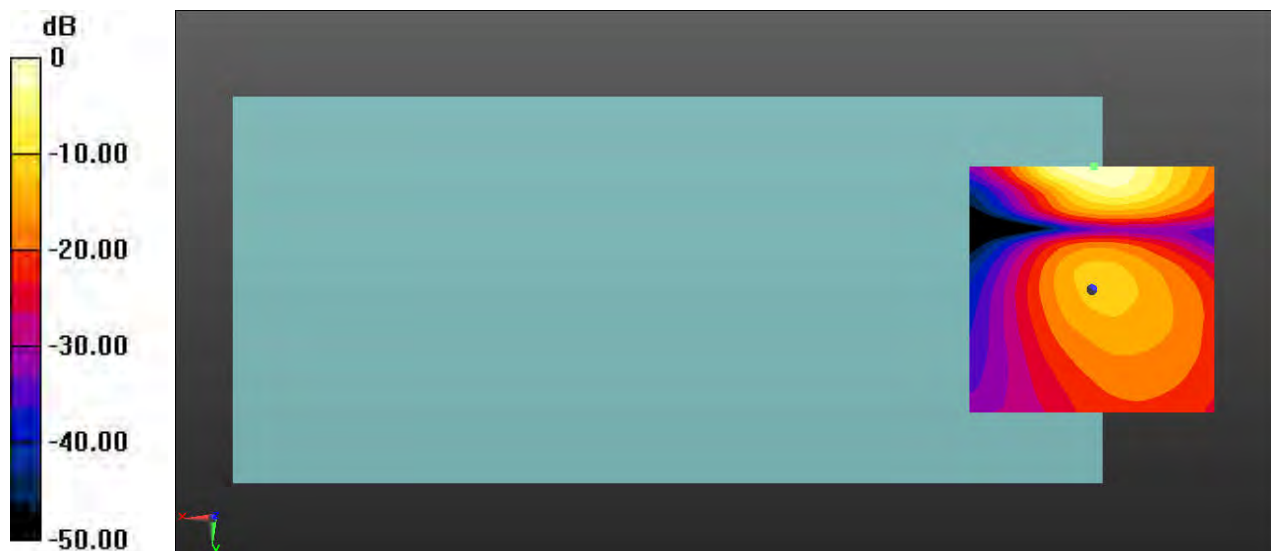

0 dB = 44.92 = 33.05 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WiFi 2.4G 802.11b 6CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 38.50 dB

ABM1 comp = 1.50 dBA/m

BWC Factor = 0.86 dB


Location: 8.8, -12.1, 3.7 mm

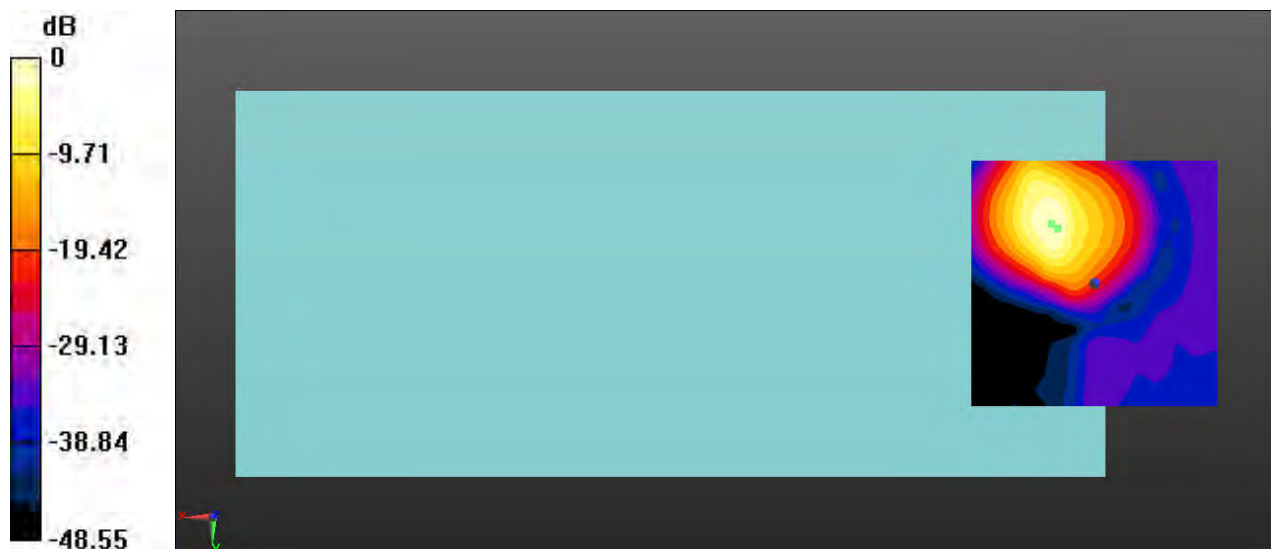

0 dB = 84.15 = 38.50 dB

# General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 7.4, -11.2, 3.7 mm Diff: 1.95dB

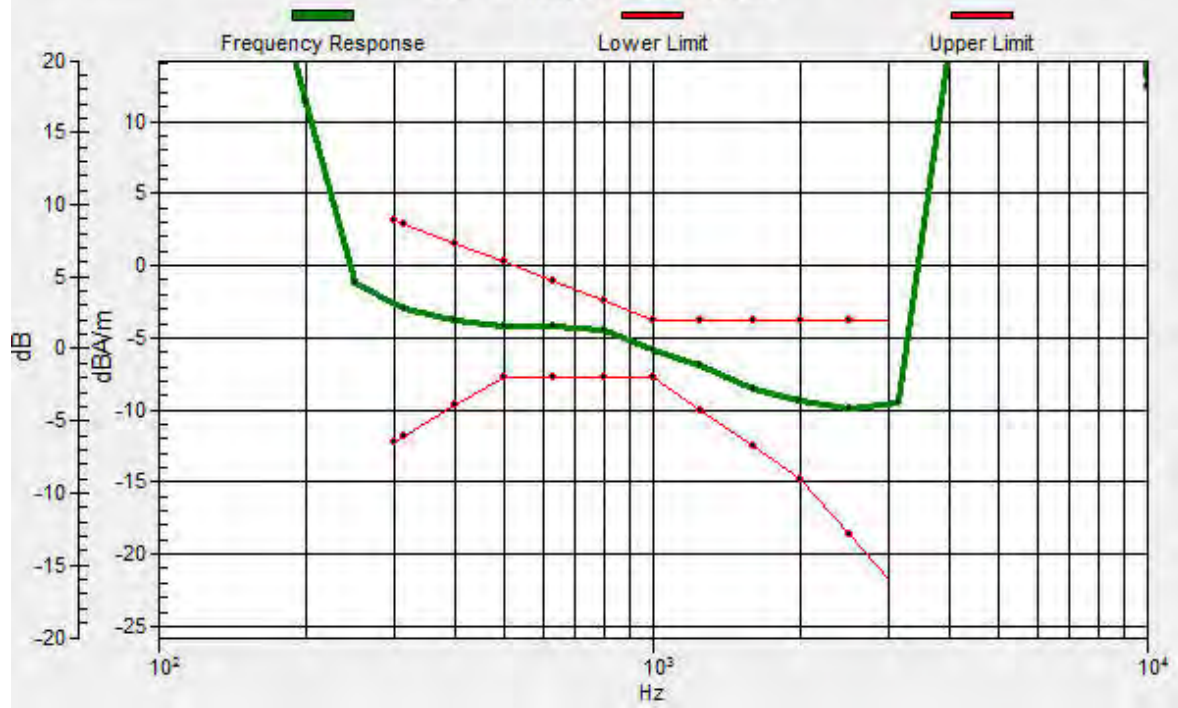

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WiFi 2.4G 802.11b 6CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 24.62 dB

ABM1 comp = -15.29 dBA/m

BWC Factor = 0.86 dB

Location: 10.8, 12.5, 3.7 mm

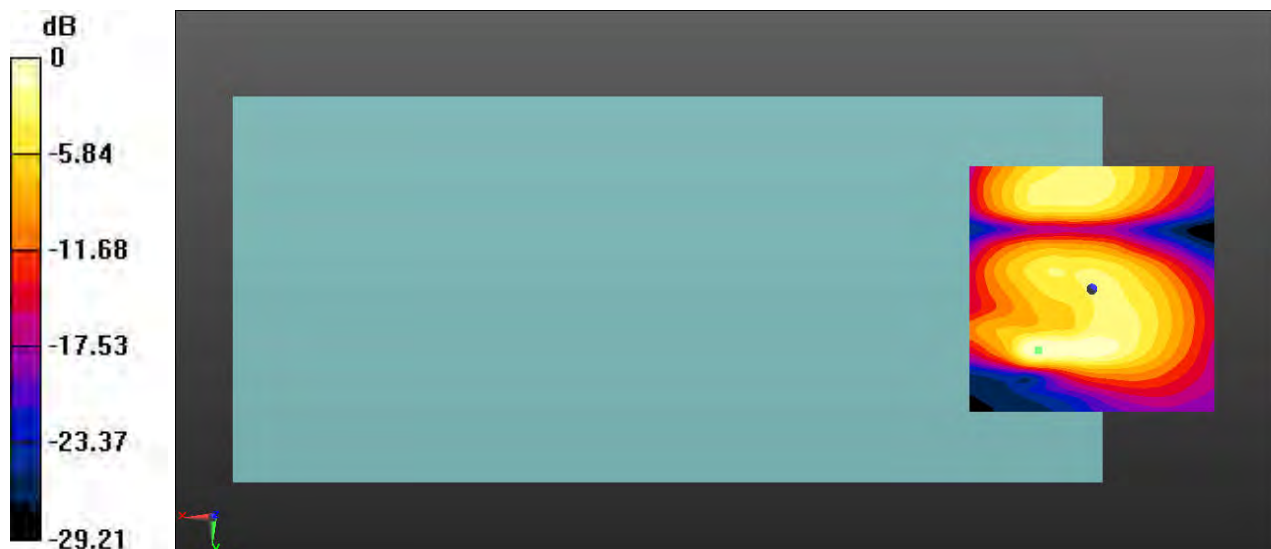

0 dB = 17.02 = 24.62 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WiFi 5G 802.11a 40CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 38.12 dB

ABM1 comp = 2.92 dBA/m

BWC Factor = 0.86 dB


Location: 11.3, -12.9, 3.7 mm

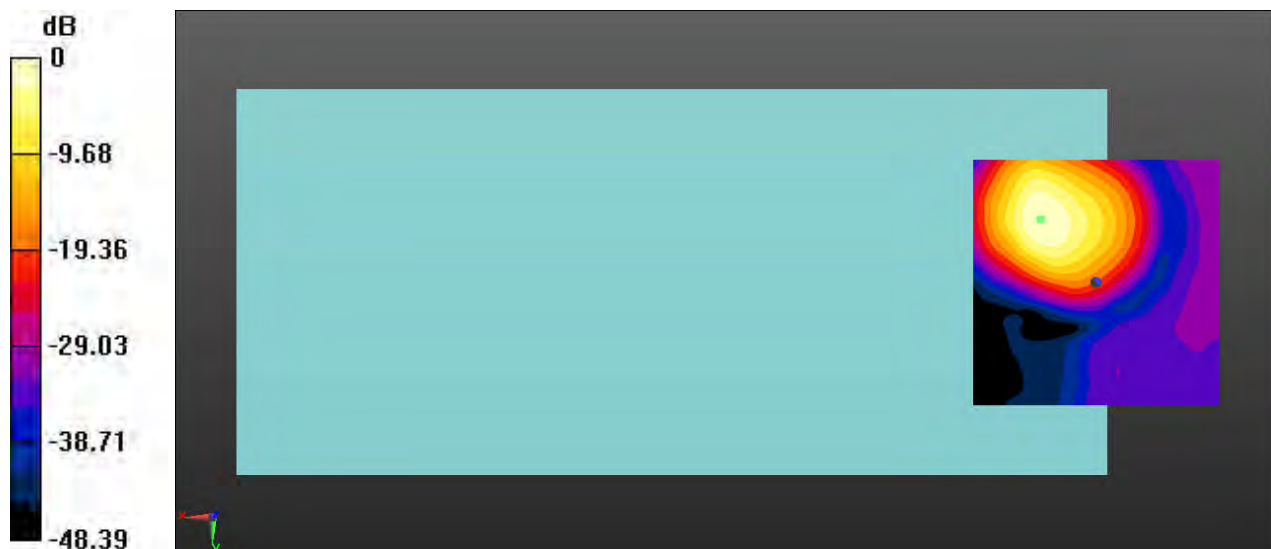

0 dB = 80.52 = 38.12 dB

# General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 11.3, -12.8, 3.7 mm Diff: 2dB

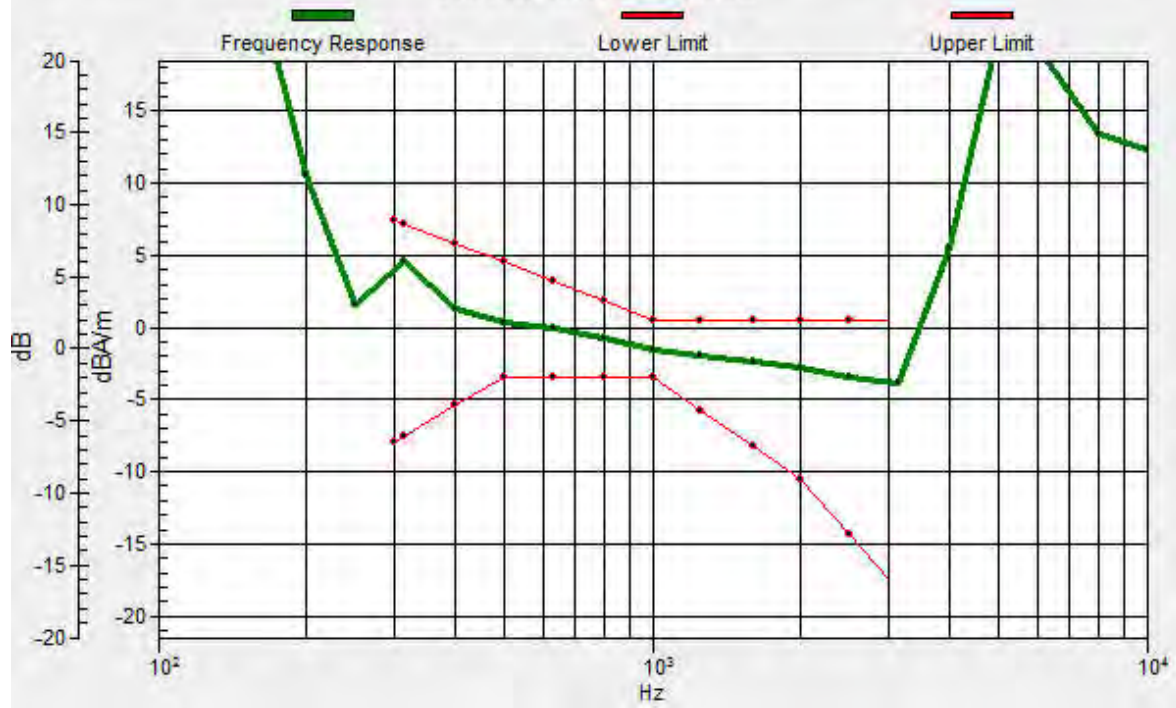

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WiFi 5G 802.11a 40CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 26.43 dB

ABM1 comp = -15.27 dBA/m

BWC Factor = 0.86 dB

Location: 11.3, 12.5, 3.7 mm

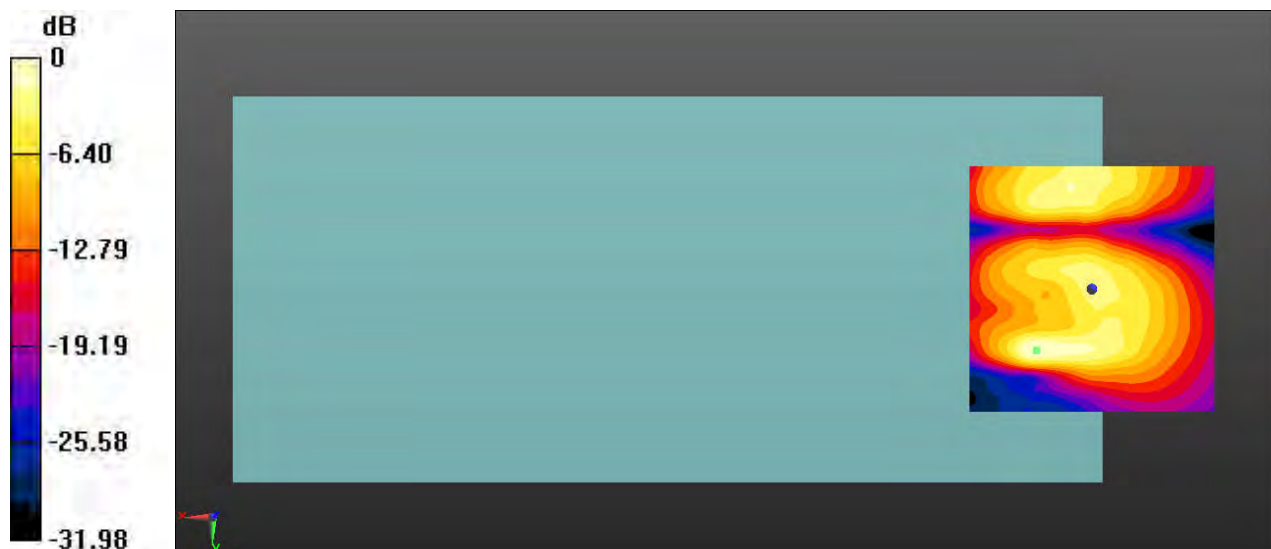

0 dB = 20.96 = 26.43 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WiFi 5G 802.11a 60CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5300 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 42.27 dB

ABM1 comp = 3.13 dBA/m

BWC Factor = 0.87 dB

Location: 11.7, -12.5, 3.7 mm

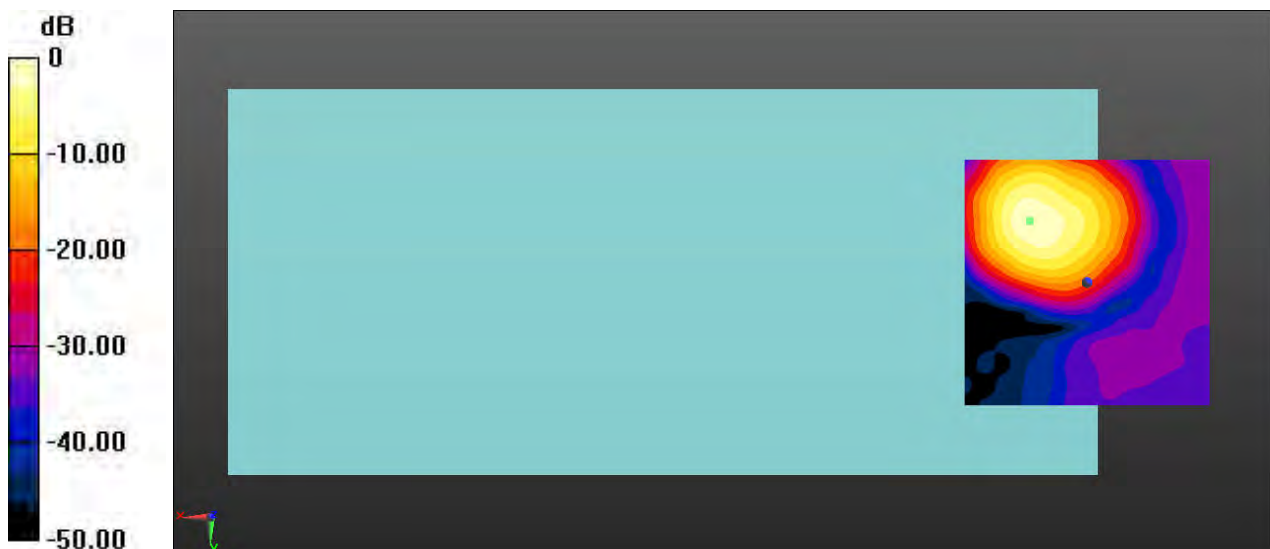


0 dB = 129.8 = 42.27 dB



# General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 11.6, -12.5, 3.7 mm Diff: 2dB

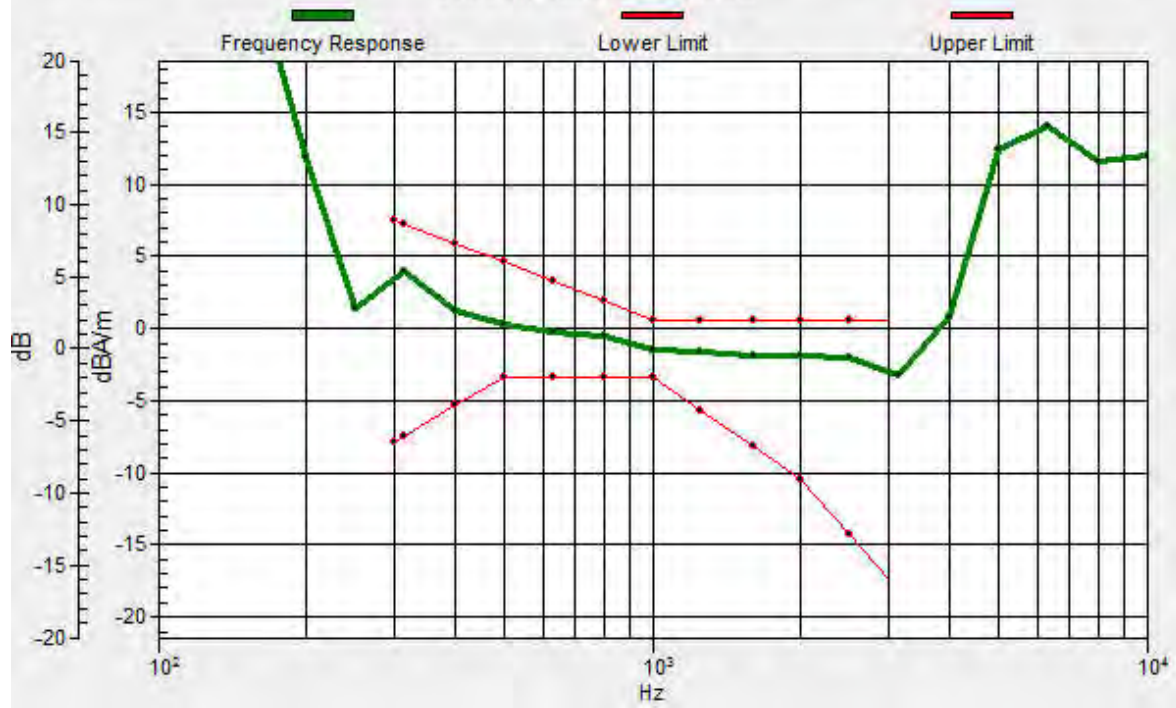

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WiFi 5G 802.11a 60CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5300 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 31.40 dB

ABM1 comp = -6.73 dBA/m

BWC Factor = 0.87 dB

Location: 4.6, -20.4, 3.7 mm

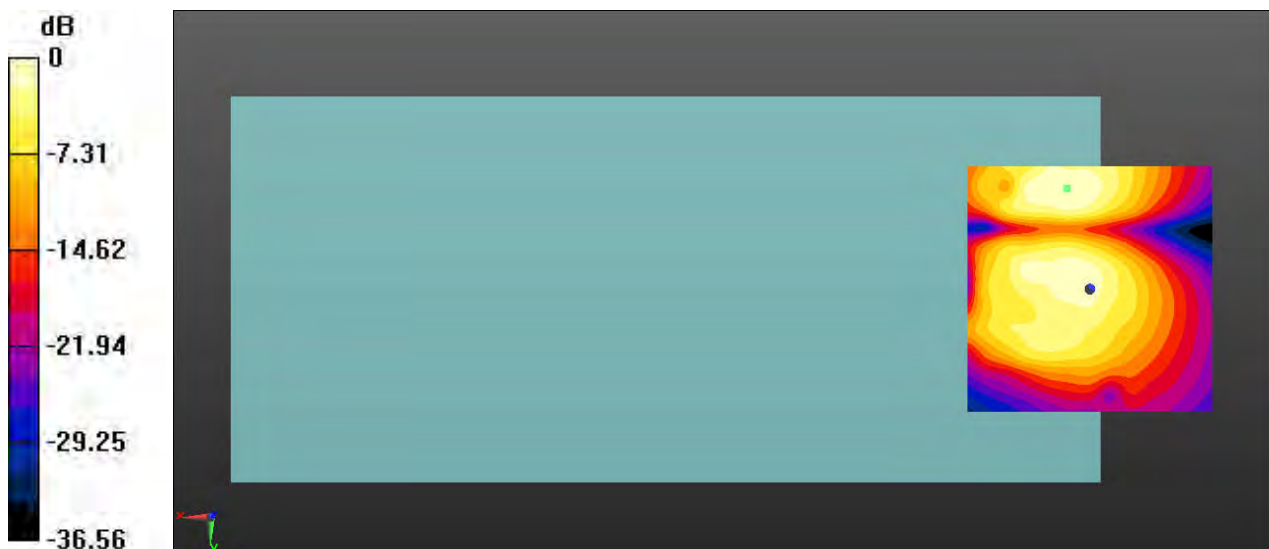

0 dB = 37.14 = 31.40 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WiFi 5G 802.11a 124CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5620 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 38.90 dB

ABM1 comp = 2.94 dBA/m

BWC Factor = 0.87 dB

Location: 11.3, -12.9, 3.7 mm

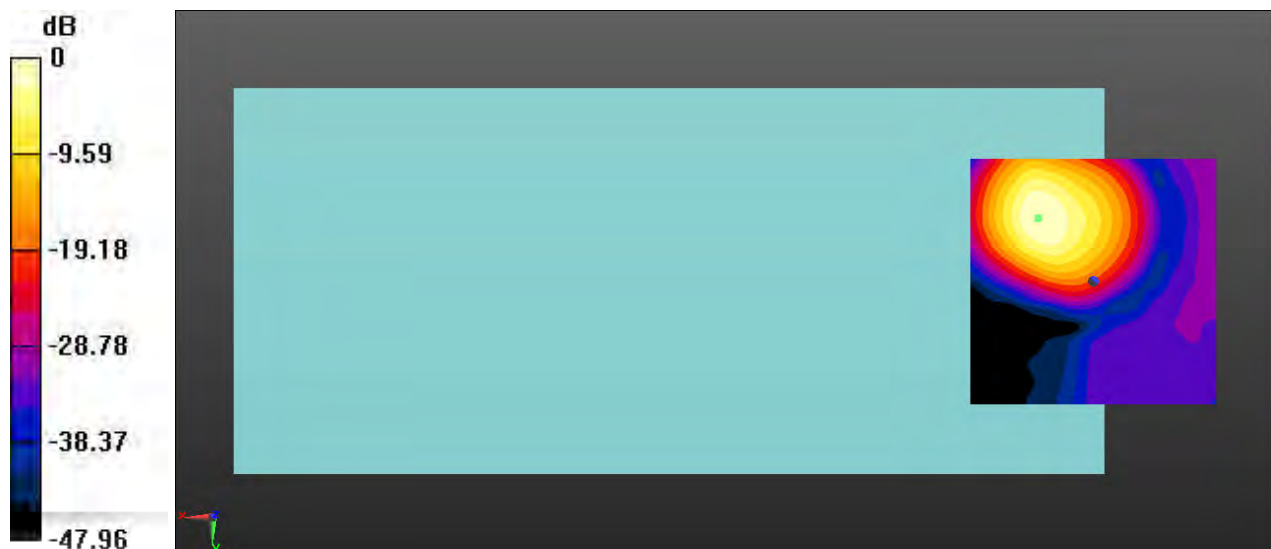

0 dB = 88.10 = 38.90 dB

# General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 11.1, -12.8, 3.7 mm Diff: 2dB



Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WiFi 5G 802.11a 124CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5620 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 26.71 dB

ABM1 comp = -15.00 dBA/m

BWC Factor = 0.87 dB

Location: 10.8, 12.1, 3.7 mm

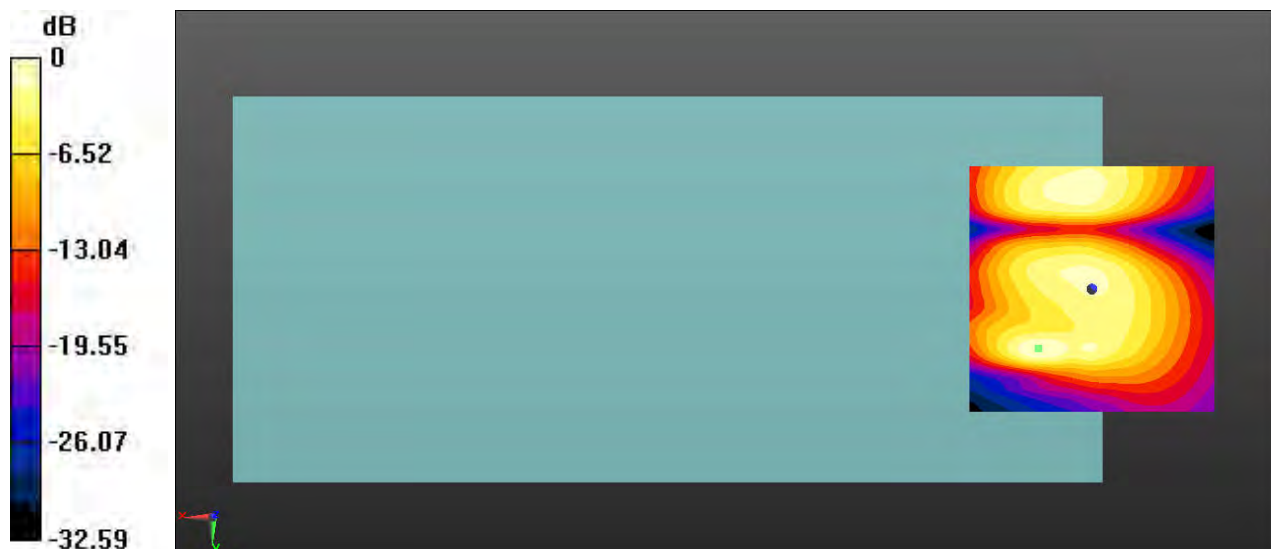

0 dB = 21.65 = 26.71 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WiFi 5G 802.11a 157CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 41.99 dB

ABM1 comp = 3.20 dBA/m

BWC Factor = 0.87 dB


Location: 11.7, -12.5, 3.7 mm

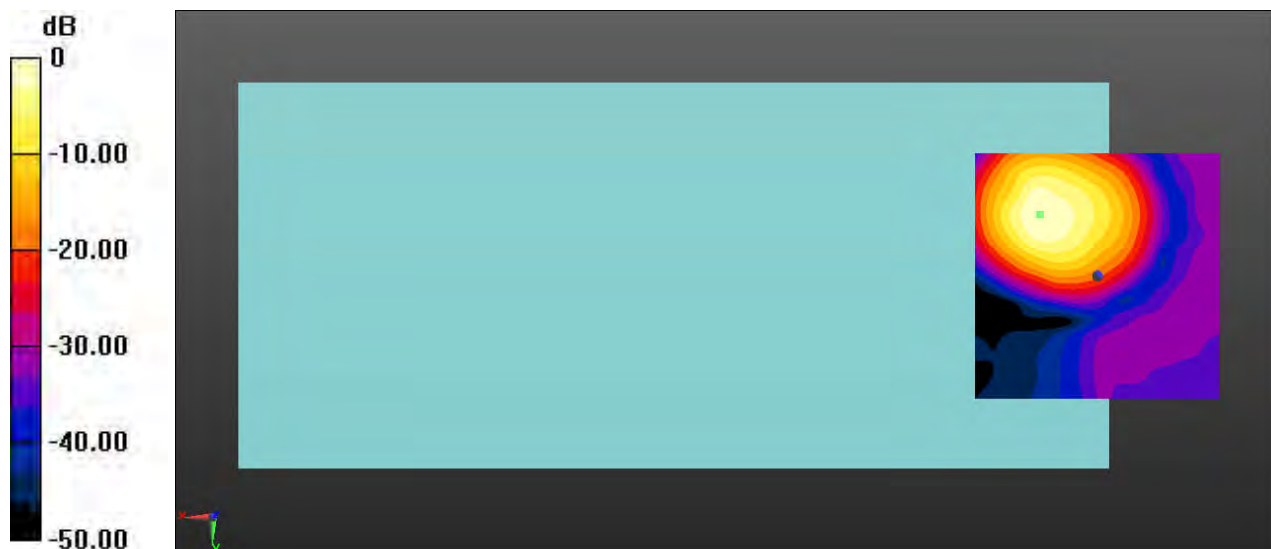

0 dB = 125.7 = 41.99 dB

# General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 11.6, -12.5, 3.7 mm Diff: 2dB

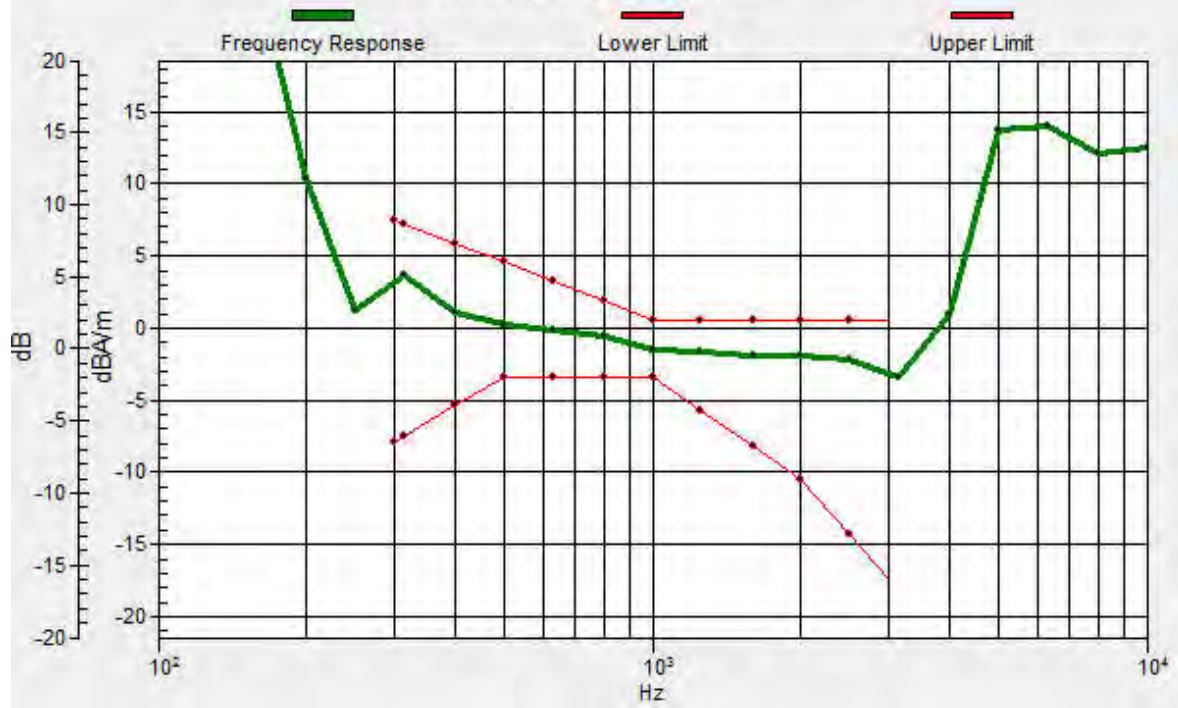

Test Laboratory: SGS-SAR Lab

## U695DS HAC-T-Coil-WiFi 5G 802.11a 157CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5785 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 30.63 dB

ABM1 comp = -5.88 dBA/m

BWC Factor = 0.87 dB

Location: 6.3, -3.3, 3.7 mm

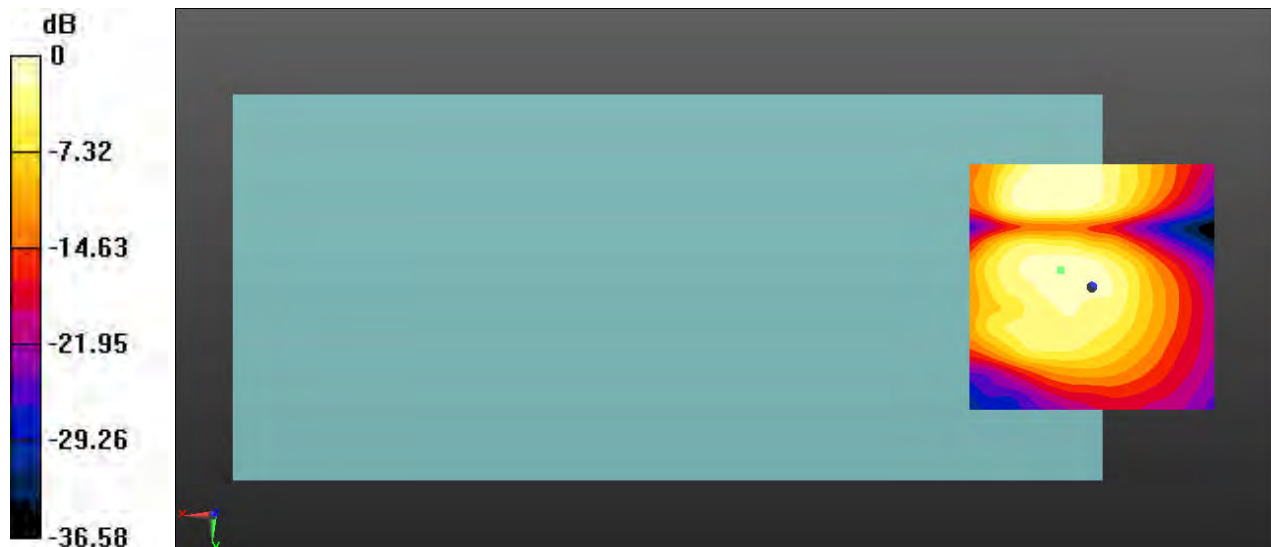

0 dB = 34.01 = 30.63 dB



Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-GSM850 EGPRS 4TS 190CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.08

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 45.02 dB

ABM1 comp = 4.91 dBA/m

BWC Factor = 0.84 dB


Location: 4.6, -12.1, 3.7 mm

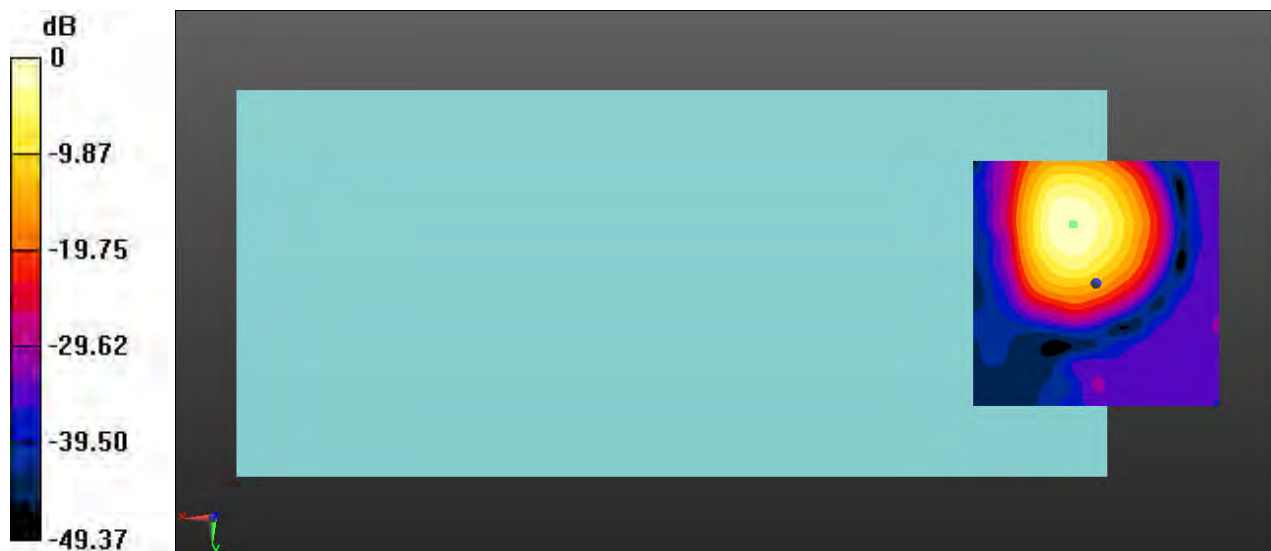

0 dB = 178.1 = 45.02 dB

# General Scans/z (axial) wideband at best S/N 6/ABM Freq Resp(x,y,z,f)

Loc: 4.7, -12, 3.7 mm Diff: 0.02dB

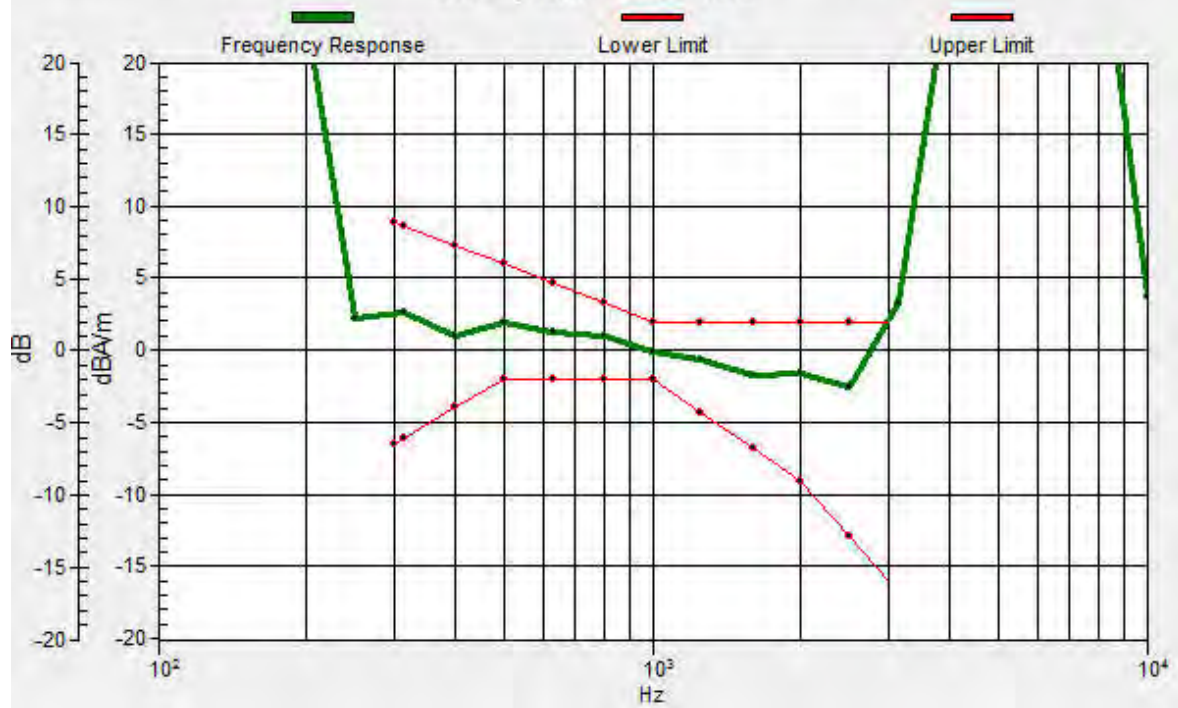

Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-GSM850 EGPRS 4TS 190CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.08

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 41.25 dB

ABM1 comp = -0.66 dBA/m

BWC Factor = 0.84 dB

Location: 3.3, -3.3, 3.7 mm

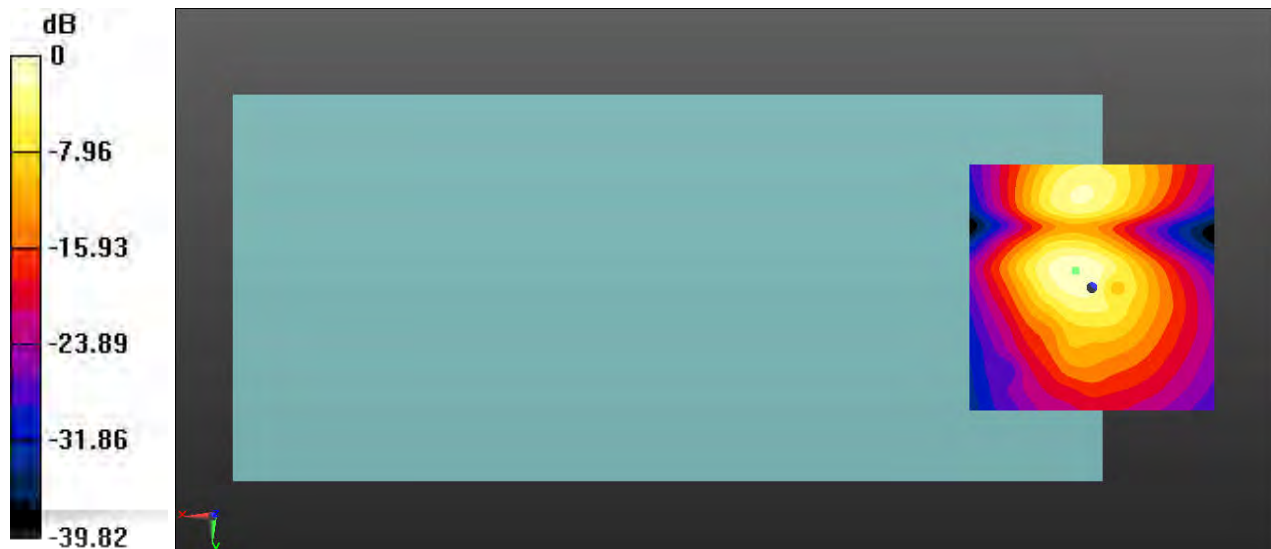

0 dB = 115.5 = 41.25 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-WCDMA Band II HSPA 9400CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 48.06 dB

ABM1 comp = 8.22 dBA/m

BWC Factor = 0.83 dB


Location: 7.9, -12.1, 3.7 mm

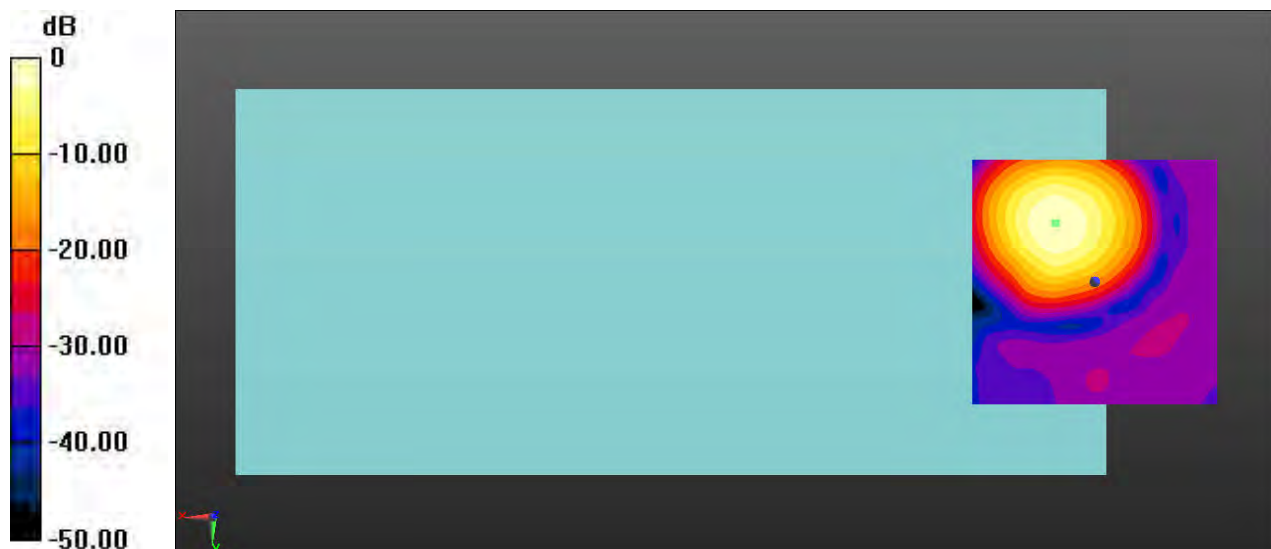

0 dB = 252.8 = 48.06 dB

# General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 8, -12, 3.7 mm Diff: 0.46dB

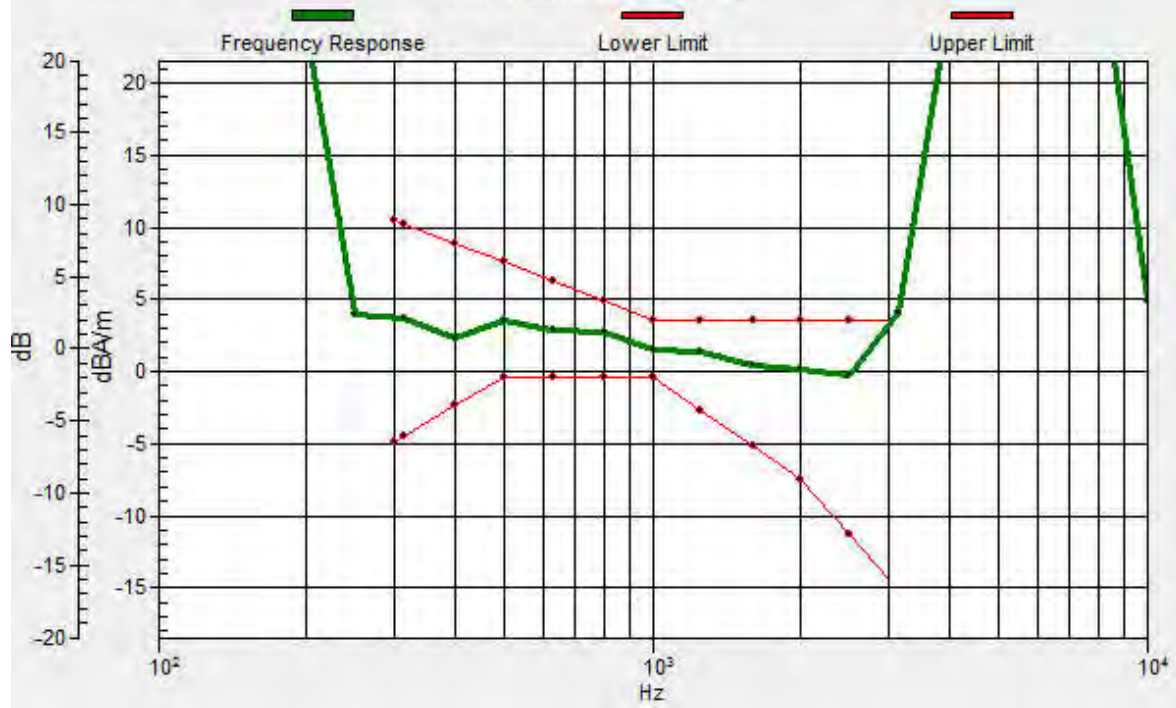

Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-WCDMA Band II HSPA 9400CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 40.48 dB

ABM1 comp = -1.27 dBA/m

BWC Factor = 0.83 dB

Location: 3.3, -2.9, 3.7 mm

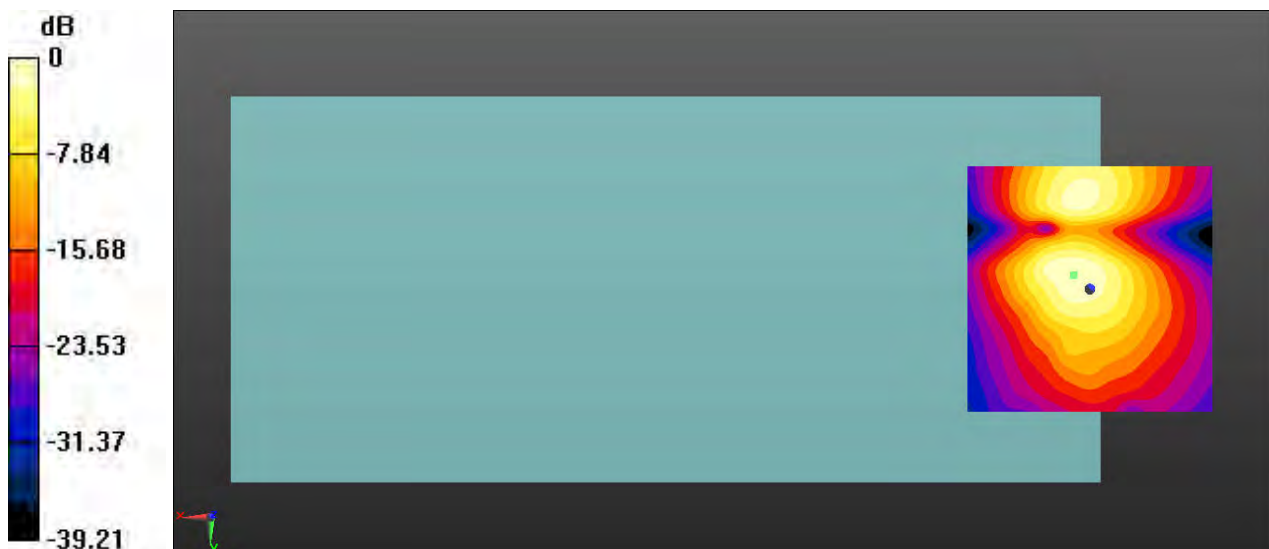

0 dB = 105.7 = 40.48 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-LTE Band 4 20M QPSK 100RB0 20175CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 47.91 dB

ABM1 comp = 5.08 dBA/m

BWC Factor = 0.09 dB


Location: 5.4, -12.1, 3.7 mm

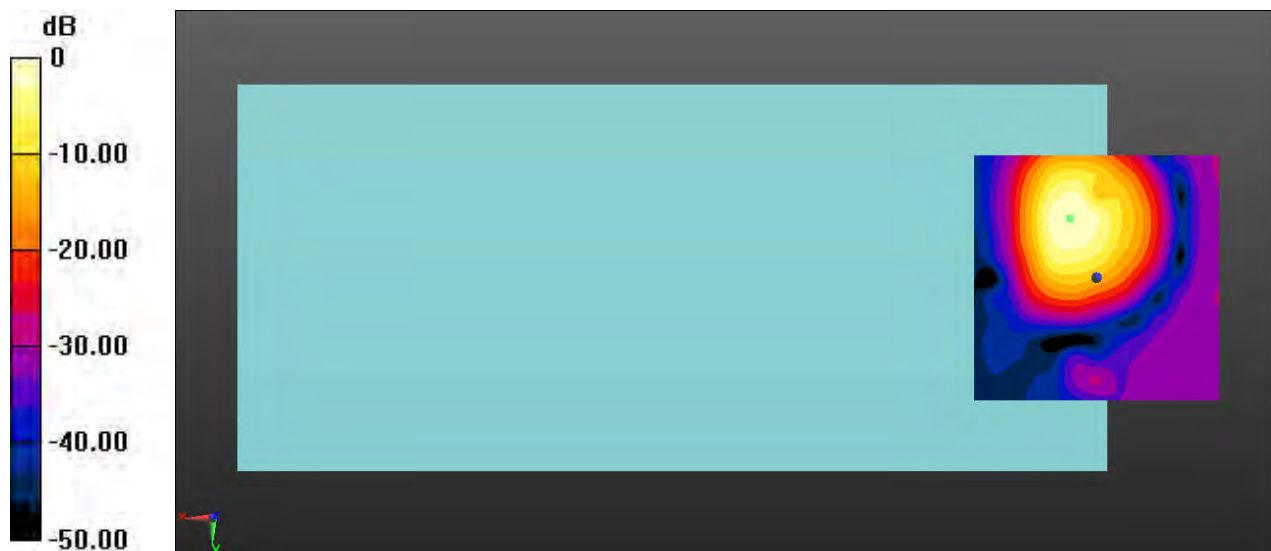

0 dB = 248.6 = 47.91 dB

# General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 5.3, -12, 3.7 mm Diff: 0.02dB

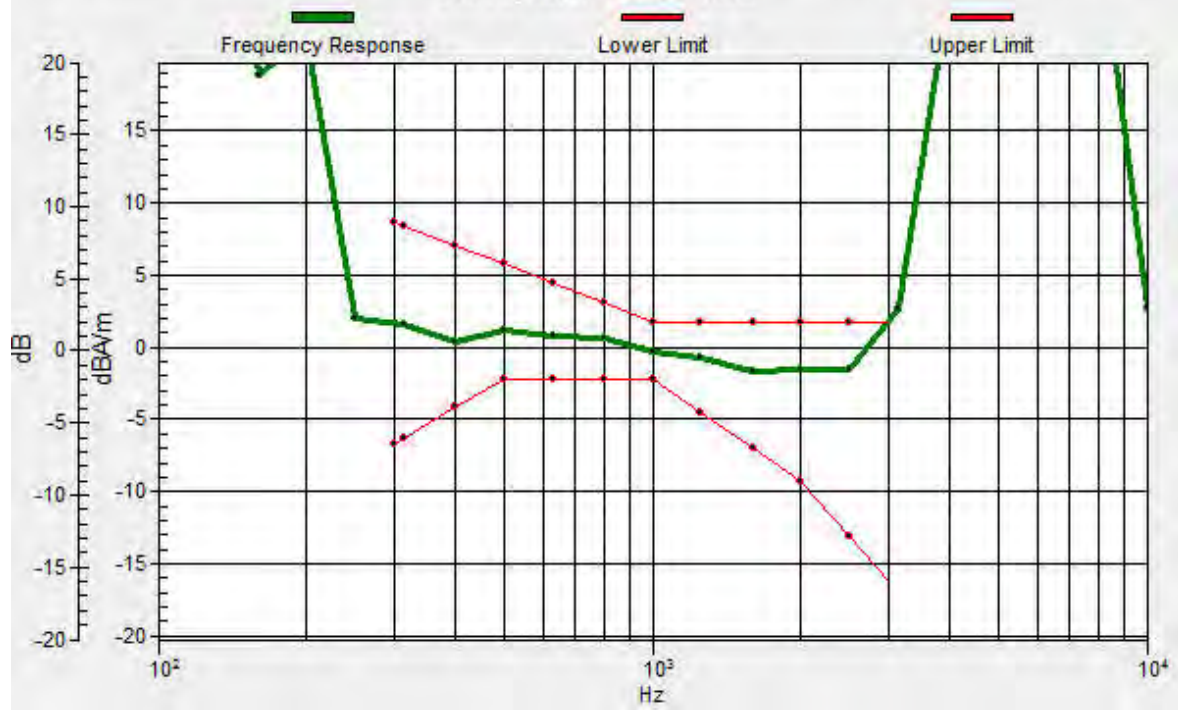



Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-LTE Band 4 20M QPSK 100RB0 20175CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 45.54 dB

ABM1 comp = -4.05 dBA/m

BWC Factor = 0.09 dB

Location: 0.4, -3.8, 3.7 mm

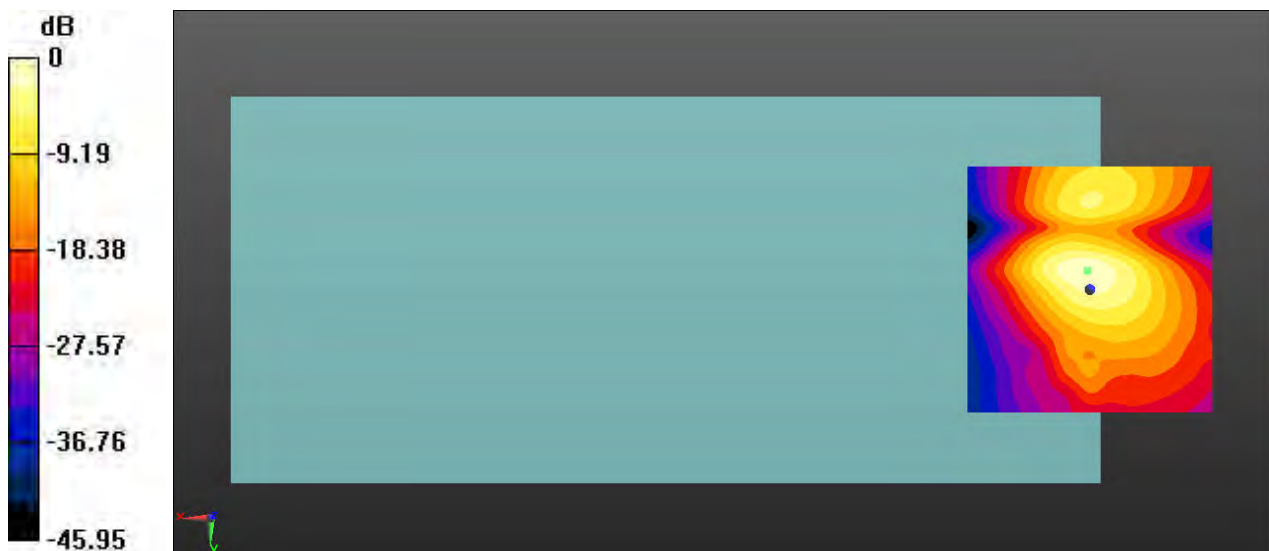

0 dB = 189.2 = 45.54 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-LTE Band 48 20M QPSK 100RB0 55830CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3609 MHz; Duty Cycle: 1:1.57906

Medium: Air; Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 45.68 dB

ABM1 comp = 6.49 dBA/m


BWC Factor = 0.51 dB

Location: 4.2, -12.1, 3.7 mm

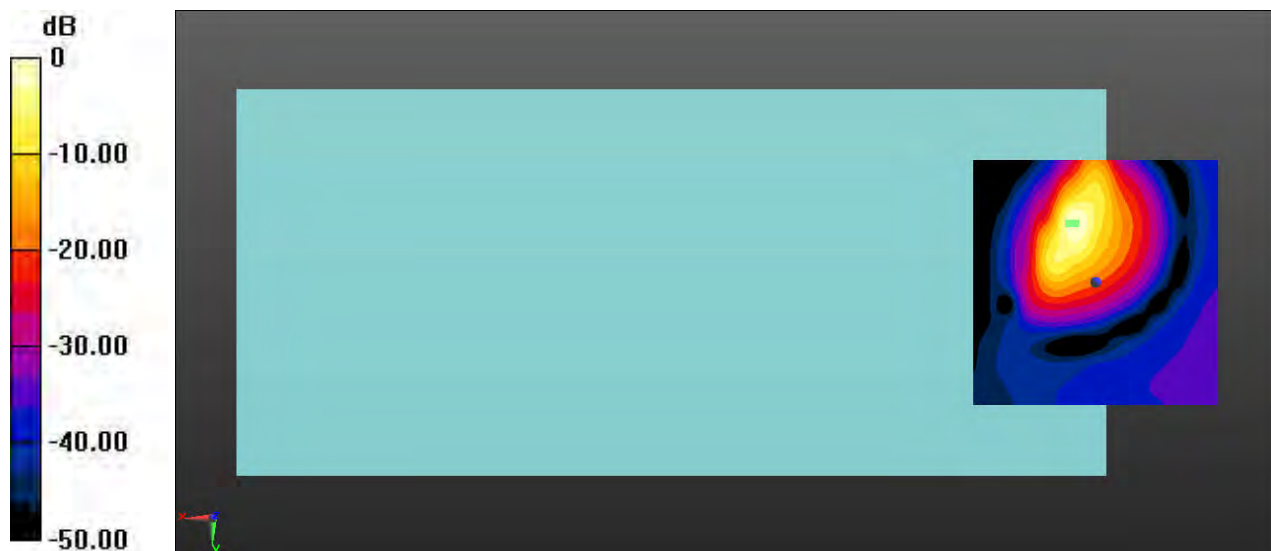

# General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 5.3, -12, 3.7 mm Diff: 0.06dB

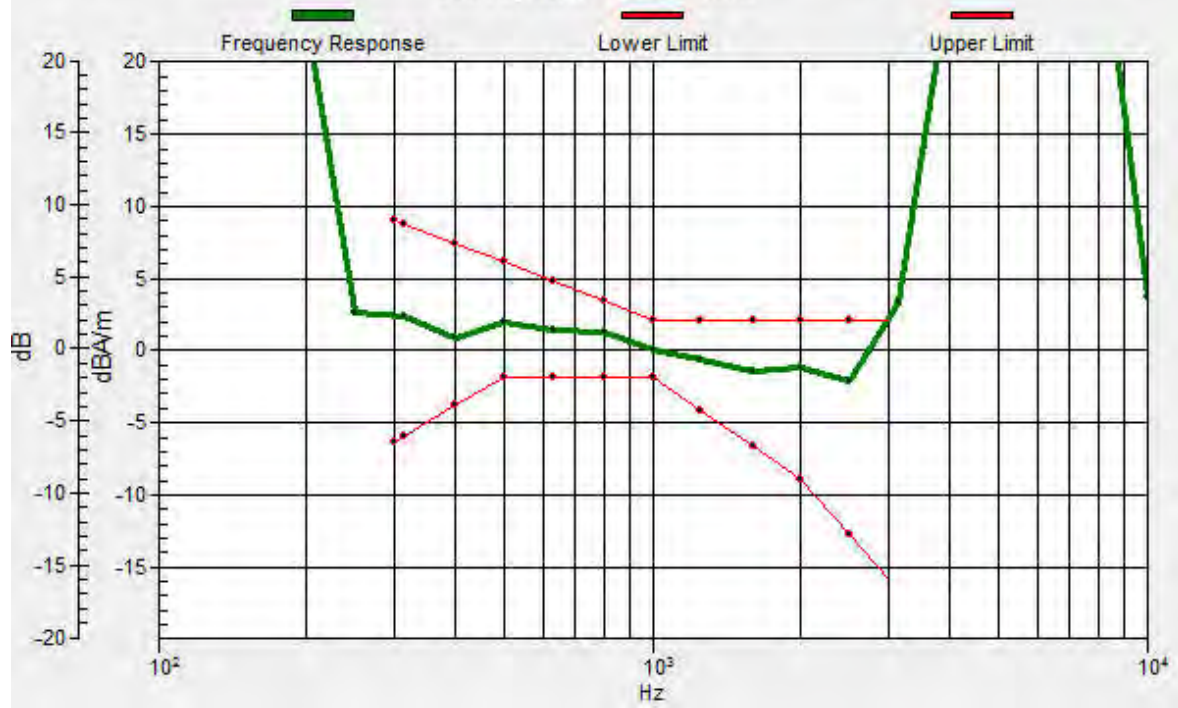

Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-LTE Band 48 20M QPSK 100RB0 55830CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3609 MHz;Duty Cycle: 1:1.57906

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 34.83 dB

ABM1 comp = -5.73 dBA/m

BWC Factor = 0.51 dB

Location: -4.2, -22.1, 3.7 mm

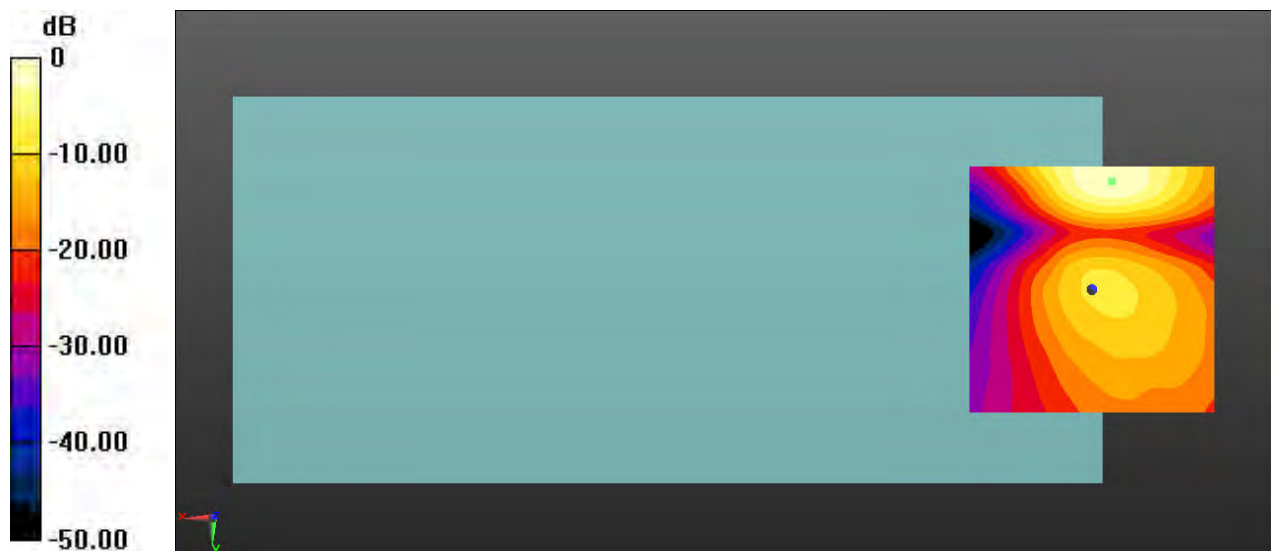

0 dB = 55.16 = 34.83 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-WiFi 2.4G 802.11b 6CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 44.39 dB

ABM1 comp = 7.70 dBA/m

BWC Factor = 0.34 dB


Location: 8.3, -12.5, 3.7 mm

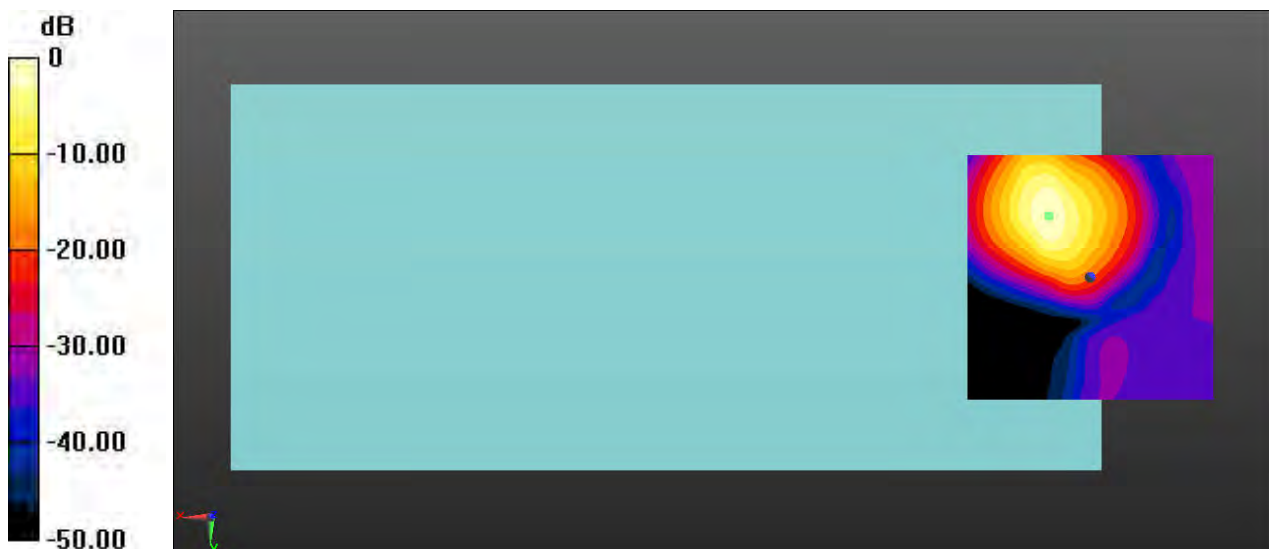

0 dB = 165.8 = 44.39 dB

# General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 8.4, -12.6, 3.7 mm Diff: 0.54dB

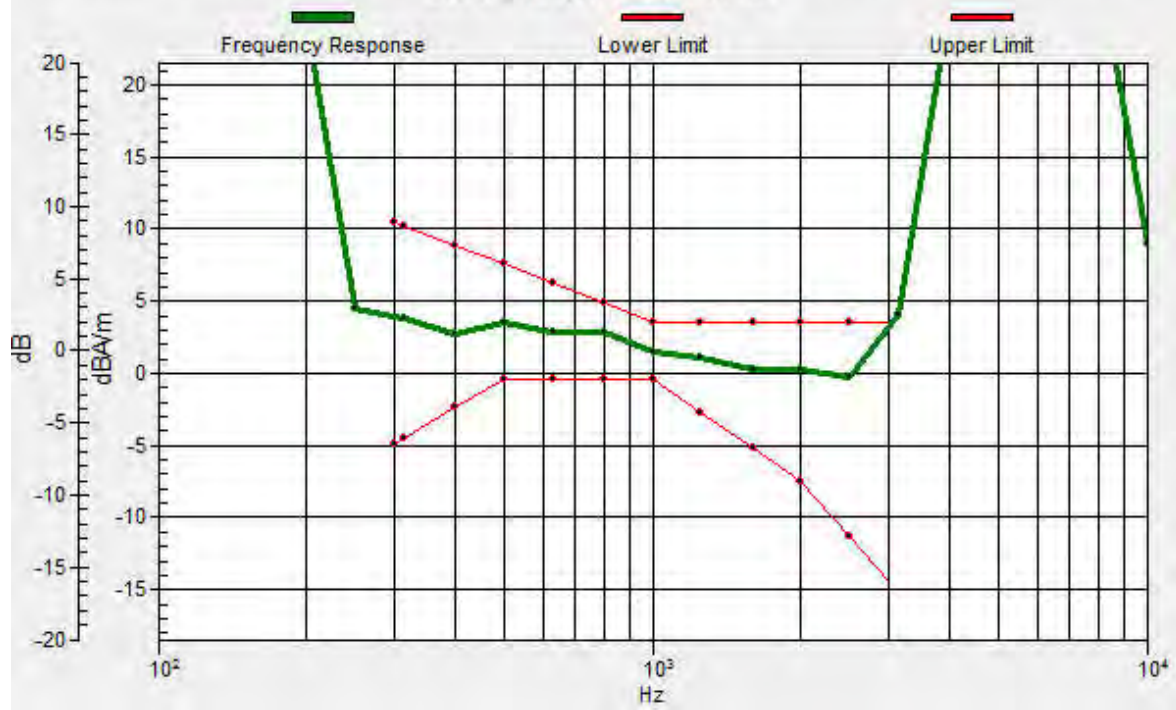

Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-WiFi 2.4G 802.11b 6CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


**(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 32.37 dB

ABM1 comp = -12.06 dBA/m

BWC Factor = 0.34 dB

Location: -3.3, 12.1, 3.7 mm

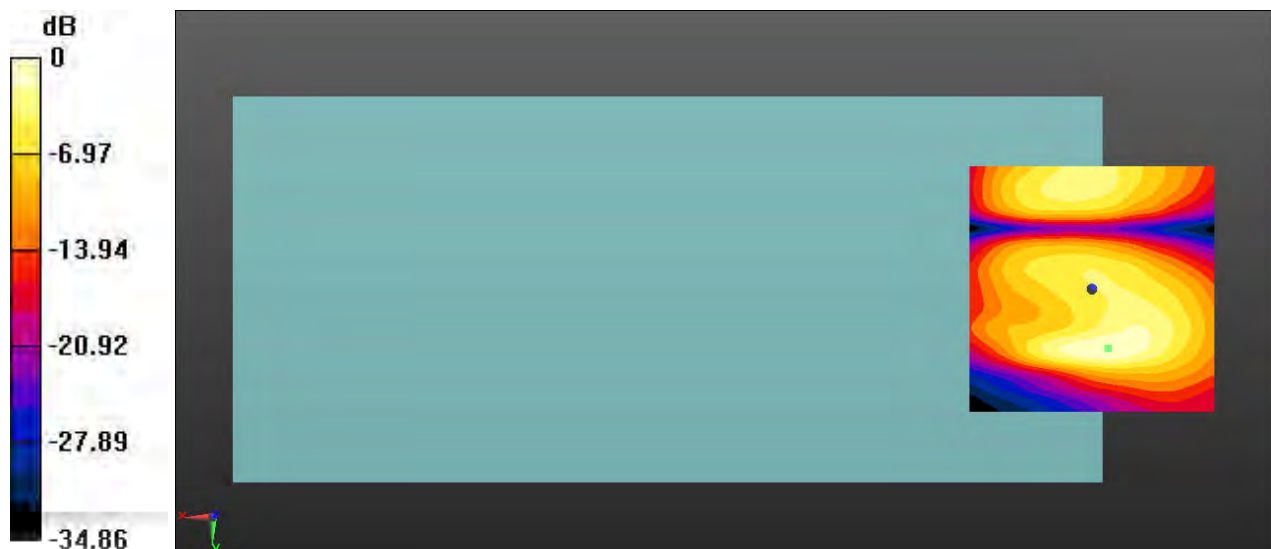

0 dB = 41.53 = 32.37 dB

Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-WiFi 5G 802.11a 40CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z)


**(121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 45.07 dB

ABM1 comp = 7.95 dBA/m

BWC Factor = 0.34 dB

Location: 8.8, -12.5, 3.7 mm

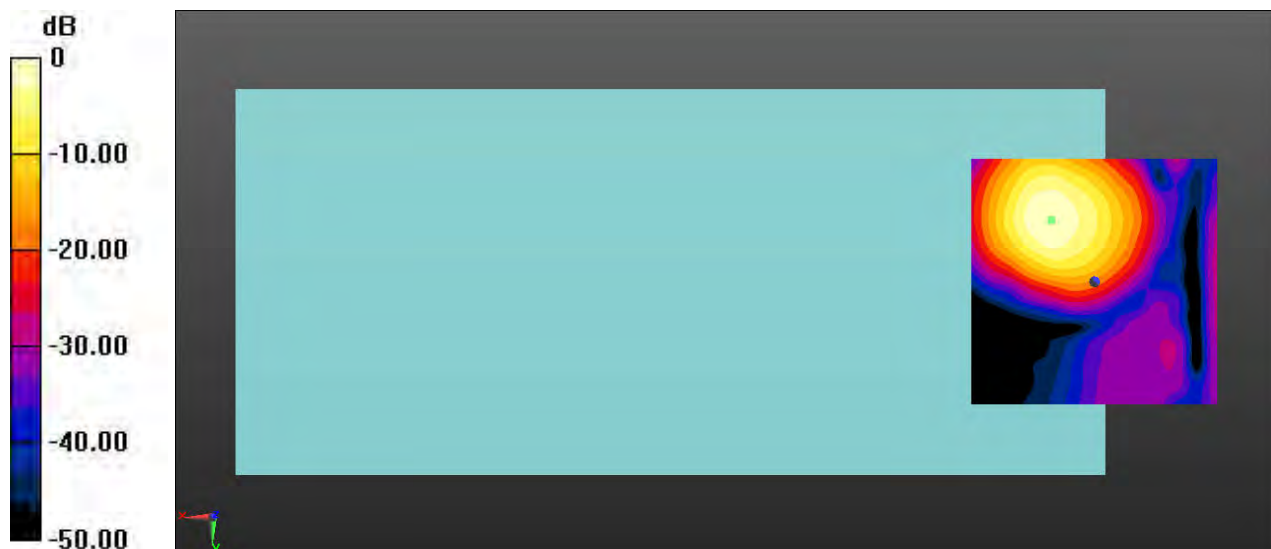


0 dB = 179.3 = 45.07 dB



# General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: 8.7, -12.5, 3.7 mm Diff: 1.03dB

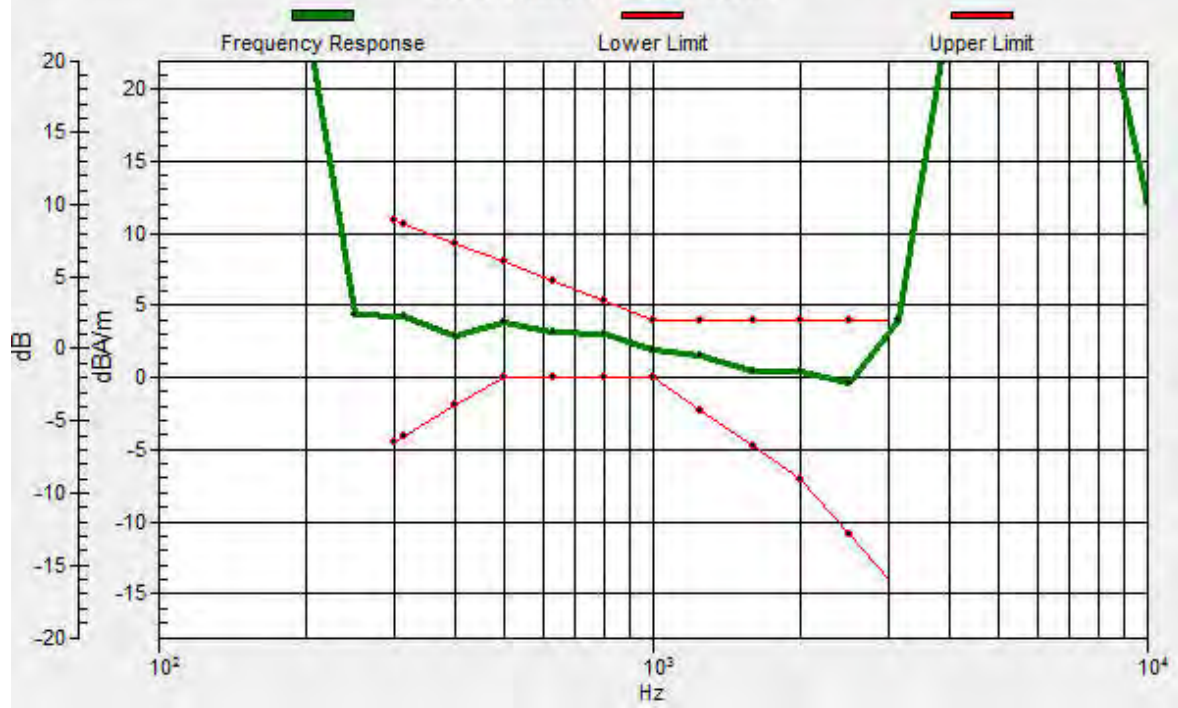

Test Laboratory: SGS-SAR Lab

## U695DS HAC-VOIP-WiFi 5G 802.11a 40CH

**DUT: U695DS; Type: Smart Phone; Serial: 867222060001254**

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5200 MHz;Duty Cycle: 1:1

Medium: Air;Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY 5 Configuration:

- Probe: AM1DV3 - 3115; ; Calibrated: 2023-06-13
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn1324; Calibrated: 2022-10-17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial:
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

### T-Coil scan/General Scans/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR


(x,y,z) (121x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

ABM1/ABM2 = 34.05 dB

ABM1 comp = -0.86 dBA/m

BWC Factor = 0.34 dB

Location: 2.9, -21.3, 3.7 mm

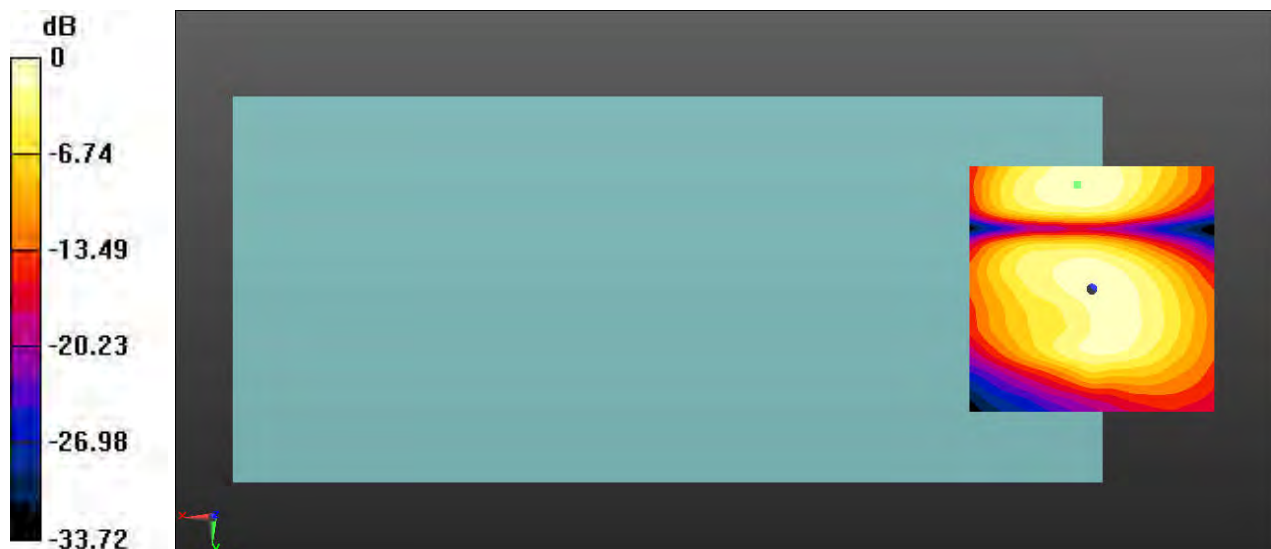

0 dB = 50.39 = 34.05 dB