

FCC PART 15C TEST REPORT

For

Shenzhen Xinguodu Technology Co., Ltd.

17B JinSong Mansion, Terra Industrial & Trade Park Chegongmiao, Futian District, Shenzhen,
China, 518040

FCC ID: XDQN5

Report Type: Original Report	Product Name: POS Terminal
Report Number:	RDG171215001-00B
Report Date:	2018-01-11
Reviewed By:	Jerry Zhang EMC Manager <i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....3

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)3

 OBJECTIVE3

 RELATED SUBMITTAL(S)/GRANT(S).....3

 TEST METHODOLOGY3

 MEASUREMENT UNCERTAINTY4

 TEST FACILITY4

SYSTEM TEST CONFIGURATION.....5

 JUSTIFICATION5

 EUT EXERCISE SOFTWARE5

 EXTERNAL CABLE.....5

 BLOCK DIAGRAM OF TEST SETUP5

SUMMARY OF TEST RESULTS6

FCC§15.203 - ANTENNA REQUIREMENT.....7

 APPLICABLE STANDARD7

 ANTENNA CONNECTED CONSTRUCTION7

FCC §15.207 – AC LINE CONDUCTED EMISSION8

 EUT SETUP8

 EMI TEST RECEIVER SETUP.....8

 TEST EQUIPMENT LIST AND DETAILS.....9

 TEST PROCEDURE9

 CORRECTED AMPLITUDE & MARGIN CALCULATION9

 TEST RESULTS SUMMARY10

 TEST DATA10

FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST13

 APPLICABLE STANDARD13

 EUT SETUP13

 EMI TEST RECEIVER SETUP.....13

 CORRECTED AMPLITUDE & MARGIN CALCULATION14

 TEST EQUIPMENT LIST AND DETAILS.....14

 TEST RESULTS SUMMARY14

 TEST DATA14

FCC§15.225(E) - FREQUENCY STABILITY.....19

 APPLICABLE STANDARD19

 TEST PROCEDURE19

 TEST EQUIPMENT LIST AND DETAILS.....19

 TEST DATA19

FCC §15.215(C) – 20 DB EMISSION BANDWIDTH.....21

 APPLICABLE STANDARD21

 TEST PROCEDURE21

 TEST EQUIPMENT LIST AND DETAILS.....21

 TEST DATA21

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

EUT Name:		POS Terminal
EUT Model:		N5
FCC ID:		XDQN5
Rated Input Voltage:		DC3.7V from battery or DC 5V from adapter
Adapter Information	Model:	ADS-12CG-06 05010EPCU
	Input:	100-240V~ 50/60Hz Max. 0.3A
	Output:	DC 5V , 2.0A
External Dimension:		Length (18.6cm)*Width (8.2cm)*High (6.4cm)
Serial Number:		171215001
EUT Received Date:		2017.12.15

Objective

This Type approval report is prepared on behalf of *Shenzhen Xinguodu Technology Co., Ltd.* in accordance with Part 2, Subpart J, and Part 15, Subparts A and C of the Federal Communications Commission's rules.

The objective is to determine the compliance of the EUT with FCC rules, sec 15.203, 15.205, 15.207, 15.209 and 15.225.

Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: XDQN5.
 FCC Part 15C DTS submissions with FCC ID: XDQN5.
 FCC Part 22H, 24E, 27 PCB submissions with FCC ID: XDQN5.
 FCC Part 15B JBP submissions with FCC ID: XDQN5.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
radiated Emissions	9kHz~30MHz: 4.12dB 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a test mode


EUT Exercise Software

No software used in test.

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1	Adapter	EUT

Block Diagram of Test Setup

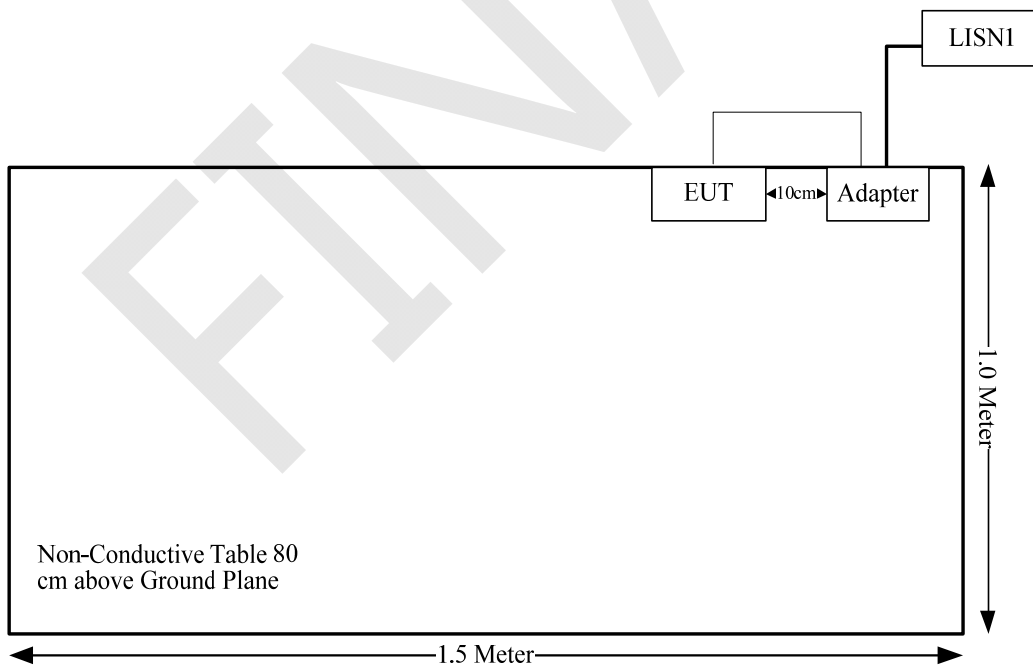

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207	AC Line Conducted Emission	Compliance
§15.225 §15.209 §15.205	Radiated Emission Test	Compliance
§15.225(e)	Frequency Stability	Compliance
§15.215(c)	20 dB Emission Bandwidth	Compliance

FEMVAL

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connected Construction


The EUT has one integral antenna arrangement, which was permanently attached and fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FEMNAL

FCC §15.207 – AC LINE CONDUCTED EMISSION

EUT Setup

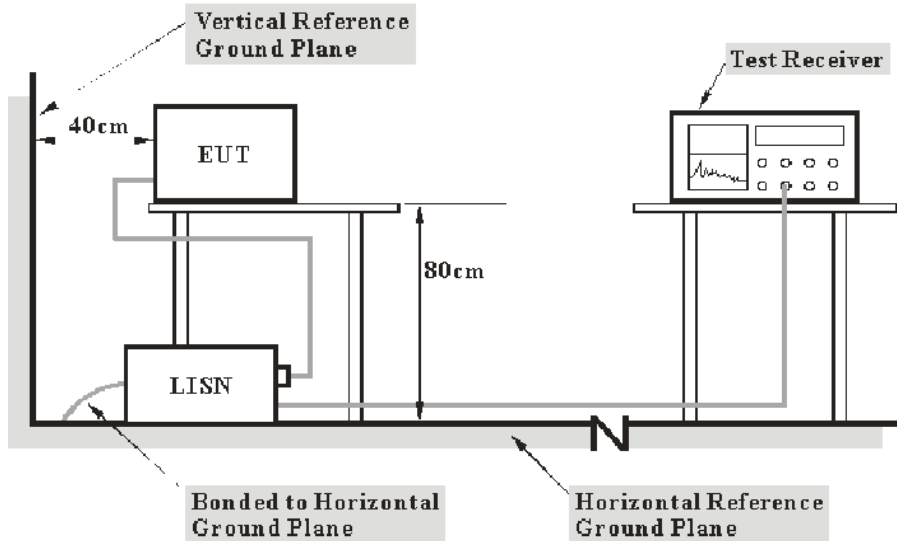

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with an AC 120V/60Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2017-12-11	2018-12-11
R&S	L.I.S.N	ESH2-Z5	892107/021	2017-09-25	2018-09-25
R&S	Two-line V-network	ENV 216	101614	2017-12-08	2018-12-08
BACL	Capacitive Voltage Probe	CVP	150603	2017-09-25	2018-09-25
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

According FCC publication number 174176, for a device with a permanent antenna operating at or below 30 MHz, the measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) perform the AC line conducted tests with the permanent antenna to determine compliance with the Section 15.207 limits outside the transmitter's fundamental emission band; (2) retest with a dummy load in lieu of the permanent antenna to determine compliance with the Section 15.207 limits within the transmitter's fundamental emission band.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The "**Margin**" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	21.7 °C
Relative Humidity:	35 %
ATM Pressure:	102.7 kPa

The testing was performed by Alex You on 2017-12-21.

FEMNAL

Test Mode: Transmitting


AC 120V, 60 Hz, Line:

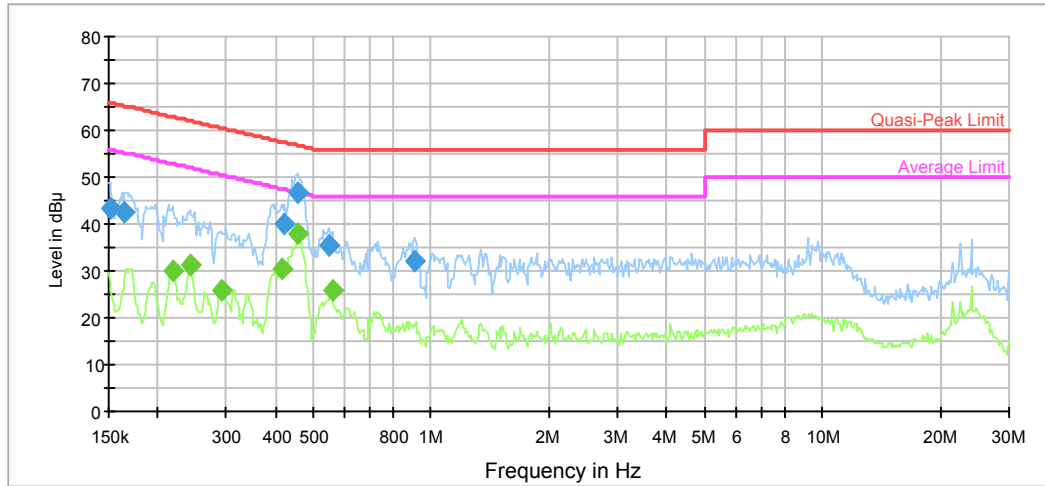

Frequency (MHz)	Quasi Peak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.151200	43.5	9.000	L1	11.2	22.4	65.9	Compliance
0.165051	42.7	9.000	L1	11.0	22.5	65.2	Compliance
0.422630	39.9	9.000	L1	10.0	17.5	57.4	Compliance
0.457684	46.7	9.000	L1	9.9	10.0	56.7	Compliance
0.549741	35.4	9.000	L1	9.9	20.6	56.0	Compliance
0.908180	32.1	9.000	L1	9.8	23.9	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.218141	30.1	9.000	L1	10.5	22.8	52.9	Compliance
0.241949	31.1	9.000	L1	10.4	20.9	52.0	Compliance
0.292938	25.8	9.000	L1	10.2	24.6	50.4	Compliance
0.415949	30.3	9.000	L1	10.0	17.2	47.5	Compliance
0.457684	38.0	9.000	L1	9.9	8.7	46.7	Compliance
0.558572	25.9	9.000	L1	9.9	20.1	46.0	Compliance

AC120 V, 60 Hz, Neutral:

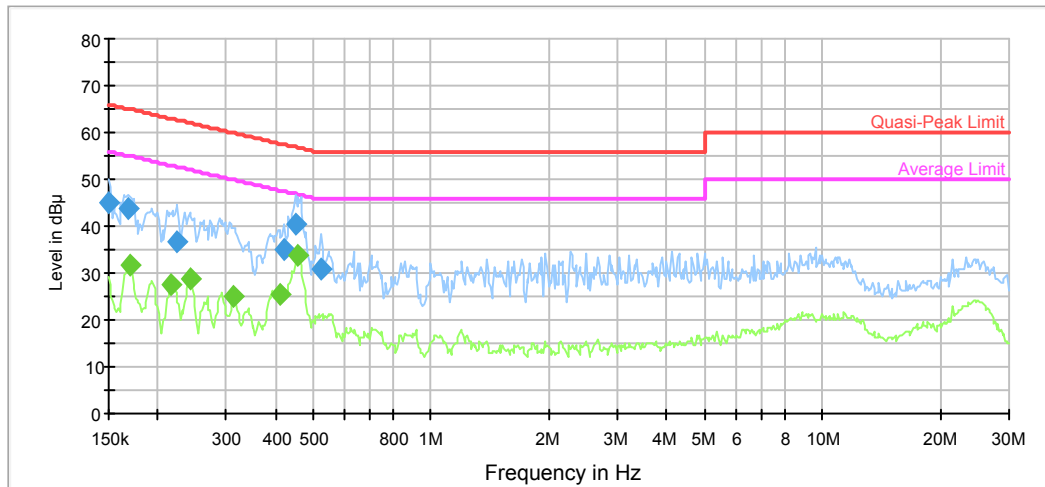

Frequency (MHz)	Quasi Peak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.150000	44.9	9.000	N	11.2	21.1	66.0	Compliance
0.167702	43.8	9.000	N	10.9	21.3	65.1	Compliance
0.225205	36.6	9.000	N	10.5	26.0	62.6	Compliance
0.419276	34.8	9.000	N	10.0	22.7	57.5	Compliance
0.450448	40.4	9.000	N	9.9	16.5	56.9	Compliance
0.524077	30.7	9.000	N	9.9	25.3	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.170396	31.7	9.000	N	10.9	23.2	54.9	Compliance
0.216409	27.4	9.000	N	10.5	25.5	53.0	Compliance
0.241949	28.8	9.000	N	10.4	23.2	52.0	Compliance
0.312220	24.9	9.000	N	10.1	25.0	49.9	Compliance
0.412647	25.5	9.000	N	10.0	22.1	47.6	Compliance
0.457684	33.7	9.000	N	9.9	13.0	46.7	Compliance


FCC§15.225, §15.205 & §15.209 - RADIATED EMISSIONS TEST

Applicable Standard

As per FCC Part 15.225

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

EUT Setup

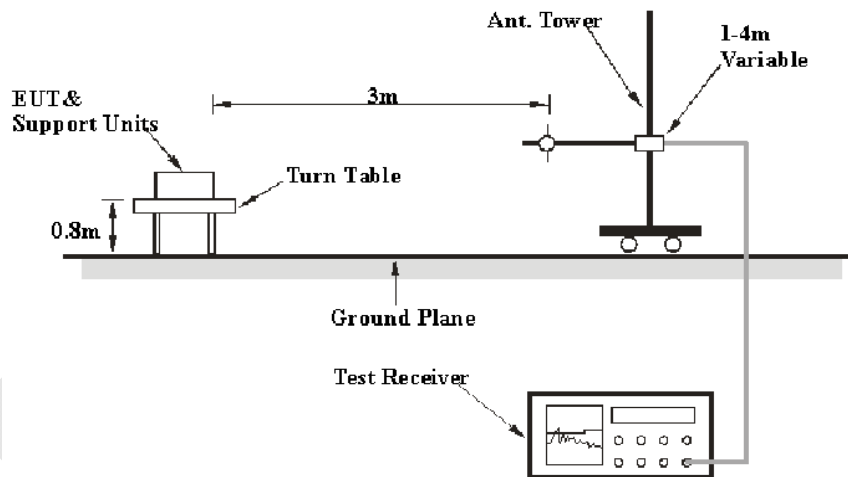

The radiated emission tests were performed in the 3-meter chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part Subpart C limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 9 kHz to 1 GHz.

During the radiated emission test, the EMI test Receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	Measurement
9 kHz – 150 kHz	200 Hz	1 kHz	QP
150 kHz – 30 MHz	9 kHz	30 kHz	QP
30 MHz – 1000 MHz	120 kHz	300 kHz	QP

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corr. Ampl.}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2018-11-10
HP	Amplifier	8447D	2727A05902	2016-09-05	2018-09-05
EMCO	Passive Loop	6512	9706-1206	2017-03-05	2020-03-05
Unknown	Coaxial Cable	4m	C0400/01	2016-09-05	2018-09-05
Unknown	Coaxial Cable	10m	C1000/01	2016-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209&15.225.

Test Data



Environmental Conditions

Temperature:	25.5 °C
Relative Humidity:	30.4 %
ATM Pressure:	102.2 kPa

* The testing was performed by Sunny Cen on 2017-12-25.


Test mode: Transmitting

1) 9 kHz~30MHz:

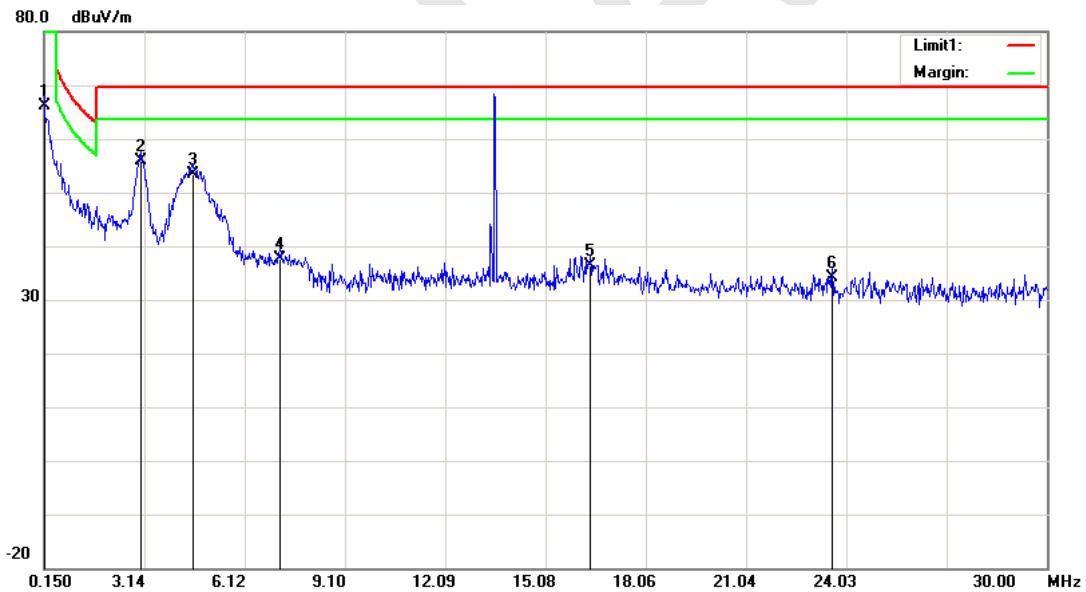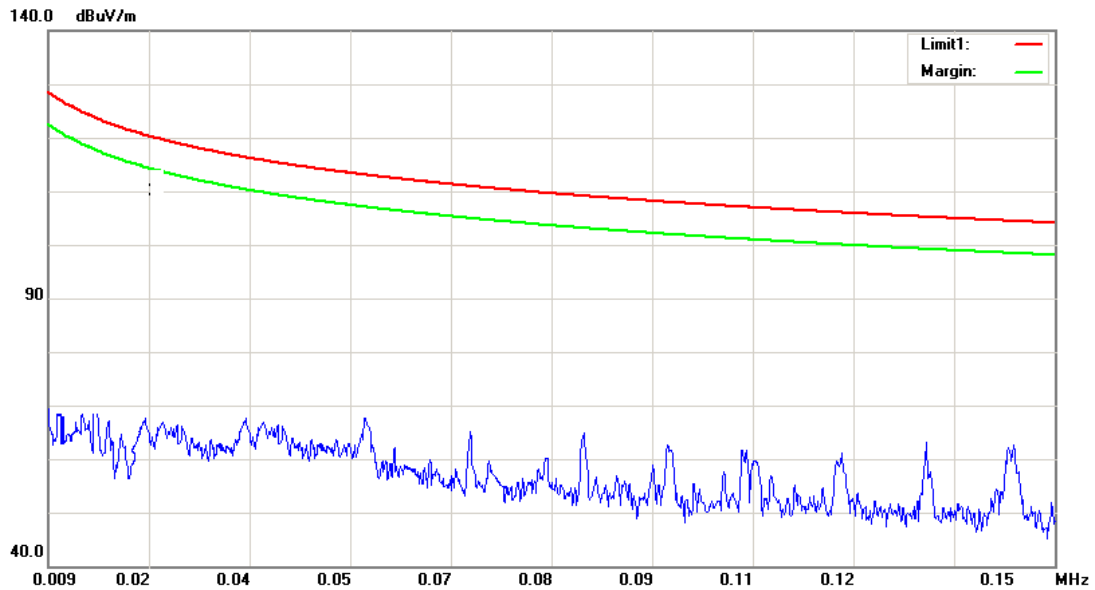

No.	Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1	0.1500	2.50	peak	63.60	66.10	104.08	37.98
2	3.0156	17.23	peak	38.57	55.80	69.54	13.74
3	4.5678	17.50	peak	35.80	53.30	69.54	16.24
4	7.1646	4.22	peak	33.48	37.70	69.54	31.84
5	16.4181	4.52	peak	31.98	36.50	69.54	33.04
6	23.6121	3.12	peak	30.98	34.10	69.54	35.44


Fundamental:

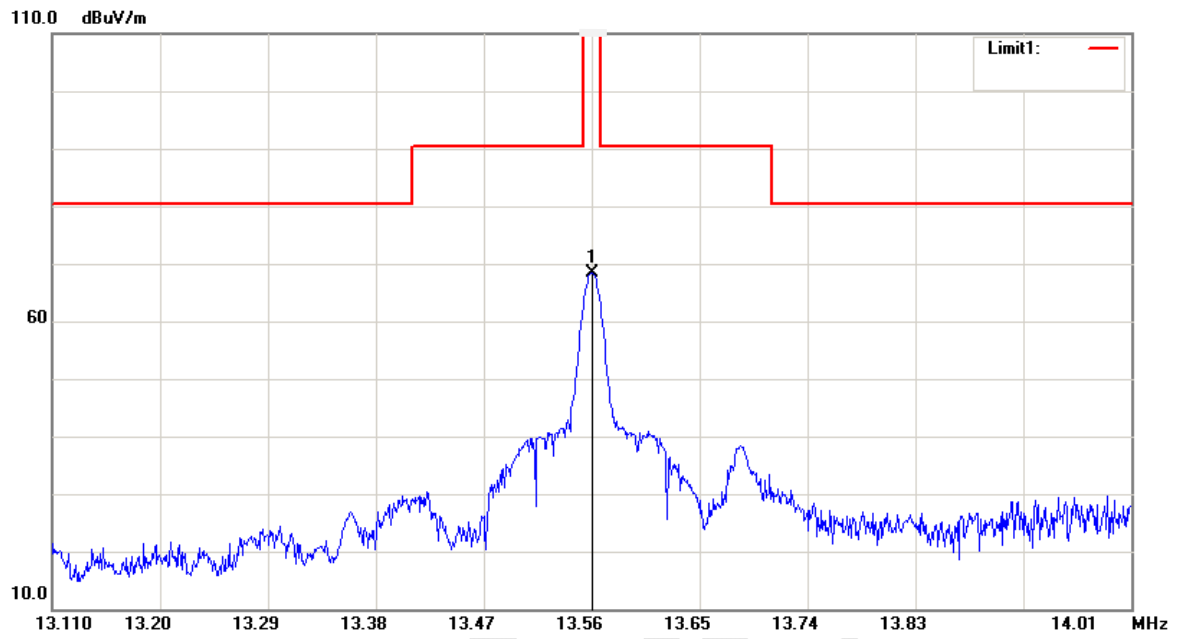

No.	Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1	13.5600	89.07	peak	-20.74	68.33	124.00	55.67


Above 30 MHz

Horizontal

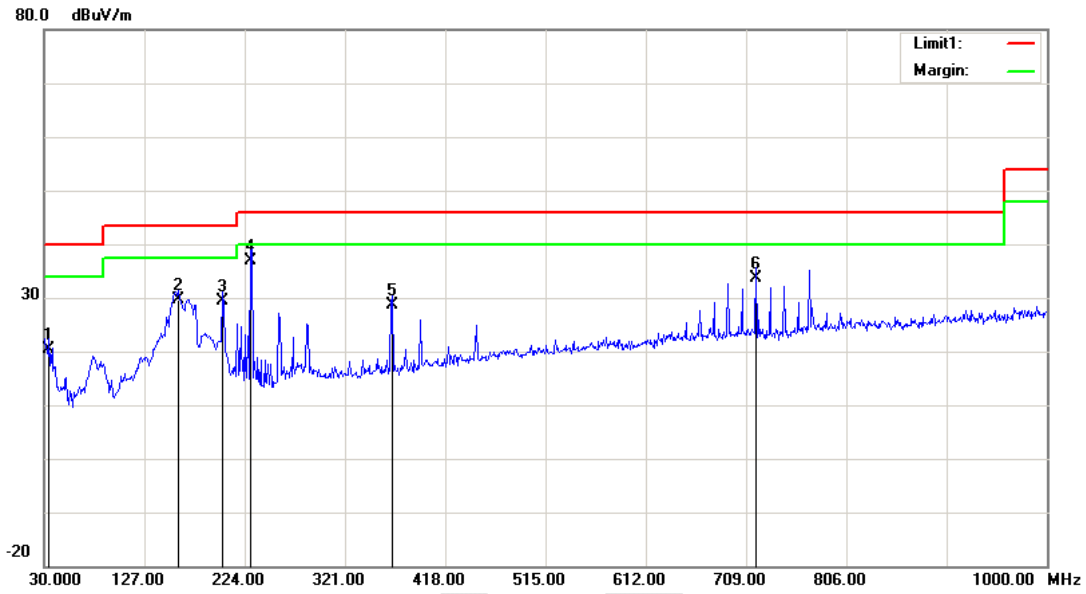

No.	Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1	34.8500	28.26	peak	-7.96	20.30	40.00	19.70
2	159.9800	41.58	peak	-11.98	29.60	43.50	13.90
3	202.6600	41.40	peak	-12.10	29.30	43.50	14.20
4	229.8200	49.35	peak	-12.55	36.80	46.00	9.20
5	366.5900	37.38	peak	-8.78	28.60	46.00	17.40
6	718.7000	36.37	peak	-2.67	33.70	46.00	12.30

Vertical

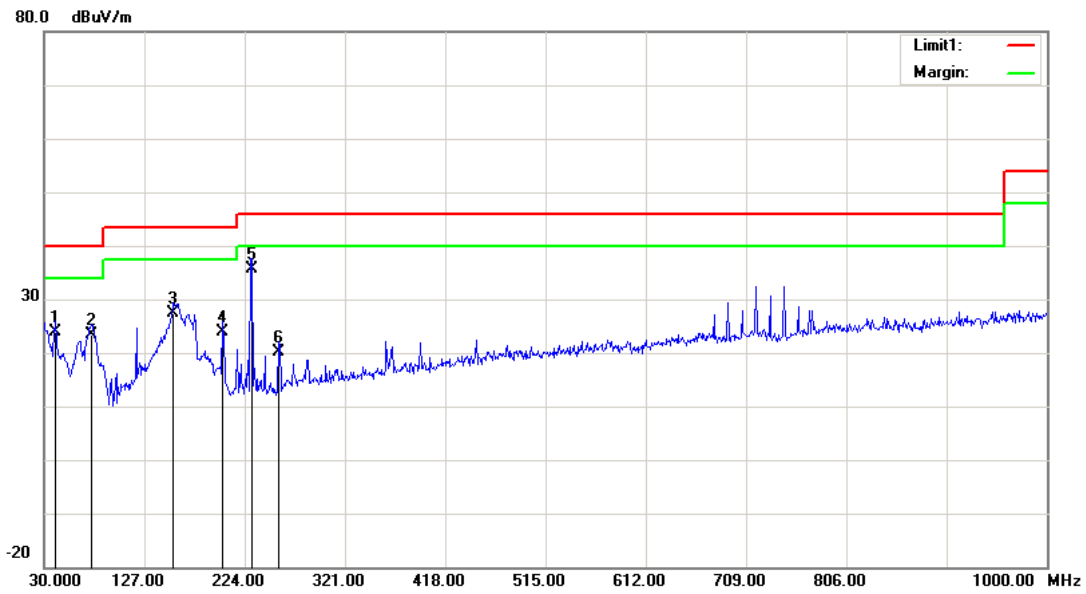

No.	Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1	40.6700	36.08	peak	-12.28	23.80	40.00	16.20
2	75.5900	40.53	peak	-17.13	23.40	40.00	16.60
3	155.1300	39.33	peak	-11.93	27.40	43.50	16.10
4	202.6600	36.00	peak	-12.10	23.90	43.50	19.60
5	230.7900	48.10	peak	-12.50	35.60	46.00	10.40
6	256.9800	31.92	peak	-11.82	20.10	46.00	25.90

Note: When the level not higher than the limit, peak detector was used

FCC§15.225(e) - FREQUENCY STABILITY

Applicable Standard

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power.

The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to the end point of the battery. The output frequency was recorded for each voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
HP	Amplifier	8447D	2727A05902	2016-09-05	2018-09-05
EMCO	Passive Loop	6512	9706-1206	2017-03-05	2020-03-05
Unknown	Coaxial Cable	4m	C0400/01	2016-09-05	2018-09-05
Unknown	Coaxial Cable	10m	C1000/01	2016-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	21.9 °C
Relative Humidity:	34 %
ATM Pressure:	100.9 kPa

* The testing was performed by Sunny Cen on 2018-01-02.

Test Mode: Transmitting

Test Result: Pass

f₀ = 13.56 MHz				
Temperature	Voltage	Measured frequency	Frequency Error	Limit
°C	V_{DC}	MHz	Hz	Hz
-30	3.7	13.560500	-500	±1356
-20		13.560400	-400	±1356
-10		13.560500	-500	±1356
0		13.560450	-450	±1356
10		13.560370	-370	±1356
20		13.560320	-320	±1356
30		13.560470	-470	±1356
40		13.560510	-510	±1356
50		13.560360	-360	±1356
20		3.5	13.560440	-440
20	4.2	13.560420	-420	±1356

FCC §15.215(c) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Per FCC §15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §15.217 through § 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Test Procedure

Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
HP	Amplifier	8447D	2727A05902	2016-09-05	2018-09-05
EMCO	Passive Loop	6512	9706-1206	2017-03-05	2020-03-05
Unknown	Coaxial Cable	4m	C0400/01	2016-09-05	2018-09-05
Unknown	Coaxial Cable	10m	C1000/01	2016-09-05	2018-09-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	25.9°C
Relative Humidity:	30.6 %
ATM Pressure:	101.6 kPa

* The testing was performed by Sunny Cen on 2017-12-26.

Test Mode: Transmitting

20 dB Emission Bandwidth(2.72kHz)

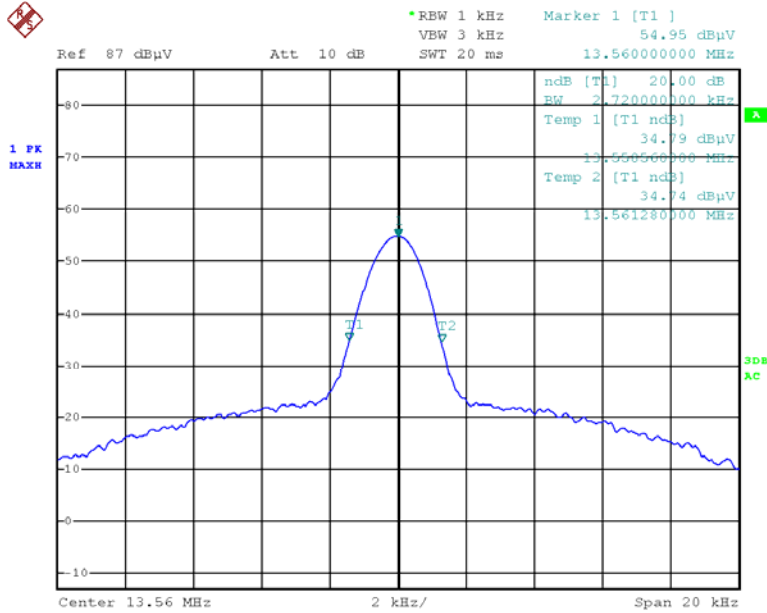

Date: 26.DEC.2017 08:41:07

***** END OF REPORT *****