



No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM161201122602
Page: 1 of 129

TEST REPORT

Application No.: SZEM1612011226CR
Applicant: TEAC Corporation
Address of Applicant: 1-47 Ochiai, Tama-shi, Tokyo, Japan
Manufacturer: TEAC Corporation
Address of Manufacturer: 1-47 Ochiai, Tama-shi, Tokyo, Japan
Factory: DONGGUAN TEAC ELECTRONICS CO., LTD.
Address of Factory: Shang-sha, Chang-An District, Dong Guan , Guang Dong, China
Equipment Under Test (EUT):
EUT Name: USB DAC/Integrated Amplifier
Model No.: AI-503
Trade mark: TEAC
IC: 1559C-AI503
Standards: RSS 247
RSS Gen Issue 4
Date of Receipt: 2017-03-01
Date of Test: 2017-03-03 to 2017-04-19
Date of Issue: 2017-05-03

Test Result :	Pass*
----------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2017-05-03		Original

Authorized for issue by:				
Tested By				2017-05-03
		_____ Bill Chen /Project Engineer		_____ Date
Checked By				2017-05-03
		_____ Eric Fu /Reviewer		_____ Date



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Pseudorandom Frequency Hopping Sequence	RSS 247	N/A	RSS-247 Section 5.1(1)(2)	Pass
Antenna Requirement	RSS 247	N/A	RSS-Gen Section 8.3	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Disturbance at AC Power Line (150kHz-30MHz)	RSS 247	ANSI C63.10 (2013) Section 6.2	RSS-Gen Section 8.8	Pass
99% Bandwidth	RSS 247	RSS-Gen Section 6.6	RSS-Gen Section 6.6	Pass
Conducted Peak Output Power	RSS 247	ANSI C63.10 (2013) Section 7.8.5	RSS-247 Section 5.4(2)	Pass
Carrier Frequencies Separation	RSS 247	ANSI C63.10 (2013) Section 7.8.2	RSS-247 Section 5.1(2)	Pass
Hopping Channel Number	RSS 247	ANSI C63.10 (2013) Section 7.8.3	RSS-247 Section 5.1(3)	Pass
Dwell Time	RSS 247	ANSI C63.10 (2013) Section 7.8.4	RSS-247 Section 5.1(4)	Pass
Conducted Spurious Emissions	RSS 247	ANSI C63.10 (2013) Section 7.8.6	RSS-247 Section 5.5	Pass
Radiated Spurious Emissions	RSS 247	ANSI C63.10 (2013) Section 6.4&6.5&6.6	RSS-Gen Section 8.8	Pass
Radiated Emissions which fall in the restricted bands	RSS 247	ANSI C63.10 (2013) Section 6.4&6.5&6.6	RSS-Gen Section 8.8	Pass
Conducted Band Edges Measurement	RSS 247	ANSI C63.10 (2013) Section 7.8.8	RSS-247 Section 5.5	Pass
20dB Bandwidth	RSS 247	RSS-247 Section 5.1(2)	RSS-247 Section 5.1(2)	Pass



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	6
4.1 DETAILS OF E.U.T.	6
4.2 DESCRIPTION OF SUPPORT UNITS	8
4.3 MEASUREMENT UNCERTAINTY.....	8
4.4 TEST LOCATION.....	9
4.5 TEST FACILITY	9
4.6 DEVIATION FROM STANDARDS	9
4.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
5 EQUIPMENT LIST.....	10
6 RADIO SPECTRUM TECHNICAL REQUIREMENT.....	12
6.1 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	12
6.1.1 Test Requirement:	12
6.1.2 Test Setup Diagram	13
6.1.3 Conclusion	13
6.2 ANTENNA REQUIREMENT.....	14
6.2.1 Test Requirement:	14
6.2.2 Conclusion	14
7 RADIO SPECTRUM MATTER TEST RESULTS.....	15
7.1 CONDUCTED DISTURBANCE AT AC POWER LINE(150KHZ-30MHZ).....	15
7.1.1 E.U.T. Operation	16
7.1.2 Test Setup Diagram	16
7.1.3 Measurement Data.....	16
7.2 99% BANDWIDTH.....	19
7.2.1 E.U.T. Operation	19
7.2.2 Test Setup Diagram	19
7.2.3 Measurement Data.....	19
7.3 CONDUCTED PEAK OUTPUT POWER	20
7.3.1 E.U.T. Operation	21
7.3.2 Test Setup Diagram	21
7.3.3 Measurement Data.....	21
7.4 CARRIER FREQUENCIES SEPARATION.....	22
7.4.1 E.U.T. Operation	22
7.4.2 Test Setup Diagram	22
7.4.3 Measurement Data.....	22
7.5 HOPPING CHANNEL NUMBER.....	23
7.5.1 E.U.T. Operation	24
7.5.2 Test Setup Diagram	24
7.5.3 Measurement Data.....	24
7.6 DWELL TIME	25
7.6.1 E.U.T. Operation	26
7.6.2 Test Setup Diagram	26
7.6.3 Measurement Data.....	26



7.7	CONDUCTED SPURIOUS EMISSIONS	27
7.7.1	<i>E.U.T. Operation</i>	27
7.7.2	<i>Test Setup Diagram</i>	27
7.7.3	<i>Measurement Data</i>	27
7.8	RADIATED SPURIOUS EMISSIONS.....	28
7.8.1	<i>E.U.T. Operation</i>	29
7.8.2	<i>Test Setup Diagram</i>	29
7.8.3	<i>Measurement Data</i>	30
7.9	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	36
7.9.1	<i>E.U.T. Operation</i>	37
7.9.2	<i>Test Setup Diagram</i>	37
7.9.3	<i>Measurement Data</i>	38
7.10	CONDUCTED BAND EDGES MEASUREMENT.....	43
7.10.1	<i>E.U.T. Operation</i>	43
7.10.2	<i>Test Setup Diagram</i>	43
7.10.3	<i>Measurement Data</i>	43
7.11	20dB BANDWIDTH	44
7.11.1	<i>E.U.T. Operation</i>	44
7.11.2	<i>Test Setup Diagram</i>	44
7.11.3	<i>Measurement Data</i>	44
8	PHOTOGRAPHS	45
8.1	CONDUCTED DISTURBANCE AT AC POWER LINE(150KHZ-30MHZ) TEST SETUP	45
8.2	RADIATED SPURIOUS EMISSIONS TEST SETUP	46
8.3	EUT CONSTRUCTIONAL DETAILS.....	47
9	APPENDIX	48
9.1	APPENDIX RSS247.....	48-129



4 General Information

4.1 Details of E.U.T.

Frequency Range:	2402MHz to 2480MHz
Bluetooth Version:	V4.0 dual mode This test report is for classic mode.
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channels:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Fixed production
Antenna Type:	PCB Pattern Antenna
Antenna Gain:	-3dBi
Power supply:	AC 120V 60Hz DC 3V (1.5V*2 Size "AAA" batteries) for remote control
Rated power	38W
Cable:	AC cable:200cm Unshielded



4.2 Test Environment

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

4.3 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Laptop	Lenovo	T430u
Test board	Supply to SGS	FT232

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25 x 10 ⁻⁸
2	Duty cycle	0.37%
3	Occupied Bandwidth	3%
4	RF conducted power	0.75dB
5	RF power density	2.84dB
6	Conducted Spurious emissions	0.75dB
7	RF Radiated power	4.5dB (below 1GHz)
8		4.8dB (above 1GHz)
9	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
	Temperature test	1°C
10	Humidity test	3%
11	Supply voltages	1.5%
12	Time	3%



4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Disturbance at AC Power Line(150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13
LISN	Rohde & Schwarz	ENV216	SEM007-01	2016-10-09	2017-10-09
LISN	ETS-LINDGREN	3816/2	SEM007-02	2017-04-14	2018-04-14
8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2016-09-28	2017-09-28
4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2016-09-28	2017-09-28
2 Line ISN	Fischer Custom	FCC-TLISN-T2-02	EMC0122	2016-09-28	2017-09-28

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2016-05-13	2017-05-13
EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEM004-01	2017-04-14	2018-04-14
Trilog-Broadband Antenna (30M-1GHz)	Schwarzbeck	VULB9168	SEM003-17	2017-01-26	2018-01-26
Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2016-07-06	2017-07-06
Active Loop Antenna	ETS-Lindgren	6502	SEM003-08	2015-08-14	2018-08-14

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EXA Spectrum Analyzer	Agilent Technologies Inc	N9010A	SEM004-09	2016-07-19	2017-07-19
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Horn Antenna	ETS-Lindgren	3160	SEM003-12	2014-11-24	2017-11-24



	(18-26GHz)					
7	Horn Antenna(26GHz-40GHz)	A.H.Systems, inc.	SAS-573	SEM003-13	2015-02-12	2018-02-12
8	Low Noise Amplifier	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2016-10-09	2017-10-09
9	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A

20dB Bandwidth

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Conducted Peak Output Power

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Carrier Frequencies Separation

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Hopping Channel Number

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Dwell Time

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09



Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2016-10-12	2017-10-12
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2016-05-18	2017-05-18


6 Radio Spectrum Technical Requirement

6.1 Pseudorandom Frequency Hopping Sequence

6.1.1 Test Requirement:


RSS 247

6.1.2 Test Setup Diagram

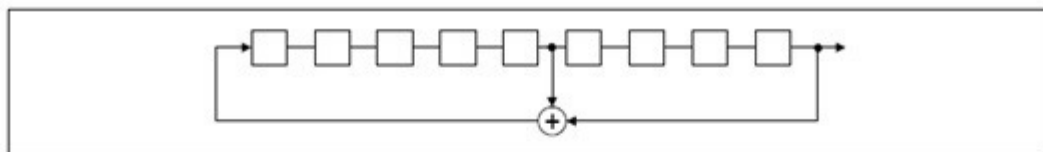

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

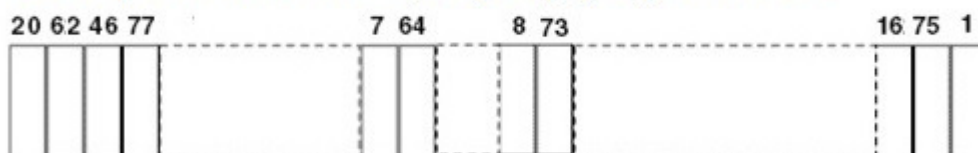

6.1.3 Conclusion

Standard Requirement:

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

Number of shift register stages: 9

Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

6.2 Antenna Requirement

6.2.1 Test Requirement:

RSS 247


6.2.2 Conclusion

Standard Requirement:

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -3dBi.

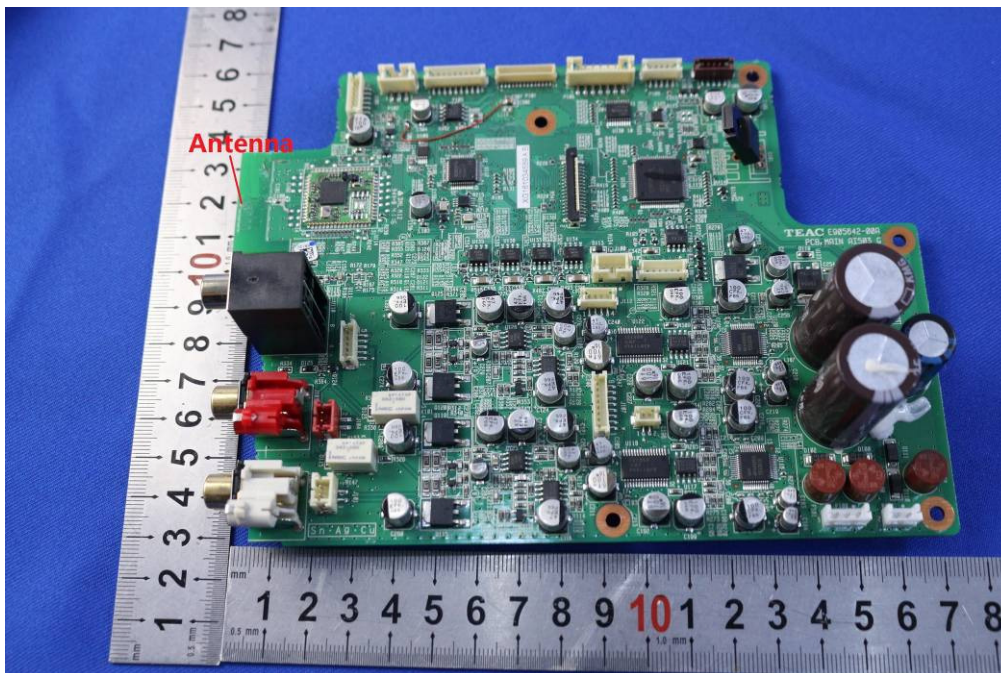

7 Radio Spectrum Matter Test Results

7.1 Conducted Disturbance at AC Power Line(150kHz-30MHz)

Test Requirement RSS-Gen Section 8.8
 Test Method: ANSI C63.10 (2013) Section 6.2
 Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX mode:Keep the EUT in transmitting mode

7.1.2 Test Setup Diagram

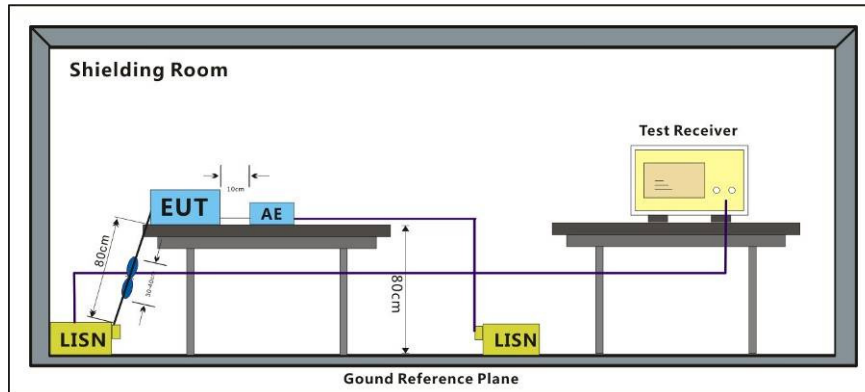


7.1.3 Measurement Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.




Mode:a; Line:Live Line

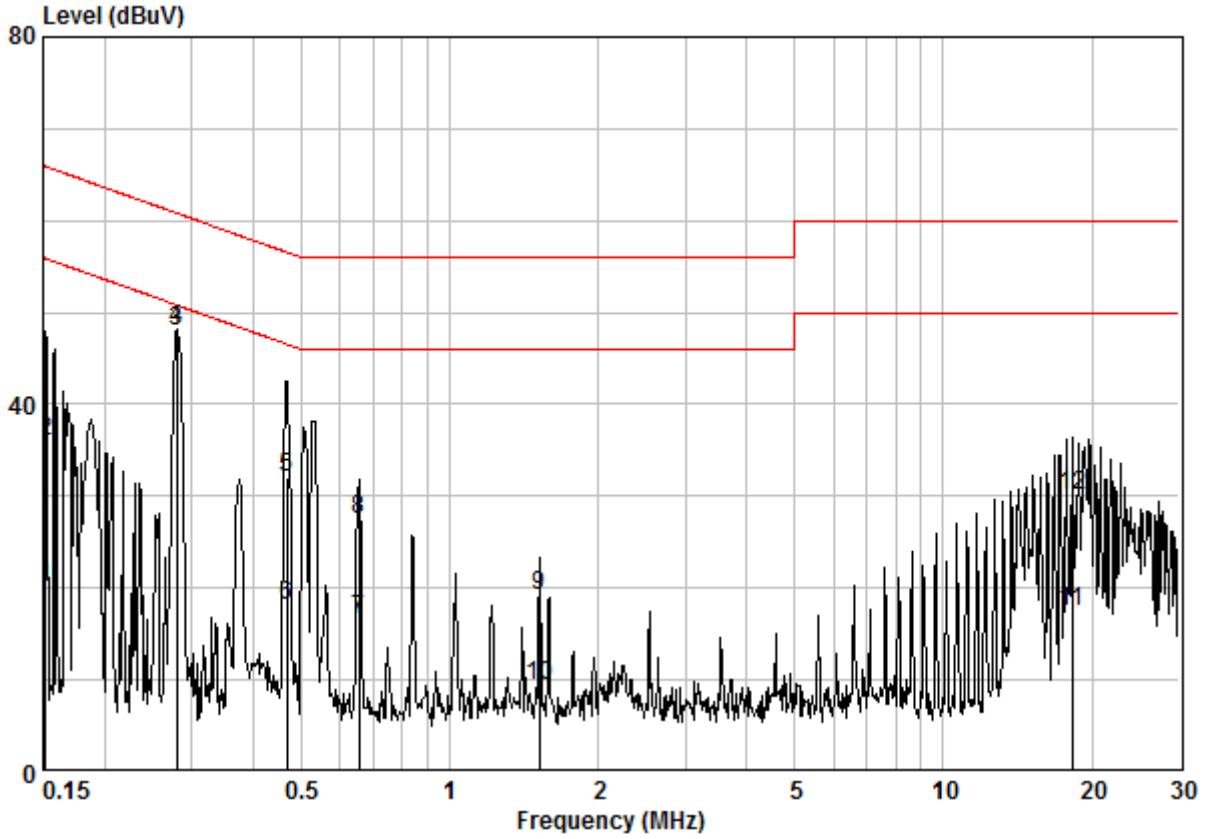

Site : Shielding Room
Condition : CE LINE
Job No. : 11226CR
Test Mode : a

	Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15160	0.02	9.64	10.31	19.97	55.91	-35.94	AVERAGE
2	0.15160	0.02	9.64	26.28	35.94	65.91	-29.97	QP
3 @	0.28000	0.02	9.64	38.40	48.06	50.82	-2.76	Average
4	0.28000	0.02	9.64	38.60	48.26	60.82	-12.56	QP
5	0.46861	0.02	9.64	22.30	31.96	56.54	-24.58	QP
6	0.46861	0.02	9.64	8.34	18.00	46.54	-28.54	AVERAGE
7	0.65430	0.02	9.65	6.90	16.58	46.00	-29.42	AVERAGE
8	0.65430	0.02	9.65	17.72	27.39	56.00	-28.61	QP
9	1.519	0.03	9.66	9.49	19.18	56.00	-36.82	QP
10	1.519	0.03	9.66	-0.39	9.30	46.00	-36.70	AVERAGE
11	18.232	0.17	10.10	7.15	17.42	50.00	-32.58	AVERAGE
12	18.232	0.17	10.10	19.74	30.01	60.00	-29.99	QP

Mode:a; Line:Neutral Line

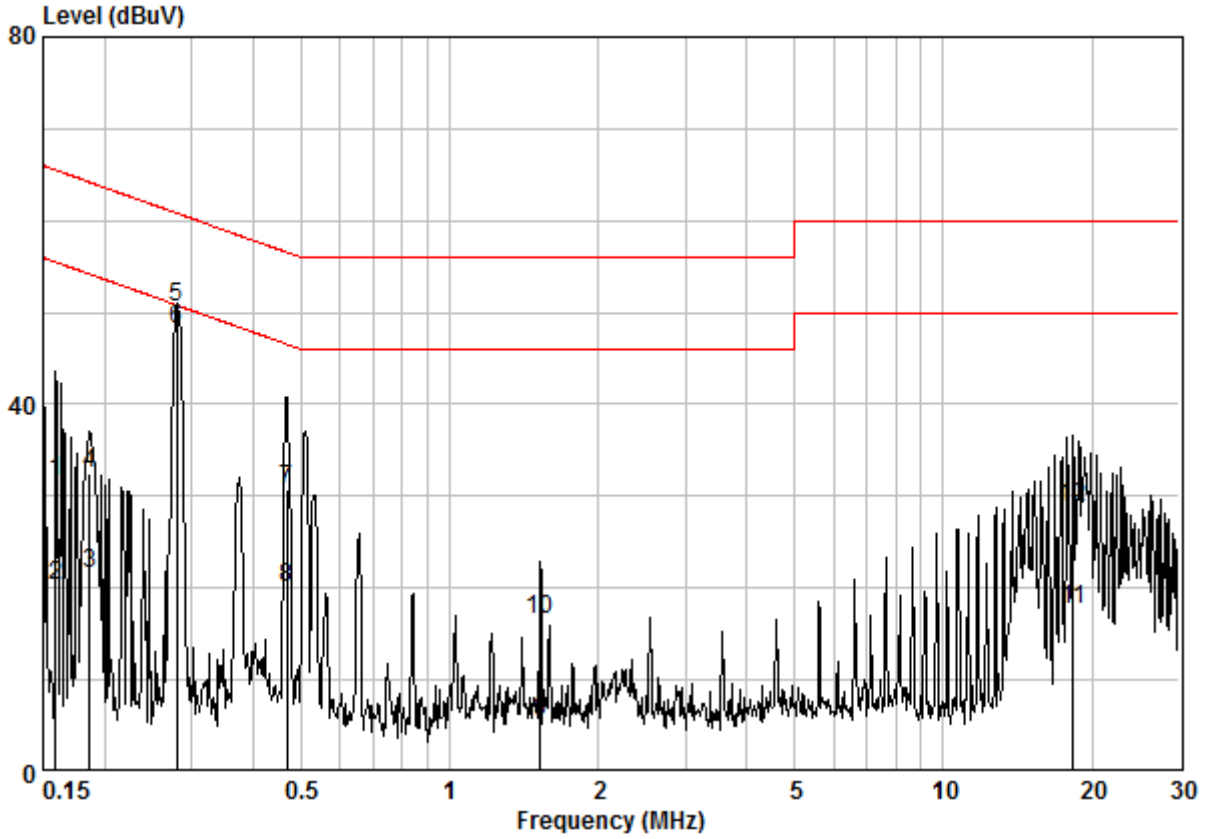

Site : Shielding Room
 Condition : CE NEUTRAL
 Job No. : 11226CR
 Test Mode : a

	Freq	Cable Loss	LISN Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15900	0.02	9.64	21.85	31.50	65.52	-34.01	QP
2	0.15900	0.02	9.64	10.60	20.25	55.52	-35.26	AVERAGE
3	0.18639	0.02	9.63	11.84	21.49	54.20	-32.71	AVERAGE
4	0.18639	0.02	9.63	22.74	32.39	64.20	-31.81	QP
5	0.28000	0.02	9.63	41.00	50.65	60.82	-10.17	QP
6 @	0.28000	0.02	9.63	38.50	48.15	50.82	-2.67	Average
7	0.46861	0.02	9.63	21.15	30.80	56.54	-25.74	QP
8	0.46861	0.02	9.63	10.39	20.04	46.54	-26.50	AVERAGE
9	1.527	0.03	9.65	-4.31	5.37	46.00	-40.63	AVERAGE
10	1.527	0.03	9.65	6.90	16.58	56.00	-39.42	QP
11	18.328	0.17	10.13	7.38	17.68	50.00	-32.32	AVERAGE
12	18.328	0.17	10.13	18.50	28.79	60.00	-31.21	QP

7.2 99% Bandwidth

Test Requirement RSS-Gen Section 6.6

Test Method: RSS-Gen Section 6.6

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type
 Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

Only the worst case is recorded in the report.

7.2.2 Test Setup Diagram

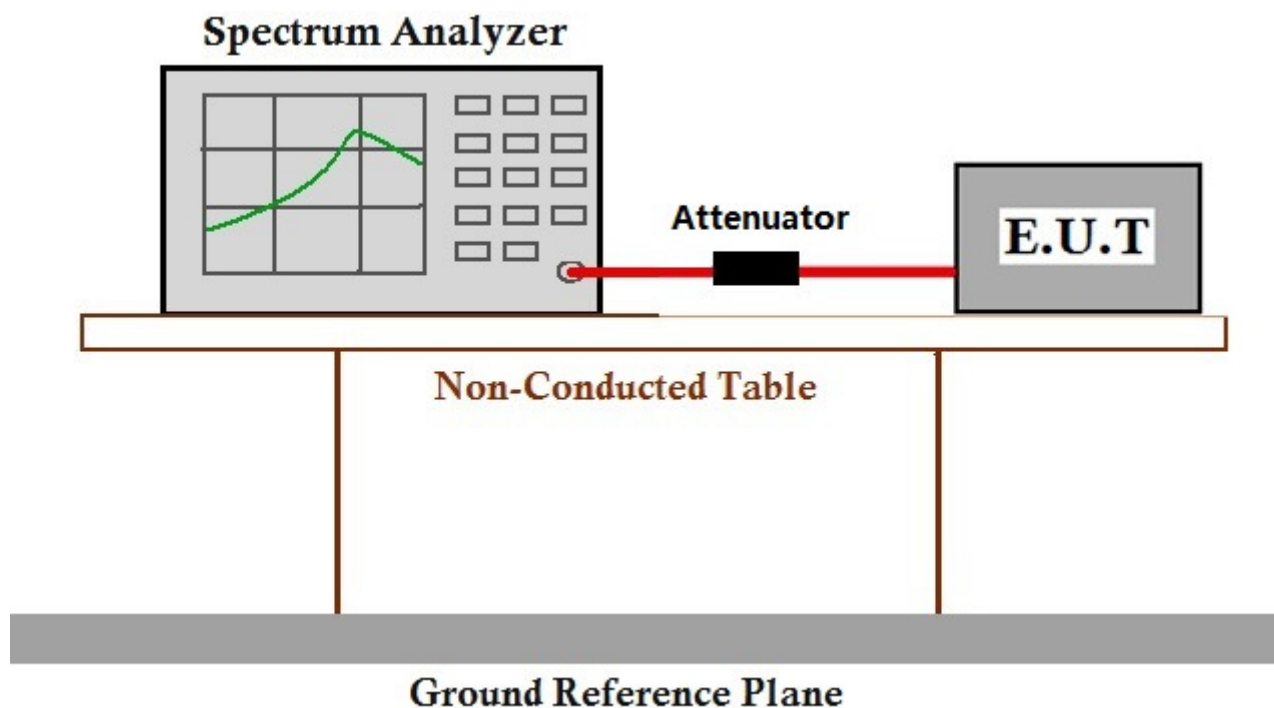

7.2.3 Measurement Data

The detailed test data see: Appendix RSS247



7.3 Conducted Peak Output Power

Test Requirement	RSS-247 Section 5.4(2)
Test Method:	ANSI C63.10 (2013) Section 7.8.5
Limit:	20.97dBm

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type
 Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.
 Only the worst case is recorded in the report.

7.3.2 Test Setup Diagram

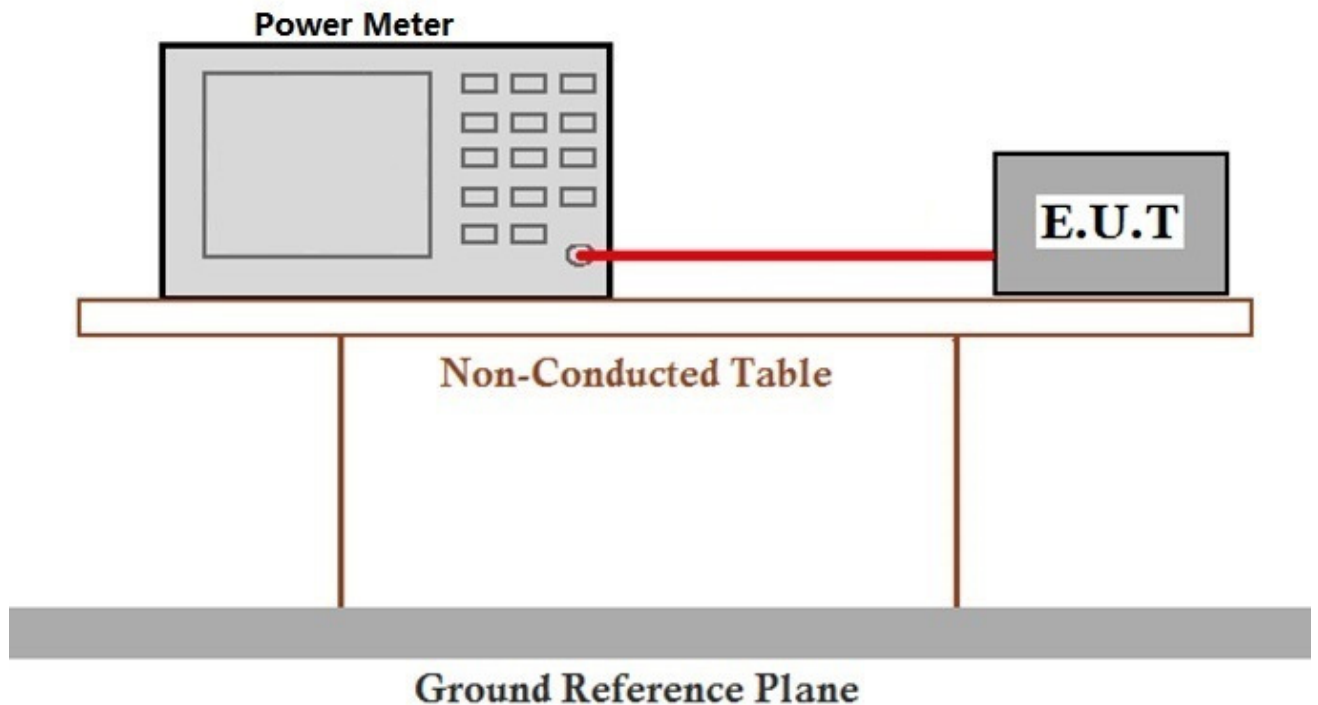

7.3.3 Measurement Data

The detailed test data see: Appendix RSS247

7.4 Carrier Frequencies Separation

Test Requirement	RSS-247 Section 5.1(2)
Test Method:	ANSI C63.10 (2013) Section 7.8.2
Limit:	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

7.4.1 E.U.T. Operation

Operating Environment:


Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Hopping transmitting with all kind of modulation and all kind of data type
Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

Only the worst case is recorded in the report.

7.4.2 Test Setup Diagram

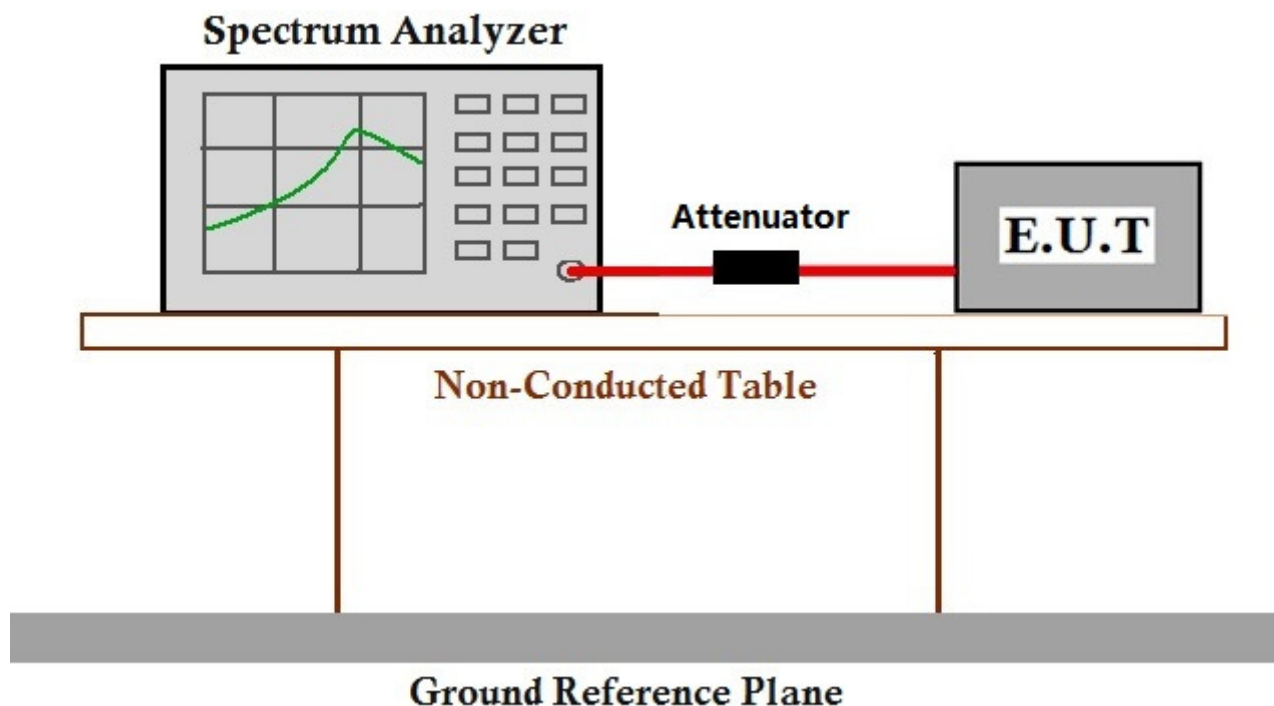

7.4.3 Measurement Data

The detailed test data see: Appendix RSS247



7.5 Hopping Channel Number

Test Requirement RSS-247 Section 5.1(3)
Test Method: ANSI C63.10 (2013) Section 7.8.3
Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Hopping transmitting with all kind of modulation and all kind of data type
Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

Only the worst case is recorded in the report.

7.5.2 Test Setup Diagram

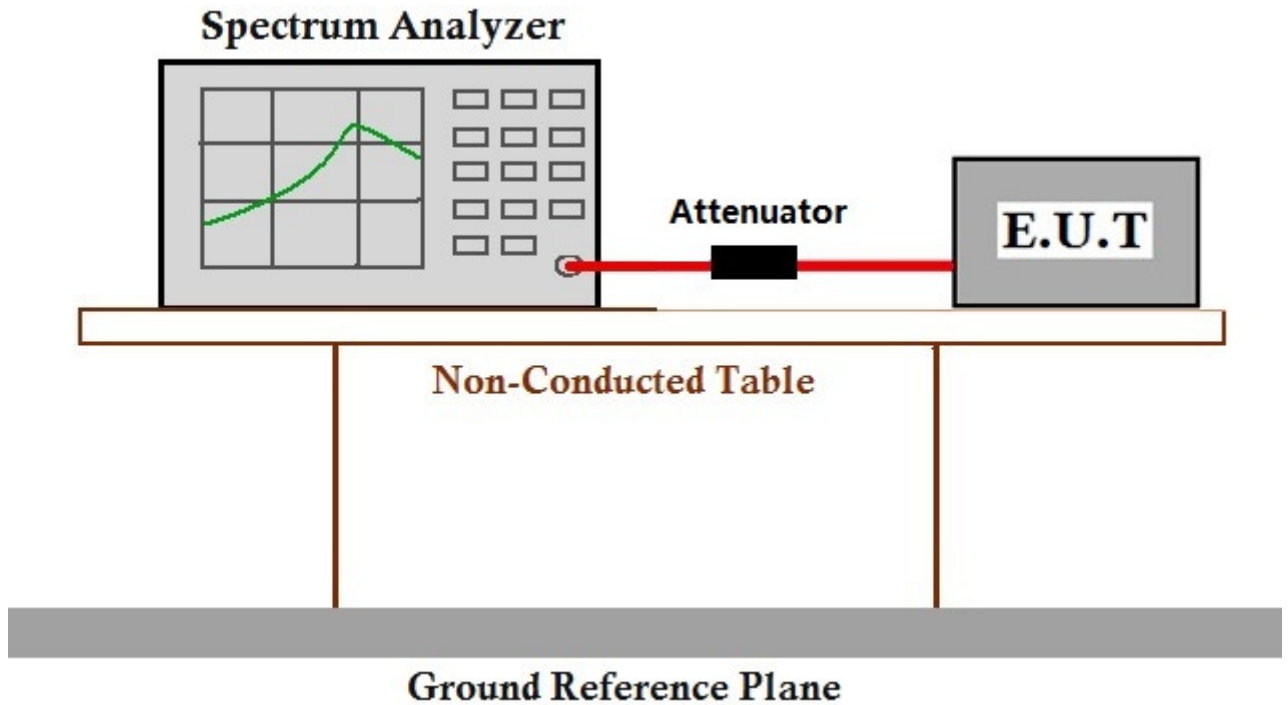

7.5.3 Measurement Data

The detailed test data see: Appendix RSS247



7.6 Dwell Time

Test Requirement RSS-247 Section 5.1(4)
Test Method: ANSI C63.10 (2013) Section 7.8.4
Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period


7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Test Mode: Hopping transmitting with all kind of modulation and all kind of data type
 Transmitting mode.

7.6.2 Test Setup Diagram

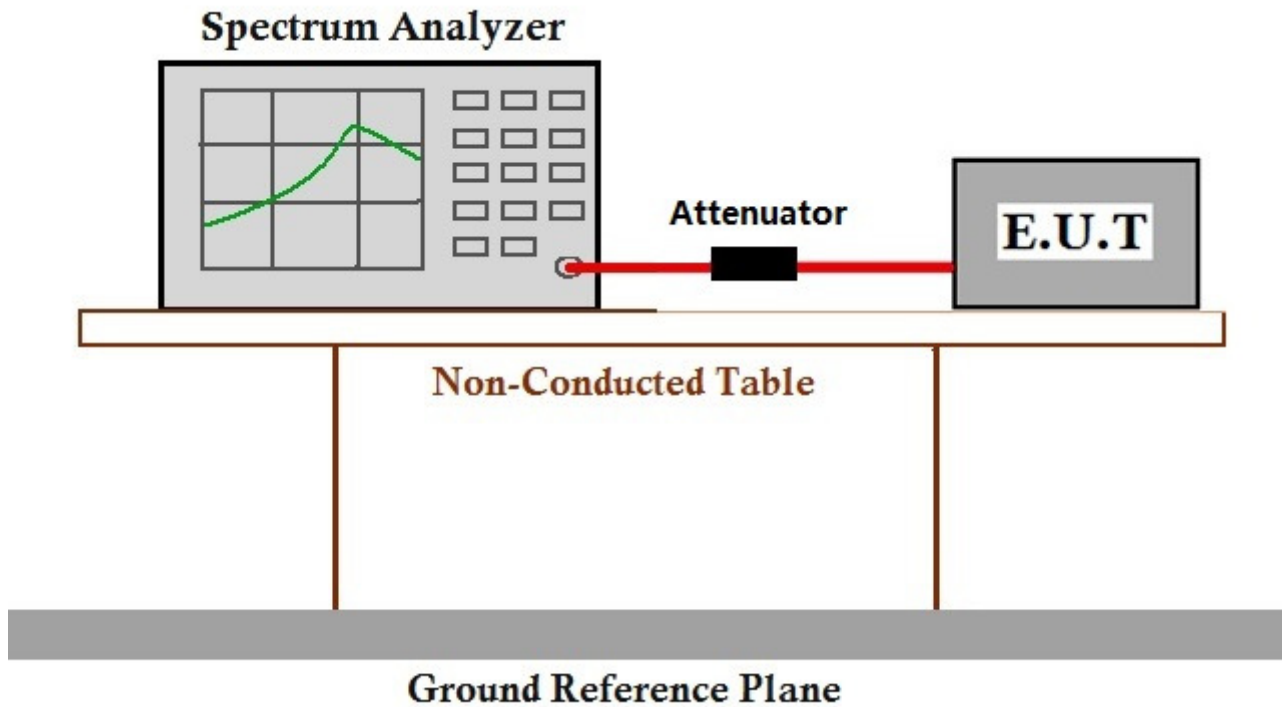

7.6.3 Measurement Data

The detailed test data see: Appendix RSS247


7.7 Conducted Spurious Emissions

Test Requirement RSS-247 Section 5.5
 Test Method: ANSI C63.10 (2013) Section 7.8.6
 Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.7.1 E.U.T. Operation

Operating Environment:
 Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar
 Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type
 Mode: Transmitting mode.
 Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.
 Only the worst case is recorded in the report.

7.7.2 Test Setup Diagram

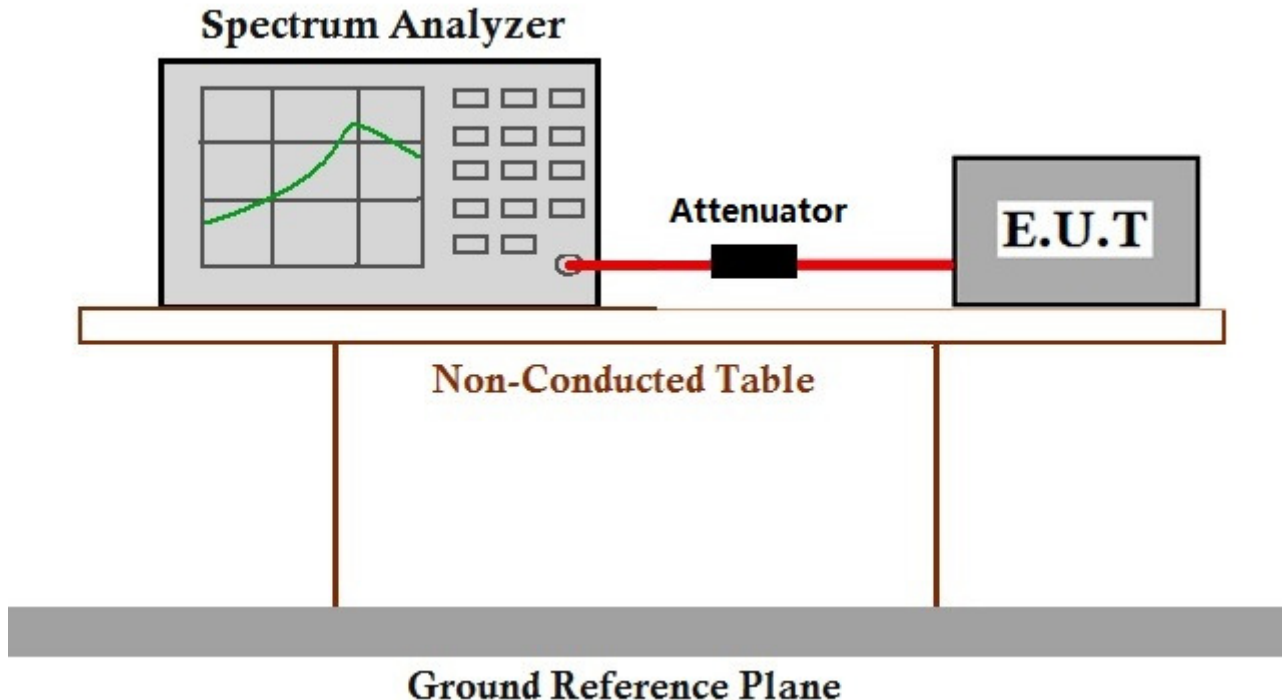

7.7.3 Measurement Data

The detailed test data see: Appendix RSS247



7.8 Radiated Spurious Emissions

Test Requirement RSS-Gen Section 8.8
Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6
Measurement Distance: 10 meter semi-anechoic chamber
 3 meter fully-anechoic chamber

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz and 110-490kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 53 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting mode with all kind of modulation and all kind of data type


Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH1 of data type and 8DPSK modulation is the worst case.

For below 1GHz part, through pre-scan, the worst case is the lowest channel.

Only the worst case is recorded in the report.

7.8.2 Test Setup Diagram

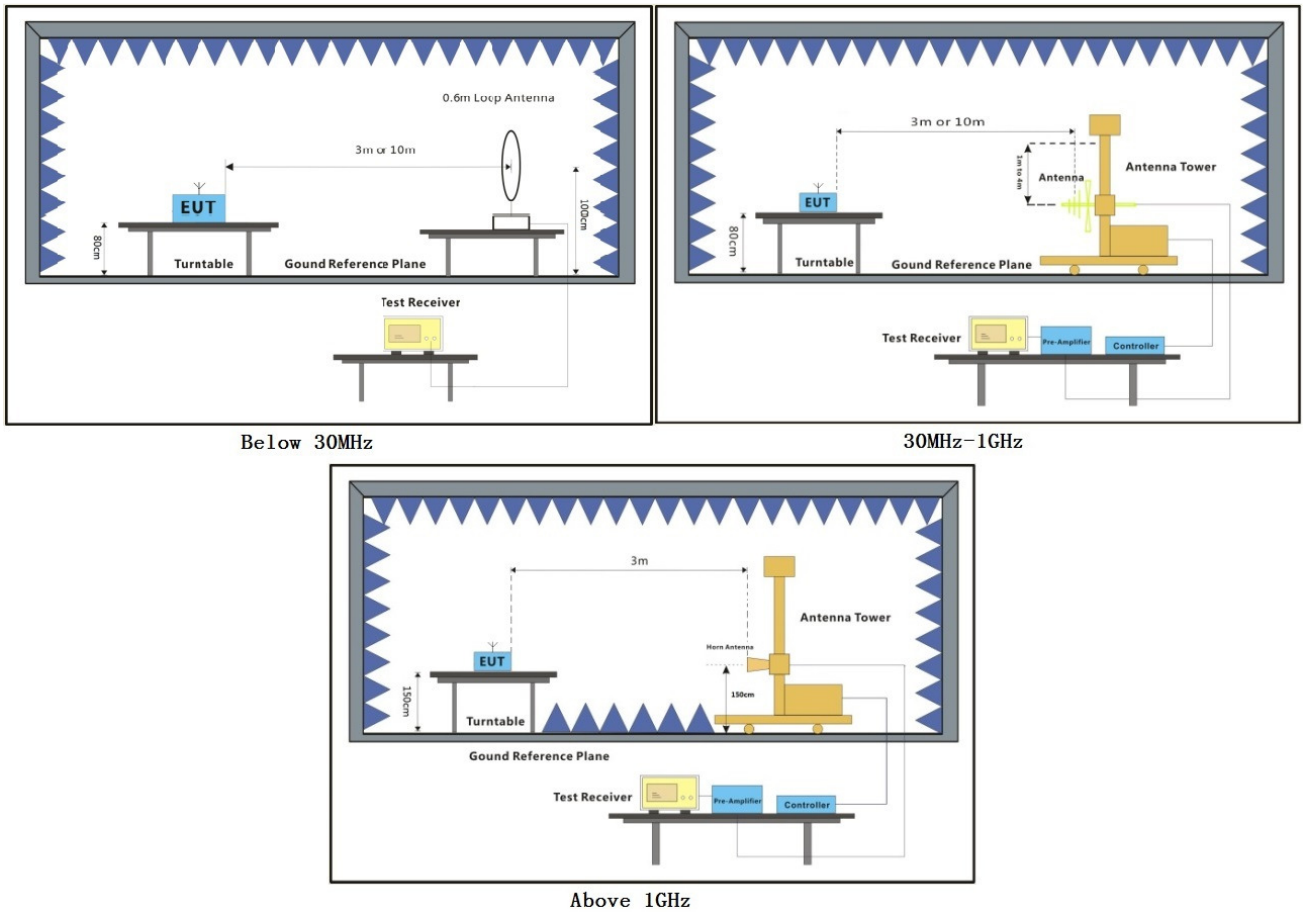



7.8.3 Measurement Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.



Below 1G:

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

L₃: Level @ 3m distance. Unit: uV/m;


L₁₀: Level @ 10m distance. Unit: uV/m;

D₃: 3m distance. Unit: m

D₁₀: 10m distance. Unit: m


The level at 3m test distance is below:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization
30.85	17.87	7.83	26.08	28.33	40.00	-11.67	V
46.83	16.29	6.52	21.75	26.75	40.00	-13.25	V
60.28	15.34	5.85	19.49	25.80	40.00	-14.20	V
338.40	22.20	12.88	42.94	32.66	46.00	-13.34	V
636.13	23.92	15.70	52.35	34.38	46.00	-11.62	V
909.67	26.13	20.25	67.51	36.59	46.00	-9.41	V
38.75	13.93	4.97	16.57	24.39	40.00	-15.61	H
54.45	13.51	4.74	15.79	23.97	40.00	-16.03	H
156.46	15.75	6.13	20.44	26.21	43.50	-17.29	H
338.40	19.71	9.67	32.24	30.17	46.00	-15.83	H
638.37	23.94	15.74	52.47	34.40	46.00	-11.60	H
807.43	26.73	21.70	72.34	37.19	46.00	-8.81	H

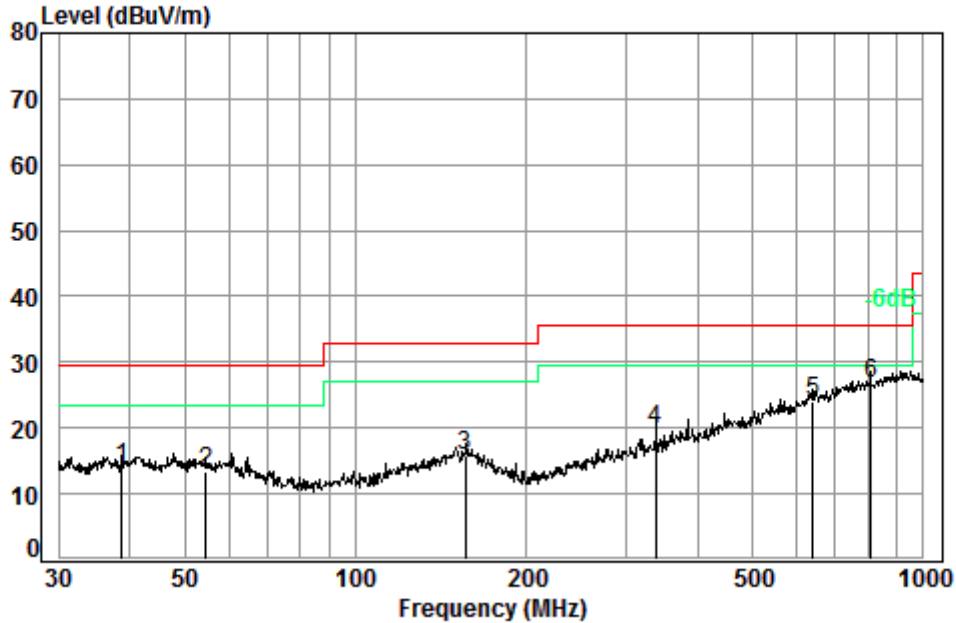

Condition: 10m HORIZONTAL
Job No. : 11226CR
Test Mode: a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	38.75	6.78	13.16	32.98	26.97	13.93	29.50	-15.57
2	54.45	6.99	12.42	32.98	27.08	13.51	29.50	-15.99
3	156.46	7.48	13.40	32.74	27.61	15.75	33.00	-17.25
4	338.40	8.19	13.63	32.60	30.49	19.71	35.60	-15.89
5	638.37	9.00	19.39	32.60	28.15	23.94	35.60	-11.66
6 pp	807.43	9.30	21.28	32.59	28.74	26.73	35.60	-8.87

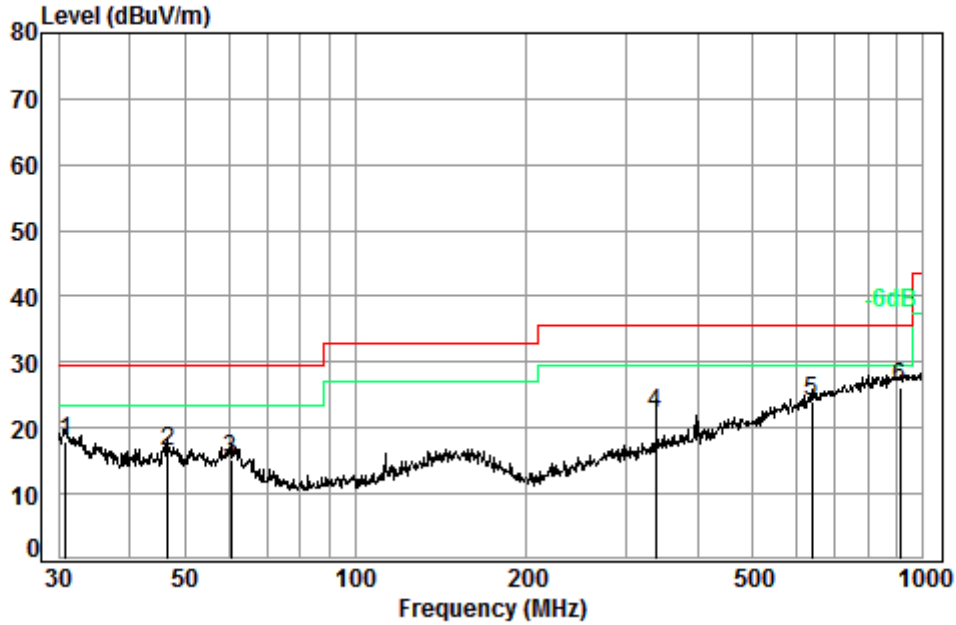

Condition: 10m VERTICAL
Job No. : 11226CR
Test Mode: a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.85	6.70	12.50	32.97	31.64	17.87	29.50	-11.63
2	46.83	6.84	12.85	33.00	29.60	16.29	29.50	-13.21
3	60.28	7.00	11.94	32.95	29.35	15.34	29.50	-14.16
4	338.40	8.19	13.63	32.60	32.98	22.20	35.60	-13.40
5	636.13	8.99	19.36	32.60	28.17	23.92	35.60	-11.68
6 pp	909.67	9.50	22.35	32.50	26.78	26.13	35.60	-9.47



Above 1GHz

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:Low

Freq (MHz)	Antenna_Factor (dB/m)	Cable_Loss (dB)	Preamp_Gain (dB)	Read_Level (dBuV)	Level (dBuV/m)	Limit_Line (dBuV/m)	Over_Limit (dB)
3966.435	33.51	7.80	38.00	45.71	49.02	74.00	-24.98
4804.000	34.16	8.87	38.40	45.59	50.22	74.00	-23.78
6078.201	34.76	10.46	38.22	44.68	51.68	74.00	-22.32
7206.000	36.42	10.68	37.11	43.45	53.44	74.00	-20.56
9608.000	37.52	12.50	35.10	38.38	53.30	74.00	-20.70
12137.940	38.68	14.45	35.93	35.75	52.95	74.00	-21.05

Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:Low

Freq (MHz)	Antenna_Factor (dB/m)	Cable_Loss (dB)	Preamp_Gain (dB)	Read_Level (dBuV)	Level (dBuV/m)	Limit_Line (dBuV/m)	Over_Limit (dB)
3831.060	33.15	7.75	37.98	45.22	48.14	74.00	-25.86
4804.000	34.16	8.87	38.40	45.74	50.37	74.00	-23.63
5947.702	34.67	10.42	38.31	45.50	52.28	74.00	-21.72
7206.000	36.42	10.68	37.11	42.95	52.94	74.00	-21.06
9608.000	37.52	12.50	35.10	38.90	53.82	74.00	-20.18
12332.670	38.80	14.29	36.40	36.07	52.76	74.00	-21.24

Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:middle

Freq (MHz)	Antenna_Factor (dB/m)	Cable_Loss (dB)	Preamp_Gain (dB)	Read_Level (dBuV)	Level (dBuV/m)	Limit_Line (dBuV/m)	Over_Limit (dB)
3792.453	33.04	7.74	37.98	45.07	47.87	74.00	-26.13
4882.000	34.30	8.98	38.44	44.45	49.29	74.00	-24.71
6060.637	34.75	10.48	38.24	44.96	51.95	74.00	-22.05
7323.000	36.37	10.72	37.01	42.92	53.00	74.00	-21.00
9764.000	37.55	12.58	35.02	37.90	53.01	74.00	-20.99
12314.840	38.79	14.30	36.36	36.74	53.47	74.00	-20.53

Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:middle

Freq (MHz)	Antenna_Factor (dB/m)	Cable_Loss (dB)	Preamp_Gain (dB)	Read_Level (dBuV)	Level (dBuV/m)	Limit_Line (dBuV/m)	Over_Limit (dB)
3954.973	33.48	7.79	38.00	44.74	48.01	74.00	-25.99
4882.000	34.30	8.98	38.44	44.87	49.71	74.00	-24.29
6193.614	34.86	10.31	38.11	44.74	51.80	74.00	-22.20
7323.000	36.37	10.72	37.01	43.46	53.54	74.00	-20.46
9764.000	37.55	12.58	35.02	38.18	53.29	74.00	-20.71
12243.770	38.75	14.36	36.19	35.91	52.83	74.00	-21.17



Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:High

Freq (MHz)	Antenna_Factor (dB/m)	Cable_Loss (dB)	Preamp_Gain (dB)	Read_Level (dBuV)	Level (dBuV/m)	Limit_Line (dBuV/m)	Over_Limit (dB)
3842.163	33.18	7.76	37.98	44.99	47.95	74.00	-26.05
4960.000	34.43	9.09	38.48	44.80	49.84	74.00	-24.16
6078.201	34.76	10.46	38.22	44.82	51.82	74.00	-22.18
7440.000	36.32	10.77	36.90	43.06	53.25	74.00	-20.75
9920.000	37.58	12.67	34.94	38.01	53.32	74.00	-20.68
12297.040	38.78	14.31	36.31	35.84	52.62	74.00	-21.38

Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:High

Freq (MHz)	Antenna_Factor (dB/m)	Cable_Loss (dB)	Preamp_Gain (dB)	Read_Level (dBuV)	Level (dBuV/m)	Limit_Line (dBuV/m)	Over_Limit (dB)
3898.160	33.33	7.78	37.99	44.74	47.86	74.00	-26.14
4960.000	34.43	9.09	38.48	45.38	50.42	74.00	-23.58
6193.614	34.86	10.31	38.11	44.82	51.88	74.00	-22.12
7440.000	36.32	10.77	36.90	43.47	53.66	74.00	-20.34
9920.000	37.58	12.67	34.94	38.01	53.32	74.00	-20.68
12050.440	38.63	14.52	35.72	36.01	53.44	74.00	-20.56

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



7.9 Radiated Emissions which fall in the restricted bands

Test Requirement RSS-Gen Section 8.8
Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar


Exploratory Test Mode: Non-hopping transmitting mode with all kind of modulation and all kind of data type

Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH1 of data type and 8DPSK modulation is the worst case.

Only the worst case is recorded in the report.

7.9.2 Test Setup Diagram

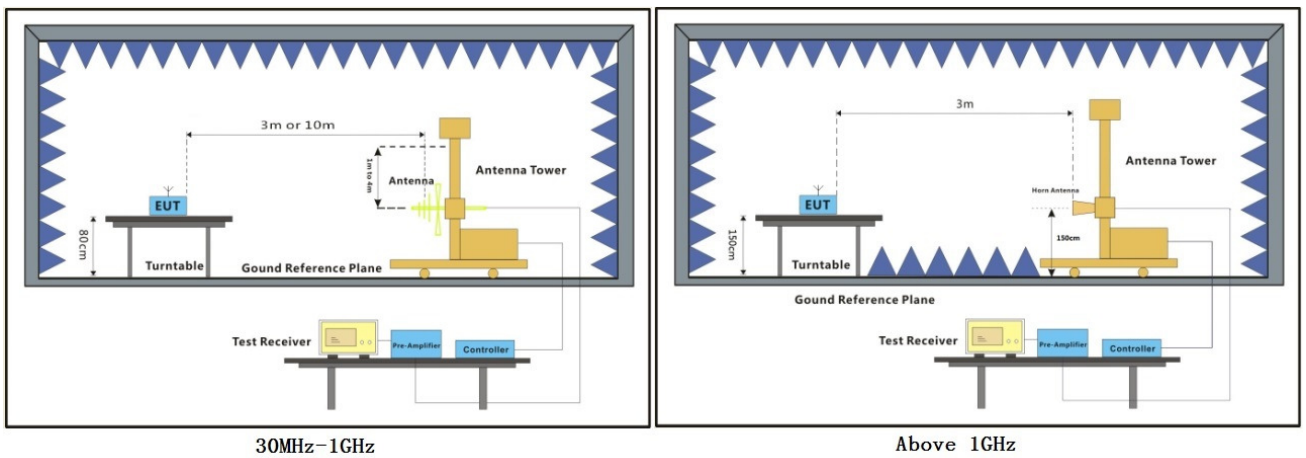




7.9.3 Measurement Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.



Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:Low

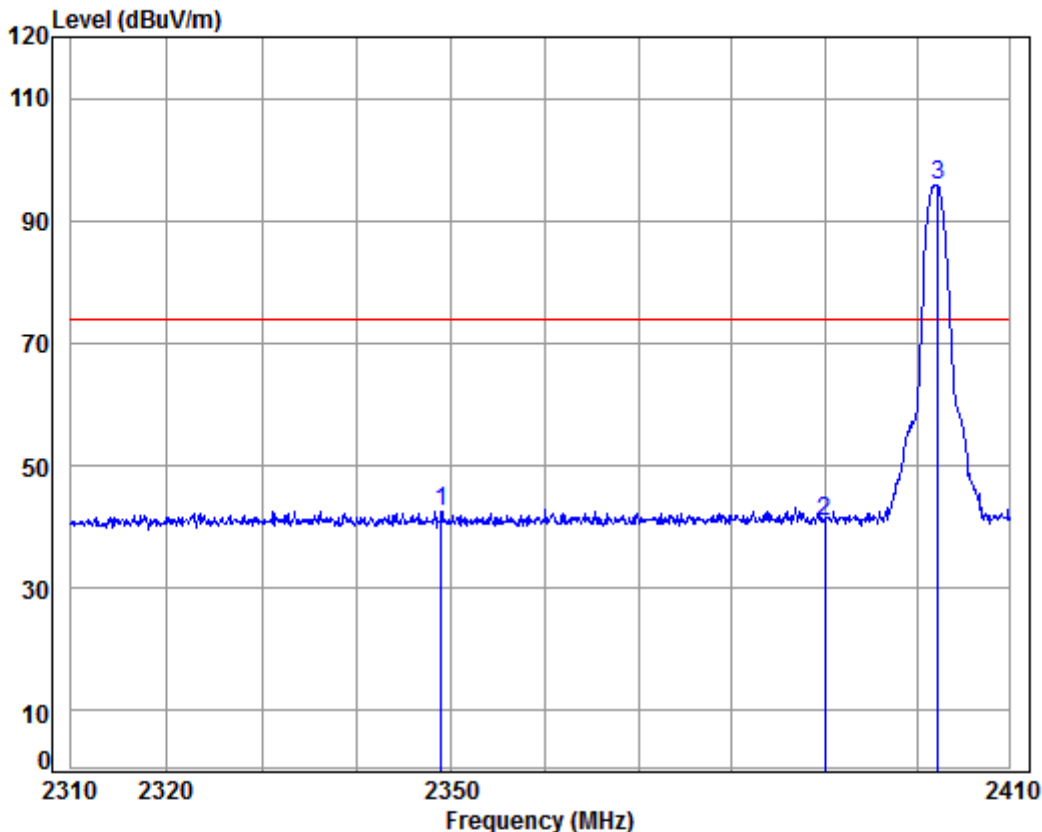


Condition: 3m HORIZONTAL
Job No: : 11225CR
Mode: : 2402 Band edge
: BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2348.994	5.31	28.95	37.97	46.34	42.63	74.00	-31.37	
2	2390.000	5.34	29.08	37.96	44.48	40.94	74.00	-33.06	
3	pp 2402.250	5.35	29.11	37.96	99.26	95.76	74.00	21.76	



Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:Low

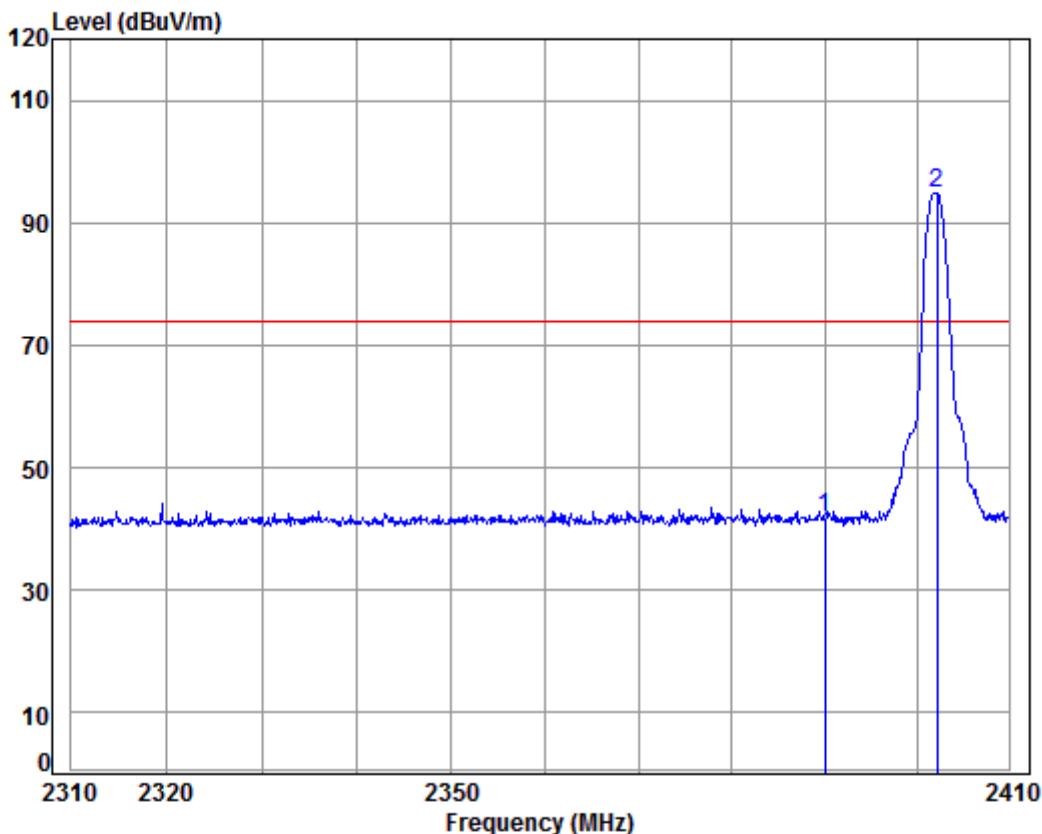


Condition: 3m Vertical
Job No: : 11225CR
Mode: : 2402 Band edge
: BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	5.34	29.08	37.96	45.49	41.95	74.00	-32.05	
2	pp 2402.148	5.35	29.11	37.96	98.34	94.84	74.00	20.84	




Mode:a; Polarization:Horizontal; Modulation Type:GFSK; ; Channel:High

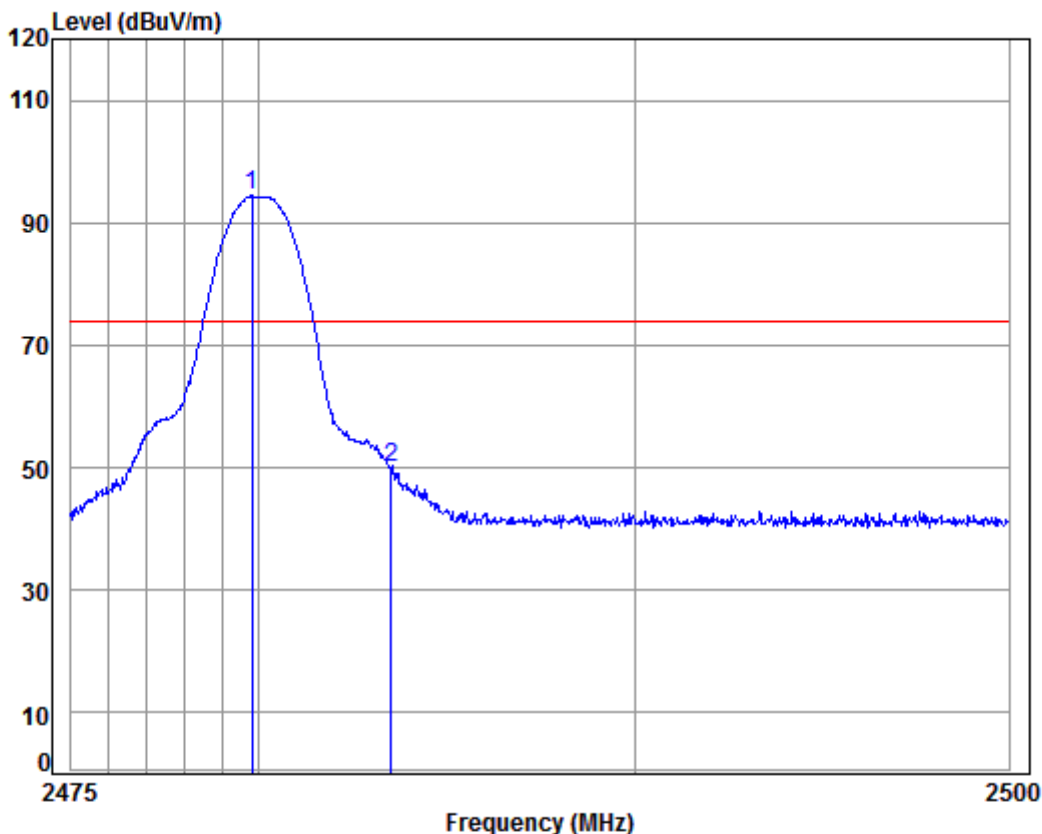

Condition: 3m HORIZONTAL
Job No: : 11225CR
Mode: : 2480 Band edge
: BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.805	5.41	29.34	37.95	97.54	94.34	74.00	20.34	
2	2483.500	5.41	29.35	37.95	53.22	50.03	74.00	-23.97	

Mode:a; Polarization:Vertical; Modulation Type:GFSK; ; Channel:High

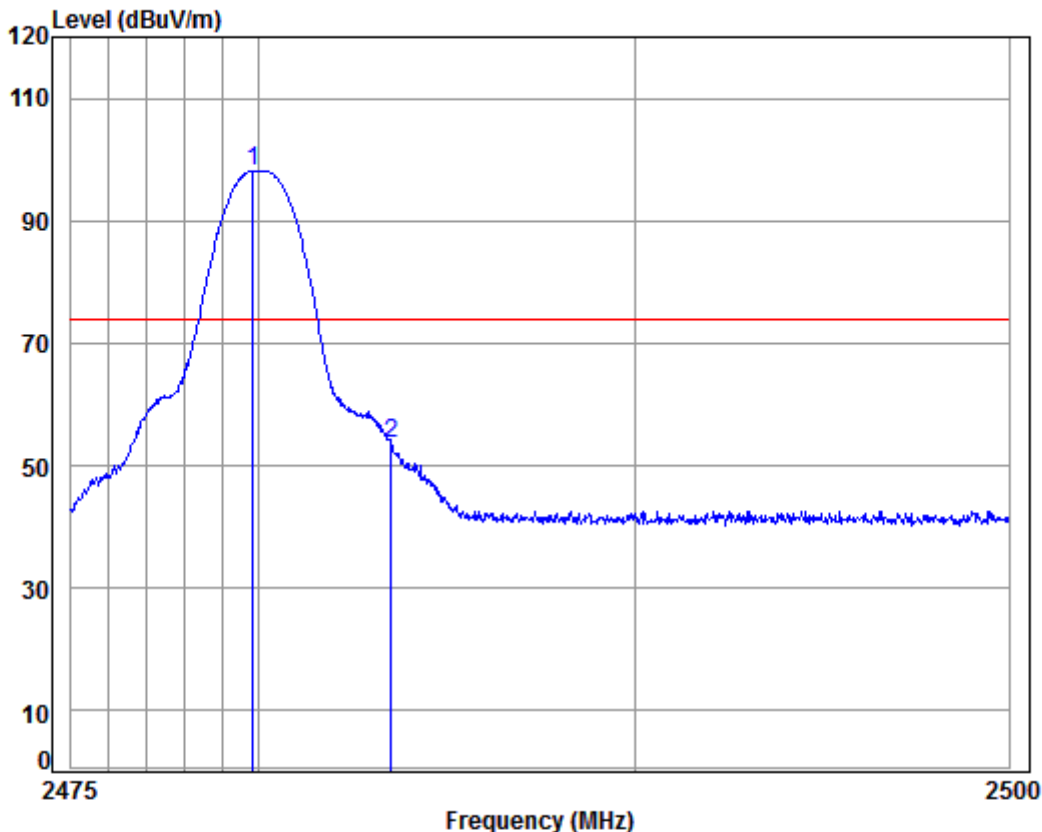

Condition: 3m VERTICAL
 Job No: : 11225CR
 Mode: : 2480 Band edge
 : BT

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.830	5.41	29.34	37.95	101.30	98.10	74.00	24.10	
2	2483.500	5.41	29.35	37.95	56.65	53.46	74.00	-20.54	


7.10 Conducted Band Edges Measurement

Test Requirement: RSS-247 Section 5.5
 Test Method: ANSI C63.10 (2013) Section 7.8.8
 Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.10.1 E.U.T. Operation

Operating Environment:
 Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar
 Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type
 Mode: Transmitting mode.
 Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.
 Only the worst case is recorded in the report.

7.10.2 Test Setup Diagram

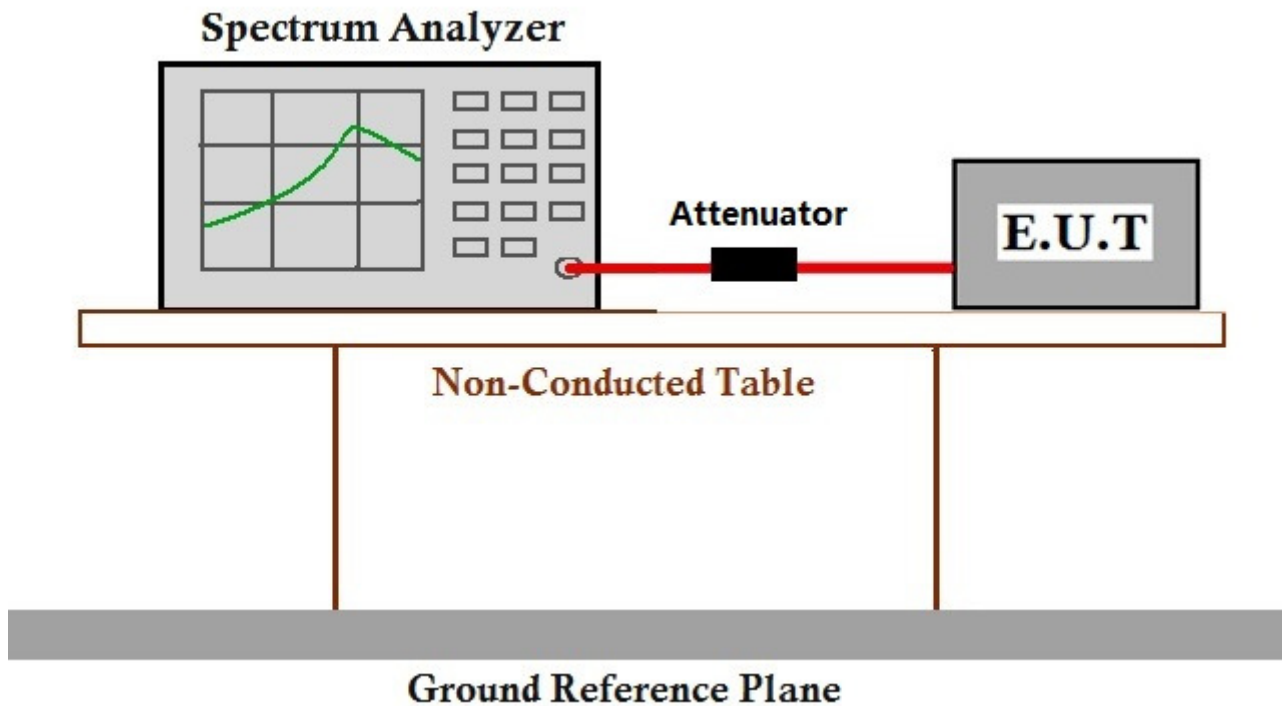

7.10.3 Measurement Data

The detailed test data see: Appendix RSS247

7.11 20dB Bandwidth

Test Requirement RSS-247 Section 5.1(2)
Test Method: RSS-247 Section 5.1(2)

7.11.1 E.U.T. Operation

Operating Environment:


Temperature: 23 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type
Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

Only the worst case is recorded in the report.

7.11.2 Test Setup Diagram

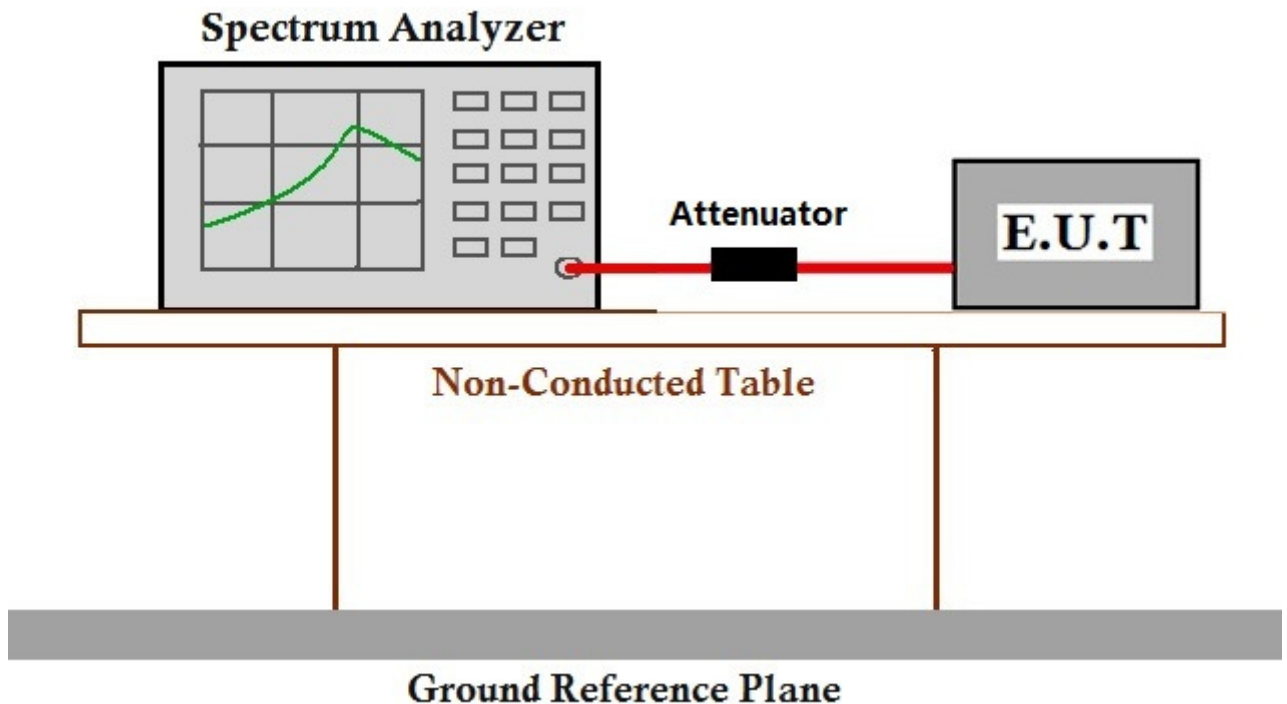

7.11.3 Measurement Data



The detailed test data see: Appendix RSS247

8 Photographs

8.1 Conducted Disturbance at AC Power Line(150kHz-30MHz) Test Setup



8.2 Radiated Spurious Emissions Test Setup

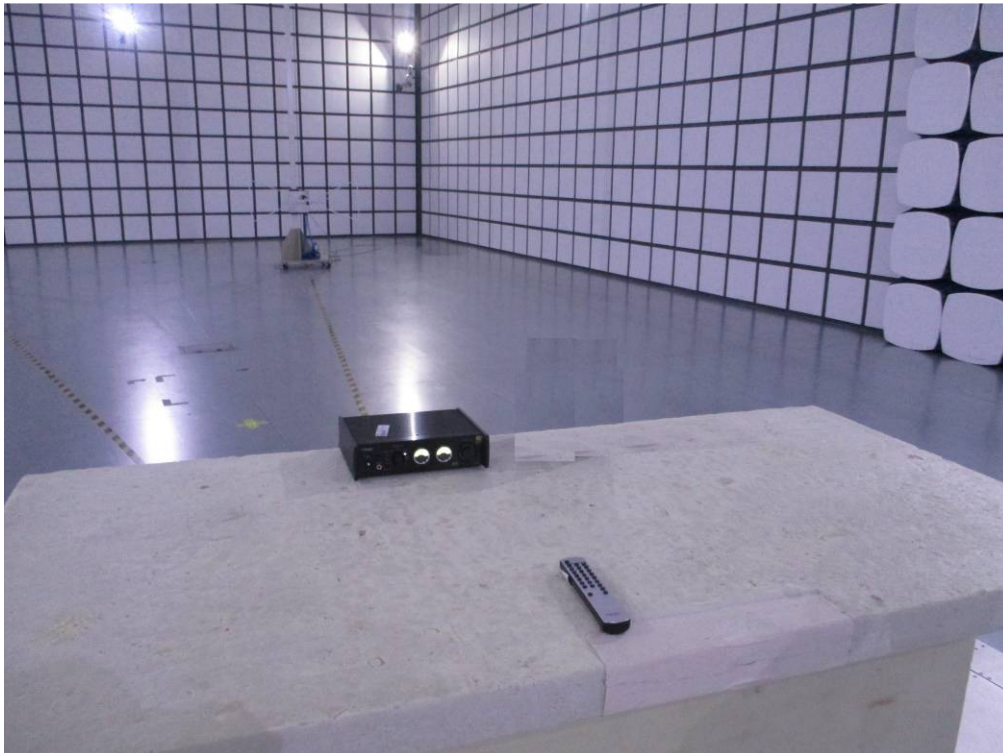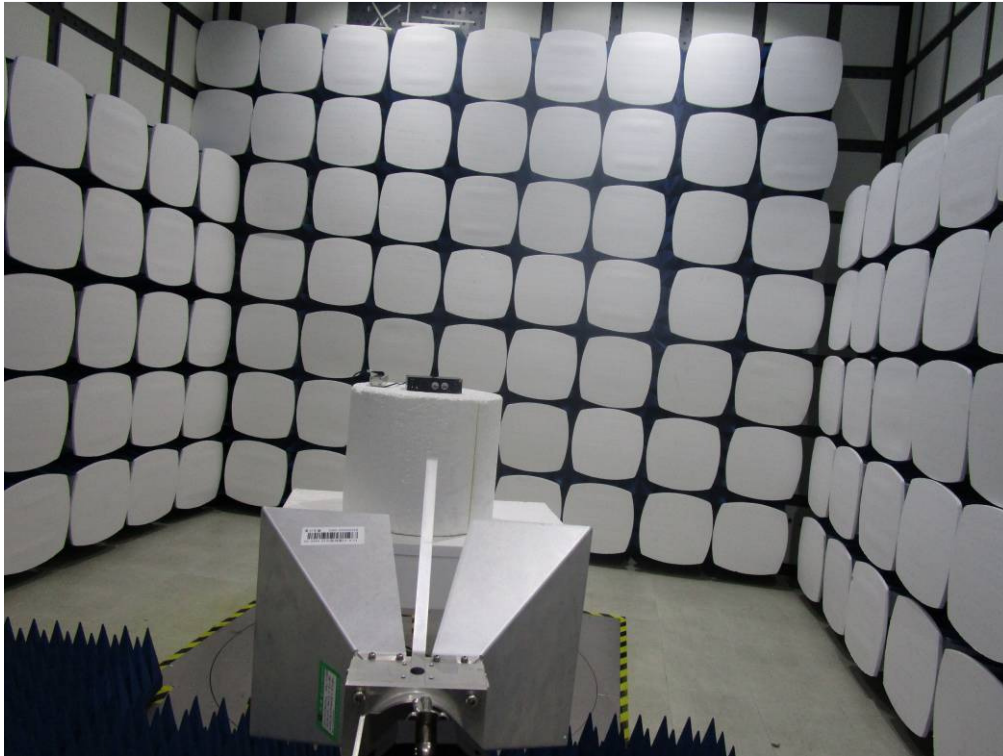



8.3 EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1612011226CR.





9 Appendix


9.1 Appendix RSS247


1.20 dB Bandwidth


Test Mode	Test Channel	EBW[MHz]	Limit[MHz]	Verdict
DH5	2402	0.944	---	PASS
DH5	2441	0.944	---	PASS
DH5	2480	0.946	---	PASS
2DH5	2402	1.264	---	PASS
2DH5	2441	1.266	---	PASS
2DH5	2480	1.266	---	PASS
3DH5	2402	1.256	---	PASS
3DH5	2441	1.260	---	PASS
3DH5	2480	1.264	---	PASS

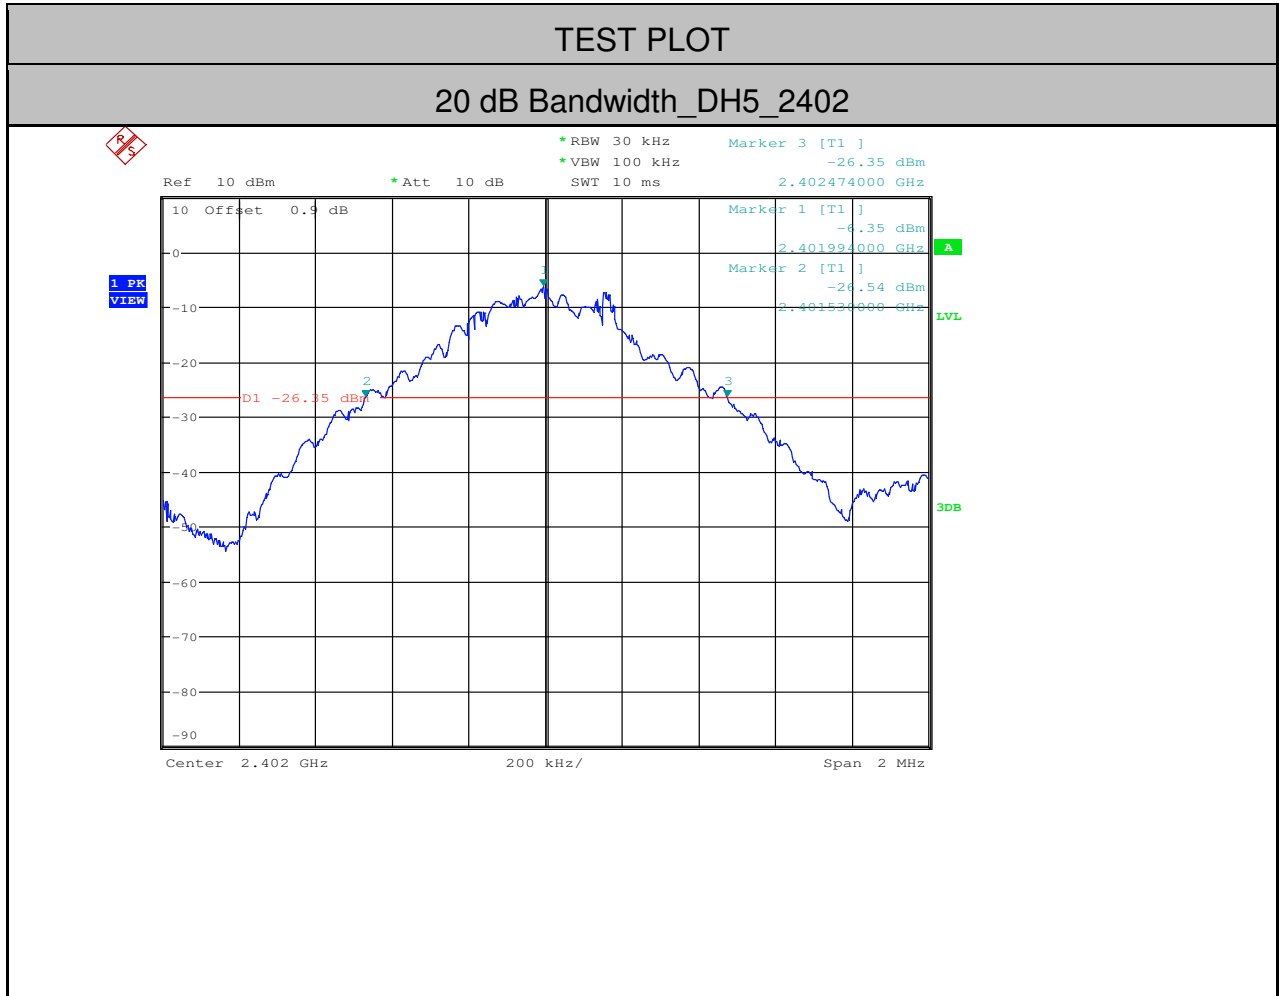


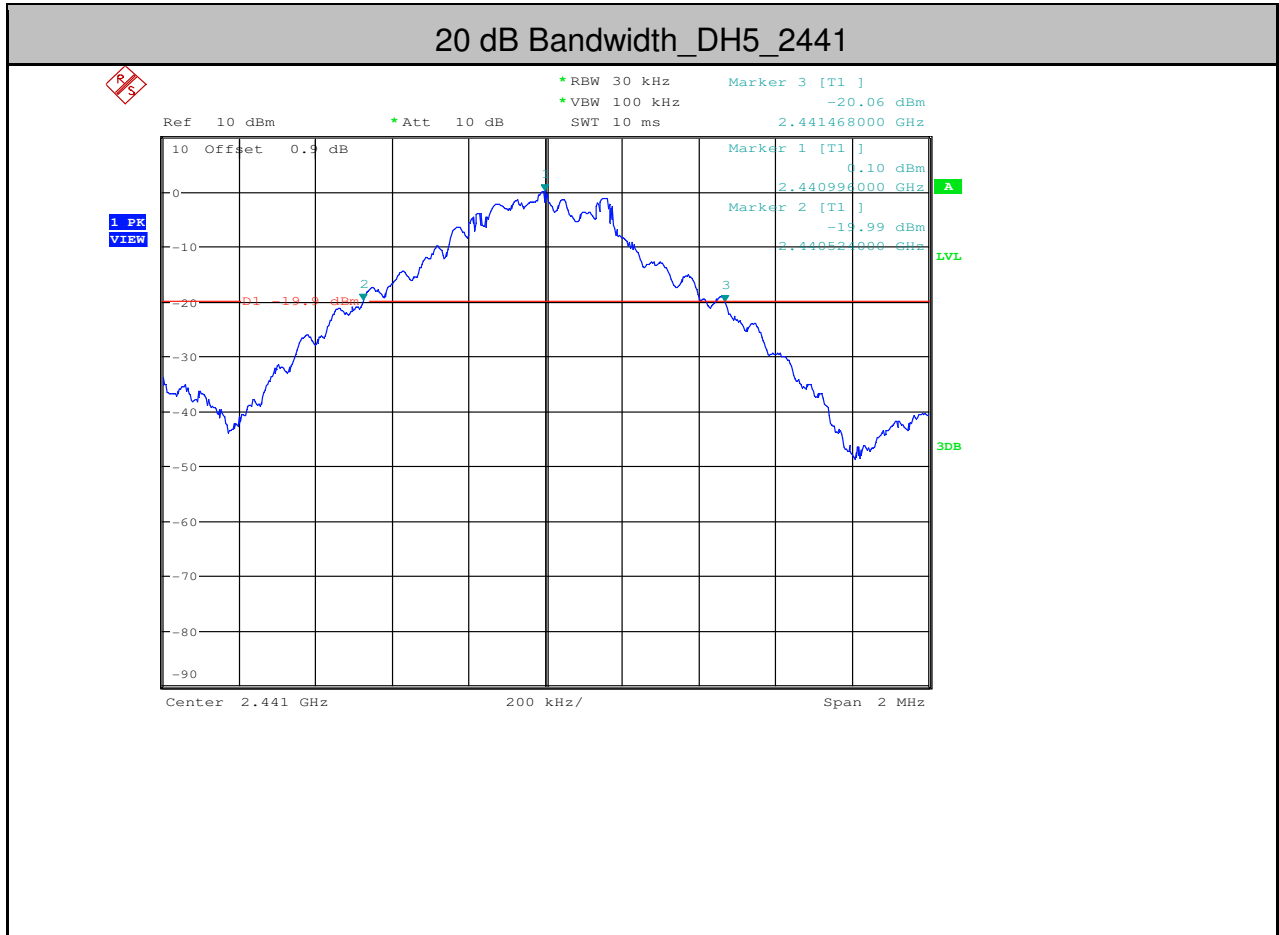


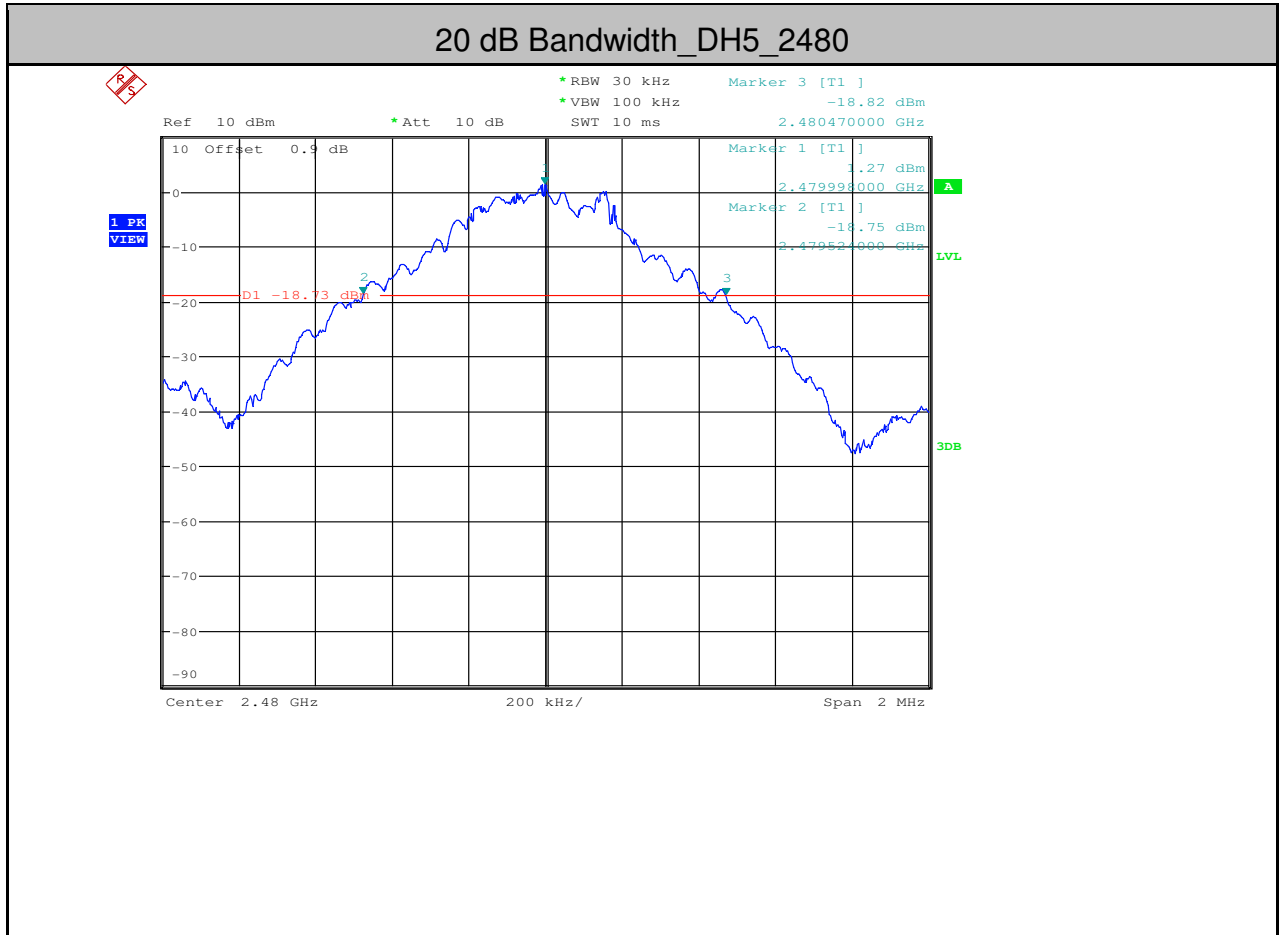


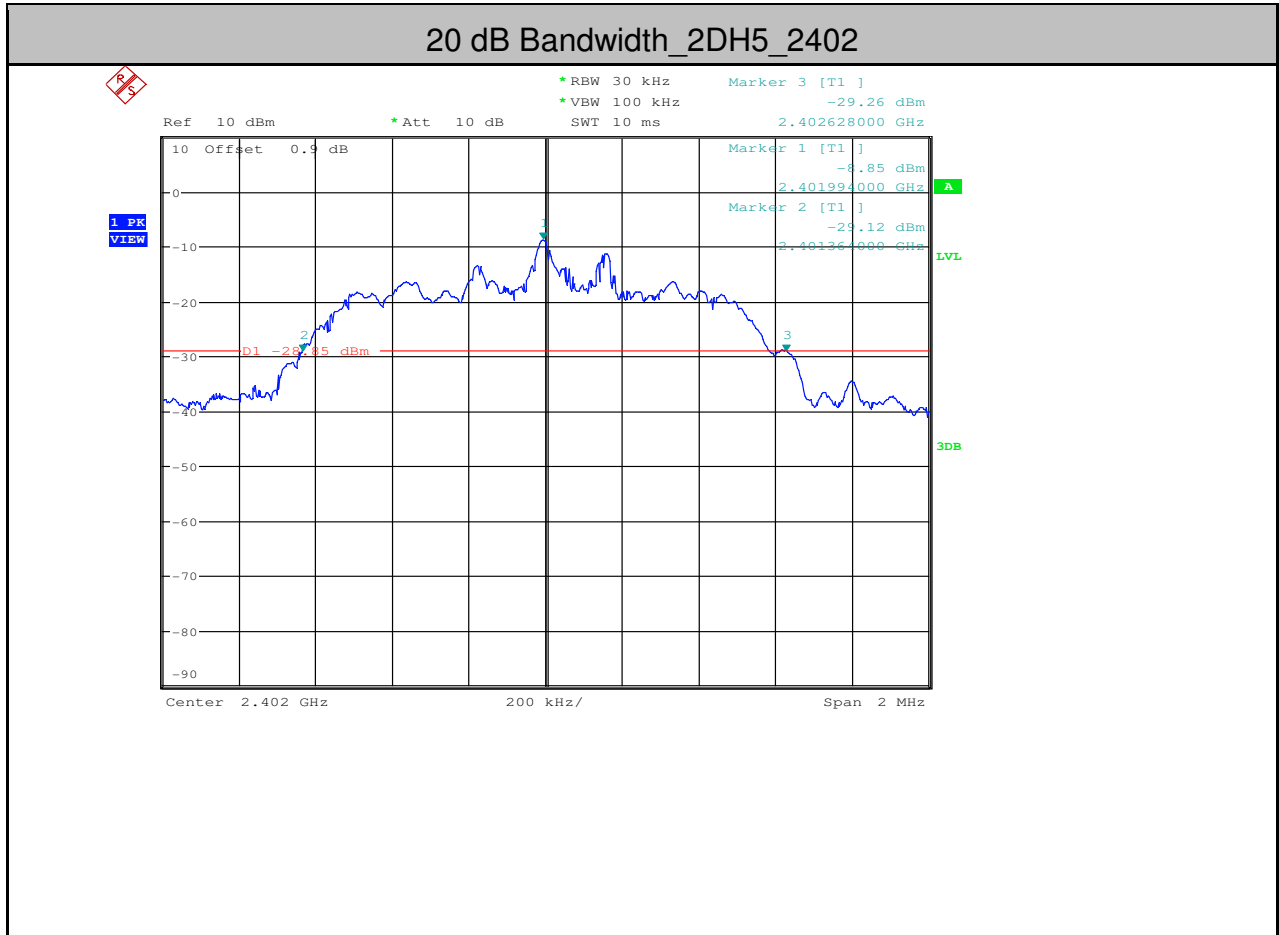


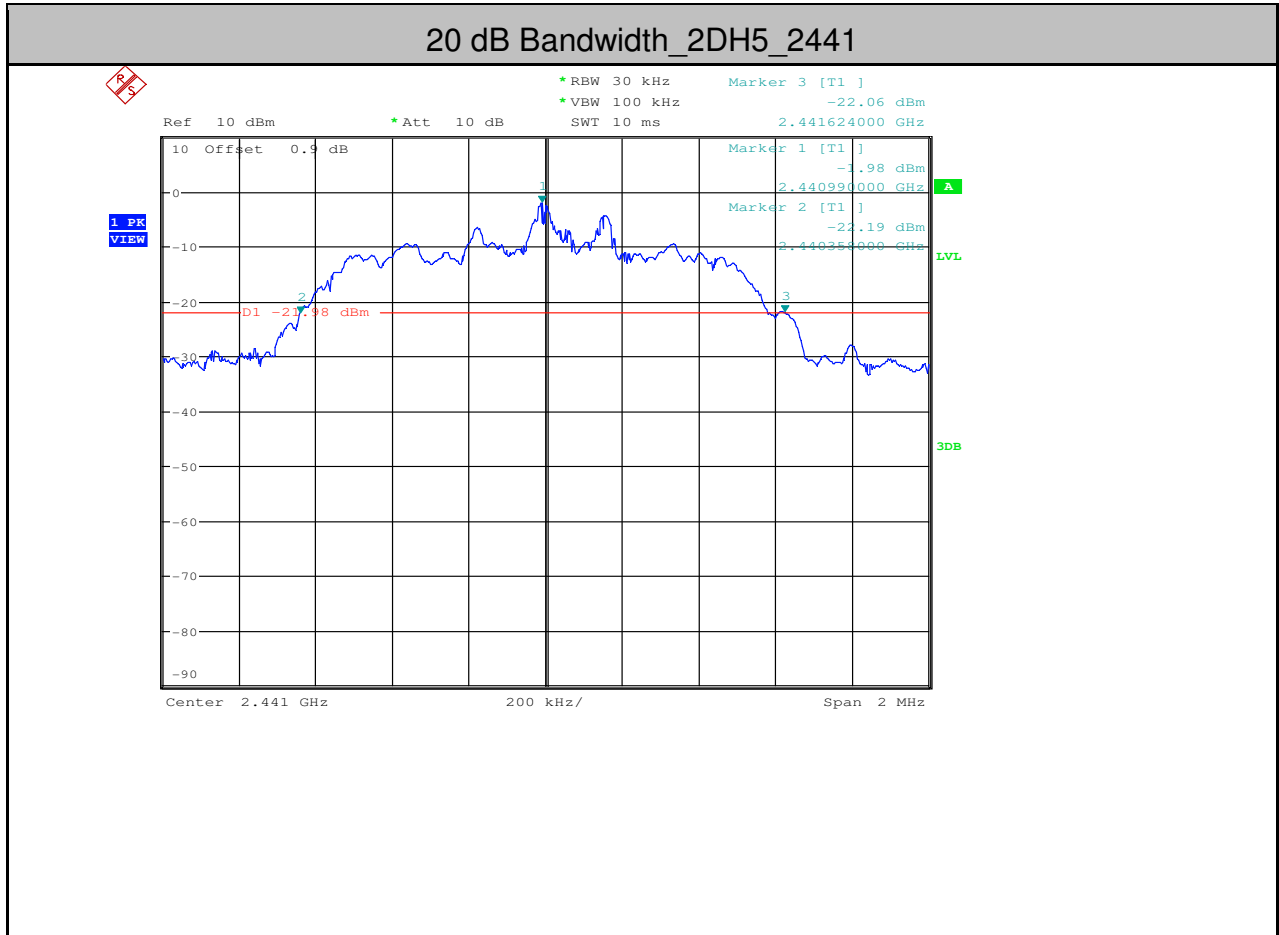

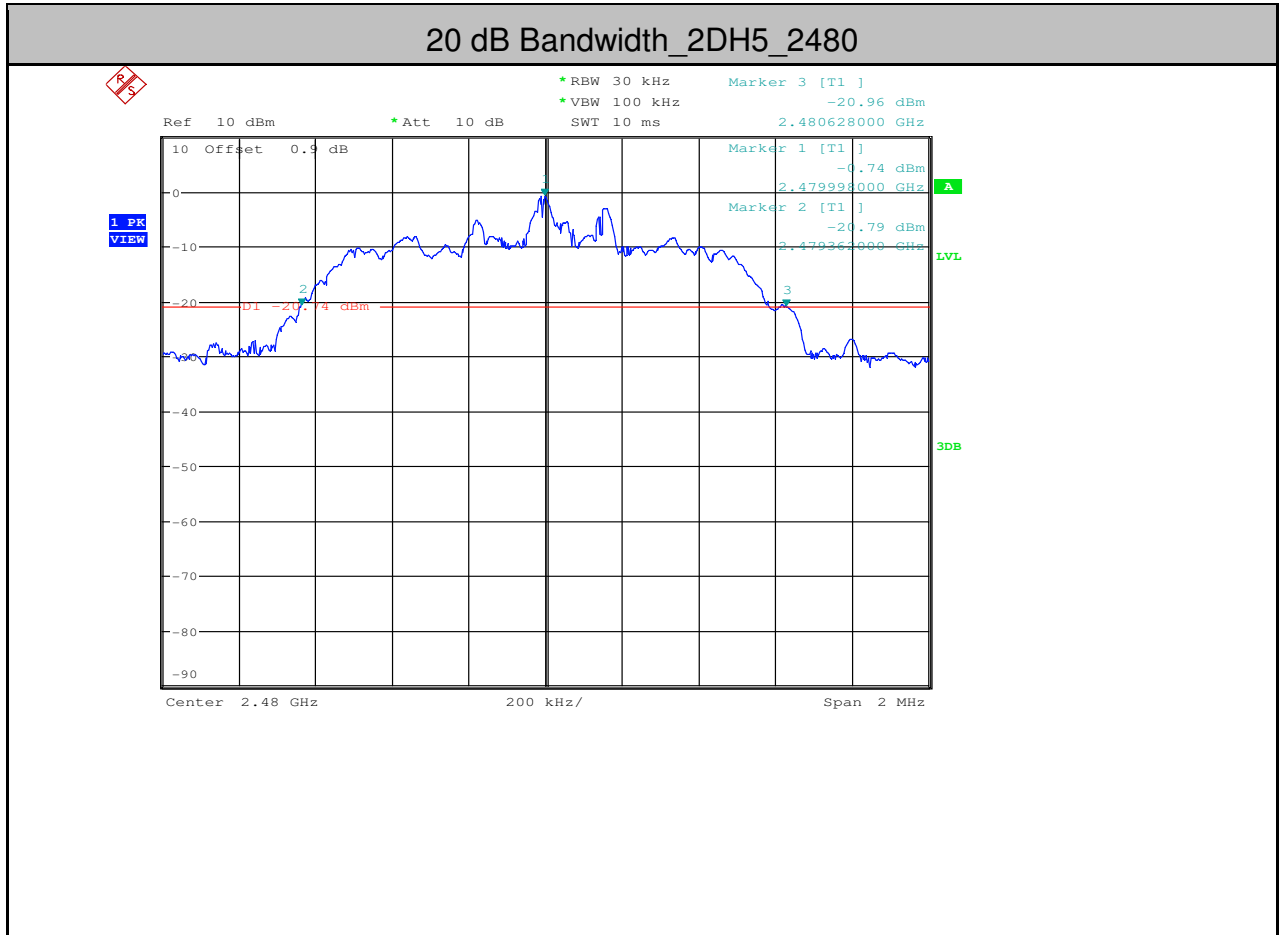

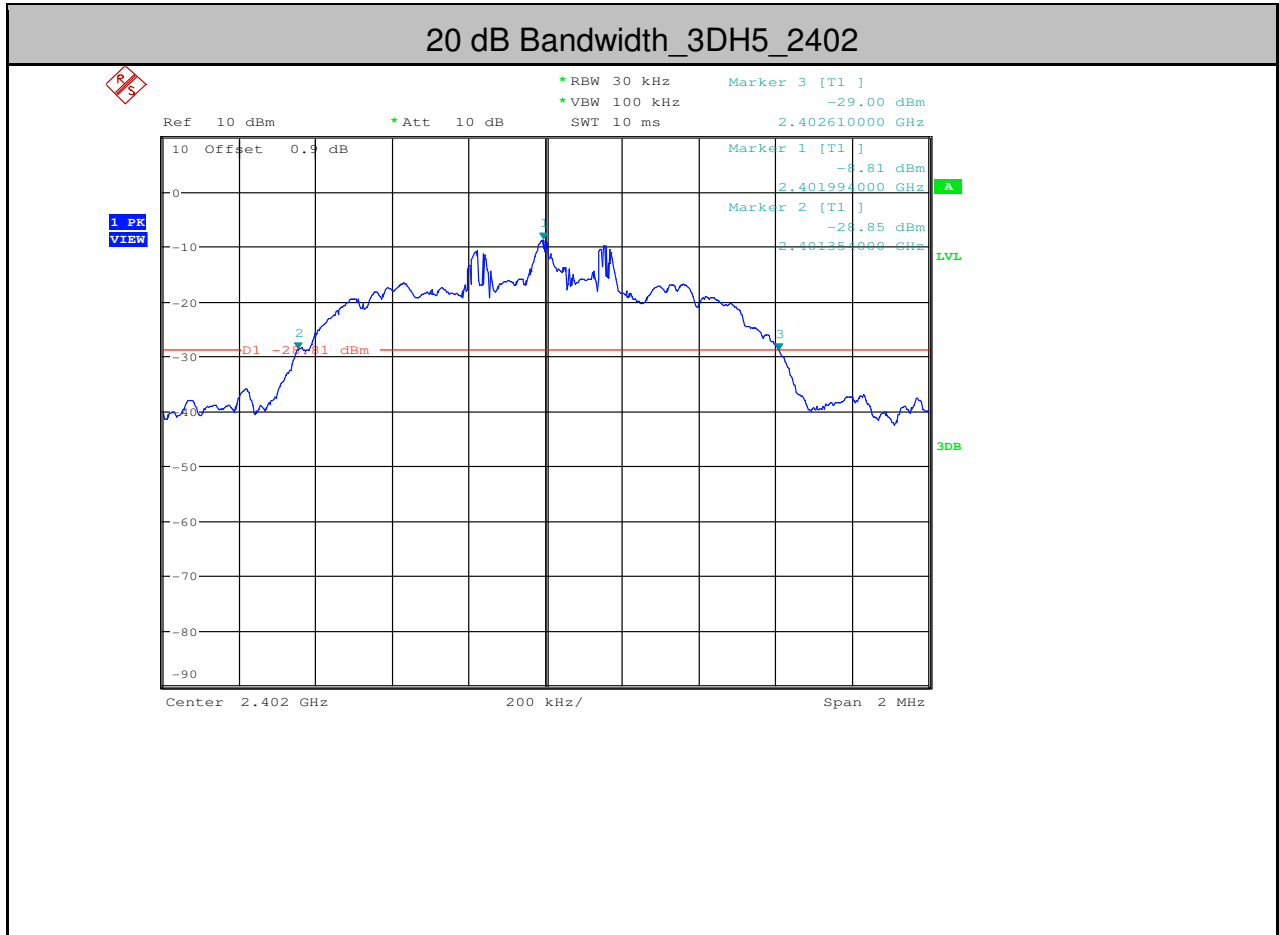

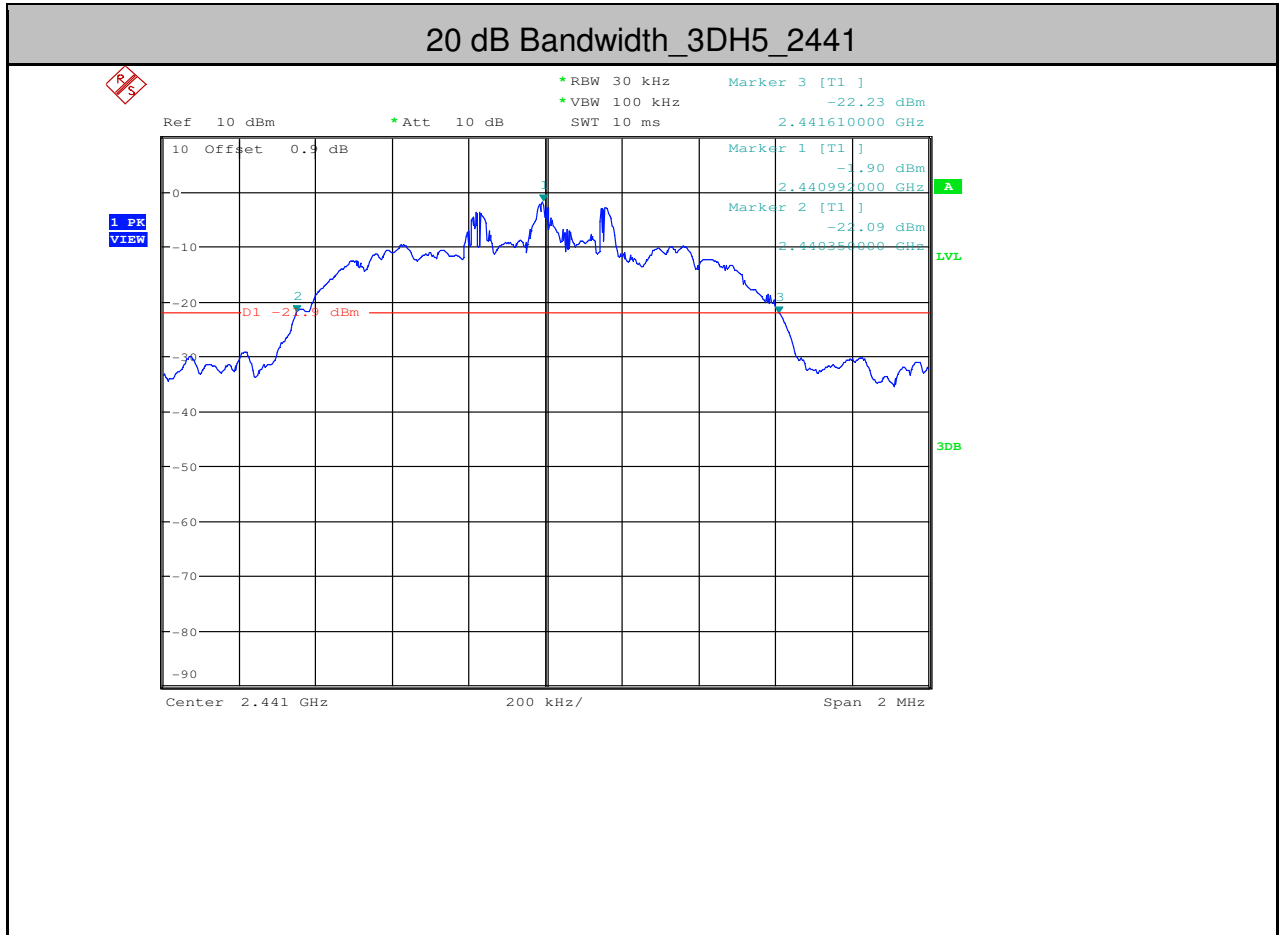


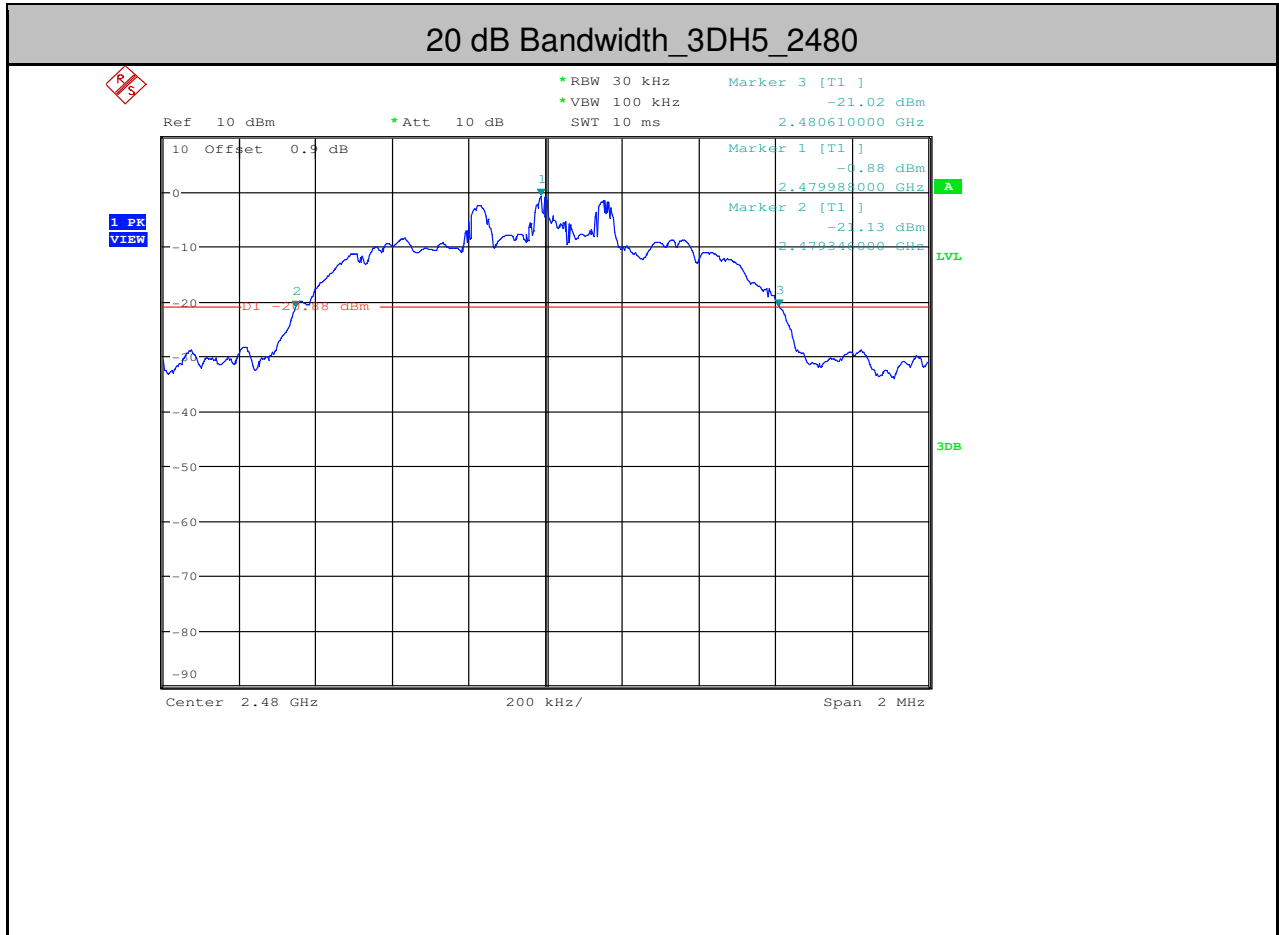






2.Occupied Bandwidth


Test Mode	Test Channel	OBW[MHz]	Limit[MHz]	Verdict
DH5	2402	0.878	---	PASS
DH5	2441	0.868	---	PASS
DH5	2480	0.866	---	PASS
2DH5	2402	1.228	---	PASS
2DH5	2441	1.230	---	PASS
2DH5	2480	1.232	---	PASS
3DH5	2402	1.180	---	PASS
3DH5	2441	1.184	---	PASS
3DH5	2480	1.182	---	PASS

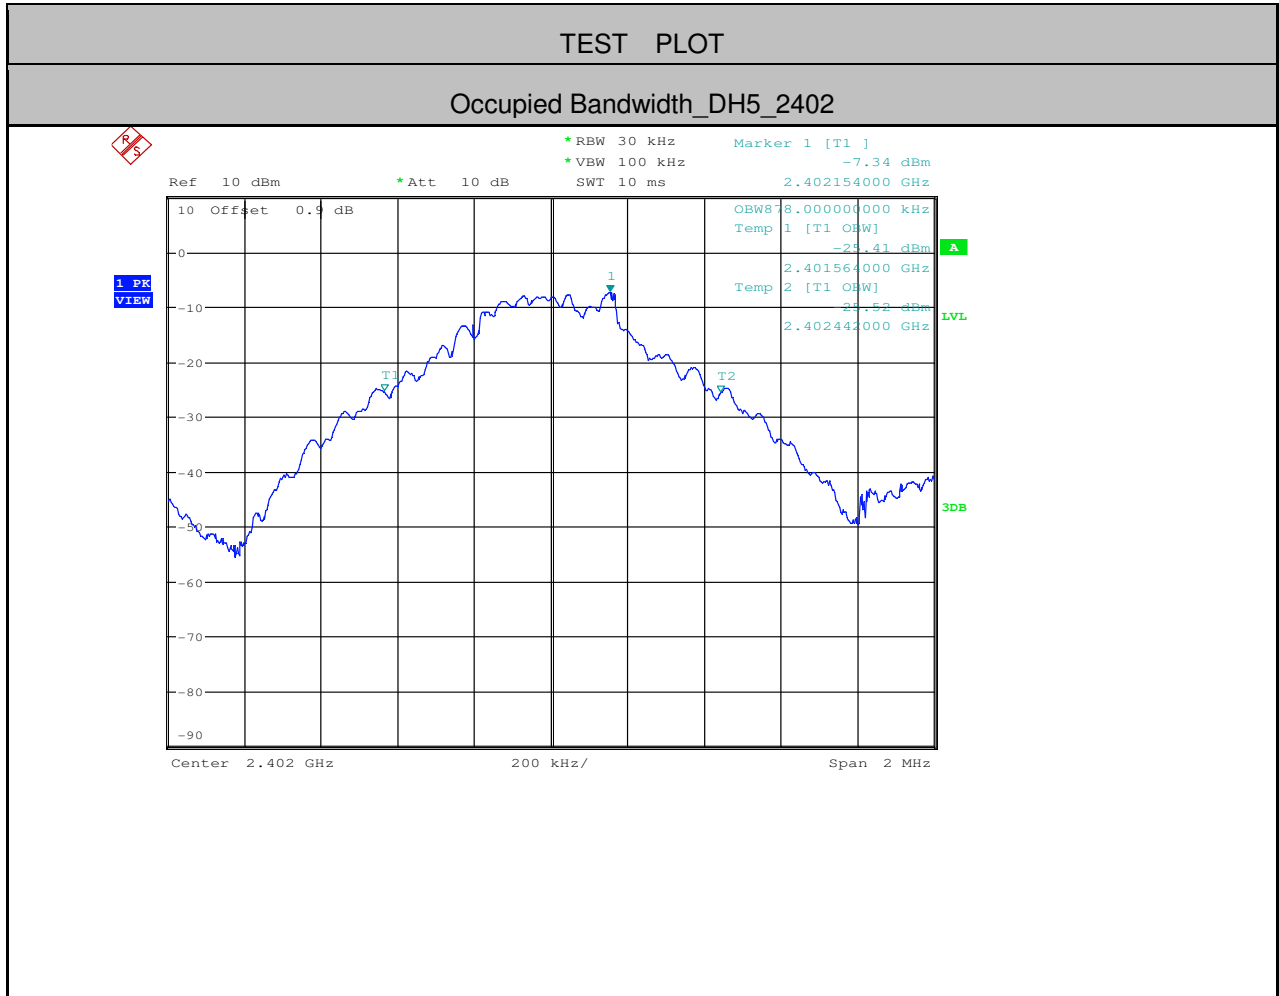


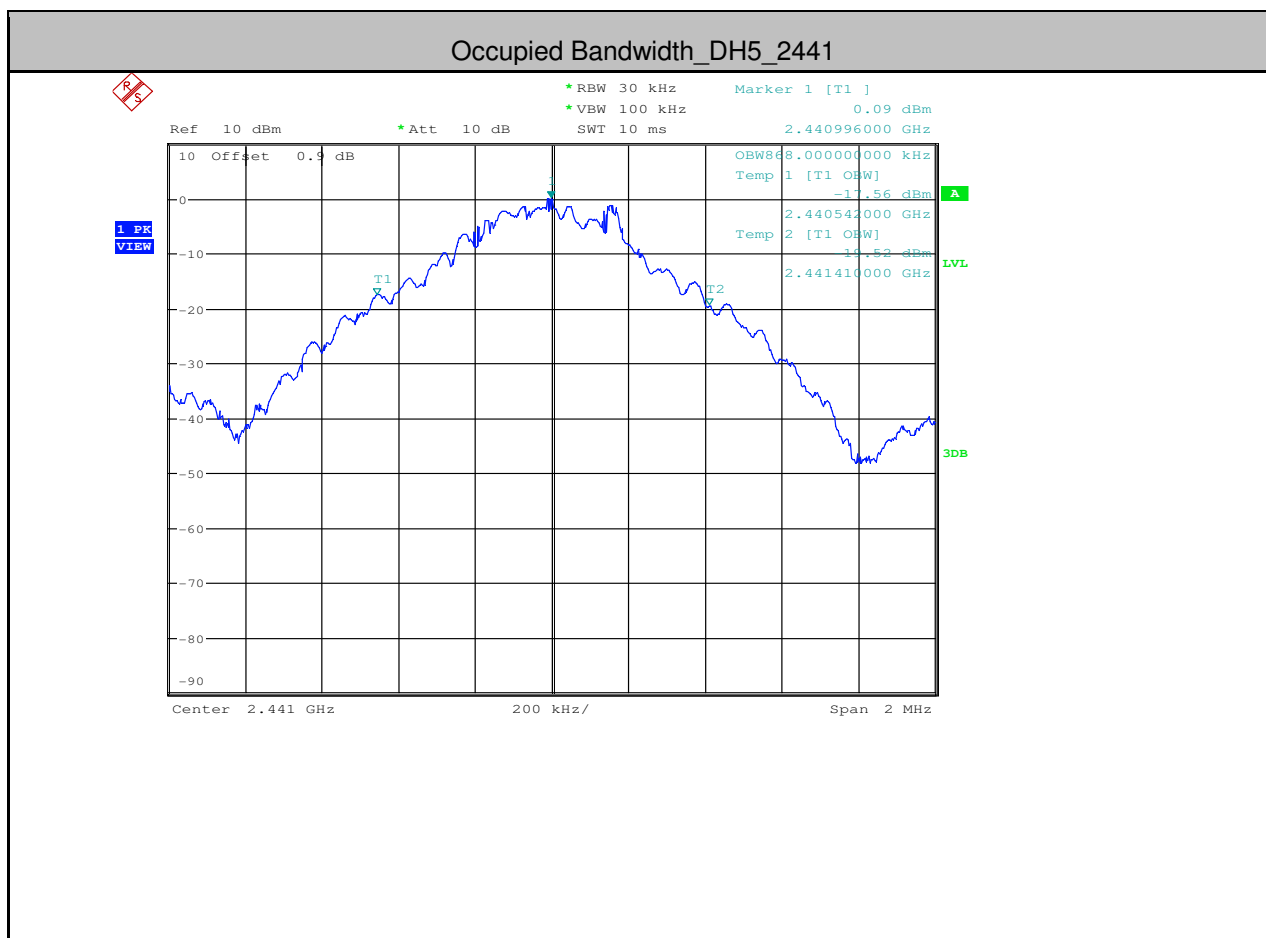


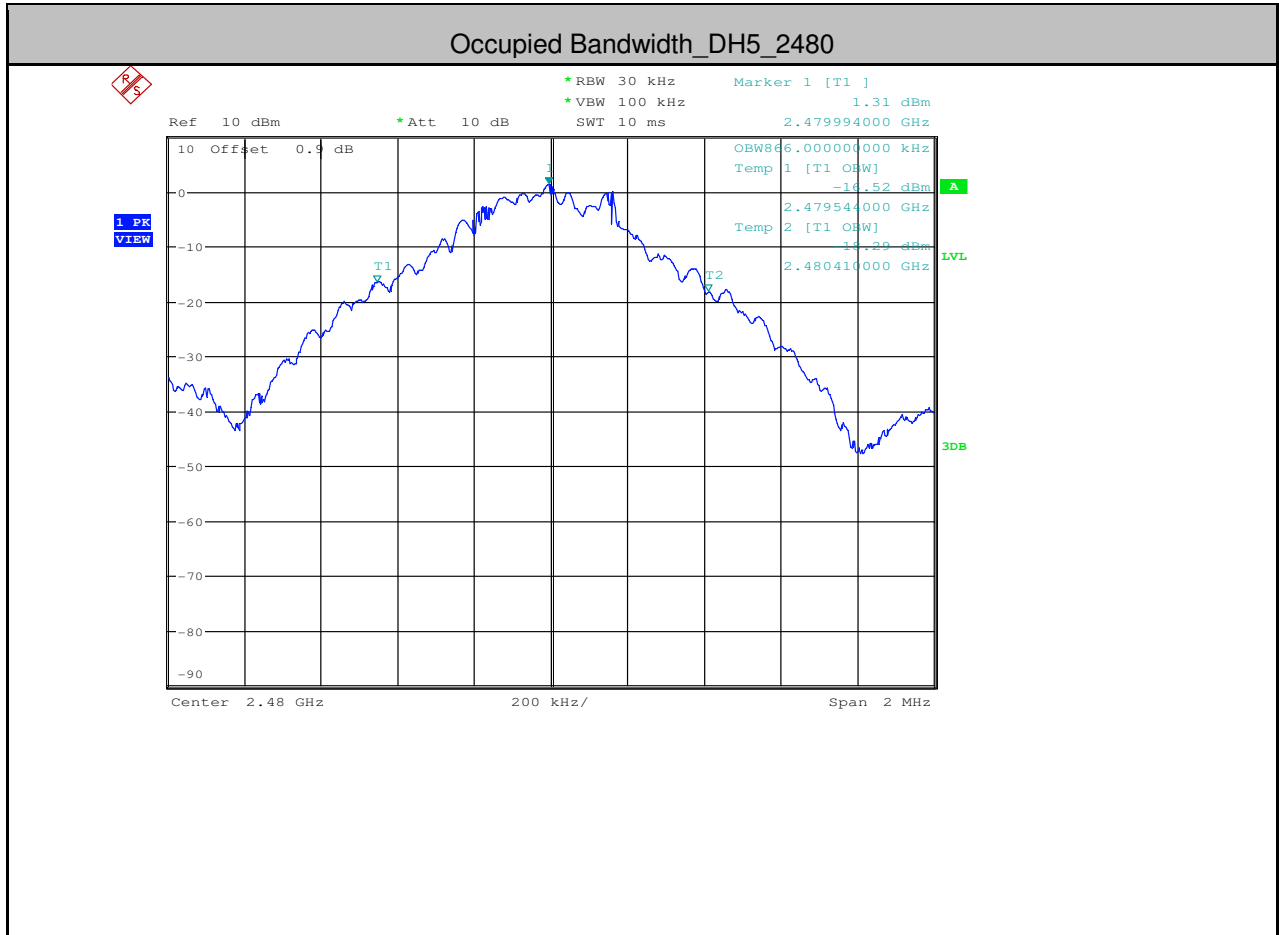


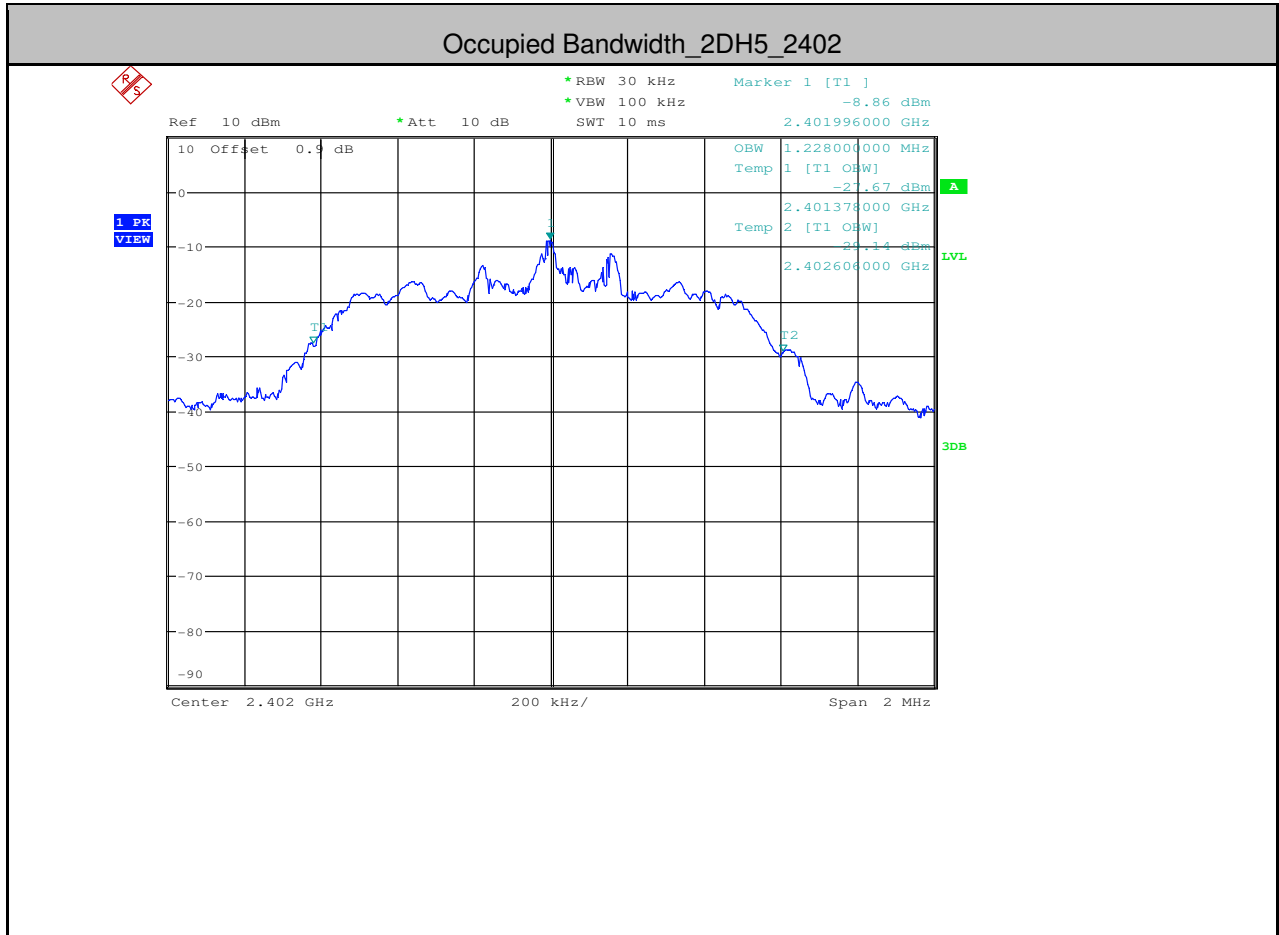


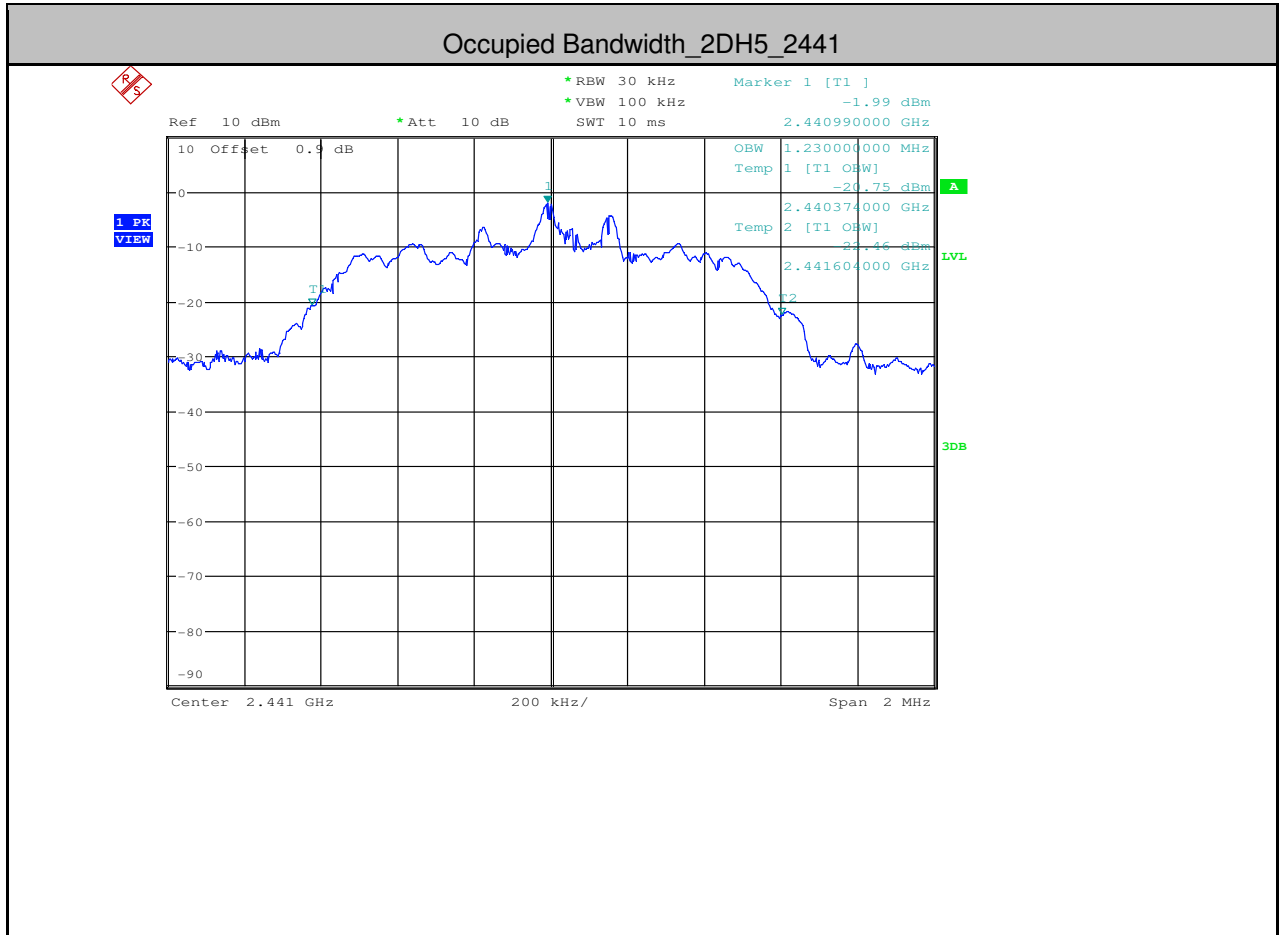

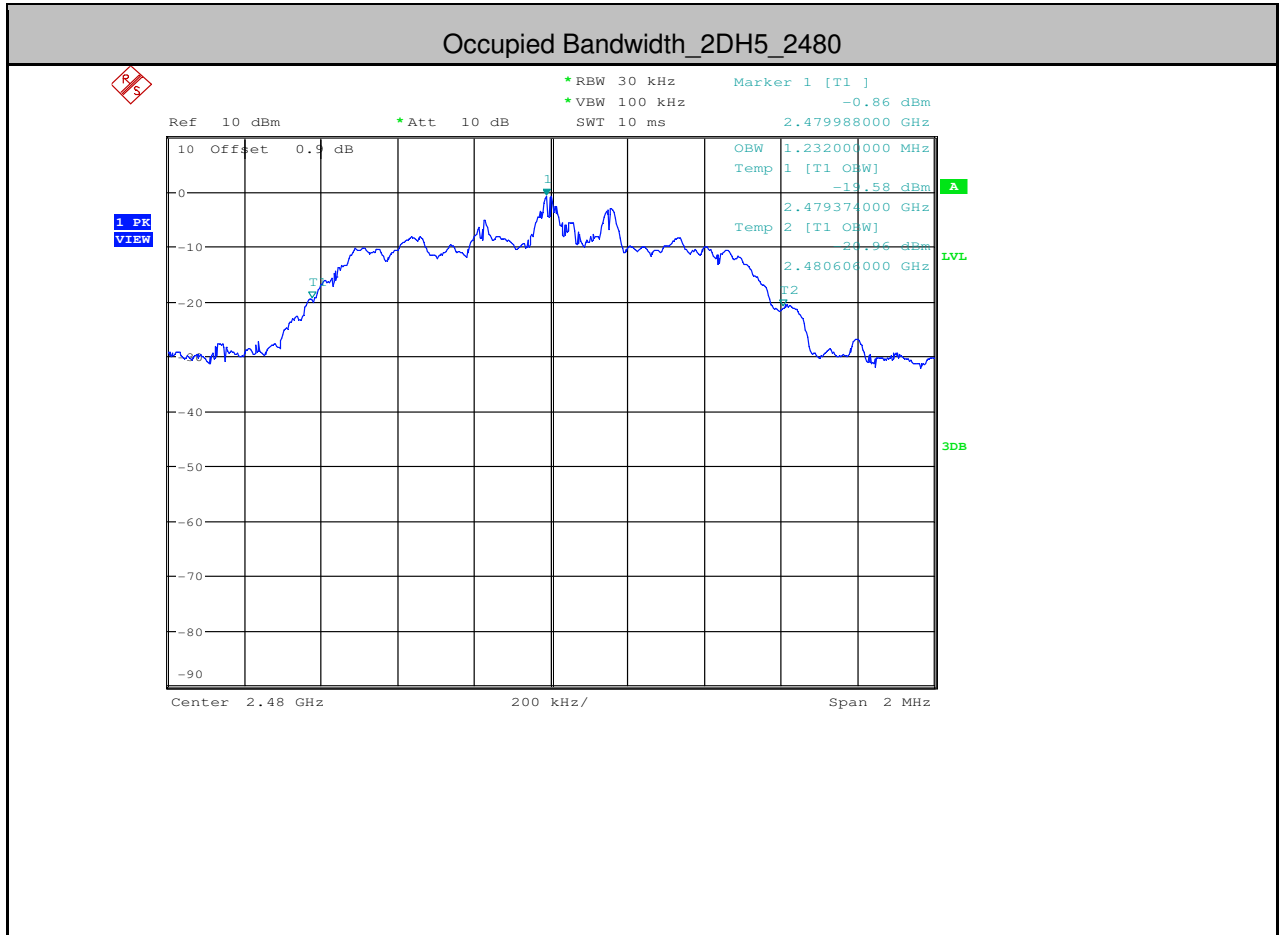

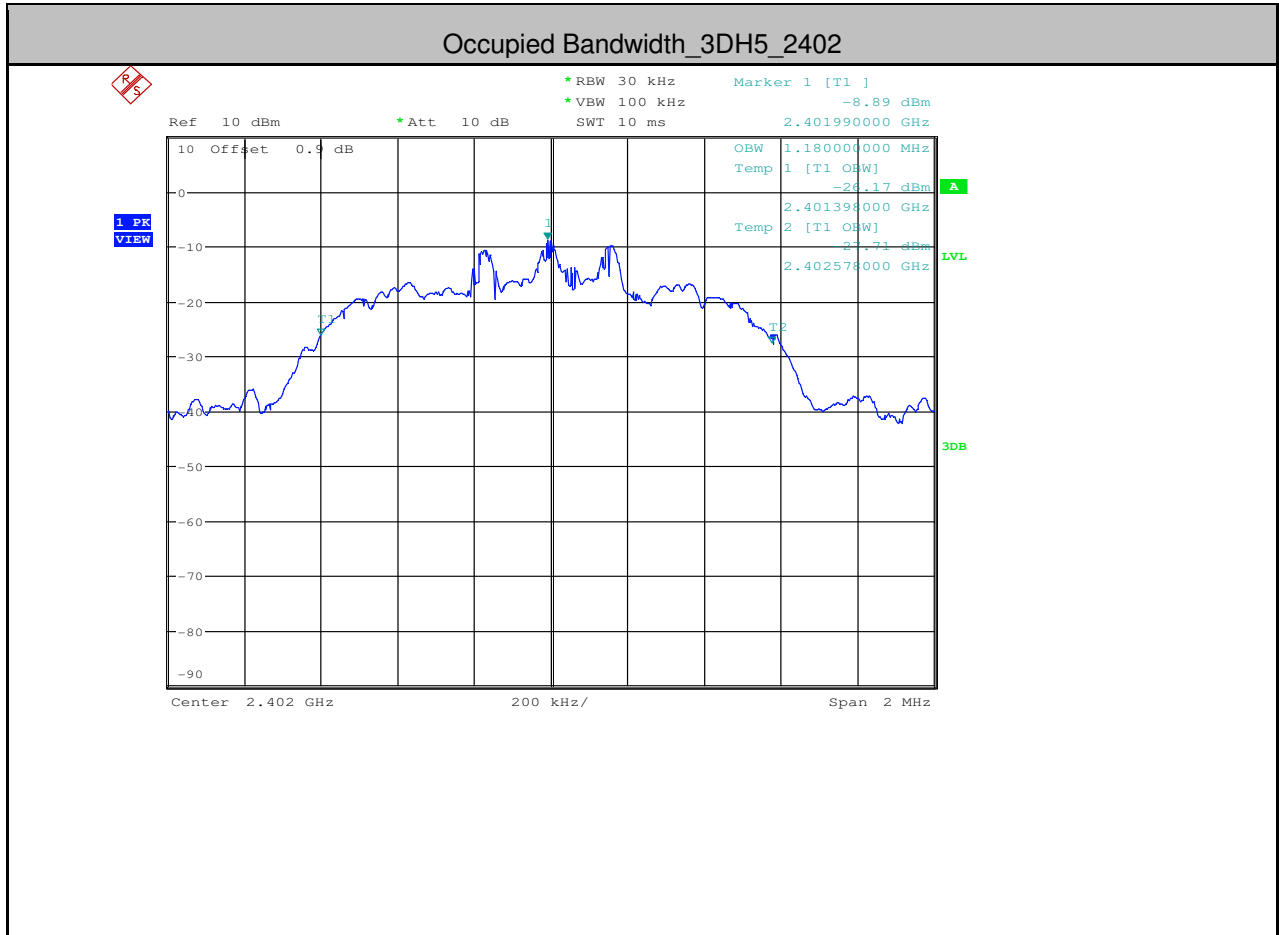

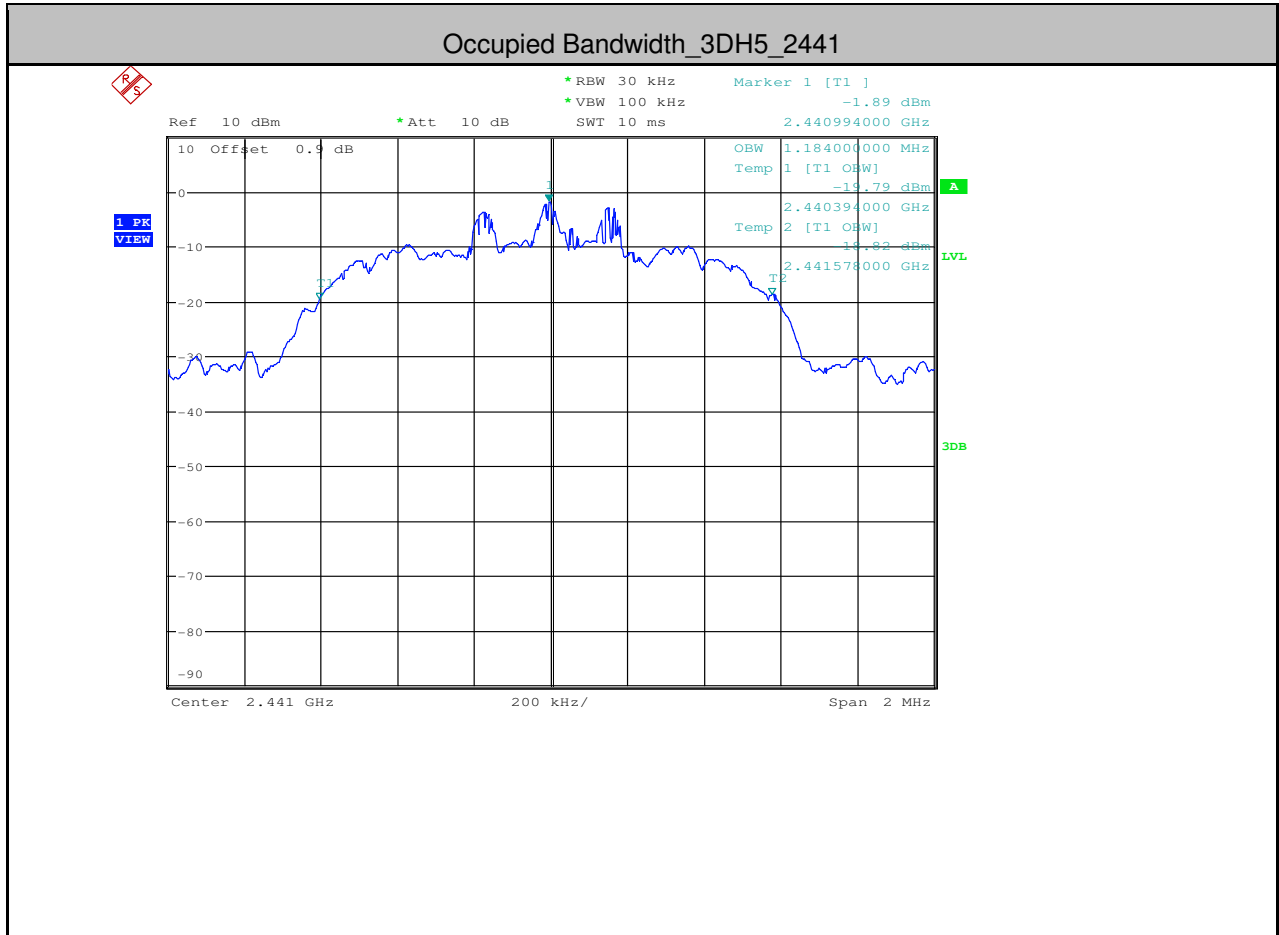


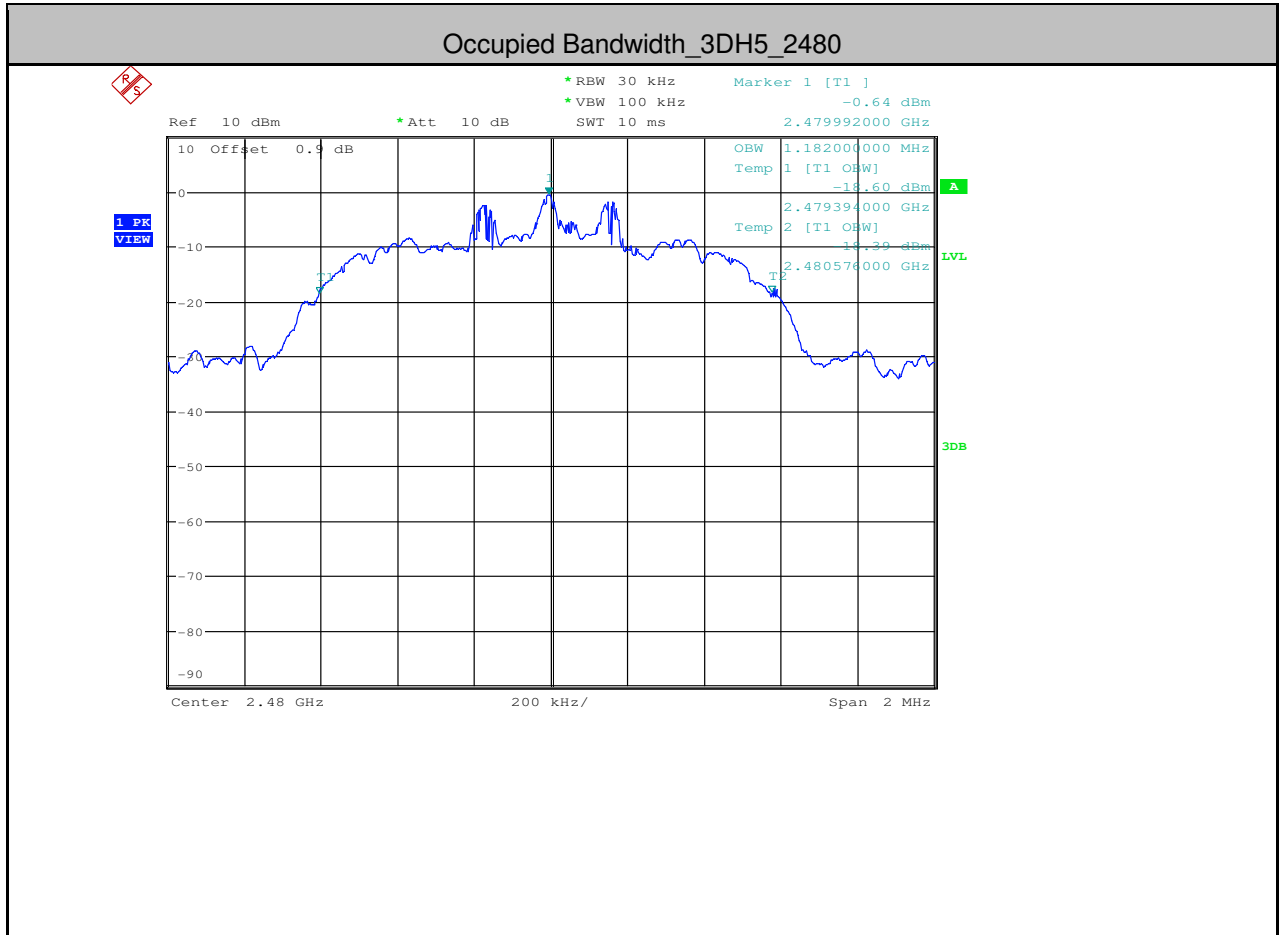






3. Conducted Peak Output Power


Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
DH5	2402	-4.24	<20.97	PASS
DH5	2441	2.25	<20.97	PASS
DH5	2480	3.44	<20.97	PASS
2DH5	2402	-5.28	<20.97	PASS
2DH5	2441	1.89	<20.97	PASS
2DH5	2480	3.04	<20.97	PASS
3DH5	2402	-4.92	<20.97	PASS
3DH5	2441	2.13	<20.97	PASS
3DH5	2480	3.19	<20.97	PASS

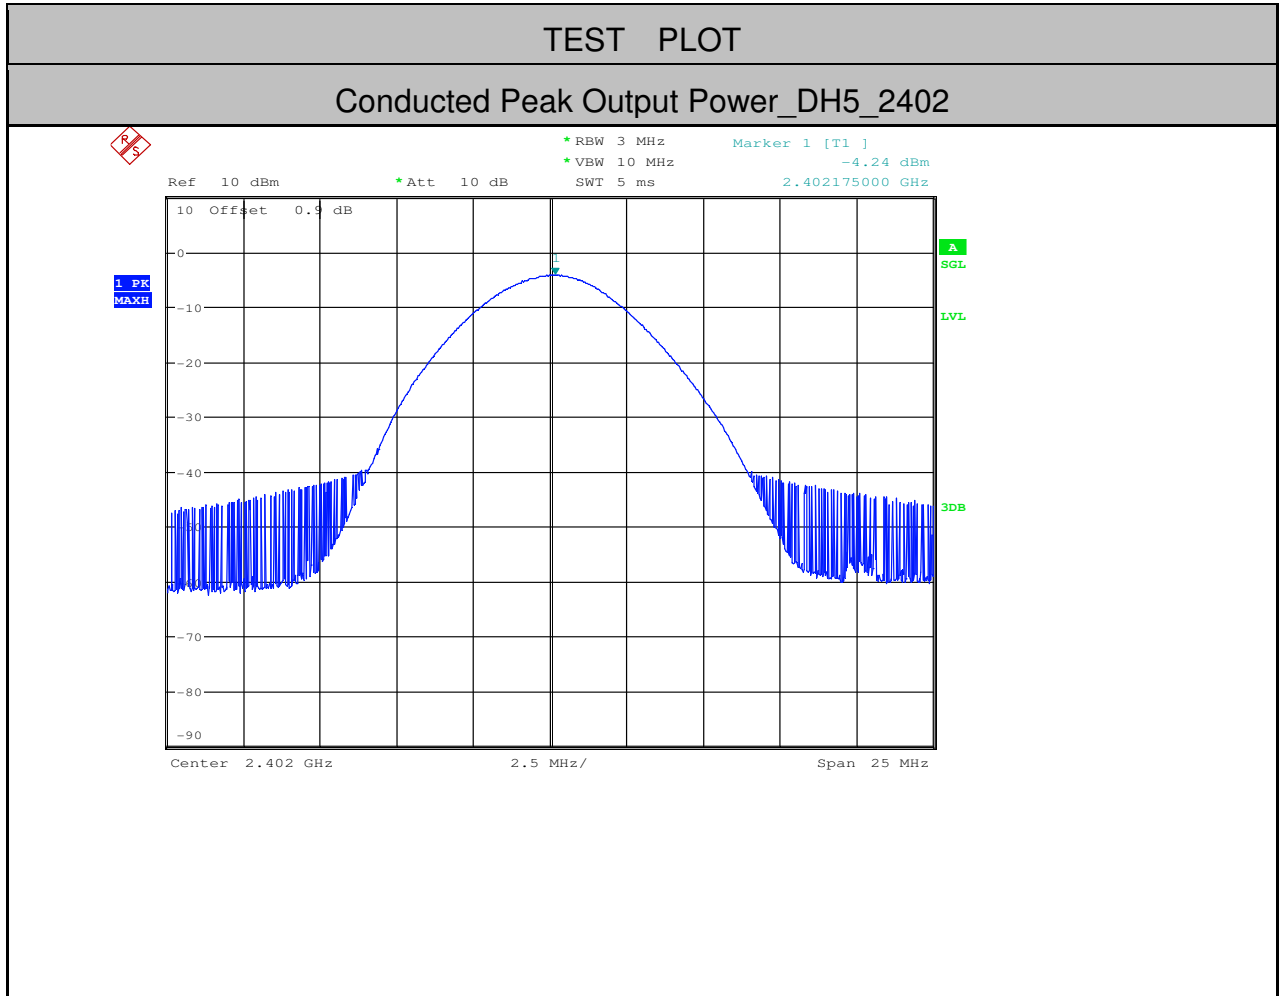


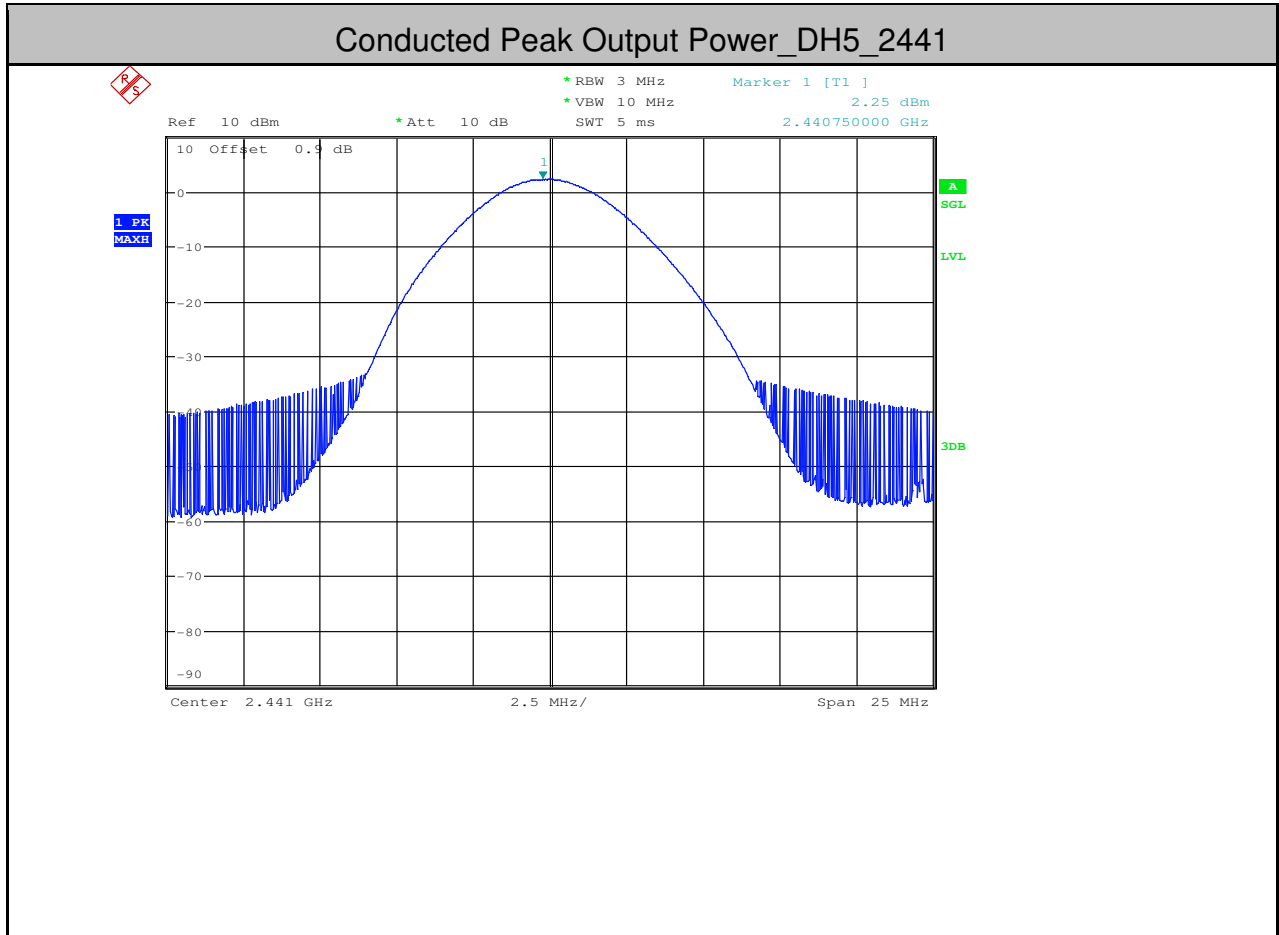


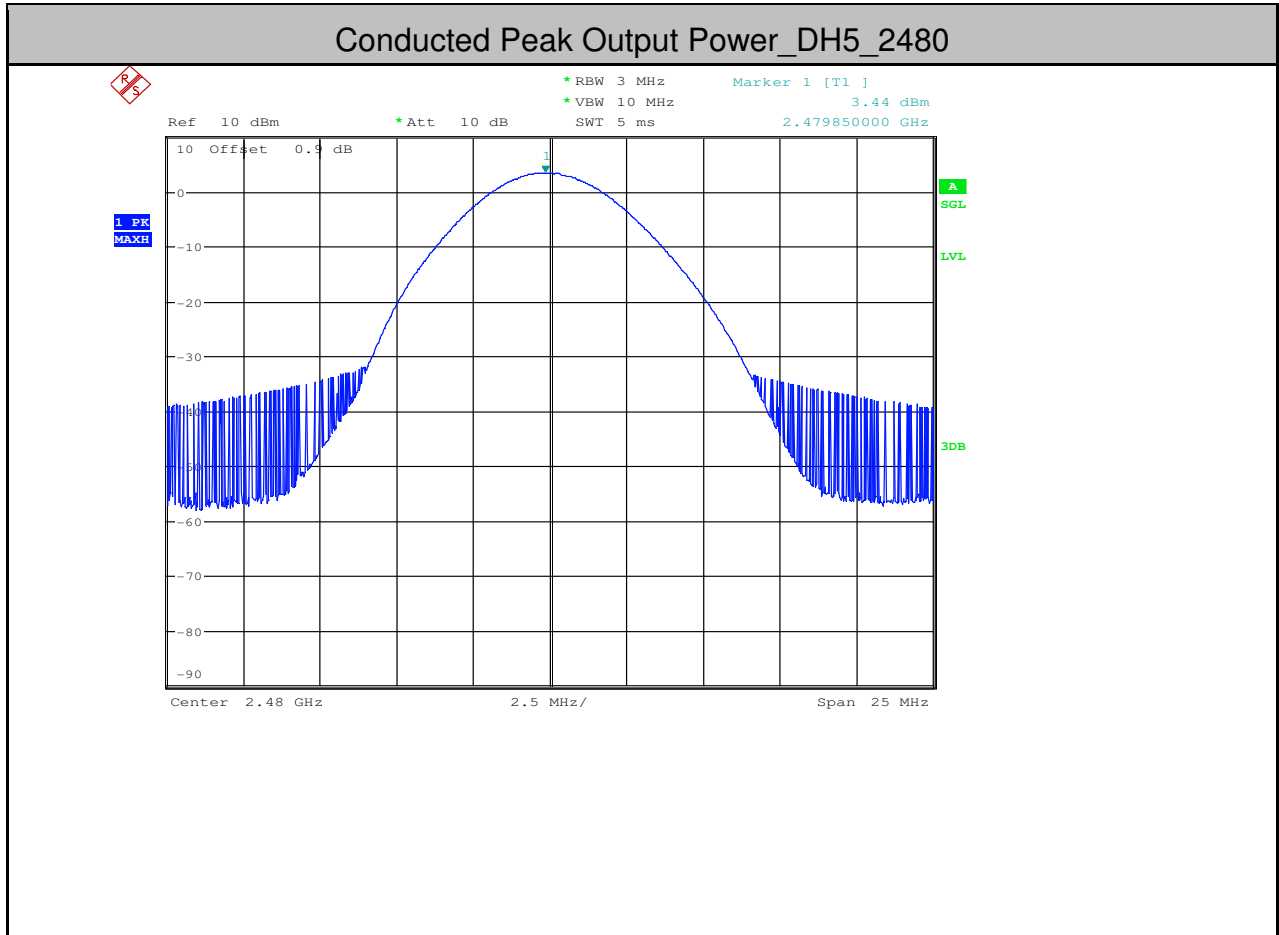


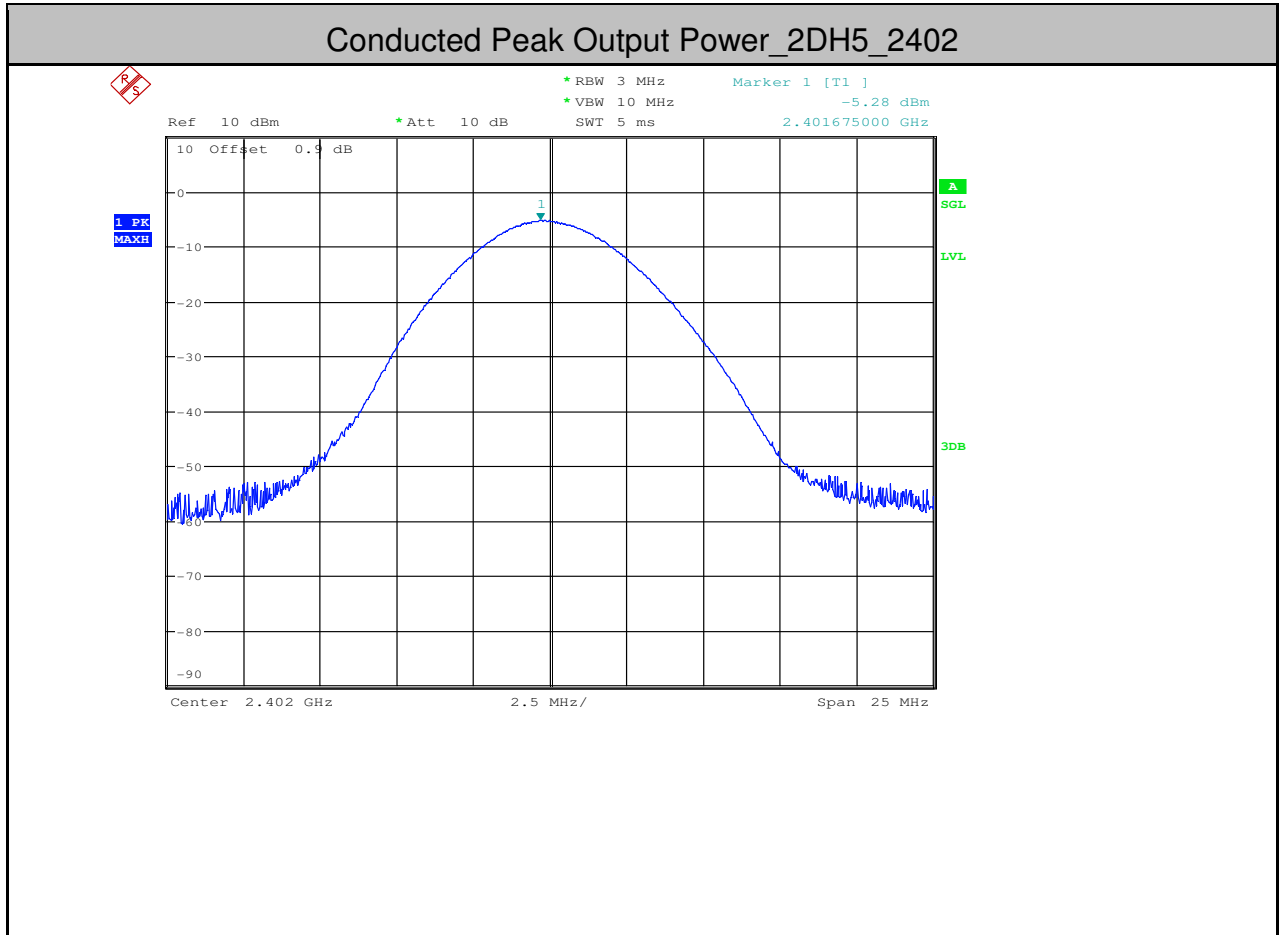


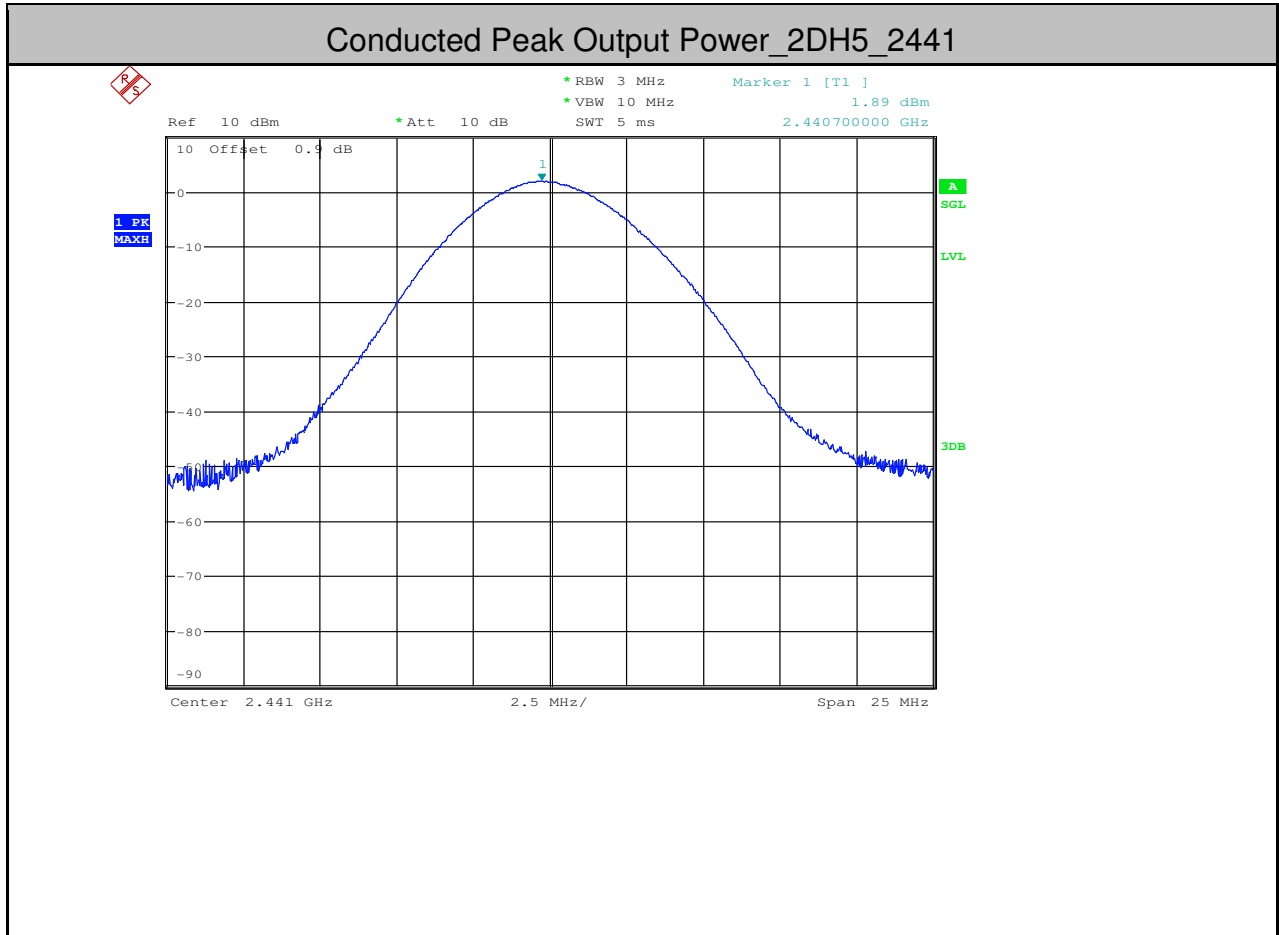

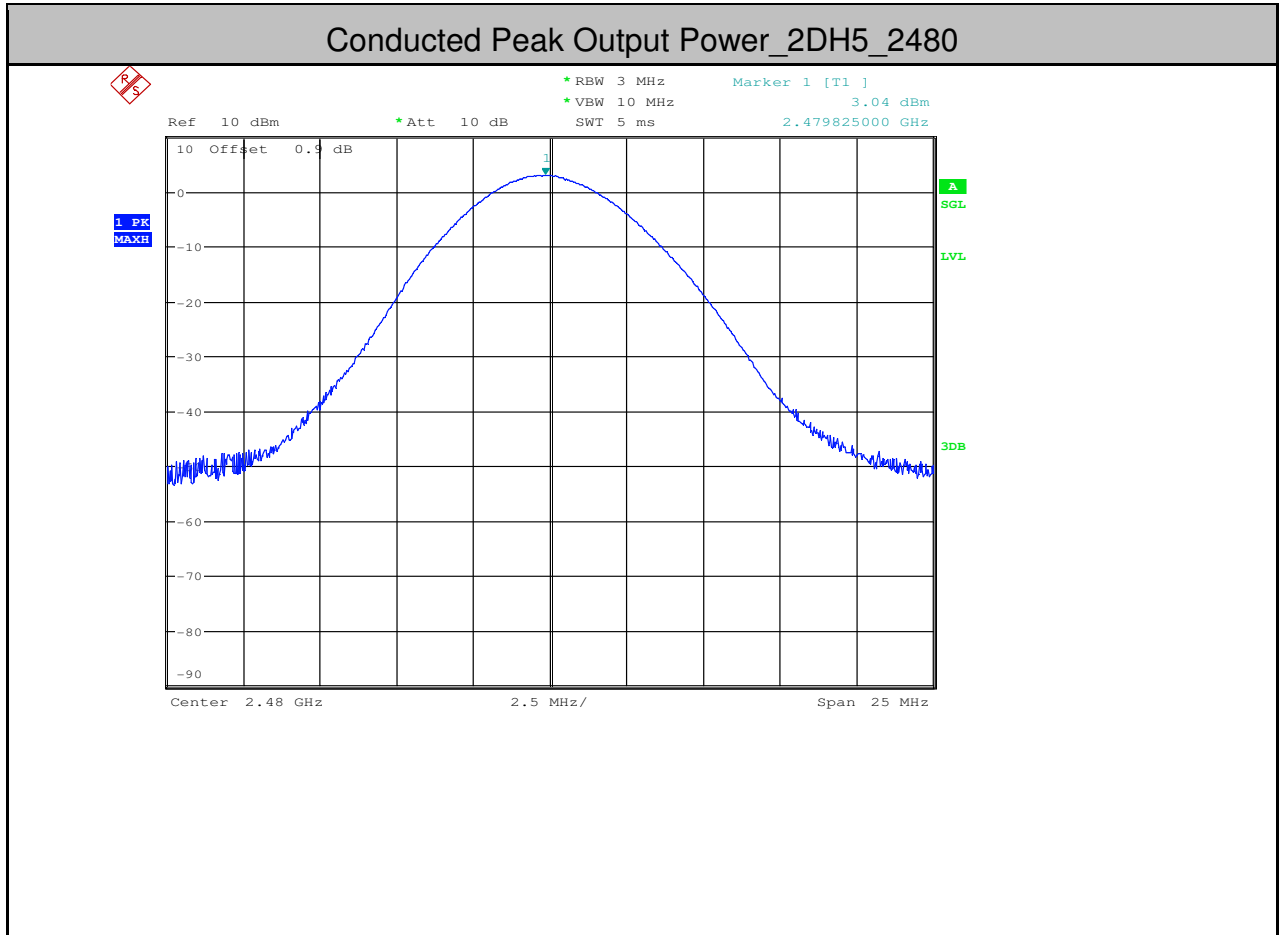

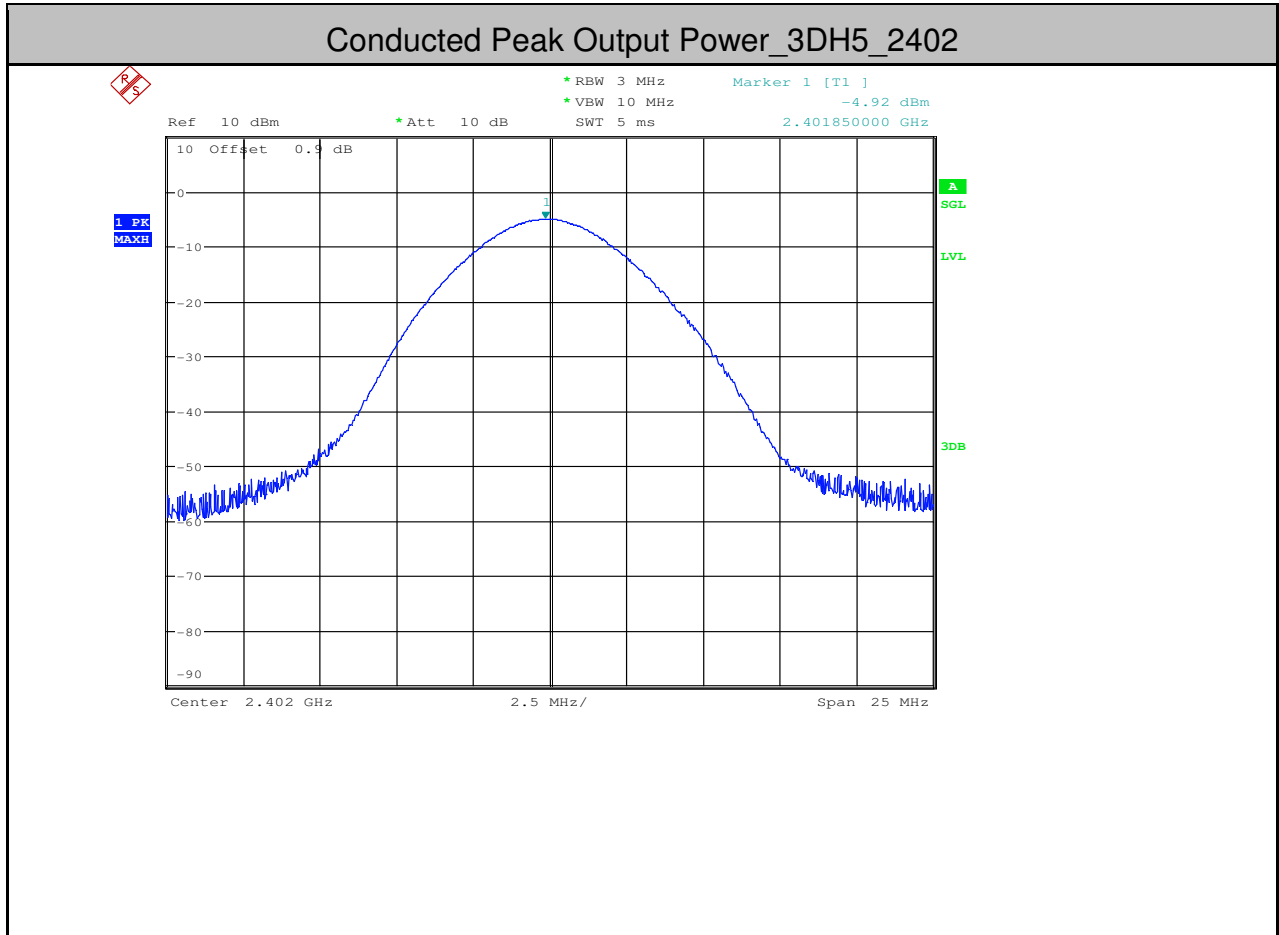

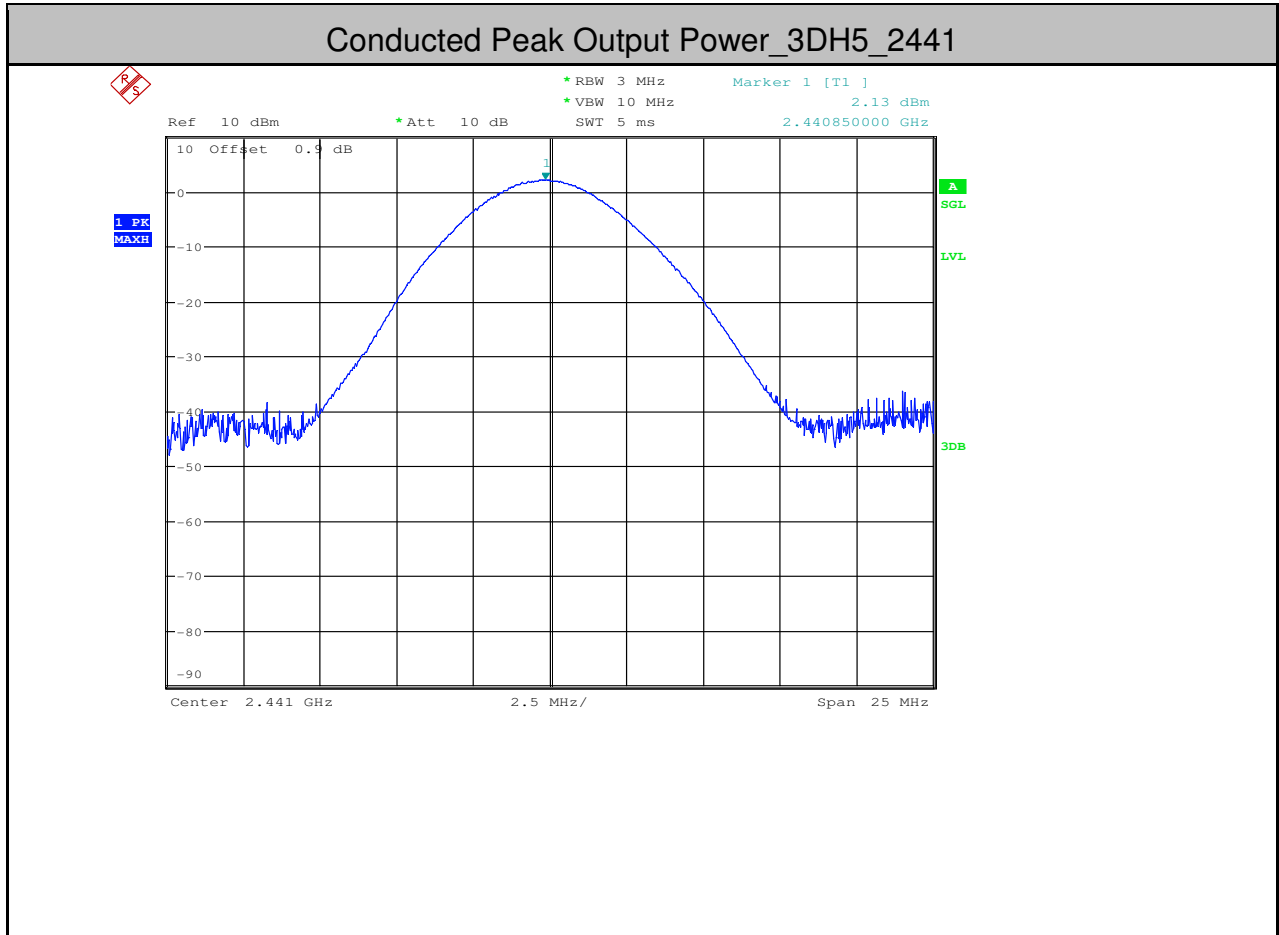


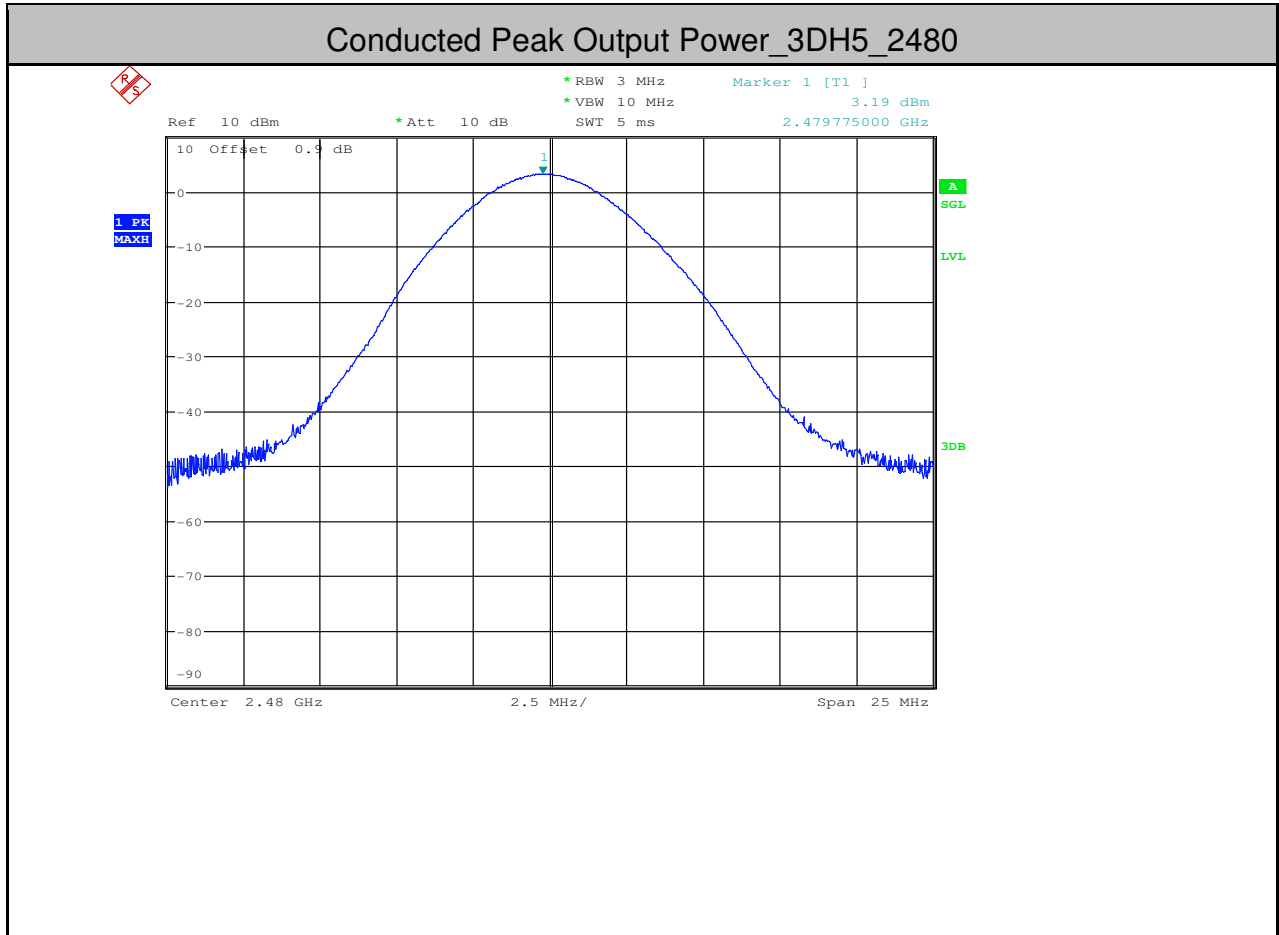





4. Carrier Frequency Separation

Test Mode	Test Channel	Result[MHz]	Limit[MHz]	Verdict
2DH5	2441	1.008	≥ 0.631	PASS
3DH5	2441	1.008	≥ 0.844	PASS
DH5	2441	1.005	≥ 0.843	PASS

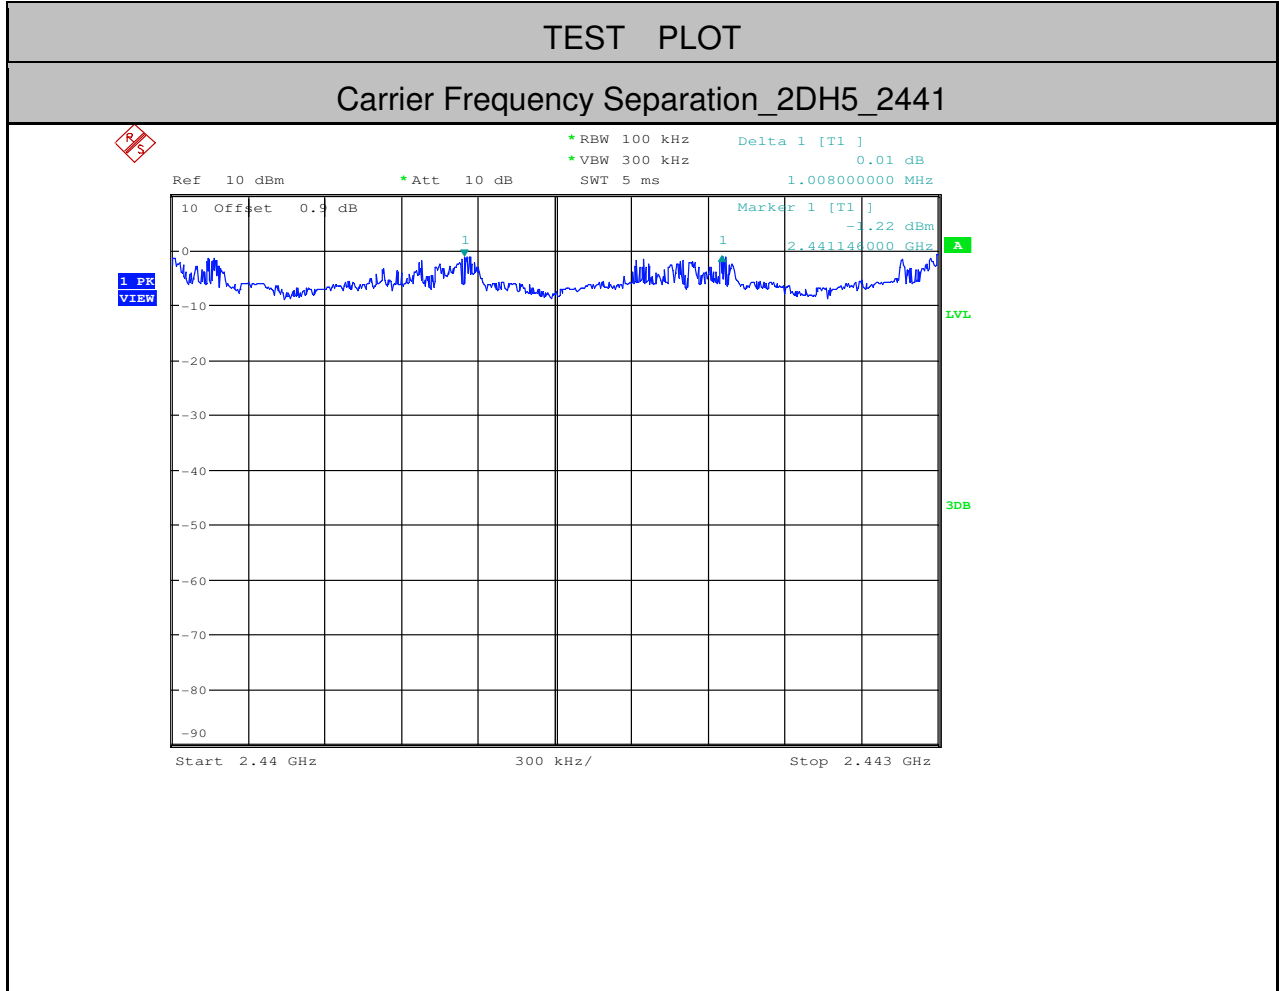

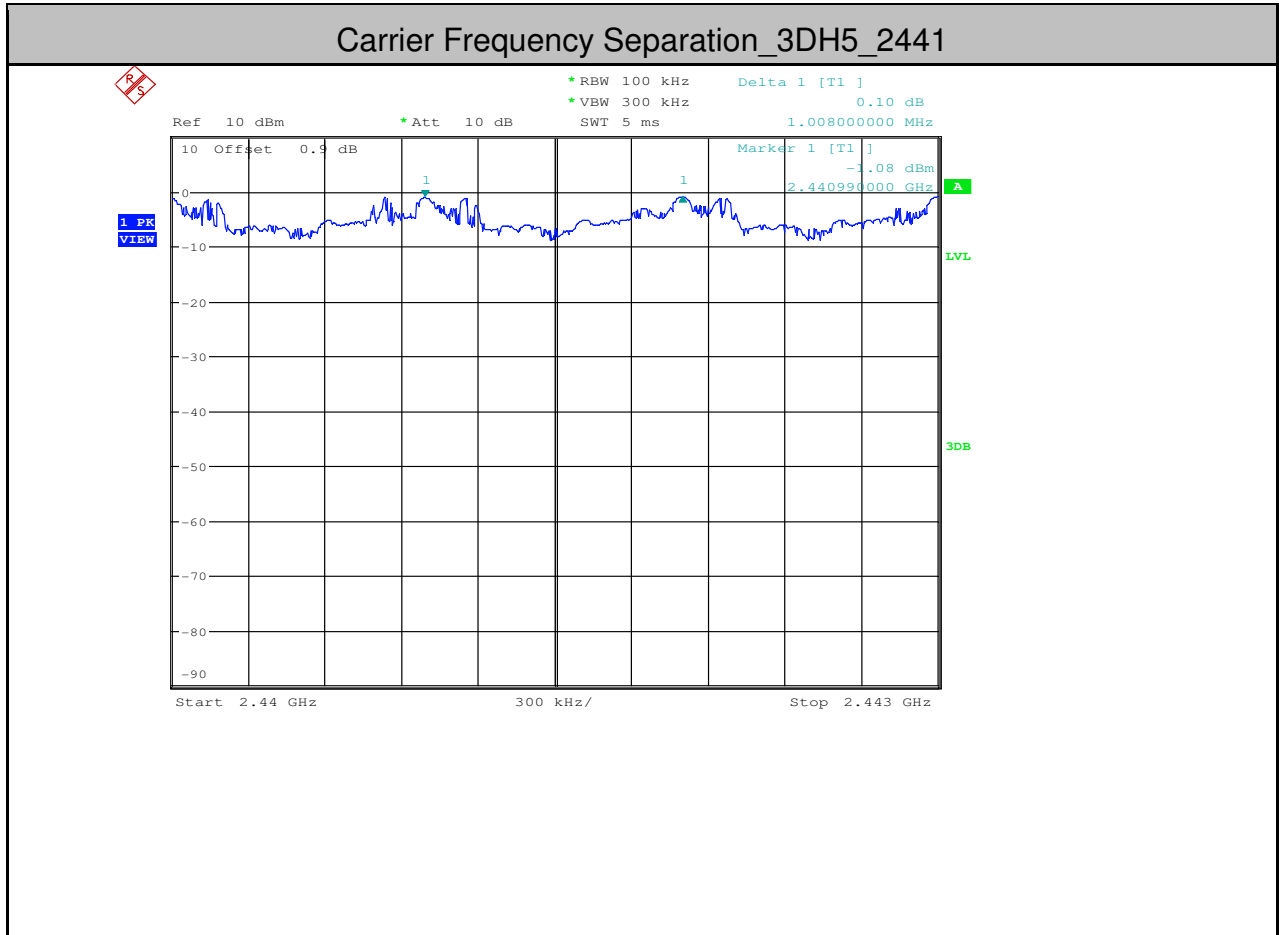


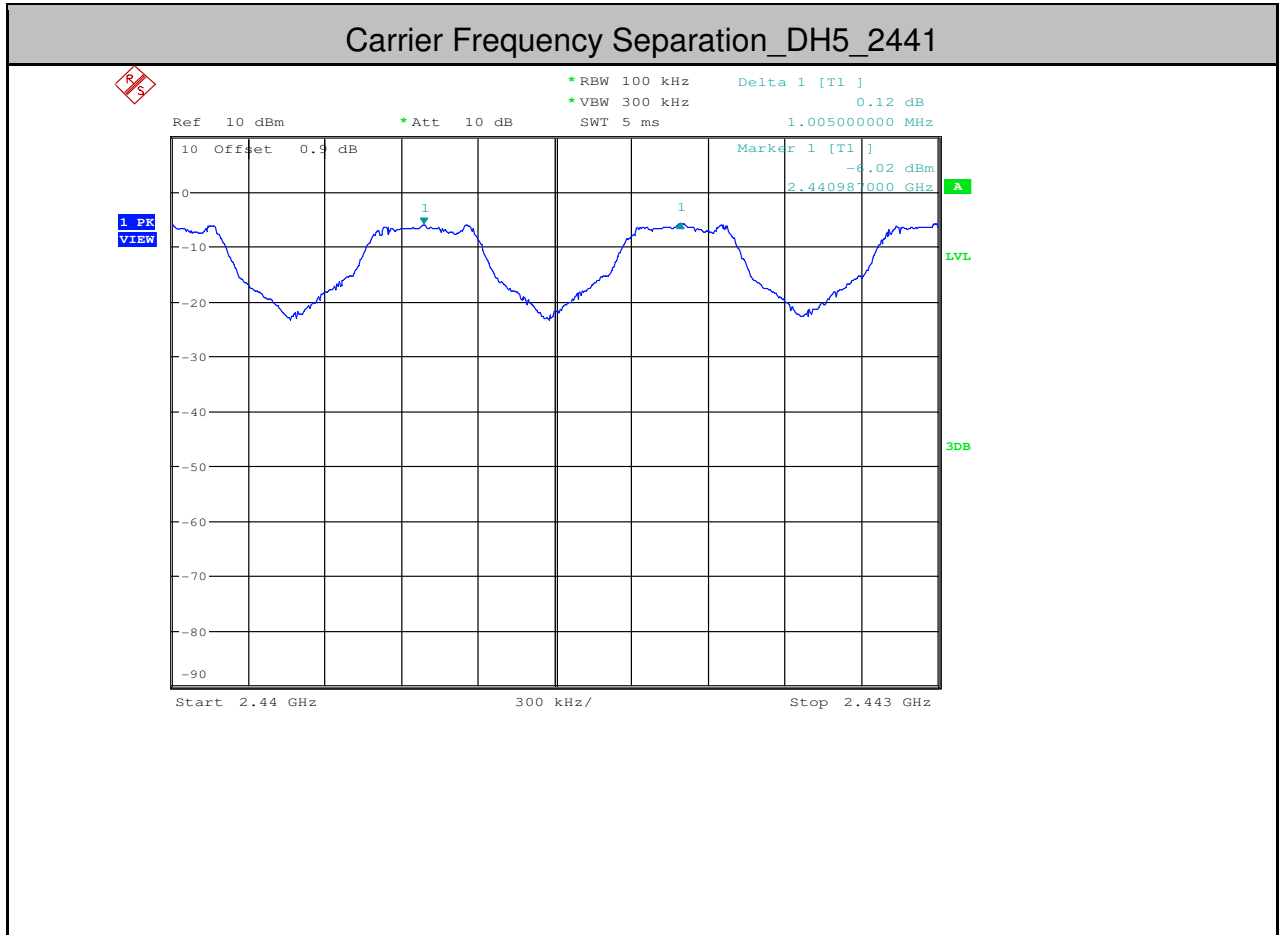








5.Dwell Time



Test Mode	Test Channel	Burst Width[ms/hop/ch]	Total	Dwell Time[s]	Limit[s]	Verdic
DH1	2402	0.39	320	0.125	<0.4	PASS
DH3	2402	1.65	160	0.264	<0.4	PASS
DH5	2402	2.9	100	0.29	<0.4	PASS
2DH1	2402	0.4	320	0.128	<0.4	PASS
2DH3	2402	1.66	160	0.266	<0.4	PASS
2DH5	2402	2.9	100	0.29	<0.4	PASS
3DH1	2402	0.4	320	0.128	<0.4	PASS
3DH3	2402	1.66	160	0.266	<0.4	PASS
3DH5	2402	2.9	110	0.319	<0.4	PASS


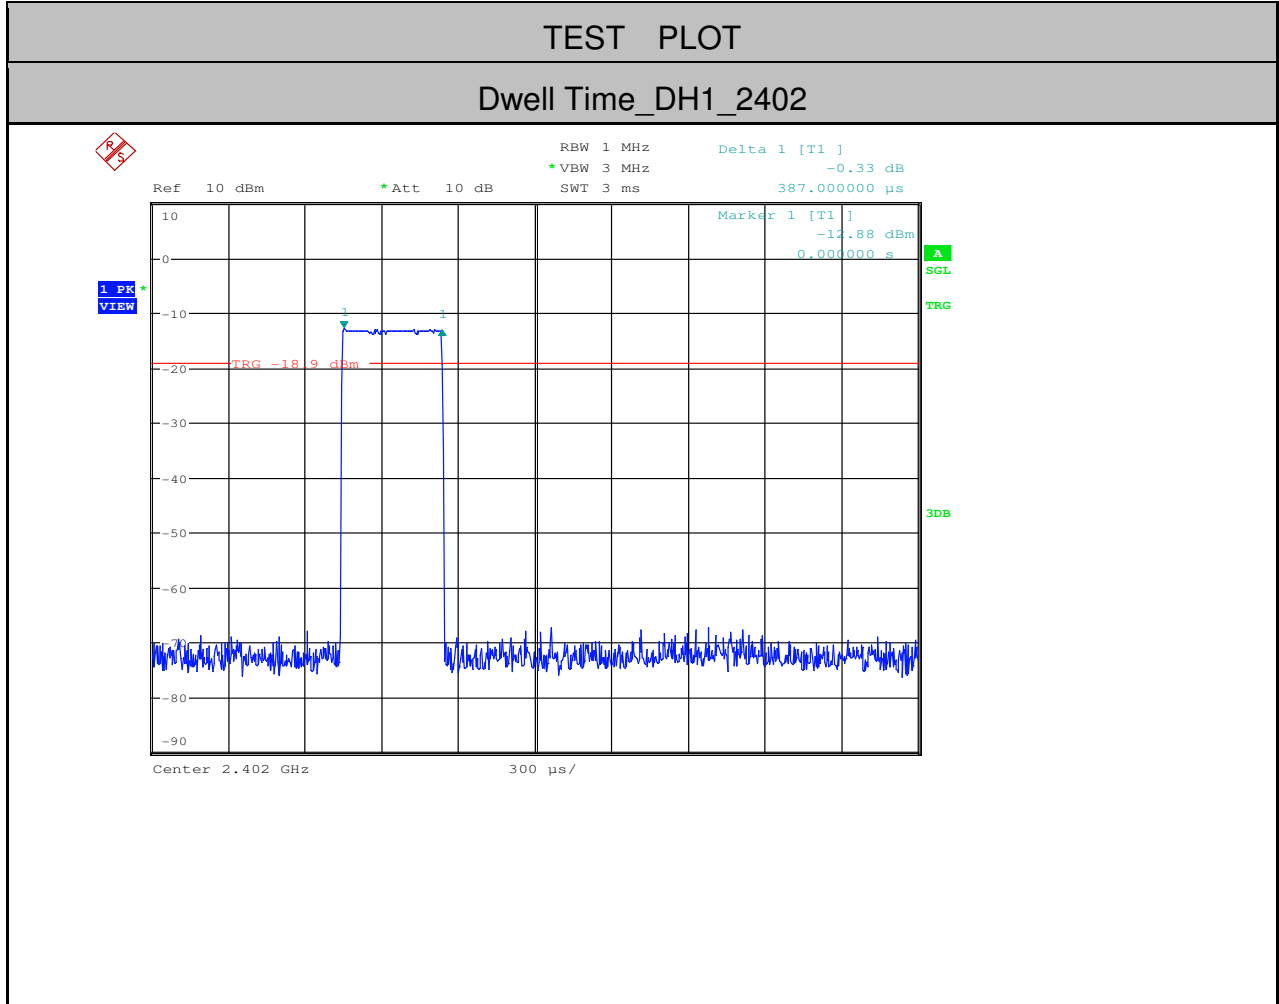



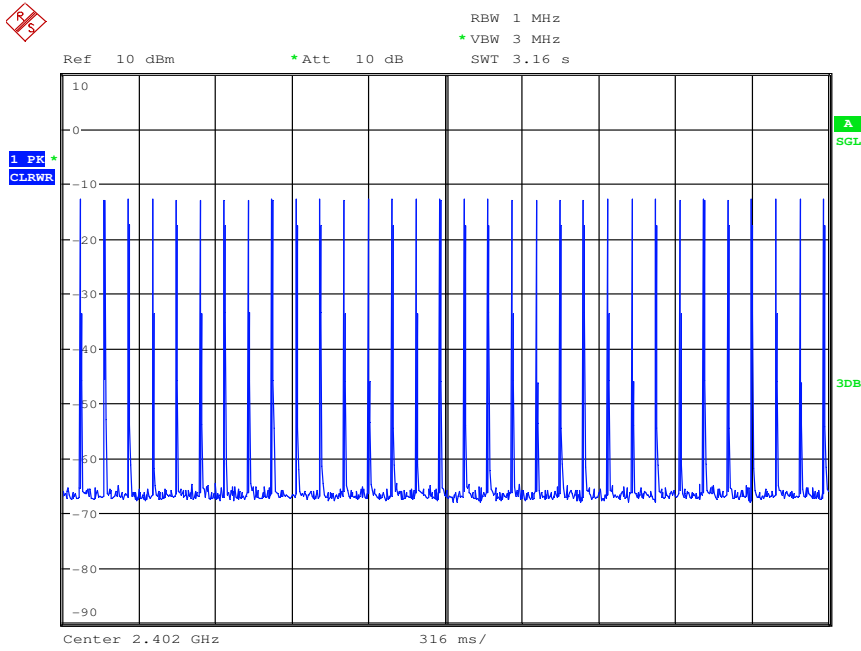


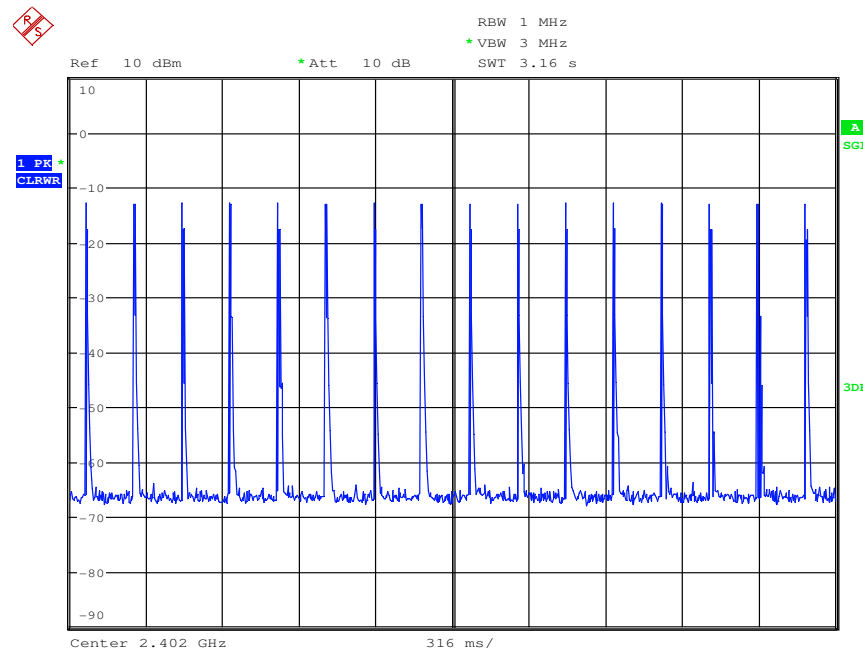
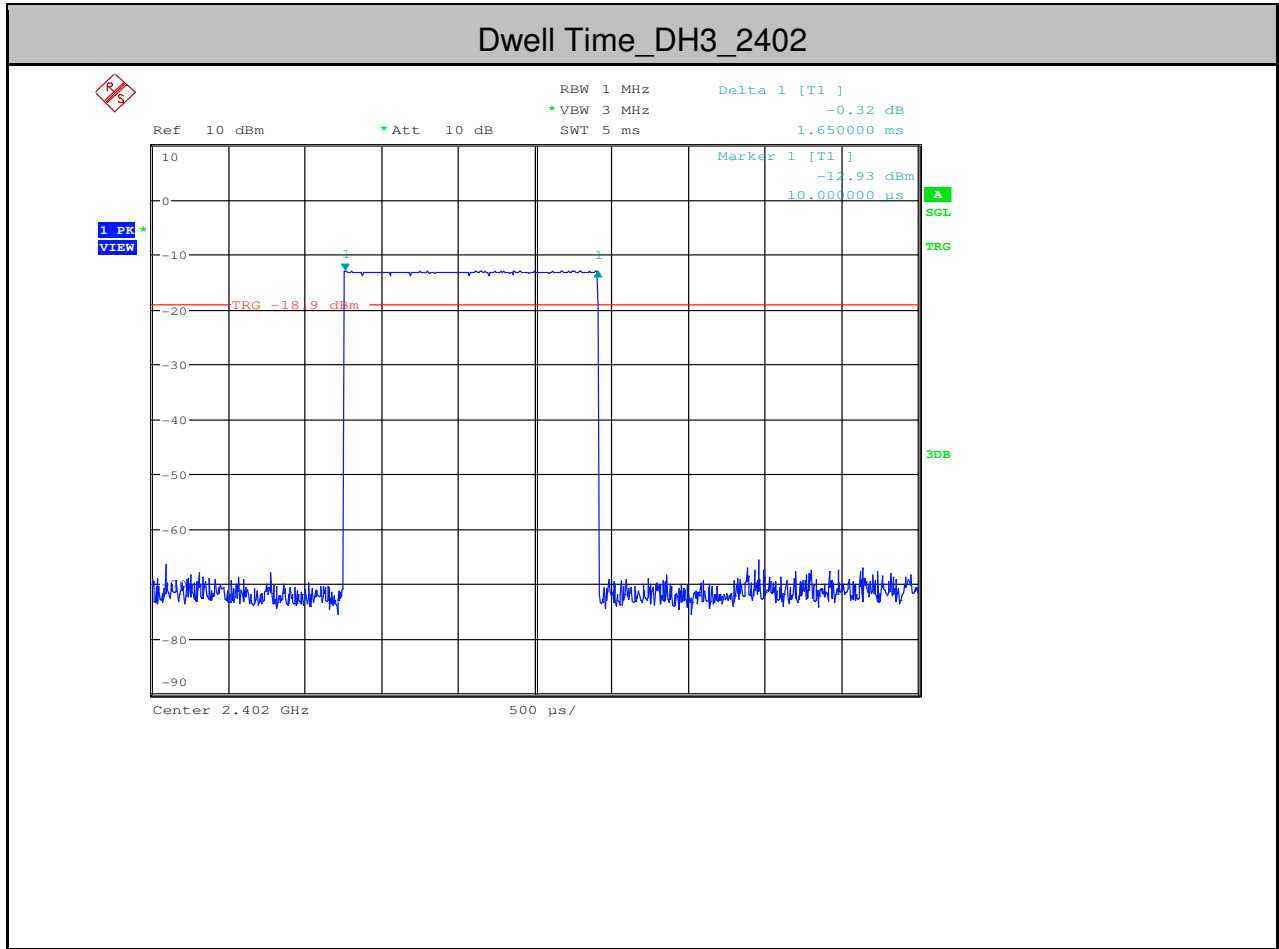


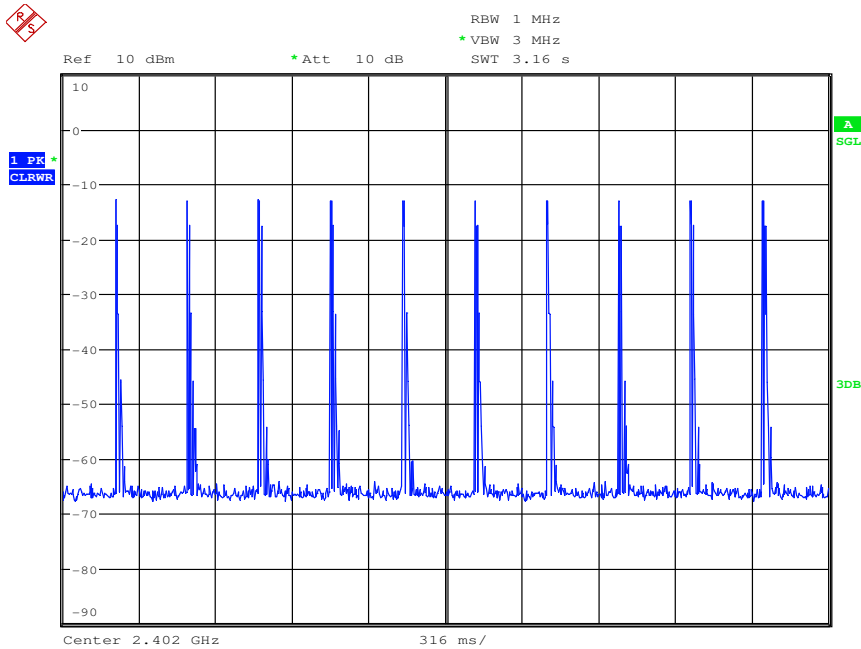
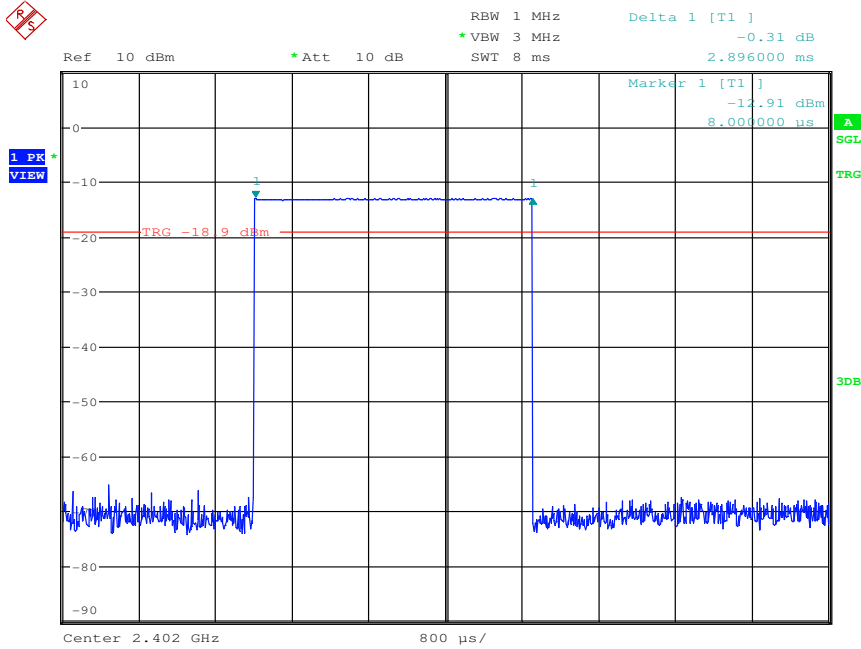


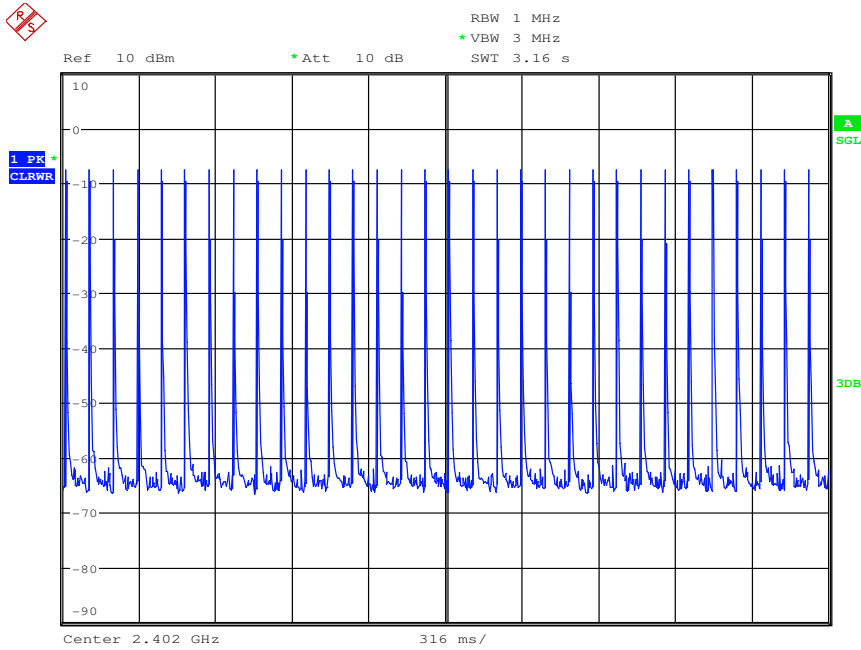
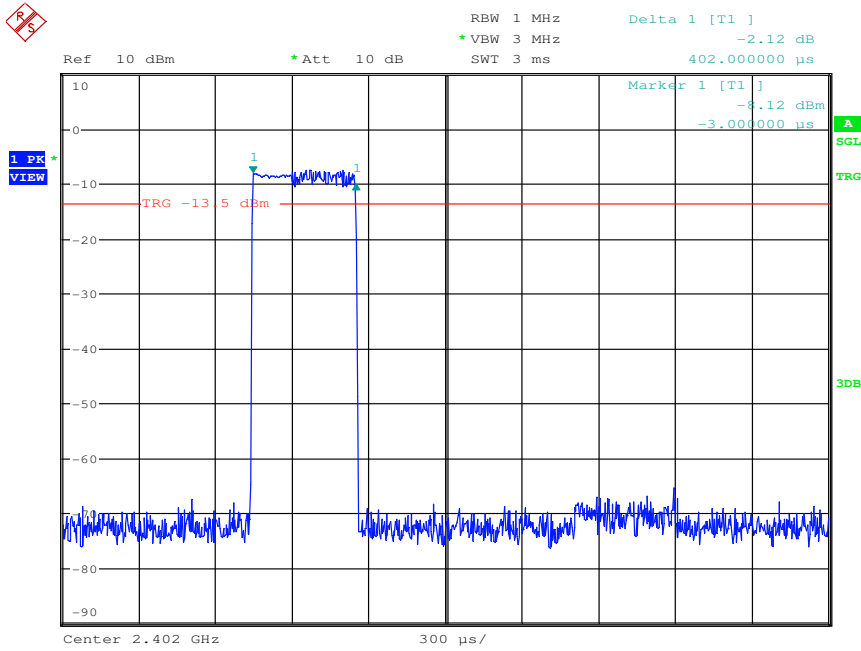


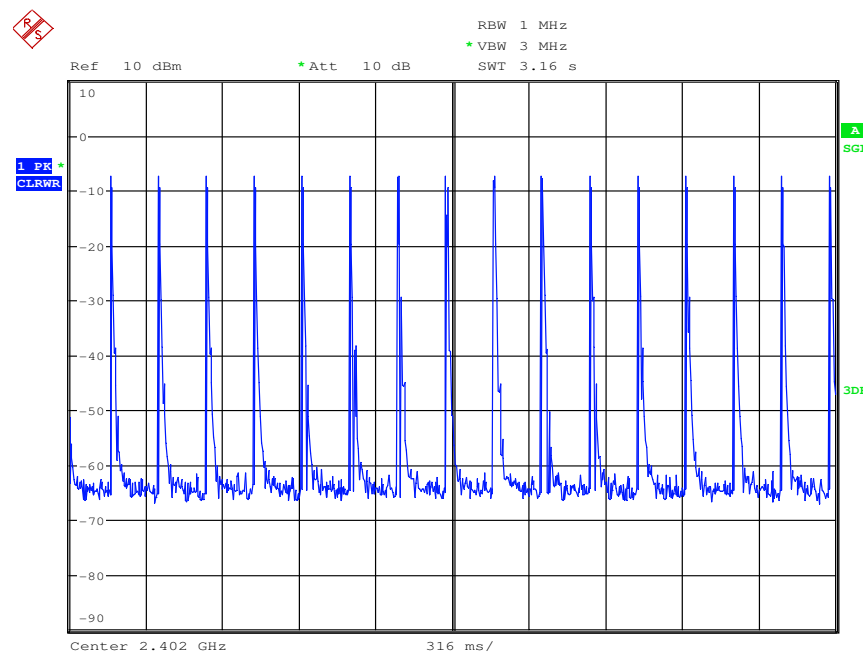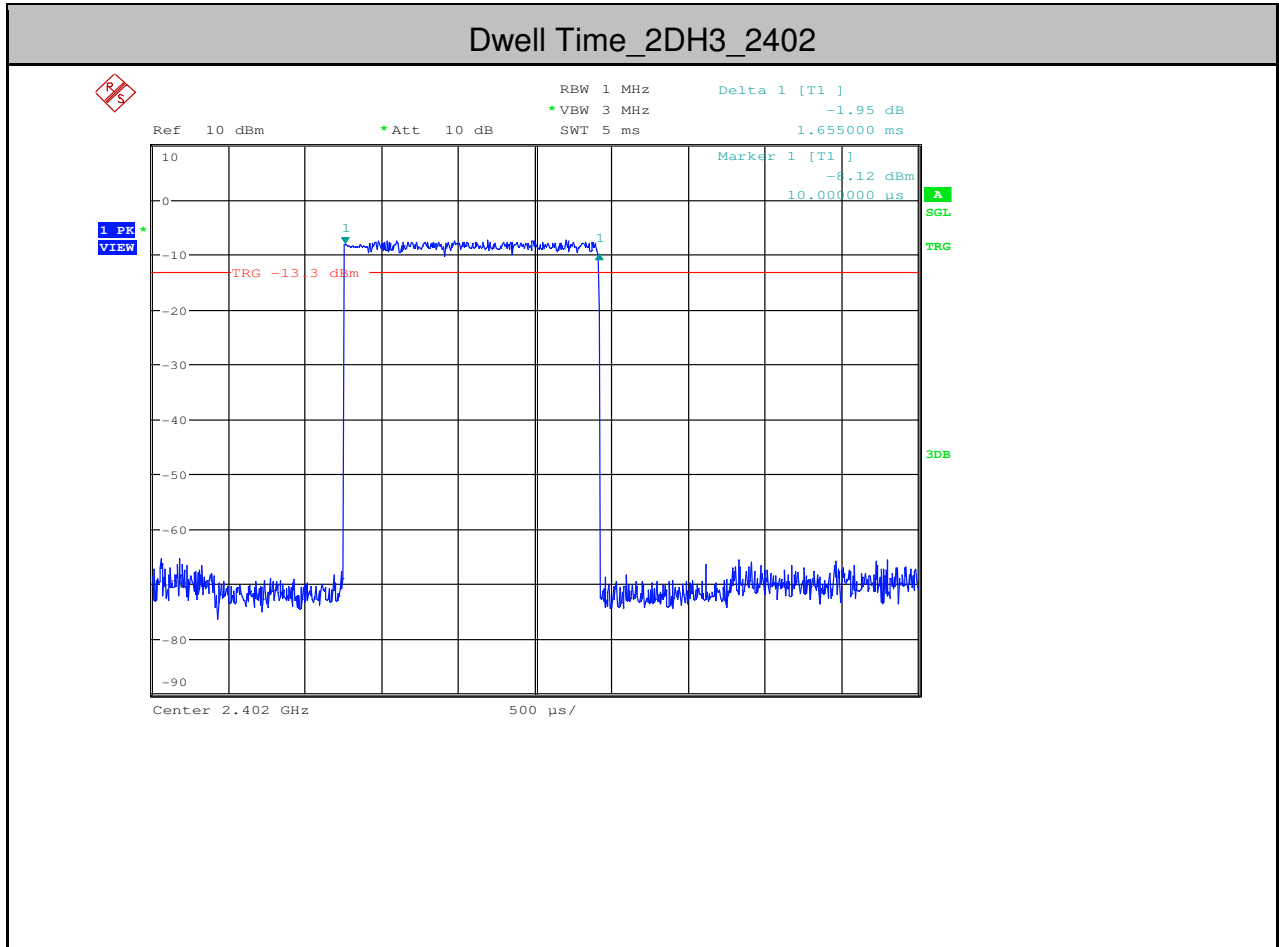

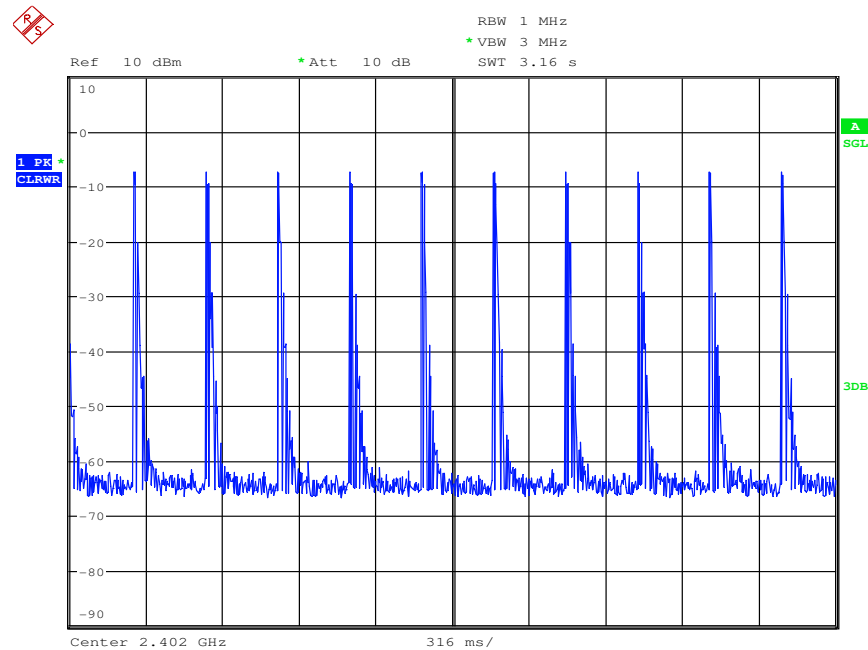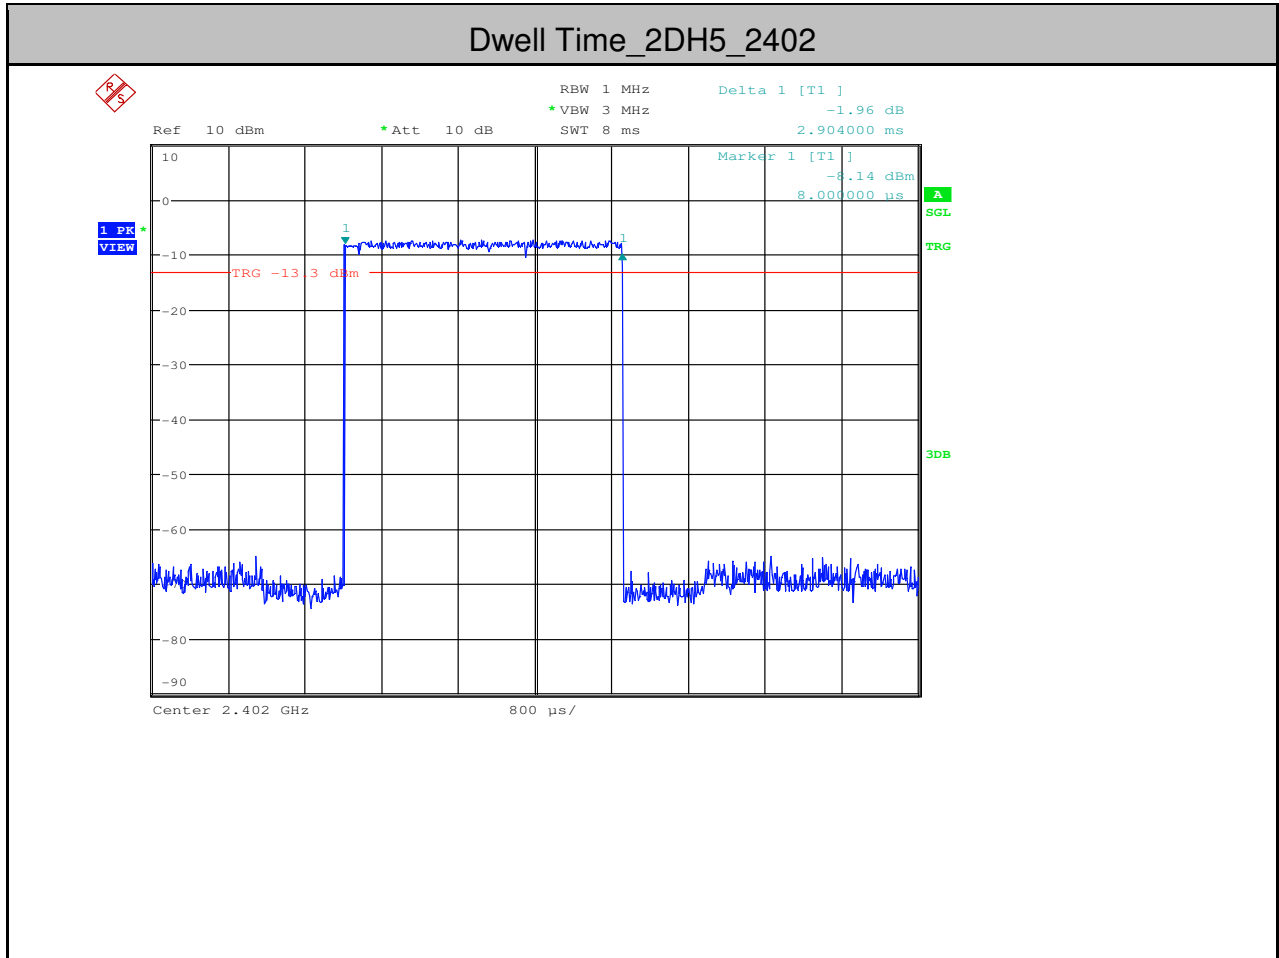

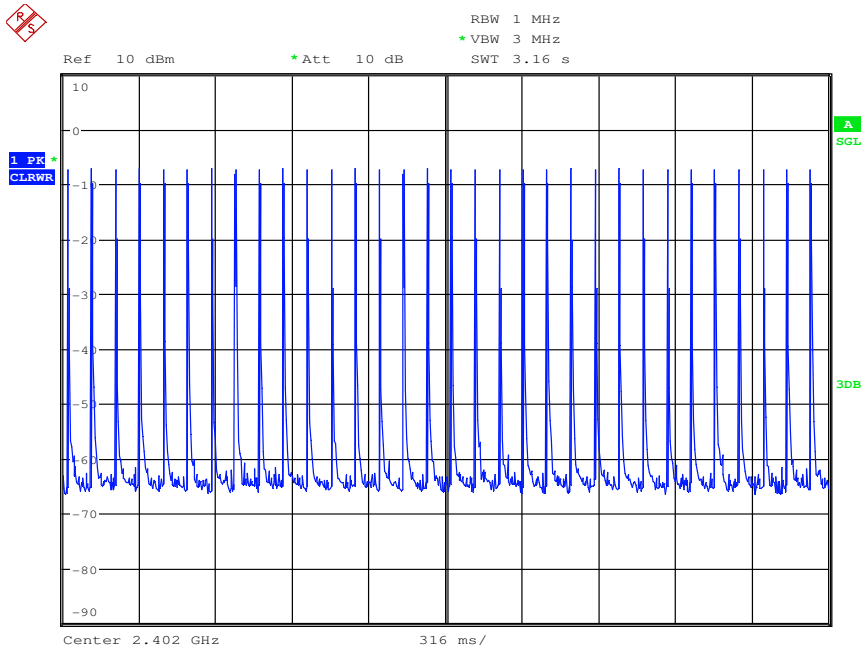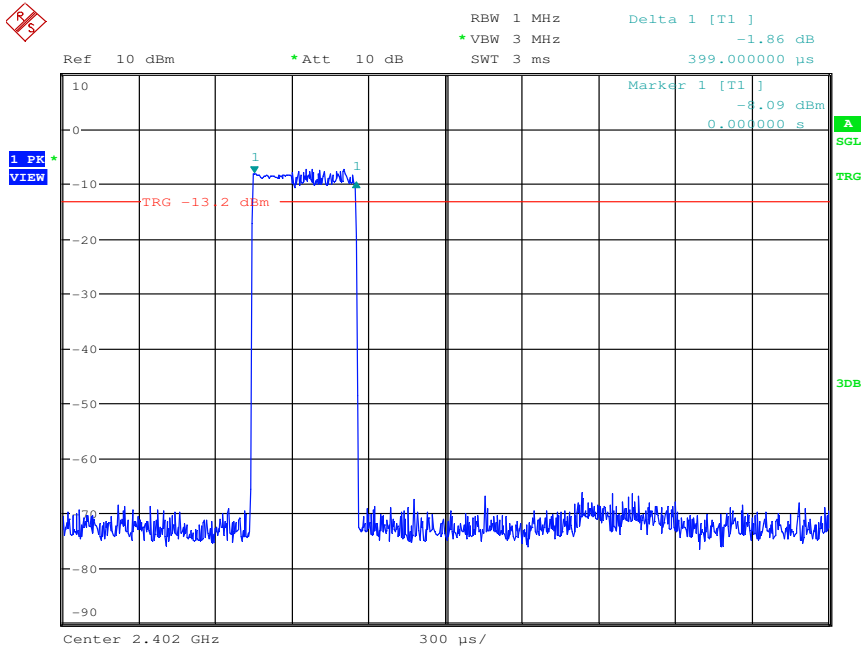

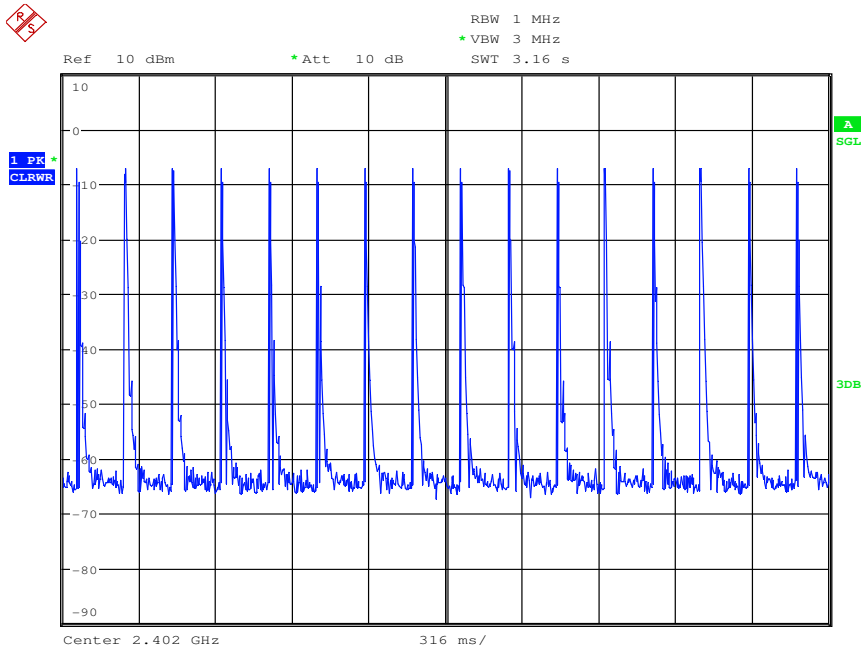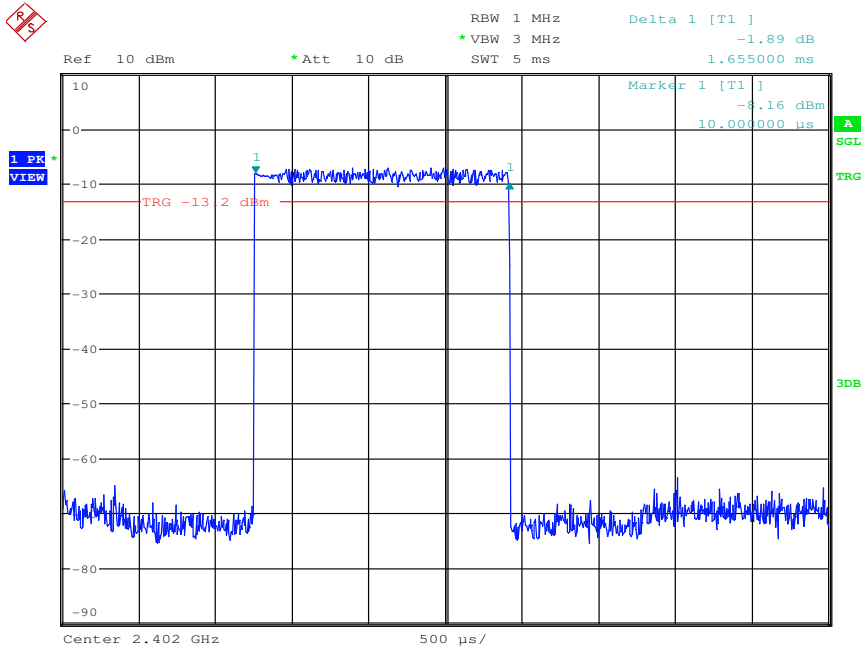


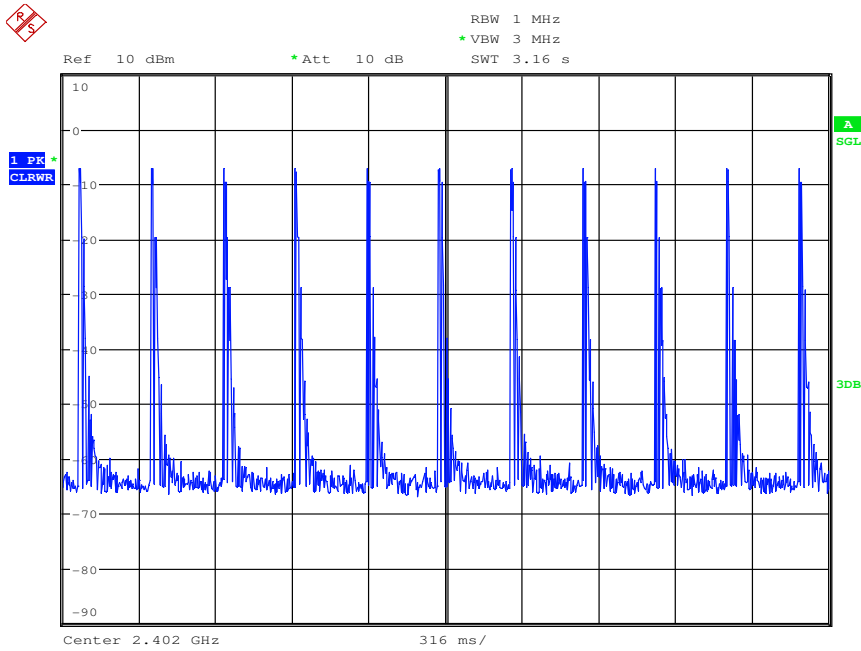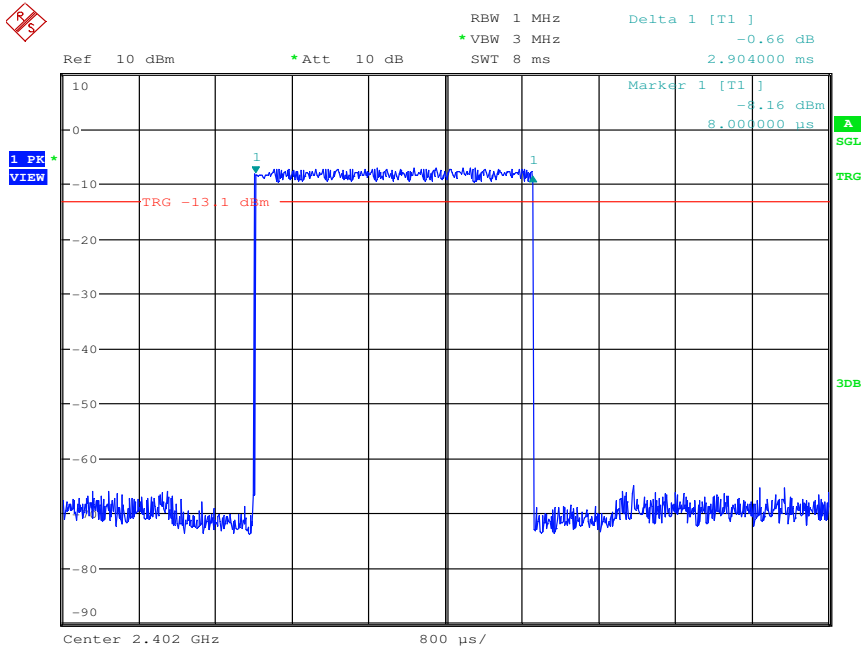





6.Hopping Channel Number

Test Mode	Test Channel	Number of Hopping Channel[N]	Limit[N]	Verdic
DH5	2402	79	≥ 15	PASS
2DH5	2402	79	≥ 15	PASS
3DH5	2402	79	≥ 15	PASS

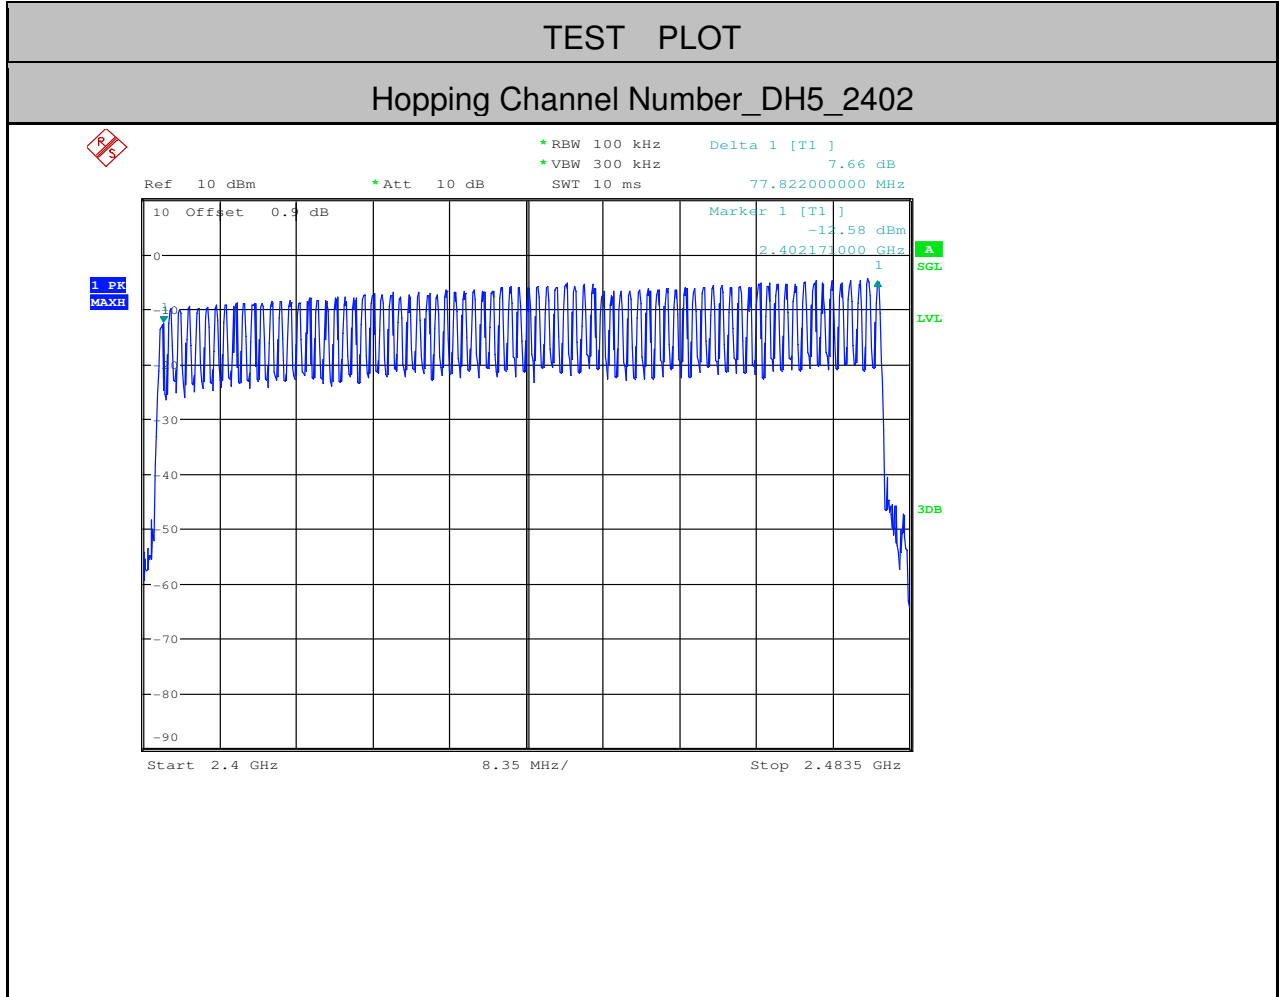

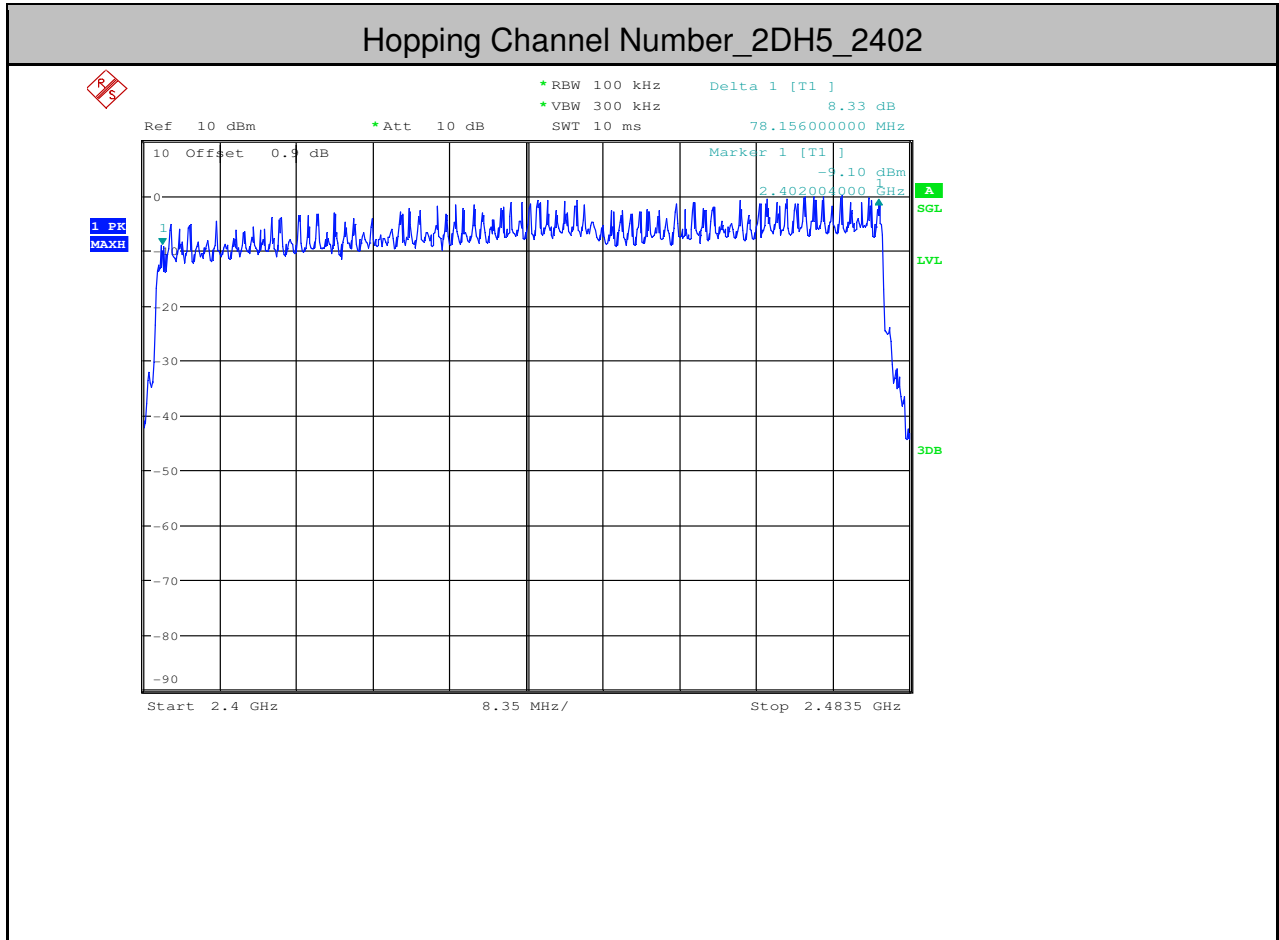


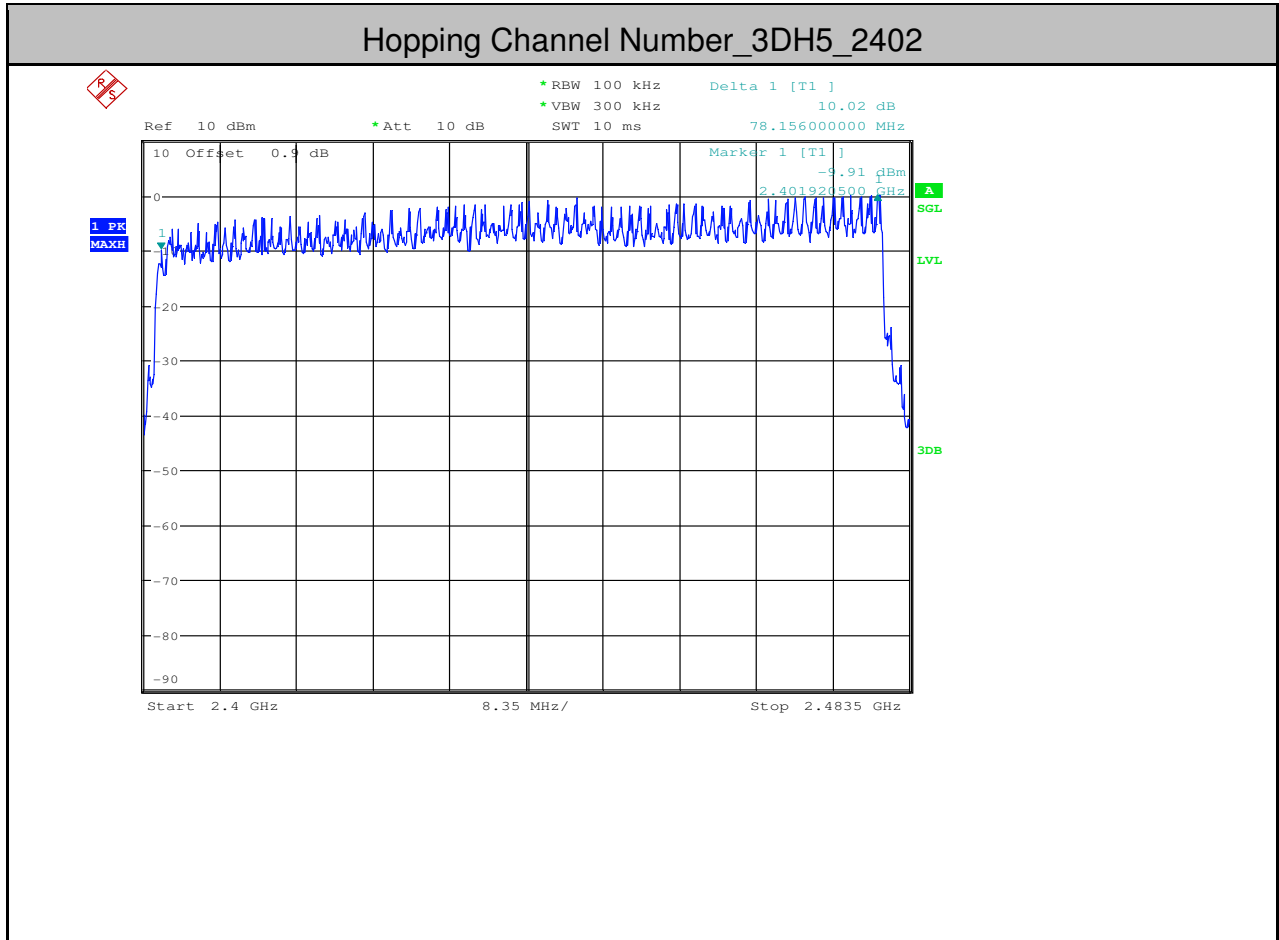






7. Band-edge for RF Conducted Emissions


Test Mode	Test Channel	Hopping	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit[dBm]	Verdic
DH5	2402	Off	-5.410	-66.492	<-25.41	PASS
DH5	2480	Off	2.500	-47.719	<-17.5	PASS
2DH5	2402	Off	-12.190	-65.921	<-32.19	PASS
2DH5	2480	Off	0.220	-43.473	<-19.78	PASS
3DH5	2402	Off	-7.800	-66.273	<-27.8	PASS
3DH5	2480	Off	0.300	-41.489	<-19.7	PASS
DH5	2402	On	-9.470	-64.941	<-29.47	PASS
DH5	2480	On	-4.760	-52.555	<-24.76	PASS
2DH5	2402	On	-8.460	-63.028	<-28.46	PASS
2DH5	2480	On	-3.120	-44.183	<-23.12	PASS
3DH5	2402	On	-9.980	-63.119	<-29.98	PASS
3DH5	2480	On	-0.030	-43.982	<-20.03	PASS

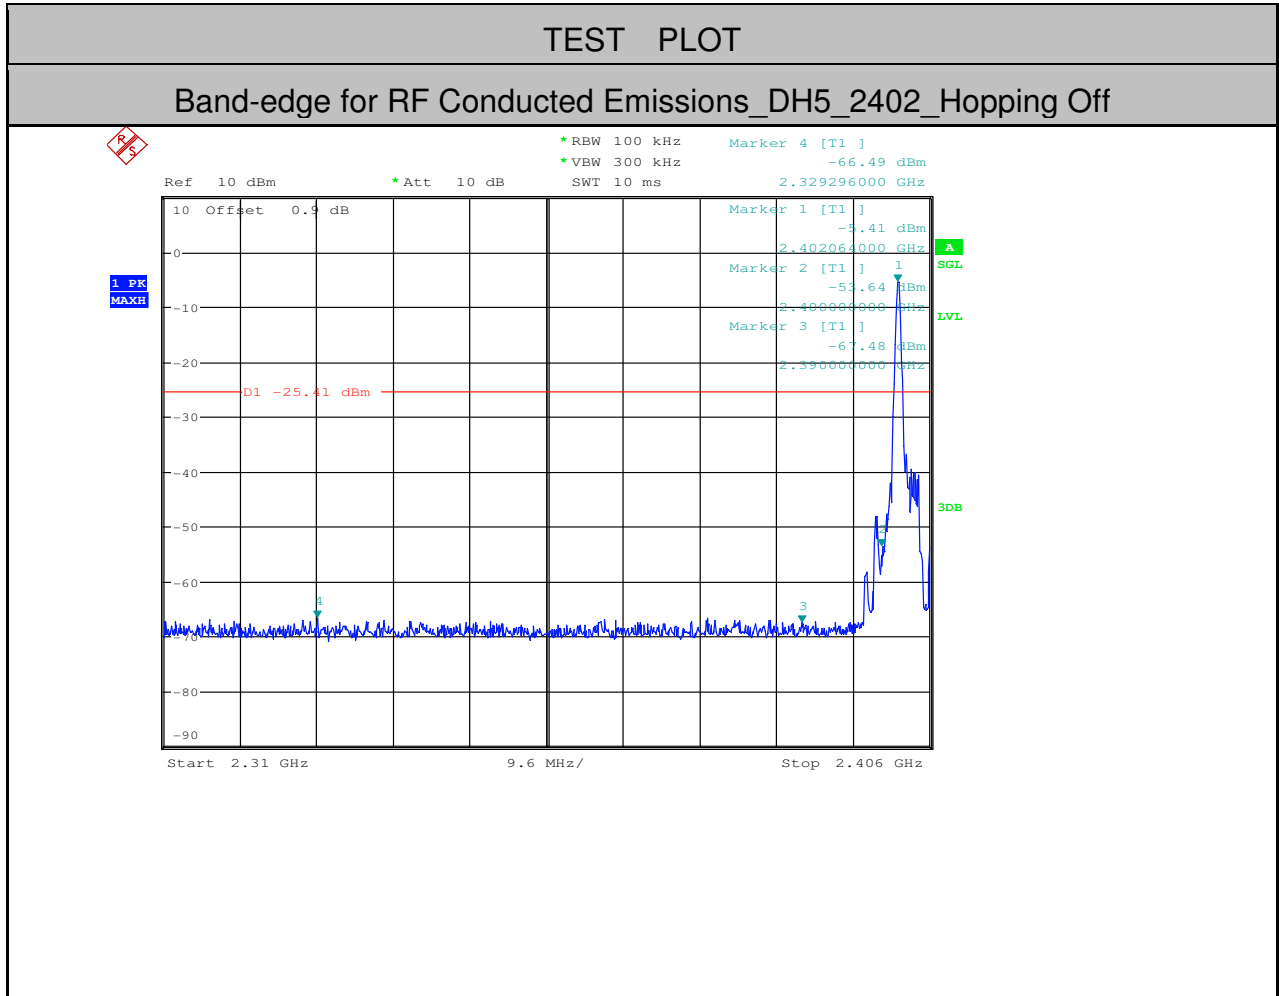


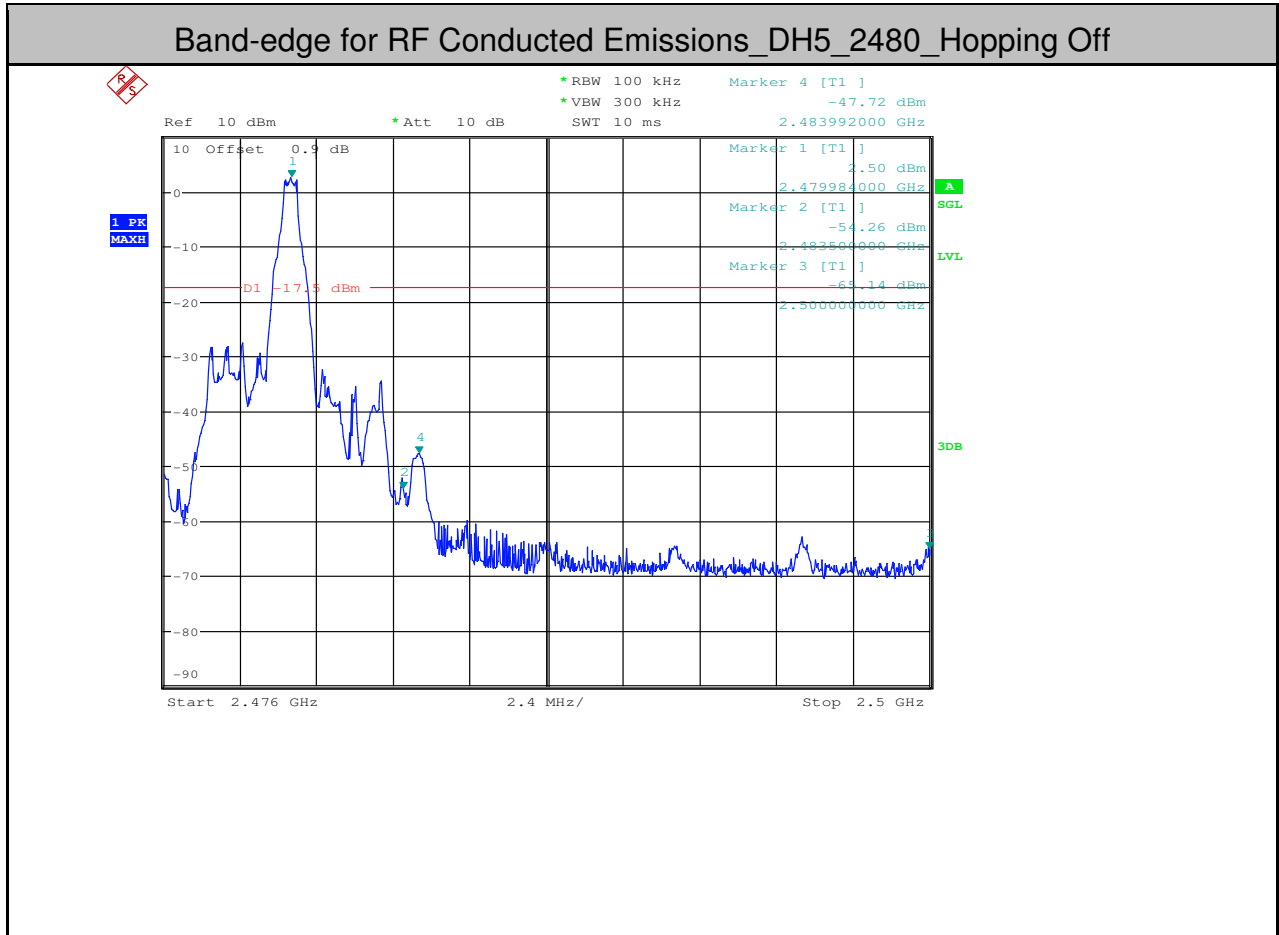


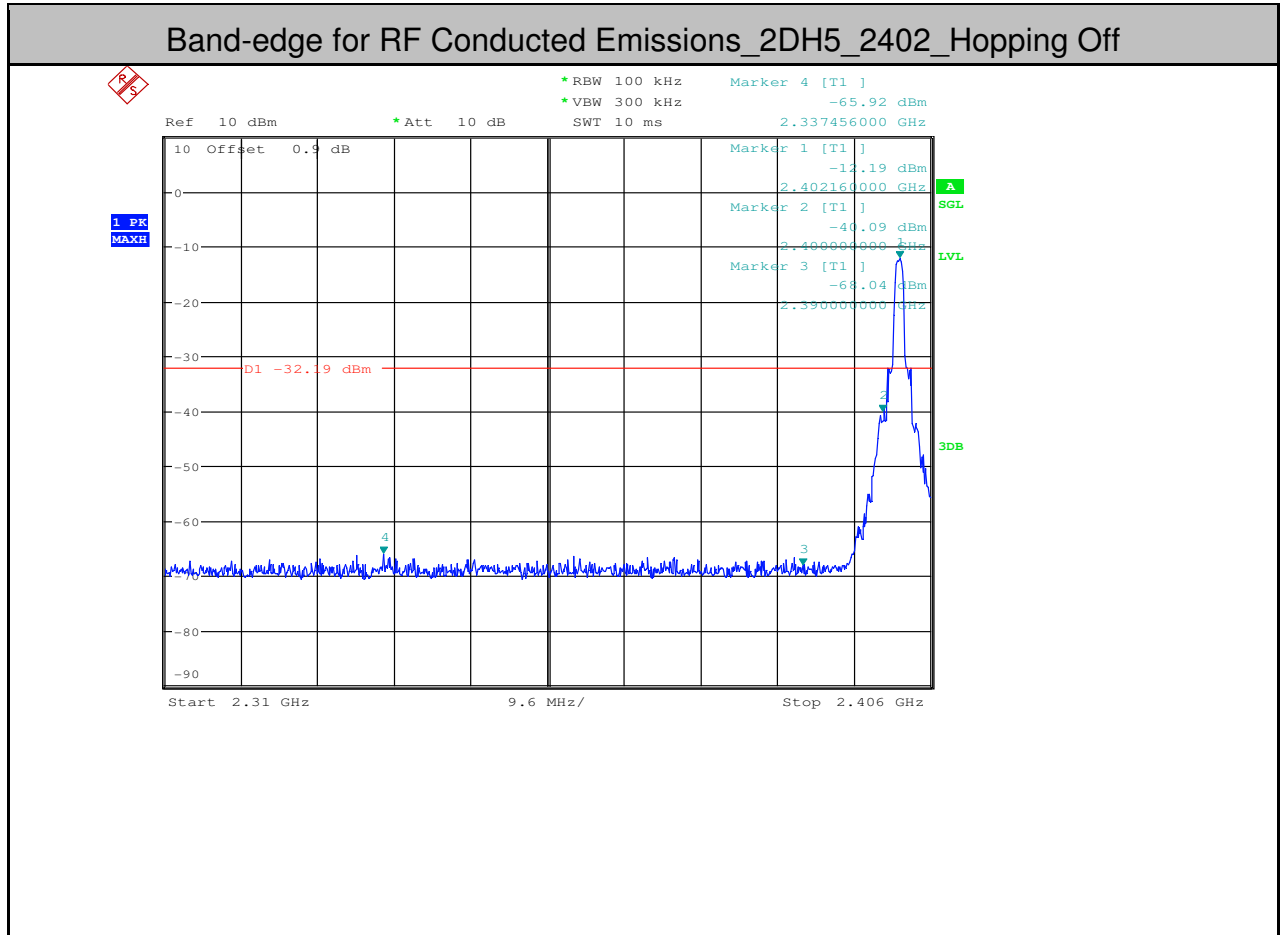


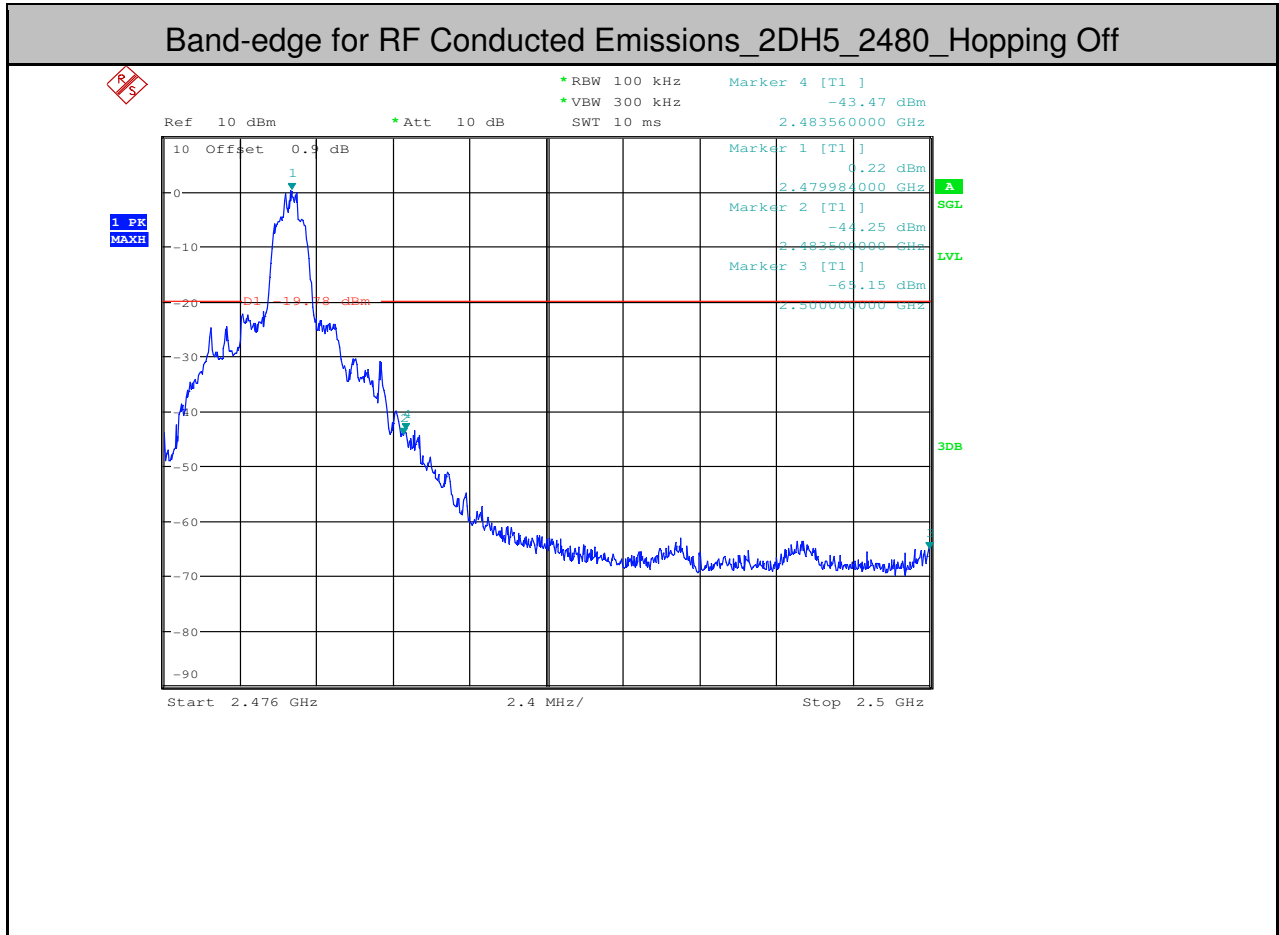


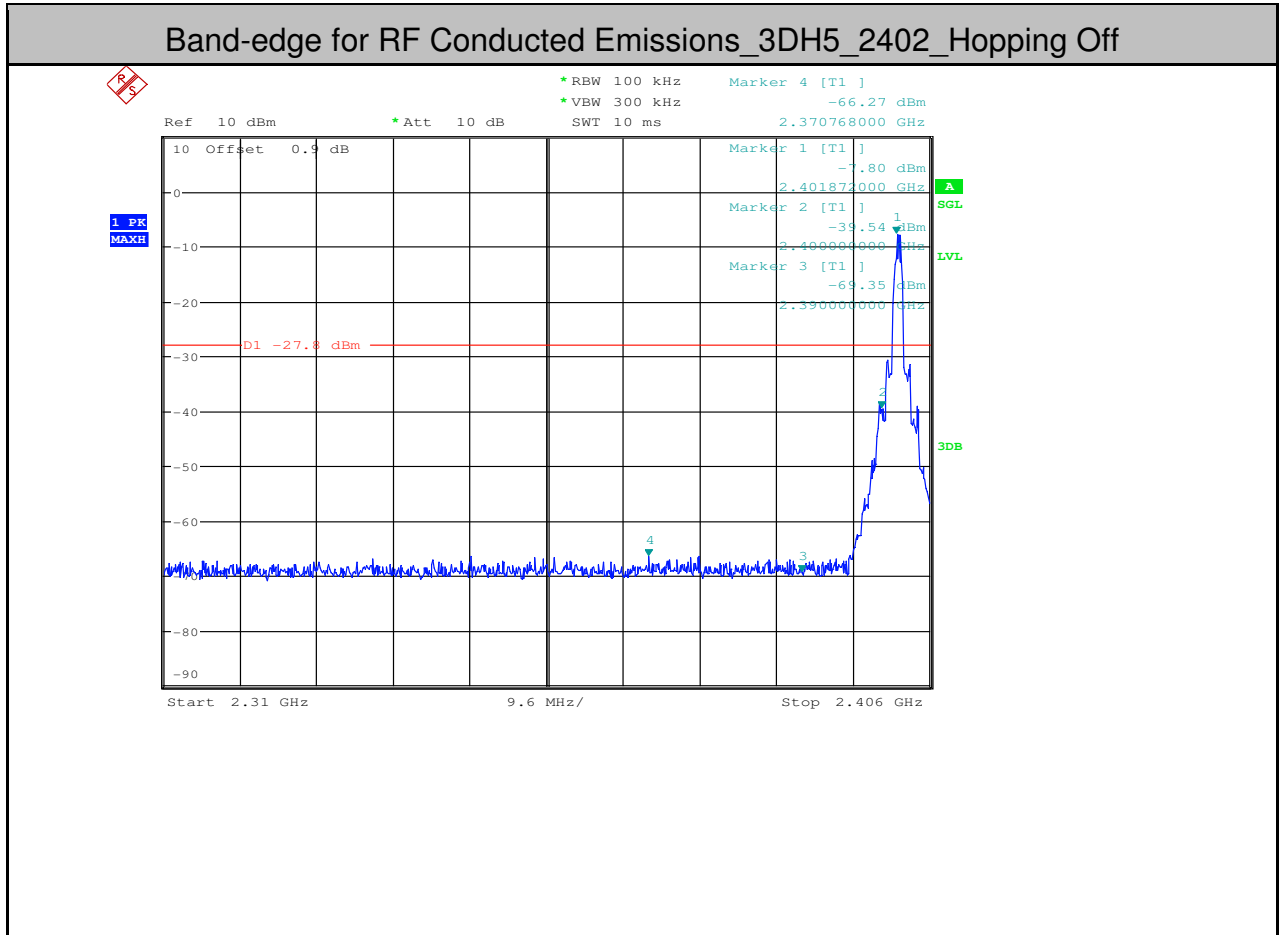


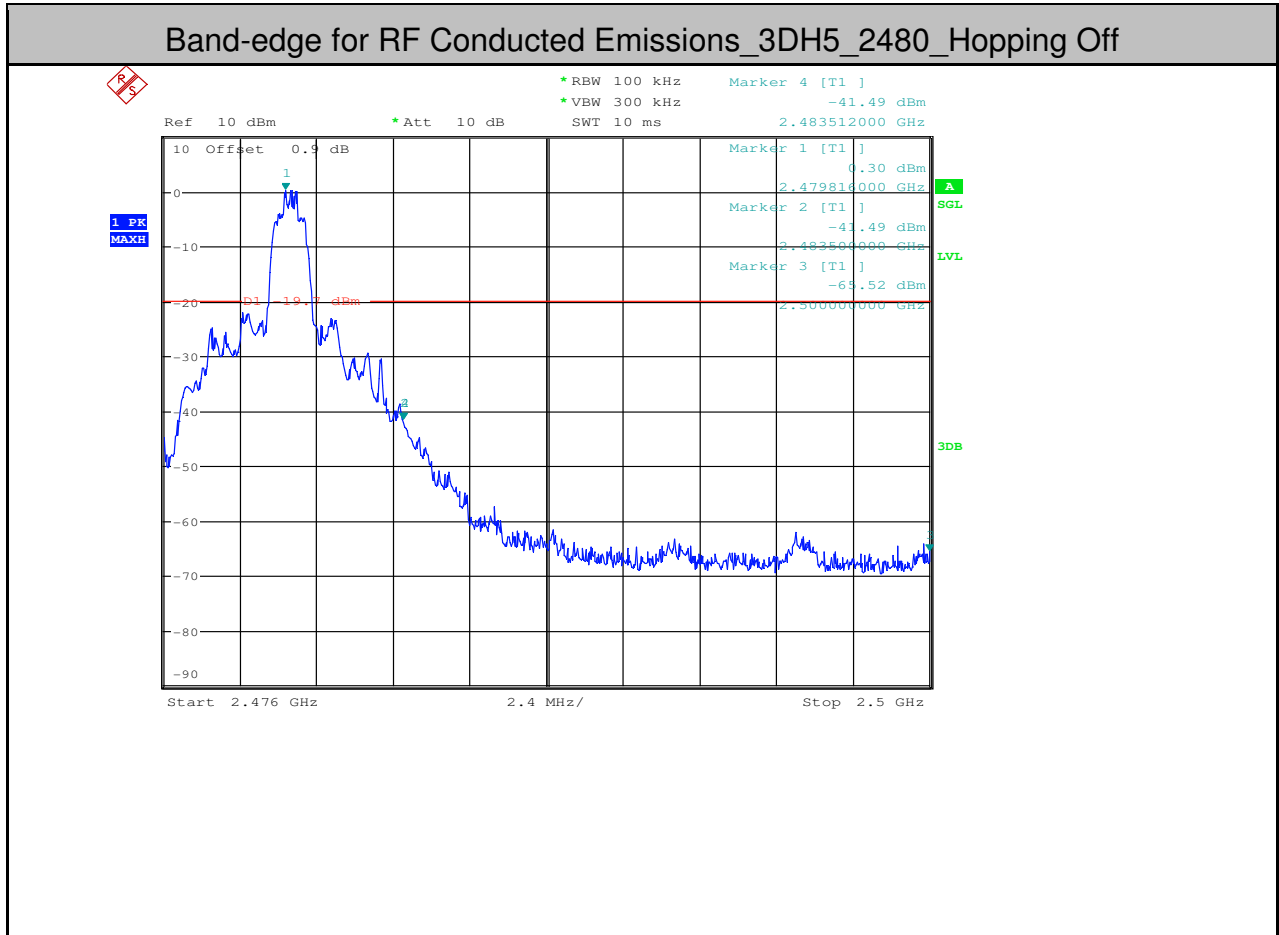


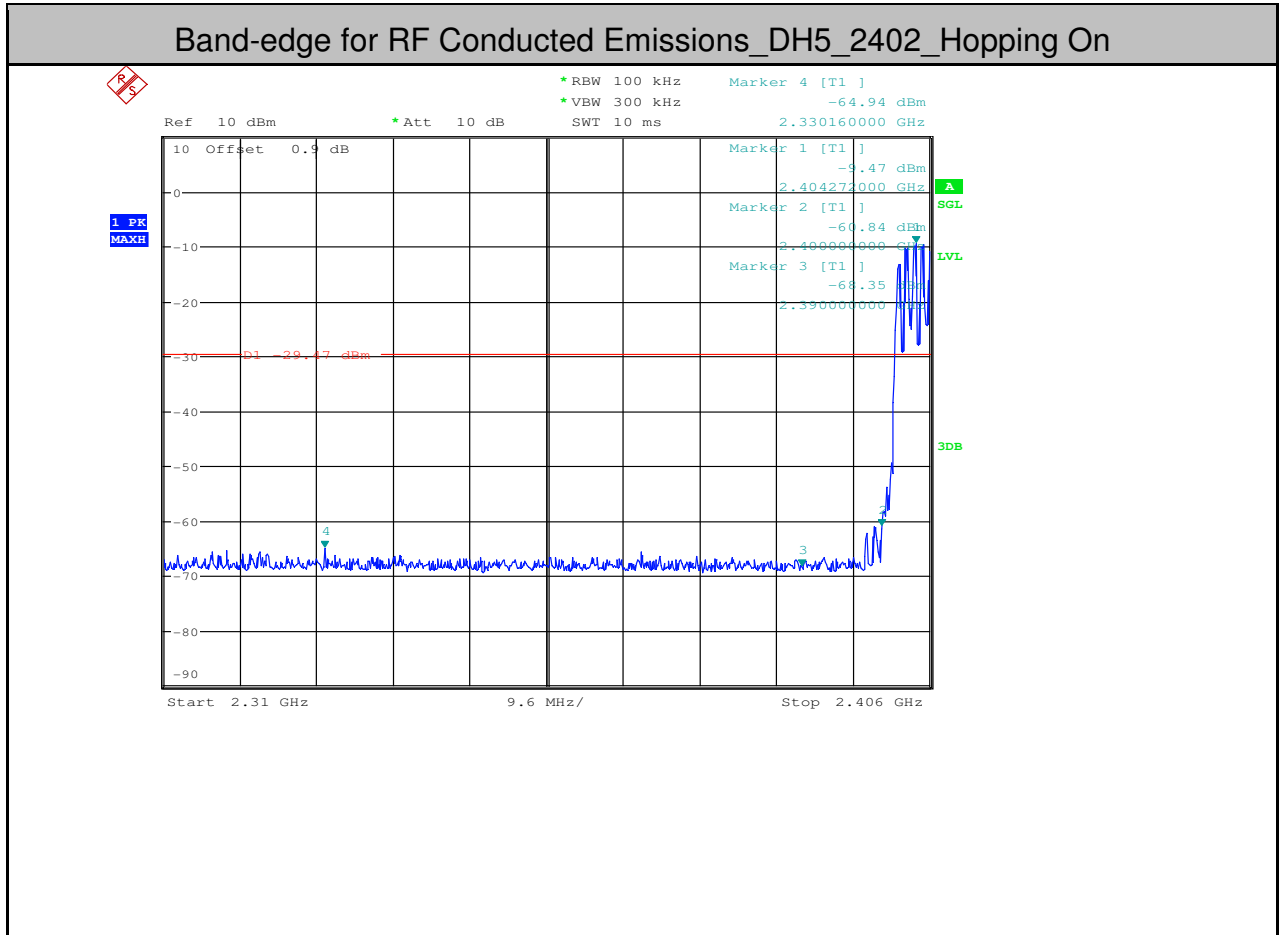


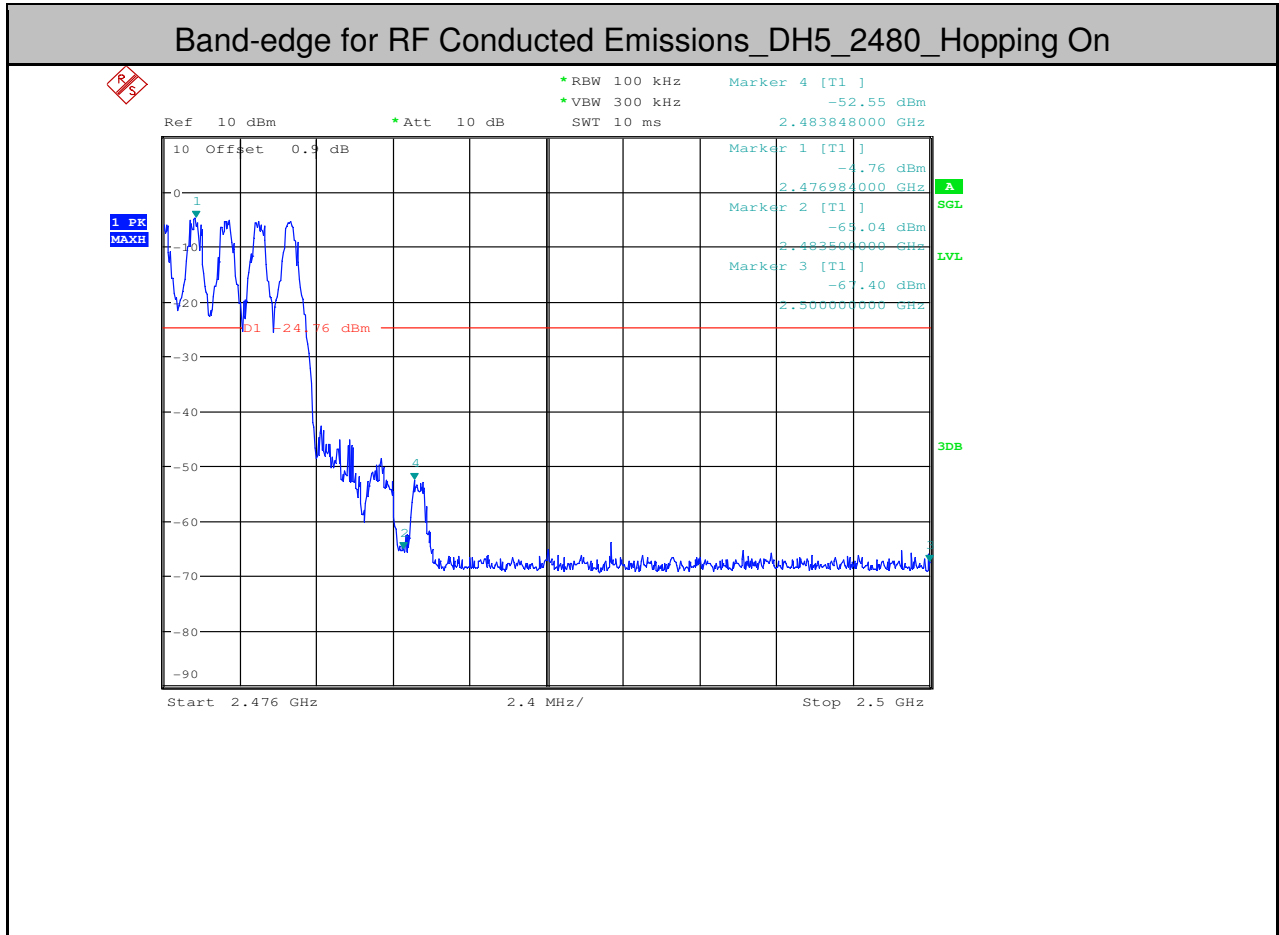

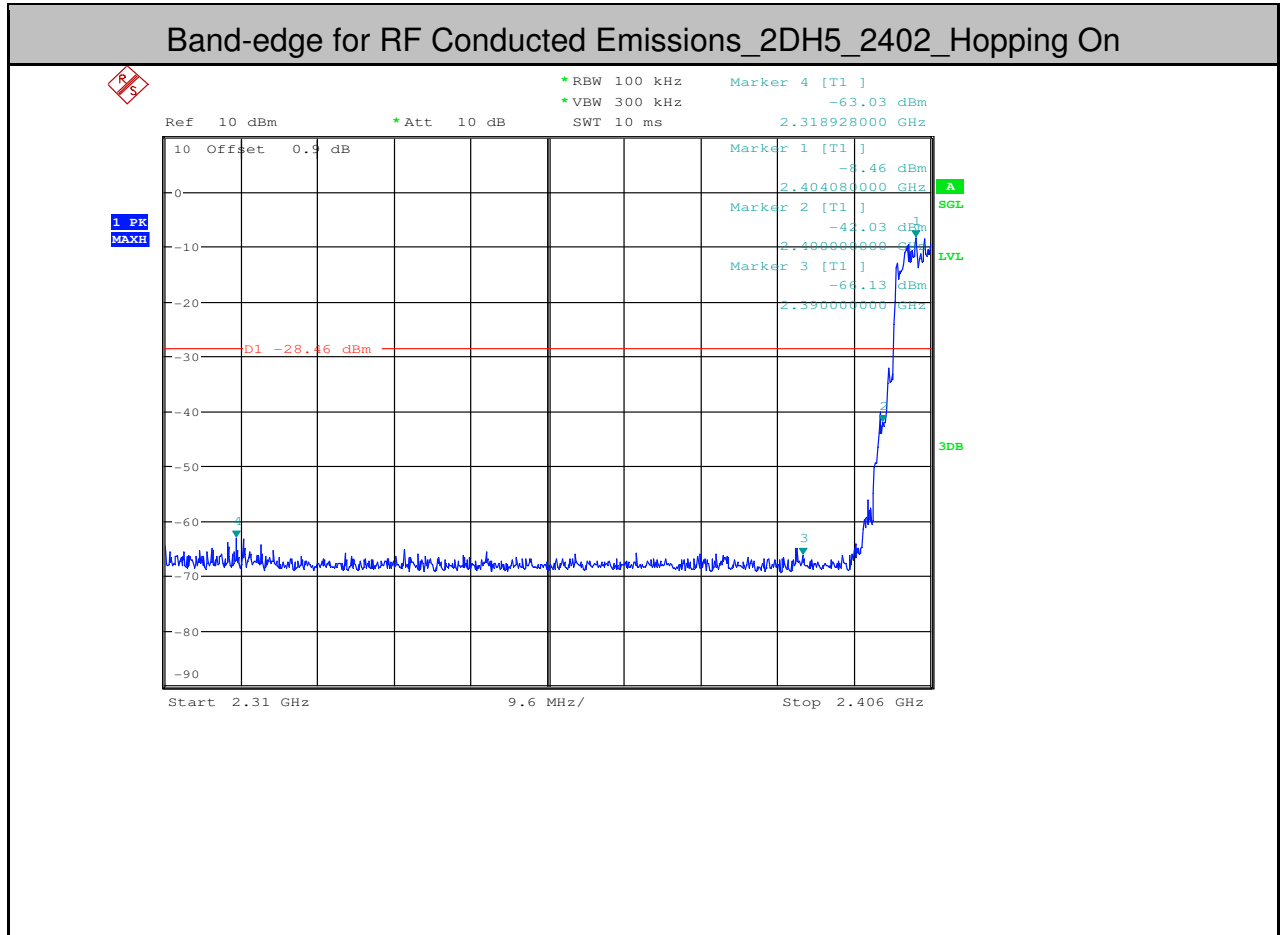

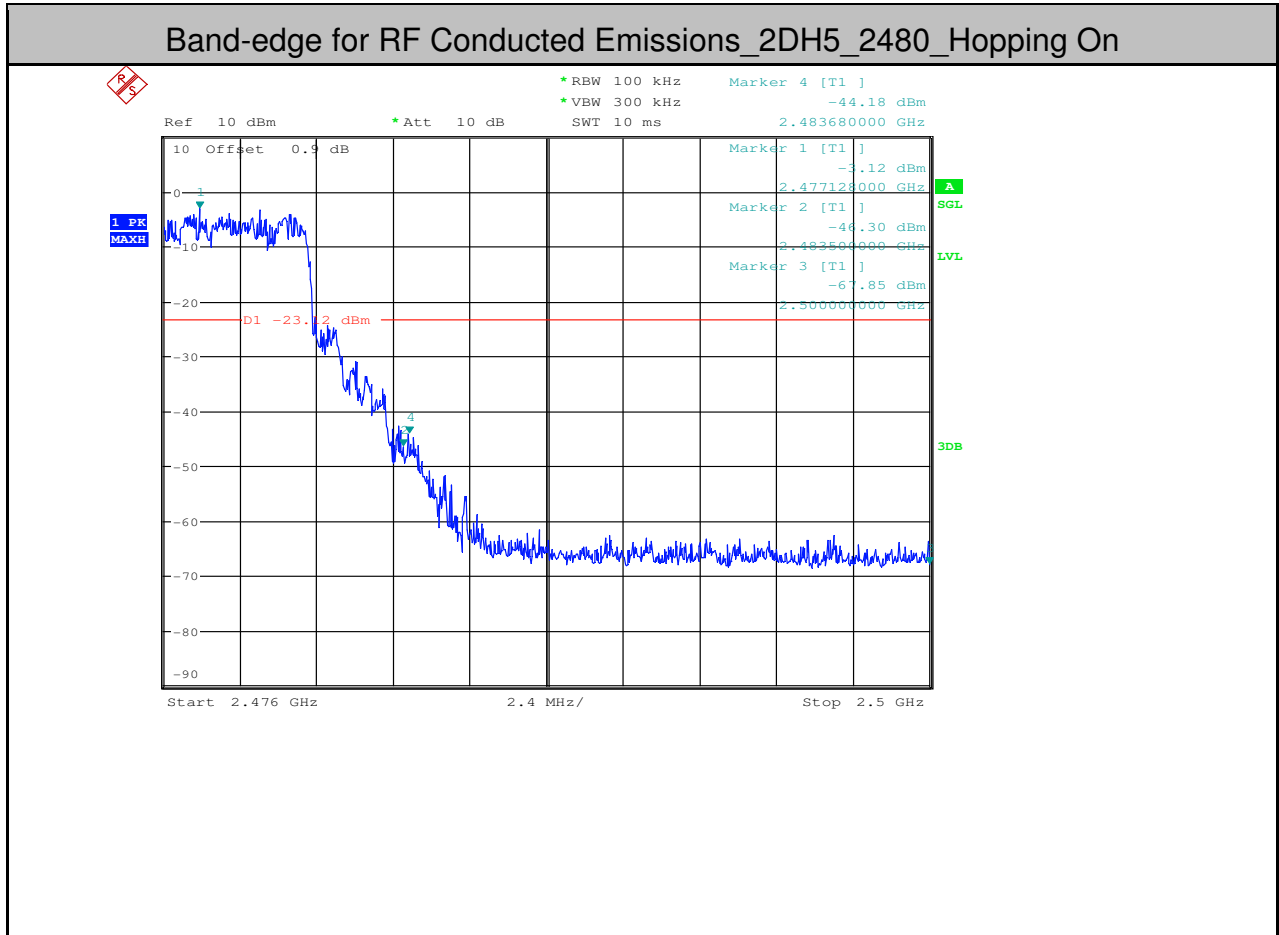

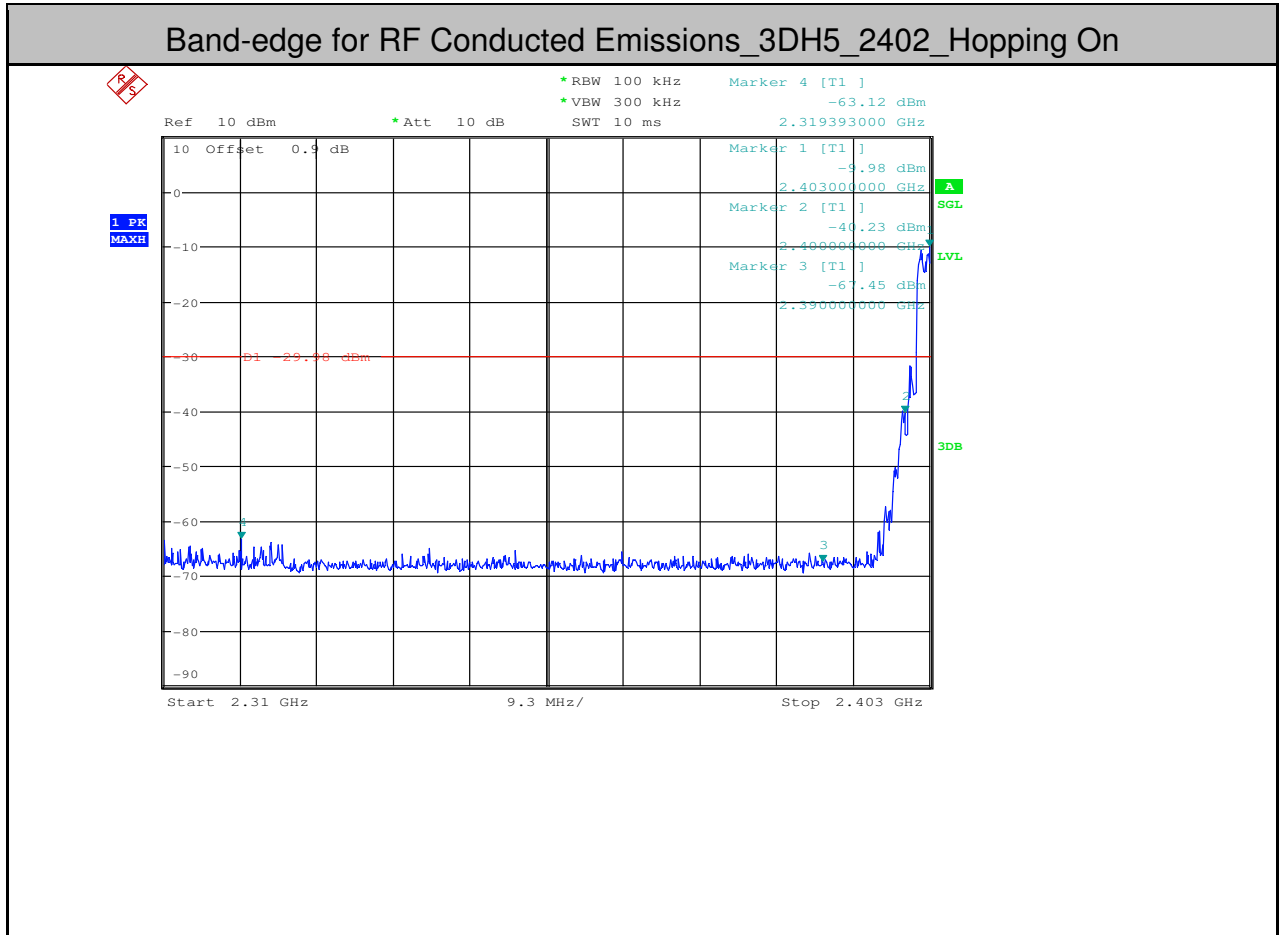

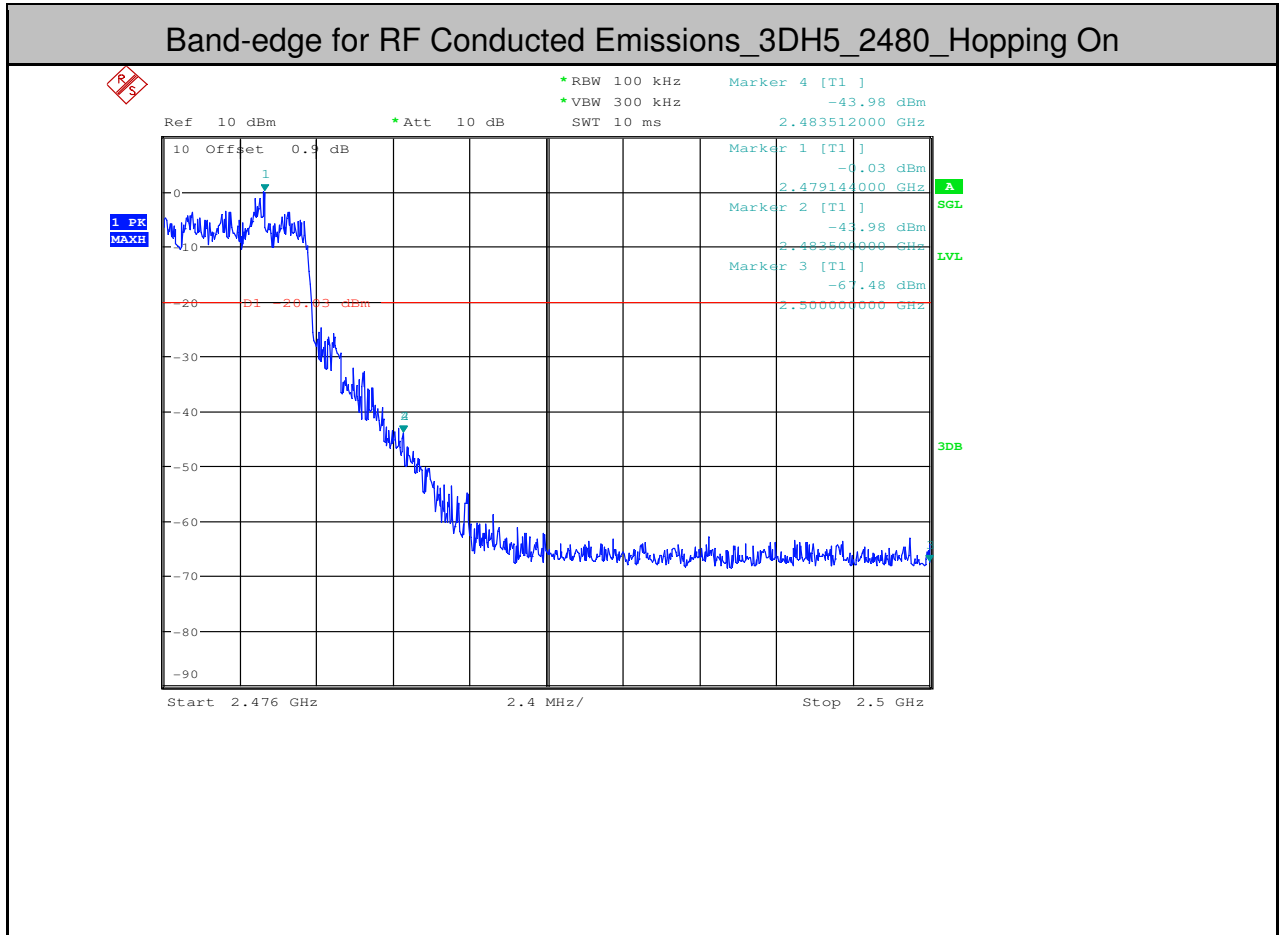



8.RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
DH5	2402	30	10000	1000	3000	-4.91	-53.960	<-24.91	PASS
DH5	2402	10000	25000	1000	3000	-4.91	-64.770	<-24.91	PASS
DH5	2441	30	10000	1000	3000	1.28	-49.630	<-18.72	PASS
DH5	2441	10000	25000	1000	3000	1.28	-64.740	<-18.72	PASS
DH5	2480	30	10000	1000	3000	2.5	-46.590	<-17.5	PASS
DH5	2480	10000	25000	1000	3000	2.5	-65.270	<-17.5	PASS
2DH5	2402	30	10000	1000	3000	-8.11	-57.290	<-28.11	PASS
2DH5	2402	10000	25000	1000	3000	-8.11	-65.340	<-28.11	PASS
2DH5	2441	30	10000	1000	3000	-1.54	-52.210	<-21.54	PASS
2DH5	2441	10000	25000	1000	3000	-1.54	-65.580	<-21.54	PASS
2DH5	2480	30	10000	1000	3000	0.27	-49.370	<-19.73	PASS
2DH5	2480	10000	25000	1000	3000	0.27	-64.850	<-19.73	PASS
3DH5	2402	30	10000	1000	3000	-7.94	-46.830	<-27.94	PASS
3DH5	2402	10000	25000	1000	3000	-7.94	-64.850	<-27.94	PASS
3DH5	2441	30	10000	1000	3000	-0.8	-41.180	<-20.8	PASS
3DH5	2441	10000	25000	1000	3000	-0.8	-65.310	<-20.8	PASS

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.





**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**


Report No.: SZEM161201122602


Page: 111 of 129

3DH5	2480	30	10000	1000	3000	0.11	-49.740	<- 19.89	PASS
3DH5	2480	10000	25000	1000	3000	0.11	-65.420	<- 19.89	PASS

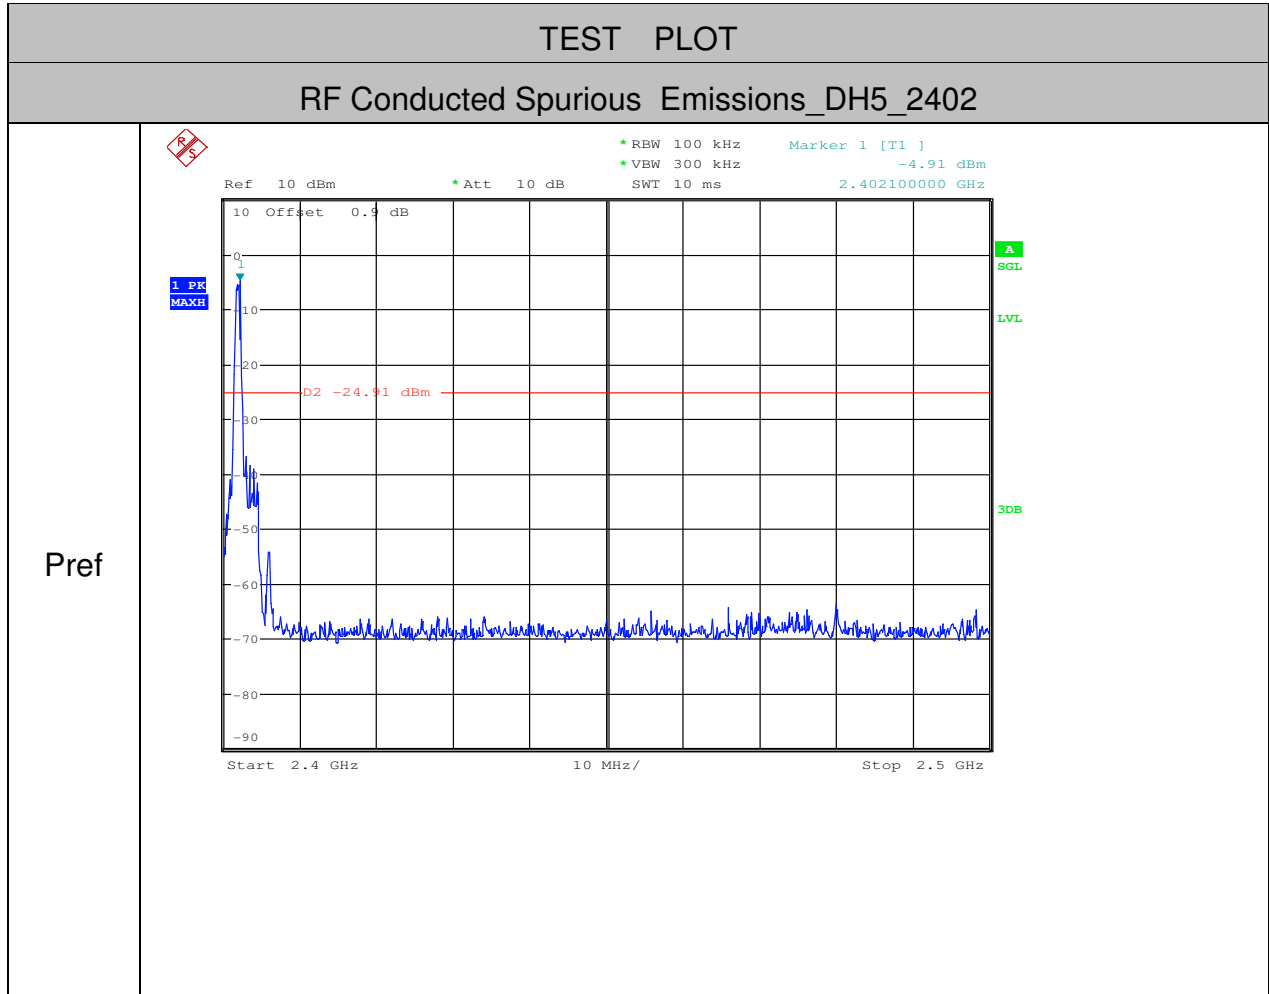


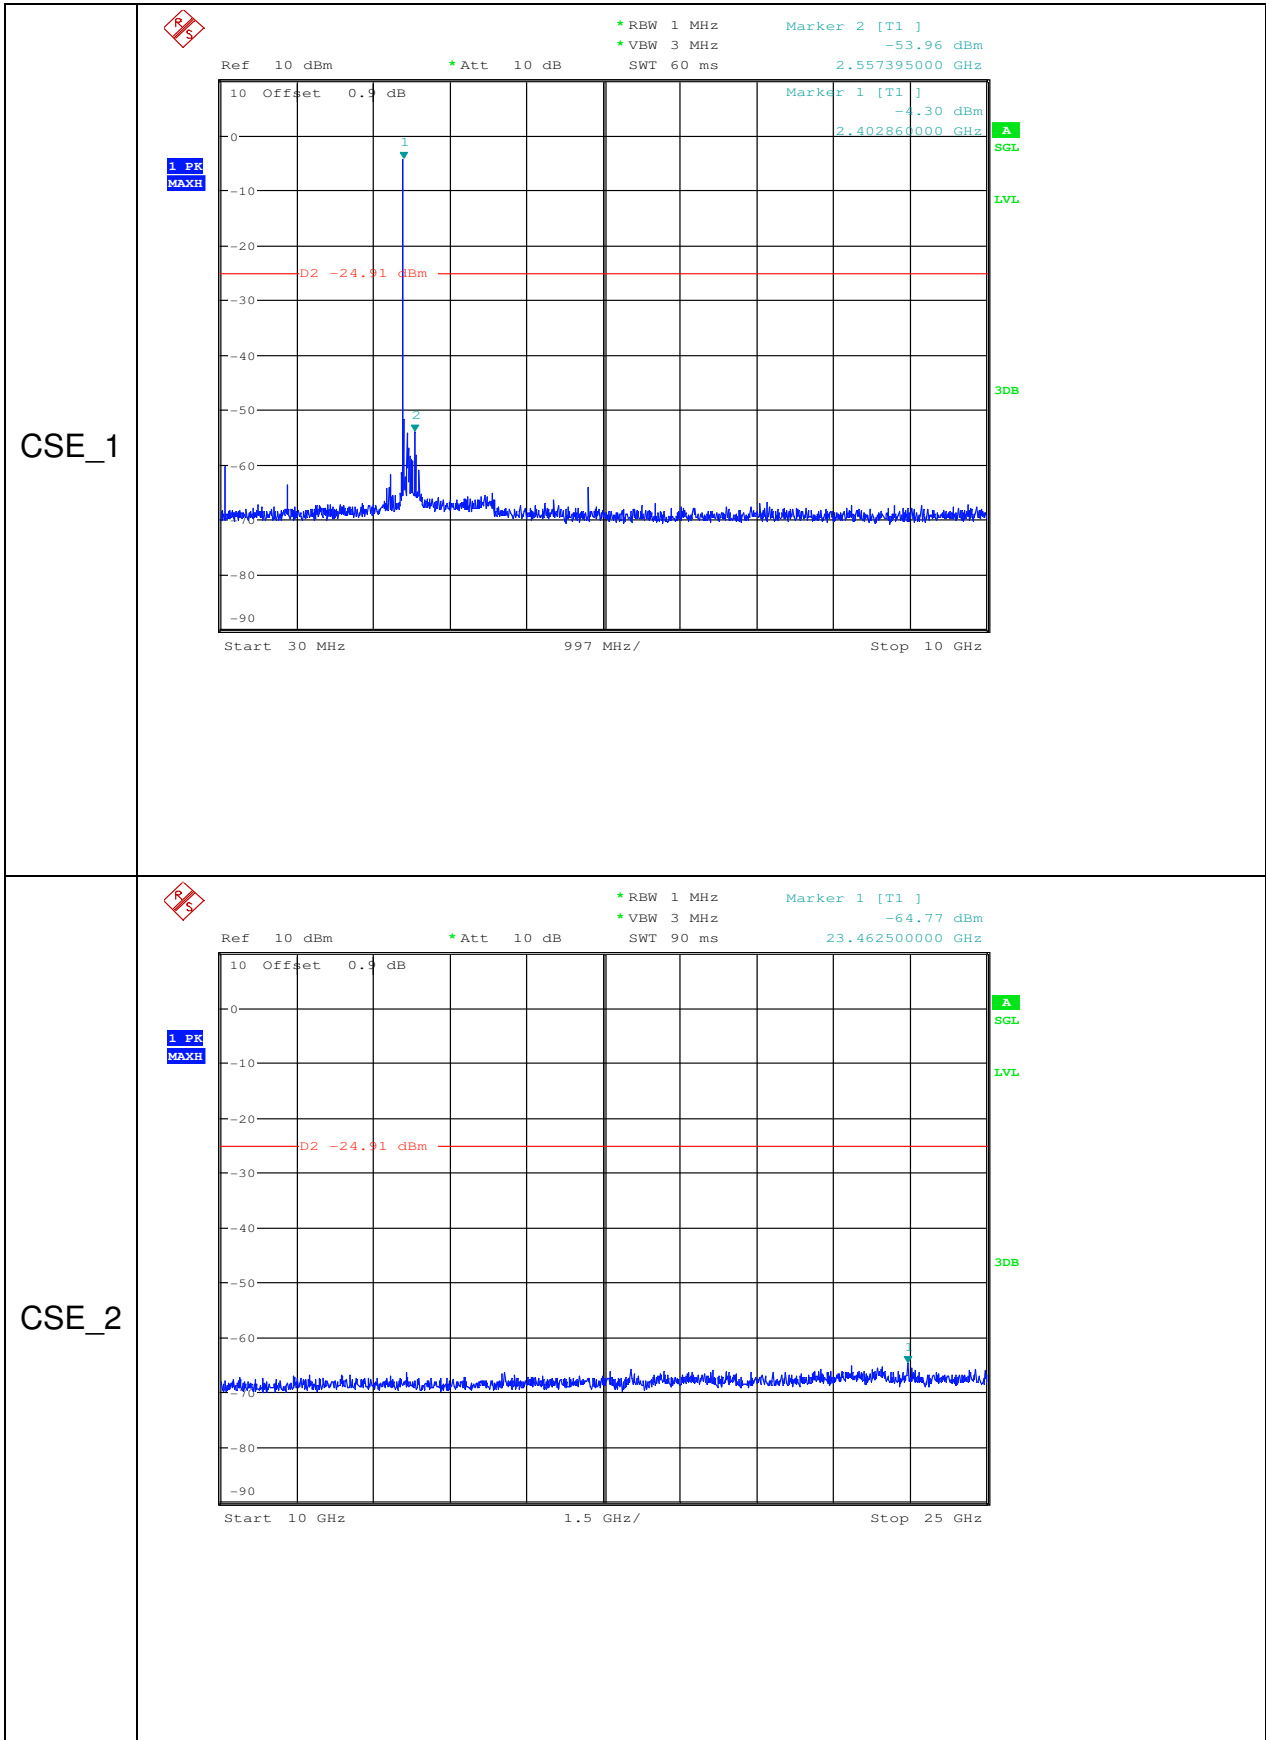


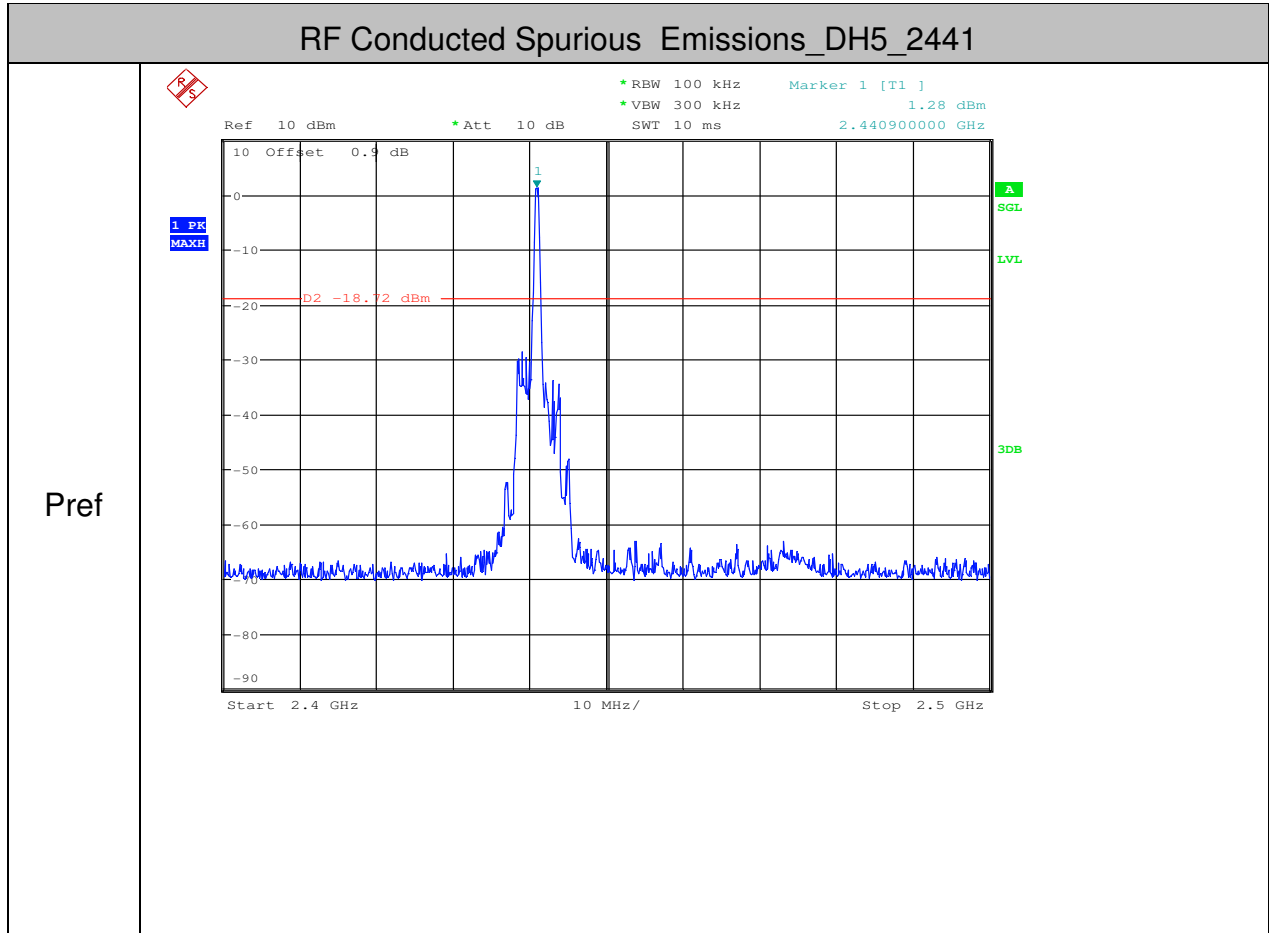


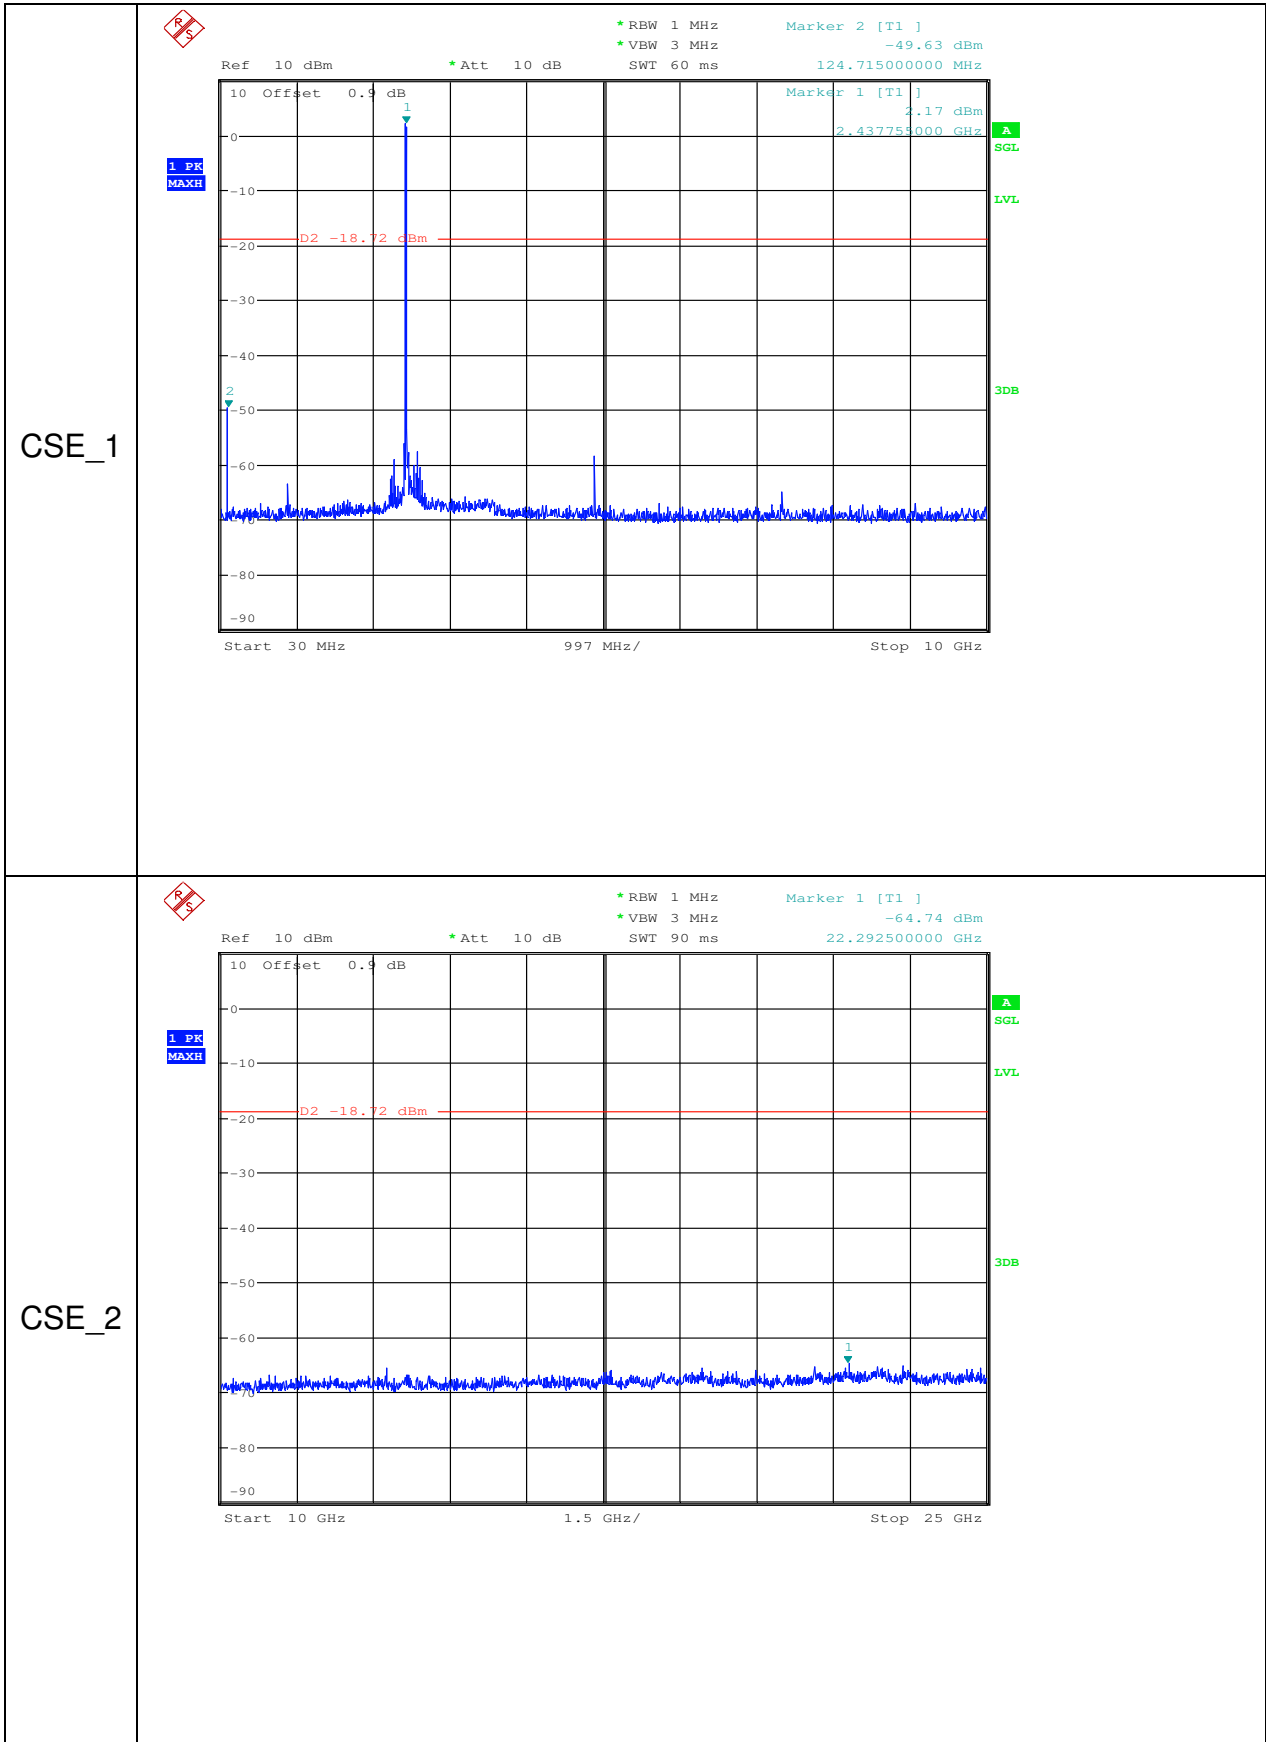


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

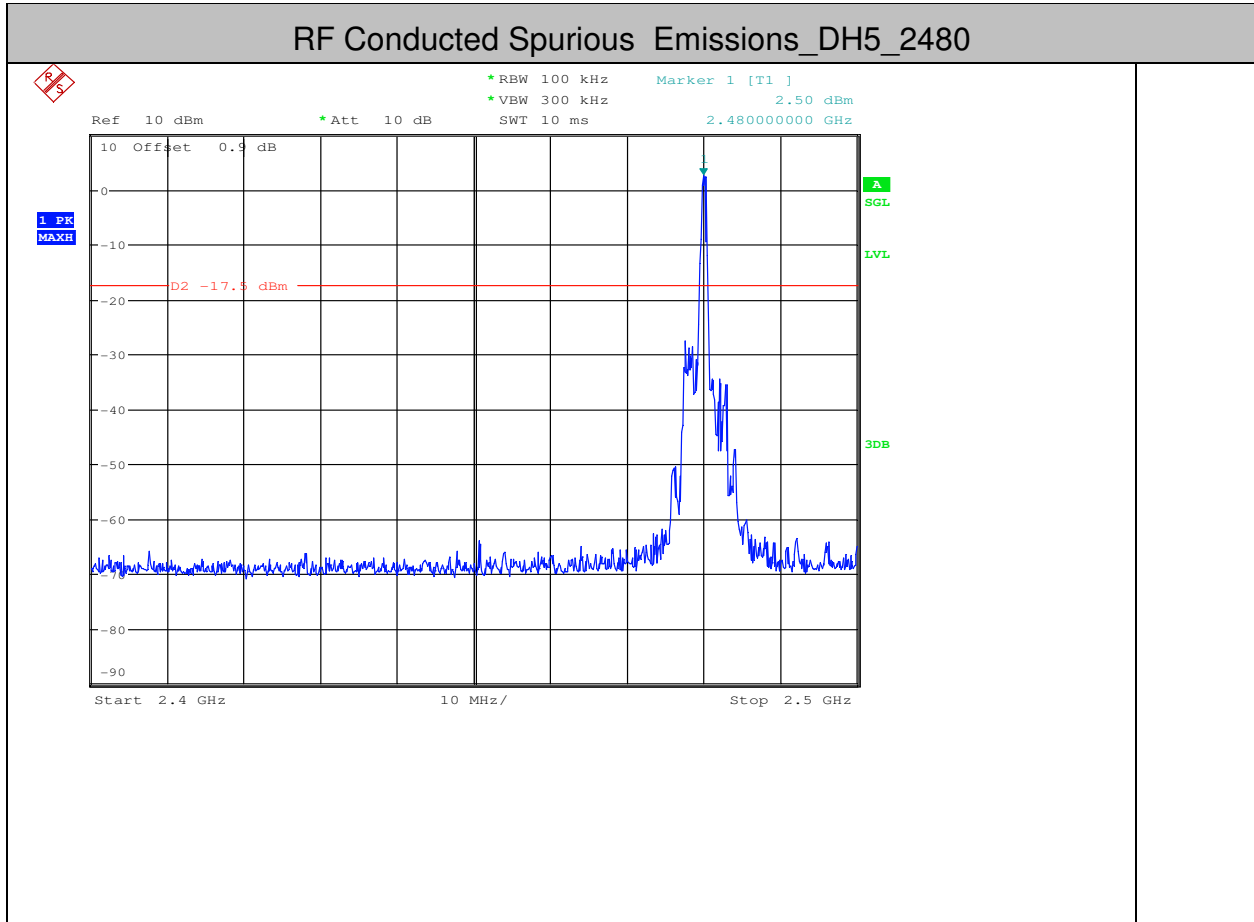


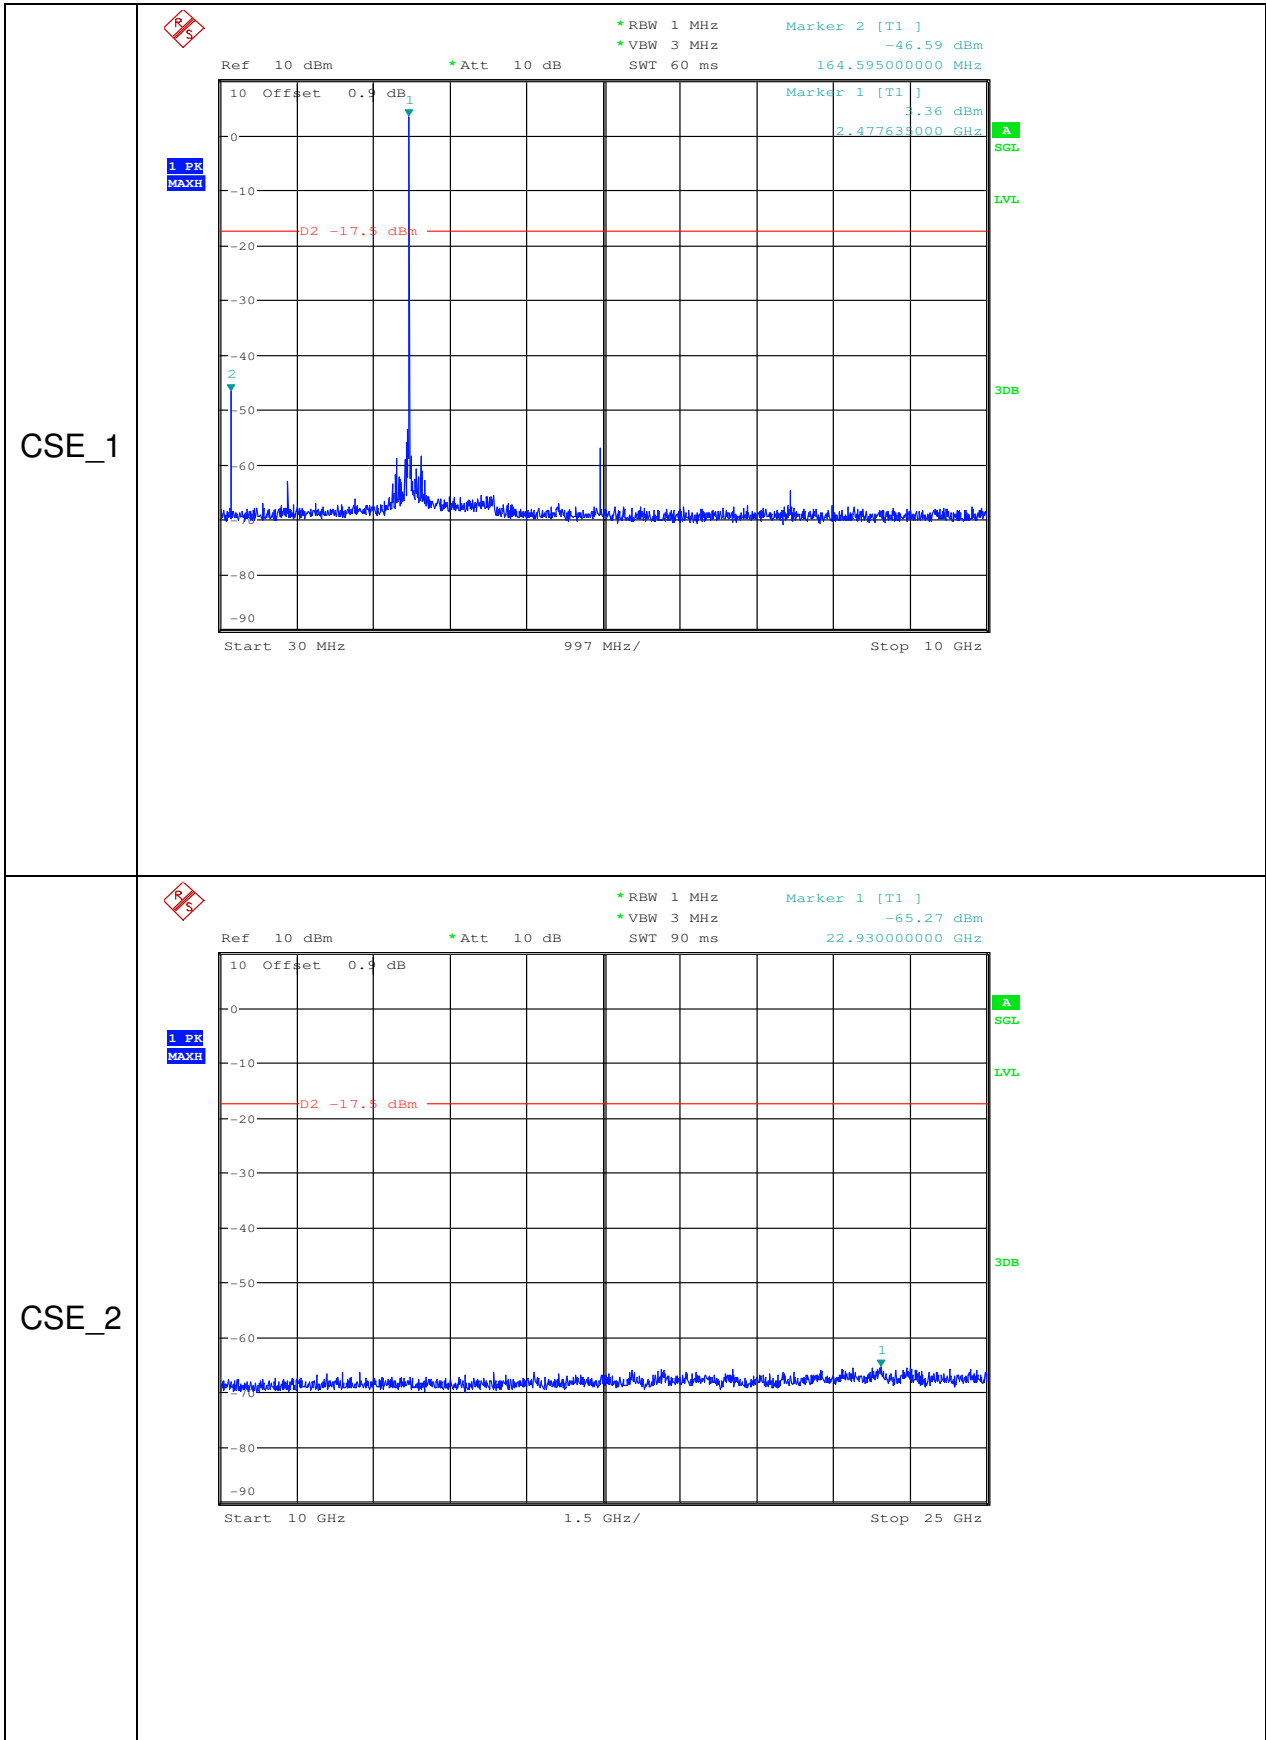


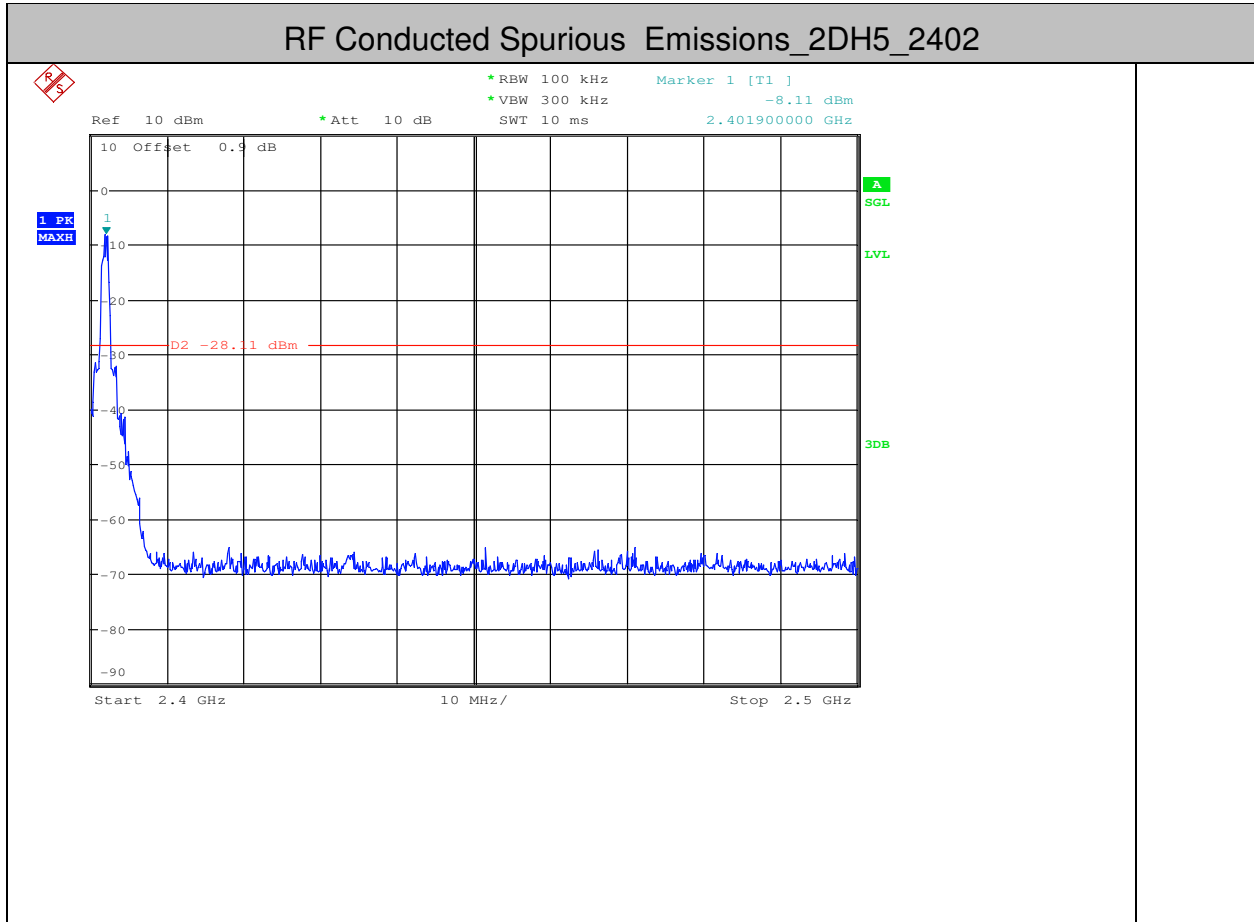


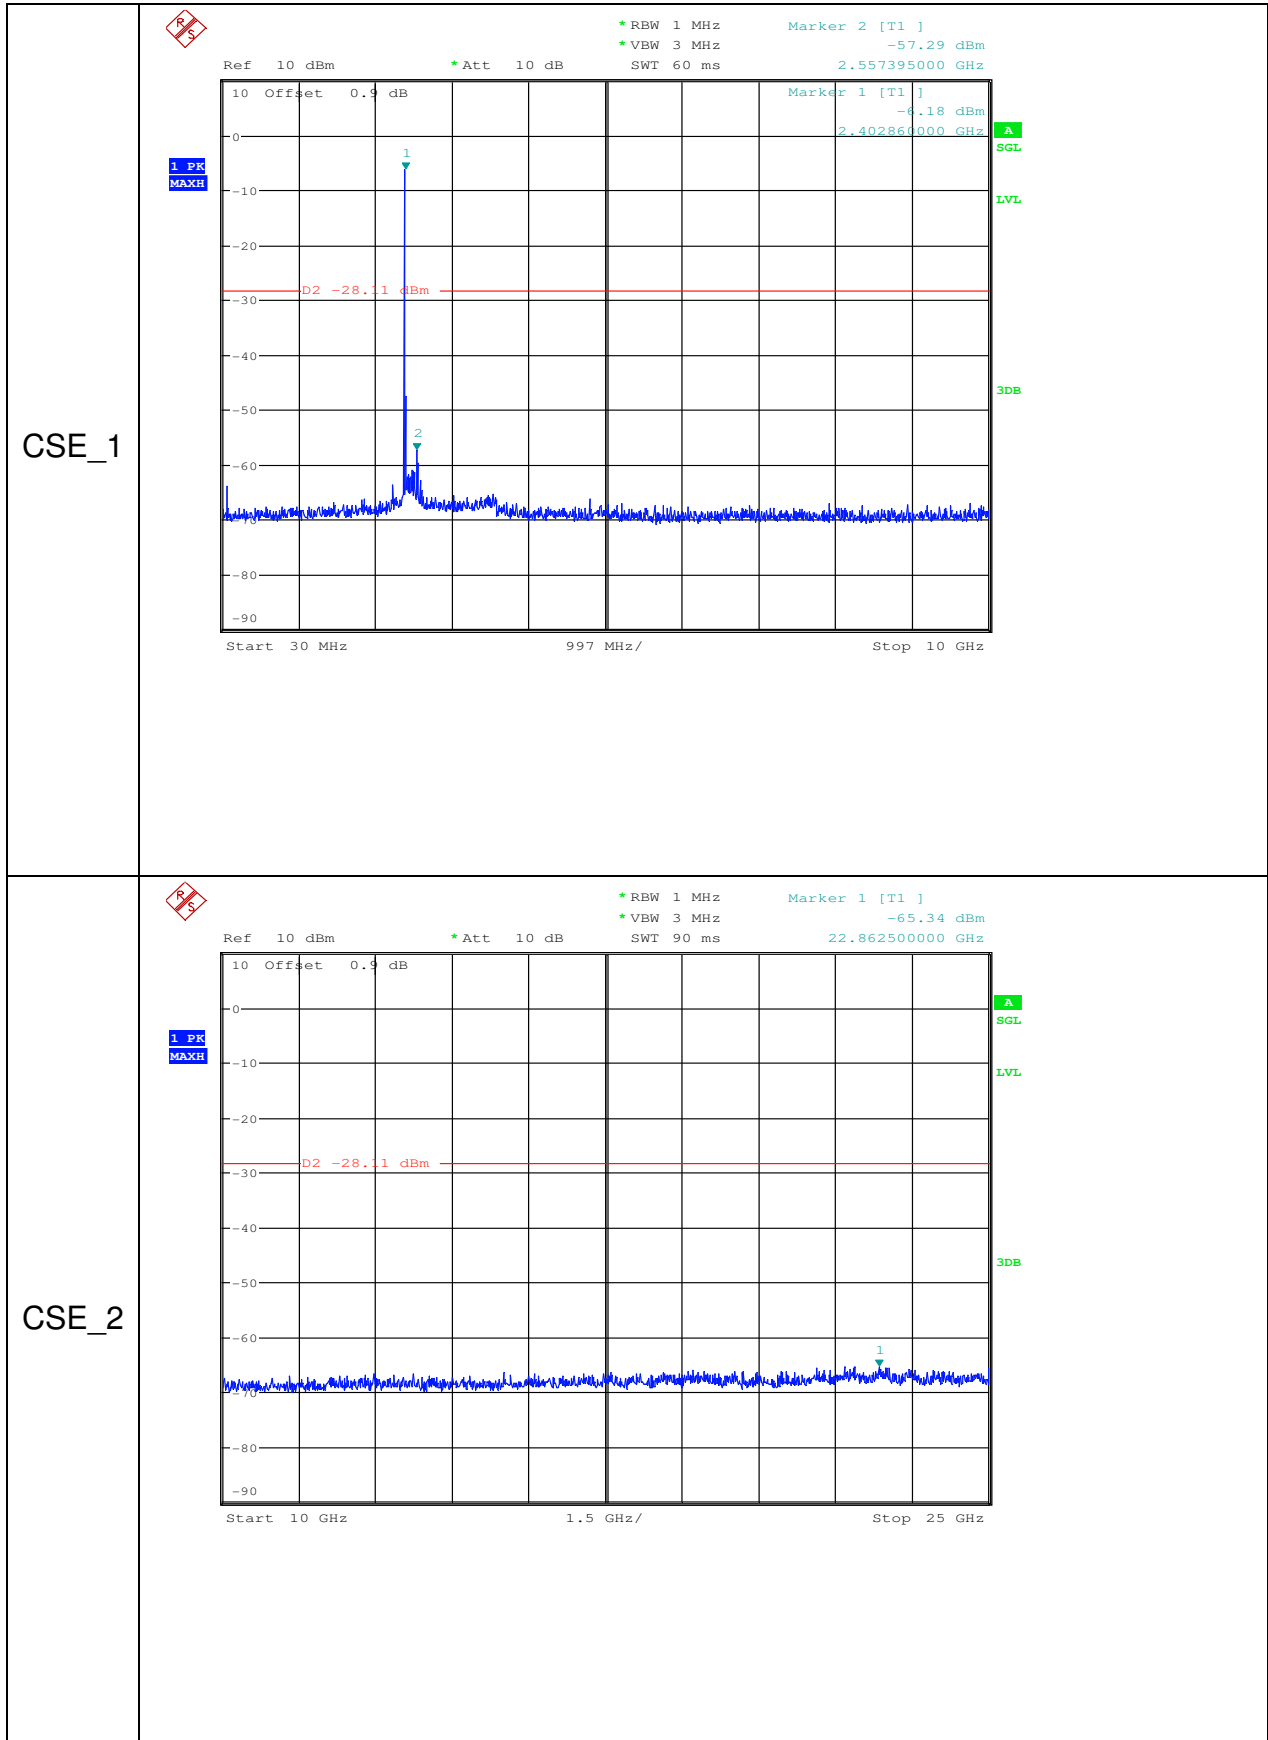



RF Conducted Spurious Emissions_2DH5_2441

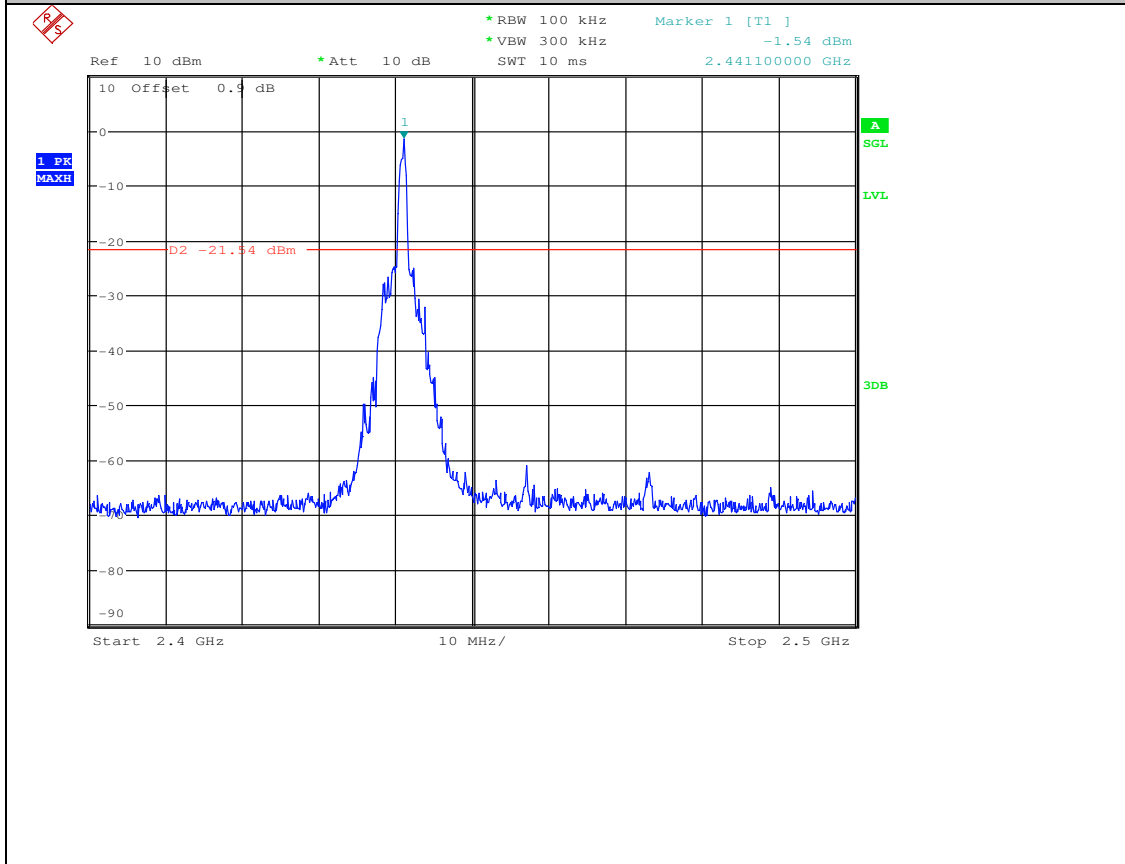

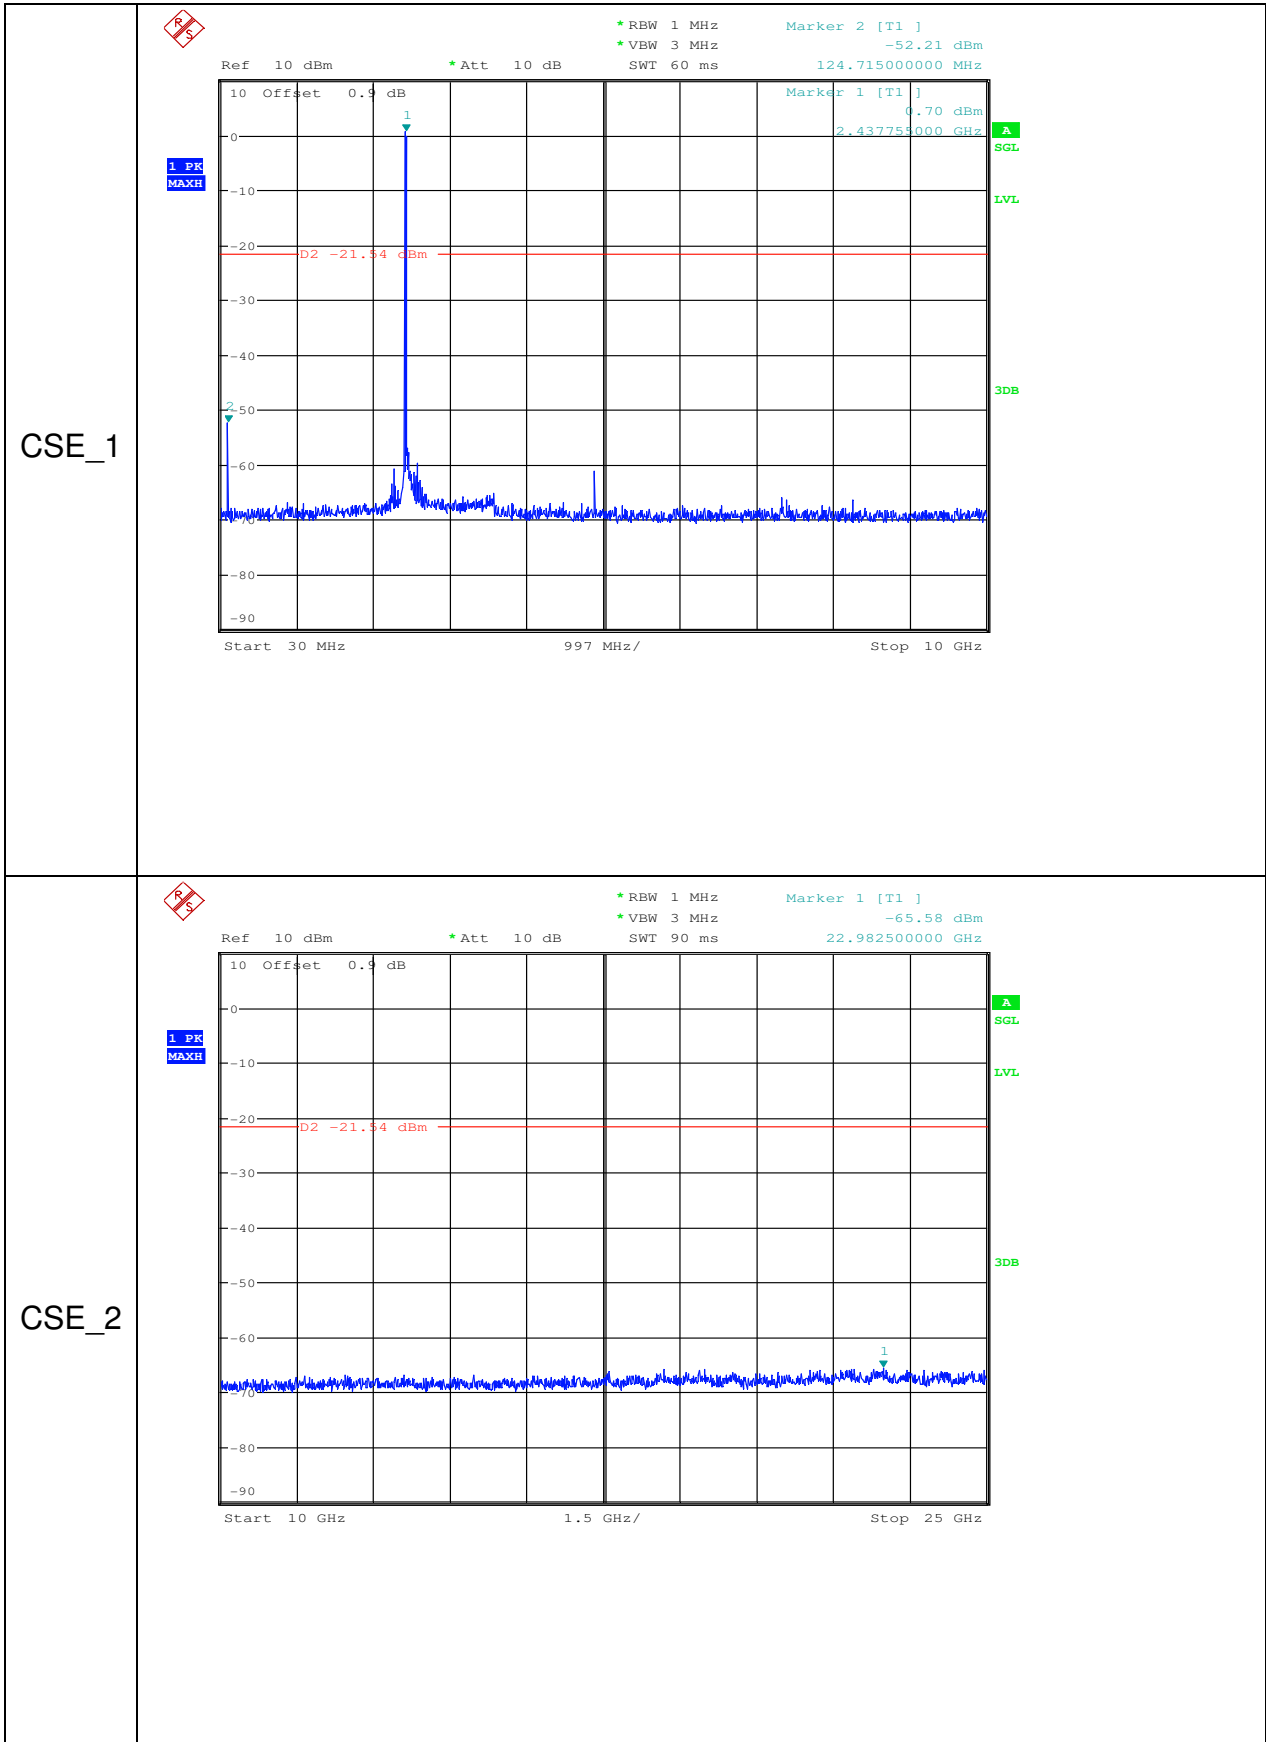


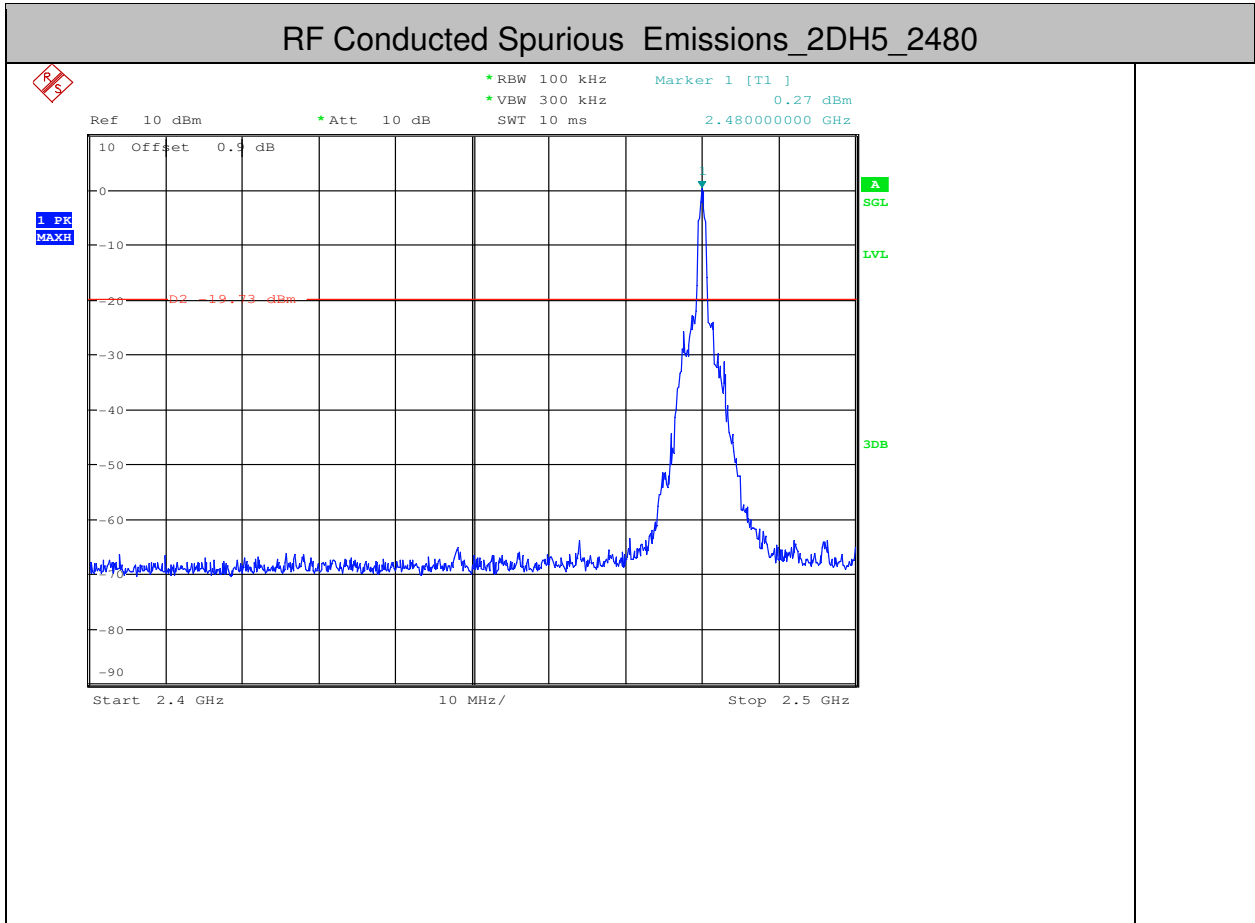

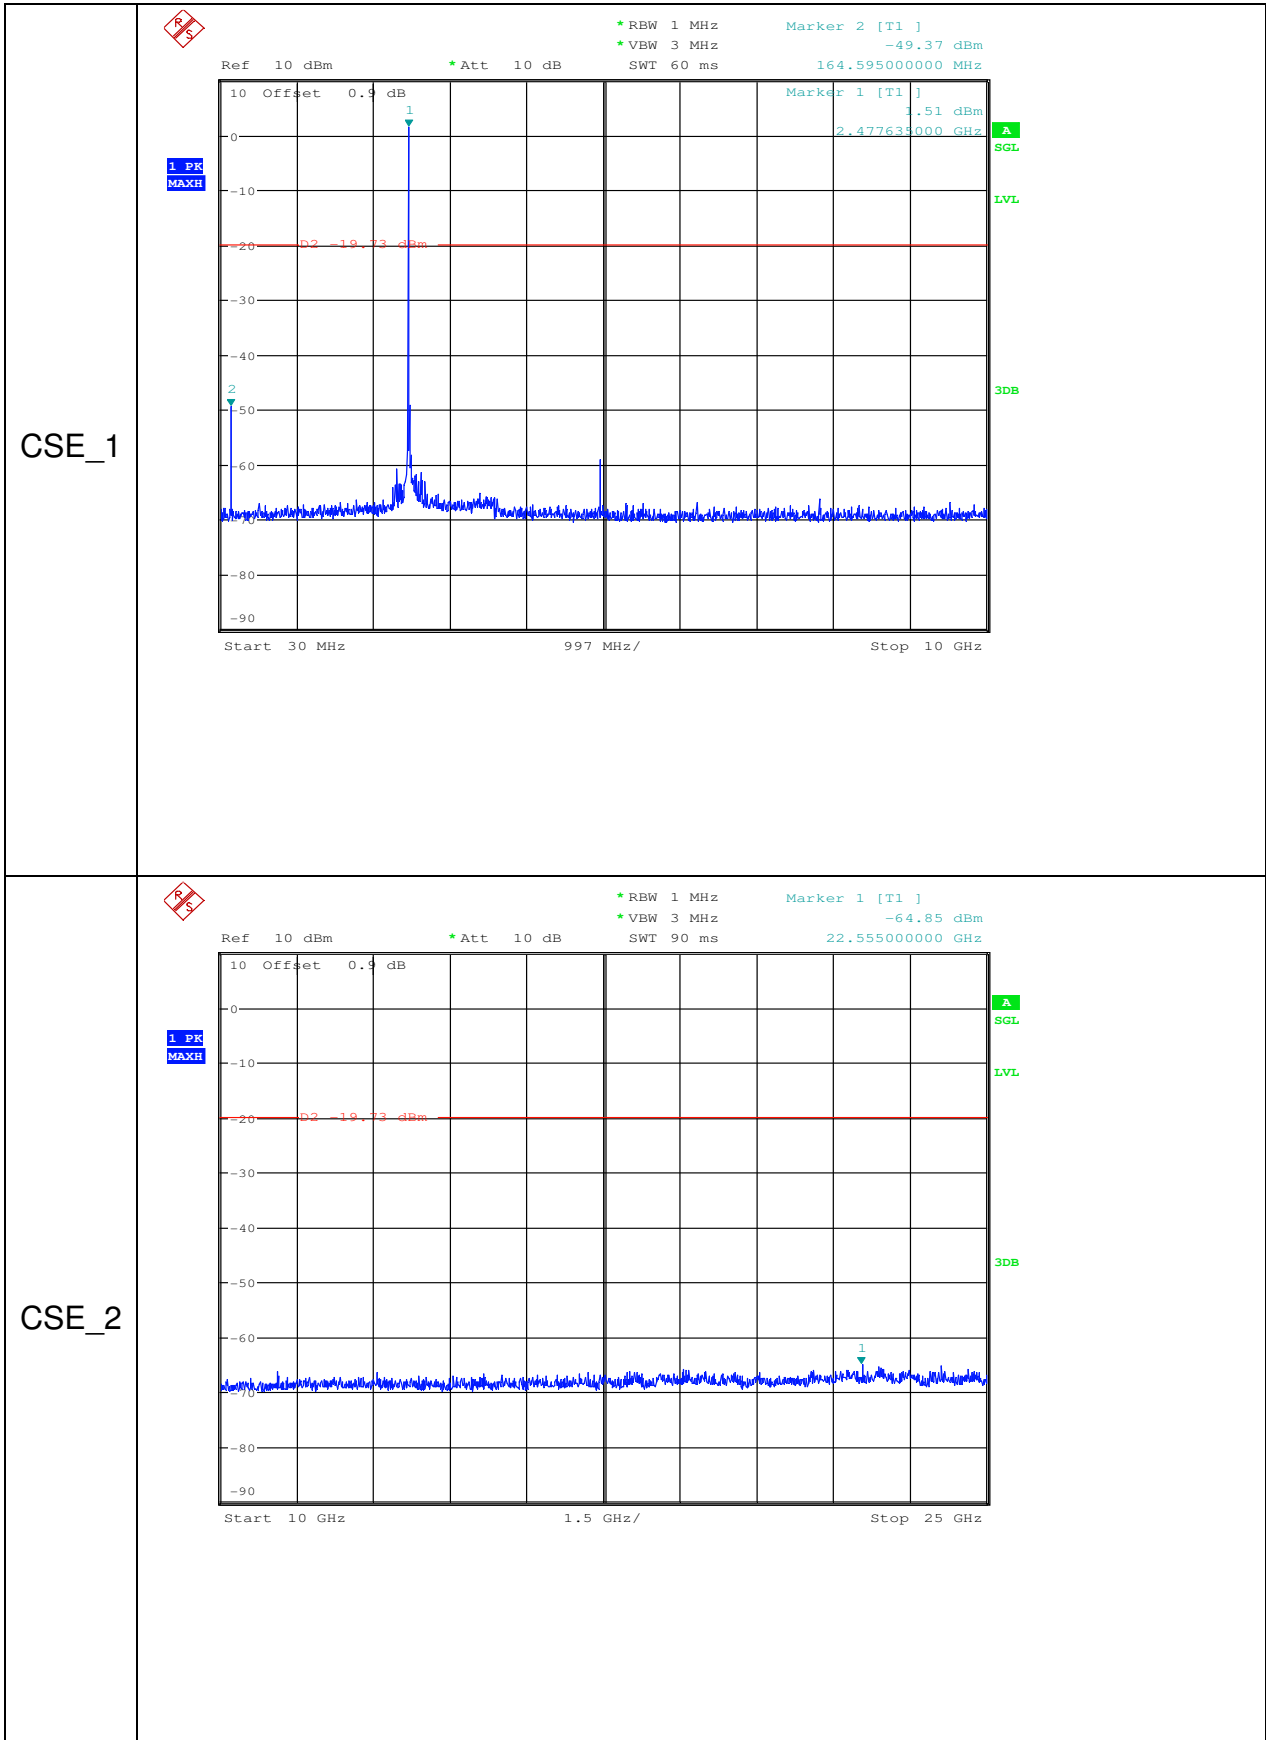


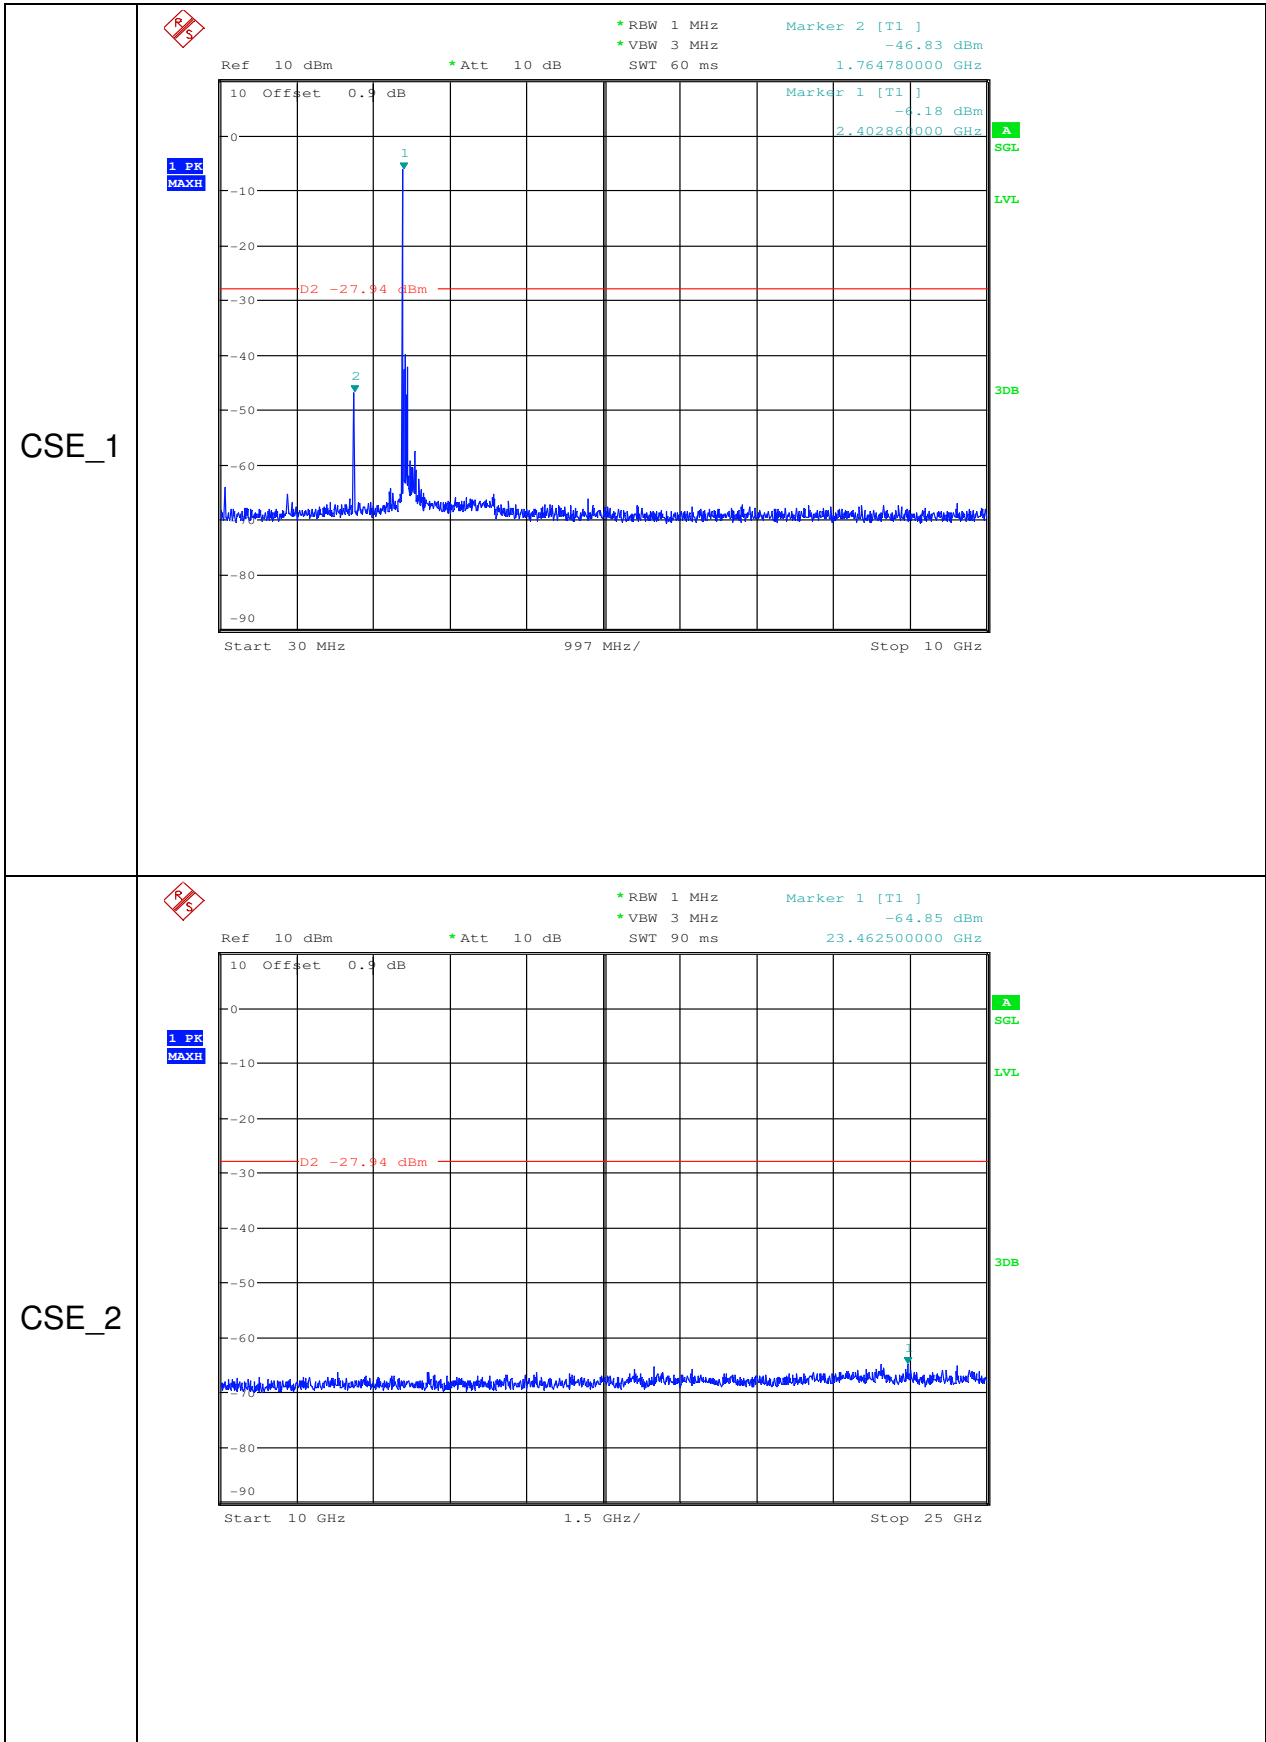


RF Conducted Spurious Emissions_3DH5_2441

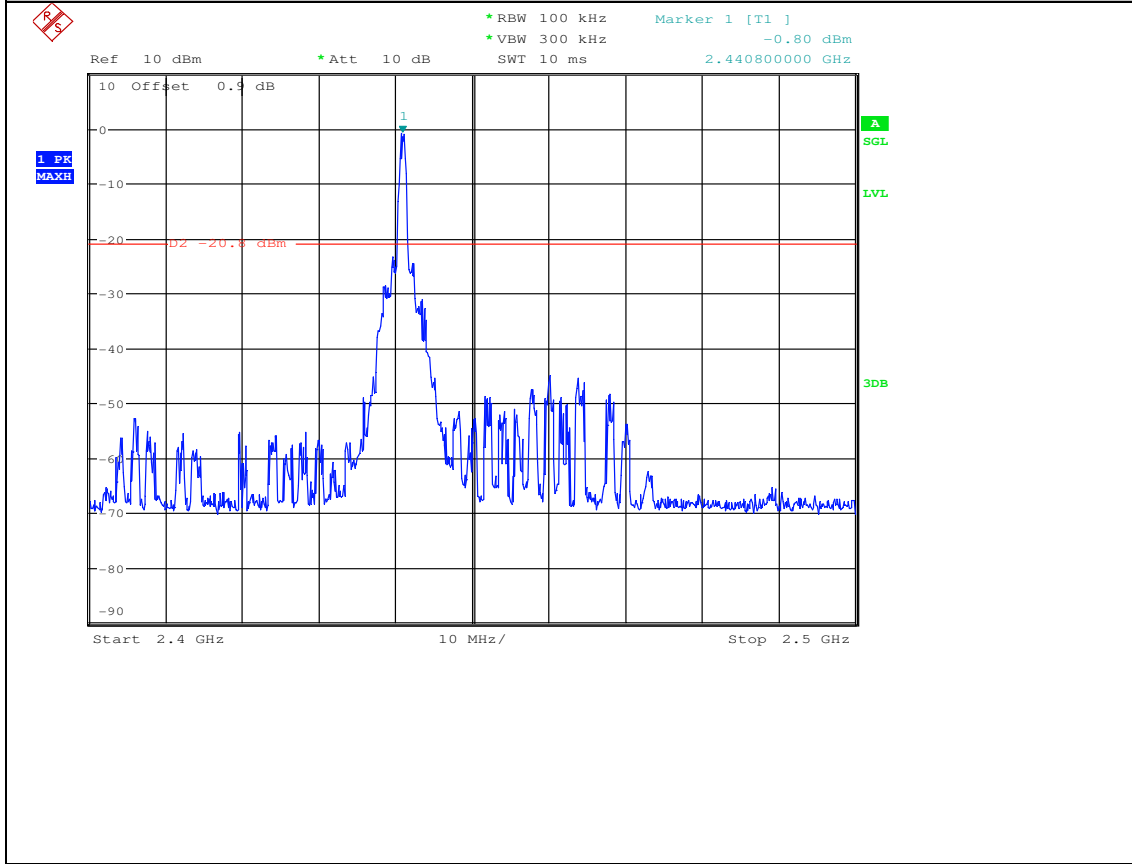

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

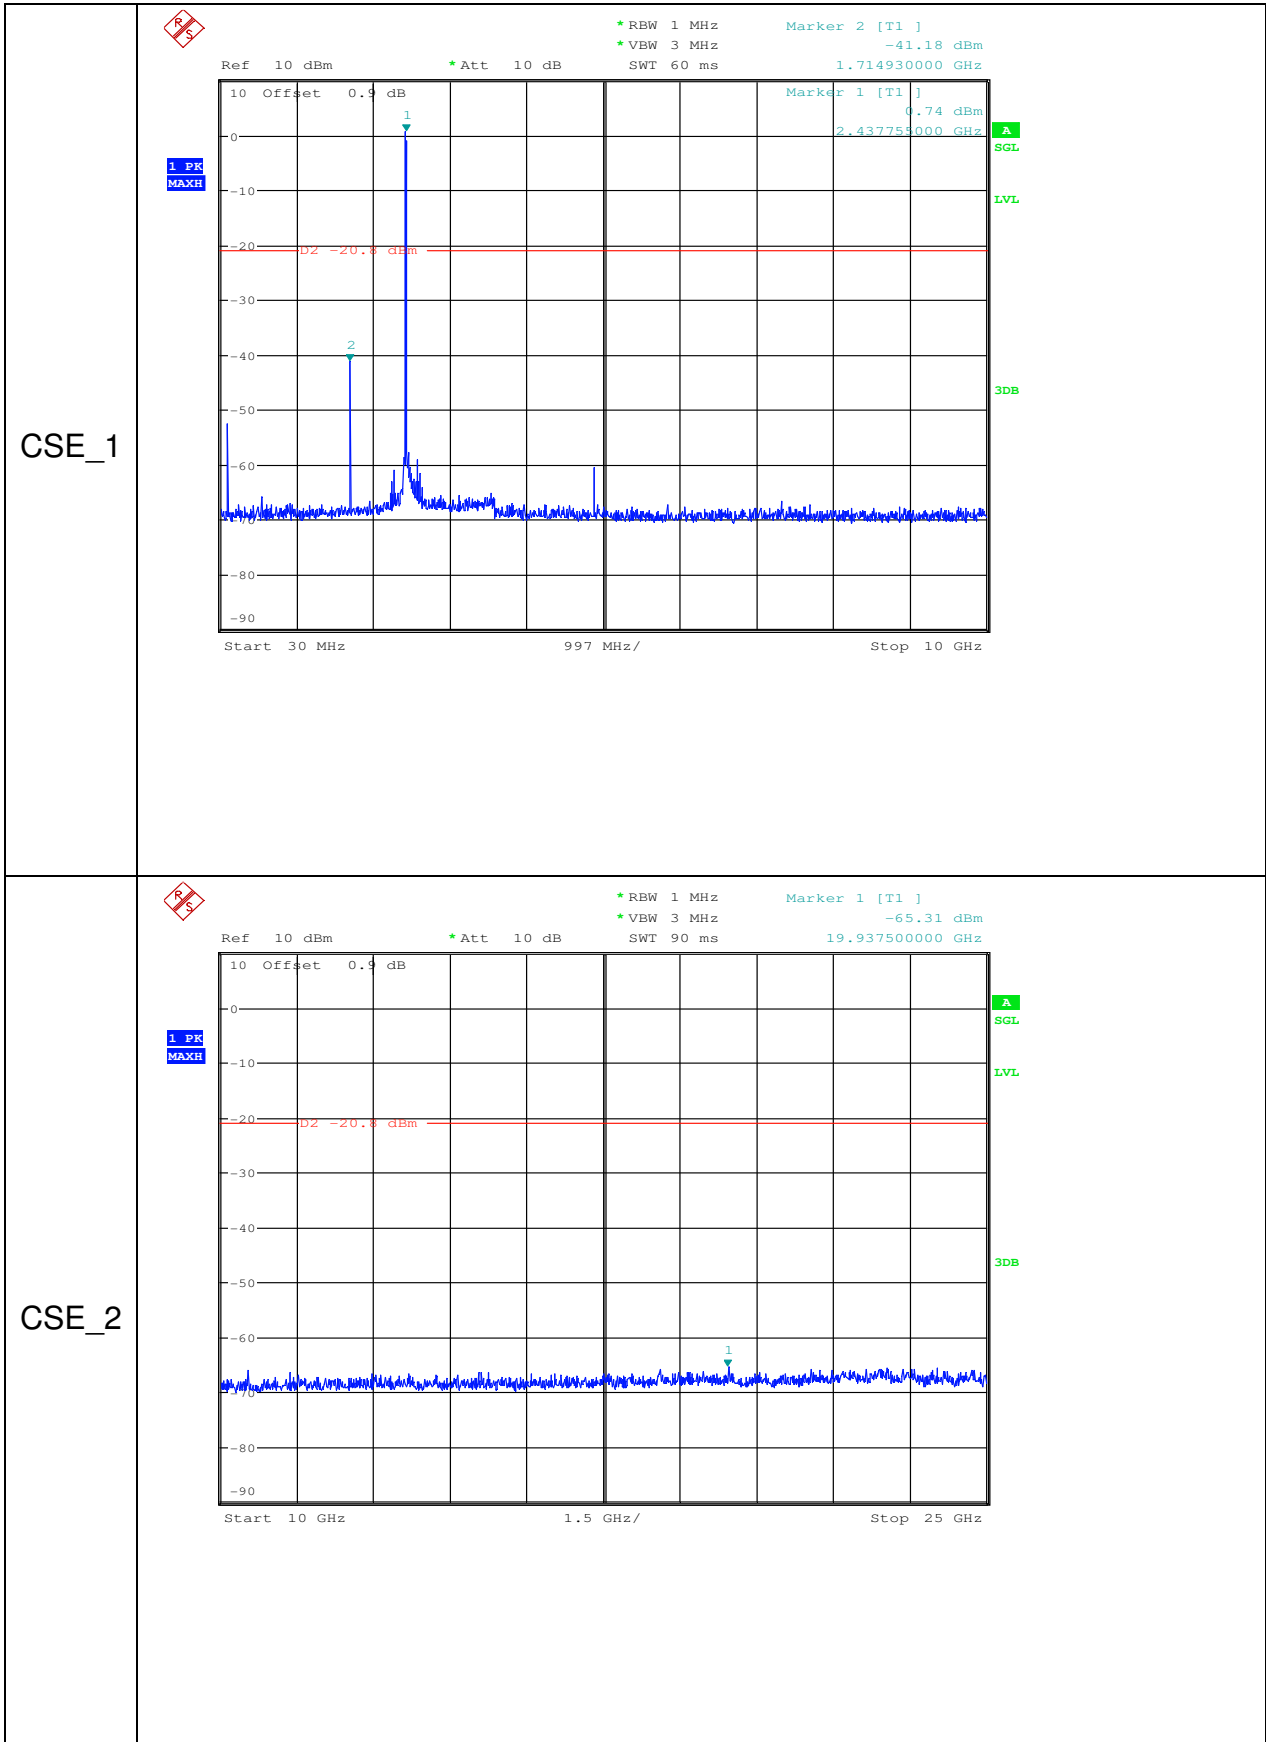

RF Conducted Spurious Emissions_3DH5_2480

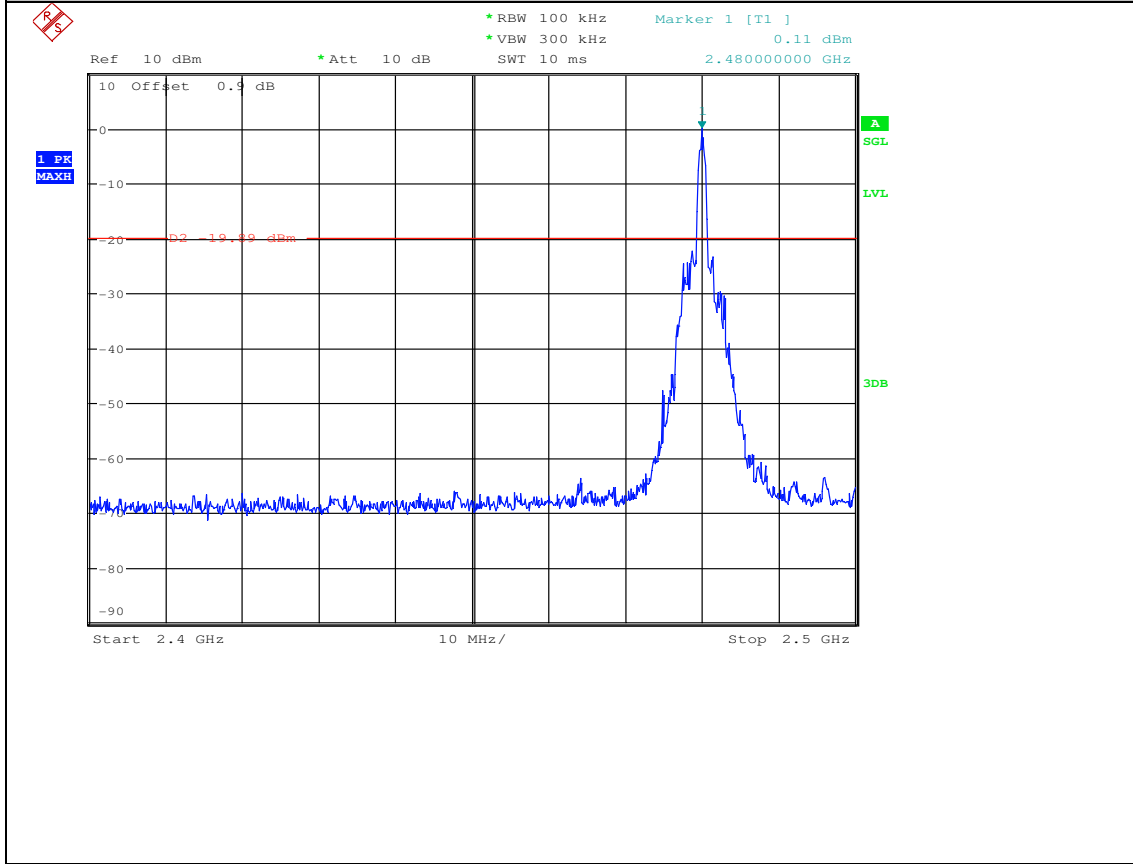

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

