

Report No.: SZEM130600286201

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 74

FCC REPORT

Application No.: SZEM1306002862RF

Applicant: TEAC Corporation

Manufacturer: Dongguan TEAC Electronics CO., Ltd. Factory: Dongguan TEAC Electronics CO., Ltd.

Product Name: BLUETOOTH SPEAKER

Model No.(EUT): MJBTS-1

FCC ID: XEG-MJBTS1

Standards: 47 CFR Part 15, Subpart C (2012)

Date of Receipt: 2013-06-07

Date of Test: 2013-06-28 to 2013-07-03

Date of Issue: 2013-08-19

Test Result: PASS *

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM130600286201

Page: 2 of 74

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS



Report No.: SZEM130600286201

Page: 3 of 74

3 Contents

			Page
1	CC	OVER PAGE	1
2	TE	EST SUMMARY	2
3		ONTENTS	
4		ENERAL INFORMATION	
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF EUT	
	4.3	TEST ENVIRONMENT.	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST LOCATION	
	4.6	TEST FACILITY	7
	4.7	DEVIATION FROM STANDARDS	7
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	7
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
	4.10	EQUIPMENT LIST	8
5	TE	EST RESULTS AND MEASUREMENT DATA	11
	5.1	Antenna Requirement	11
	5.2	CONDUCTED EMISSIONS	12
	5.3	CONDUCTED PEAK OUTPUT POWER	
	5.4	20dB Occupy Bandwidth	
	5.5	CARRIER FREQUENCIES SEPARATION	
	5.6	HOPPING CHANNEL NUMBER	
	5.7	DWELL TIME	
	5.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	5.9	Spurious RF Conducted Emissions	
	5.10	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	
	5.11	RADIATED SPURIOUS EMISSION	
		11.1 Radiated Emission below 1GHz	
		11.2 Transmitter Emission above 1GHz	
	5.12	BAND EDGE (RADIATED EMISSION)	



Report No.: SZEM130600286201

Page: 4 of 74

4 General Information

4.1 Client Information

Applicant:	TEAC Corporation
Address of Applicant:	1-47 Ochiai. Tama-shi, Tokyo, Japan, 206-8530
Manufacturer:	Dongguan TEAC Electronics CO., Ltd.
Address of Manufacturer:	Shang-sha, Chang-an District Dongguan City, Guangdong, P.R.China
Factory:	Dongguan TEAC Electronics CO., Ltd.
Address of Factory:	Shang-sha, Chang-an District Dongguan City, Guangdong, P.R.China

4.2 General Description of EUT

Product Name:	BLUETOOTH SPEAKER
Model No.:	MJBTS-1
Trade Mark:	MUJI
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V2.1+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Fixed production
Test Power Grade:	N/A (manufacturer declare)
Test Software of EUT:	Bluetest 3 (manufacturer declare)
Antenna Type	Integral
Antenna Gain	0dBi
Power Supply:	MODEL:GPE248-120200-Z
	INPUT:100-240V~50/60Hz 0.75A
	OUTPUT:12V === 2000mA 24W
Test Voltage:	AC 120V~ 60Hz
Adapter DC Cable:	145cm unshielded wire
EUT DC Cable:	225cm unshielded wire
FM Antenna:	125cm unshielded wire



Report No.: SZEM130600286201

Page: 5 of 74

Operation I	Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency	
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz	
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz	
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz	
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz	
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz	
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz	
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz	
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz	
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz	
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz	
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz	
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz	
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz	
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz	
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz	
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz	
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz	
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz	
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz	
20	2421MHz	40	2441MHz	60	2461MHz			

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency		
The Lowest channel	2402MHz		
The Middle channel	2441MHz		
The Highest channel	2480MHz		



Report No.: SZEM130600286201

Page: 6 of 74

4.3 Test Environment

Operating Environment	
Temperature:	24.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1000 mbar

4.4 Description of Support Units

The EUT has been tested independent unit.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM130600286201

Page: 7 of 74

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

• Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.



Report No.: SZEM130600286201

Page: 8 of 74

4.10 Equipment List

	Conducted Emission	n			
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2014-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2013-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2014-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2013-11-10
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2013-11-10
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2013-11-10
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2014-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2014-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24





Report No.: SZEM130600286201

Page: 9 of 74

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2014-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2014-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2014-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2014-05-59
10	Coaxial cable	SGS	N/A	SEL0189	2014-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2014-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
13	Band filter	Amindeon	82346	SEL0094	2014-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2014-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2014-06-04



Report No.: SZEM130600286201

Page: 10 of 74

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2013-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2014-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2014-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2014-05-16
8	Band filter	amideon	82346	SEL0094	2014-05-16
9	POWER METER	R&S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2014-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM130600286201

Page: 11 of 74

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.

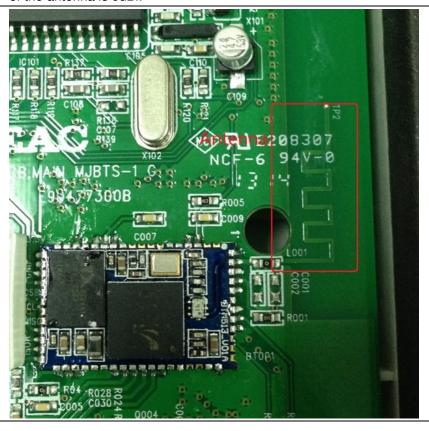



Report No.: SZEM130600286201

Page: 12 of 74


5.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.2	207		
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Fraguenov rango (MUZ)	Limit (dBuV)		
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		•
Test Procedure:	 The mains terminal disturtions room. 	bance voltage test was	s conducted in a shie	elded
	 The EUT was connected to Impedance Stabilization N impedance. The power cal connected to a second LIS reference plane in the sam measured. A multiple sock power cables to a single L exceeded. The tabletop EUT was place ground reference plane. A placed on the horizontal ground reference plane. A placed on the horizontal ground reference preference plane. The LISN unit under test and bonded mounted on top of the ground between the closest points the EUT and associated exceptions. In order to find the maximule equipment and all of the in ANSI C63.10: 2009 on corr 	etwork) which provides oles of all other units of SN 2, which was bonder he way as the LISN 1 for et outlet strip was used ISN provided the rating ced upon a non-metallic and for floor-standing arround reference plane, th a vertical ground reference plane was bonded to the 1 was placed 0.8 m from the vertical ground reference und reference plane. The of the LISN 1 and the quipment was at least 0 am emission, the relative terface cables must be	is a 50Ω/50μH + 5Ω line is the EUT were do not the ground for the unit being do to connect multiple of the LISN was not do table 0.8m above the trangement, the EUT derence plane. The red reference plane. The ehorizontal ground for the boundary of the plane for LISNs his distance was EUT. All other units of the positions of	ne was ear ne he of 2.



Report No.: SZEM130600286201

Page: 13 of 74

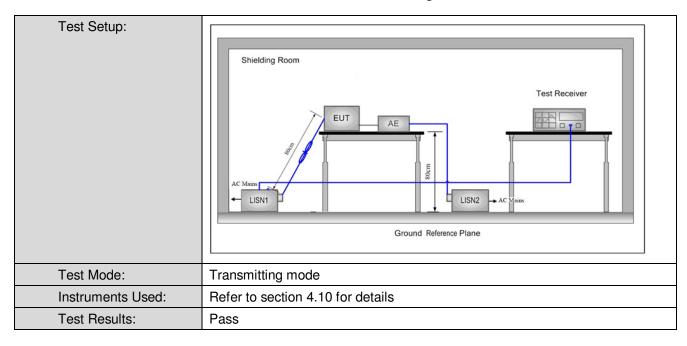



Report No.: SZEM130600286201


Page: 14 of 74

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

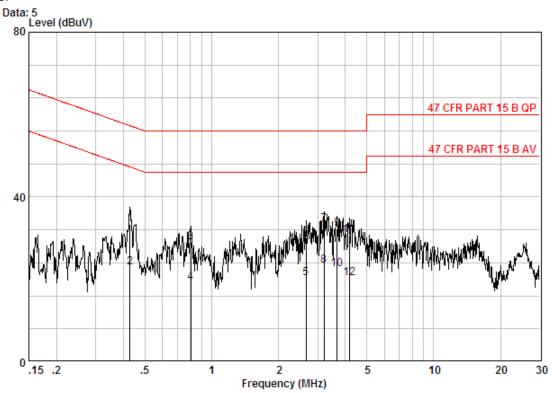

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE LINE

Job No. : 2862RF Test mode : TX


Cot mode									
		Freq	Cable Loss	LISN Factor	Read Level		Limit Line	Over Limit	Remark
	-	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1		0.42825	0.01	9.80	23.60	33.41	57.29	-23.87	QP
2		0.42825	0.01	9.80	13.16	22.97	47.29	-24.32	Average
3		0.80448	0.02	9.80	19.11	28.93	56.00	-27.07	QP
4		0.80448	0.02	9.80	9.42	19.24	46.00	-26.76	Average
5		2.664	0.02	9.83	10.43	20.28	46.00	-25.72	Average
6		2.664	0.02	9.83	20.28	30.13	56.00	-25.87	QP
7		3.207	0.02	9.85	23.59	33.46	56.00	-22.54	QP
8		3.207	0.02	9.85	13.42	23.29	46.00	-22.71	Average
9		3.681	0.02	9.87	22.46	32.35	56.00	-23.65	QP
10		3.681	0.02	9.87	12.47	22.35	46.00	-23.65	Average
11		4.158	0.01	9.88	20.90	30.79	56.00	-25.21	QP
12		4.158	0.01	9.88	10.43	20.32	46.00	-25.68	Average



Report No.: SZEM130600286201

Page: 15 of 74

Neutral line:

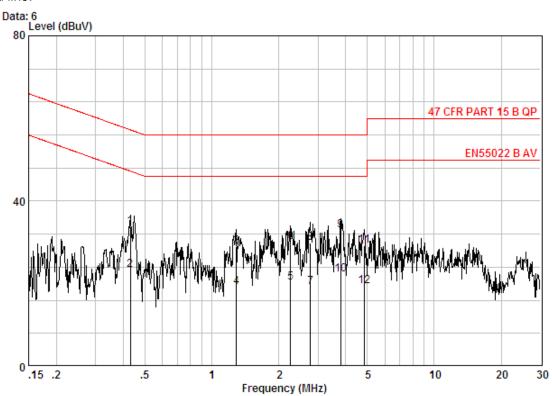

Site : Shielding Room

Condition : 47 CFR PART 15 B QP CE NEUTRAL

Job No. : 2862RF Test mode : TX

	Frea	Cable	LISN Factor	Read Level	Level	Limit Line	Over	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.43052	0.01	9.80	23.88	33.69	57.24	-23.55	OP
2	0.43052				23.23			Average
3	1.289	0.02	9.80	19.26	29.08	56.00	-26.92	QP
4	1.289	0.02	9.80	9.41	19.23	46.00	-26.77	Average
5	2.261	0.02	9.81	10.43	20.26	46.00	-25.74	Average
6	2.261	0.02	9.81	20.15	29.99	56.00	-26.01	QP
7	2.779	0.02	9.84	9.42	19.28	46.00	-26.72	Average
8	2.779	0.02	9.84	19.95	29.80	56.00	-26.20	QP
9	3.799	0.02	9.87	22.95	32.83	56.00	-23.17	QP
10	3.799	0.02	9.87	12.42	22.31	46.00	-23.69	Average
11	4.848	0.01	9.90	19.29	29.19	56.00	-26.81	QP
12	4.848	0.01	9.90	9.42	19.33	46.00	-26.67	Average

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM130600286201

Page: 16 of 74

5.3 Conducted Peak Output Power

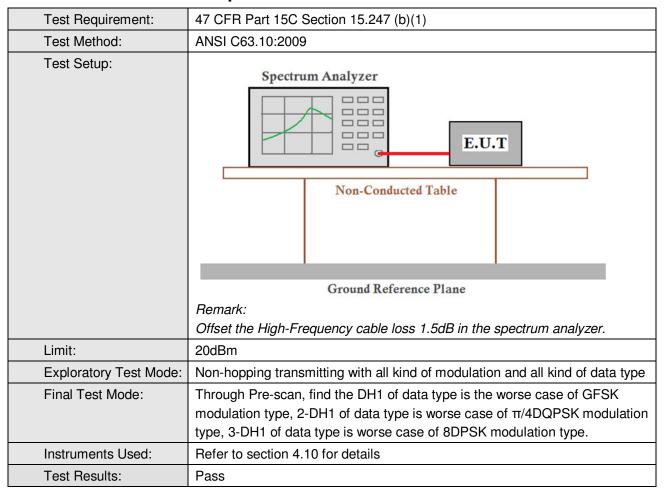

Measurement Data

	GFSK mode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	1.11	20.00	Pass		
Middle	0.78	20.00	Pass		
Highest	-0.87	20.00	Pass		
	π/4DQPSK m	ode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	0.29	20.00	Pass		
Middle	-0.41	20.00	Pass		
Highest	-1.97	20.00	Pass		
	8DPSK mod	de			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	0.47	20.00	Pass		
Middle	-0.20	20.00	Pass		
Highest	-1.91	20.00	Pass		




Report No.: SZEM130600286201


Page: 17 of 74

Test plot as follows:

Test mode: GFSK	Test channel:	Lowest
-----------------	---------------	--------

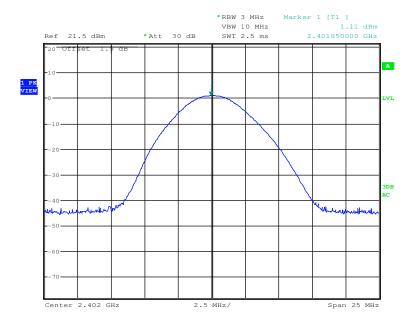



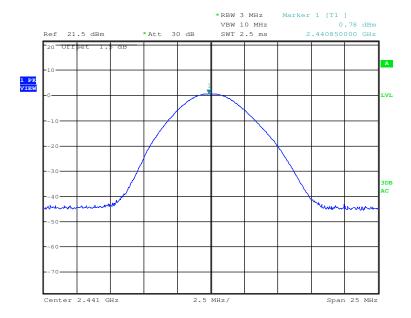


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sqs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sqs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130600286201

Page: 18 of 74

Test mode: GFSK Test channel: Highest

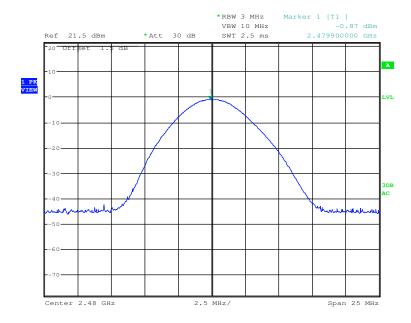

Toot mode.	T/4DODCK	Toot channels	Lowest
l est mode:	π/4DQPSK	l est channel:	Lowest

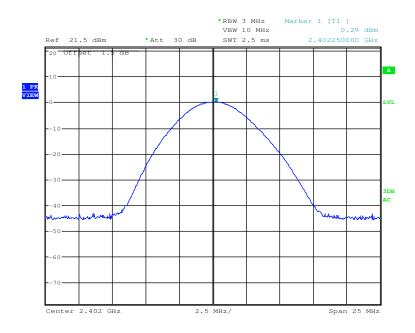







Report No.: SZEM130600286201

Page: 19 of 74

Test mode: π/4DQPSK Test channel: Middle

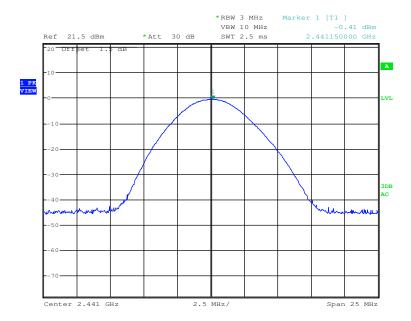



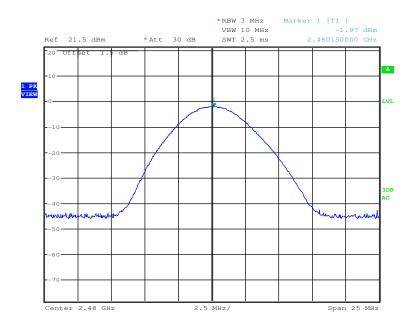





Report No.: SZEM130600286201

Page: 20 of 74

Test mode: 8DPSK Test channel: Lowest

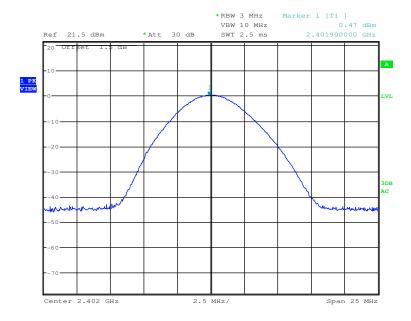



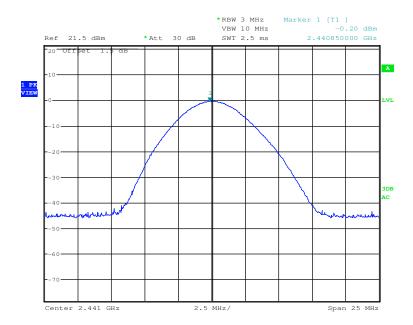




Report No.: SZEM130600286201

Page: 21 of 74

Test mode: 8DPSK Test channel: Highest

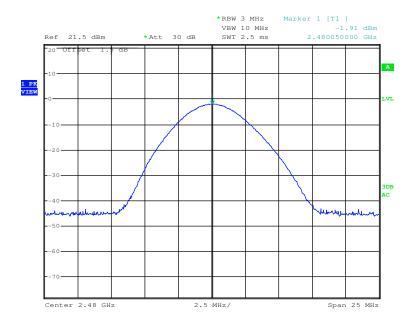


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130600286201

Page: 22 of 74

5.4 20dB Occupy Bandwidth

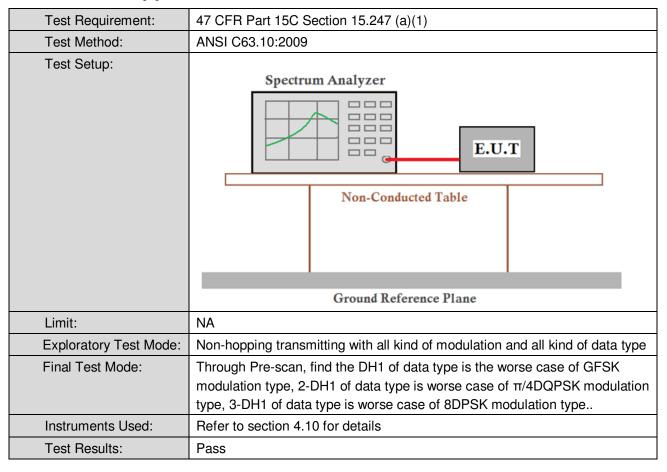

Measurement Data

Toot channel	2	0dB Occupy Bandwidth (kHz)		
Test channel	GFSK	π/4DQPSK	8DPSK	
Lowest	798	1212	1218	
Middle	792	1218	1212	
Highest	792	1218	1224	

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130600286201


Page: 23 of 74

Test plot as follows:

Test mode: GFSK Test channel: Lowest

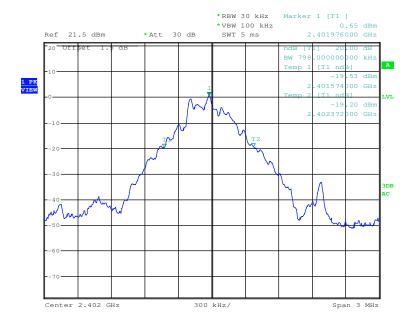



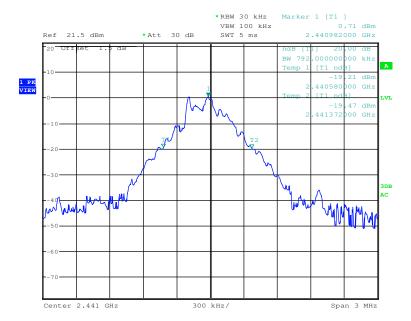


b




Report No.: SZEM130600286201

Page: 24 of 74

Test mode: GFSK Test channel: Highest

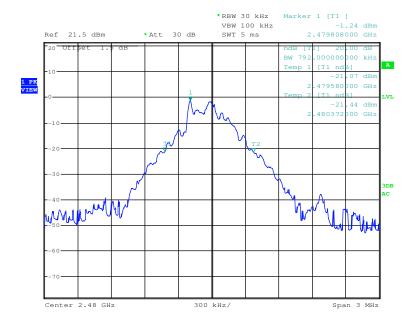



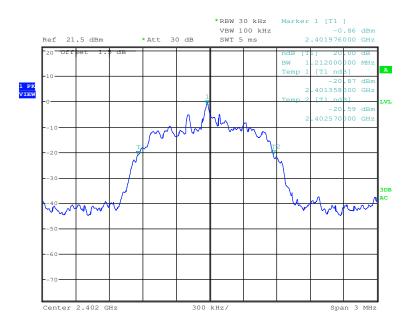





Report No.: SZEM130600286201

Page: 25 of 74

Test mode: π/4DQPSK Test channel: Middle

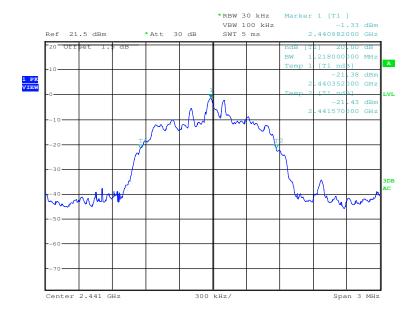

Test mode: π/4DQPSK Test channel: Highest

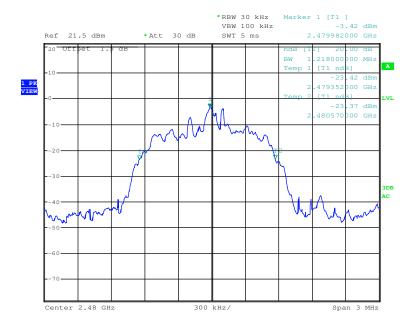





Report No.: SZEM130600286201

Page: 26 of 74

Test mode: 8DPSK Test channel: Lowest

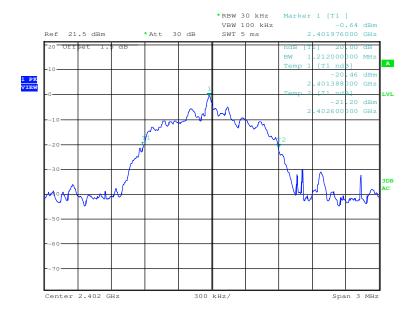

Test mode:	8DPSK	Test channel:	Middle

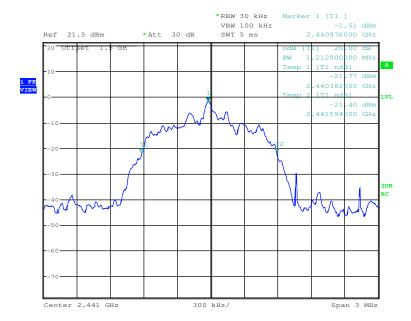


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130600286201

Page: 27 of 74

Test mode: 8DPSK Test channel: Highest

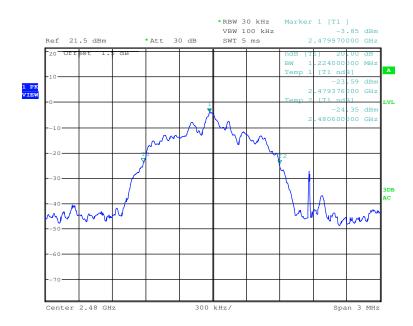



Report No.: SZEM130600286201

Page: 28 of 74

5.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2009		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)		
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of π/4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.		
Instruments Used:	Refer to section 4.10 for details		
Test Results:	Pass		





Report No.: SZEM130600286201

Page: 29 of 74

Measurement Data

	GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result	
Lowest	1005	≥816	Pass	
Middle	1000	≥816	Pass	
Highest	1000	≥816	Pass	
	π/4DQPSK m	node		
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result	
Lowest	1005	≥816	Pass	
Middle	1005	≥816	Pass	
Highest	1000	≥816	Pass	
	8DPSK mo	de		
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result	
Lowest	1005	≥816	Pass	
Middle	1005	≥816	Pass	
Highest	1005	≥816	Pass	

Note: According to section 5.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	798	532
π/4DQPSK	1218	812
8DPSK	1224	816




Report No.: SZEM130600286201


Page: 30 of 74

Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest

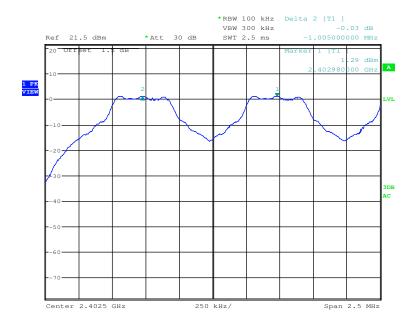

	0=01/		
lest mode:	GFSK	lest channel:	Middle

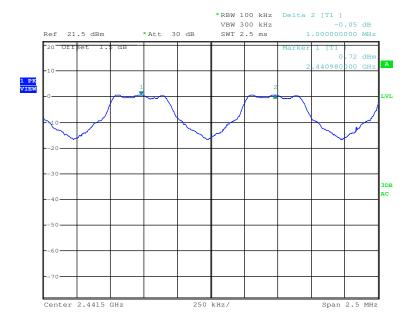


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130600286201

Page: 31 of 74

Test mode: GFSK Test channel: Highest

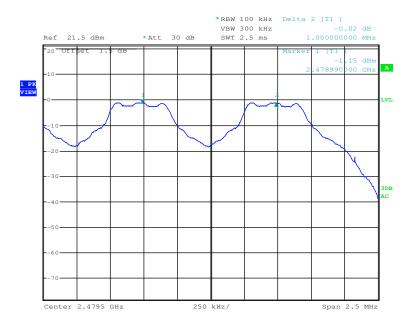



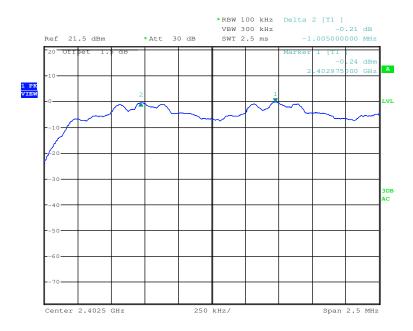





Report No.: SZEM130600286201

Page: 32 of 74

Test mode: π/4DQPSK Test channel: Middle

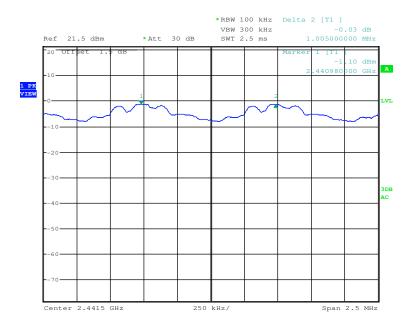

Test mode: π/4DQPSK Test channel: Highest

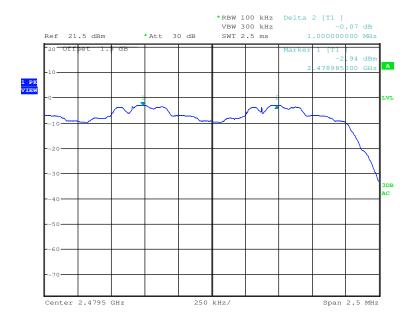





Report No.: SZEM130600286201

Page: 33 of 74

Test mode: 8DPSK Test channel: Lowest

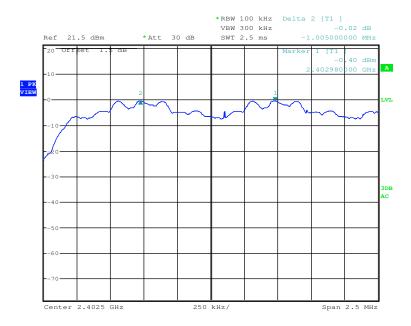



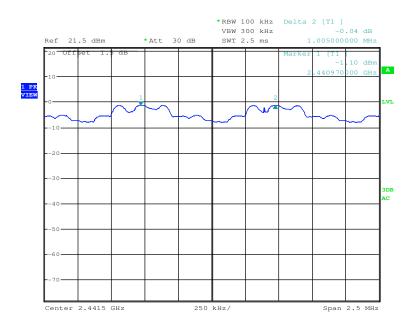


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130600286201

Page: 34 of 74

Test mode: 8DPSK Test channel: Highest

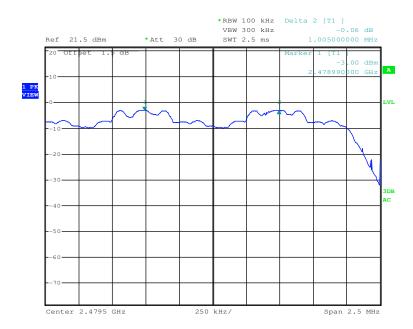




Report No.: SZEM130600286201

Page: 35 of 74

5.6 Hopping Channel Number

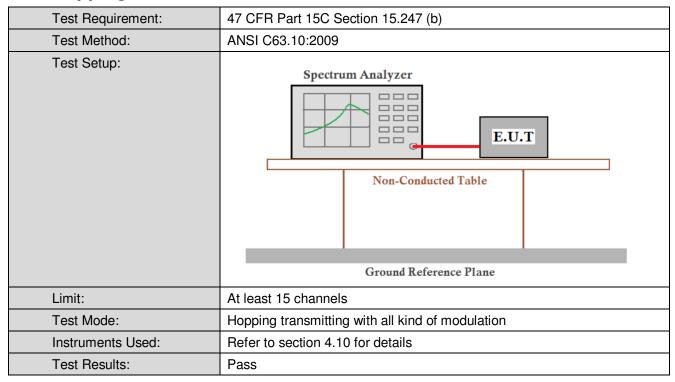

Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15




Report No.: SZEM130600286201


Page: 36 of 74

Test plot as follows:

Test mode: GFSK

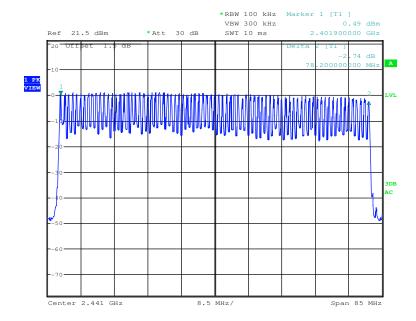

Test mode: π/4DQPSK

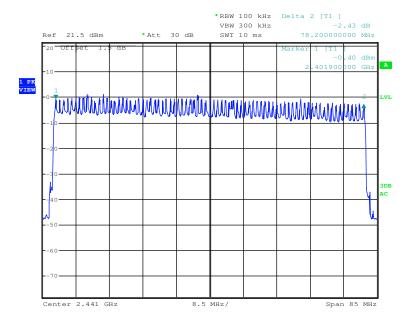




Report No.: SZEM130600286201

Page: 37 of 74

Test mode: 8DPSK

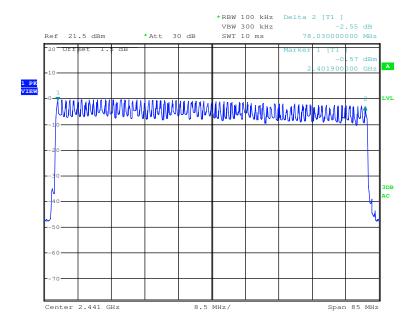



Report No.: SZEM130600286201

Page: 38 of 74

5.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)			
Test Method:	ANSI C63.10:2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Instruments Used:				
	Refer to section 4.10 for details			
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.			
Limit:	0.4 Second			
Test Results:	Pass			

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.1616	0.4
GFSK	DH3	0.2824	0.4
	DH5	0.3211	0.4
	2-DH1	0.1664	0.4
π/4DQPSK	2-DH3	0.2848	0.4
	2-DH5	0.1941	0.4
	3-DH1	0.1664	0.4
8DPSK	3-DH3	0.2848	0.4
	3-DH5	0.3243	0.4

Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below

DH1 time slot=0.505(ms)*(1600/ (2*79))*31.6=161.6ms

DH3 time slot=1.765(ms)*(1600/ (4*79))*31.6=282.4ms

DH5 time slot=3.010 (ms)*(1600/ (6*79))*31.6=321.1ms




Report No.: SZEM130600286201


Page: 39 of 74

Test plot as follows:

Test Packet:	DH1

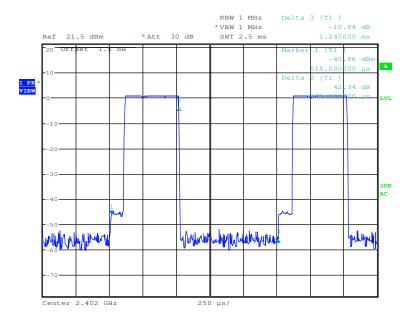



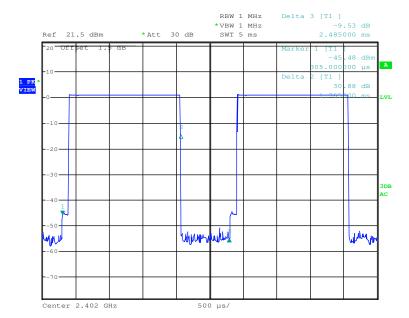





Report No.: SZEM130600286201

Page: 40 of 74



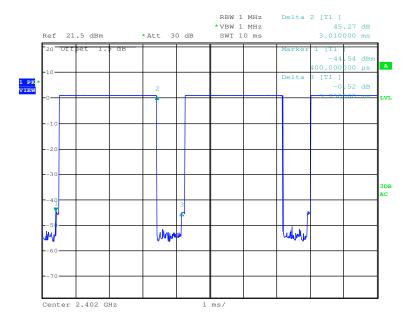

Test Packet: 2-DH1

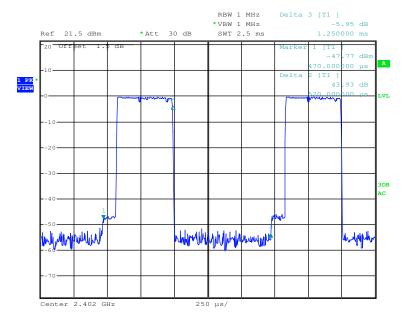


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





Report No.: SZEM130600286201

Page: 41 of 74



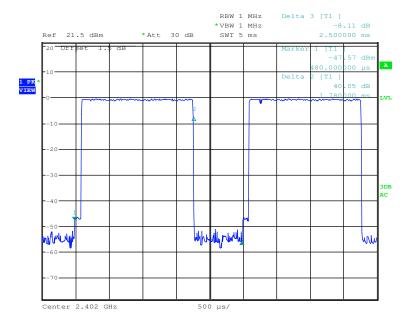



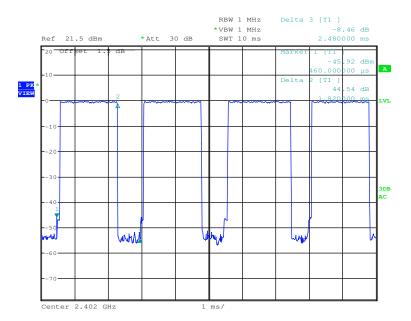





Report No.: SZEM130600286201

Page: 42 of 74



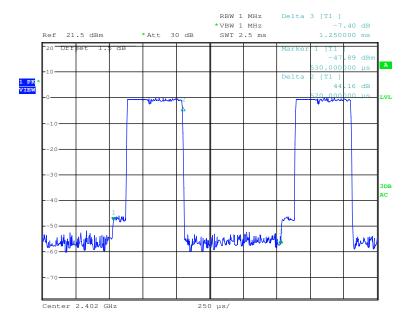



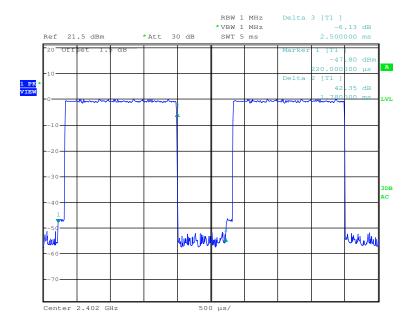




Report No.: SZEM130600286201

Page: 43 of 74



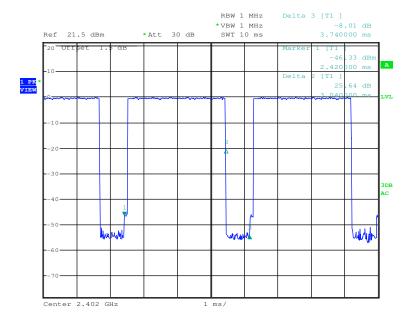

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130600286201

Page: 44 of 74

5.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	ANSI C63.10:2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.			
Instruments Used:	Refer to section 4.10 for details			
Test Results:	Pass			





Report No.: SZEM130600286201

Page: 45 of 74

Test plot as follows:

Test mode: GFSK Test channel: Lowest

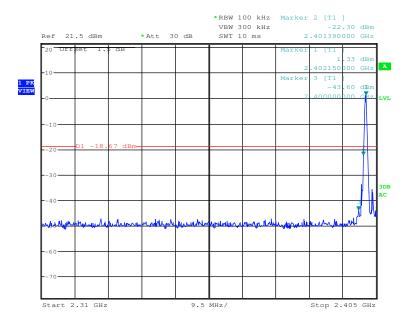

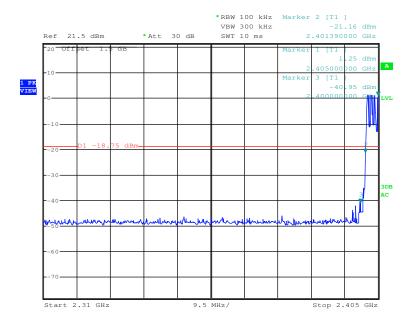





Report No.: SZEM130600286201

Page: 46 of 74

Test mode: GFSK Test channel: Highest

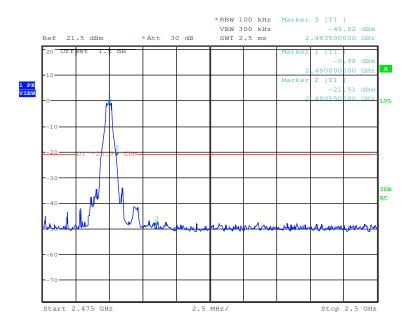

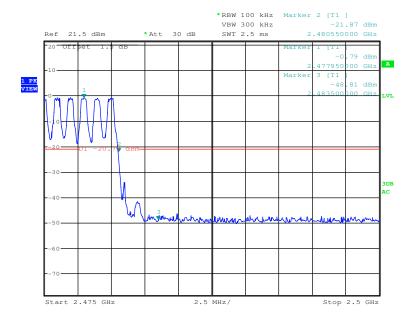


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130600286201

Page: 47 of 74

Test mode: π/4DQPSK Test channel: Lowest

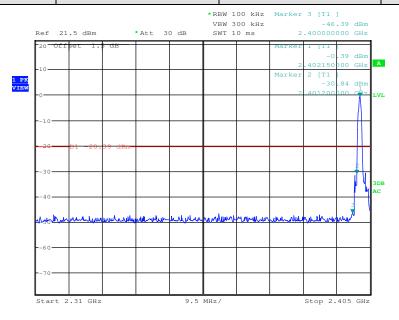

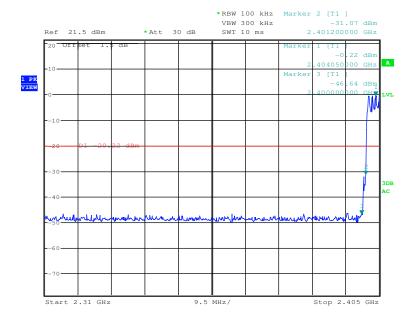


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130600286201

Page: 48 of 74

Test mode: π/4DQPSK Test channel: Highest

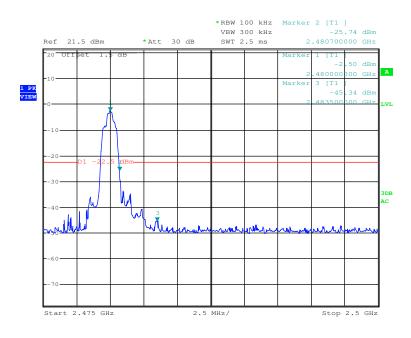

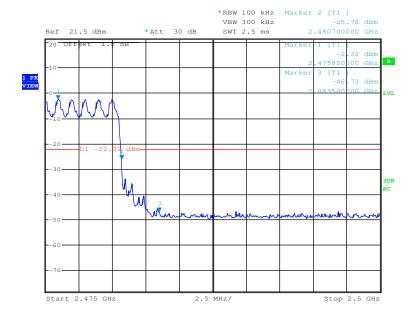







Report No.: SZEM130600286201

Page: 49 of 74

Test mode: 8DPSK Test channel: Lowest

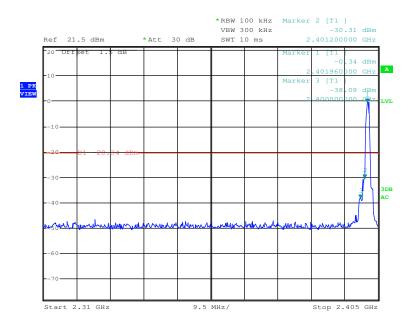

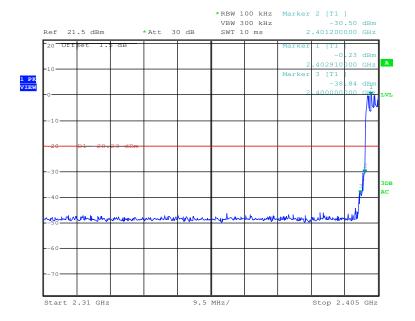


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130600286201

Page: 50 of 74

Test mode: 8DPSK Test channel: Highest

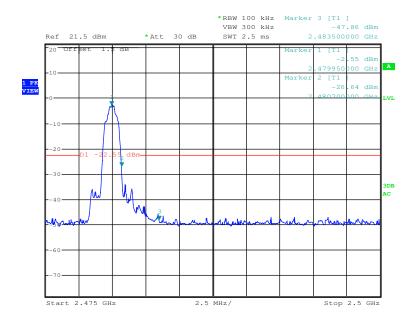

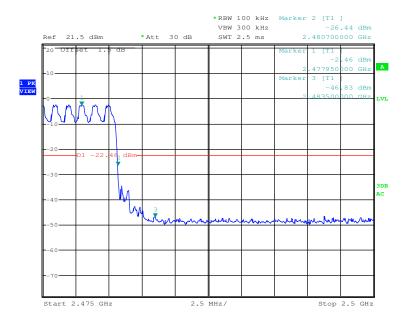



Report No.: SZEM130600286201

Page: 51 of 74

5.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	ANSI C63.10:2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.			
Instruments Used:	Refer to section 4.10 for details			
Test Results:	Pass			





Report No.: SZEM130600286201


Page: 52 of 74

Test plot as follows:

Test mode: GFSK Test channel: Lowest

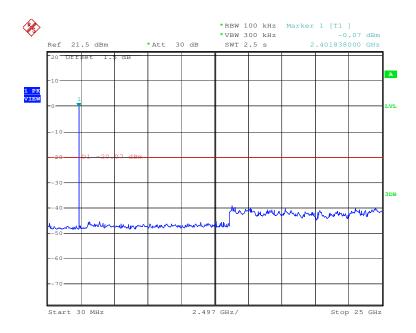



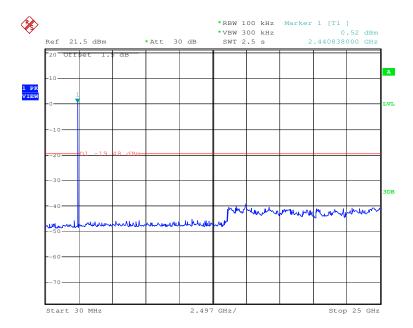





Report No.: SZEM130600286201

Page: 53 of 74

Test mode: GFSK Test channel: Highest

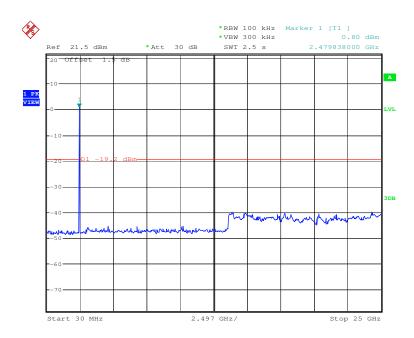

Test mode: π/4DQPSK Test channel: Lowest

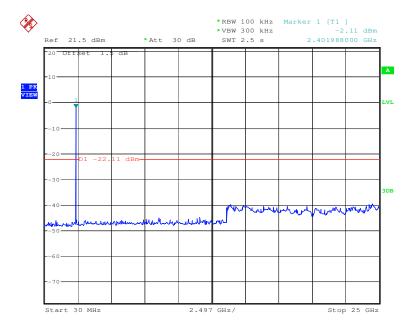





Report No.: SZEM130600286201

Page: 54 of 74

Test mode: π/4DQPSK Test channel: Middle

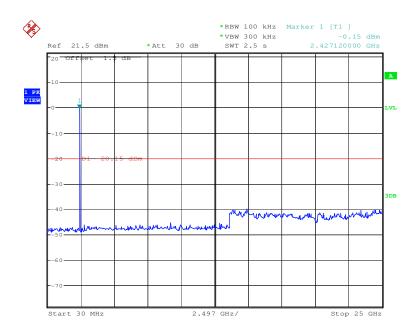



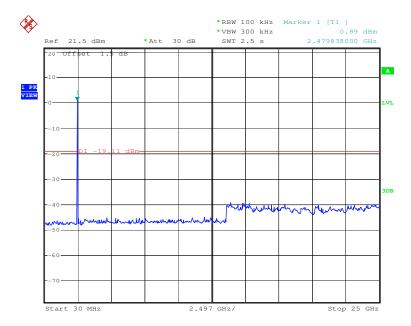





Report No.: SZEM130600286201

Page: 55 of 74

Test mode: 8DPSK Test channel: Lowest

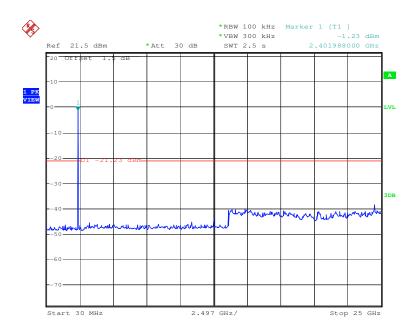

Test mode: 8DPSK Test channel: Middle

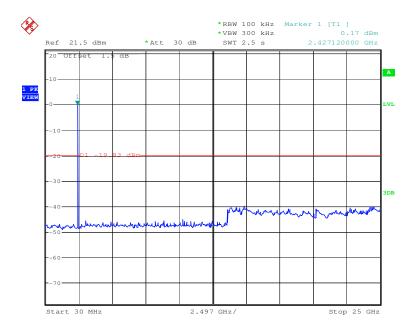




Report No.: SZEM130600286201

Page: 56 of 74

Test mode: 8DPSK Test channel: Highest

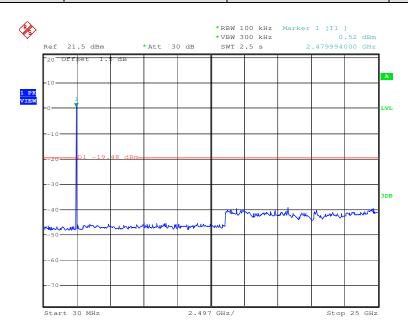



Report No.: SZEM130600286201

Page: 57 of 74

5.10 Pseudorandom Frequency Hopping Sequence

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- · Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- · Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM130600286201

Page: 58 of 74

5.11 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2009							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark		
	0.009MHz-0.090MHz		Peak	10kHz	z 30kHz	Peak		
	0.009MHz-0.090MH	Z	Average	10kHz	z 30kHz	Average		
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	0.110MHz-0.490MH	Z	Peak	10kHz	z 30kHz	Peak		
	0.110MHz-0.490MH	Z	Average	10kHz	z 30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak		
	30MHz-1GHz		Quasi-peak	100 kF	lz 300kHz	Quasi-peak		
	Above 1GHz	Peak	1MHz	3MHz	Peak			
	Above IGHZ		Peak	1MHz	10Hz	Average	Ī	
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m		
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30		
	1.705MHz-30MHz		30	-	-	30		
	30MHz-88MHz		100	40.0	Quasi-peak	3		
	88MHz-216MHz		150	43.5	Quasi-peak	3		
	216MHz-960MHz		200	46.0	Quasi-peak	3		
	960MHz-1GHz 500		500	54.0	Quasi-peak	3		
	Above 1GHz	Average	3					
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							






Report No.: SZEM130600286201

Page: 59 of 74

Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

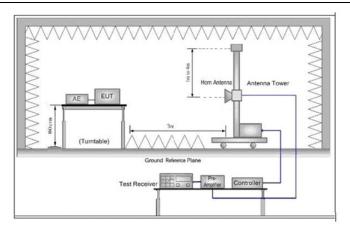


Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB



Report No.: SZEM130600286201

Page: 60 of 74

	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM130600286201

Page: 61 of 74

5.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)				
Test mode:	Transmitting	Vertical		



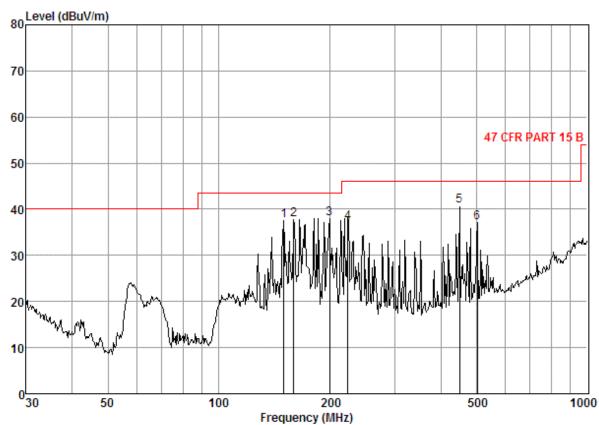

Condition: 47 CFR PART 15 B 3m 3142C NEW VERTICAL

Job No. : 2862RF Mode : TX

	Freq			Preamp Factor			Limit Line	Over Limit
	_							
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	150.011	1.32	9.30	26.91	53.94	37.65	43.50	-5.85
2	159.784	1.34	9.50	26.86	53.80	37.78	43.50	-5.72
3	199.986	1.40	6.70	26.70	56.61	38.01	43.50	-5.49
4	223.733	1.54	7.40	26.62	54.83	37.15	46.00	-8.85
5	449.556	2.41	12.76	27.44	53.02	40.75	46.00	-5.25
6	502.940	2.60	13.52	27.69	48.61	37.04	46.00	-8.96




Report No.: SZEM130600286201

Page: 62 of 74

Test mode:	Transmitting	Horizontal
------------	--------------	------------

Data: 9

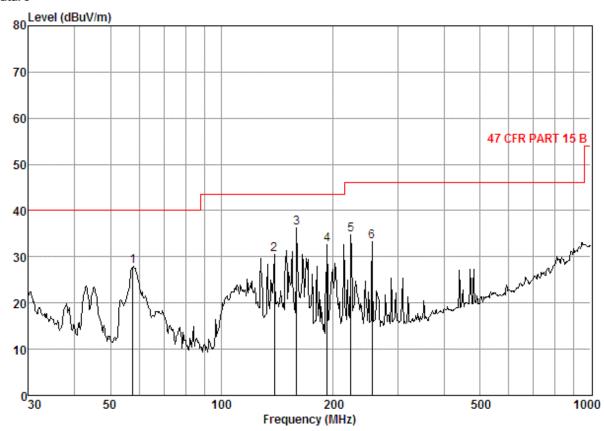

Condition: 47 CFR PART 15 B 3m 3142C NEW HORIZONTAL

Job No. : 2862RF Mode : TX

		Cable	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	57.520	0.80	6.03	27.27	48.47	28.03	40.00	-11.97
2	138.936	1.29	8.54	26.96	47.55	30.42	40.00	-9.58
3	159.811	1.34	9.50	26.86	52.29	36.27	40.00	-3.73
4	193.054	1.39	6.97	26.73	50.97	32.60	40.00	-7.40
5	223.620	1.54	7.40	26.62	52.43	34.75	40.00	-5.25
6	255.426	1.70	8.90	26.52	49.22	33.30	47.00	-13.70



Report No.: SZEM130600286201

Page: 63 of 74

5.11.2 Transmitter Emission above 1GHz

Test mode:		GFSK(DH1)	Test	channel:	Lowest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3080.601	3.38	33.37	40.37	47.15	43.53	74	-30.47	Vertical
4223.950	4.31	34.45	41.21	48.20	45.75	74	-28.25	Vertical
5073.591	4.80	34.48	41.73	47.78	45.33	74	-28.67	Vertical
6047.776	5.14	35.76	40.87	48.42	48.45	74	-25.55	Vertical
7394.878	6.00	35.96	39.71	48.58	50.83	74	-23.17	Vertical
10916.260	6.20	38.47	37.83	44.62	51.46	74	-22.54	Vertical
3384.850	3.64	33.25	40.59	47.05	43.35	74	-30.65	Horizontal
4278.055	4.35	34.59	41.25	47.32	45.01	74	-28.99	Horizontal
5244.295	4.86	34.65	41.58	48.21	46.14	74	-27.86	Horizontal
6561.030	5.27	36.25	40.43	47.77	48.86	74	-25.14	Horizontal
8615.126	6.17	36.29	38.65	46.58	50.39	74	-23.61	Horizontal
11027.980	6.23	38.49	37.88	45.49	52.33	74	-21.67	Horizontal

Test mode:		GFSK(DH1)	Test	channel:	Middle	Rema	rk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
2875.986	3.25	33.21	40.21	46.38	42.63	74	-31.37	Vertical
3588.939	3.81	33.30	40.73	48.15	44.53	74	-29.47	Vertical
4399.537	4.42	34.92	41.33	47.17	45.18	74	-28.82	Vertical
6527.712	5.27	36.28	40.46	47.47	48.56	74	-25.44	Vertical
9157.857	6.11	36.79	38.19	44.88	49.59	74	-24.41	Vertical
11370.050	6.31	38.43	38.02	45.40	52.12	74	-21.88	Vertical
3120.061	3.41	33.35	40.40	46.93	43.29	74	-30.71	Horizontal
3854.077	4.04	33.63	40.93	47.79	44.53	74	-29.47	Horizontal
4582.422	4.55	35.06	41.47	48.39	46.53	74	-27.47	Horizontal
5674.896	5.01	35.18	41.20	49.06	48.05	74	-25.95	Horizontal
7781.104	6.22	36.00	39.38	46.53	49.37	74	-24.63	Horizontal
11486.410	6.34	38.40	38.06	45.57	52.25	74	-21.75	Horizontal



Report No.: SZEM130600286201

Page: 64 of 74

Test mode:		GFSK(DH1)	Test	channel:	Highest	Rema	rk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
3588.939	3.81	33.30	40.73	48.15	44.53	74	-29.47	Vertical
5047.827	4.79	34.45	41.75	47.74	45.23	74	-28.77	Vertical
6219.512	5.19	35.96	40.73	48.54	48.96	74	-25.04	Vertical
7860.737	6.21	36.00	39.31	47.13	50.03	74	-23.97	Vertical
9441.913	6.03	37.14	37.94	45.60	50.83	74	-23.17	Vertical
11370.050	6.31	38.43	38.02	45.40	52.12	74	-21.88	Vertical
1589.289	2.57	28.84	39.39	54.24	46.26	74	-27.74	Horizontal
2995.538	3.31	33.38	40.30	46.53	42.92	74	-31.08	Horizontal
3854.077	4.04	33.63	40.93	47.79	44.53	74	-29.47	Horizontal
4971.316	4.76	34.43	41.75	48.45	45.89	74	-28.11	Horizontal
6235.364	5.19	35.98	40.71	47.92	48.38	74	-25.62	Horizontal
11027.980	6.23	38.49	37.88	45.49	52.33	74	-21.67	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM130600286201

Page: 65 of 74

5.12Band edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 15	7 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10: 2009	NSI C63.10: 2009									
Test Site:	Measurement Distance: 3m	leasurement Distance: 3m (Semi-Anechoic Chamber)									
Limit:	Frequency	Limit (dBuV/m @3m)	Remark								
	30MHz-88MHz	40.0	Quasi-peak Value								
	88MHz-216MHz	43.5	Quasi-peak Value								
	216MHz-960MHz	46.0	Quasi-peak Value								
	960MHz-1GHz	54.0	Quasi-peak Value								
	Above 10Uz	54.0	Average Value								
	Above IGHZ	Above 1GHz 74.0 Peak Value									
Test Setup:											



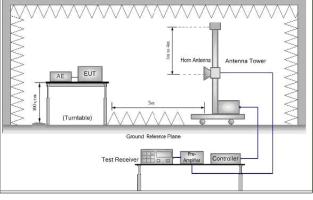


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM130600286201

Page: 66 of 74

Test Procedure:	 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of
	GFSK modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM130600286201

Page: 67 of 74

Test plot as follows:

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Vertical

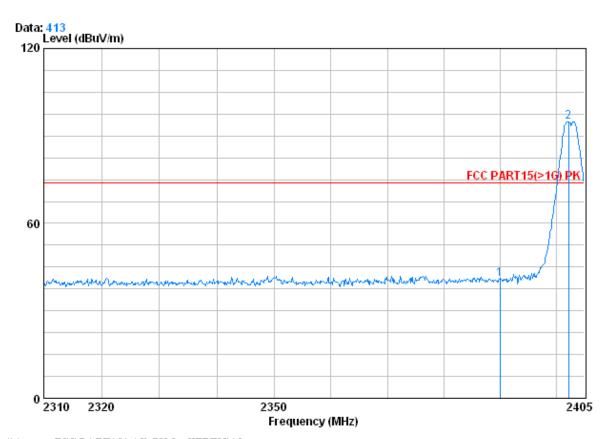

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 2862RF

Test mode : 2402 Bandedge

			Cablei	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
							,		
1		2390.000	2 08	32 51	39.85	45 15	40 80	74 00	_33 20
_		2390.000	2.50	32.31	35.03	43.13	40.00	74.00	-33.20
2	X	2402.245	2.98	32.51	39.86	99.10	94.74	74.00	20.74


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130600286201

Page: 68 of 74

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Horizontal

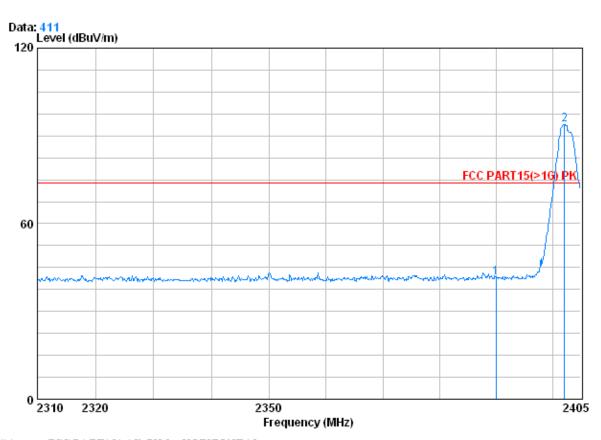

Condition: FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 2862RF Test mode : 2402 Bandedge

> CableAntenna Preamp Read Limit Over Loss Factor Factor Freq Level Level Line Limit MHzdBuV dBuV/m dBuV/m dΒ dB/m dΒ dB 1 2390.000 2.98 32.51 39.85 46.04 41.69 74.00 -32.31 2 X 2402.150 2.98 32.51 39.86 98.13 93.77






Report No.: SZEM130600286201

Page: 69 of 74

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Average Vertical

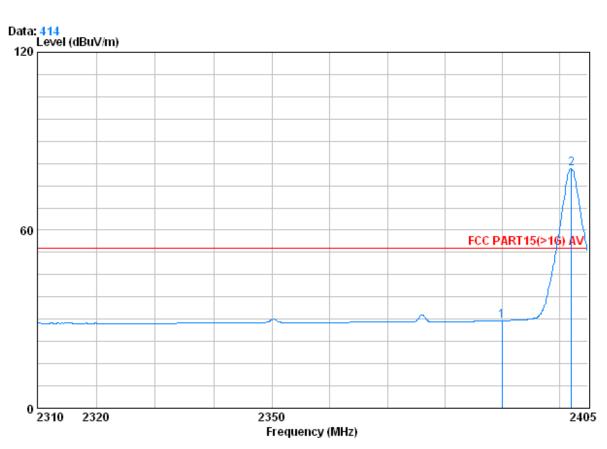

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 2862RF

Test mode : 2402 Bandedge

		Freq			•		Limit Level Line			
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1		2390.000	2.98	32.51	39.85	33.91	29.56	54.00	-24.44	
2	0	2402.150	2.98	32.51	39.86	85.10	80.73	54.00	26.73	


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130600286201

Page: 70 of 74

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Average Horizontal

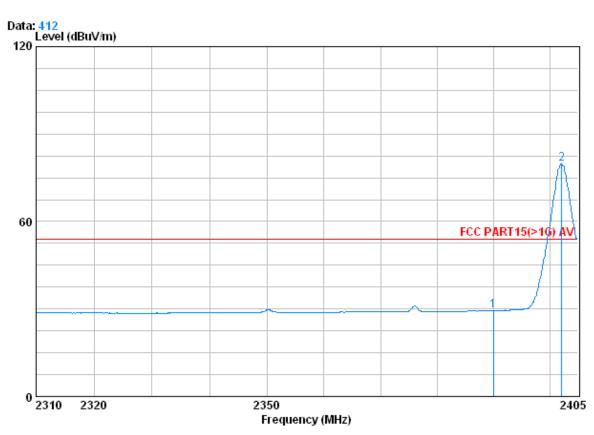

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 2862RF

Test mode : 2402 Bandedge

		Freq			Preamp Factor				
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.98	32.51	39.85	33.74	29.39	54.00	-24.61
2	X	2402.150	2.98	32.51	39.86	84.06	79.69	54.00	25.69


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130600286201

Page: 71 of 74

Worse case mode:	GESK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical
Words dade inicae.	ar or (Brio)	1 Oot onamion.	riigiioot	i tomant.	i oan	Voitioai

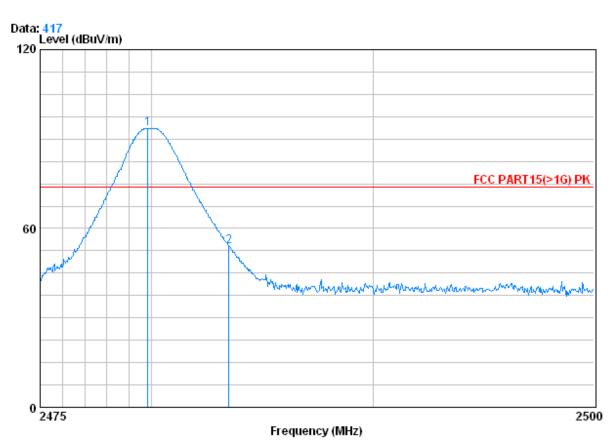

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job No. : 2862RF

Test mode : 2480 Bandedge

		Freq			•		Limit Level Line			
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	X	2479.850	3.03	32.67	39.92	97.75	93.53	74.00	19.53	
2		2483.500	3.03	32.67	39.92	58.20	53.98	74.00	-20.02	


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130600286201

Page: 72 of 74

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Peak Horizontal

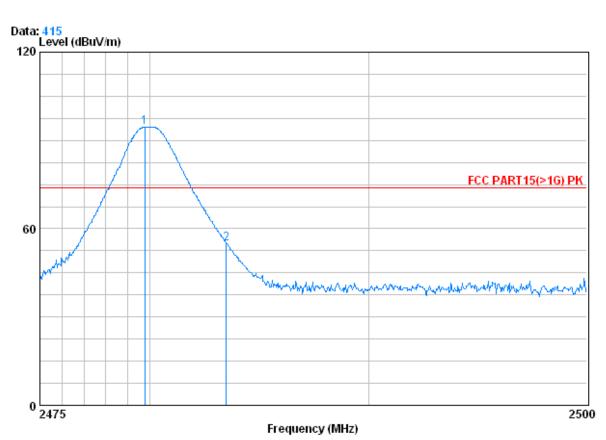

Condition : FCC PART15(>1G) PK 3m HORIZONTAL

Job No. : 2862RF

Test mode : 2480 Bandedge

CableAntenna Preamp Read Over Limit Freq Loss Factor Factor Level Level Line Limit dBuV dBuV/m dBuV/m MHzdB dB/m dB dB 2479.775 1 X 3.03 32.67 39.92 98.82 94.60 74.00 20.60 2483.500 3.03 32.67 39.92 59.20 54.98 74.00 -19.02


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130600286201

Page: 73 of 74

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Average Vertical

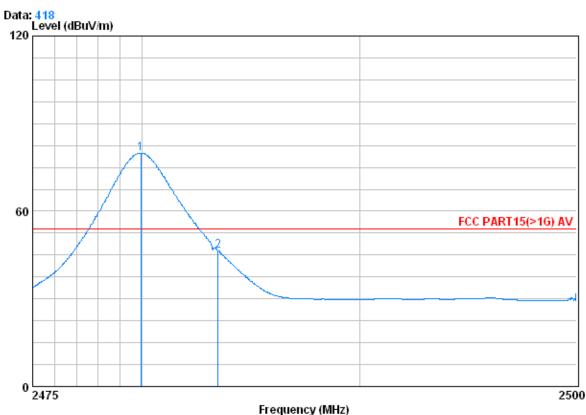

rrequency (Mr

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 2862RF

Test mode : 2480 Bandedge

		Cable.	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 0	2479.950	3.03	32.67	39.92	84.14	79.92	54.00	25.92
2	2483.500	3.03	32.67	39.92	50.68	46.46	54.00	-7.54


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130600286201

Page: 74 of 74

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	------------	---------------	---------	---------	---------	------------

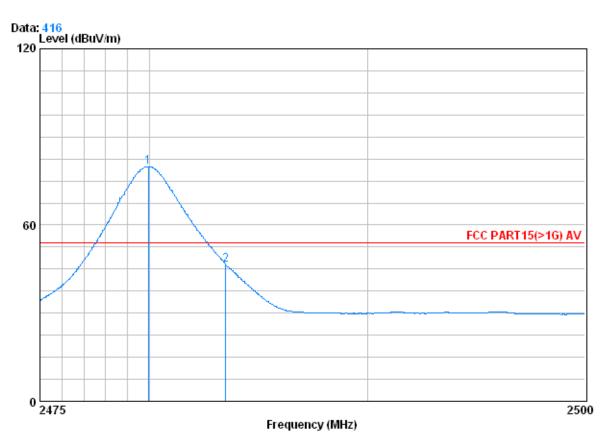

Condition : FCC PART15(>1G) AV 3m HORIZONTAL

Job No. : 2862RF Test mode : 2480 Bandedge

		Freq			Preamp Factor				
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	x	2479.950	3.03	32.67	39.92	84.08	79.86	54.00	25.86
2		2483.500	3.03	32.67	39.92	50.73	46.51	54.00	-7.49

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."