

# TEST REPORT

## Part 15C & IC RSS-210(Issue 8)

**Equipment under test** USB DAC AMPLIFIER  
**Model name** AI-101DA  
**FCC ID** XEGAI-101DA  
**IC Certification** 1559C-AI101DA  
**Applicant** TEAC Corporation  
**Manufacturer** TEAC Corporation  
**Date of test(s)** 2014.09.01 ~ 2014.09.19  
**Date of issue** 2014.10.17

**Issued to**


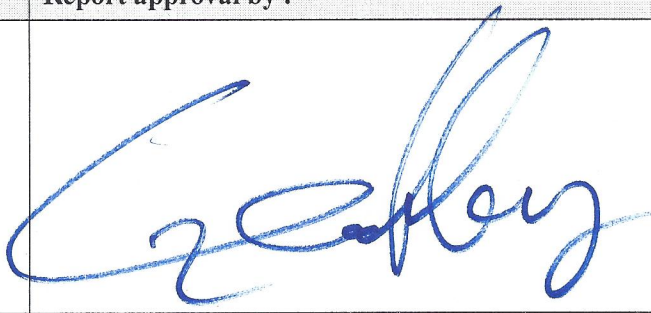
**TEAC Corporation**

1-47 Ochiai. Tama-shi, Tokyo 206-8530 Japan

**Issued by**

**KES Co., Ltd.**

C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si,  
 Gyeonggi-do,431-716, Korea  
 473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea

Test and report completed by :	Report approval by :
	
Byeong-Geol Chu Test engineer	Jeff Do Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.



---

**Revision history**

<b>Revision</b>	<b>Date of issue</b>	<b>Test report No.</b>	<b>Description</b>
-	2014.10.17	KES-RF-14T0049	Initial

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.



---

## TABLE OF CONTENTS

1. General information .....	4
1.1. EUT description .....	4
1.2. Test configuration .....	5
1.3. Frequency/channel operations .....	5
1.4. Information about derivative model .....	5
2. Summary of tests .....	6
3. Test results .....	7
3.1. Radiated restricted band and emissions .....	7
3.2. Conducted band edge and out of band emissions .....	18
3.3. 20 dB bandwidth .....	26
3.4. Output power .....	30
3.5. Carrier frequency separation .....	35
3.6. Number of hopping frequency .....	37
3.7. Time of occupancy .....	40
3.8. AC conducted emissions .....	45
Appendix A. Measurement equipment .....	52
Appendix B. Test setup photo .....	53

## 1. General information

Applicant: TEAC Corporation  
Applicant address: 1-47 Ochiai. Tama-shi, Tokyo 206-8530 Japan  
Test site: KES Co., Ltd.  
Test site address: C-3701, Simin-daero 365-40, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
473-29, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea  
FCC/IC rule part(s): 15.247 / RSS-210  
Model: AI-101DA  
FCC ID: XEGAI-101DA  
IC Certification: 1559C-AI101DA  
Test device serial No.:  Production  Pre-production  Engineering

### 1.1. EUT description

Equipment under test USB DAC AMPLIFIER  
Frequency range 2402 MHz ~ 2480 MHz  
Modulation technique FHSS  
Number of channels 79  
Antenna specification Antenna type: Chip  
Peak gain: 0 dBi  
Power source AC 100 V ~ 240 V

15.247(a)(1) that the rx input bandwidths shift frequencies in synchronization with the transmitted  
15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

#### Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

#### Equal hopping frequency use

The channels of this system will be used equally over the long-term distribution of the hopsets.

#### Example of a 79 hopping sequence in data mode:

02, 05, 31, 24, 20, 10, 43, 36, 30, 23, 40, 06, 21, 50, 44, 09, 71, 78, 01, 13, 73, 07, 70, 72, 35, 62, 42, 11, 41, 08, 16, 29, 60, 15, 34, 61, 58, 04, 67, 12, 22, 53, 57, 18, 27, 76, 39, 32, 17, 77, 52, 33, 56, 46, 37, 47, 64, 49, 45, 38, 69, 14, 51, 26, 79, 19, 28, 65, 75, 54, 48, 03, 25, 66, 05, 16, 68, 74, 59, 63, 55,



### **System receiver input bandwidth**

Each channel bandwidth is 1 MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### **1.2. Test configuration**

The USB DAC AMPLIFIER FCC ID: XEGAI-101DA was tested per the guidance of ANSI C63.10-2009 and DA 00-705. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

### **1.3. Frequency/channel operations**

<b>Ch.</b>	<b>Frequency (MHz)</b>	<b>Rate(Mbps)</b>
00	2402	1,2,3
⋮	⋮	⋮
39	2441	1,2,3
⋮	⋮	⋮
78	2480	1,2,3

Preliminary tests were performed in different data rate and the highest power data rates(1 Mbps, 2 Mbps) were chosen for full test

### **1.4. Information about derivative model**

N/A

## 2. Summary of tests

Section in FCC Part 15	Section in RSS-210 & Gen	Test description	Test results
15.205, 15.209	RSS-210 A8.5	Radiated restricted band and emission	Pass
15.207(d)	RSS-210 A8.5	Conducted band edge and out of band emissions	Pass
15.247(a)(1)(iii)	RSS-210 A8.1(a)	20 dB bandwidth	Pass
15.247(b)(1)	RSS-210 A8.4(2)	Output power	Pass
15.247(a)(1)	RSS-210 A8.1(b)	Channel separation	Pass
15.247(a)(1)(iii)	RSS-210 A8.1(d)	Number of channels	Pass
15.247(a)(1)(iii)	RSS-210 A8.1(d)	Time of occupancy	Pass
15.207	RSS-Gen 7.2.4	AC conducted emissions	Pass
-	RSS-Gen 4.6.1	Occupied Bandwidth	Pass

**Note:**


1. The EUT was tested per the guidance of DA 00-705. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and/or AC line conducted testing.
2. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

### 3. Test results


#### 3.1. Radiated restricted band and emissions

##### Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

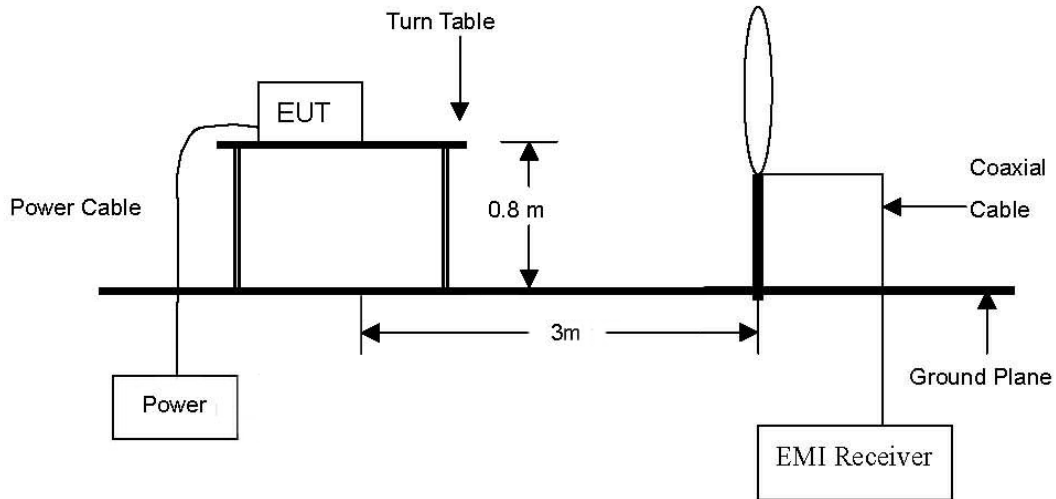

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

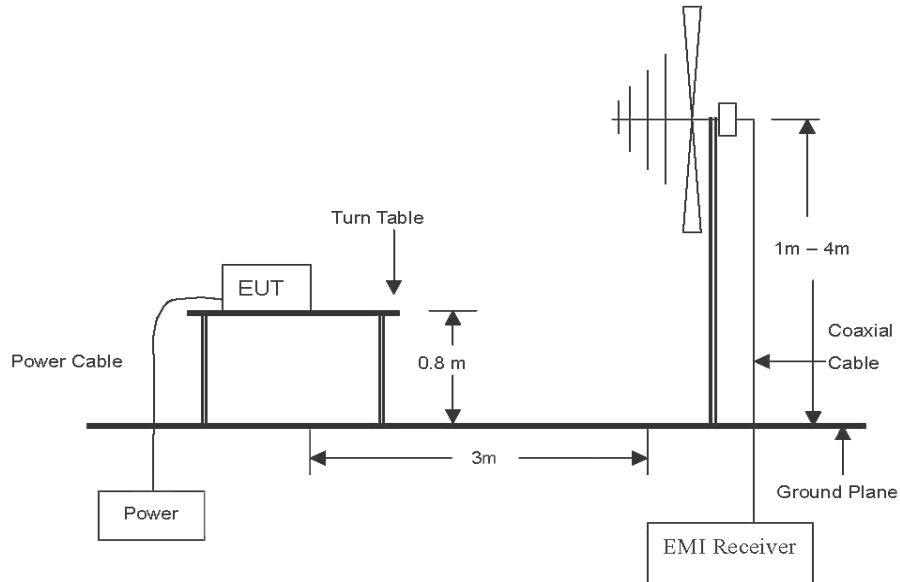

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 24 GHz emissions.

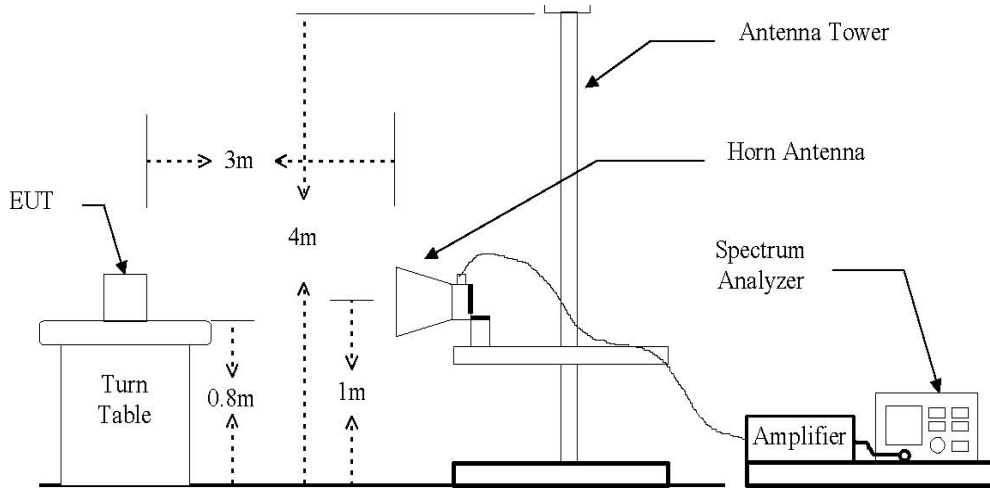

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.



### Test procedure

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Average measurements > 1 GHz using RBW = 1 MHz and VBW = 10 Hz. Peak measurements > 1 GHz using RBW = 1 MHz and VBW = 1 MHz. Both average and peak measurements were made using a peak detector.

### Note:

1. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20 dB of the respective limits were not reported.
2. When Average result is different from peak result over 20 dB (over-averaging), according to 15.35 (c), as a “duty cycle correction factor”, pulse averaging with  $20 \log(\text{duty cycle})$  has to be used.
3. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
4. Average test would be performed if the peak result were greater than the average limit.
5. “\*” means restricted band edge.
5.  $\text{Field strength}(\text{dB}\mu\text{V}/\text{m}) = \text{Level}(\text{dB}\mu\text{V}) + \text{Correction factors}(\text{dB}/\text{m}) + \text{Cable loss}(\text{dB}) + F_d(\text{dB})$
6.  $\text{Correction factors}(\text{dB}/\text{m}) = \text{Antenna factor}(\text{dB}/\text{m}) + \text{Cable loss}(\text{dB}) + \text{or Amp. gain}(\text{dB})$
7.  $\text{Margin}(\text{dB}) = \text{Limit}(\text{dB}\mu\text{V}/\text{m}) - \text{Field strength}(\text{dB}\mu\text{V}/\text{m})$
8.  $F_d = 40 \log(D_m / D_s)$

Where:

- $F_d$  = Distance factor in dB  
 $D_m$  = Measurement distance in meters  
 $D_s$  = Specification distance in meters

### Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated ( $\mu V/m$ )
0.009 ~ 0.490	300	2 400 / F(kHz)
0.490 ~ 1.705	30	24 000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.



**KES Co., Ltd.**

C-3701, Simin-daero 365-401,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-14T0049  
Page (11 ) of (54)

**Test results (Below 30 MHz)**

Mode: Bluetooth

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Operating frequency: 2 402 MHz (Worst case)

Channel: 00

Frequency (MHz)	Level (dB $\mu$ V)	Ant. Pol.	Correction factors (dB/m)	F <sub>d</sub> (dB)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No signal detected							

**Test results (Below 1 000 MHz)**

Mode: Bluetooth

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Operating frequency: 2 402 MHz (Worst case)

Channel: 00

Frequency (MHz)	Level (dB $\mu$ V)	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
100.34	22.16	V	10.69	32.85	43.5	10.65
289.52	19.45	H	16.94	36.39	46.0	9.61
384.18	19.48	H	19.97	39.72	46.0	6.55
481.16	15.58	H	22.81	38.39	46.0	7.61
672.60	15.17	V	27.17	42.34	46.0	3.66

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.



**Test results (Above 1 000 MHz)**

Mode: Bluetooth

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Operating frequency: 2 402 MHz

Channel: 00

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 381.9	53.48	Peak	H	-0.41	53.07	74.00	20.93
2 361.2	53.82	Peak	V	-0.47	53.35	74.00	20.65
4 803.9	41.97	Peak	H	9.53	51.50	74.00	22.50
4 803.9	42.14	Peak	V	9.53	51.67	74.00	22.33

Mode: Bluetooth

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Operating frequency: 2 441 MHz

Channel: 39

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 882.1	43.23	Peak	H	10.02	53.25	74.00	20.75
4 882.1	43.75	Peak	V	10.02	53.77	74.00	20.23

Mode: Bluetooth

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Operating frequency: 2 480 MHz

Channel: 78

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 483.5	51.82	Peak	H	0.06	51.88	74.00	22.12
2 483.5	51.08	Peak	V	0.06	51.14	74.00	22.86
4 961.6	38.68	Peak	H	10.52	49.20	74.00	24.80
4 961.6	37.68	Peak	V	10.52	48.14	74.00	25.86

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.

**KES Co., Ltd.**

C-3701, Simin-daero 365-401,  
 Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
 www.kes.co.kr

Test report No.:  
 KES-RF-14T0049  
 Page (13 ) of (54)

Mode: Bluetooth  
 Transfer rate: 2 Mbps  
 Distance of measurement: 3 meter  
 Operating frequency: 2 402 MHz  
 Channel: 00

Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 347.1	53.10	Peak	H	-0.50	52.60	74.00	21.40
2 351.0	54.11	Peak	V	-0.49	53.62	74.00	20.38
4 803.9	40.01	Peak	H	9.53	49.54	74.00	24.46
4 803.9	40.20	Peak	V	9.53	49.73	74.00	24.27

Mode: Bluetooth  
 Transfer rate: 2 Mbps  
 Distance of measurement: 3 meter  
 Operating frequency: 2 441 MHz  
 Channel: 39


Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 882.1	41.31	Peak	H	10.02	51.33	74.00	22.67
4 882.1	42.37	Peak	V	10.02	52.39	74.00	21.61

Mode: Bluetooth  
 Transfer rate: 2 Mbps  
 Distance of measurement: 3 meter  
 Operating frequency: 2 480 MHz  
 Channel: 78


Frequency (MHz)	Level (dB $\mu$ V)	Detect	Ant. Pol.	Correction factors (dB/m)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2 483.5	52.04	Peak	H	0.06	52.10	74.00	21.90
2 483.7	50.91	Peak	V	0.06	50.97	74.00	23.03
4 961.6	36.03	Peak	H	10.52	46.55	74.00	27.45
4 961.6	36.69	Peak	V	10.52	47.21	74.00	26.79

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

Worst case mode: Bluetooth  
Transfer rate: 1 Mbps  
Distance of measurement: 3 meter  
Operating frequency: 2 402 MHz  
Channel: 00  
Detected mode: Peak, Hor

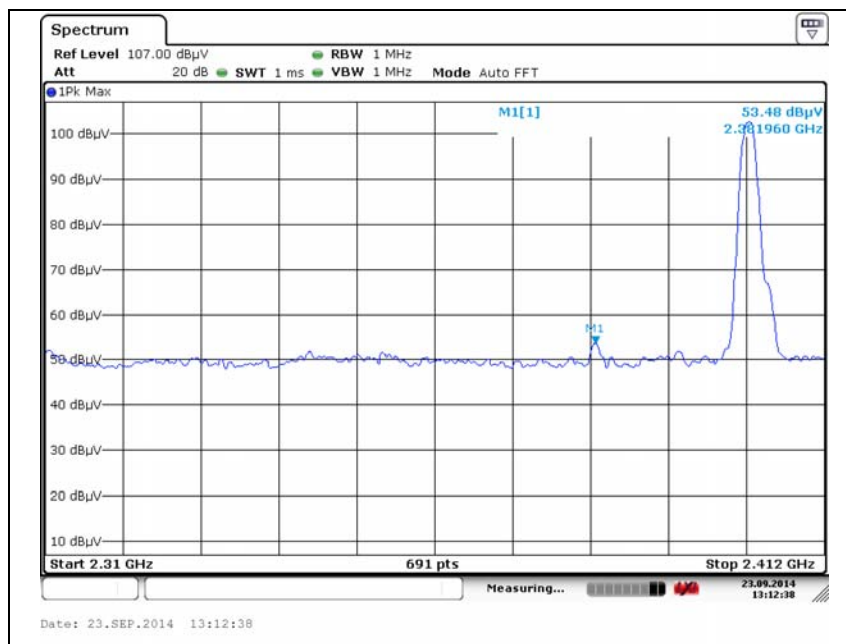


Worst case mode: Bluetooth  
Transfer rate: 1 Mbps  
Distance of measurement: 3 meter  
Operating frequency: 2 402 MHz  
Channel: 00  
Detected mode: Peak, Ver

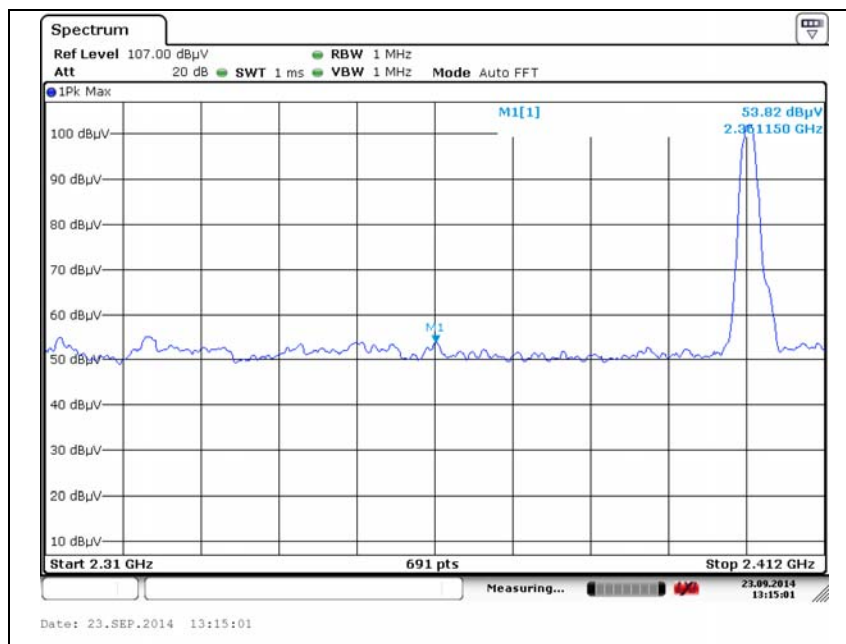

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.


Worst case mode:	<u>Bluetooth</u>
Transfer rate:	<u>1 Mbps</u>
Distance of measurement:	<u>3 meter</u>
Operating frequency:	<u>2 480 MHz</u>
Channel:	<u>78</u>
Detected mode:	<u>Peak, Hor</u>

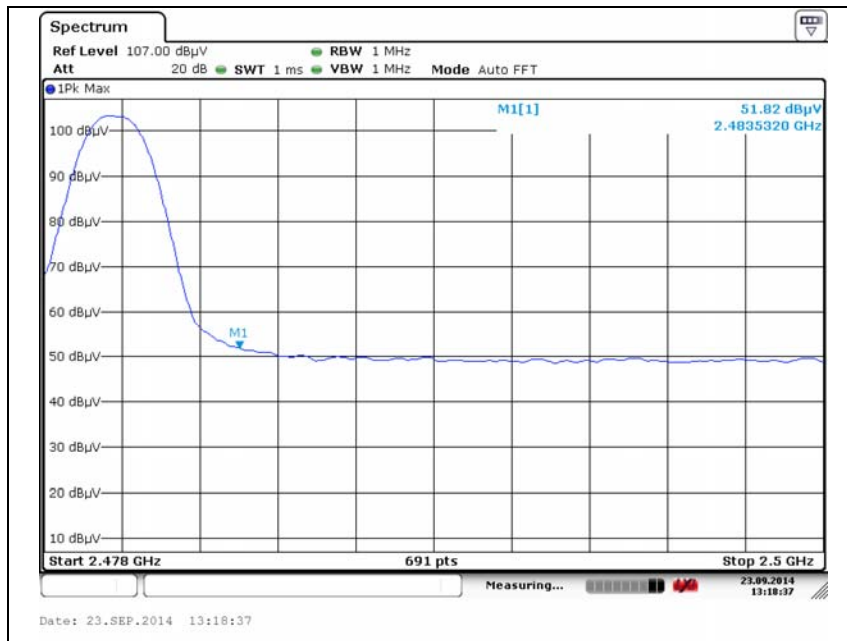

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.




Worst case mode: Bluetooth  
Transfer rate: 1 Mbps  
Distance of measurement: 3 meter  
Operating frequency: 2 480 MHz  
Channel: 78  
Detected mode: Peak, Ver

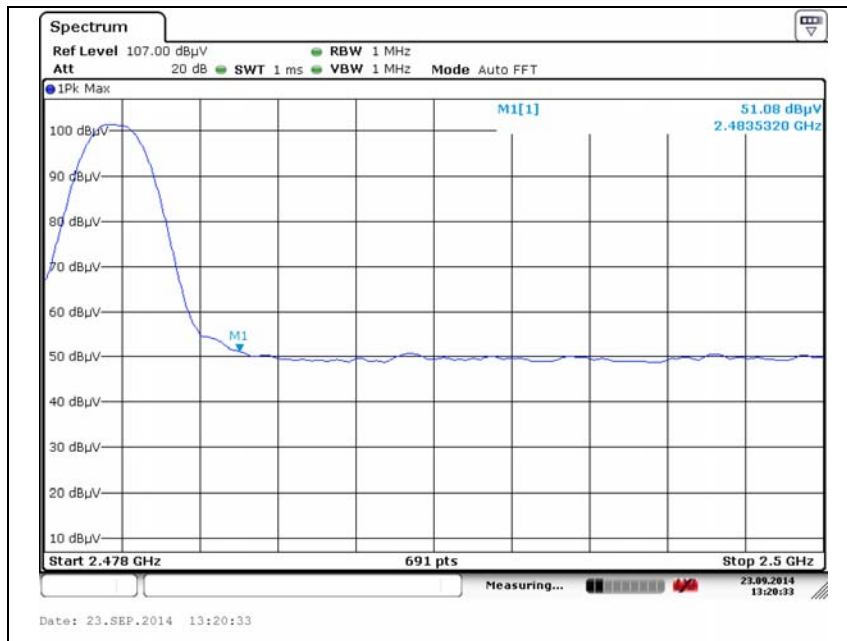

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.

### 3.2. Conducted band edge and out of band emissions

#### Test setup



#### Test procedure

DA 00-705

#### Test setting



1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions(e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
2. RBW = 100 kHz
3. VBW  $\geq$  300 kHz
4. Detector = Peak
5. Number of sweep points  $\geq 2 \times$  Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Limit

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))



According to RSS-210 A8.5, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section A8.4 (4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### Bluetooth 1 Mbps – Ch. 00

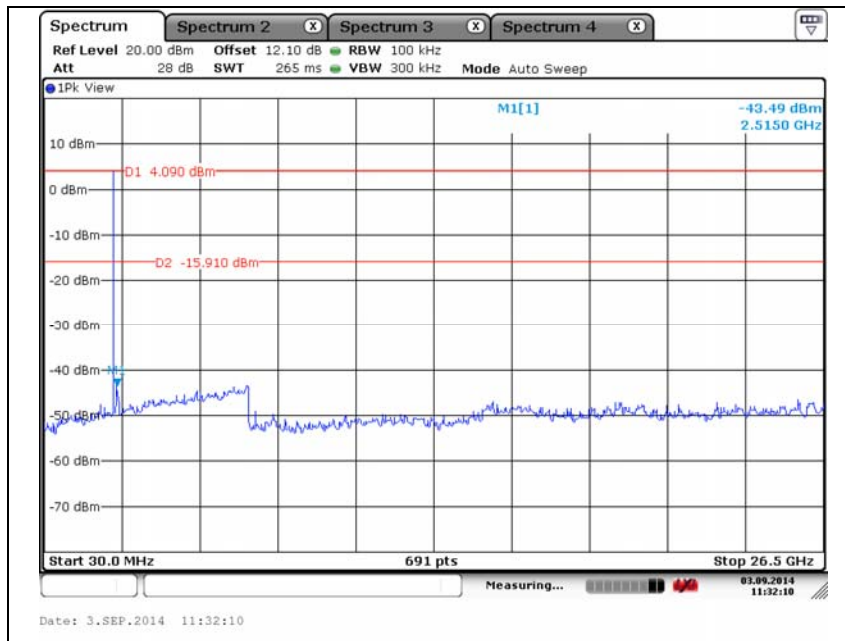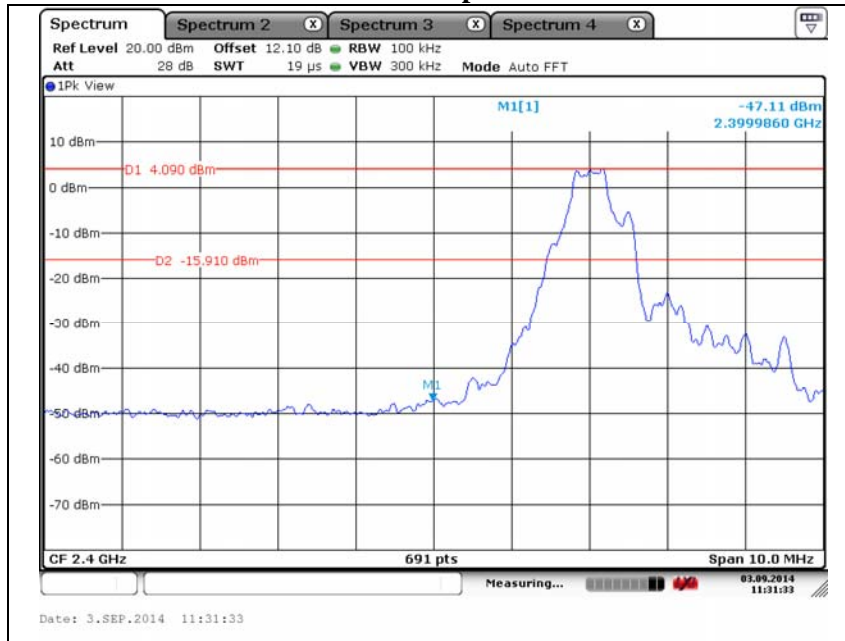



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### Bluetooth 1 Mbps – Ch. 39

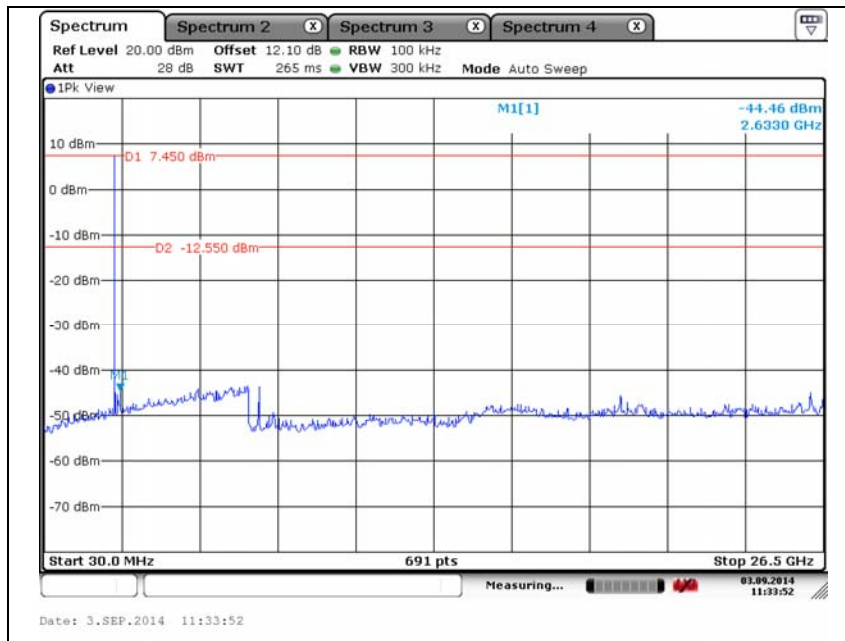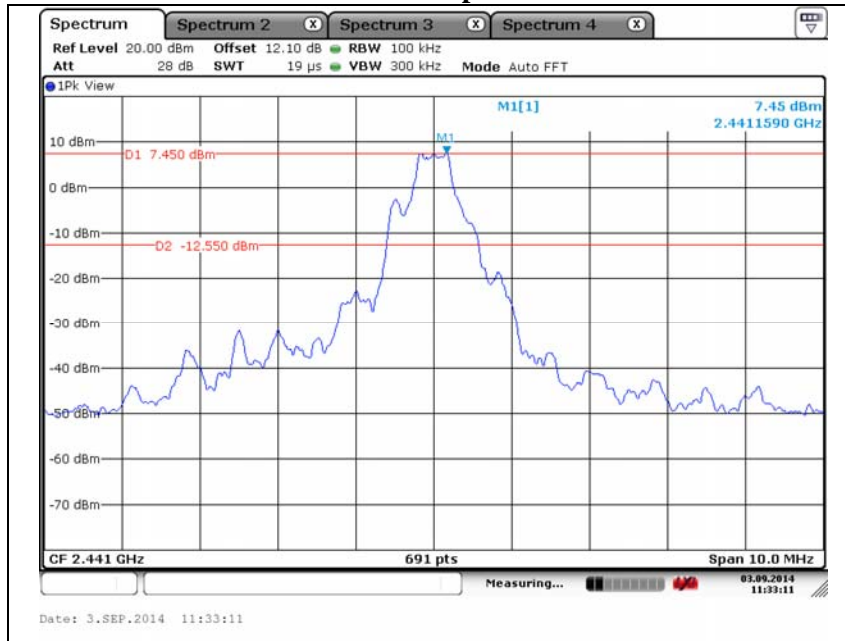



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### Bluetooth 1 Mbps – Ch. 78

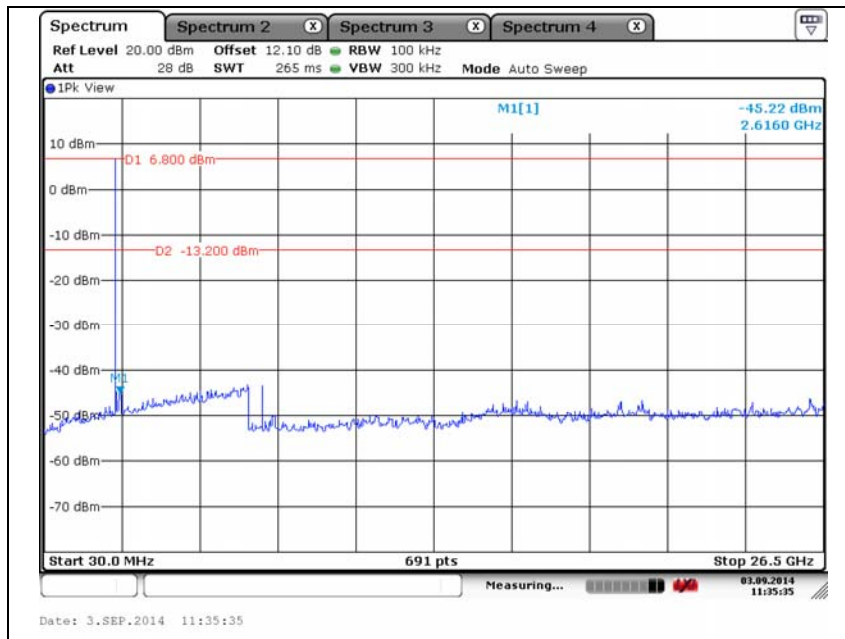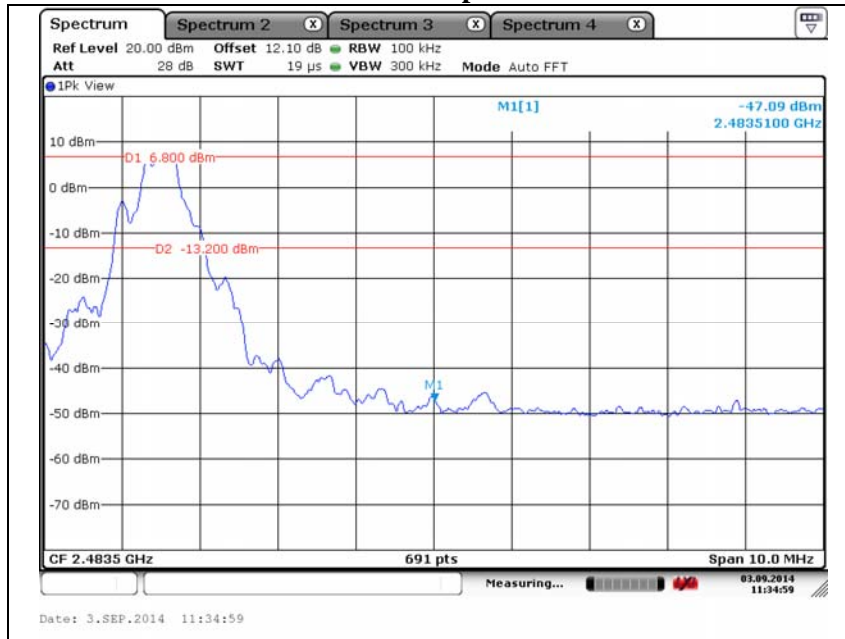



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### Bluetooth 2 Mbps – Ch. 00

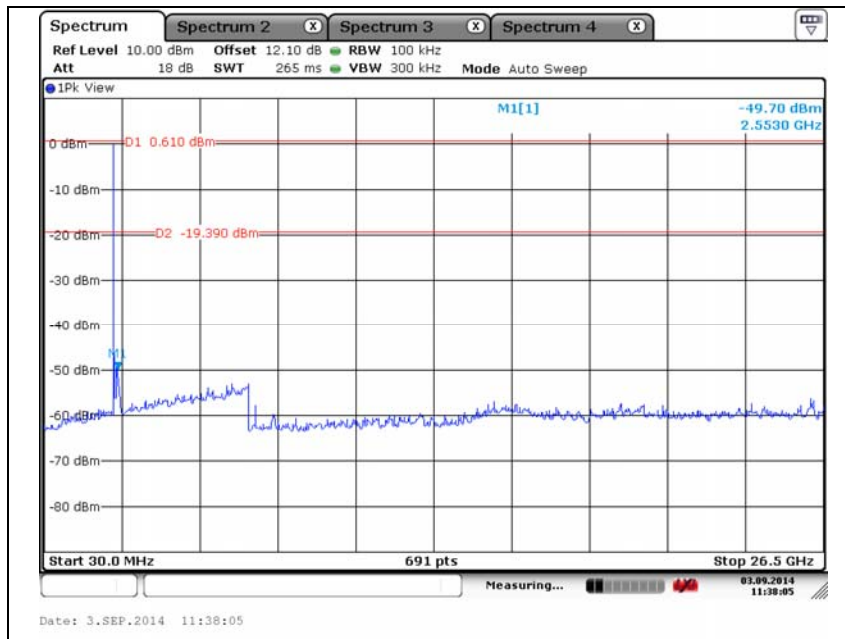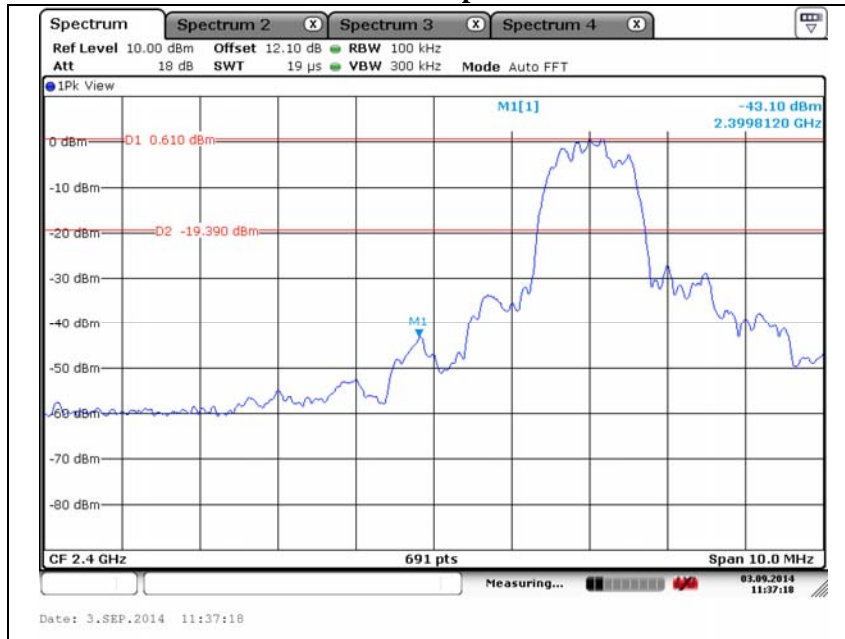

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.



### Bluetooth 2 Mbps – Ch. 39

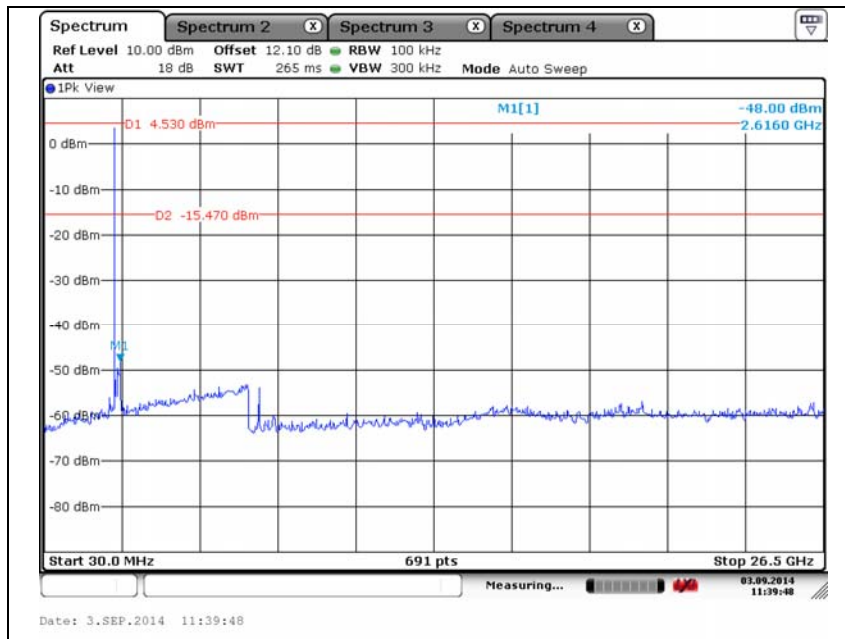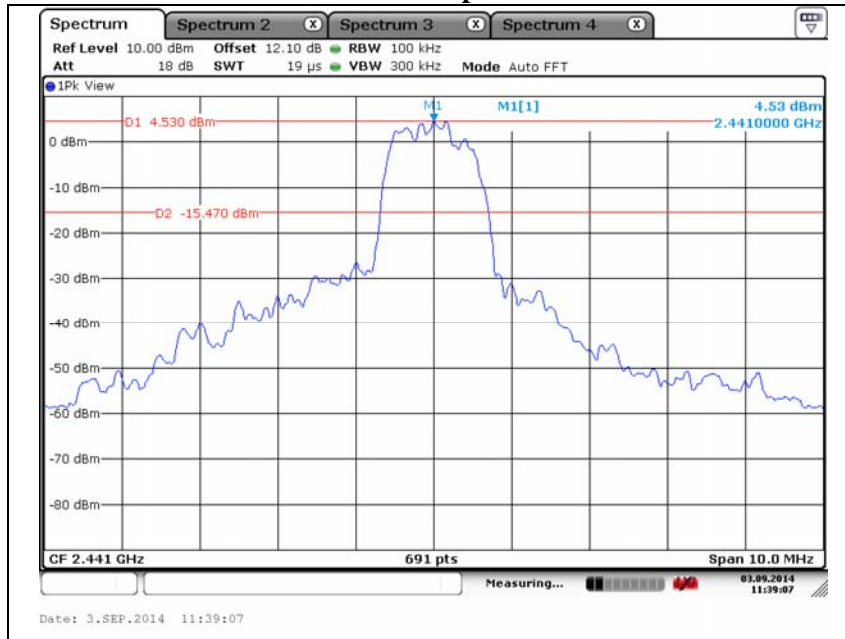

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.




### Bluetooth 2 Mbps – Ch. 78

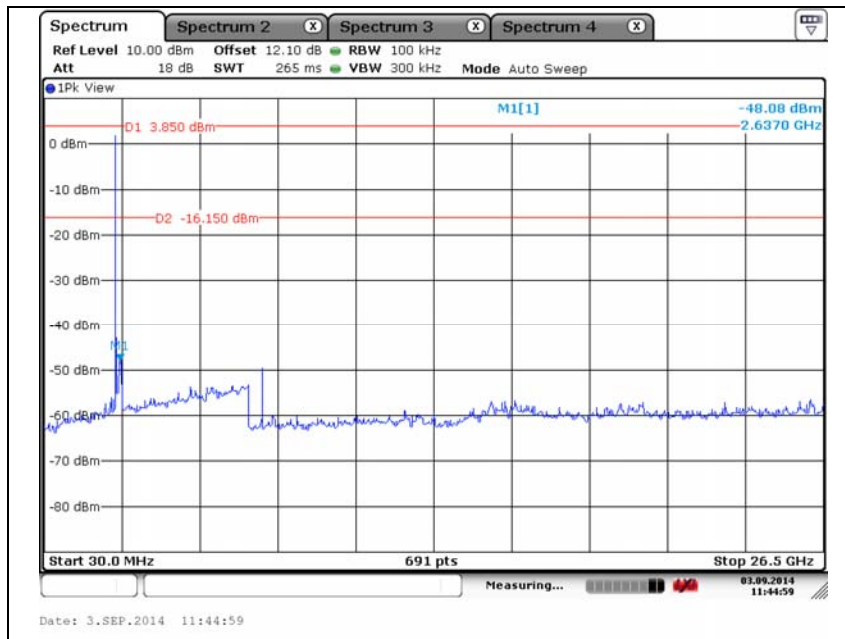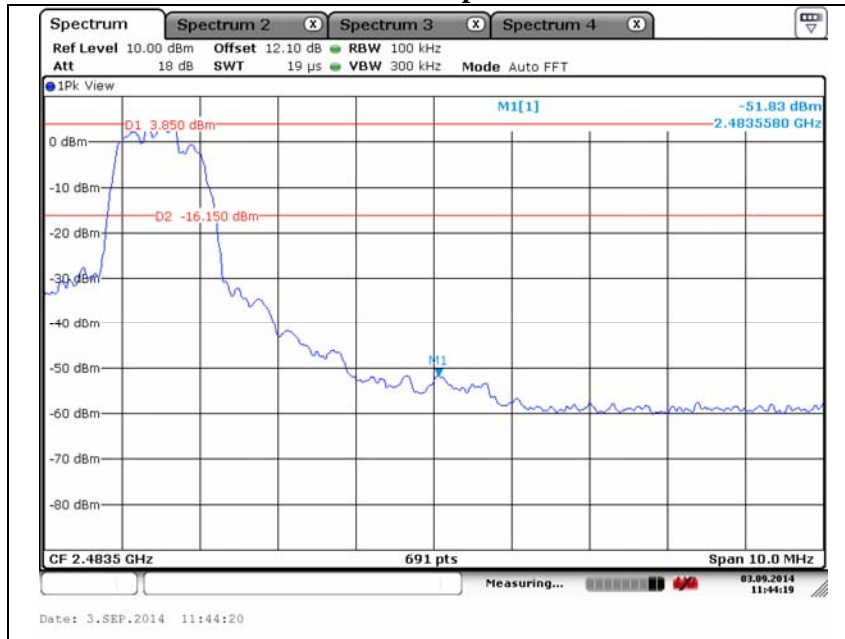


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.



### Bluetooth 1 Mbps Hopping mode

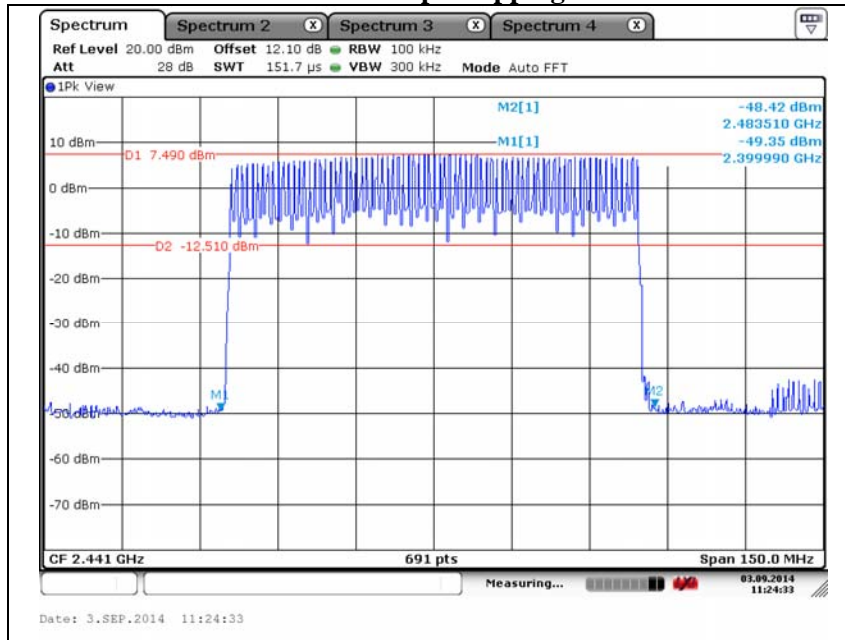


### Bluetooth 2 Mbps Hopping mode

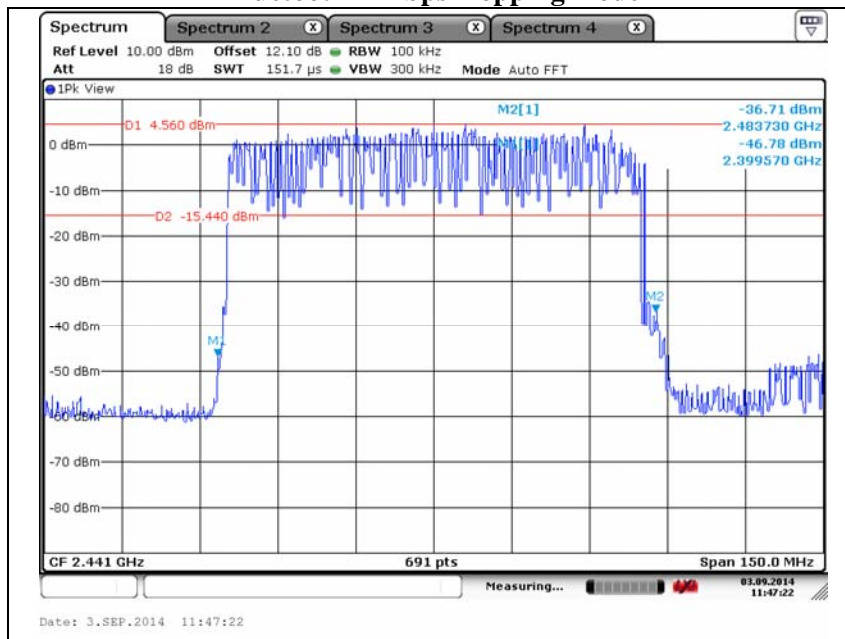

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 3.3. 20 dB bandwidth

#### Test setup



#### Test procedure

DA 00-075

#### Test setting


1. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
2. RBW  $\geq$  1% of the 20 dB bandwidth
3. VBW  $\geq$  RBW
4. Sweep = auto
5. Detector function = peak
6. Sweep = auto couple
7. Trace mode = max hold

#### Limit


Not applicable

Frequency(MHz)	Channel no.	Data rate(Mbps)	Measured bandwidth(kHz)
2 402	00	1	0.942
2 441	39		0.937
2 480	78		0.937
2 402	00	2	1.259
2 441	39		1.233
2 480	78		1.246

### Bluetooth 1 Mbps – Ch. 00

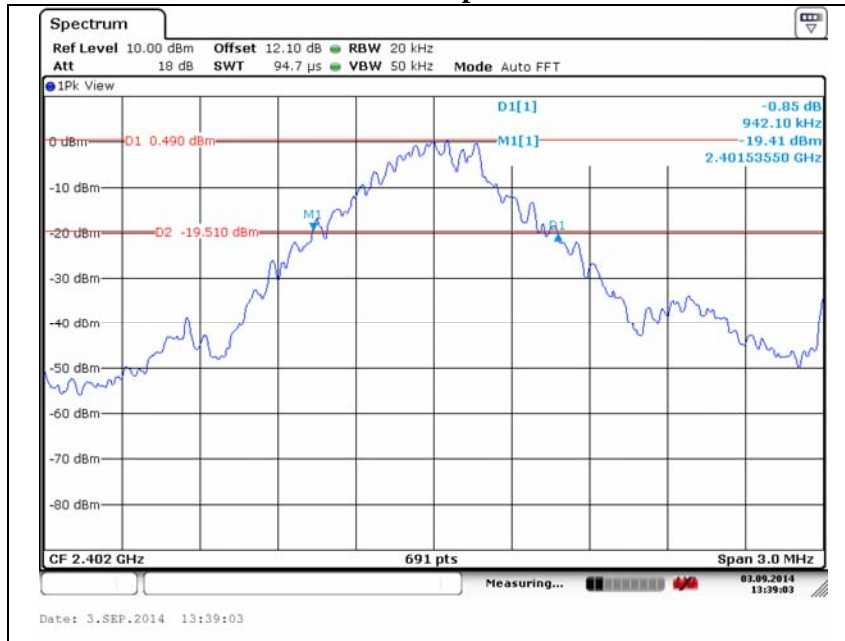


### Bluetooth 1 Mbps – Ch. 39

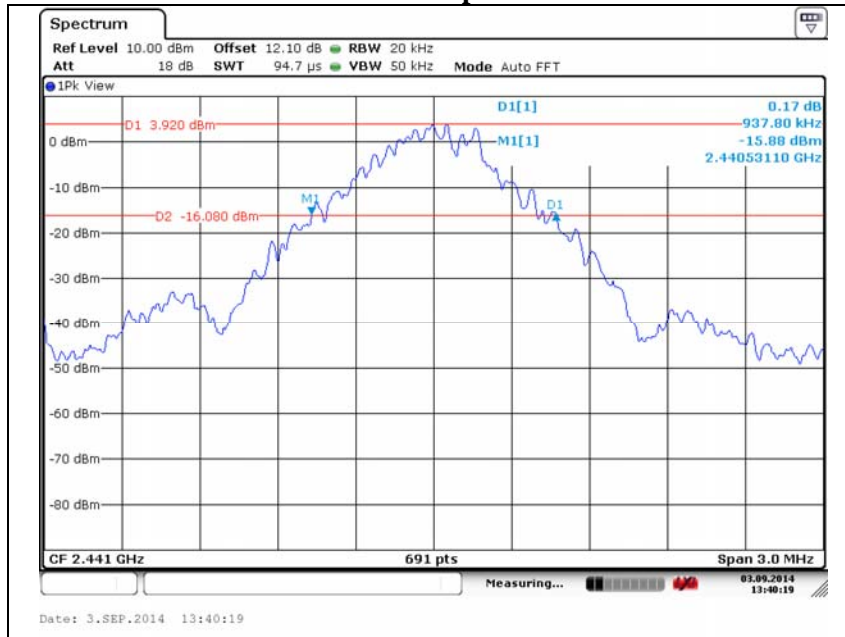


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### Bluetooth 1 Mbps – Ch. 78

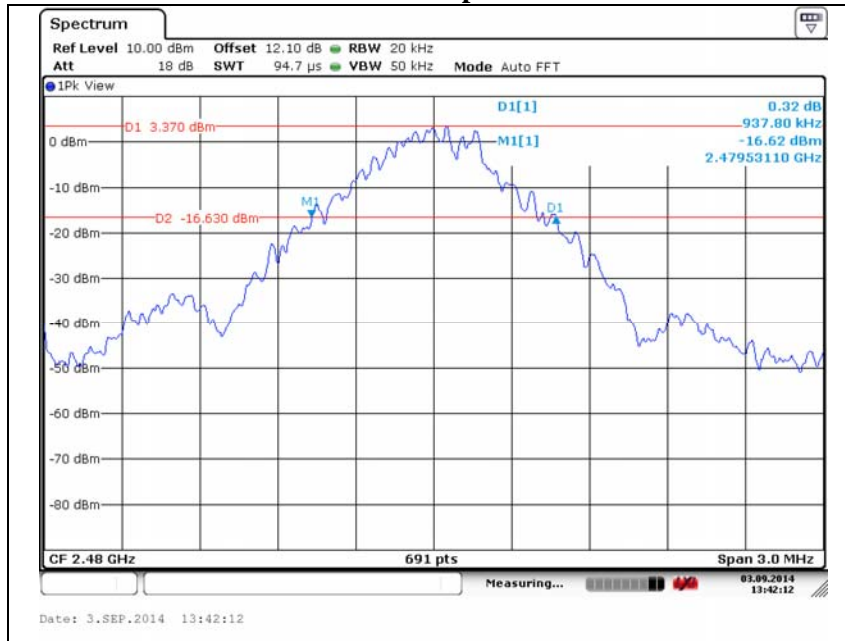


### Bluetooth 2 Mbps – Ch. 00

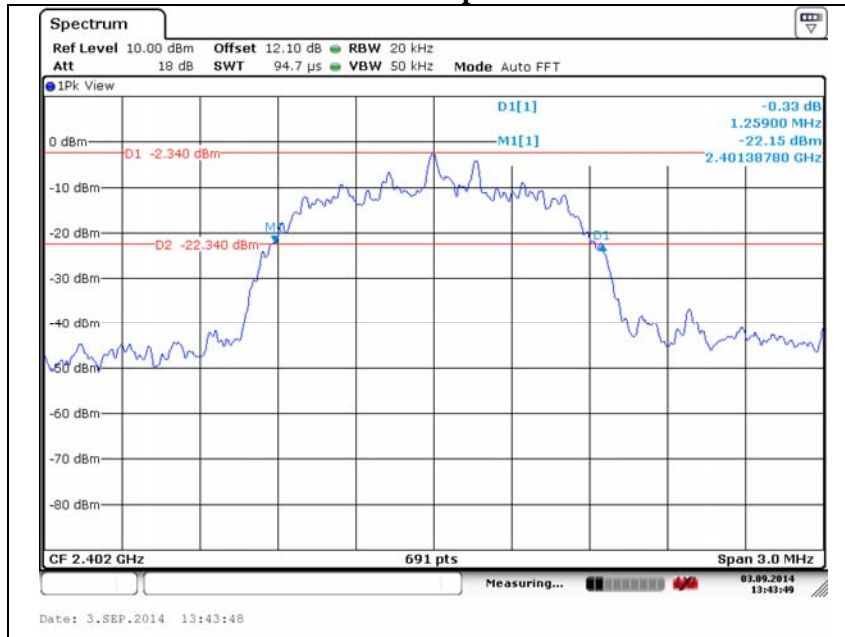


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### Bluetooth 2 Mbps – Ch. 39

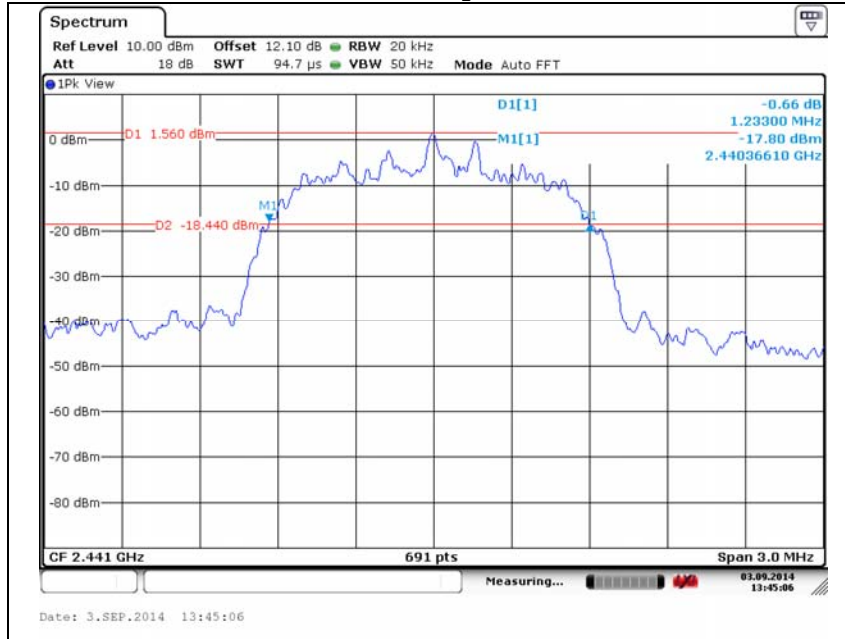


### Bluetooth 2 Mbps – Ch. 78

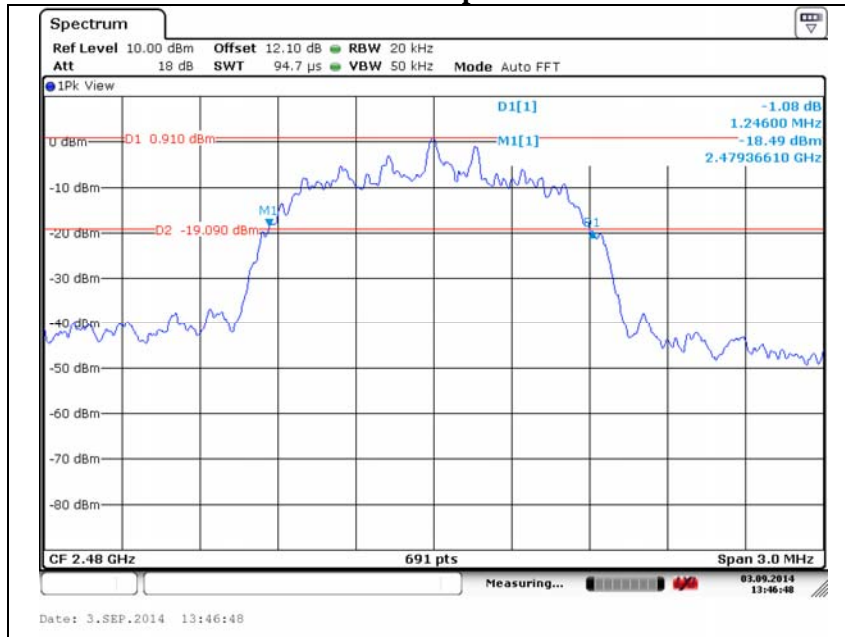

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 3.4. Output power

#### Test setup

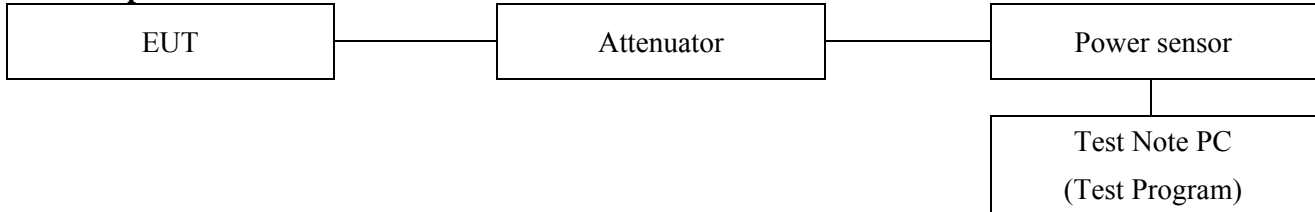

#### Test procedure

DA 00-075

#### Test setting

1. Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
2. RBW > the 20 dB bandwidth of the emission being measured
3. VBW  $\geq$  RBW
4. Sweep = Auto
5. Detector function = Peak
6. Trace = Max hold

#### Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), For frequency hopping systems operating in the 2 400 ~ 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 ~ 5 805 MHz band: 1 Watt.

According to RSS-210 A8.4(2), for frequency hopping systems operating in the band 2400-2483.5 Hz and employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W. Except as provided in Section A8.4 (5), the e.i.r.p. shall not exceed 4 W.



**KES Co., Ltd.**

C-3701, Simin-daero 365-401,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

Test report No.:  
KES-RF-14T0049  
Page (31 ) of (54)


---

Frequency(MHz)	Channel no.	Data rate(Mbps)	Measured power(dBm)
2 402	00	1	5.40
2 441	39		8.58
2 480	78		6.92
2 402	00	2	3.84
2 441	39		7.55
2 480	78		4.52

---

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.

### Bluetooth 1 Mbps – Ch. 00

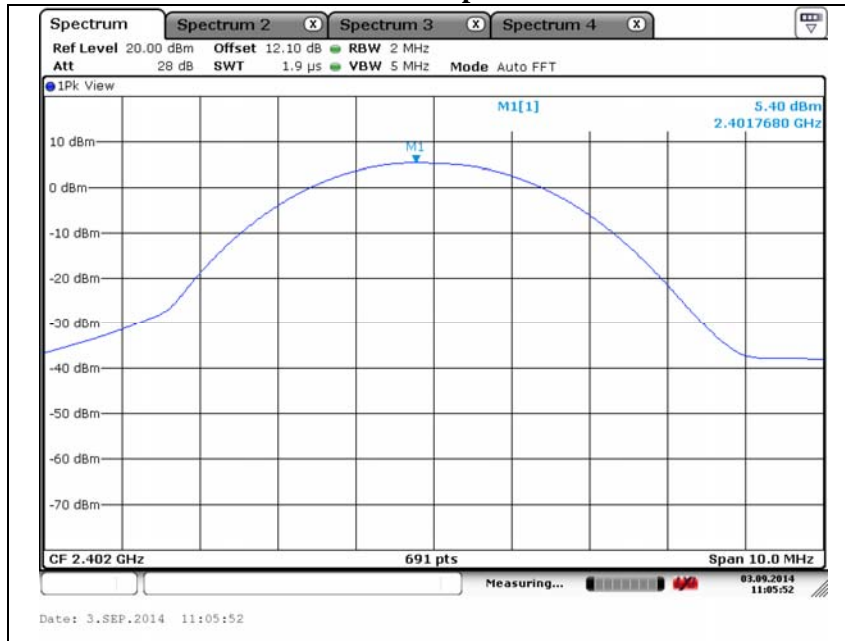


### Bluetooth 1 Mbps – Ch. 39




This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.



### Bluetooth 1 Mbps – Ch. 78

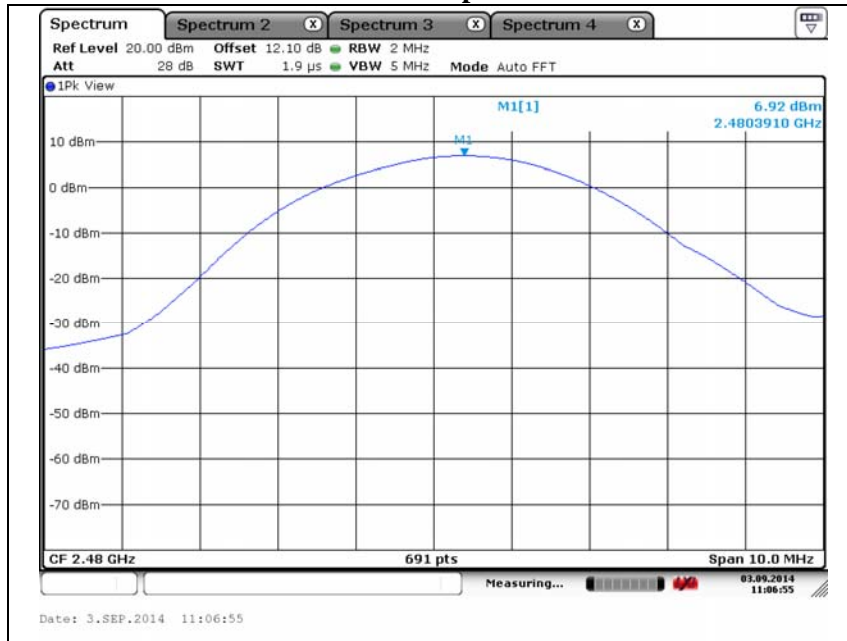


### Bluetooth 2 Mbps – Ch. 00

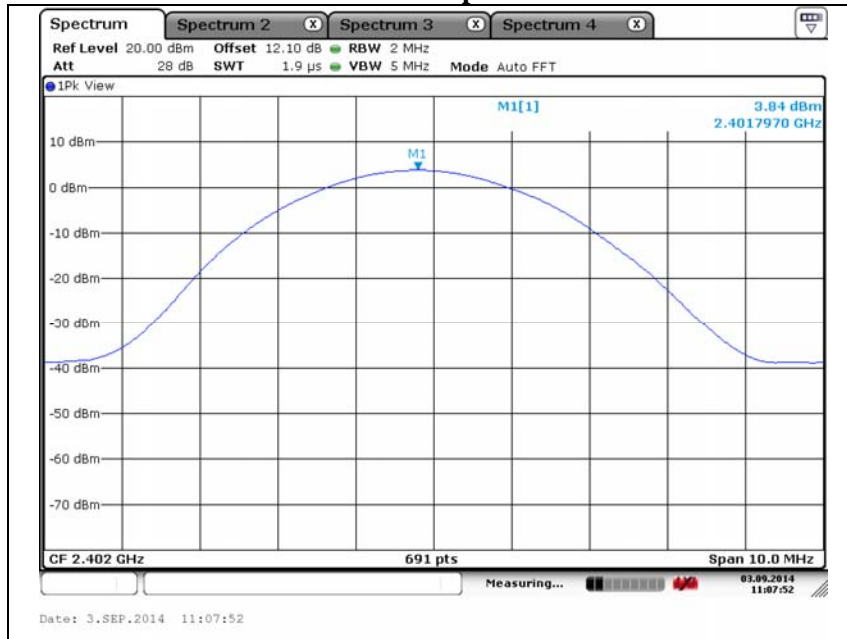


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### Bluetooth 2 Mbps – Ch. 39

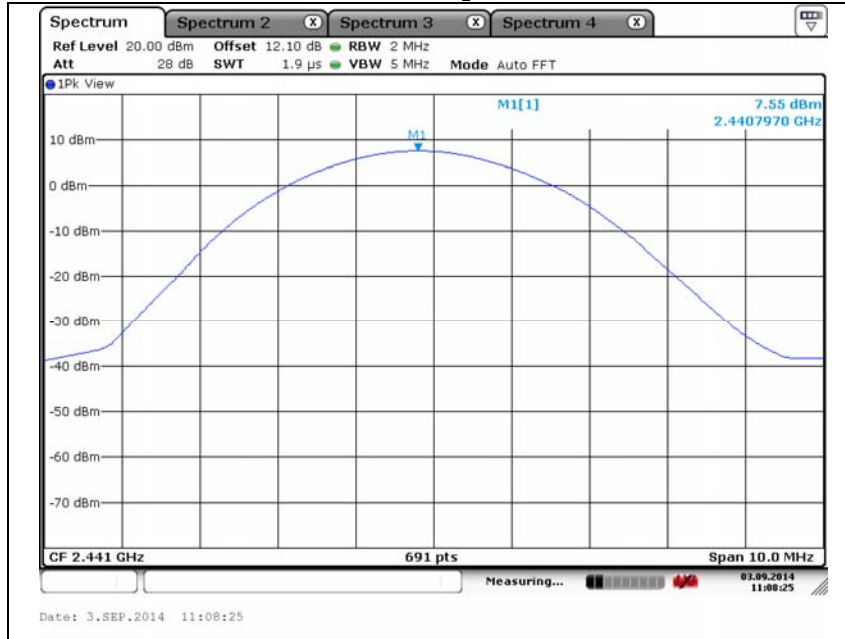


### Bluetooth 2 Mbps – Ch. 78

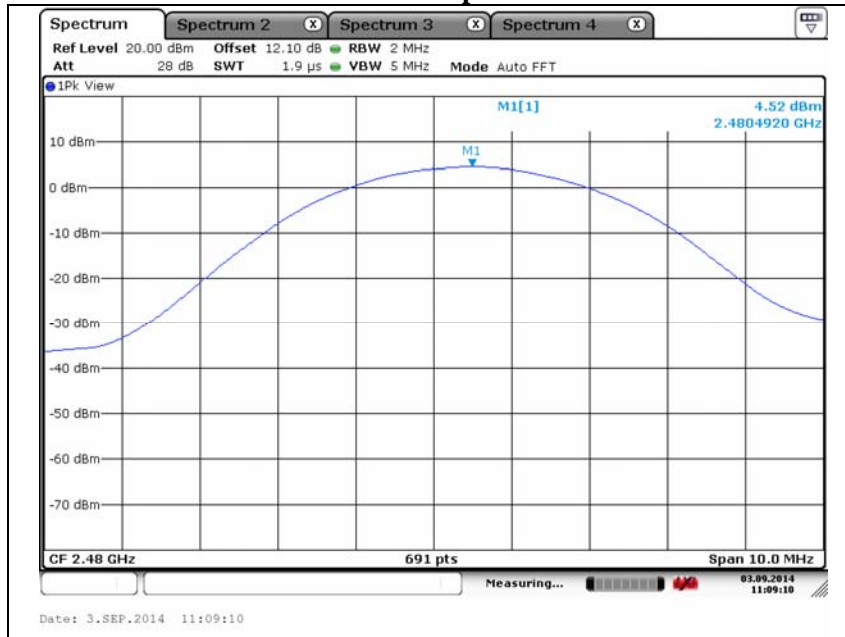

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 3.5. Carrier frequency separation

#### Test setup



#### Test procedure

DA 00-075

#### Test Setting

1. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
2. Span = wide enough to capture the peaks of two adjacent channels
3. Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span
4. Video (or Average) Bandwidth (VBW)  $\geq$  RBW
5. Sweep = auto
6. Detector function = peak
7. Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.


#### Limit

According to 15.247(a)(1), frequency hopping system operating in 2 400 ~ 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


According to RSS-210 A8.1(b), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the -20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the -20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

Frequency(MHz)	Channel no.	Data rate(Mbps)	Channel Separation (MHz)
2 441	39	1	1.002 9.
2 441	39	2	1.007 2

### Bluetooth 1 Mbps – Ch. 39

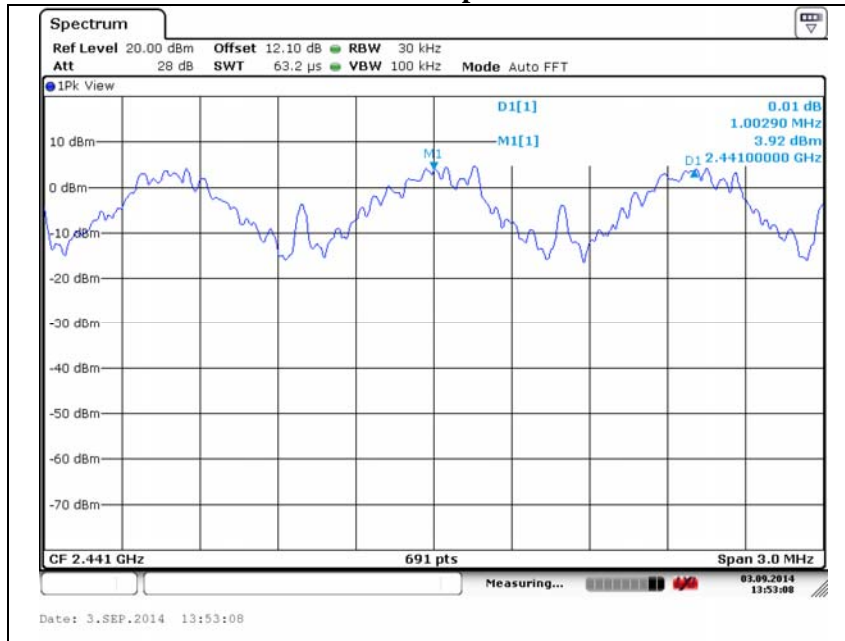

### Bluetooth 2 Mbps – Ch. 39

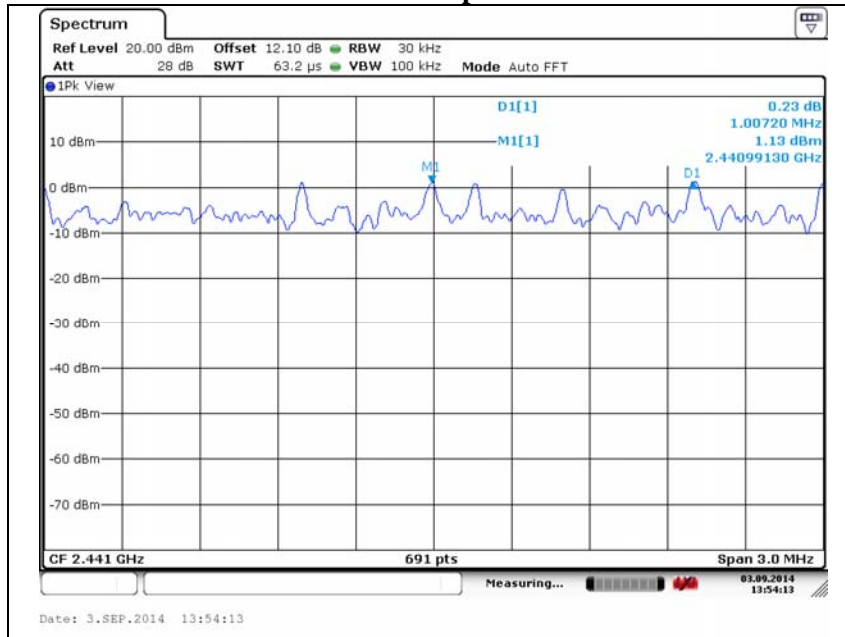

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 3.6. Number of hopping frequency

#### Test setup



#### Test procedure

DA 00-075

#### Test setting

1. The EUT must have its hopping function enabled.
2. Frequency range: 2 400 MHz ~ 2 441.5 MHz, 2 441.5 MHz ~ 2 483.5 MHz
3. Span = the frequency band of operation
4. RBW = 300 kHz ( $\geq 1\%$  of the span)
5. VBW = 1 MHz ( $\geq$  RBW)
6. Sweep = auto
7. Detector function = peak
8. Trace = max hold

All the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



#### Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz bands shall use at least 15 hopping frequencies.

According to RSS-210 A8.1(d), frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.



Data rate(Mbps)	Number of hopping frequency	Limit
1	79	$\geq 15$
2	79	$\geq 15$

### Bluetooth 1 Mbps

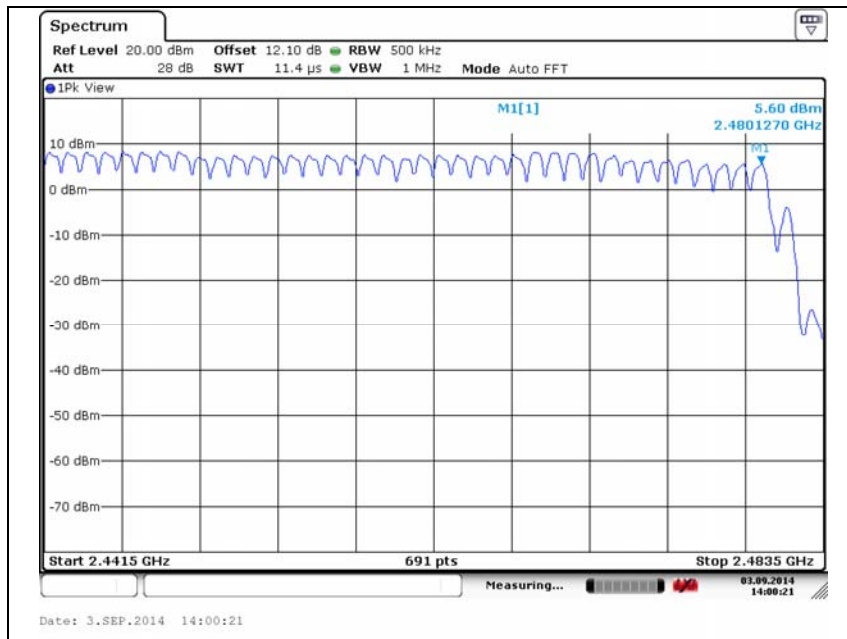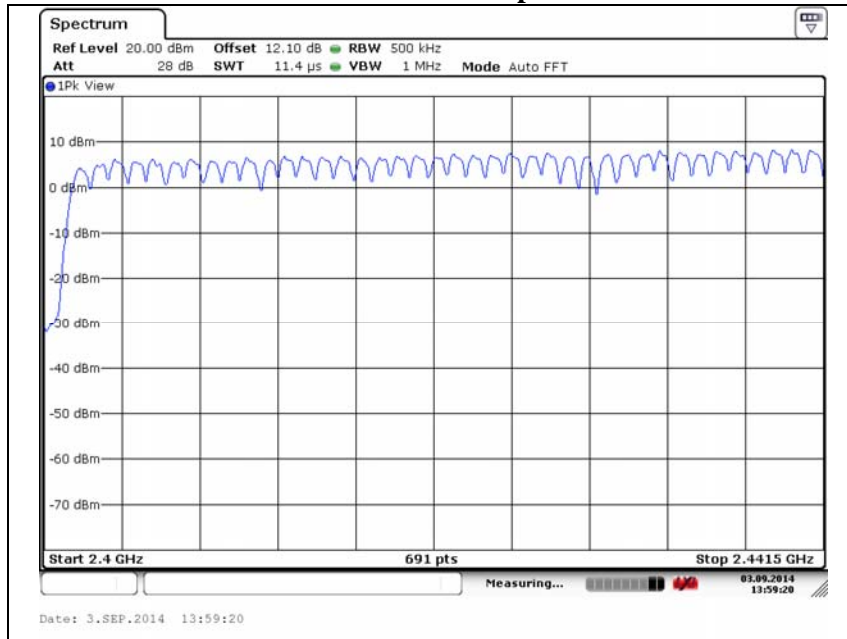

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.


### Bluetooth 2 Mbps

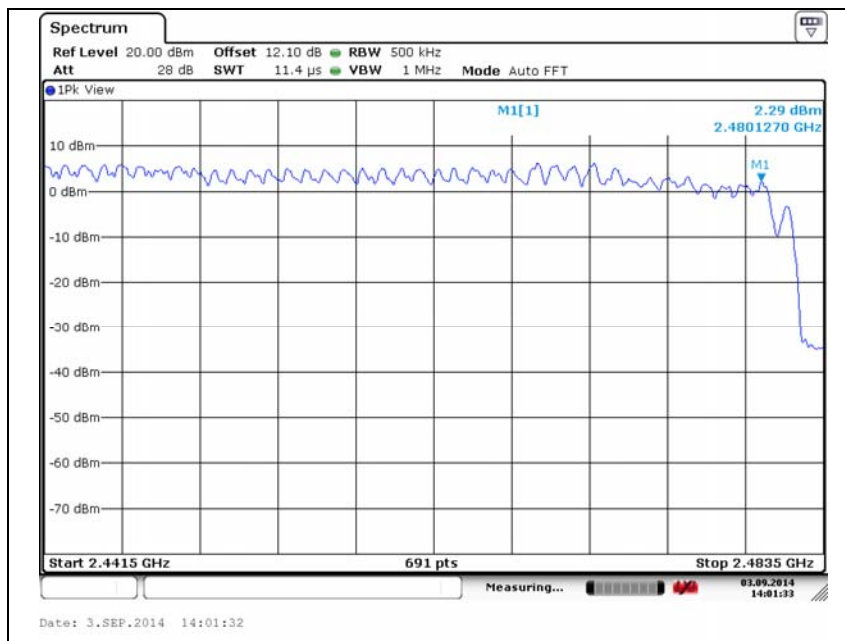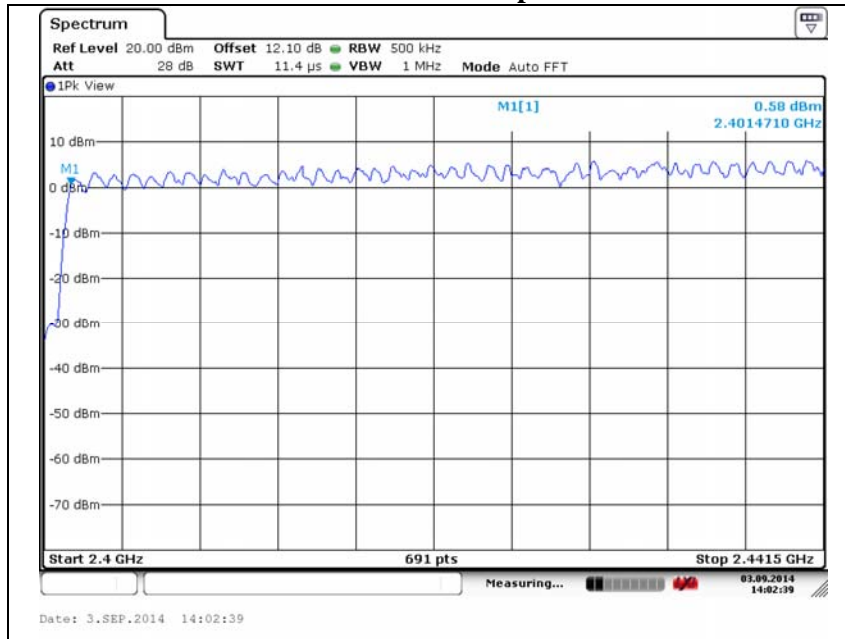

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 3.7. Time of occupancy

#### Test setup



#### Test procedure

DA 00-075

#### Test setting

1. The EUT must have its hopping function enabled.
2. Span = zero span, centered on a hopping channel
4. RBW = 1 MHz
5. VBW = 1 MHz ( $\geq$  RBW)
6. Sweep = as necessary to capture the entire dwell time per hopping channel
7. Detector function = peak
8. Trace = max hold

#### Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

According to RSS-210 A8.1(d), frequency hopping system operating in the 2 400 ~ 2 483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

A period time =  $0.4(s) \times 79 = 31.6(s)$




Time of occupancy on the TX channel in 31.6 sec  
 = time domain slot length × (hop rate ÷ number of hop per channel) × 31.6

Packet type	Frequency (MHz)	Dwell time (ms)	Time of occupancy on the Tx channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx channel in 31.6 sec (ms)
DH1	2 441	0.424	135.7	400
DH3	2 441	1.682	269.1	400
DH5	2 441	2.930	313.5	400
2-DH1	2 441	0.434	138.9	400
2-DH3	2 441	1.688	270.1	400
2-DH5	2 441	2.941	314.7	400


**Note:**

DH1: Dwell time (ms) × [(1 600 ÷ 2) ÷ 79] × 31.6(s) = 135.7 (ms)  
 DH3: Dwell time (ms) × [(1 600 ÷ 4) ÷ 79] × 31.6(s) = 269.1 (ms)  
 DH5: Dwell time (ms) × [(1 600 ÷ 6) ÷ 79] × 31.6(s) = 313.5 (ms)  
 2-DH1: Dwell time (ms) × [(1 600 ÷ 2) ÷ 79] × 31.6(s) = 138.9 (ms)  
 2-DH3: Dwell time (ms) × [(1 600 ÷ 4) ÷ 79] × 31.6(s) = 270.1 (ms)  
 2-DH5: Dwell time (ms) × [(1 600 ÷ 6) ÷ 79] × 31.6(s) = 314.7 ( ms)

**Packet type: DH1**

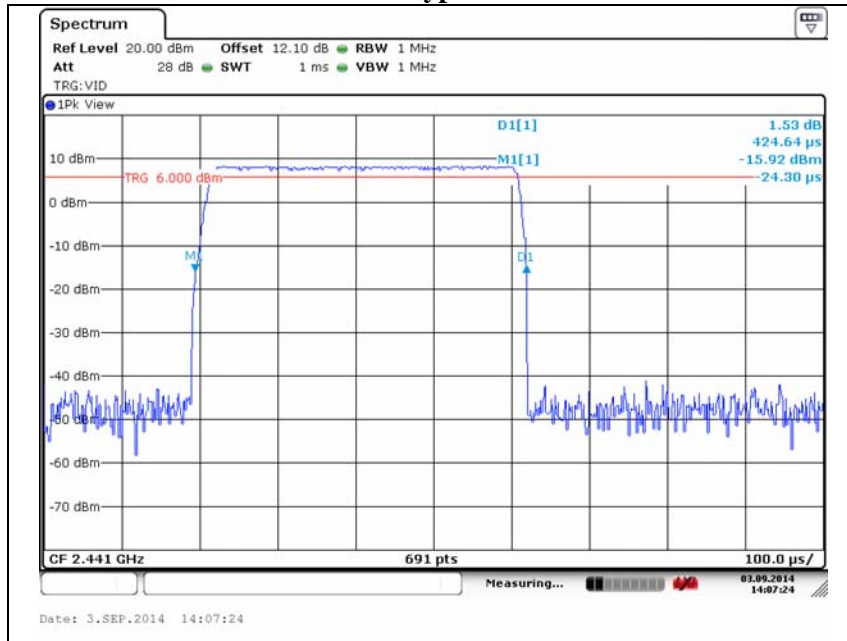


**Packet type: DH3**

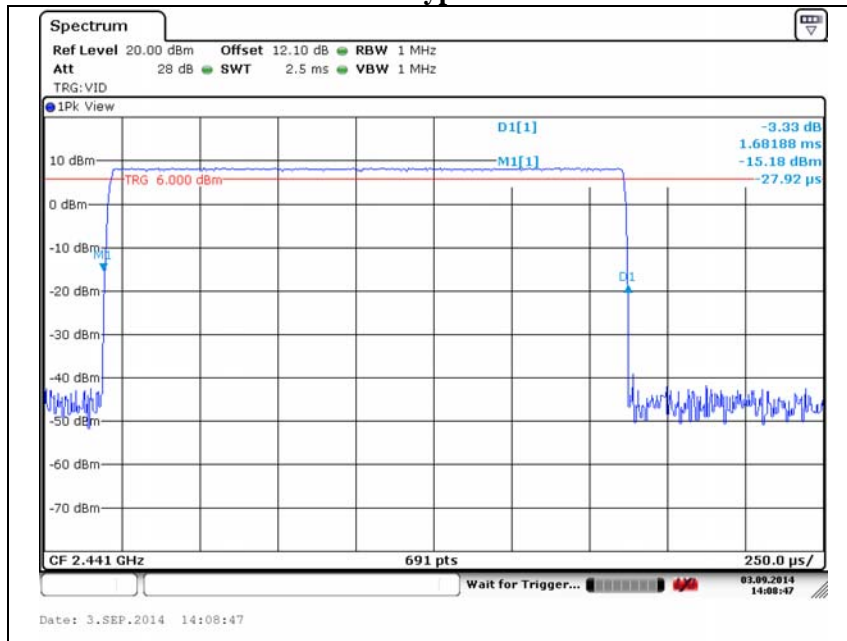


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

**Packet type: DH5**

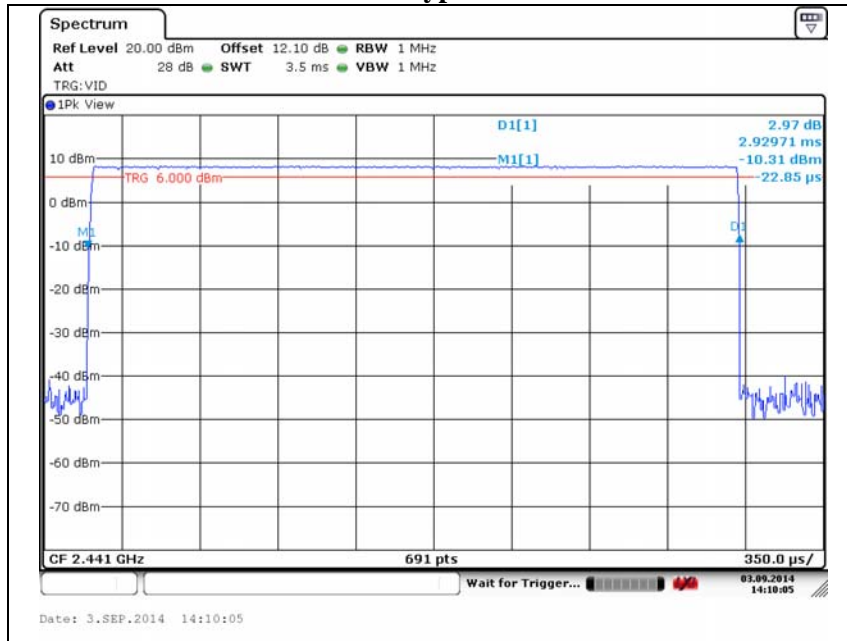


**Packet type: 2-DH1**

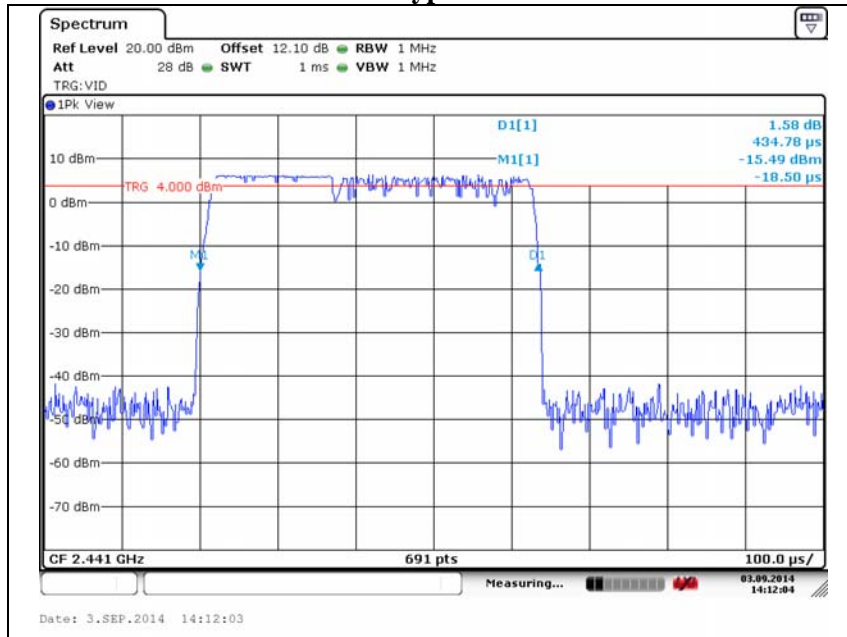


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

**Packet type: 2-DH3**

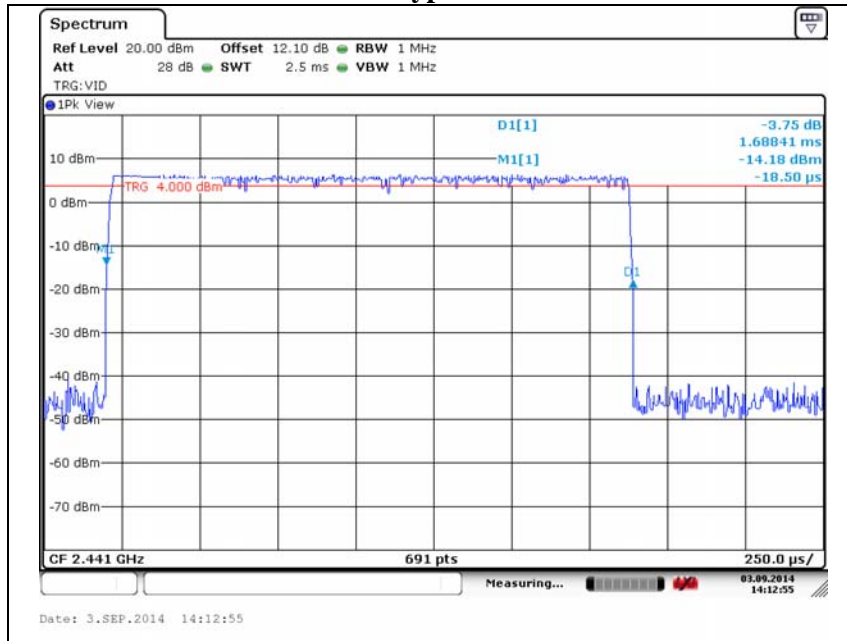

**Packet type: 2-DH5**

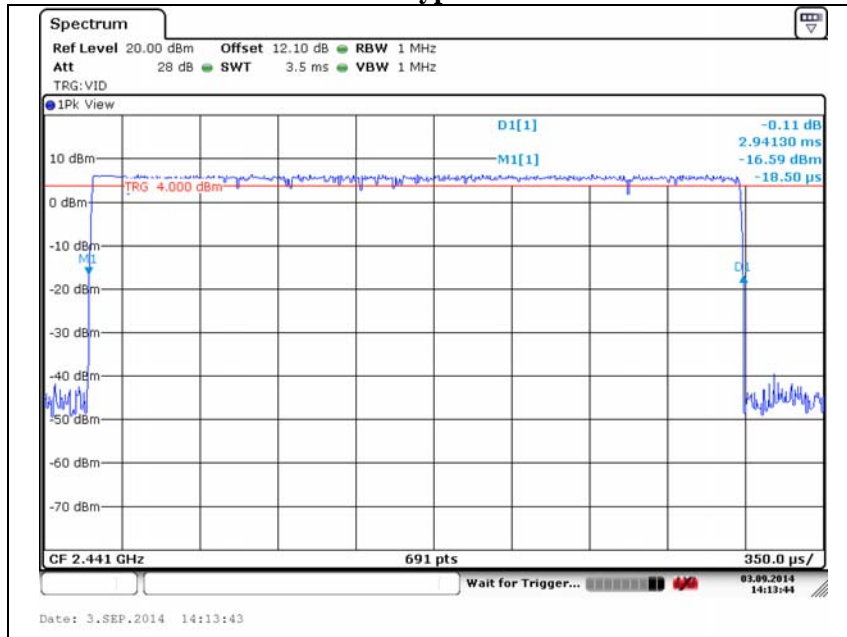

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### 3.8. AC conducted emissions

#### Limit


According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

#### Note:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in GFSK mode using 1Mbps on Channel 00. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150 kHz to 30 MHz are specified in Section 15.207 of the Title 47 CFR.
3. Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).
4. Deviations to the Specifications: None.


**Test results**

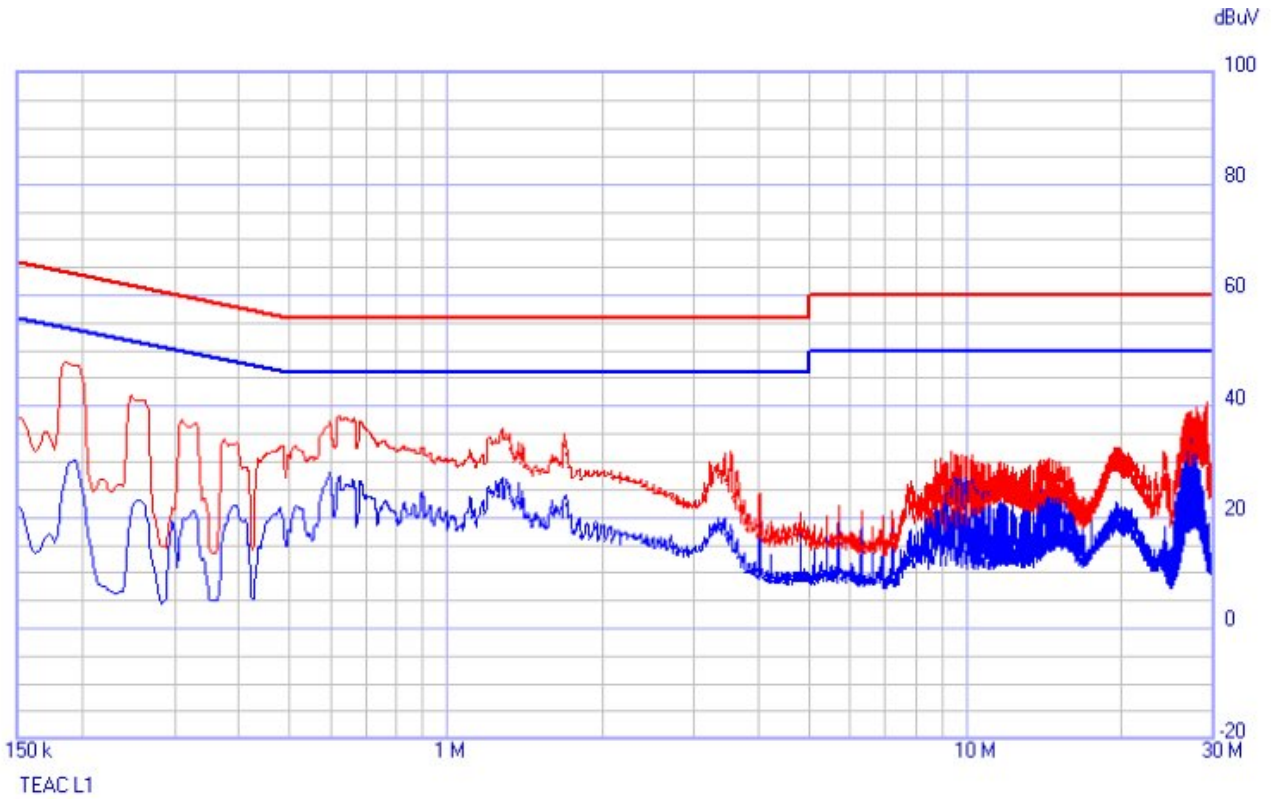

Frequency (MHz)	Result	
	QP (dBμV)	CISPR-AVG (dBμV)
0.190 9	47.46	30.21
0.252 3	41.21	22.73
0.325 9	36.54	21.00
0.620 4	38.12	26.91
1.280 9	34.80	25.47
3.464 9	26.28	16.95
9.554 9	31.38	26.90
19.559 1	32.52	22.54
27.029 5	39.21	34.14

**Note; Hot Line**

Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

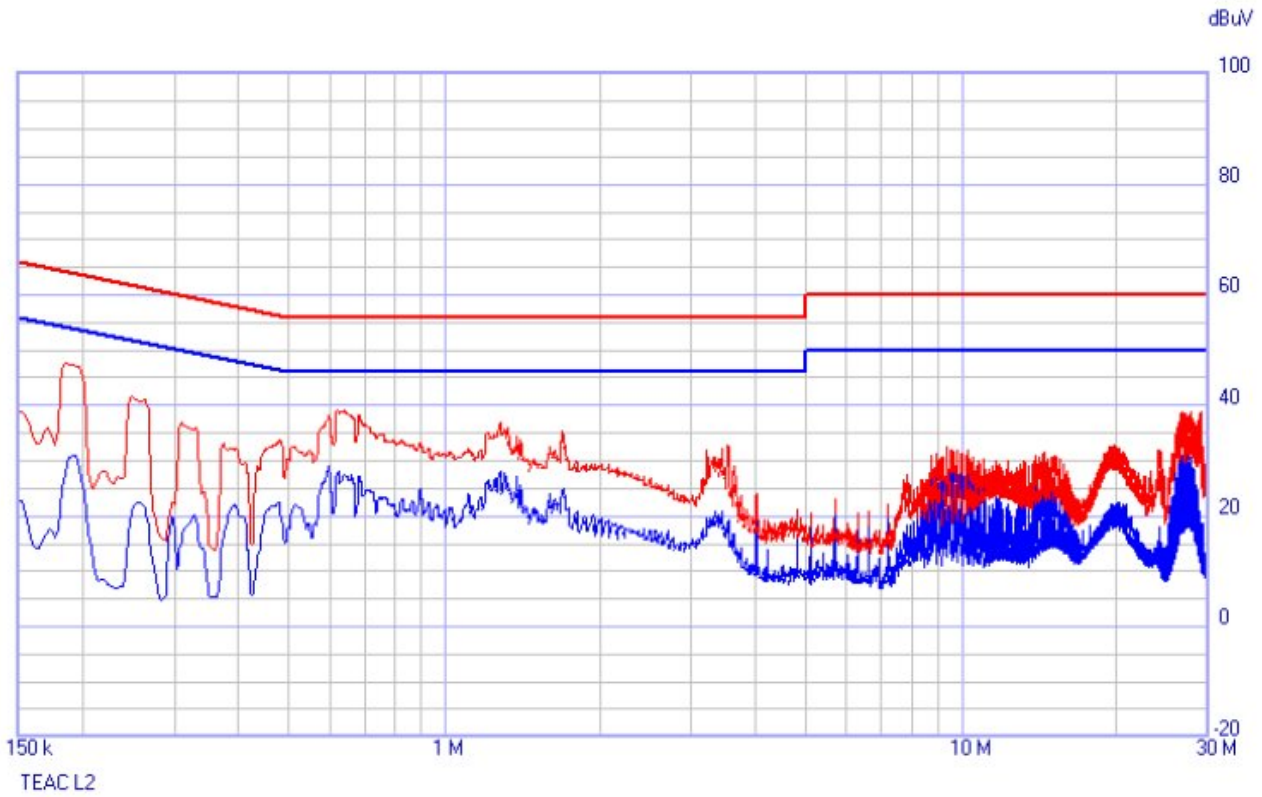


Frequency (MHz)	Result	
	QP (dB $\mu$ V)	CISPR-AVG (dB $\mu$ V)
0.192 9	47.15	30.88
0.252 3	41.12	22.20
0.325 9	35.63	19.81
0.620 4	39.01	27.68
1.280 9	35.62	26.53
3.518 1	32.72	18.91
9.436 3	31.74	27.91
19.937 4	32.31	22.35
27.753 4	38.97	29.78

**Note; Neutral Line**

Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

### 3.9. Occupied bandwidth

#### Test setup



#### Test procedure

1. Use the following spectrum analyzer setting
  - Center frequency: Lowest, middle and highest channels
  - Span = 3 MHz (shall be set to capture all products of the modulation process)
  - RBW = 30 kHz (shall be set to as close to 1% of the selected span)
  - VBW = 100 kHz (RBW x 3)
  - Sweep = auto
  - Detector function = sample

#### Limit

Not applicable

#### Test results


Data rate(Mbps)	Frequency(MHz)	OBW (MHz)
1	2 402	0.872
	2 441	0.859
	2 480	0.863
2	2 402	1.172
	2 441	1.167
	2 480	1.167



### Bluetooth 1 Mbps – Ch. 00




### Bluetooth 1 Mbps – Ch. 39

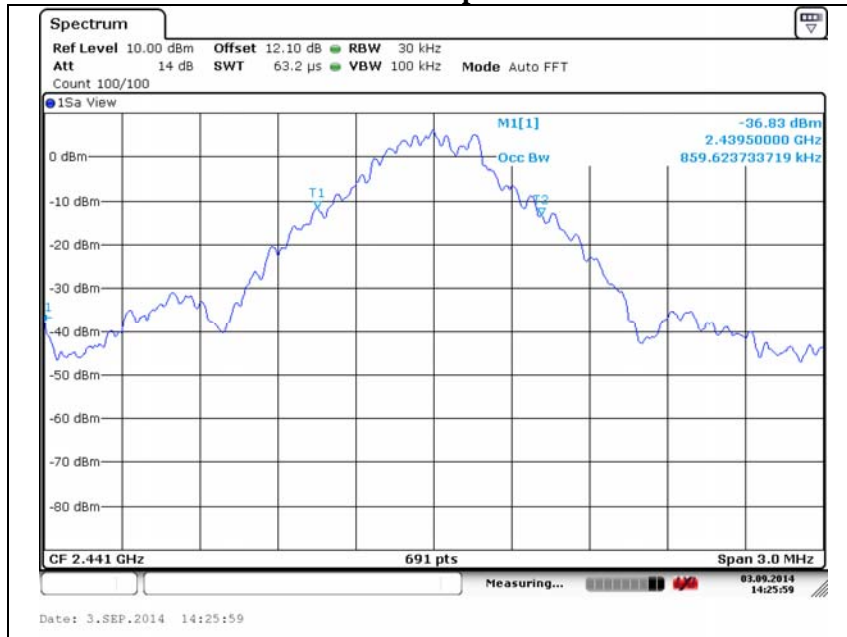


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### Bluetooth 1 Mbps – Ch. 78

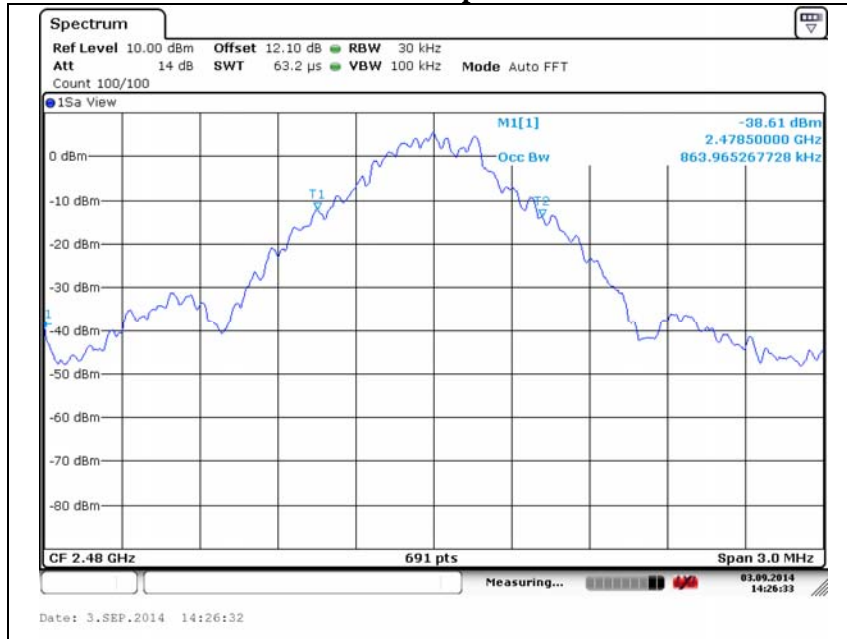

### Bluetooth 2 Mbps – Ch. 00

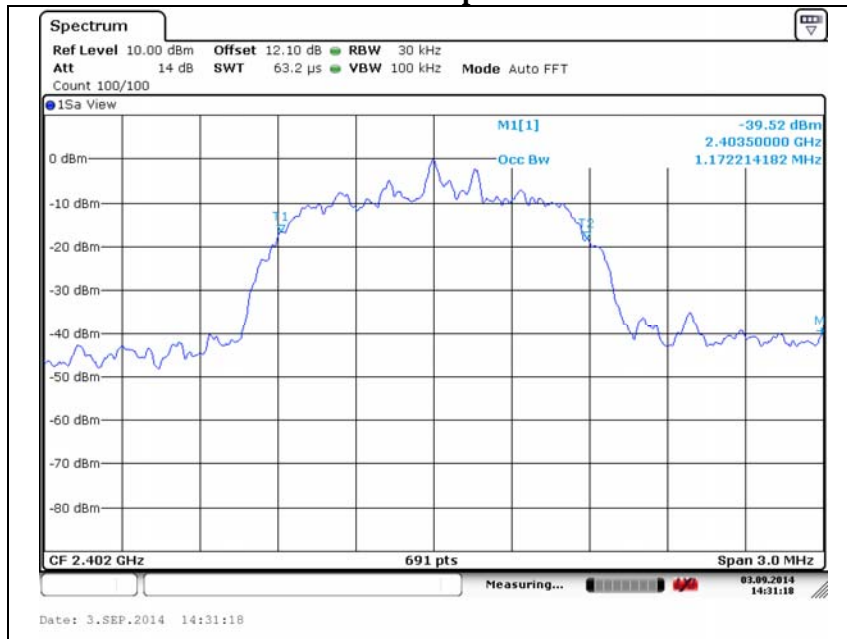


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### Bluetooth 2 Mbps – Ch. 39



### Bluetooth 2 Mbps – Ch. 78

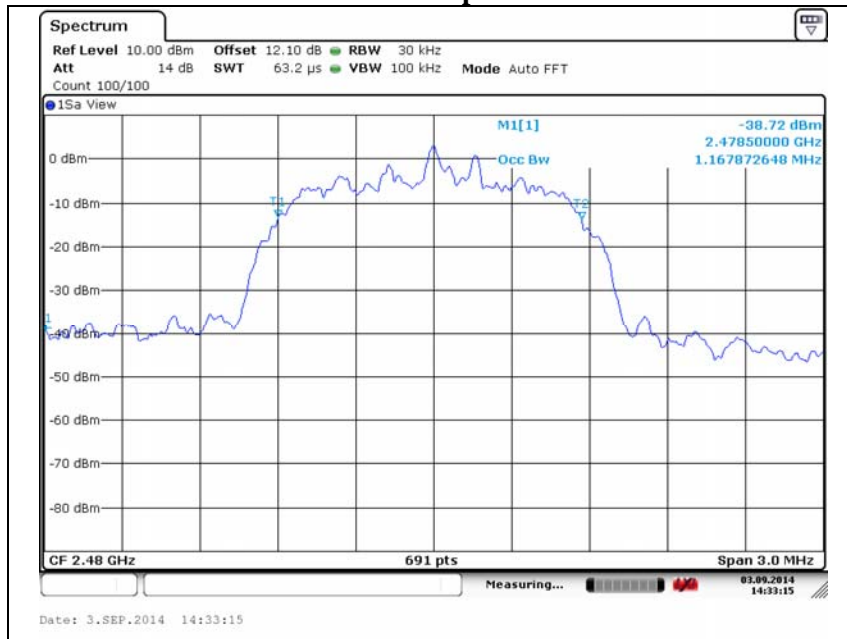

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
 The test results in the report only apply to the tested sample.

### Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV30	100736	1 year	2015.07.24
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2015.04.30
Attenuator	HP	8494B	2630A12857	1 year	2015.04.30
Loop Antenna	R&S	HFH2-Z2.335.4711.52	826532	2 years	2015.04.25
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-385	2 years	2015.05.09
Horn Antenna	A.H. System	SAS-571	414	2 years	2015.02.28
Horn antenna	Schwarzbeck	BBHA 9170	BBHA9170551	2 years	2015.09.04
High Pass Filter	Wainwright Instrument	WHJS3000-10TT	1	1 year	2015.07.23
Preamplifier	HP	8447F	2805A02570	1 year	2015.04.30
Broadband coaxial preamplifier	Schwarzbeck Mess-Elektronik	BB9718	9168-385	2 years	2015.09.23
Preamplifier	Schwarzbeck	BBV 9721	9721-003	2 years	2015.09.04
EMI Test Receiver	R & S	ESVS10	826008/014	1 year	2015.04.09
EMI Receiver/Signal Analyzer	Narda S.T.S / PMM	PMM 9010F	020WW31006	1 year	2015.04.04
LISN	R&S	ENV216	101137	1 year	2015.02.21

### Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	Samsung Electronics Co., Ltd.	RV518	HTK991NC600207R

**Appendix B. Test setup photo**

**Radiated spurious**



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.

### AC conducted emission



This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.  
The test results in the report only apply to the tested sample.