

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM130300138001 Page: 1 of 79

FCC REPORT

Application No:	SZEM1303001380RF
Applicant:	TEAC Corporation
Manufacturer:	Dongguan TEAC Electronics CO., Ltd.
Factory:	Dongguan TEAC Electronics CO., Ltd.
Product Name:	CD Player with Bluetooth Audio Receiver
Model No.(EUT):	CD-200BT
FCC ID:	XEGCD-200BT
Standards:	47 CFR Part 15, Subpart C (2012)
Date of Receipt:	2013-03-27
Date of Test:	2013-04-22 to 2013-05-22
Date of Issue:	2013-06-06
Test Result:	PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM130300138001 Page: 2 of 79

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 3 of 79

3 Contents

1	CC	OVER PAGE	1
2	TE	EST SUMMARY	2
3		ONTENTS	
4		ENERAL INFORMATION	
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF EUT	
	4.3	TEST ENVIRONMENT	6
	4.4	DESCRIPTION OF SUPPORT UNITS	6
	4.5	TEST LOCATION	6
	4.6	Test Facility	7
	4.7	DEVIATION FROM STANDARDS	
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.10	Equipment List	
_			
5	TE	EST RESULTS AND MEASUREMENT DATA	14
	TE 5.1	EST RESULTS AND MEASUREMENT DATA	
		Antenna Requirement Conducted Emissions	14 15
	5.1	ANTENNA REQUIREMENT	14 15
	5.1 5.2	Antenna Requirement Conducted Emissions	14 15 19
	5.1 5.2 5.3	Antenna Requirement Conducted Emissions Conducted Peak Output Power	
	5.1 5.2 5.3 5.4	Antenna Requirement Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth	
	5.1 5.2 5.3 5.4 5.5	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time	
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions	
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions	
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence	
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence Radiated Spurious Emission	
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11 5.2	ANTENNA REQUIREMENT CONDUCTED EMISSIONS CONDUCTED PEAK OUTPUT POWER 20DB OCCUPY BANDWIDTH CARRIER FREQUENCIES SEPARATION HOPPING CHANNEL NUMBER DWELL TIME BAND-EDGE FOR RF CONDUCTED EMISSIONS SPURIOUS RF CONDUCTED EMISSIONS PSEUDORANDOM FREQUENCY HOPPING SEQUENCE RADIATED SPURIOUS EMISSION 11.1 Radiated Emission below 1GHz	
	5.1 5.2 5.3 5.4 5.5 5.6 5.7 5.8 5.9 5.10 5.11 5.2	ANTENNA REQUIREMENT Conducted Emissions Conducted Peak Output Power 20dB Occupy Bandwidth Carrier Frequencies Separation Hopping Channel Number Dwell Time Band-edge for RF Conducted Emissions Spurious RF Conducted Emissions Pseudorandom Frequency Hopping Sequence Radiated Spurious Emission	



Report No.: SZEM130300138001 Page: 4 of 79

4 General Information

4.1 Client Information

Applicant:	TEAC Corporation
Address of Applicant:	1-47 Ochiai. Tama-shi, Tokyo, Japan, 206-8530
Manufacturer:	Dongguan TEAC Electronics CO., Ltd.
Address of Manufacturer:	Shang Sha, Chang An District, Dongguan City, Guangdong, P.R. China
Factory:	Dongguan TEAC Electronics CO., Ltd.
Address of Factory:	Shang Sha, Chang An District, Dongguan City, Guangdong, P.R. China

4.2 General Description of EUT

Name:	CD Player with Bluetooth Audio Receiver
Model No.:	CD-200BT
Trade mark:	TASCAM
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V3.0+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Fixed production
Test Power Grade:	255, 255 (manufacturer declare)
Test Software of EUT:	CSR Bluesuite (manufacturer declare)
Antenna Type	Integral
Antenna Gain	2.4dBi
Test Voltage:	AC 120V 60Hz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 5 of 79

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 6 of 79

4.3 Test Environment

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	53 % RH	
Atmospheric Pressure:	1005 mbar	

4.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Amplifier	Sony	BSX100A

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 7 of 79

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

4.7 Deviation from Standards

None.

4.8 Abnormalities from Standard Conditions

None.

4.9 Other Information Requested by the Customer

None.



Report No.: SZEM130300138001 Page: 8 of 79

4.10 Equipment List

	Conducted Emission						
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2013-06-10		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2013-10-24		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2013-05-16		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2013-11-10		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2013-11-10		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2013-11-10		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2013-05-16		
8	Coaxial Cable	SGS	N/A	SEL0025	2013-05-29		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24		



Report No.: SZEM130300138001 Page: 9 of 79

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2014-06-10		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2013-10-24		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2014-05-16		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2013-11-10		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2013-11-10		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2013-11-10		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2014-05-16		
8	Coaxial Cable	SGS	N/A	SEL0025	2014-05-29		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 10 of 79

	RE in Chamber						
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10		
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-16		
3	EMI Test software	AUDIX	E3	SEL0050	N/A		
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24		
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24		
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24		
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-16		
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24		
9	Coaxial cable	SGS	N/A	SEL0027	2013-05-59		
10	Coaxial cable	SGS	N/A	SEL0189	2013-05-29		
11	Coaxial cable	SGS	N/A	SEL0121	2013-05-29		
12	Coaxial cable	SGS	N/A	SEL0178	2013-05-29		
13	Band filter	Amindeon	82346	SEL0094	2013-05-16		
14	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24		
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24		
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24		
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2013-05-16		
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24		
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2013-06-04		



Report No.: SZEM130300138001 Page: 11 of 79

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2014-06-10	
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2014-05-16	
3	EMI Test software	AUDIX	E3	SEL0050	N/A	
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24	
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24	
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24	
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2014-05-16	
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24	
9	Coaxial cable	SGS	N/A	SEL0027	2014-05-59	
10	Coaxial cable	SGS	N/A	SEL0189	2014-05-29	
11	Coaxial cable	SGS	N/A	SEL0121	2014-05-29	
12	Coaxial cable	SGS	N/A	SEL0178	2014-05-29	
13	Band filter	Amindeon	82346	SEL0094	2014-05-16	
14	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24	
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24	
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24	
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2014-05-16	
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24	
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2014-06-04	

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 12 of 79

	RF connected test				
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2013-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2013-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2013-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2013-05-16
8	Band filter	amideon	82346	SEL0094	2013-05-16
9	POWER METER	R & S	NRVS	SEL0144	2013-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2013-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 13 of 79

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2013-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2014-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2014-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2014-05-16
8	Band filter	amideon	82346	SEL0094	2014-05-16
9	POWER METER	R & S	NRVS	SEL0144	2014-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2014-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24

Note: The calibration interval is one year, all the instruments are valid.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 14 of 79

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
-----------------------	--

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.4dBi.

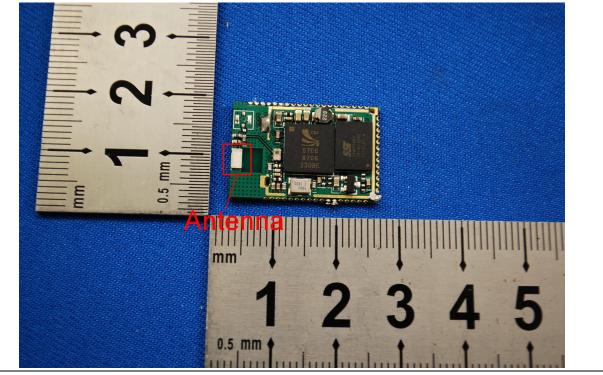




Report No.: SZEM130300138001 Page: 15 of 79

Test Requirement:	47 CFR Part 15C Section 15.	207				
Test Method:	ANSI C63.10: 2009					
Test Frequency Rang	e: 150kHz to 30MHz	150kHz to 30MHz				
Limit:		lBuV)				
	Frequency range (MHz)	Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
	* Decreases with the logarithr	n of the frequency.		1		
Test Procedure:	 room. 2) The EUT was connected to Impedance Stabilization N impedance. The power calconnected to a second LIS reference plane in the same measured. A multiple sock power cables to a single L exceeded. 3) The tabletop EUT was placed on the horizontal g ground reference plane. A placed on the horizontal g 4) The test was performed with of the EUT shall be 0.4 m vertical ground reference plane. The LISN unit under test and bonded mounted on top of the group between the closest points the EUT and associated er 5) In order to find the maximum 	 * Decreases with the logarithm of the frequency. 1) The mains terminal disturbance voltage test was conducted in a shielde room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50µH + 5Ω linea impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not 				

5.2 Conducted Emissions



Report No.: SZEM130300138001 Page: 16 of 79

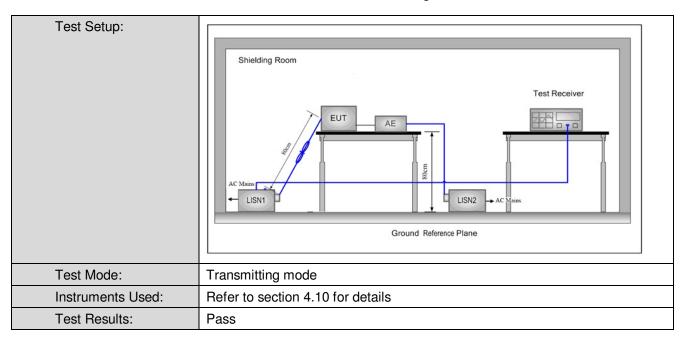


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.




Report No.: SZEM130300138001 Page: 17 of 79

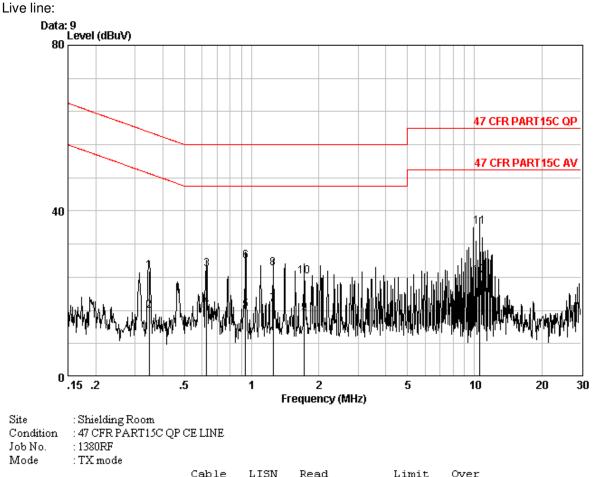

		Cable	LISN	Read		Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.34646	0.01	9.75	15.77	25.53	59.05	-33.52	QP
2	0.34646	0.01	9.75	6.05	15.81	49.05	-33.24	Average
3	0.62715	0.02	9.80	16.06	25.88	56.00	-30.12	QP
4	0.62715	0.02	9.80	7.20	17.02	46.00	-28.98	Average
5	0.93810	0.02	9.80	6.35	16.17	46.00	-29.83	Average
6	0.93810	0.02	9.80	18.04	27.86	56.00	-28.14	QP
7	1.249	0.02	9.80	7.56	17.38	46.00	-28.62	Average
8	1.249	0.02	9.80	16.24	26.06	56.00	-29.94	QP
9	1.725	0.02	9.80	5.41	15.23	46.00	-30.77	Average
10	1.725	0.02	9.80	14.39	24.21	56.00	-31.79	QP
11	10.508	0.01	9.92	26.28	36.21	60.00	-23.79	QP
12	10.508	0.01	9.92	14.41	24.35	50.00	-25.65	Average



Report No.: SZEM130300138001 Page: 18 of 79

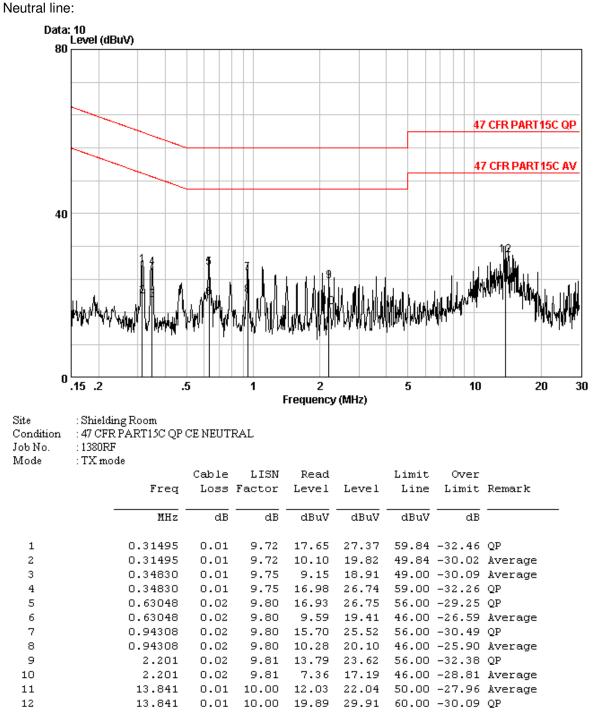

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM130300138001 Page: 19 of 79

5.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)			
Test Method:	ANSI C63.10:2009			
Test Setup:	Spectrum Analyzer Image: Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	30dBm			
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.			
Instruments Used:	Refer to section 4.10 for details			
Test Results:	Pass			




Report No.: SZEM130300138001 Page: 20 of 79

Measurement Data						
GFSK mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	4.02	30.00	Pass			
Middle	3.92	30.00	Pass			
Highest	4.19	30.00	Pass			
	π/4DQPSK m	ode				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	2.63	30.00	Pass			
Middle	1.88	30.00	Pass			
Highest	2.11	30.00	Pass			
	8DPSK mod	de				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	3.02	30.00	Pass			
Middle	2.38	30.00	Pass			
Highest	2.67	30.00	Pass			

Measurement Data





Report No.: SZEM130300138001 Page: 21 of 79

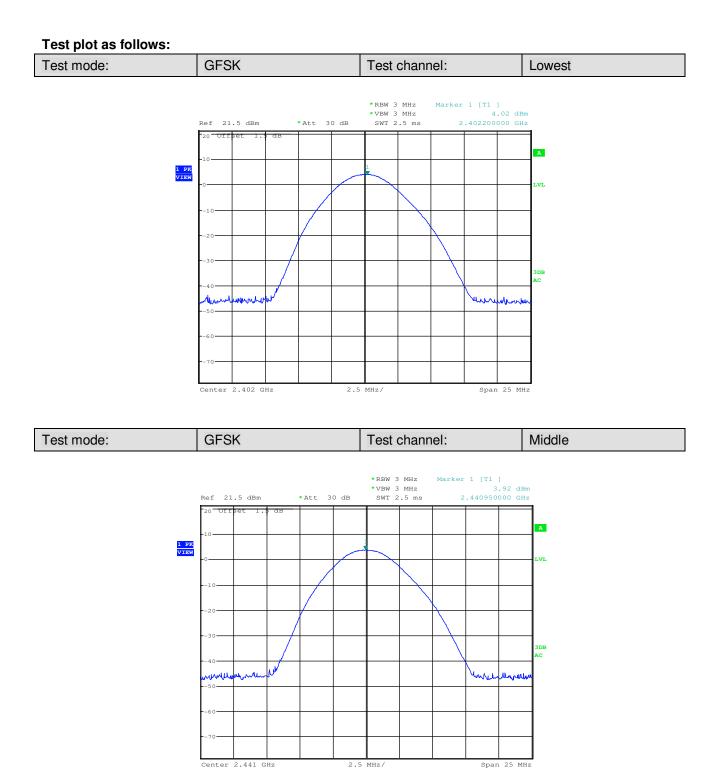




Report No.: SZEM130300138001 Page: 22 of 79

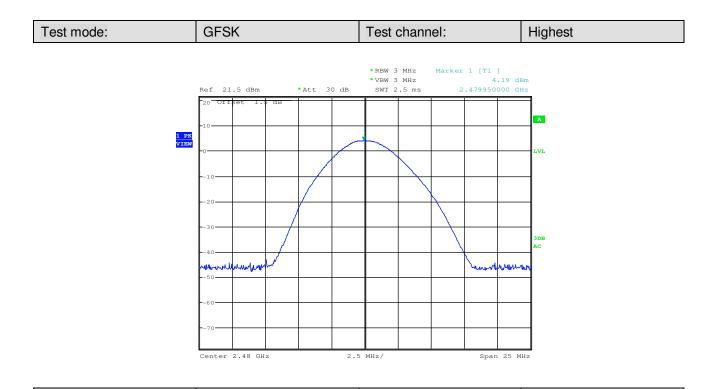


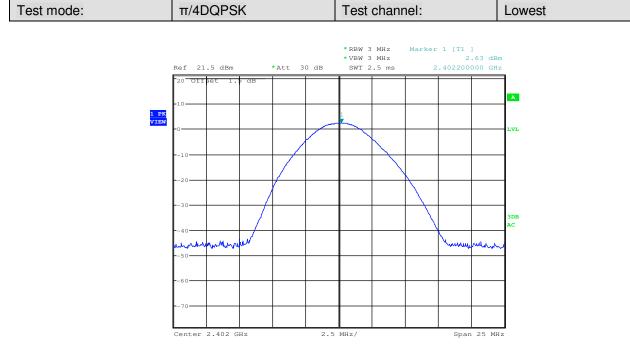




Report No.: SZEM130300138001 Page: 23 of 79

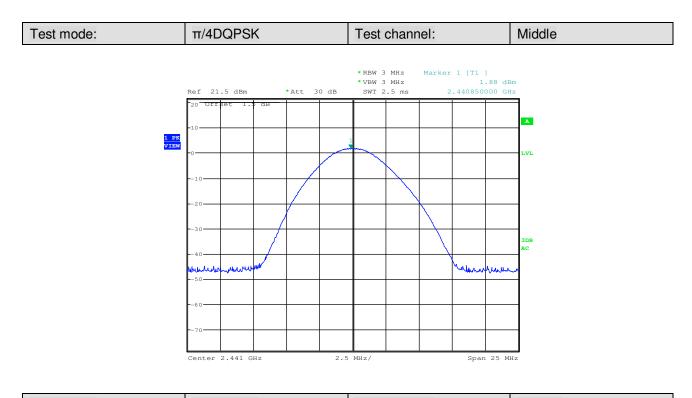


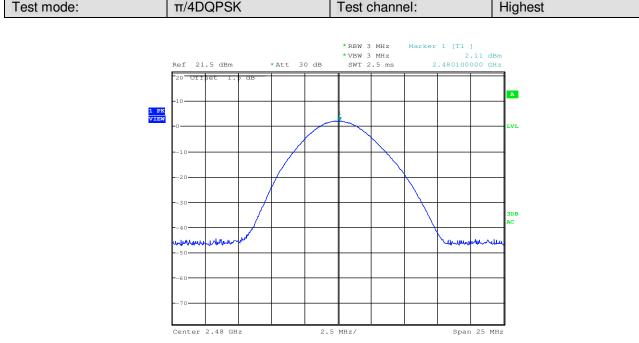




Report No.: SZEM130300138001 Page: 24 of 79

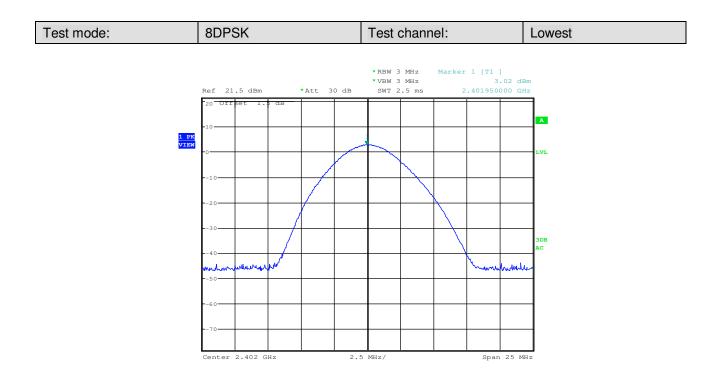

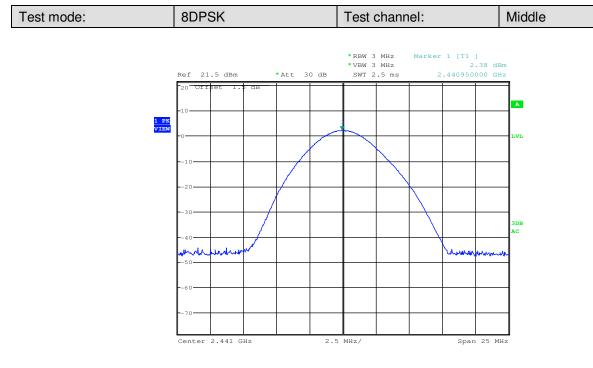



Report No.: SZEM130300138001 Page: 25 of 79

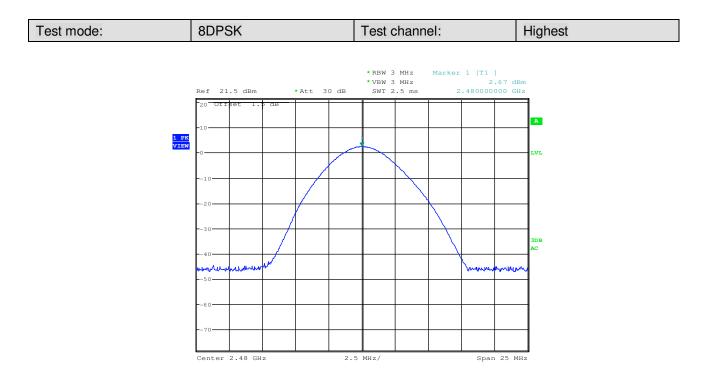



Report No.: SZEM130300138001 Page: 26 of 79

5.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)			
Test Method:	ANSI C63.10:2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Limit:	NA			
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.			
Instruments Used:	Refer to section 4.10 for details			
Test Results:	Pass			


Measurement Data


Test sharral	20dB Occupy Bandwidth (kHz)			
Test channel	GFSK	π/4DQPSK	8DPSK	
Lowest	876	1218	1212	
Middle	852	1224	1218	
Highest	864	1224	1218	



Report No.: SZEM130300138001 Page: 27 of 79

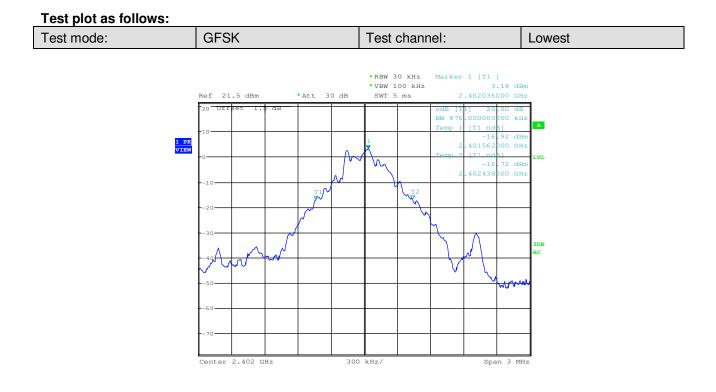





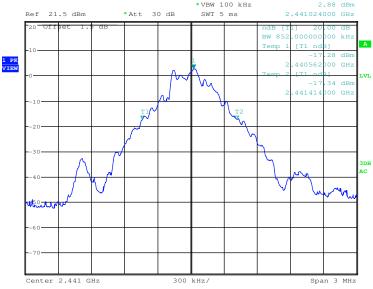




Report No.: SZEM130300138001 Page: 28 of 79

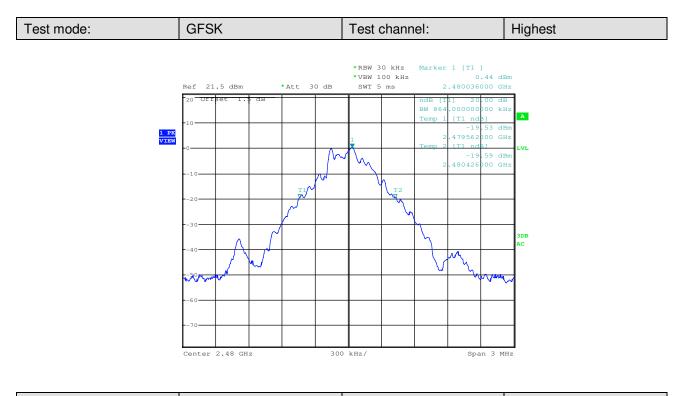


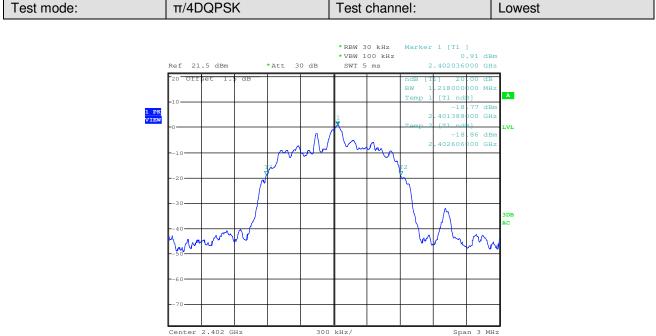




Report No.: SZEM130300138001 Page: 29 of 79

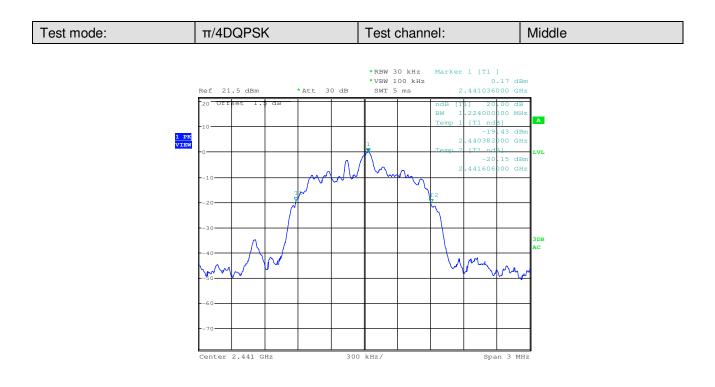


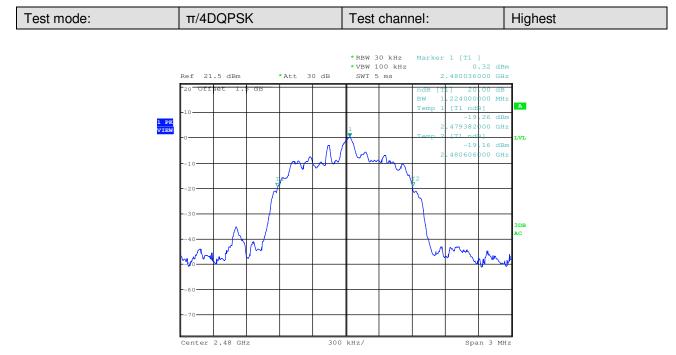




Report No.: SZEM130300138001 Page: 30 of 79

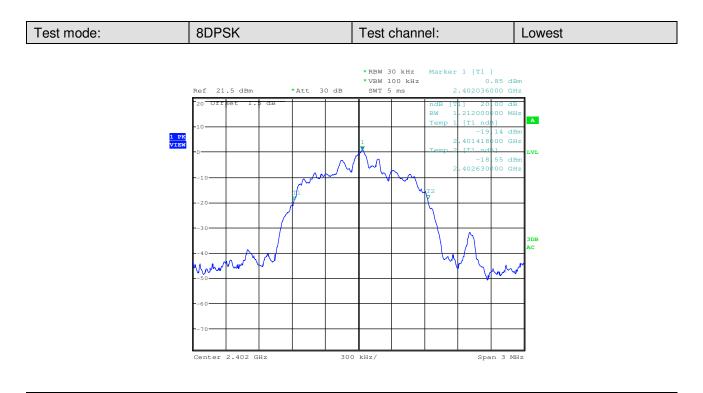

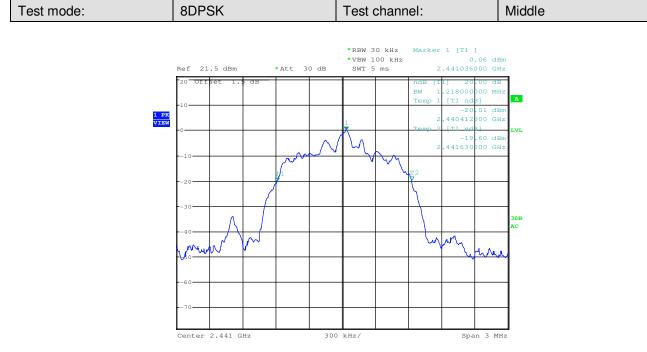



Report No.: SZEM130300138001 Page: 31 of 79

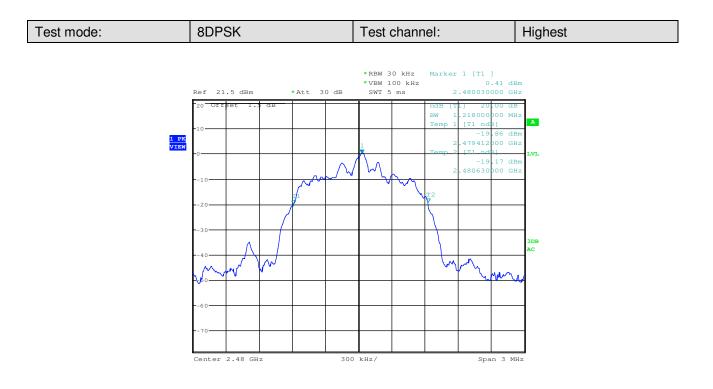



Report No.: SZEM130300138001 Page: 32 of 79

5.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)			
Test Method:	ANSI C63.10:2009			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table			
	Ground Reference Plane			
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)			
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type			
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.			
Instruments Used:	Refer to section 4.10 for details			
Test Results:	Pass			



Report No.: SZEM130300138001 Page: 33 of 79

Measurement Data


GFSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1005	≥584	Pass		
Middle	1005	≥584	Pass		
Highest	1005	≥584	Pass		
	π/4DQPSK m	ode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1005	≥816	Pass		
Middle	1005	≥816	Pass		
Highest	1005	≥816	Pass		
	8DPSK mo	de			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1005	≥812	Pass		
Middle	1010	≥812	Pass		
Highest	1005	≥812	Pass		

Note: According to section 5.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	876	584
π/4DQPSK	1224	816
8DPSK	1218	812





Report No.: SZEM130300138001 Page: 34 of 79

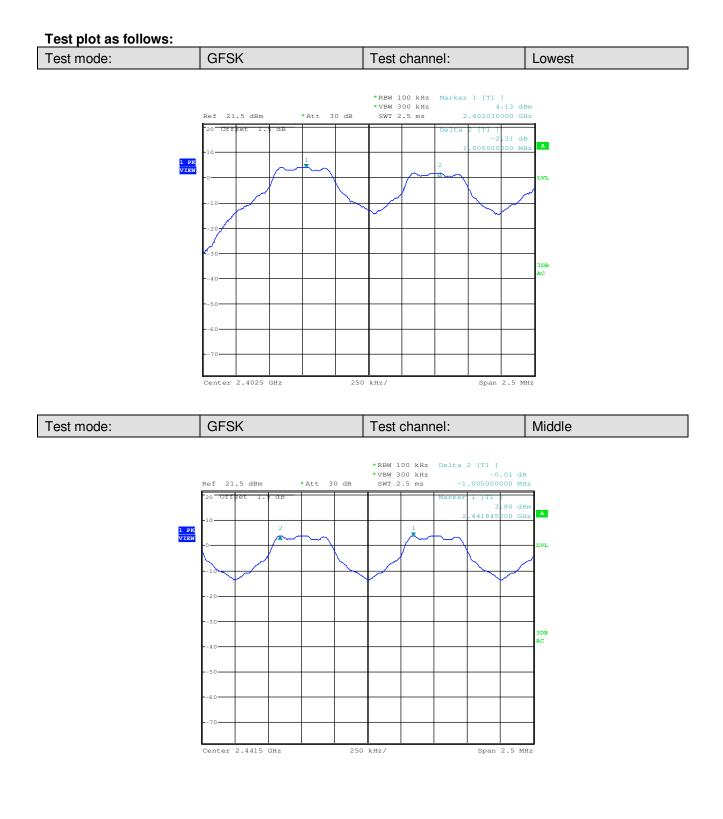




Report No.: SZEM130300138001 Page: 35 of 79

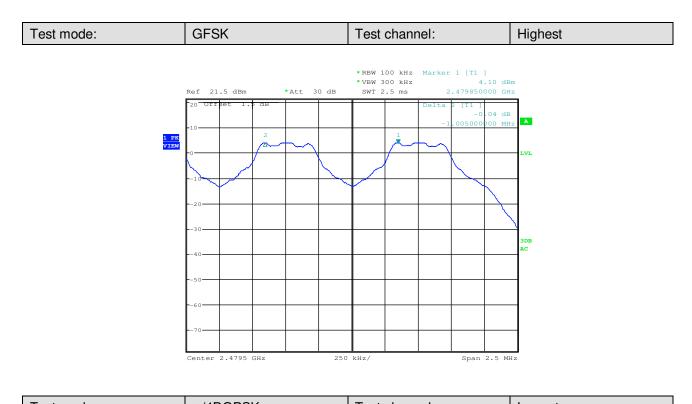

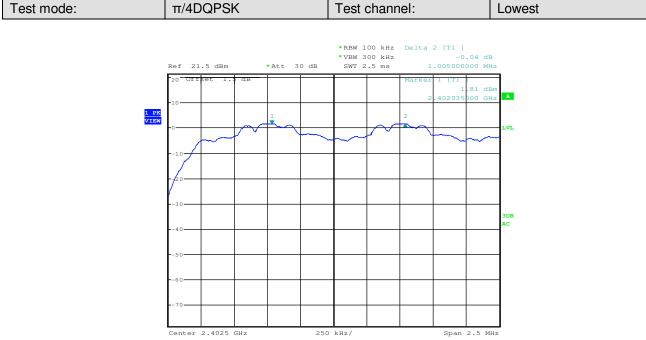




Report No.: SZEM130300138001 Page: 36 of 79

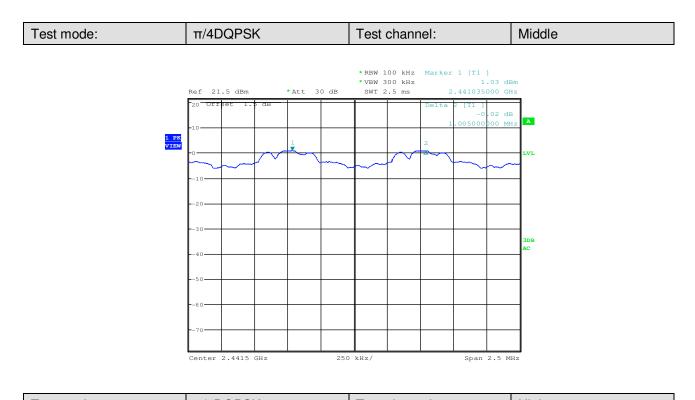







Report No.: SZEM130300138001 Page: 37 of 79

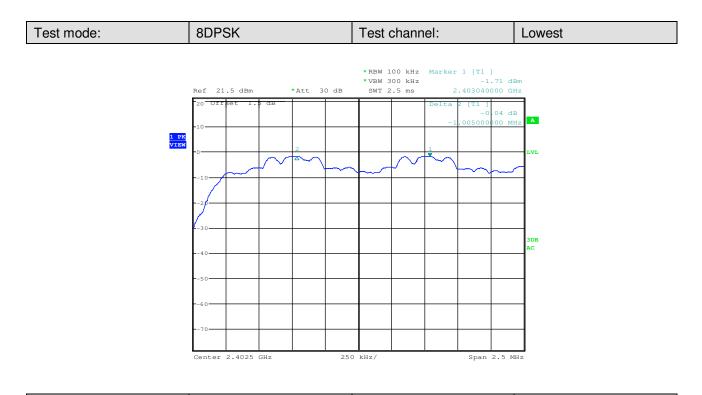

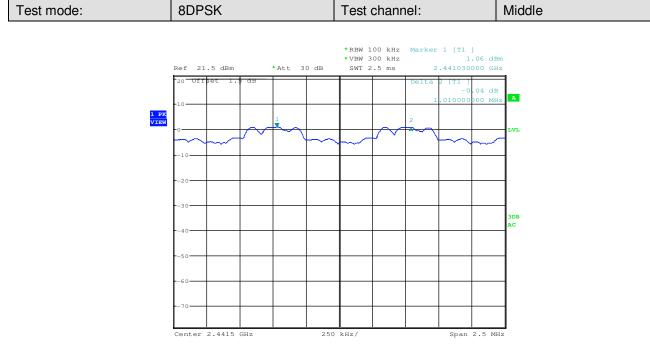



Report No.: SZEM130300138001 Page: 38 of 79

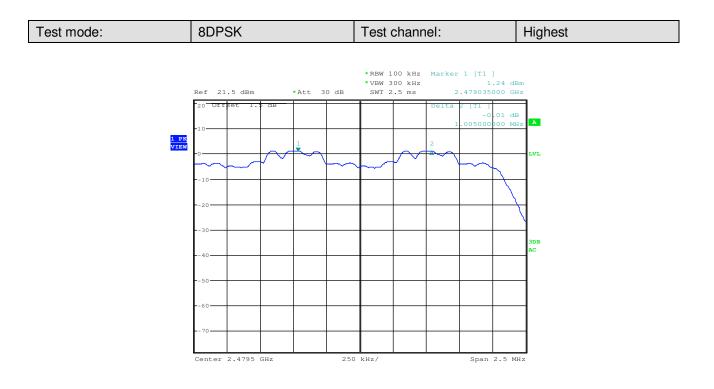



Report No.: SZEM130300138001 Page: 39 of 79

5.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (b)					
Test Method:	ANSI C63.10:2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane					
Limit:	At least 15 channels					
Test Mode:	Hopping transmitting with all kind of modulation					
Instruments Used:	Refer to section 4.10 for details					
Test Results:	Pass					


Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130300138001 Page: 40 of 79

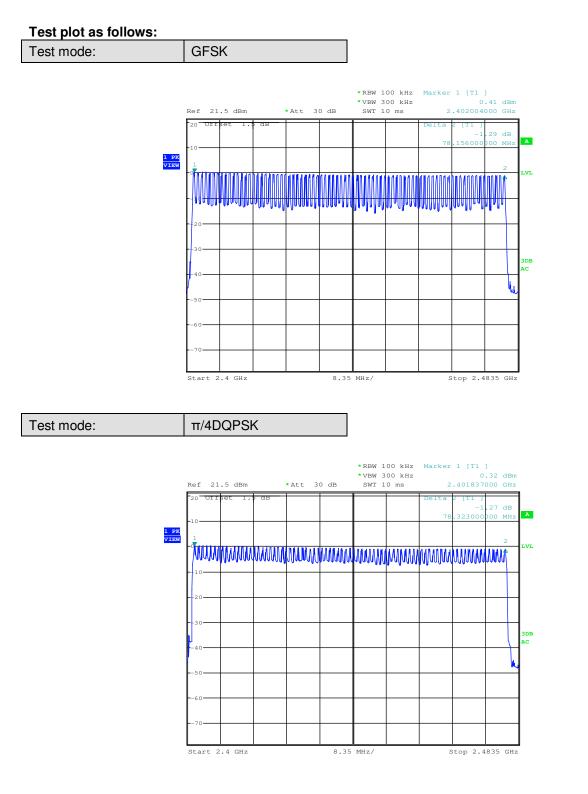



Report No.: SZEM130300138001 Page: 41 of 79

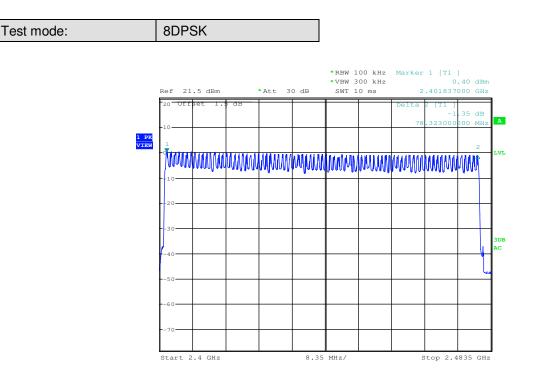



Report No.: SZEM130300138001 Page: 42 of 79

5.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)					
Test Method:	ANSI C63.10:2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table					
	Ground Reference Plane					
Instruments Used:	Refer to section 4.10 for details					
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.					
Limit:	0.4 Second					
Test Results:	Pass					

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.1696	0.4
GFSK	DH3	0.2848	0.4
	DH5	0.3243	0.4
π/4DQPSK	2-DH1	0.1744	0.4
	2-DH3	0.2072	0.4
	2-DH5	0.1979	0.4
	3-DH1	0.1728	0.4
8DPSK	3-DH3	0.2856	0.4
	3-DH5	0.3248	0.4

Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below

DH1 time slot=0.530 (ms)*(1600/ (2*79))*31.6=169.6 ms


DH3 time slot=1.780 (ms)*(1600/ (4*79))*31.6=284.8 ms


DH5 time slot=3.040 (ms)*(1600/ (6*79))*31.6=324.3 ms



Report No.: SZEM130300138001 Page: 43 of 79


Test plot as follows:

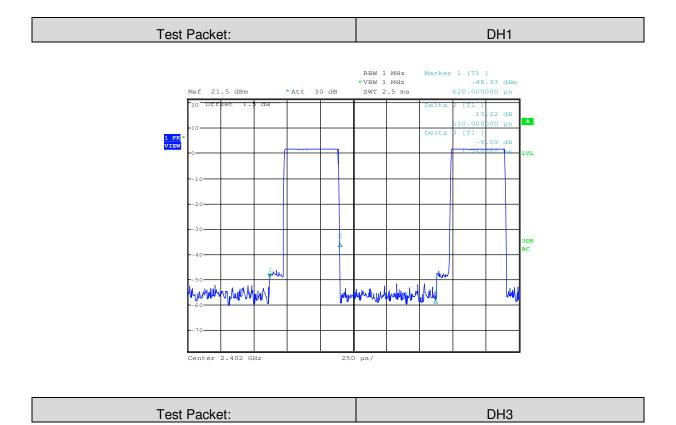

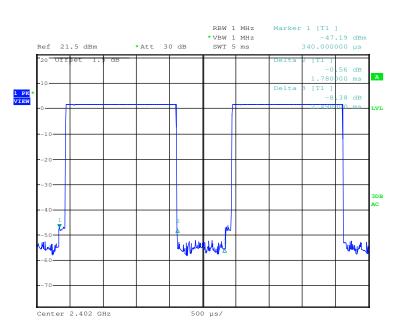



Report No.: SZEM130300138001 Page: 44 of 79

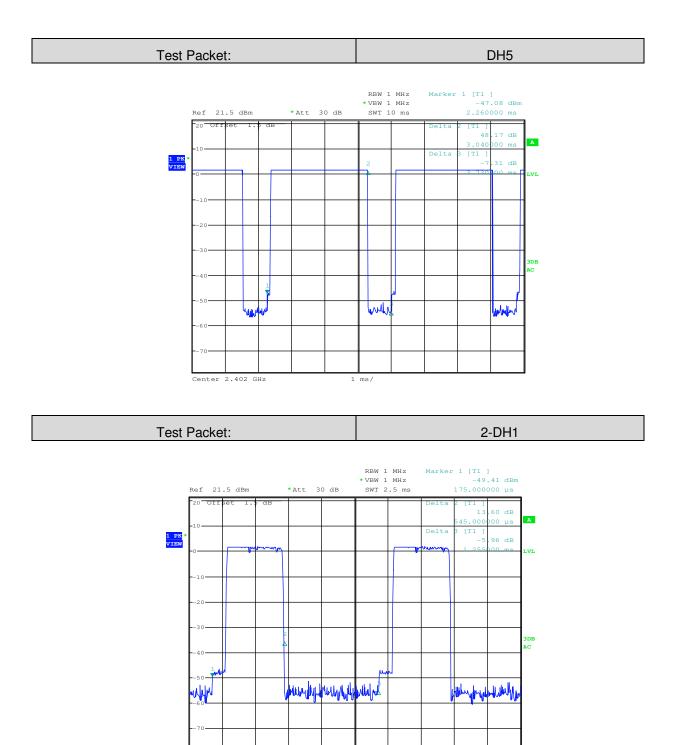


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

250 us/

Center 2.402 GHz



Report No.: SZEM130300138001 Page: 45 of 79

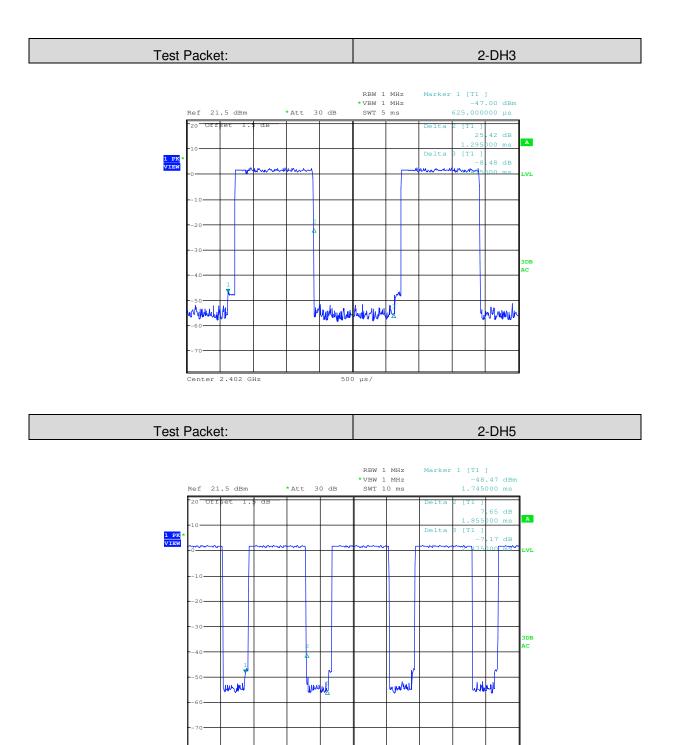

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

1 ms/


Center 2.402 GHz



Report No.: SZEM130300138001 Page: 46 of 79

3DB

Munu

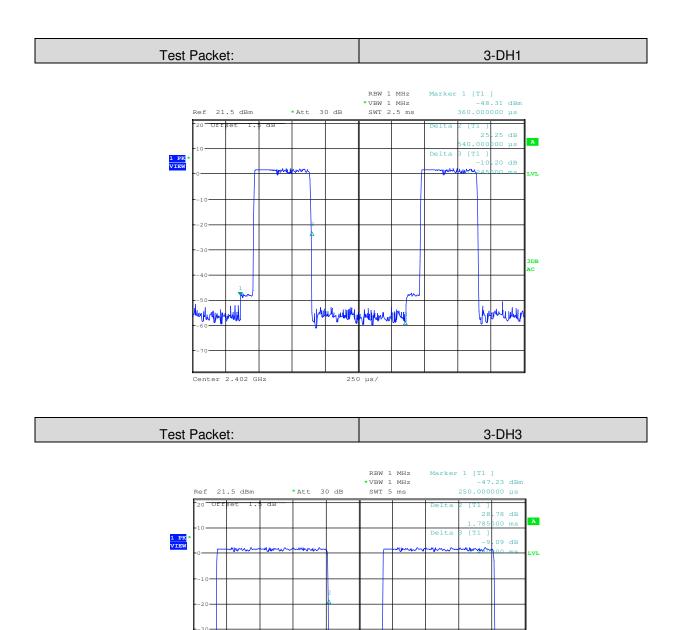

Hermiter


500 µs/

Center 2.402 GHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 47 of 79

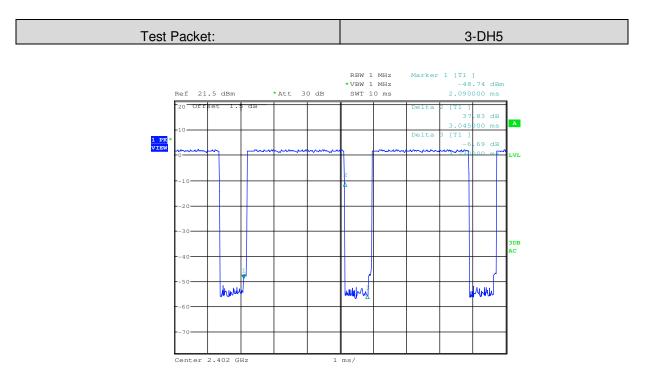

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 48 of 79

5.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)						
Test Method:	ANSI C63.10:2009						
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane						
	Remark: Dffset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type						
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.						
Instruments Used:	Refer to section 4.10 for details						
Test Results:	Pass						

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130300138001 Page: 49 of 79






Report No.: SZEM130300138001 Page: 50 of 79

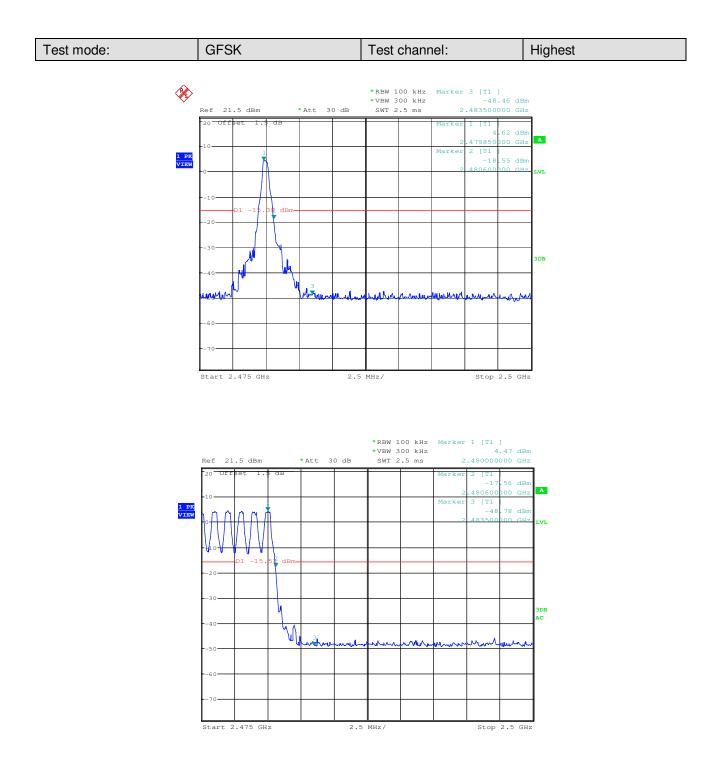




Report No.: SZEM130300138001 Page: 51 of 79

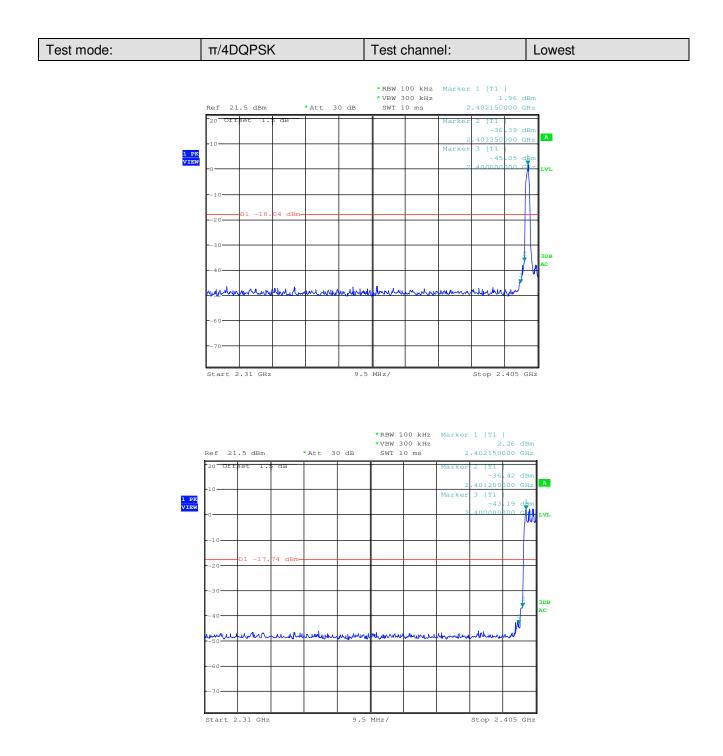




Report No.: SZEM130300138001 Page: 52 of 79

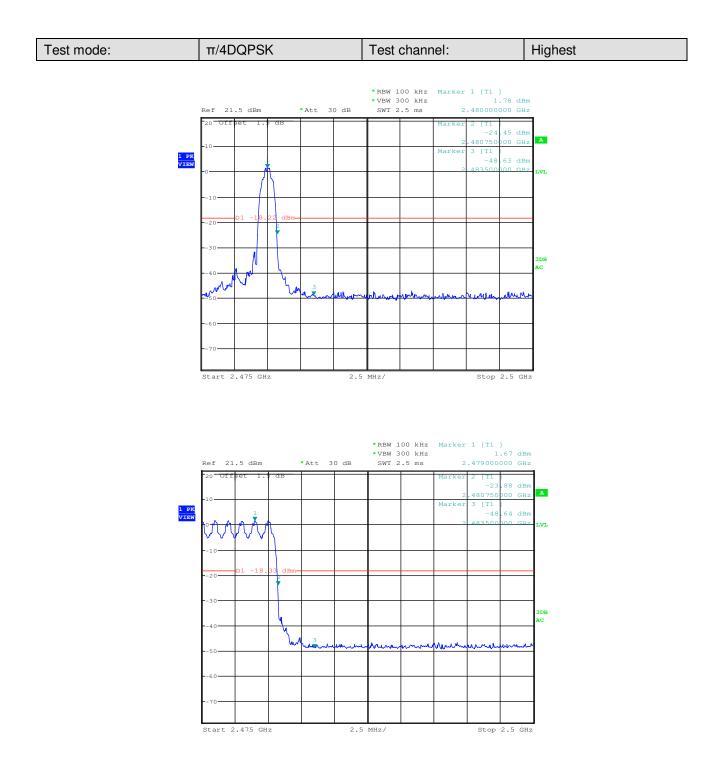




Report No.: SZEM130300138001 Page: 53 of 79

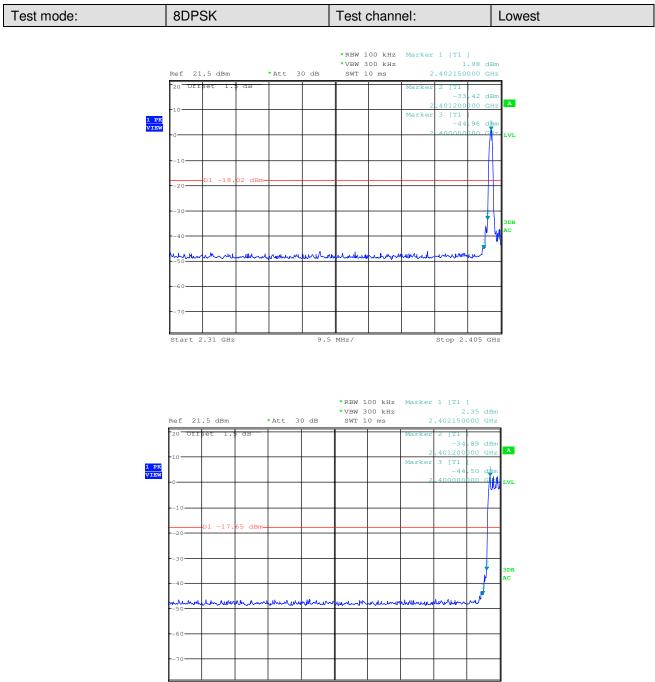

Start 2.31 GHz 9.5 MHz/ Stop 2.405 GHz



Report No.: SZEM130300138001 Page: 54 of 79

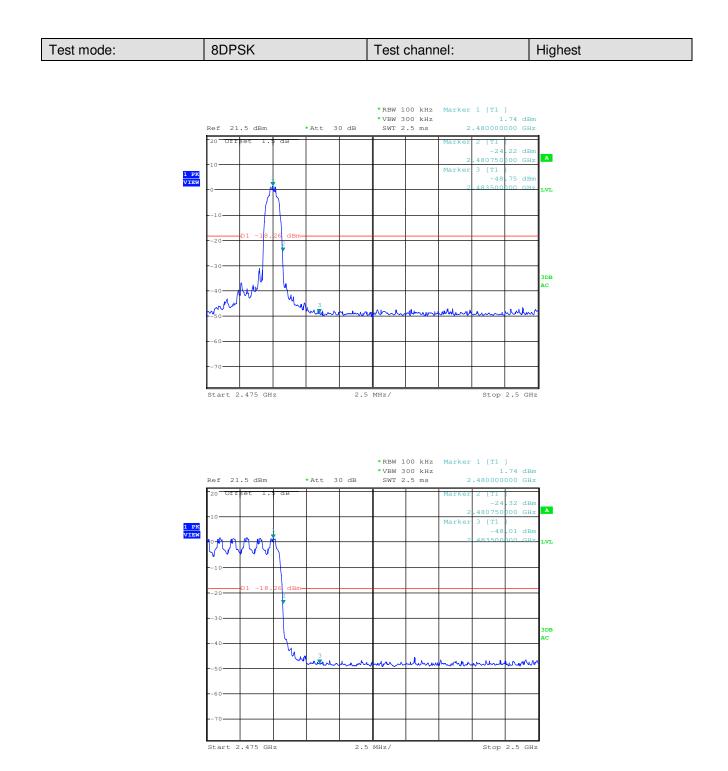



Report No.: SZEM130300138001 Page: 55 of 79


5.9 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)							
Test Method:	ANSI C63.10:2009							
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:							
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.							
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.							
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type							
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.							
Instruments Used:	Refer to section 4.10 for details							
Test Results:	Pass							

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130300138001 Page: 56 of 79

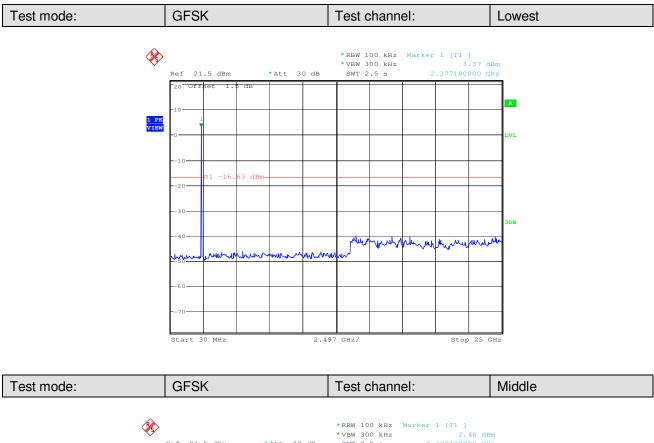

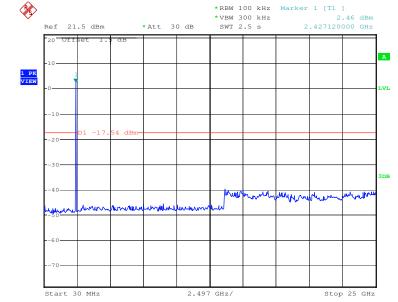




Report No.: SZEM130300138001 Page: 57 of 79

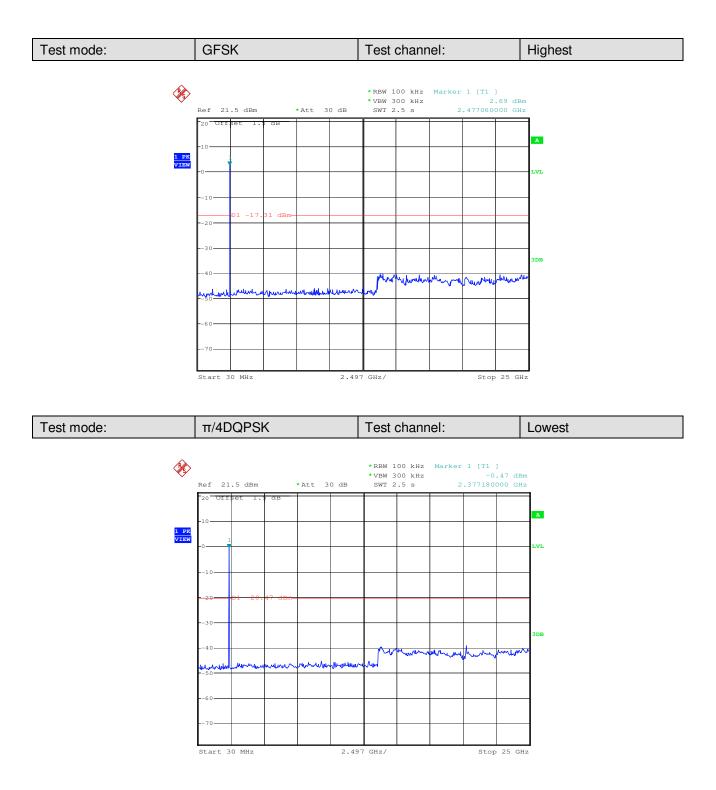




Report No.: SZEM130300138001 Page: 58 of 79

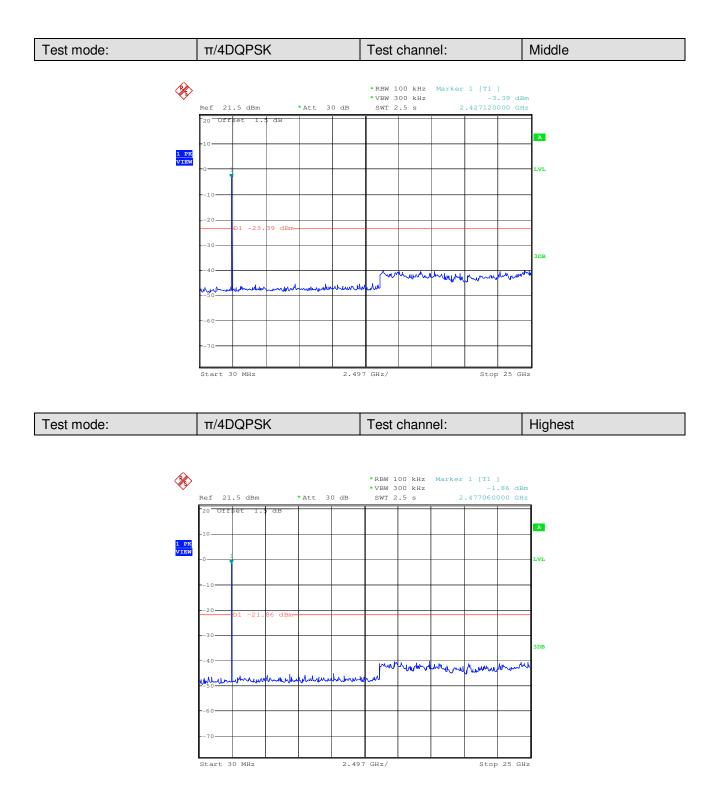

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM130300138001 Page: 59 of 79

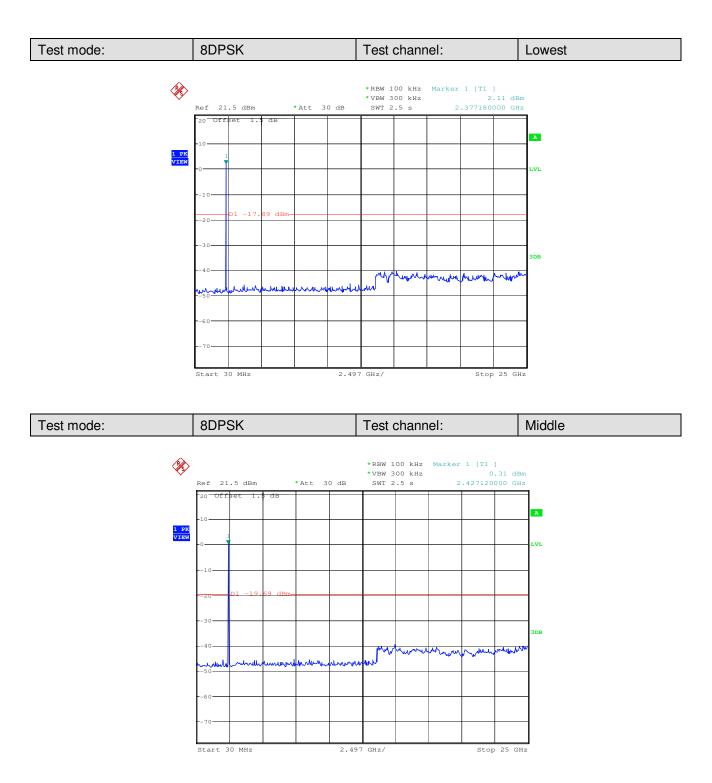



Report No.: SZEM130300138001 Page: 60 of 79

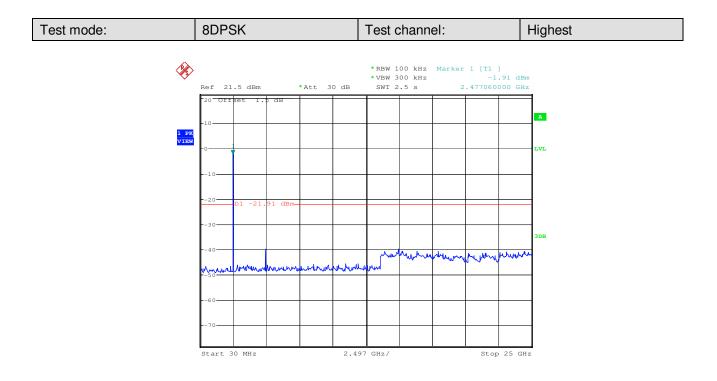



Report No.: SZEM130300138001 Page: 61 of 79

5.10Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:						
Frequency hopping systems	s shall have hopping channel carrier frequencies separated by a minimum						
of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.							
Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping							
channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the							
hopping channel, whichever is greater, provided the systems operate with an output power no greater							
-	shall hop to channel frequencies that are selected at the system hopping						
	ordered list of hopping frequencies. Each frequency must be used equally						
u ,	nsmitter. The system receivers shall have input bandwidths that match the						
	is of their corresponding transmitters and shall shift frequencies in						
synchronization with the tra	insmitted signals.						
EUT Pseudorandom Freq	uency Hopping Sequence						
The pseudorandom sequen	nce may be generated in a nine-stage shift register whose 5th and 9th stage						
outputs are added in a mod	lulo-two addition stage. And the result is fed back to the input of the first						
stage. The sequence begin	s with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized						
with nine ones.							
 Number of shift register st 	ages: 9						
• •	sequence: 29 -1 = 511 bits						
 Longest sequence of zero 	s: 8 (non-inverted signal)						
	<u> </u>						
	(+)•						
Lineer Feedback	Chiff Deviator for Convertion of the DDDC converse						
	Shift Register for Generation of the PRBS sequence						
-	om Frequency Hopping Sequence as follow:						
0 2 4 6	62 64 78 1 73 75 77						
	lly on the average by each transmitter.						
-	input bandwidths that match the hopping channel bandwidths of their						
Corresponding transmitters	and shift frequencies in synchronization with the transmitted signals.						



Report No.: SZEM130300138001 Page: 62 of 79


5.11 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark			
	0.009MHz-0.090MH	Peak	10kHz	z 30kHz	Peak				
	0.009MHz-0.090MHz Average			10kH:	z 30kHz	Average			
	0.090MHz-0.110MH	Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	0.110MHz-0.490MH	z	Peak	10kHz	z 30kHz	Peak			
	0.110MHz-0.490MH	z	Average	10kHz	z 30kHz	Average			
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak			
	Above 1GHz		Peak	1MHz	3MHz	Peak			
	Above ranz		Peak	1MHz	z 10Hz	Average			
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measuremer distance (m			
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30			
	1.705MHz-30MHz		30	-	-	30			
	30MHz-88MHz		100	40.0	Quasi-peak	3			
	88MHz-216MHz		150	43.5	Quasi-peak	3			
	216MHz-960MHz		200	46.0	Quasi-peak	3			
	960MHz-1GHz	960MHz-1GHz 500		54.0	Quasi-peak	3			
	Above 1GHz 500 54.0 Average								
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequence emissions is 20dB above the maximum permitted average emission I applicable to the equipment under test. This peak limit applies to the peak emission level radiated by the device.									

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 63 of 79

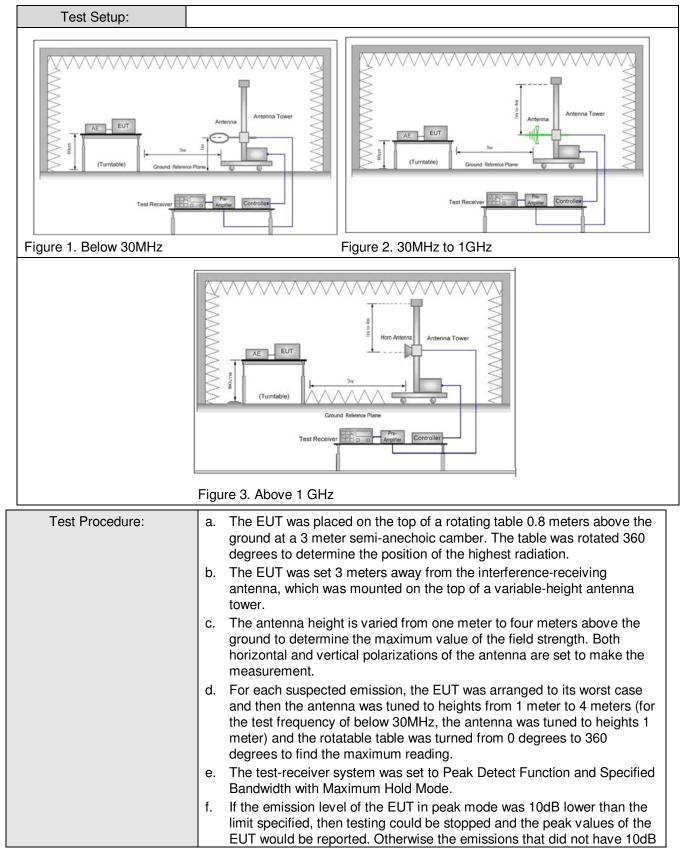



Report No.: SZEM130300138001 Page: 64 of 79


	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel				
	(2441MHz),the Highest channel (2480MHz)				
	h. Repeat above procedures until all frequencies measured was complete.				
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of				
	data type				
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK				
	modulation type				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				



Report No.: SZEM130300138001 Page: 65 of 79

5.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)				
Test mode:	Transmitting	Vertical		

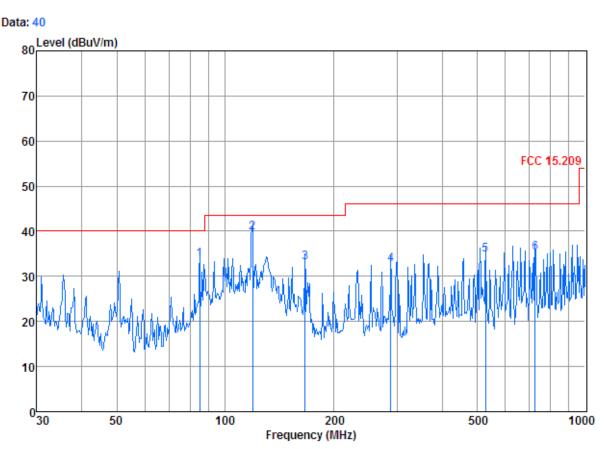



Condition: FCC 15.209 3m 3142C NEW VERTICAL Job No: : 1380RF Mode: : TX mode

		Cable/	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-	MHz	dB	dB/m	dB	dBnV	dBuV/m	dBnV/m	dB
	FIIIZ	w b	CLD/III	œ	ωbuv	CLDUV/III	ubuv/m	œ
1	84.999	1.10	5.90	27.22	54.00	33.78	40.00	-6.22
2	119.018	1.25	7.66	27.07	57.92	39.76	43.50	-3.74
3	166.651	1.35	9.38	26.83	49.15	33.05	43.50	-10.45
4	287.990	1.85	9.27	26.43	47.98	32.67	46.00	-13.33
5	528.246	2.63	14.18	27.65	45.58	34.74	46.00	-11.26
6	724.261	2.98	17.05	27.38	42.65	35.30	46.00	-10.70



Report No.: SZEM130300138001 Page: 66 of 79



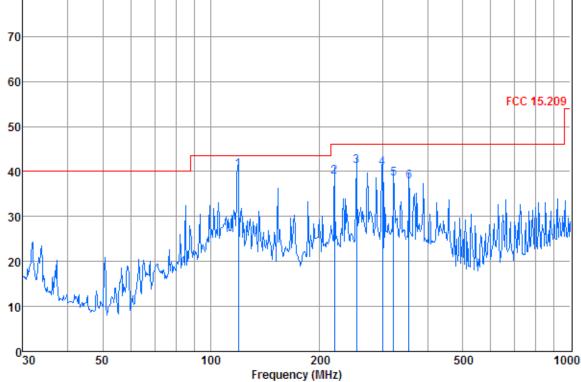

Condition: FCC 15.209 3m 3142C NEW HORIZONTAL Job No: : 1380RF Mode: : TX mode

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
_	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	119.018 220.617 253.837 300.367 322.189 355.427	1.25 1.52 1.69 1.90 1.97 2.08	7.00 8.77 9.70 9.93	27.07 26.63 26.53 26.40 26.58 26.83	58.48 56.97 57.25 55.53 53.09 51.93	41.18 40.73 38.41	46.00 46.00 46.00 46.00	



Report No.: SZEM130300138001 Page: 67 of 79

Worse case r	mode:	GFSK(DH1)	Test	channel:	Lowest	Rema	ırk:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3672.110	6.00	33.41	40.80	48.48	47.09	74	-26.91	Vertical
4785.075	7.42	34.73	41.61	51.74	52.28	74	-21.72	Vertical
6428.771	8.12	36.20	40.55	49.60	53.37	74	-20.63	Vertical
7489.599	9.08	36.00	39.62	47.35	52.81	74	-21.19	Vertical
8615.126	9.51	36.29	38.65	47.14	54.29	74	-19.71	Vertical
10587.850	10.27	38.33	37.69	43.05	53.96	74	-20.04	Vertical
3445.704	5.68	33.22	40.63	48.19	46.46	74	-27.54	Horizontal
4785.075	7.42	34.73	41.61	52.08	52.62	74	-21.38	Horizontal
6494.564	8.15	36.28	40.50	49.18	53.11	74	-20.89	Horizontal
8355.943	9.43	36.14	38.88	47.20	53.89	74	-20.11	Horizontal
9538.543	9.67	37.23	37.86	44.61	53.65	74	-20.35	Horizontal
11027.980	10.59	38.49	37.88	42.52	53.72	74	-20.28	Horizontal

5.11.2 Transmitter Emission above 1GHz

Worse case	mode:	GFSK(DH1) Tes	t channel:	Lowest	Rem	ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
3672.110	6.00	33.41	40.80	29.68	28.29	54	-25.71	Vertical
4785.075	7.42	34.73	41.61	32.01	32.55	54	-21.45	Vertical
6428.771	8.12	36.20	40.55	30.69	34.46	54	-19.54	Vertical
7489.599	9.08	36.00	39.62	28.34	33.80	54	-20.20	Vertical
8615.126	9.51	36.29	38.65	28.33	35.48	54	-18.52	Vertical
10587.850	10.27	38.33	37.69	24.56	35.47	54	-18.53	Vertical
3445.704	5.68	33.22	40.63	29.97	28.24	54	-25.76	Horizontal
4785.075	7.42	34.73	41.61	34.25	34.79	54	-19.21	Horizontal
6494.564	8.15	36.28	40.50	30.29	34.22	54	-19.78	Horizontal
8355.943	9.43	36.14	38.88	28.63	35.32	54	-18.68	Horizontal
9538.543	9.67	37.23	37.86	25.68	34.72	54	-19.28	Horizontal
11027.980	10.59	38.49	37.88	23.59	34.79	54	-19.21	Horizontal



Report No.: SZEM130300138001 Page: 68 of 79

Worse case	mode:	GFSK(DH1) Te	st channel:	Middle	Ren	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3480.968	5.73	33.21	40.66	48.61	46.89	74	-27.11	Vertical
4883.519	7.48	34.59	41.68	58.27	58.66	74	-15.34	Vertical
6903.705	8.37	35.90	40.13	48.11	52.25	74	-21.75	Vertical
8462.975	9.47	36.19	38.78	46.72	53.60	74	-20.40	Vertical
9562.854	9.67	37.27	37.83	44.40	53.51	74	-20.49	Vertical
10999.950	10.56	38.50	37.86	41.97	53.17	74	-20.83	Vertical
3863.900	6.28	33.63	40.94	48.12	47.09	74	-26.91	Horizontal
4883.519	7.48	34.59	41.68	58.82	59.21	74	-14.79	Horizontal
6363.645	8.10	36.14	40.61	48.55	52.18	74	-21.82	Horizontal
7413.726	8.99	35.97	39.69	48.11	53.38	74	-20.62	Horizontal
9562.854	9.67	37.27	37.83	44.89	54.00	74	-20.00	Horizontal
11027.980	10.59	38.49	37.88	42.49	53.69	74	-20.31	Horizontal

Worse case	mode:	GFSK(DH1) Te	est channel:	Middle	Re	mark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	 Reading Level (dBµV) 	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
3480.968	5.73	33.21	40.66	30.24	28.52	54	-25.48	Vertical
4883.519	7.48	34.59	41.68	40.23	40.62	54	-13.38	Vertical
6903.705	8.37	35.90	40.13	29.69	33.83	54	-20.17	Vertical
8462.975	9.47	36.19	38.78	28.24	35.12	54	-18.88	Vertical
9562.854	9.67	37.27	37.83	26.21	35.32	54	-18.68	Vertical
10999.950	10.56	38.50	37.86	22.36	33.56	54	-20.44	Vertical
3863.900	6.28	33.63	40.94	29.57	28.54	54	-25.46	Horizontal
4883.519	7.48	34.59	41.68	40.29	40.68	54	-13.32	Horizontal
6363.645	8.10	36.14	40.61	30.11	33.74	54	-20.26	Horizontal
7413.726	8.99	35.97	39.69	29.97	35.24	54	-18.76	Horizontal
9562.854	9.67	37.27	37.83	26.12	35.23	54	-18.77	Horizontal
11027.980	10.59	38.49	37.88	23.69	34.89	54	-19.11	Horizontal



Report No.: SZEM130300138001 Page: 69 of 79

Worse case	mode:	GFSK(DH1) Tes	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3588.939	5.88	33.30	40.73	49.03	47.48	74	-26.52	Vertical
4971.316	7.53	34.43	41.75	57.89	58.10	74	-15.90	Vertical
6764.538	8.24	36.04	40.27	49.45	53.46	74	-20.54	Vertical
8377.241	9.44	36.15	38.87	46.62	53.34	74	-20.66	Vertical
9759.591	9.74	37.46	37.66	43.85	53.39	74	-20.61	Vertical
11027.980	10.59	38.49	37.88	42.03	53.23	74	-20.77	Vertical
3588.939	5.88	33.30	40.73	49.16	47.61	74	-26.39	Horizontal
4971.316	7.53	34.43	41.75	60.82	61.03	74	-12.97	Horizontal
6696.010	8.21	36.11	40.31	48.76	52.77	74	-21.23	Horizontal
8462.975	9.47	36.19	38.78	47.42	54.30	74	-19.70	Horizontal
9538.543	9.67	37.23	37.86	44.29	53.33	74	-20.67	Horizontal
11027.980	10.59	38.49	37.88	42.19	53.39	74	-20.61	Horizontal
Worse case	mode:	GFSK(DH1) Tes	t channel:	Highest	Rem	ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
3588.939	5.88	33.30	40.73	30.26	28.71	54	-25.29	Vertical
4971.316	7.53	34.43	41.75	39.20	39.41	54	-14.59	Vertical
6764.538	8.24	36.04	40.27	30.58	34.59	54	-19.41	Vertical
8377.241	9.44	36.15	38.87	27.98	34.70	54	-19.30	Vertical
9759.591	9.74	37.46	37.66	24.57	34.11	54	-19.89	Vertical
11027.980	10.59	38.49	37.88	23.30	34.50	54	-19.50	Vertical
3588.939	5.88	33.30	40.73	30.52	28.97	54	-25.03	Horizontal
4971.316	7.53	34.43	41.75	42.99	43.20	54	-10.80	Horizontal
				00.00	33.69	54	-20.31	Horizontal
6696.010	8.21	36.11	40.31	29.68	00.00			
	8.21 9.47	36.11 36.19	40.31 38.78	29.68	35.56	54	-18.44	Horizontal
6696.010						54 54	-18.44 -18.75	Horizontal Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) Scan from 9KHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM130300138001 Page: 70 of 79

5.12Band edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 1	5.209 and 15.205		
Test Method:	ANSI C63.10: 2009			
Test Site:	Measurement Distance: 3m	n (Semi-Anechoic Chambe	r)	
Limit:	Frequency	Limit (dBuV/m @3m)	Remark	
	30MHz-88MHz	40.0	Quasi-peak Value	
	88MHz-216MHz	43.5	Quasi-peak Value	
	216MHz-960MHz	46.0	Quasi-peak Value	
	960MHz-1GHz	54.0	Quasi-peak Value	
	Above 1GHz	54.0	Average Value	
		74.0	Peak Value	
Test Setup:				
AE EUT (Turntable) Ground Reference Pic Test Receiver		AE EUT Monore Contraction of the second sec	Pre-	
Figure 1. 30MHz to 1GHz	Fig	gure 2. Above 1 GHz		




Report No.: SZEM130300138001 Page: 71 of 79

Test Procedure:	 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of GFSK modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



Report No.: SZEM130300138001 Page: 72 of 79

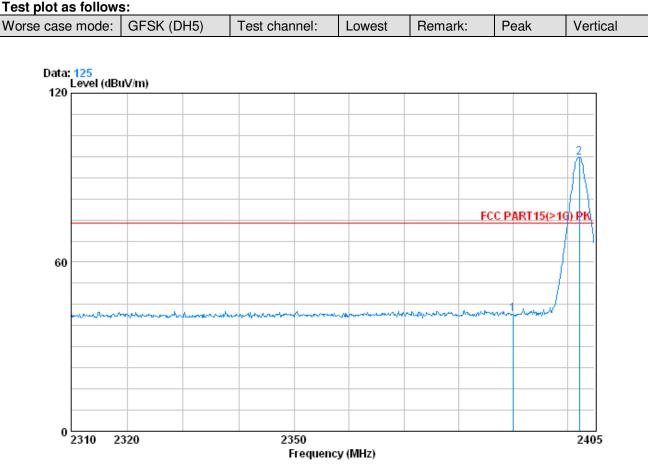

Condition : FCC PART15(>1G) PK 3m VERTICAL

Job NO: : 1380RF


MODE: : 2402 Bandedge

	Freq			•	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBm	dBm/m	dBm/m	dB
10 20	2390.000 2402.245				46.02 101.48			



Report No.: SZEM130300138001 Page: 73 of 79

Worse case mode: GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
-----------------------------	---------------	--------	---------	------	------------

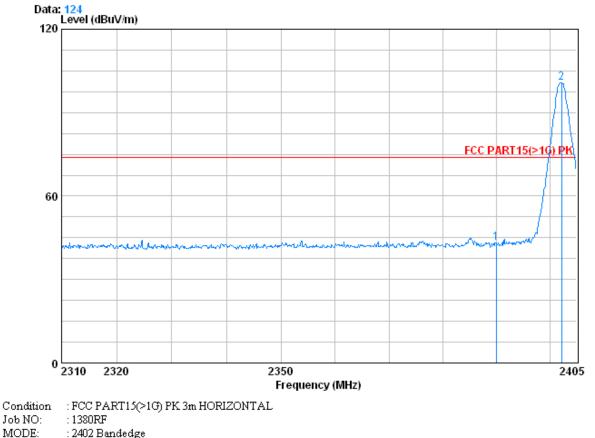


	Freq			-		Level		Over Limit
	MHz	dB	dB/m	dB	dBm	dBm/m	dBm/m	dB
10 20	2390.000 2402.245					43.12 100.65		



Report No.: SZEM130300138001 Page: 74 of 79

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	------------	---------------	--------	---------	---------	----------

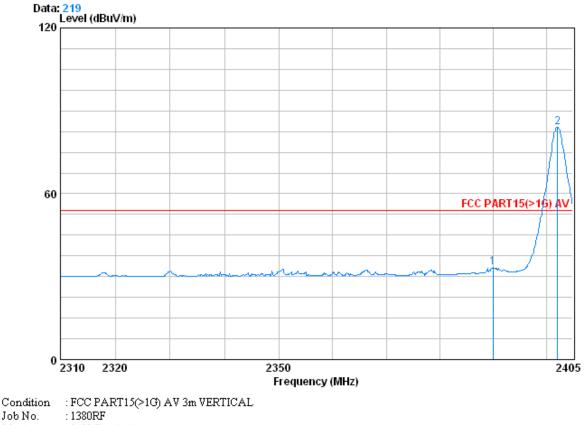

Job No.


Mode : 2402 Bandedge

	- Freq		Preamp Factor			Limit Line	Over Limit
	MHz	dB	 dB	dBuV	dBuV/m	dBuV/m	dB
1 20	2390.000 2402.150						



Report No.: SZEM130300138001 Page: 75 of 79

Worse case mode: GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
-----------------------------	---------------	--------	---------	---------	------------

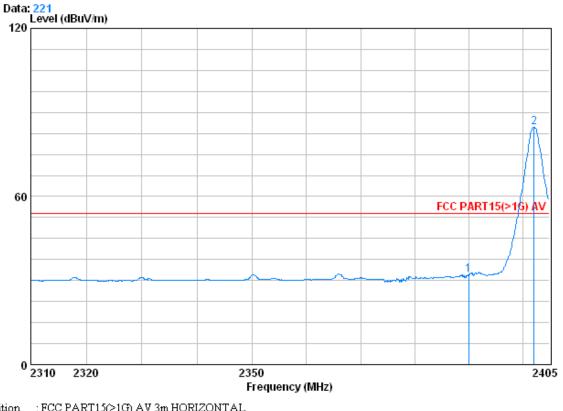


Condition :FCC PART15(>1G) AV 3m HORIZONTAL Job No. :1380RF Mode :2402 Bandedge

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 0	2390.000 2402.150			39.85 39.86				



Report No.: SZEM130300138001 Page: 76 of 79

Worse case mode: GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical
-----------------------------	---------------	---------	---------	------	----------

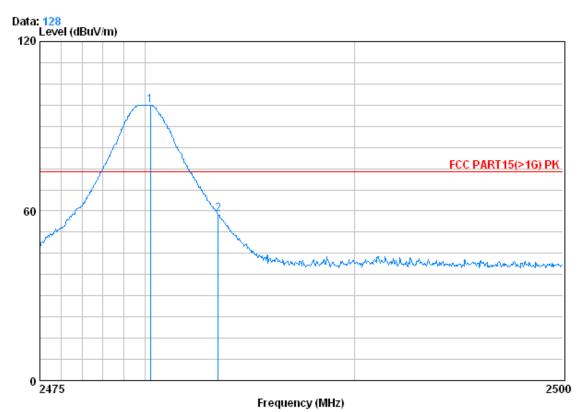


Condition : FCC PART15(>1G) PK 3m VERTICAL Job NO: : 1380RF MODE: : 2480 Bandedge

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBm	dBm/m	dBm/m	dB
10 20					101.79 62.92			



Report No.: SZEM130300138001 Page: 77 of 79

Worse case mode: GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
-----------------------------	---------------	---------	---------	------	------------

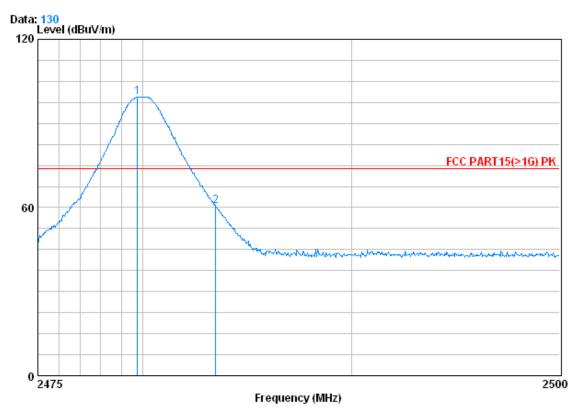

Condition : FCC PART15(>1G) PK 3m HORIZONTAL Job NO: : 1380RF


MODE: : 2480 Bandedge

	Freq			-	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBm	dBm/m	dBm/m	dB
10 20	2479.750 2483.500				103.76 64.69			



Report No.: SZEM130300138001 Page: 78 of 79

Worse case mode: GFSK (DH5) Test channel:	Highest	Remark:	Average	Vertical
---	---------	---------	---------	----------

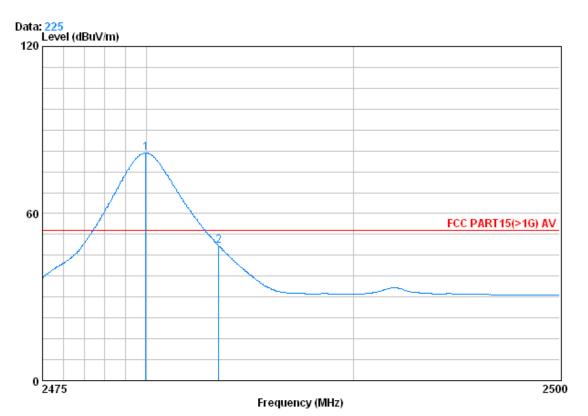

Condition : FCC PART15(>1G) AV 3m VERTICAL

Job No. : 1380RF


Mode : 2480 Bandedge

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2479.975 2483.500			39.92 39.92				



Report No.: SZEM130300138001 Page: 79 of 79

Worse case mode: GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal
-----------------------------	---------------	---------	---------	---------	------------

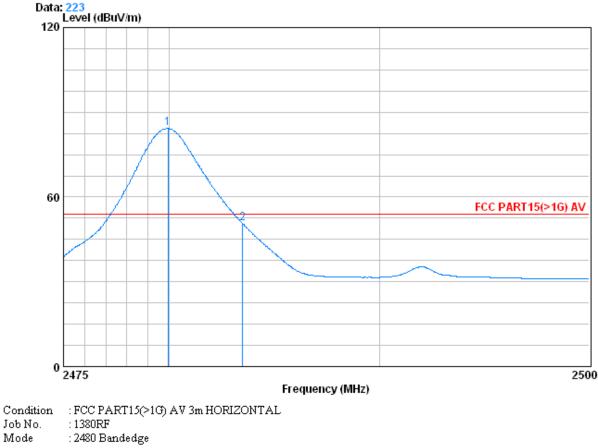

	Freq			Preamp Factor			Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2479.950 2483.500						54.00 54.00	

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor