

FCC

RF

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
MSCAN-CVG RFID READER

ISSUED TO
Megabyte Limited

Unit 507, 5/F, Building 12W, No. 12 Science Park West Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong

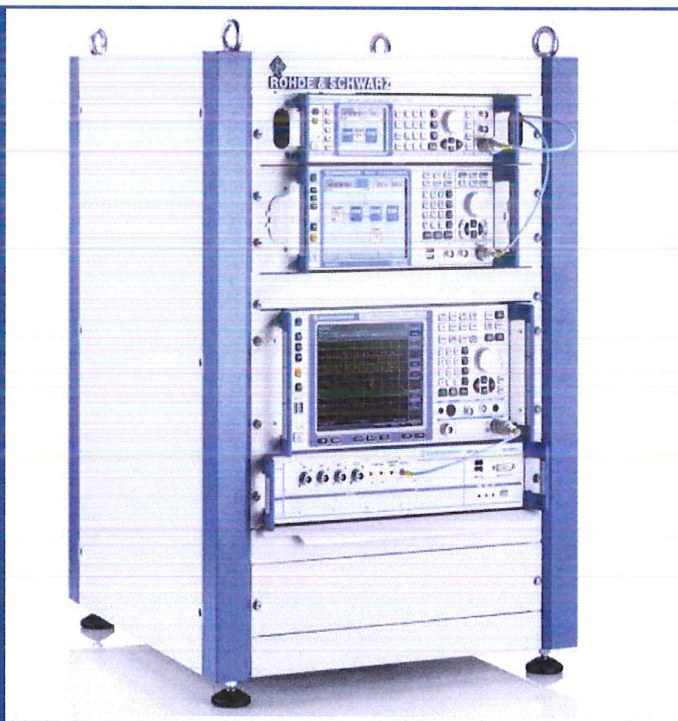

Tested by: Ye Hongji
Ye Hongji
Date May 28, 2020

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)
Date May 28, 2020

Report No.: BL-SZ2040671-601
EUT Name: MSCAN-CVG RFID READER
Model Name: MSCAN-CVG
Brand Name: myndar
Test Standard: 47 CFR Part 15 Subpart C
FCC ID: XEK-MSCANCVG

Test Conclusion: Pass
Test Date: Apr. 27, 2020 ~ May 20, 2020
Date of Issue: May 28, 2020

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>May 28, 2020</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	6
2	PRODUCT INFORMATION	7
2.1	Applicant Information	7
2.2	Manufacturer Information	7
2.3	Factory Information	7
2.4	General Description for Equipment under Test (EUT)	7
2.5	Technical Information	8
2.6	Additional Instructions	9
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards	10
3.2	Verdict	11
4	GENERAL TEST CONFIGURATIONS	12
4.1	Test Environments	12
4.2	Test Equipment List	12
4.3	Measurement Uncertainty	13
4.4	Description of Test Setup	14
4.4.1	For Antenna Port Test	14
4.4.2	For AC Power Supply Port Test	14
4.4.3	For Radiated Test (Below 30 MHz)	15
4.4.4	For Radiated Test (30 MHz-1 GHz)	15
4.4.5	For Radiated Test (Above 1 GHz)	16
4.5	Measurement Results Explanation Example	17
4.5.1	For conducted test items:	17

5	TEST ITEMS.....	18
5.1	Antenna Requirements.....	18
5.1.1	Relevant Standards.....	18
5.1.2	Antenna Anti-Replacement Construction	18
5.1.3	Antenna Gain	18
5.2	Number of Hopping Frequencies	19
5.2.1	Limit.....	19
5.2.2	Test Procedure	19
5.2.3	Test Result	19
5.3	Peak Output Power and E.I.R.P.....	20
5.3.1	Test Limit.....	20
5.3.2	Test Setup	20
5.3.3	Test Procedure	20
5.3.4	Test Result	20
5.4	Occupied Bandwidth	21
5.4.1	Limit.....	21
5.4.2	Test Setup	21
5.4.3	Test Procedure	21
5.4.4	Test Result	21
5.5	Carrier Frequency Separation	22
5.5.1	Limit.....	22
5.5.2	Test Setup	22
5.5.3	Test Procedure	22
5.5.4	Test Result	22
5.6	Time of Occupancy (Dwell time)	23
5.6.1	Limit.....	23
5.6.2	Test Setup	23
5.6.3	Test Procedure	23
5.6.4	Test Result	23
5.7	Conducted Spurious Emission & Authorized-band band-edge	24
5.7.1	Limit.....	24
5.7.2	Test Setup	24
5.7.3	Test Procedure	24

5.7.4	Test Result	24
5.8	Conducted Emission	25
5.8.1	Limit.....	25
5.8.2	Test Setup	25
5.8.3	Test Procedure	25
5.8.4	Test Result	25
5.9	Radiated Spurious Emission	26
5.9.1	Limit.....	26
5.9.2	Test Setup	26
5.9.3	Test Procedure	26
5.9.4	Test Result	27
5.10	Band Edge (Restricted-band band-edge).....	28
5.10.1	Limit.....	28
5.10.2	Test Setup	28
5.10.3	Test Procedure	28
5.10.4	Test Result	28
ANNEX A	TEST RESULT	29
A.1	Number of Hopping Frequency	29
A.2	Peak Output Power	30
A.3	20 dB and 99% bandwidth	31
A.4	Hopping Frequency Separation.....	33
A.5	Average Time of Occupancy	34
A.6	Conducted Spurious Emissions & Authorized-band band-edge	35
A.7	Conducted Emissions.....	39
A.8	Radiated Spurious Emission	41
A.9	Band Edge (Restricted-band band-edge).....	53
ANNEX B	TEST SETUP PHOTOS	54
ANNEX C	EUT EXTERNAL PHOTOS	54
ANNEX D	EUT INTERNAL PHOTOS	54

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation (A2LA) according to ISO/IEC 17025. The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Megabyte Limited
Address	Unit 507, 5/F, Building 12W, No. 12 Science Park West Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong

2.2 Manufacturer Information

Manufacturer	Megabyte Limited
Address	Unit 507, 5/F, Building 12W, No. 12 Science Park West Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	MSCAN-CVG RFID READER
Model Name Under Test	MSCAN-CVG
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Bluetooth 4.0 (BR+EDR+BLE) RFID
-----------------------------------	------------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	Frequency hopping system
Modulation Type	RFID
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Frequency Range	The frequency range used is 902 MHz to 928 MHz.
Number of channel	50
Tested Channel	Low (917.10 MHz), Middle (922.10 MHz), High (926.90 MHz)
Antenna Type	Patch Antenna
Antenna Gain	1.5 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
1	917.10	14	919.70	27	922.30	40	924.90
2	917.30	15	919.90	28	922.50	41	925.10
3	917.50	16	920.10	29	922.70	42	925.30
4	917.70	17	920.30	30	922.90	43	925.50
5	917.90	18	920.50	31	923.10	44	925.70
6	918.10	19	920.70	32	923.30	45	925.90
7	918.30	20	920.90	33	923.50	46	926.10
8	918.50	21	921.10	34	923.70	47	926.30
9	918.70	22	921.30	35	923.90	48	926.50
10	918.90	23	921.50	36	924.10	49	926.70
11	919.10	24	921.70	37	924.30	50	926.90
12	919.30	25	921.90	38	924.50	--	--
13	919.50	26	922.10	39	924.70	--	--

2.6 Additional Instructions


EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software		
Test Software Version	MegaLink Module Testing Program	
Mode	Channel	Soft Set
RFID	ALL	23

Run Software

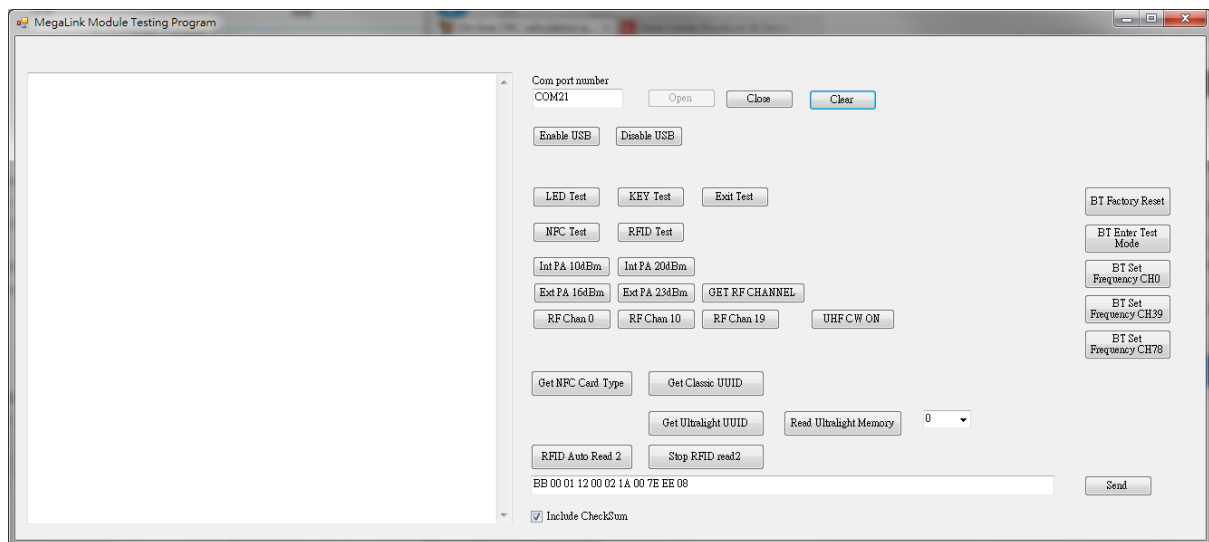

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	FCC PUBLIC NOTICE DA 00-705 (Mar. 30, 2000)	Filling and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES

3.2 Verdict

No.	Description	FCC Part No.	Modulation Technology	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	N/A	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.1	Pass	--
3	Peak Output Power	15.247(b)	Frequency hopping system	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	Frequency hopping system	Low/Middle/High	ANNEX A.3	Pass	--
5	Carrier Frequency Separation	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.4	Pass	--
6	Time of Occupancy (Dwell time)	15.247(a)	Frequency hopping system	Hopping Mode	ANNEX A.5	Pass	--
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	Frequency hopping system	Low/Middle/High, Hopping Mode	ANNEX A.6	Pass	--
8	Conducted Emission	15.207	Frequency hopping system	Low/Middle/High	ANNEX A.7	Pass	--
9	Radiated Spurious Emission	15.209 15.247(d)	Frequency hopping system	Low/Middle/High, Hopping Mode	ANNEX A.8	Pass	--
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Frequency hopping system	Low/Middle/High, Hopping Mode	ANNEX A.9	Pass	--

Note 1: Please refer to section 5.1

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	5 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2019.06.13	2020.06.12
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	260592	2019.06.13	2020.06.12
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2019.08.23	2020.08.22
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2019.06.13	2020.06.12
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2019.06.13	2020.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2019.06.13	2020.06.12
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2019.06.18	2020.06.17
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2019.06.13	2020.06.12
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2019.06.13	2020.06.12
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2019.07.02	2020.07.01
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.11.07	2021.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2018.08.22	2020.08.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2019.07.22	2021.07.21
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2019.06.21	2020.06.20
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2019.01.06	2021.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC TECHNOLOGY LTD	21.1m*11.6m*7.35m	N/A	2018.07.19	2020.07.18
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2019.06.12	2020.06.11
Power Amplifier	OPHIR RF	5225F	1037	2020.02.19	2021.02.18
Power Amplifier	OPHIR RF	5273F	1016	2020.02.19	2021.02.18
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Feld Strength Meter	Narda	EP601	511WX51129	2019.05.22	2020.05.21
Mouth Simulator	B&K	4227	2423931	2019.11.12	2020.11.11
Sound Calibrator	B&K	4231	2430337	2019.11.12	2020.11.11
Sound Level Meter	B&K	NL-20	00844023	2019.11.12	2020.11.11
Ear Simulator	B&K	4185	2409449	2019.11.12	2020.11.11
Ear Simulator	B&K	4195	2418189	2019.11.12	2020.11.11
Audio analyzer	B&K	UPL 16	100129	2019.11.12	2020.11.11

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


Measurement	Value
Occupied Channel Bandwidth	±4%
RF output power, conducted	±1.4 dB
Power Spectral Density, conducted	±2.5 dB
Unwanted Emissions, conducted	±2.8 dB
All emissions, radiated	±5.4 dB
Temperature	±1°C
Humidity	±4%

4.4.1 For Antenna Port Test

$$\text{Conducted value (dBm)} = \text{Measurement value (dBm)} + \text{cable loss (dB)}$$


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

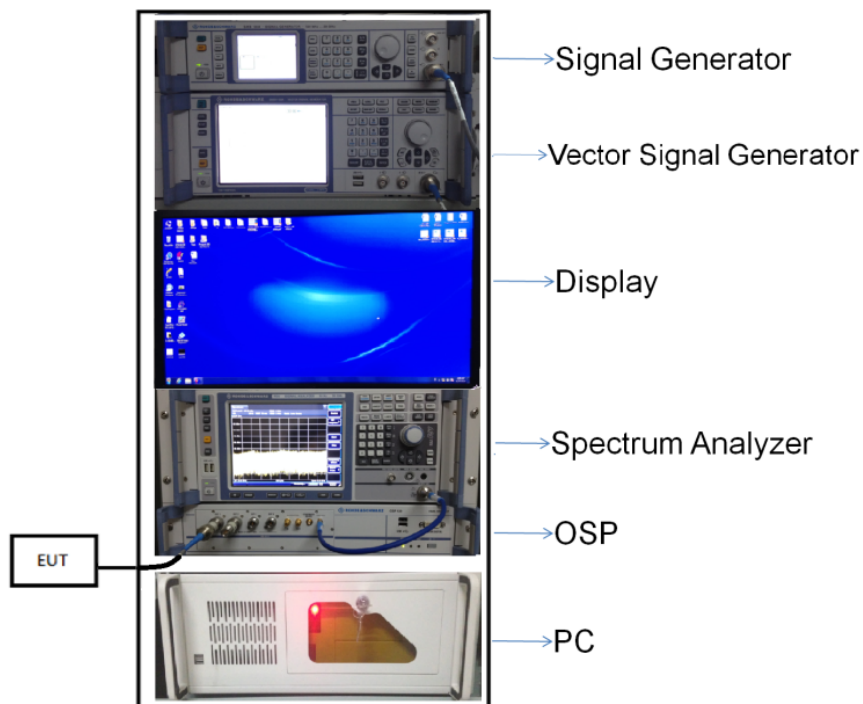


(Diagram 1)

4.4.2 For AC Power Supply Port Test

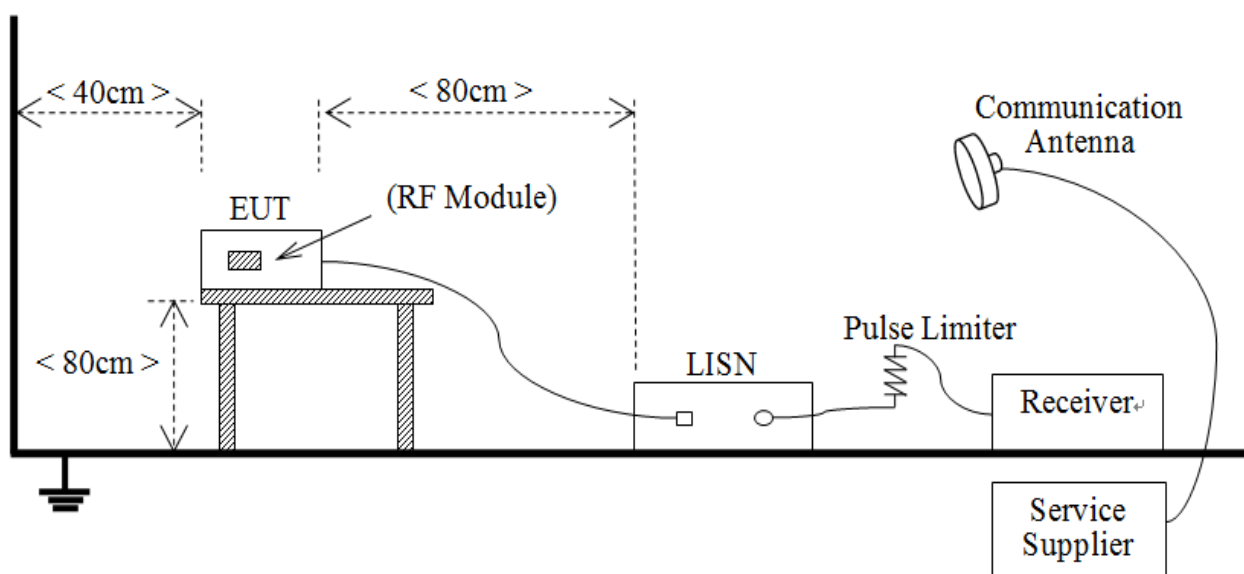


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

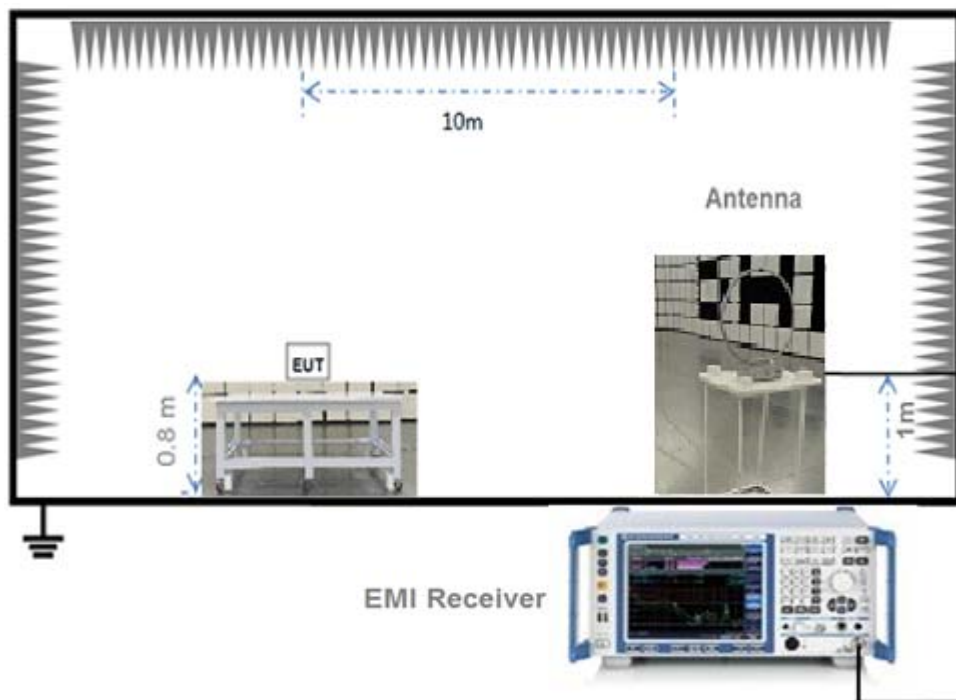


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

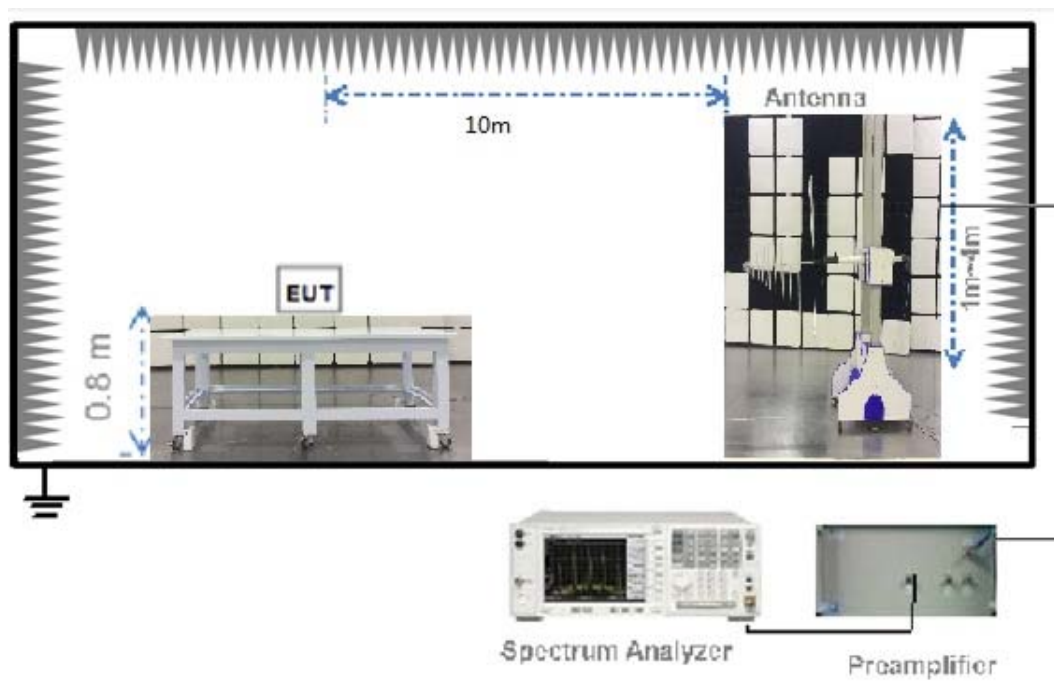

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

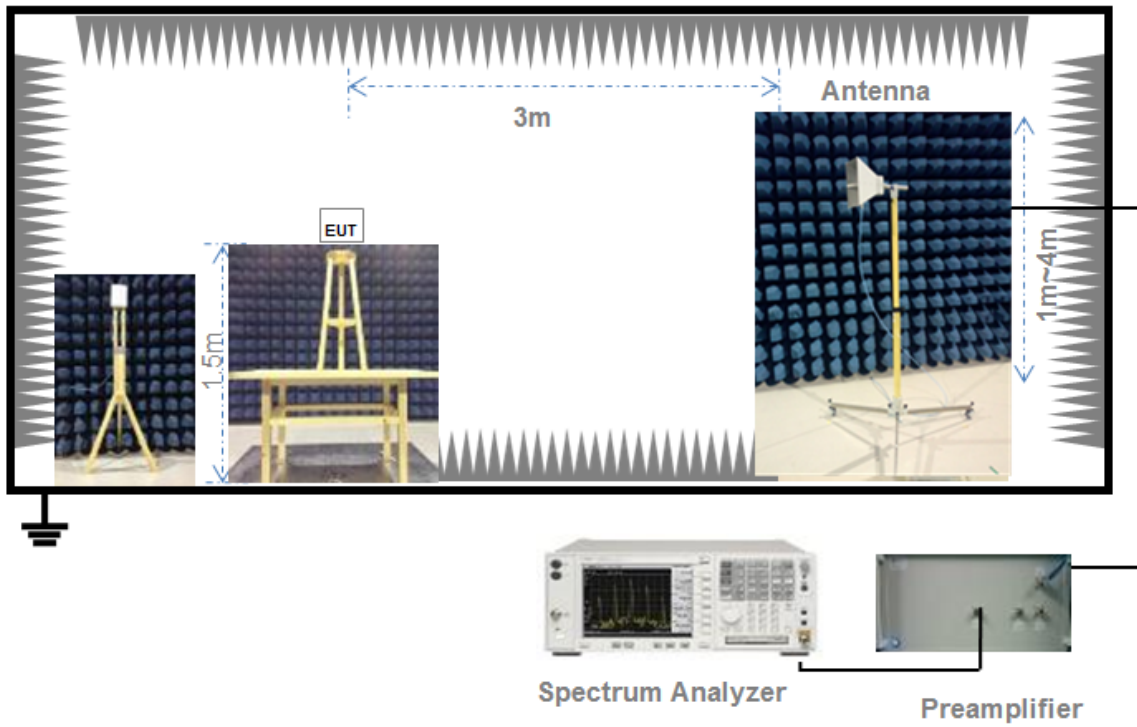

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequencies

5.2.1 Limit

FCC §15.247(a) (1) (i); RSS-247, 5.1 (4)

For frequency hopping systems operating in the 902-928 MHz band: the system shall use at least 50 hopping frequencies.

Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.2.3 Test Result

Please refer to ANNEX A.1.

5.3 Peak Output Power and E.I.R.P

5.3.1 Test Limit

FCC § 15.247(b)(1)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

RSS-247, 5.4 (2)

For FHSs operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels (see Section 5.4(5) for exceptions).

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a)(1)(i); RSS-247, 5.1 (1)

Measurement of the 20dB bandwidth of the modulated signal. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a)(1); RSS-247, 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a)(1)(i); RSS-247, 5.1 (4)

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

5.6.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result

Please refer to ANNEX A.5

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Please refer to ANNEX A.6 and A.7

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	902/F(kHz)	300
0.490 - 1.705	9020/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.9.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Please refer to ANNEX A.8.

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
RFID	902-928	50	50	Pass

Test plots

RFID

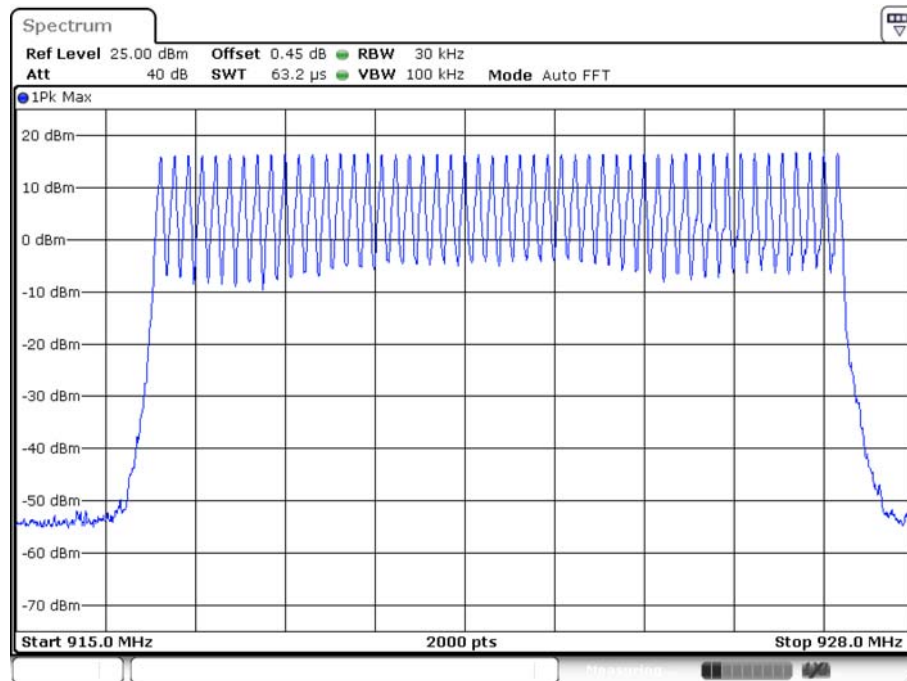

Date: 19.MAY.2020 18:03:34


A.2 Peak Output Power

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	RFID		dBm	mW	
	dBm	mW			
Low	15.96	39.45	30	1000	Pass
Middle	16.30	42.66			Pass
High	16.56	45.29			Pass

Test plots


LOW CHANNEL

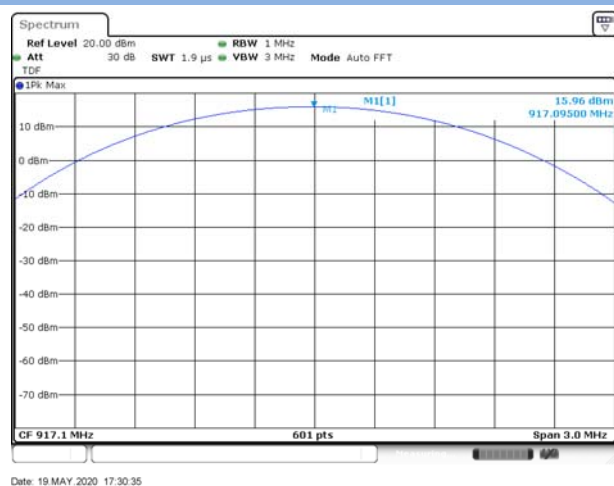

MIDDLE CHANNEL



HIGH CHANNEL

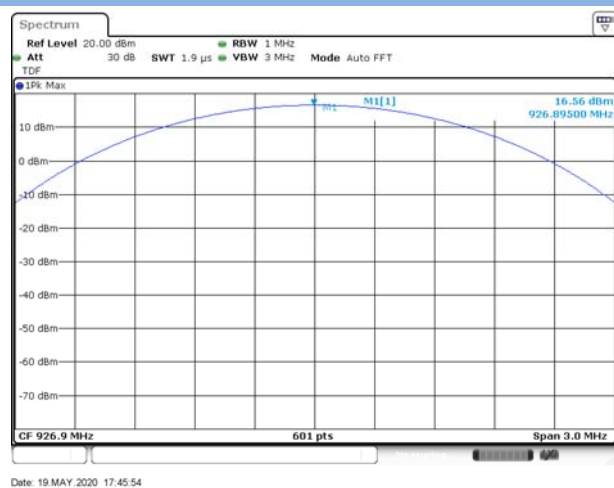


A.3 20 dB and 99% bandwidth

Test Data


RFID			
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Verdict
Low	0.124634	0.147000	Pass
Middle	0.087708	0.177500	Pass
High	0.084778	0.158500	Pass

Test plots (20 dB Bandwidth)


LOW CHANNEL

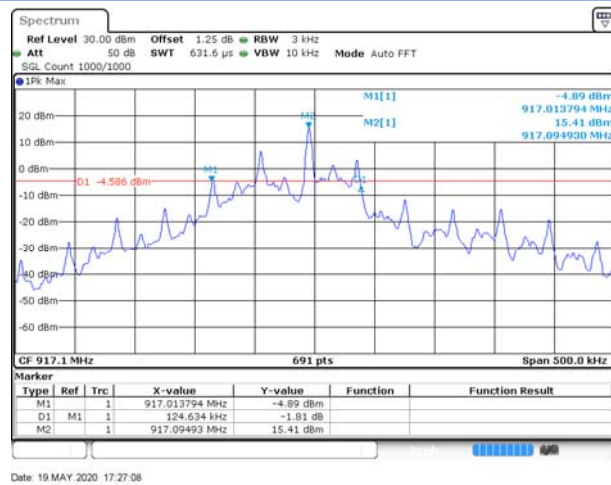

MIDDLE CHANNEL

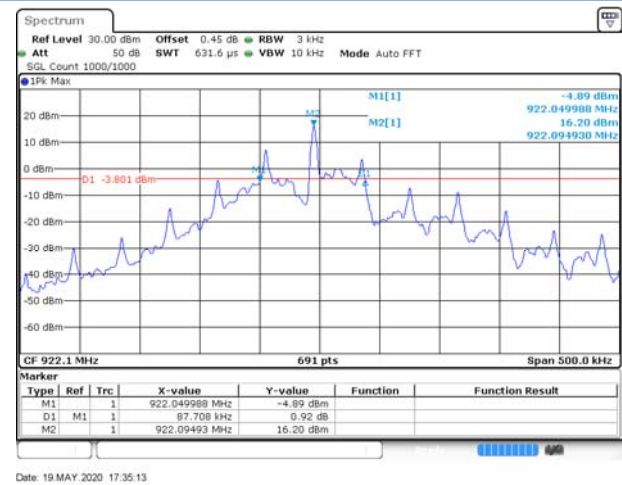


HIGH CHANNEL

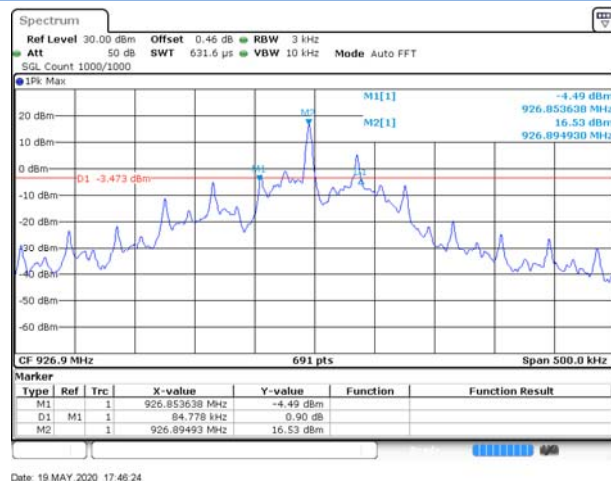


Test plots (99% Bandwidth)

LOW CHANNEL

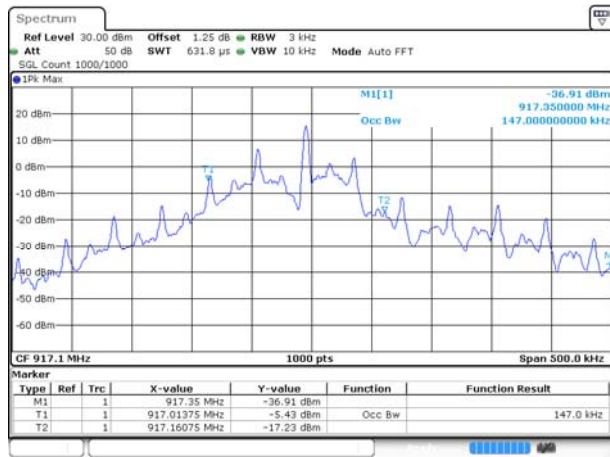

Date: 19 MAY 2020 17:27:25

MIDDLE CHANNEL

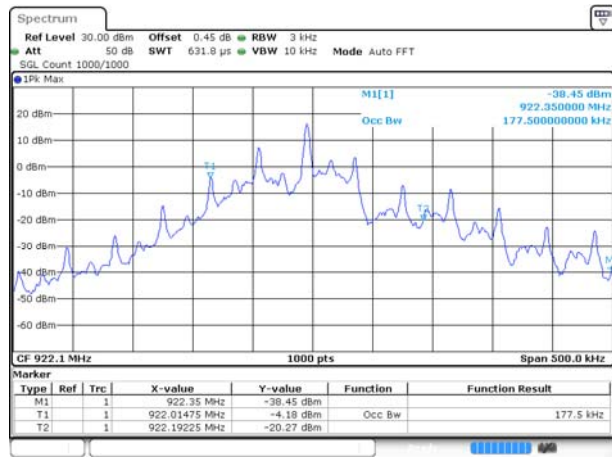

Date: 19 MAY 2020 17:41:50

HIGH CHANNEL



Date: 19 MAY 2020 17:48:40


A.4 Hopping Frequency Separation

Test Data

Mode	Frequency separation (MHz)	Max 20 dB Bandwidth (MHz)	Verdict
RFID	0.2007	0.124634	Pass

Test Plots

RFID

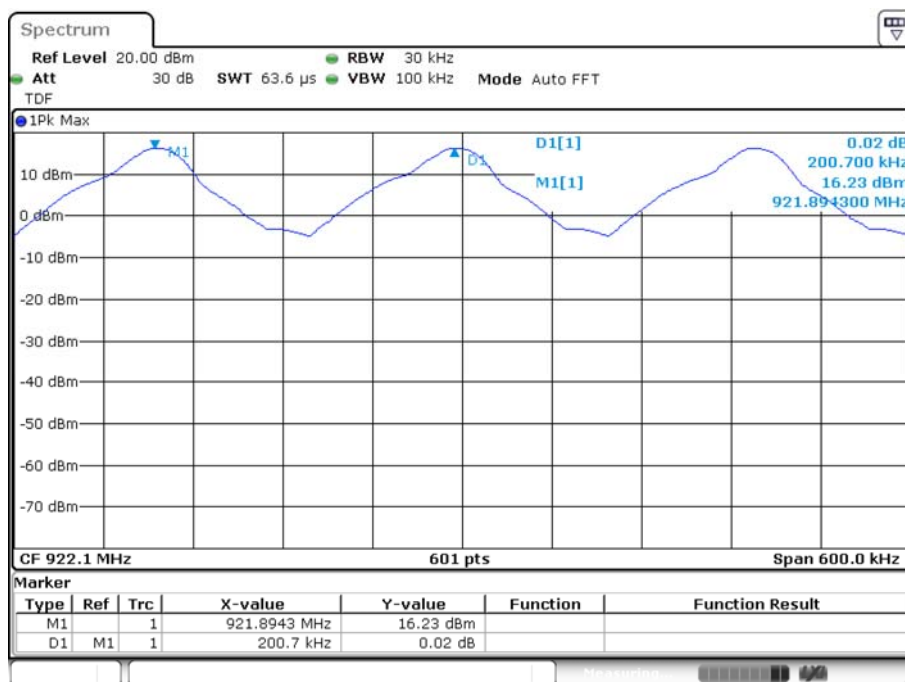


A.5 Average Time of Occupancy

Test Data

Total of Dwell (ms)	Limit (sec)	Verdict
376.8	0.4	Pass

RFID

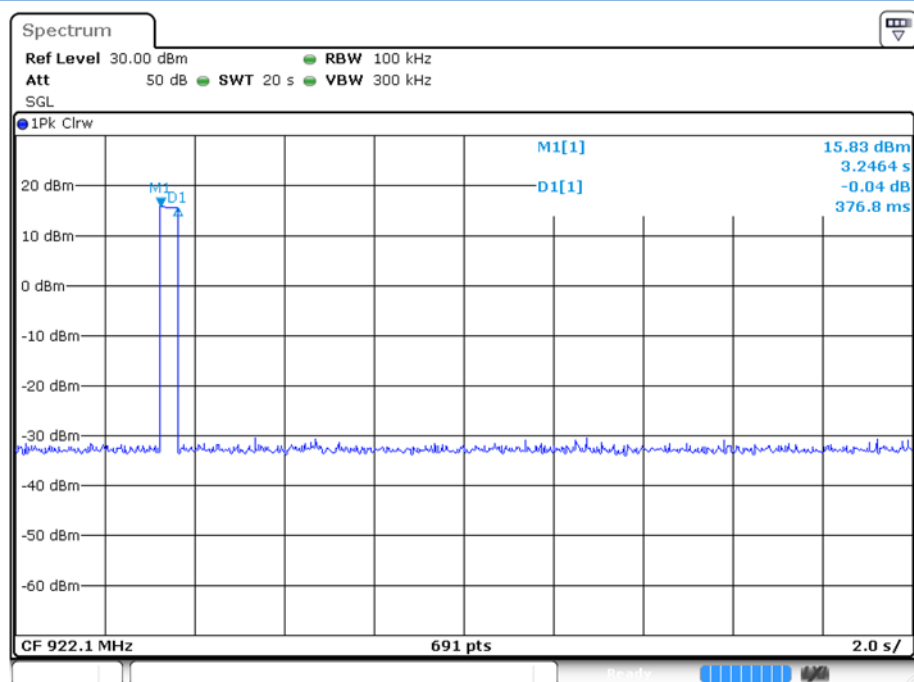

Date: 19.MAY.2020 18:25:28

A.6 Conducted Spurious Emissions & Authorized-band band-edge


Test Data

RFID				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-30.08	15.96	-4.04	Pass
Middle	-29.12	16.21	-3.79	Pass
High	-27.92	16.54	-3.46	Pass

RFID				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Hopping	-27.53	16.75	-3.25	Pass


Test Plots

LOW CHANNEL, CARRIER LEVEL

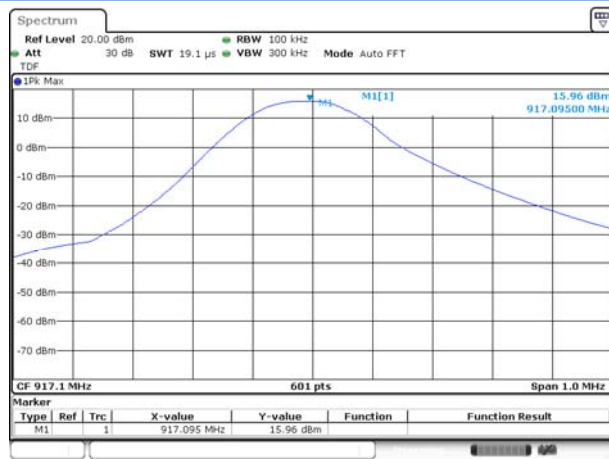


Date: 19 MAY 2020 17:30:49

LOW CHANNEL, Band Edge

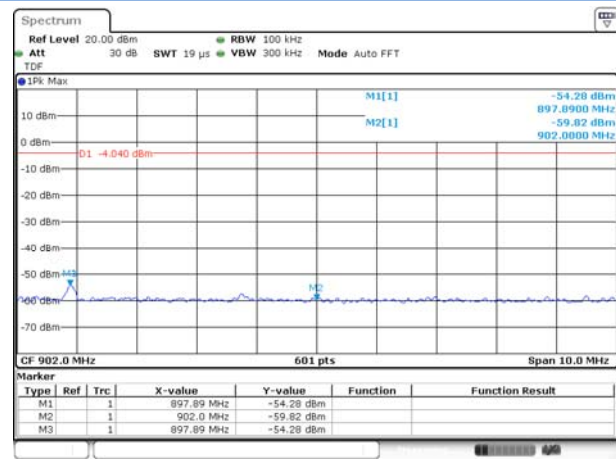


Date: 19 MAY 2020 17:33:02

LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

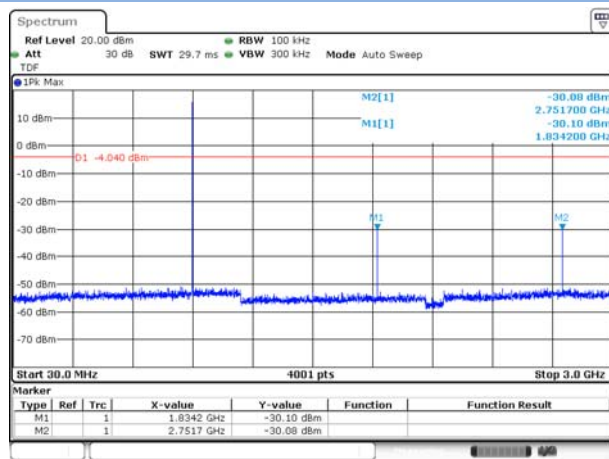


Date: 19 MAY 2020 17:31:08

LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

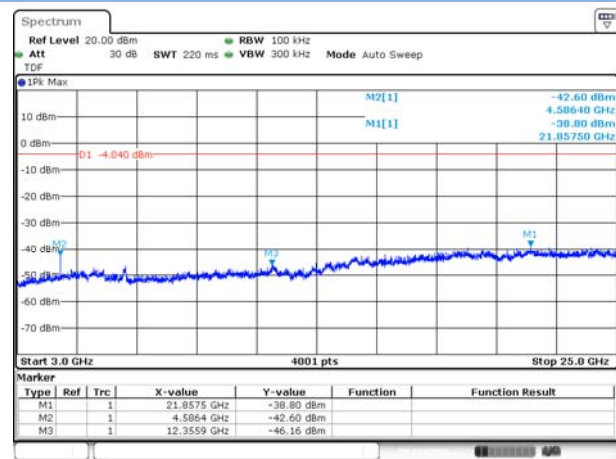


Date: 19 MAY 2020 17:32:35

MIDDLE CHANNEL, CARRIER LEVEL

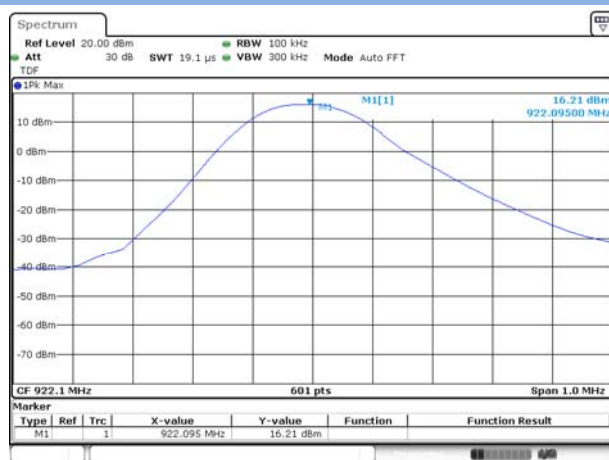


Date: 19 MAY 2020 17:42:41

MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

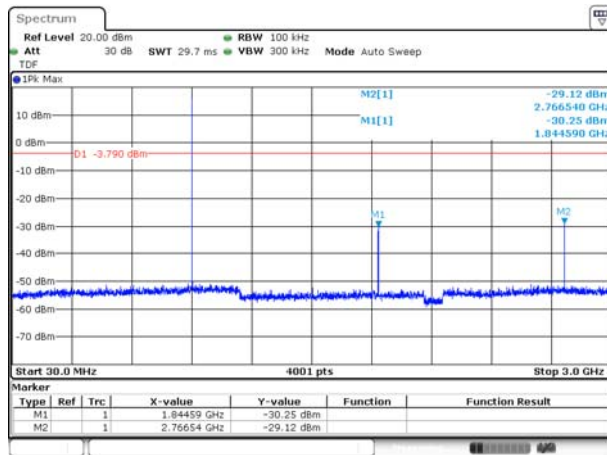


Date: 19 MAY 2020 17:43:06

MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

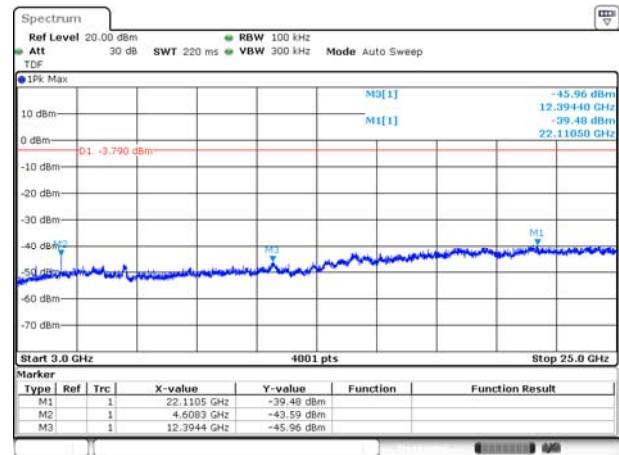


Date: 19 MAY 2020 17:43:29

HIGH CHANNEL, CARRIER LEVEL

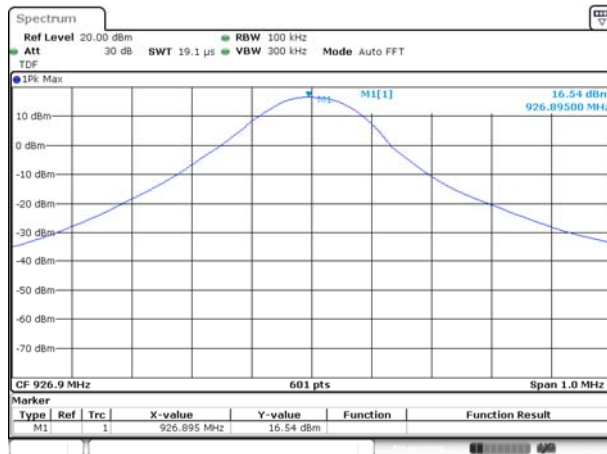


Date: 19 MAY 2020 17:48:56

HIGH CHANNEL , BAND EDGE

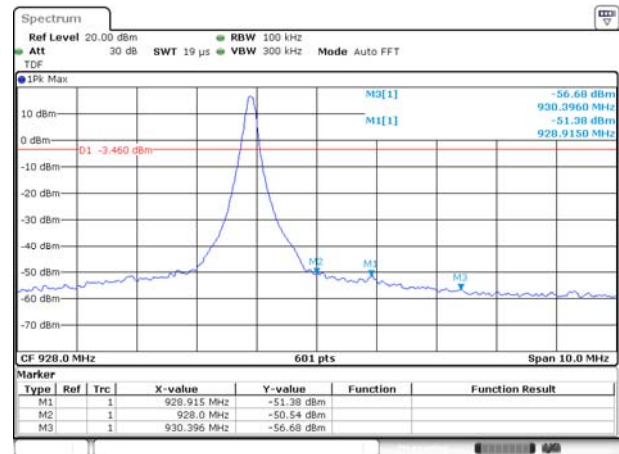


Date: 19 MAY 2020 17:48:21

HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

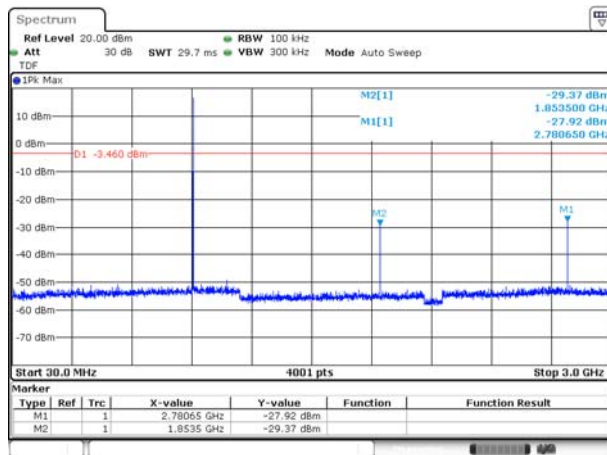


Date: 19 MAY 2020 17:47:20

HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

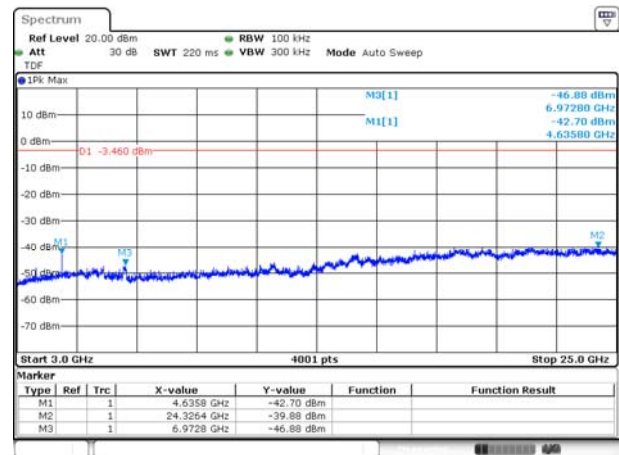

Date: 19 MAY 2020 17:47:42

HOPPING, CARRIER LEVEL

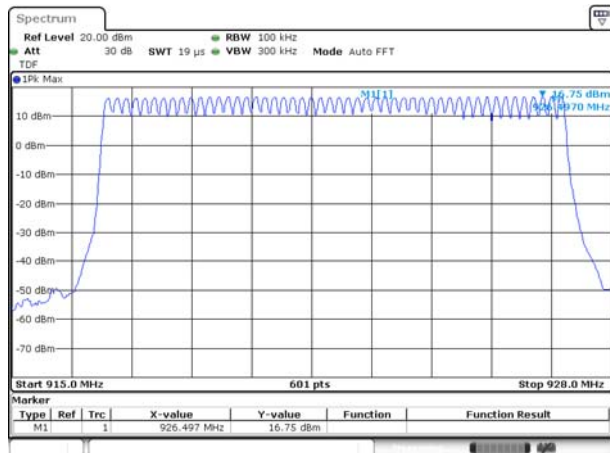


Date: 19 MAY 2020 18:14:09

Hopping BAND EDGE (LOW)




Date: 19 MAY 2020 18:18:23

Hopping BAND EDGE (HIGH)

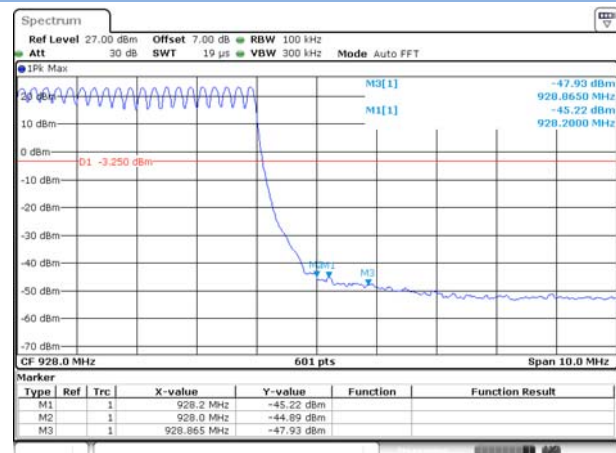


Date: 19 MAY 2020 18:19:16

Hopping Mode, SPURIOUS 30 MHz ~ 3 GHz

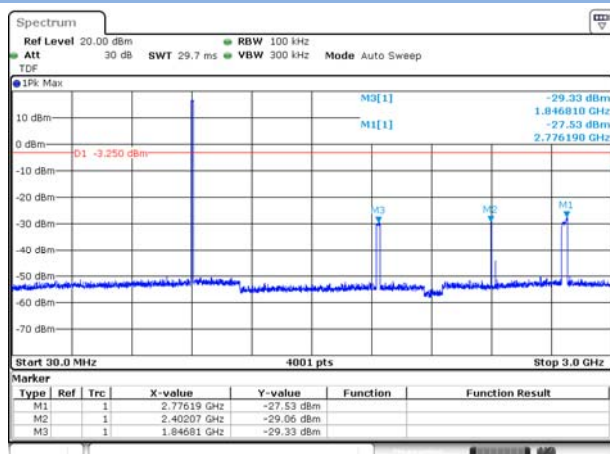

Date: 19 MAY 2020 18:15:07

Hopping Mode, SPURIOUS 3 GHz ~ 25 GHz

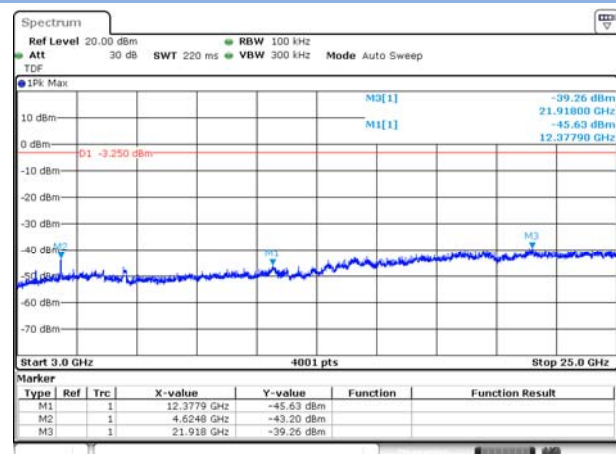

Date: 19 MAY 2020 18:15:41


A.7 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.
Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

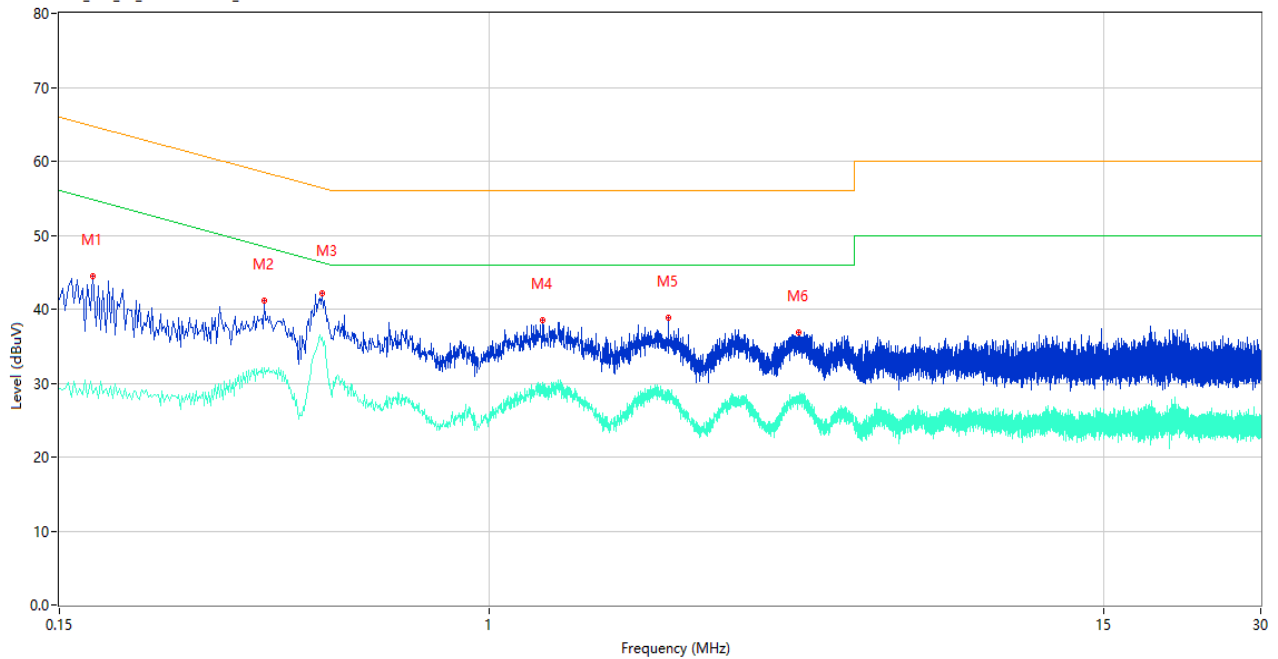

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.174	44.46	10.39	64.77	-20.31	Peak	L	Pass
1**	0.174	28.63	10.39	54.77	-26.14	AV	L	Pass
2	0.370	41.12	10.30	58.50	-17.38	Peak	L	Pass
2**	0.370	32.04	10.30	48.50	-16.46	AV	L	Pass
3	0.478	42.12	10.29	56.37	-14.25	Peak	L	Pass
3**	0.478	36.27	10.29	46.37	-10.10	AV	L	Pass
4	1.266	38.49	10.25	56.00	-17.51	Peak	L	Pass
4**	1.266	29.64	10.25	46.00	-16.36	AV	L	Pass
5	2.200	38.92	10.26	56.00	-17.08	Peak	L	Pass
5**	2.200	28.66	10.26	46.00	-17.34	AV	L	Pass
6	3.904	36.79	10.30	56.00	-19.21	Peak	L	Pass
6**	3.904	28.11	10.30	46.00	-17.89	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

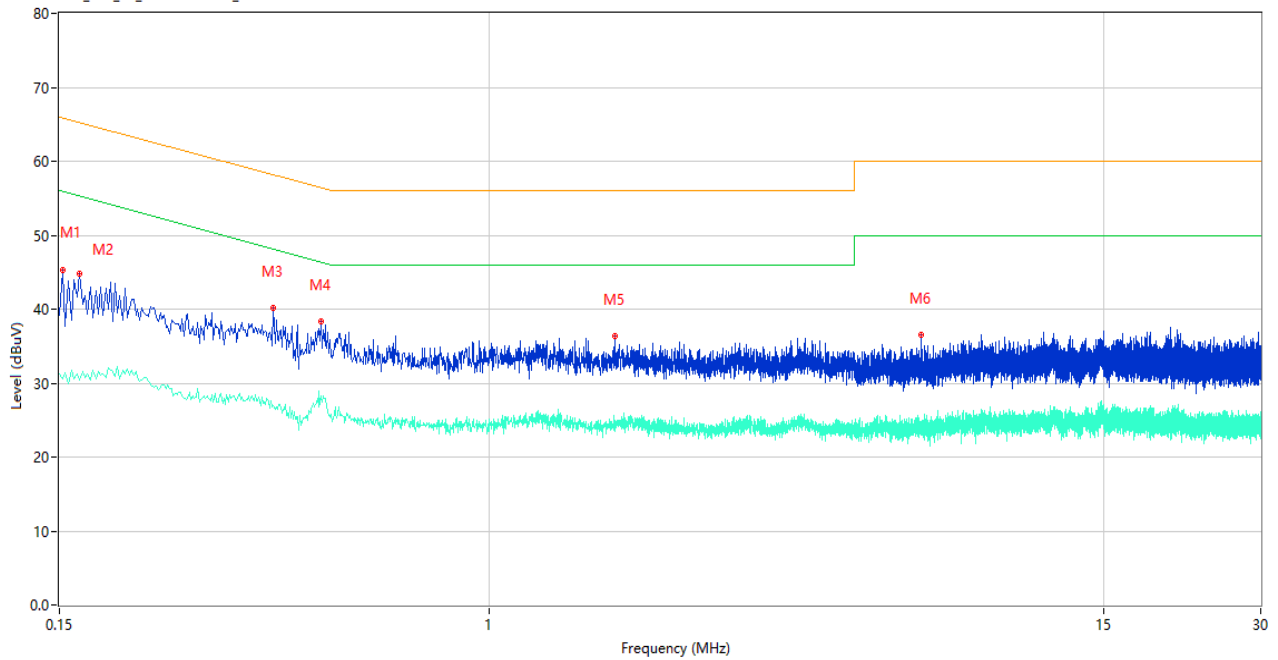

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.152	45.23	10.41	65.89	-20.66	Peak	N	Pass
1**	0.152	30.60	10.41	55.89	-25.29	AV	N	Pass
2	0.164	44.79	10.40	65.26	-20.47	Peak	N	Pass
2**	0.164	30.42	10.40	55.26	-24.84	AV	N	Pass
3	0.386	40.17	10.30	58.15	-17.98	Peak	N	Pass
3**	0.386	26.89	10.30	48.15	-21.26	AV	N	Pass
4	0.476	38.34	10.29	56.41	-18.07	Peak	N	Pass
4**	0.476	28.20	10.29	46.41	-18.21	AV	N	Pass
5	1.736	36.36	10.26	56.00	-19.64	Peak	N	Pass
5**	1.736	24.67	10.26	46.00	-21.33	AV	N	Pass
6	6.706	36.53	10.34	60.00	-23.47	Peak	N	Pass
6**	6.706	24.73	10.34	50.00	-25.27	AV	N	Pass

A.8 Radiated Spurious Emission

Note¹: The symbol of “--” in the table which means not application.

Note²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Test Data and Plots

Low Channel, 30 MHz to 1 GHz, ANT H


RE Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

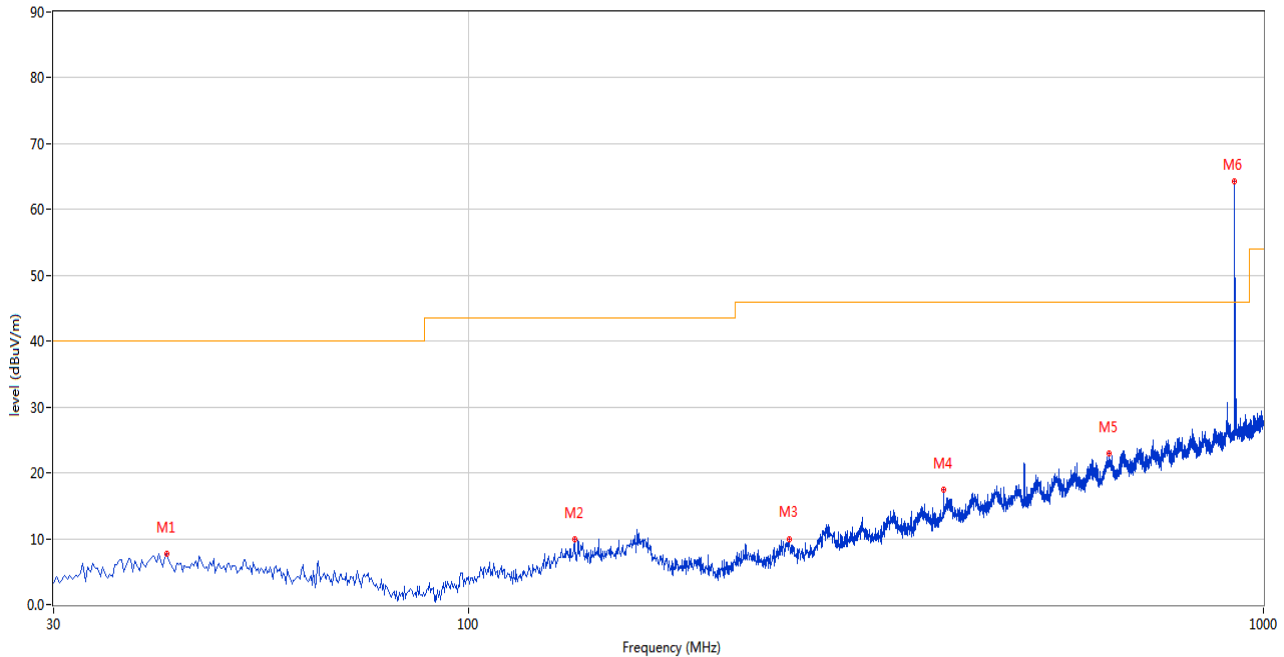

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	41.640	7.63	-25.87	40.0	-32.37	Peak	206.00	150	Horizontal	Pass
2	135.730	9.83	-24.88	43.5	-33.67	Peak	145.00	150	Horizontal	Pass
3	253.342	9.95	-24.28	46.0	-36.05	Peak	80.00	150	Horizontal	Pass
4	395.932	17.45	-19.02	46.0	-28.55	Peak	66.00	150	Horizontal	Pass
5	638.433	22.97	-12.31	46.0	-23.03	Peak	173.00	150	Horizontal	Pass
6	920.460	64.20	-7.22	46.0	18.20	Peak	238.00	150	Horizontal	N/A

Low Channel, 30 MHz to 1 GHz, ANT V


RE Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

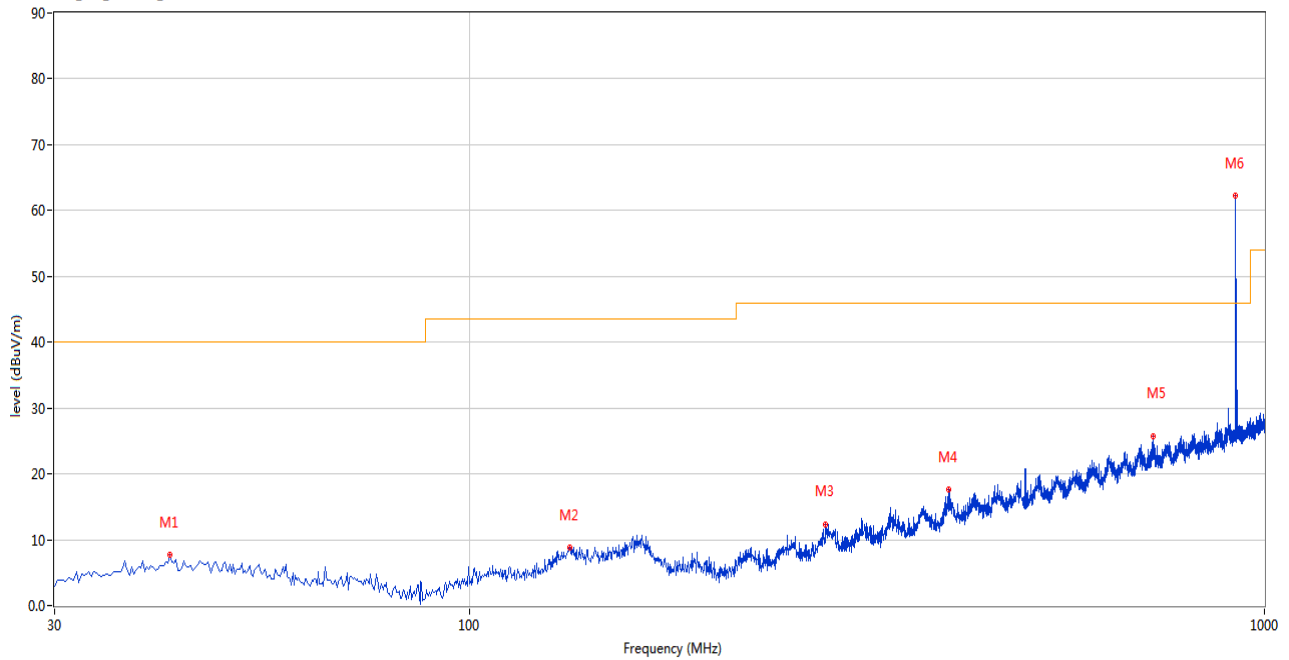

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	41.883	7.71	-25.91	40.0	-32.29	Peak	351.00	150	Vertical	Pass
2	133.548	8.82	-24.96	43.5	-34.68	Peak	47.00	150	Vertical	Pass
3	280.502	12.29	-23.11	46.0	-33.71	Peak	1.00	150	Vertical	Pass
4	400.055	17.63	-19.14	46.0	-28.37	Peak	220.00	150	Vertical	Pass
5	724.520	25.63	-10.80	46.0	-20.37	Peak	204.00	150	Vertical	Pass
6	920.460	62.27	-7.22	46.0	16.27	Peak	26.00	150	Vertical	N/A

Middle Channel, 30 MHz to 1 GHz, ANT H


RE Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

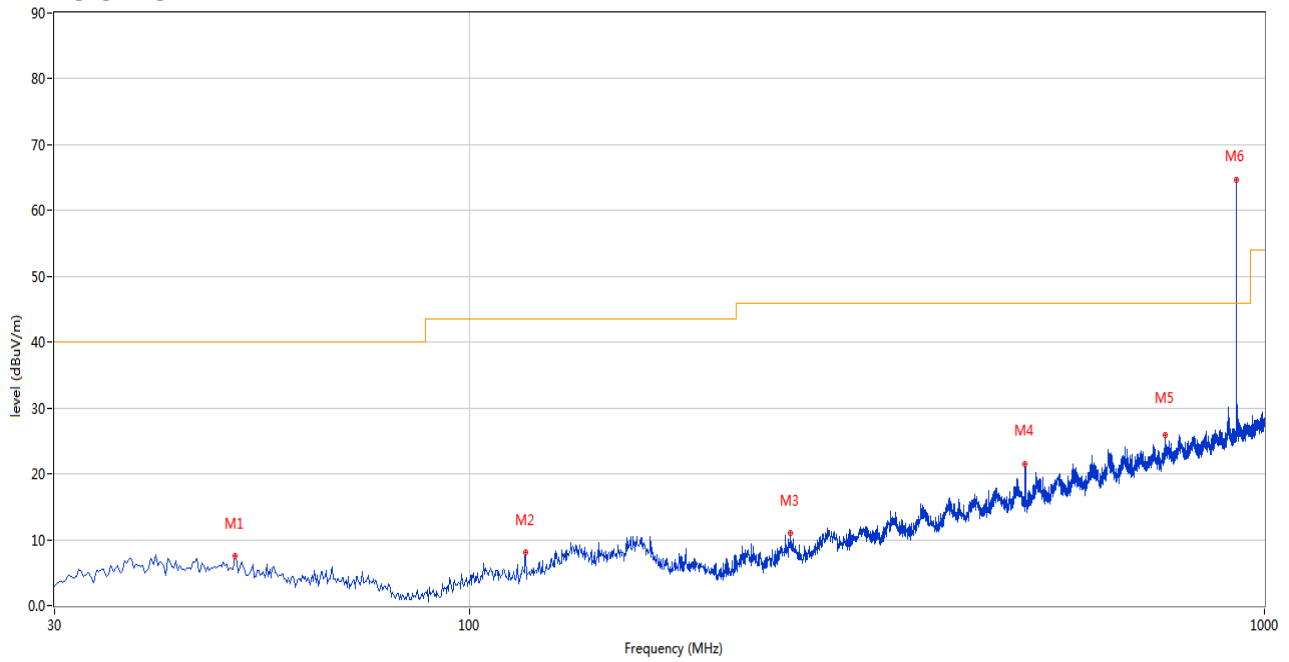

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	50.612	7.56	-26.05	40.0	-32.44	Peak	208.00	150	Horizontal	Pass
2	117.543	8.07	-26.37	43.5	-35.43	Peak	57.00	150	Horizontal	Pass
3	253.342	10.99	-24.28	46.0	-35.01	Peak	23.00	150	Horizontal	Pass
4	499.965	21.58	-16.60	46.0	-24.42	Peak	70.00	150	Horizontal	Pass
5	749.497	25.90	-10.44	46.0	-20.10	Peak	127.00	150	Horizontal	Pass
6	922.642	64.58	-7.33	46.0	18.58	Peak	294.00	150	Horizontal	N/A

Middle Channel, 30 MHz to 1 GHz, ANT V


RE Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

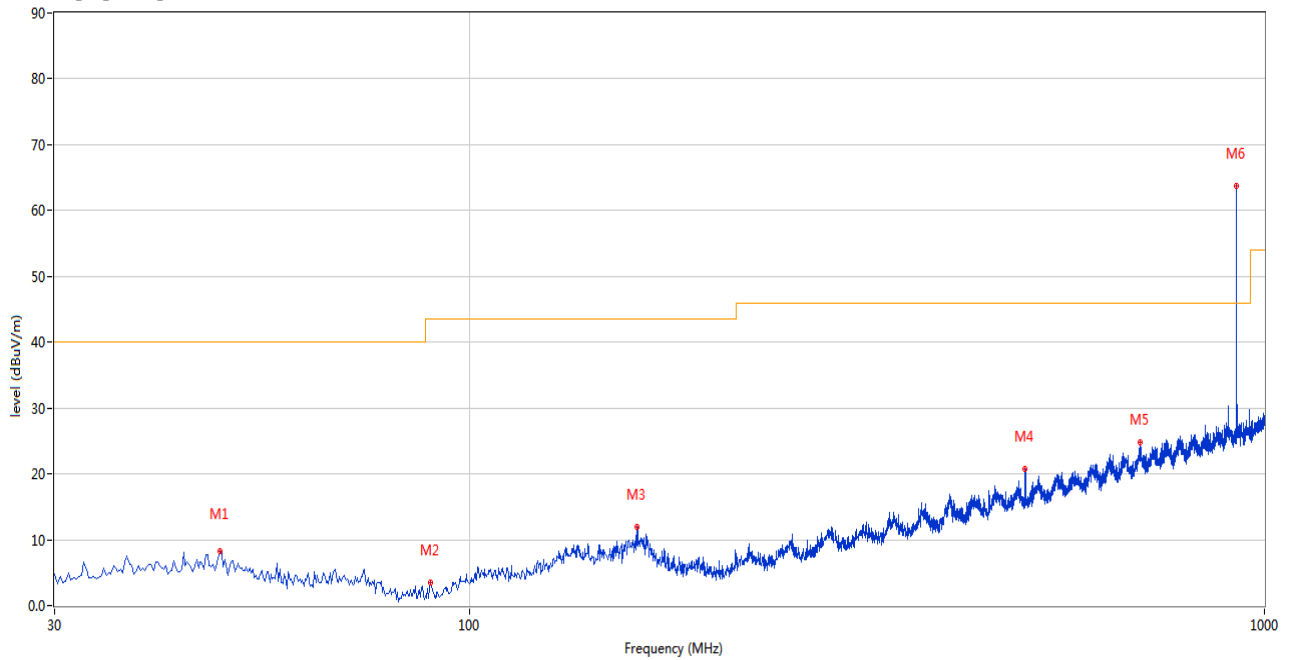

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.430	8.27	-26.08	40.0	-31.73	Peak	343.00	150	Vertical	Pass
2	89.170	3.40	-29.40	43.5	-40.10	Peak	172.00	150	Vertical	Pass
3	162.405	11.87	-23.63	43.5	-31.63	Peak	277.00	150	Vertical	Pass
4	499.965	20.74	-16.60	46.0	-25.26	Peak	92.00	150	Vertical	Pass
5	697.118	24.76	-11.52	46.0	-21.24	Peak	110.00	150	Vertical	Pass
6	922.642	63.65	-7.33	46.0	17.65	Peak	132.00	150	Vertical	N/A

High Channel, 30 MHz to 1 GHz, ANT H


RE Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

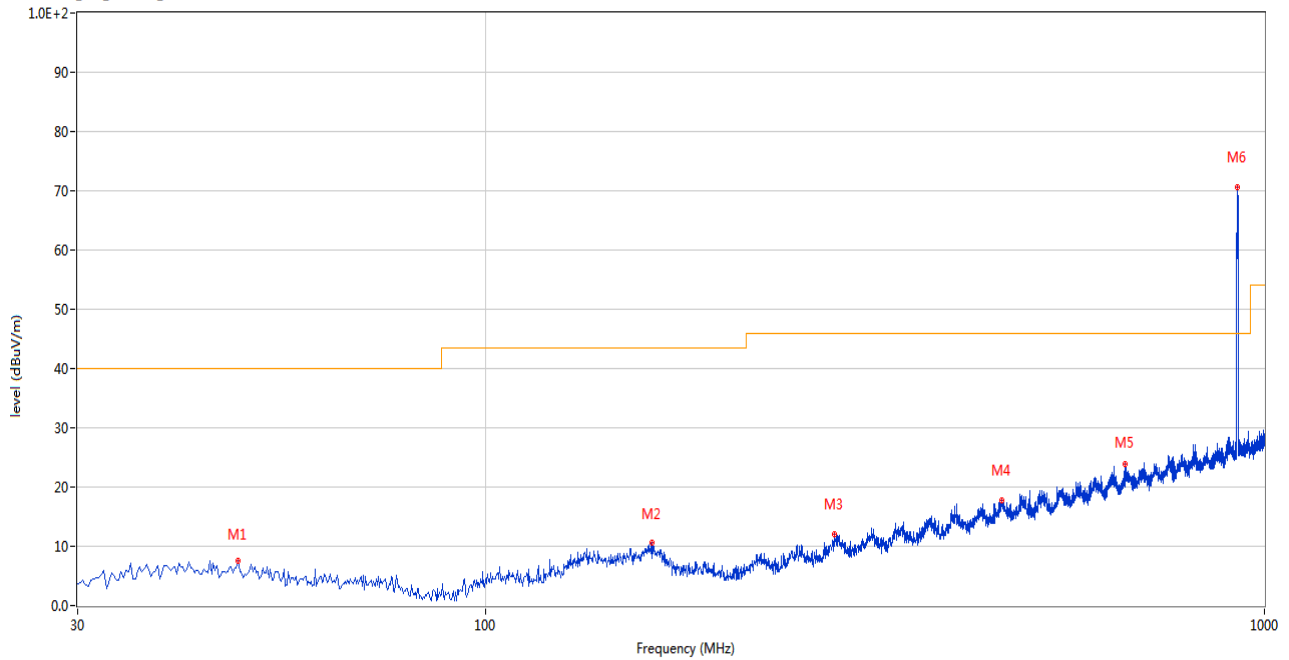

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	48.187	7.48	-26.08	40.0	-32.52	Peak	243.00	150	Horizontal	Pass
2	163.860	10.68	-23.79	43.5	-32.82	Peak	342.00	150	Horizontal	Pass
3	280.745	12.10	-23.08	46.0	-33.90	Peak	233.00	150	Horizontal	Pass
4	459.953	17.80	-17.12	46.0	-28.20	Peak	218.00	150	Horizontal	Pass
5	662.682	23.80	-11.94	46.0	-22.20	Peak	121.00	150	Horizontal	Pass
6	924.340	70.70	-2.11	46.0	24.70	Peak	299.00	150	Horizontal	N/A

High Channel, 30 MHz to 1 GHz, ANT V


RE Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

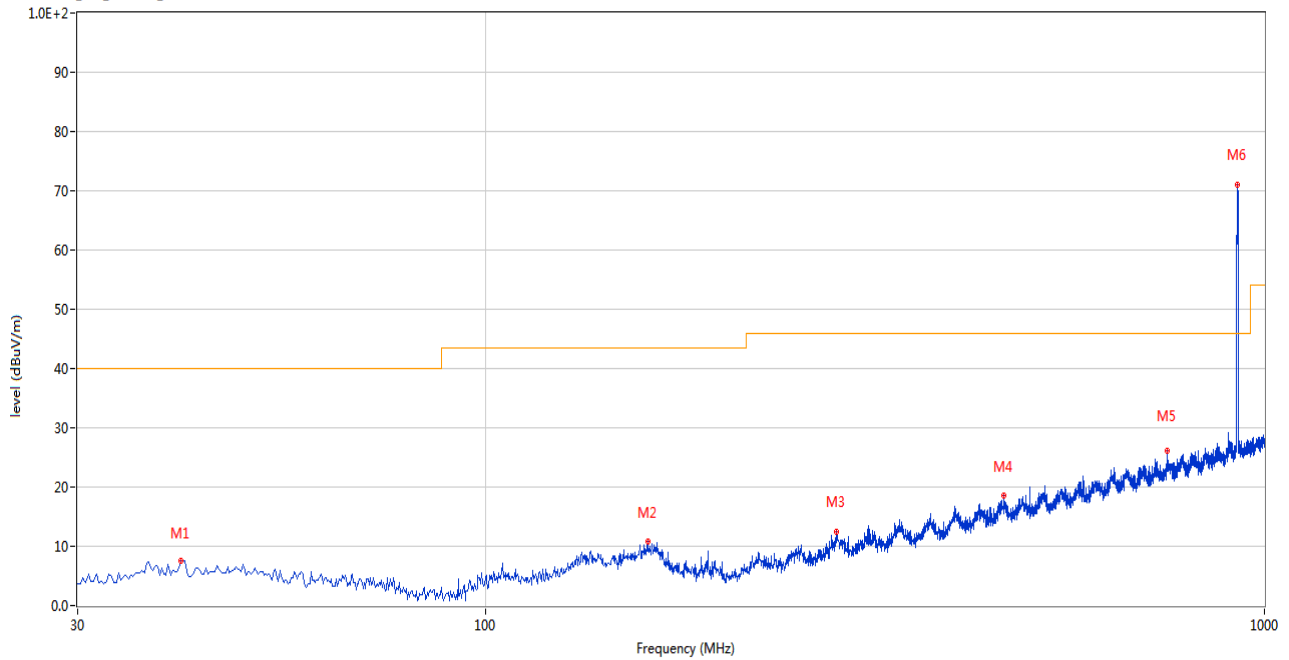

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	40.670	7.48	-25.69	40.0	-32.52	Peak	168.00	150	Vertical	Pass
2	161.678	10.89	-23.58	43.5	-32.61	Peak	132.00	150	Vertical	Pass
3	281.958	12.51	-22.93	46.0	-33.49	Peak	66.00	150	Vertical	Pass
4	462.862	18.50	-17.14	46.0	-27.50	Peak	46.00	150	Vertical	Pass
5	750.225	26.05	-10.40	46.0	-19.95	Peak	238.00	150	Vertical	Pass
6	924.340	71.06	-2.11	46.0	25.06	Peak	190.00	150	Vertical	N/A

Hopping Mode, 30 MHz to 1 GHz, ANT H


RE Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

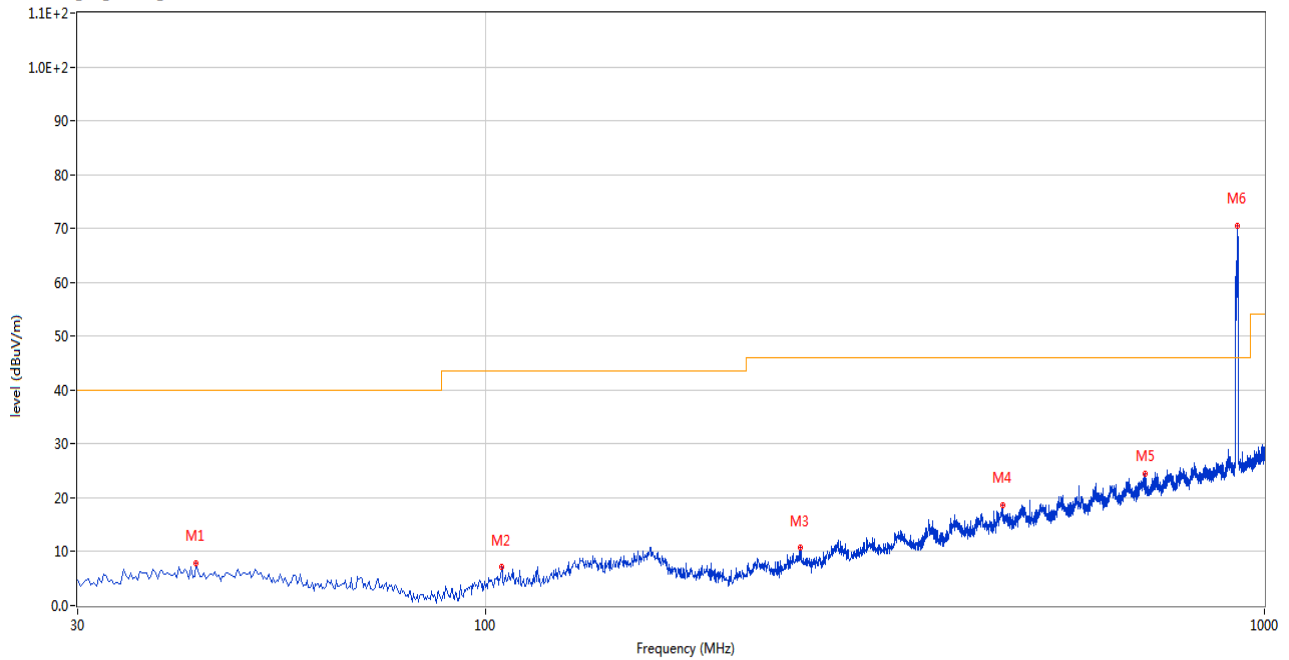

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	42.610	7.94	-26.05	40.0	-32.06	Peak	303.00	150	Horizontal	Pass
2	104.933	7.22	-27.68	43.5	-36.28	Peak	278.00	150	Horizontal	Pass
3	253.828	10.77	-24.21	46.0	-35.23	Peak	86.00	150	Horizontal	Pass
4	461.165	18.69	-17.18	46.0	-27.31	Peak	80.00	150	Horizontal	Pass
5	703.907	24.53	-11.27	46.0	-21.47	Peak	278.00	150	Horizontal	Pass
6	924.340	70.57	-2.11	46.0	24.57	Peak	237.00	150	Horizontal	N/A

Hopping Mode, 30 MHz to 1 GHz, ANT V

RE Test case_FCC_Part 15B_FCC Part 15B Class B 30MHz-1GHz

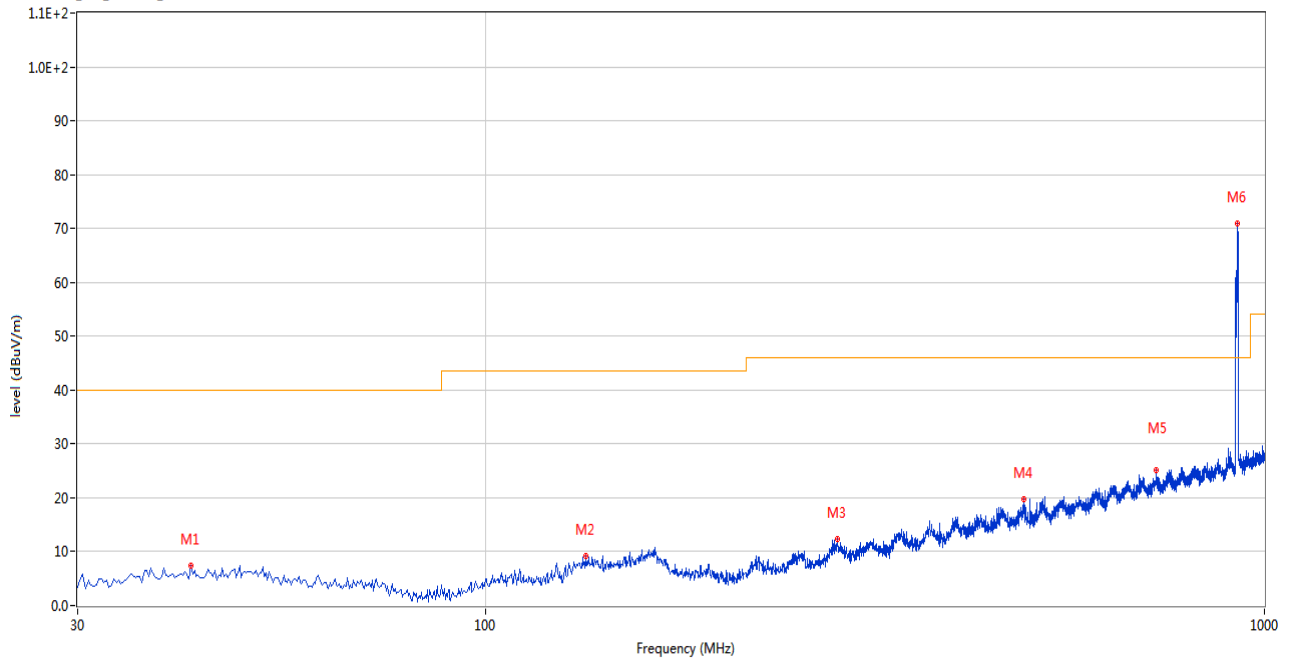

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	41.883	7.34	-25.91	40.0	-32.66	Peak	317.00	150	Vertical	Pass
2	134.518	9.19	-24.83	43.5	-34.31	Peak	109.00	150	Vertical	Pass
3	283.413	12.29	-22.76	46.0	-33.71	Peak	270.00	150	Vertical	Pass
4	490.750	19.71	-16.51	46.0	-26.29	Peak	151.00	150	Vertical	Pass
5	725.975	25.23	-10.82	46.0	-20.77	Peak	109.00	150	Vertical	Pass
6	924.340	70.95	-2.11	46.0	24.95	Peak	294.00	150	Vertical	N/A

Low Channel, 1 GHz to 12.75 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1845.500	47.68	-10.81	74.0	-26.32	Peak	277.00	150	Horizontal	Pass
1**	1845.500	44.18	-10.81	54.0	-9.82	AV	277.00	150	Horizontal	Pass
2	2768.000	50.92	-4.23	74.0	-23.08	Peak	177.00	150	Horizontal	Pass
2**	2768.000	41.31	-4.23	54.0	-12.69	AV	177.00	150	Horizontal	Pass
3	4613.000	48.54	-2.51	74.0	-25.46	Peak	324.00	150	Horizontal	Pass
3**	4613.000	31.46	-2.51	54.0	-22.54	AV	324.00	150	Horizontal	Pass
4	5536.000	52.69	0.10	74.0	-21.31	Peak	261.00	150	Horizontal	Pass
4**	5536.000	36.69	0.10	54.0	-17.31	AV	261.00	150	Horizontal	Pass
5	8007.688	54.39	18.55	74.0	-19.61	Peak	294.00	150	Horizontal	Pass
5**	8007.688	39.26	18.55	54.0	-14.74	AV	294.00	150	Horizontal	Pass
6	11679.062	57.03	20.08	74.0	-16.97	Peak	217.00	150	Horizontal	Pass
6**	11679.062	40.53	20.08	54.0	-13.47	AV	217.00	150	Horizontal	Pass

Low Channel, 1 GHz to 12.75 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1845.000	46.79	-10.82	74.0	-27.21	Peak	326.00	150	Vertical	Pass
1**	1845.000	31.47	-10.82	54.0	-22.53	AV	326.00	150	Vertical	Pass
2	2767.500	47.29	-4.25	74.0	-26.71	Peak	187.00	150	Vertical	Pass
2**	2767.500	31.42	-4.25	54.0	-22.58	AV	187.00	150	Vertical	Pass
3	4543.000	47.64	-2.53	74.0	-26.36	Peak	81.00	150	Vertical	Pass
3**	4543.000	31.44	-2.53	54.0	-22.56	AV	81.00	150	Vertical	Pass
4	5536.000	52.30	0.10	74.0	-21.70	Peak	108.00	150	Vertical	Pass
4**	5536.000	37.91	0.10	54.0	-16.09	AV	108.00	150	Vertical	Pass
5	7970.313	53.86	17.63	74.0	-20.14	Peak	156.00	150	Vertical	Pass
5**	7970.313	37.97	17.63	54.0	-16.03	AV	156.00	150	Vertical	Pass
6	11750.938	55.92	18.93	74.0	-18.08	Peak	98.00	150	Vertical	Pass
6**	11750.938	39.99	18.93	54.0	-14.01	AV	98.00	150	Vertical	Pass

Middle Channel, 1 GHz to 12.75 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1845.500	43.97	-14.14	74.0	-30.03	Peak	283.00	150	Horizontal	Pass
1**	1845.500	40.33	-14.14	54.0	-13.67	AV	283.00	150	Horizontal	Pass
2	2768.000	46.17	-8.56	74.0	-27.83	Peak	178.00	150	Horizontal	Pass
2**	2768.000	37.30	-8.56	54.0	-16.70	AV	178.00	150	Horizontal	Pass
3	4613.000	48.41	-2.51	74.0	-25.59	Peak	326.00	150	Horizontal	Pass
3**	4613.000	31.65	-2.51	54.0	-22.35	AV	326.00	150	Horizontal	Pass
4	5508.000	50.23	0.19	74.0	-23.77	Peak	250.00	150	Horizontal	Pass
4**	5508.000	34.42	0.19	54.0	-19.58	AV	250.00	150	Horizontal	Pass
5	9856.312	54.46	17.62	74.0	-19.54	Peak	361.00	150	Horizontal	Pass
5**	9856.312	38.55	17.62	54.0	-15.45	AV	361.00	150	Horizontal	Pass
6	12231.063	56.44	20.44	74.0	-17.56	Peak	265.00	150	Horizontal	Pass
6**	12231.063	41.01	20.44	54.0	-12.99	AV	265.00	150	Horizontal	Pass

Middle Channel, 1 GHz to 12.75 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1845.000	47.48	-10.82	74.0	-26.52	Peak	128.00	150	Vertical	Pass
1**	1845.000	31.46	-10.82	54.0	-22.54	AV	128.00	150	Vertical	Pass
2	2842.500	48.28	-3.47	74.0	-25.72	Peak	181.00	150	Vertical	Pass
2**	2842.500	31.58	-3.47	54.0	-22.42	AV	181.00	150	Vertical	Pass
3	4591.000	48.17	-2.59	74.0	-25.83	Peak	63.00	150	Vertical	Pass
3**	4591.000	31.58	-2.59	54.0	-22.42	AV	63.00	150	Vertical	Pass
4	5536.000	52.35	0.10	74.0	-21.65	Peak	122.00	150	Vertical	Pass
4**	5536.000	37.96	0.10	54.0	-16.04	AV	122.00	150	Vertical	Pass
5	8611.438	53.61	18.22	74.0	-20.39	Peak	294.00	150	Vertical	Pass
5**	8611.438	38.13	18.22	54.0	-15.87	AV	294.00	150	Vertical	Pass
6	11703.500	56.06	19.76	74.0	-17.94	Peak	125.00	150	Vertical	Pass
6**	11703.500	40.57	19.76	54.0	-13.43	AV	125.00	150	Vertical	Pass

High Channel, 1 GHz to 12.75 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1841.500	44.15	-14.52	74.0	-29.85	Peak	159.00	150	Horizontal	Pass
1**	1841.500	40.91	-14.52	54.0	-13.09	AV	159.00	150	Horizontal	Pass
2	2773.500	47.26	-8.90	74.0	-26.74	Peak	221.00	150	Horizontal	Pass
2**	2773.500	31.46	-8.90	54.0	-22.54	AV	221.00	150	Horizontal	Pass
3	4622.000	51.41	-2.53	74.0	-22.59	Peak	216.00	150	Horizontal	Pass
3**	4622.000	34.37	-2.53	54.0	-19.63	AV	216.00	150	Horizontal	Pass
4	5550.000	51.11	0.39	74.0	-22.89	Peak	200.00	150	Horizontal	Pass
4**	5550.000	40.64	0.39	54.0	-13.36	AV	200.00	150	Horizontal	Pass
5	8060.875	53.58	18.37	74.0	-20.42	Peak	314.00	150	Horizontal	Pass
5**	8060.875	38.71	18.37	54.0	-15.29	AV	314.00	150	Horizontal	Pass
6	11602.875	55.84	20.15	74.0	-18.16	Peak	208.00	150	Horizontal	Pass
6**	11602.875	40.20	20.15	54.0	-13.80	AV	208.00	150	Horizontal	Pass

High Channel, 1 GHz to 12.75 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1848.000	43.14	-14.07	74.0	-30.86	Peak	312.00	150	Vertical	Pass
1**	1848.000	39.92	-14.07	54.0	-14.08	AV	312.00	150	Vertical	Pass
2	2774.500	44.19	-8.68	74.0	-29.81	Peak	2.00	150	Vertical	Pass
2**	2774.500	37.82	-8.68	54.0	-16.18	AV	2.00	150	Vertical	Pass
3	4804.000	51.66	-1.20	74.0	-22.34	Peak	310.00	150	Vertical	Pass
3**	4804.000	39.84	-1.20	54.0	-14.16	AV	310.00	150	Vertical	Pass
4	5530.000	53.53	0.31	74.0	-20.47	Peak	116.00	150	Vertical	Pass
4**	5530.000	38.09	0.31	54.0	-15.91	AV	116.00	150	Vertical	Pass
5	8070.938	55.20	18.51	74.0	-18.80	Peak	16.00	150	Vertical	Pass
5**	8070.938	38.54	18.51	54.0	-15.46	AV	16.00	150	Vertical	Pass
6	11660.375	55.99	20.27	74.0	-18.01	Peak	331.00	150	Vertical	Pass
6**	11660.375	40.23	20.27	54.0	-13.77	AV	331.00	150	Vertical	Pass

Hopping Mode, 1 GHz to 12.75 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1840.000	44.29	-14.55	74.0	-29.71	Peak	139.00	150	Horizontal	Pass
1**	1840.000	39.10	-14.55	54.0	-14.90	AV	139.00	150	Horizontal	Pass
2	2780.000	49.25	-8.87	74.0	-24.75	Peak	50.00	150	Horizontal	Pass
2**	2780.000	41.56	-8.87	54.0	-12.44	AV	50.00	150	Horizontal	Pass
3	4630.000	53.22	-2.22	74.0	-20.78	Peak	175.00	150	Horizontal	Pass
3**	4630.000	41.50	-2.22	54.0	-12.50	AV	175.00	150	Horizontal	Pass
4	5549.000	51.86	0.34	74.0	-22.14	Peak	319.00	150	Horizontal	Pass
4**	5549.000	48.14	0.34	54.0	-5.86	AV	319.00	150	Horizontal	Pass
5	8010.563	54.03	18.63	74.0	-19.97	Peak	168.00	150	Horizontal	Pass
5**	8010.563	38.96	18.63	54.0	-15.04	AV	168.00	150	Horizontal	Pass
6	11273.687	55.96	18.00	74.0	-18.04	Peak	89.00	150	Horizontal	Pass
6**	11273.687	38.99	18.00	54.0	-15.01	AV	89.00	150	Horizontal	Pass

Hopping Mode, 1 GHz to 12.75 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1846.000	42.24	-14.07	74.0	-31.76	Peak	228.00	150	Vertical	Pass
1**	1846.000	38.63	-14.07	54.0	-15.37	AV	228.00	150	Vertical	Pass
2	2780.000	46.87	-8.87	74.0	-27.13	Peak	5.00	150	Vertical	Pass
2**	2780.000	36.65	-8.87	54.0	-17.35	AV	5.00	150	Vertical	Pass
3	4630.000	48.72	-2.22	74.0	-25.28	Peak	207.00	150	Vertical	Pass
3**	4630.000	39.20	-2.22	54.0	-14.80	AV	207.00	150	Vertical	Pass
4	5553.000	53.60	0.67	74.0	-20.40	Peak	7.00	150	Vertical	Pass
4**	5553.000	37.73	0.67	54.0	-16.27	AV	7.00	150	Vertical	Pass
5	8045.063	53.84	18.07	74.0	-20.16	Peak	255.00	150	Vertical	Pass
5**	8045.063	38.33	18.07	54.0	-15.67	AV	255.00	150	Vertical	Pass
6	11664.687	55.60	20.22	74.0	-18.40	Peak	63.00	150	Vertical	Pass
6**	11664.687	40.70	20.22	54.0	-13.30	AV	63.00	150	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Pass

Note: The adjacent to the restricted frequency band (608-614MHz and 960-1240MHz) is far away the fundamental, it is noise only. Please refer to Section A.8 for test data.

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2040671-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2040671-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2040671-AI.PDF”.

--END OF REPORT--