

EMI - T E S T R E P O R T

- FCC Part 15.245 -

Test Report No. :	T38684-00-00HS	02. October 2014 Date of issue
--------------------------	-----------------------	-----------------------------------

Type / Model Name : K-LC1

Product Description : Field disturbance sensor

Applicant : Schindler Aufzüge AG

Address : Zugerstrasse 13
6030 EBICON, SWITZERLAND

Manufacturer : RFbeam Microwave GmbH

Address : Farbgutstrasse 3
9008 ST.GALLEN, SWITZERLAND

Licence holder : Schindler Aufzüge AG

Address : Zugerstrasse 13
6030 EBICON, SWITZERLAND

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------



The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	3
2 EQUIPMENT UNDER TEST	4
3 Test result summary	7
3.1 FINAL ASSESSMENT:	7
4 TEST ENVIRONMENT	8
4.1 Address of the test laboratory	8
4.2 Environmental conditions	8
4.3 Statement of the measurement uncertainty	8
4.4 Measurement protocol for FCC and IC	9
5 TEST CONDITIONS AND RESULTS	11
5.1 AC power line conducted emissions	11
5.2 Field strength of fundamental	13
5.3 Out-of-band emission, radiated	17
5.4 EBW	28
5.5 Antenna application	28
6 USED TEST EQUIPMENT AND ACCESSORIES	29

1 TEST STANDARDS


The tests were performed according to following standards:


FCC Rules and Regulations Part 15, Subpart A - General (September, 2013)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths
FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (September, 2013)	
Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.245	Operation within the bands 902 - 928 MHz, 2435 - 2465 MHz, 5785 - 5815 MHz, 10500 – 10550 MHz and 24075 - 24175 MHz
ANSI C63.4: 2009	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
ANSI C95.1:2005	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
CISPR 16-4-2: 2003	Uncertainty in EMC measurement
CISPR 22: 2005 EN 55022: 2006	Information technology equipment

2 EQUIPMENT UNDER TEST

2.1 Photo documentation of the EUT

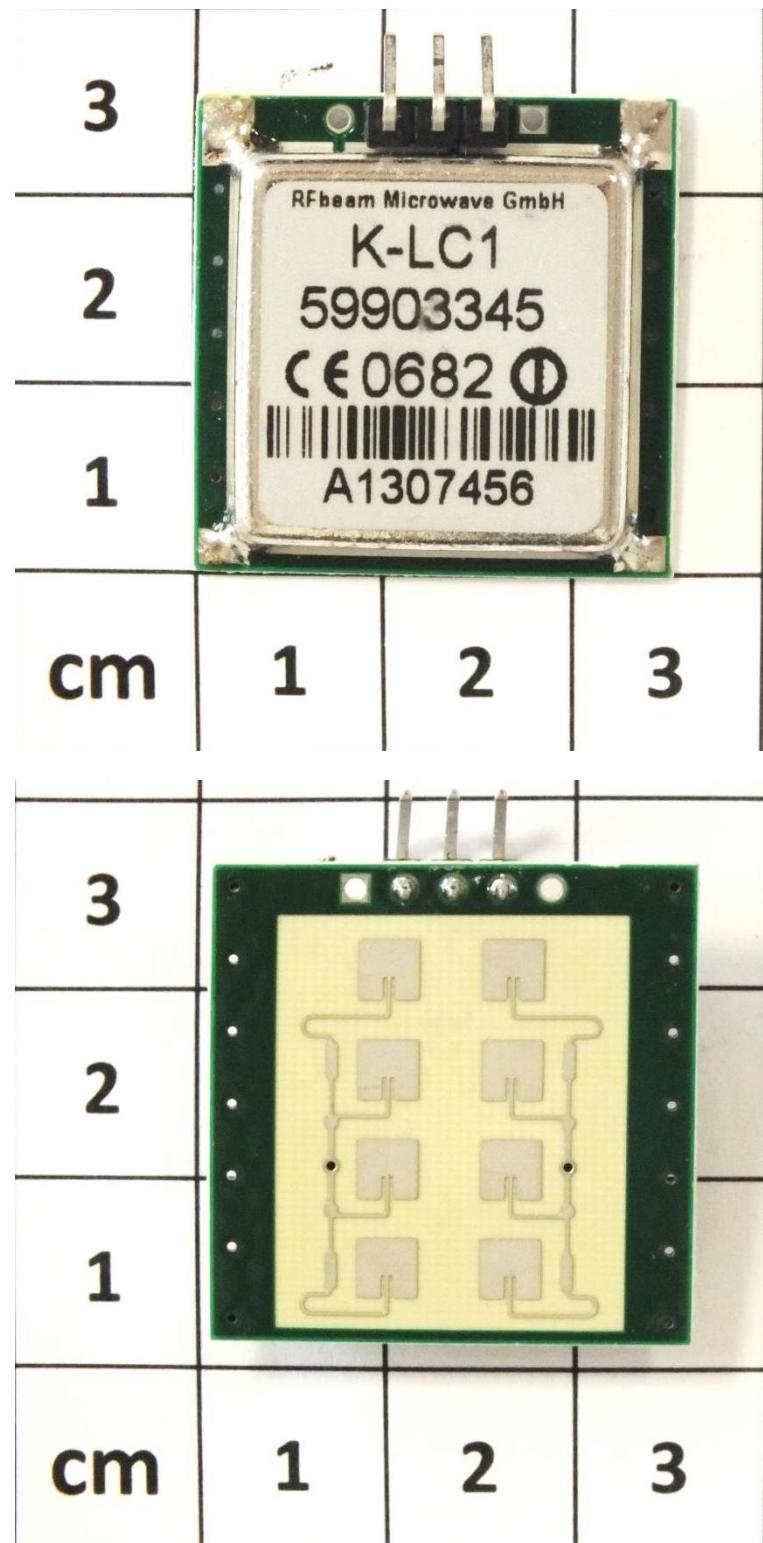

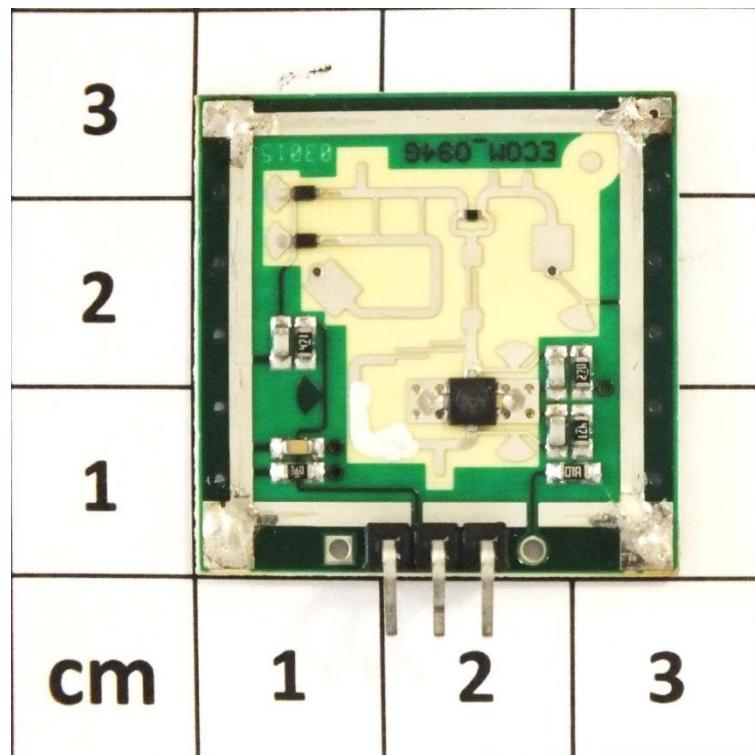

2.2 Equipment category

The EUT is a field disturbance sensor.

2.3 Short description of the equipment under test (EUT)

The EUT is a field disturbance sensor with frequency emissions in only one settable range in the operating band of 24075 MHz to 24175 MHz.

The sensor is a 24 GHz radar sensor for door opening applications. Based on the object list as a generic data interface, following applications are possible:

- Movement detector
- Object speed measurement systems
- Industrial sensor

Number of tested samples: 1
Serial number: A1307456

EUT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

2.4 Variants of the EUT

There are no variants.

2.5 Operation frequency and channel plan

The operating frequency is 24.075 GHz to 24.175 GHz.

Channel	Frequency (MHz)
1	24122.5

2.6 Transmit operating modes

As soon as the equipment is powered on, TX starts operating immediately. For TX continuous no special test software is needed.

2.7 Antenna

The following integrated antennas are used with the EUT:

- Integrated linear polarised micro strip patch array antenna.

The antennas cannot be unattached by the user.

2.8 Power supply system utilised

Power supply voltage : 115 VAC, 60 Hz (5 VDC)

2.9 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- Power supply 100 – 240 VAC, 50 – 60 Hz Model : -ANSMANN, APS1000 traveller

2.10 Determination of worst case conditions for final measurement

Exploratory measurements have been made in all three orthogonal axes and the settings of the EUT are changed to locate at which position and at what setting of the EUT produce the maximum of the emissions. For the further measurement the EUT is set in Y position. Power and channel setting is not available. No test software is needed for testing.

As worst case the following channels and test modes are selected for the final test:

f	Available channel	Tested channels	Power setting	Modulation	Modulation type	Data rate
24075 - 24175	1	1	max	no	-	-

- TX continuous mode

2.10.1 Test jig

No test jig is used. All measurements are done radiated.

3 Test result summary

Operating in the 24075 MHz – 24175 MHz band:

FCC Rule Part	Description	Result
15.203	Antenna requirement	passed
15.204	External radio frequency power amplifiers	passed
15.205(a)	Emissions in restricted bands	passed
15.207(a)	AC power line conducted emissions	passed
15.209(a)	Radiated emission limits; general requirements	passed
15.215(c)	EBW	NA
15.245(b)	Field strength of fundamental	passed
15.245(b)	Out-of-band emission, radiated	passed

Abbreviation: NA not applicable.

3.1 FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 01 September 2014

Testing concluded on : 04 September 2014

Checked by:



Klaus Gegenfurtner
I confirm the correctness
and Integrity of this
documents
2014.10.02 10:34:42
+02'00'

Klaus Gegenfurtner
Teamleader Radio

Tested by:



Hermann Smetana
I am the author of
this document
2014.10.02
10:32:33 +02'00'

Hermann Smetana
Radio Team

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.4 Measurement protocol for FCC and IC

4.4.1 General information

4.4.1.1 Test methodology

In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

4.4.2 Conducted emission

4.4.2.1 Description of measurement

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC limit or to the CISPR limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 * \log(\mu\text{V}) \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ohm / 50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

4.4.3 Radiated Measurement

The radiated measurements are done in 2 steps

- Exploratory measurements
- Final measurements

4.4.3.1 Method of exploratory radiated emission maximization

The maximum radiated emission for a given mode of operation may be found during exploratory testing by using the following step-by-step procedure:

- a) Monitor received signal across the frequency range of interest at a fixed antenna height and EUT azimuth.
- b) If appropriate, manipulate the system cables to produce the highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
- c) Rotate the EUT 360° to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, go back to the corresponding azimuth position and repeat step b). Otherwise, orient the EUT azimuth to repeat the highest amplitude observation and proceed.
- d) Move the antenna over its fully allowed range of travel to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, then return to step b) with the antenna fixed at this height. Otherwise, move the antenna to the height that repeats the highest amplitude observation and proceed.
- e) Change the polarization of the antenna and repeat step b) through step d). Compare the resulting suspected highest amplitude signal with that found for the other polarization. Select and note the higher of the two signals. This signal is termed the highest observed signal with respect to the limit for this EUT operational mode.
- f) The effects of various modes of operation shall be examined. One way to do this is to vary the equipment modes as step a) through step g) are being performed.

g) After completing step a) through step f), record the final EUT arrangement, mode of operation, and cable arrangement to use for the final radiated emission test in 8.3.2.

4.4.3.2 Final radiated emission measurements (9 kHz to 1 GHz)

Based on the measurement results from 8.3.1.1, the single EUT, cable and wire arrangement, and mode of operation that produces the emission that has the highest amplitude relative to the limit is selected for the final measurement. The final measurements are then performed on a site meeting the requirements of 5.3 or 5.4, as appropriate. If the EUT is relocated from an exploratory test site to a final test site, the highest emission relative to the limit shall be re-maximized at the final test location before final radiated emissions measurements are performed. However, antenna height and polarization and EUT azimuth are to be varied.

In addition, the full frequency spectrum (for the range to be checked for meeting compliance) shall be investigated. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated by 90° relative to the ground plane to repeat the measurements for both the horizontal and vertical antenna polarizations. During the full frequency spectrum investigation, particular focus should be made on those frequencies found in exploratory testing that were used to find the final test configuration, mode of operation, and arrangement (associated with achieving the least margin with respect to the limit). This full spectrum test constitutes the compliance measurement.

4.4.3.3 Final radiated emission measurements (1 GHz to 100 GHz)

The final measurements are performed on a site meeting the requirements of ANSI C63.4, Clause 5.5. For measurements above 1 GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the "cone of radiation" from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. The antenna may have to be higher or lower than the EUT, depending on the size and mounting height of the EUT, but the antenna should be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of measurements. The data collected shall satisfy the report requirements of ANSI C63.4, Clause 10.

NOTE 1 — Where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

NOTE 2 — Use of waveguide and flexible waveguide may be necessary at frequencies above 10 GHz to achieve usable signal-to-noise ratios at required measurement distances. If so, it may be necessary to restrict the height search of the antenna, and special care should be taken to ensure that maximum emissions are correctly measured.

NOTE 3 — Most devices that cause emissions above 10 GHz are physically small compared with the beam widths of typical horn antennas used for EMC measurements. For such EUTs and frequencies, it may be preferable to vary the height and polarization of the EUT instead of the receiving antenna to maximize the measured emissions.

5 TEST CONDITIONS AND RESULTS



5.1 AC power line conducted emissions

For test instruments and accessories used see section 6 Part **A 4**.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.1 Photo documentation of the test set-up

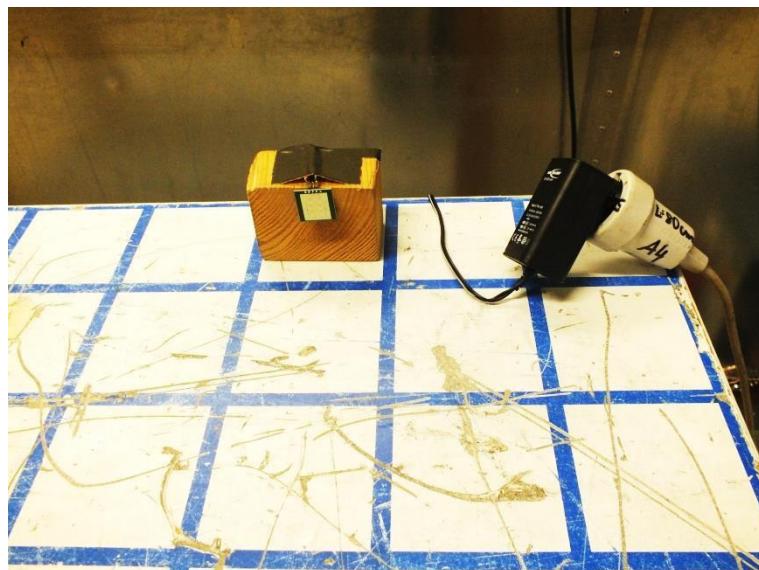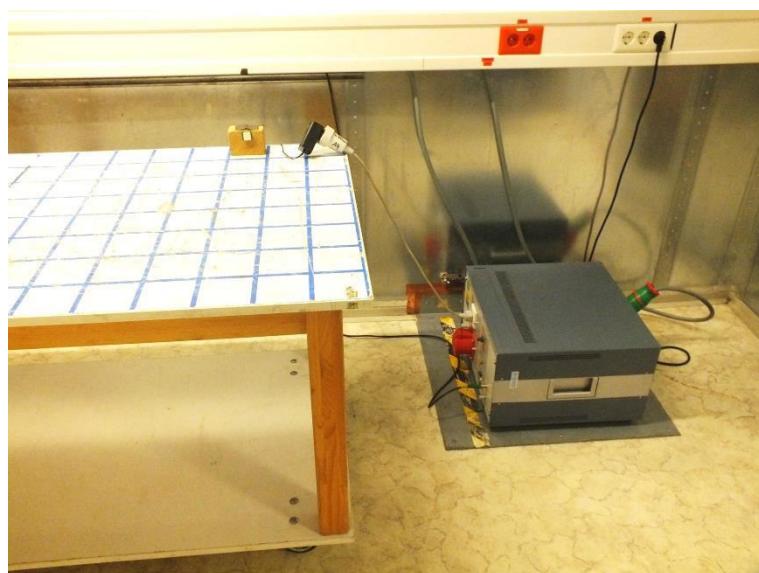

5.1.2 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the given limits.

5.1.3 Description of Measurement

The measurements are performed following the procedures set out in ANSI C63.4 described under item 4.4.3. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

5.1.4 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin 25.5 dB at 0.155 MHz

Limit according to FCC Part 15, Section 15.207(a):

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocols.


5.1.5 Test protocol

Test point

Operation mode: TX continuous mode

Remarks:


Result: passed

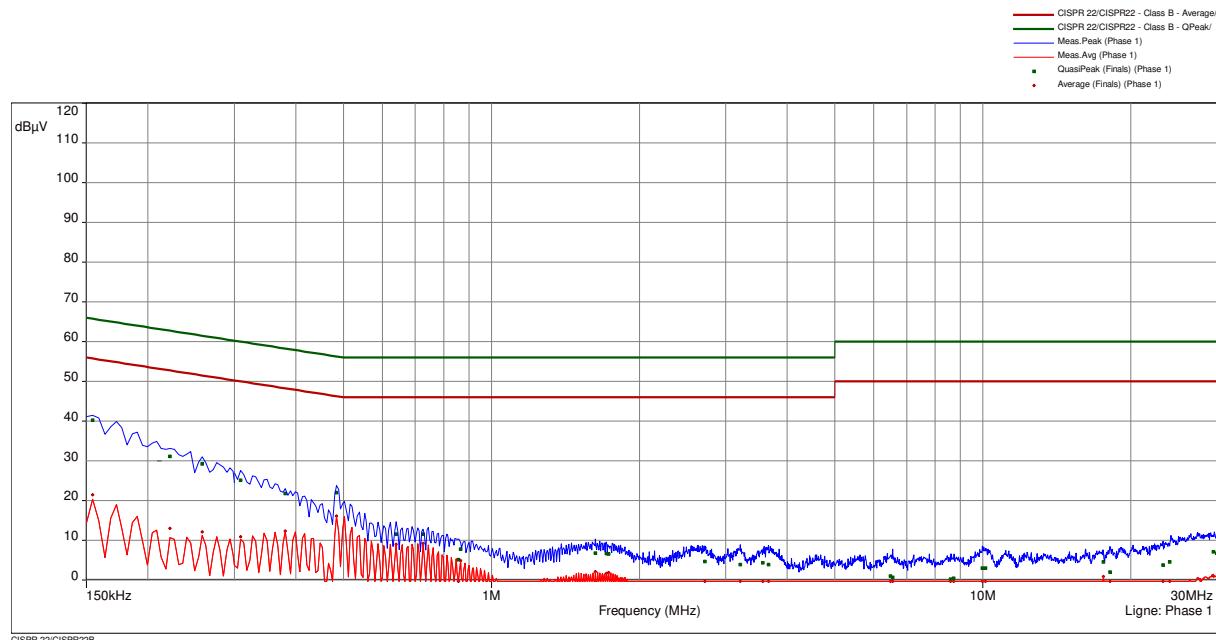

freq (MHz)	SR	QP	margin	limit	AV	margin	limit	line
			dB(µV)	dB	dB(µV)	dB	dB	
0.155	1	40.2	25.5	65.8	21.5	34.3	55.8	Phase 1
0.222	1	31.1	31.6	62.7	13.0	39.7	52.7	Phase 1
0.258	1	29.3	32.2	61.5	12.2	39.4	51.5	Phase 1
0.309	2	25.1	34.9	60.0	10.9	39.1	50.0	Phase 1
0.381	2	21.8	36.5	58.3	12.4	35.9	48.3	Phase 1
0.485	2	22.0	34.3	56.3	16.1	30.2	46.3	Phase 1
0.641	3	11.6	44.4	56.0	9.0	37.0	46.0	Phase 1
0.726	3	11.6	44.4	56.0	9.2	36.8	46.0	Phase 1
0.857	3	5.1	50.9	56.0	-3.1	49.1	46.0	Phase 1
0.866	3	7.8	48.2	56.0	4.9	41.1	46.0	Phase 1
1.628	4	6.8	49.2	56.0	2.1	43.9	46.0	Phase 1
1.713	4	6.7	49.3	56.0	1.7	44.3	46.0	Phase 1
1.731	4	6.5	49.5	56.0	1.9	44.1	46.0	Phase 1
2.720	5	4.7	51.3	56.0	-0.5	46.5	46.0	Phase 1
3.210	5	3.9	52.1	56.0	-4.5	50.5	46.0	Phase 1
3.570	5	4.3	51.7	56.0	-1.5	47.5	46.0	Phase 1
3.660	5	3.9	52.1	56.0	-2.1	48.1	46.0	Phase 1
6.483	6	1.0	59.0	60.0	-3.7	53.7	50.0	Phase 1
6.551	6	0.7	59.3	60.0	-4.1	54.1	50.0	Phase 1
8.594	6	0.2	59.8	60.0	-4.5	54.5	50.0	Phase 1
8.715	6	0.5	59.6	60.0	-4.2	54.2	50.0	Phase 1
9.983	7	3.0	57.0	60.0	-1.9	51.9	50.0	Phase 1
10.131	7	3.0	57.0	60.0	-1.7	51.7	50.0	Phase 1
17.574	7	4.5	55.5	60.0	0.9	49.1	50.0	Phase 1
18.137	7	2.0	58.0	60.0	-3.3	53.3	50.0	Phase 1
23.241	8	3.8	56.2	60.0	-2.1	52.1	50.0	Phase 1
24.002	8	4.5	55.5	60.0	-1.8	51.8	50.0	Phase 1
29.460	8	7.1	52.9	60.0	1.1	49.0	50.0	Phase 1
29.942	8	6.8	53.2	60.0	0.9	49.1	50.0	Phase 1

Test point: **N**
 Operation mode: **TX continuous mode**
 Remarks:

Result: passed

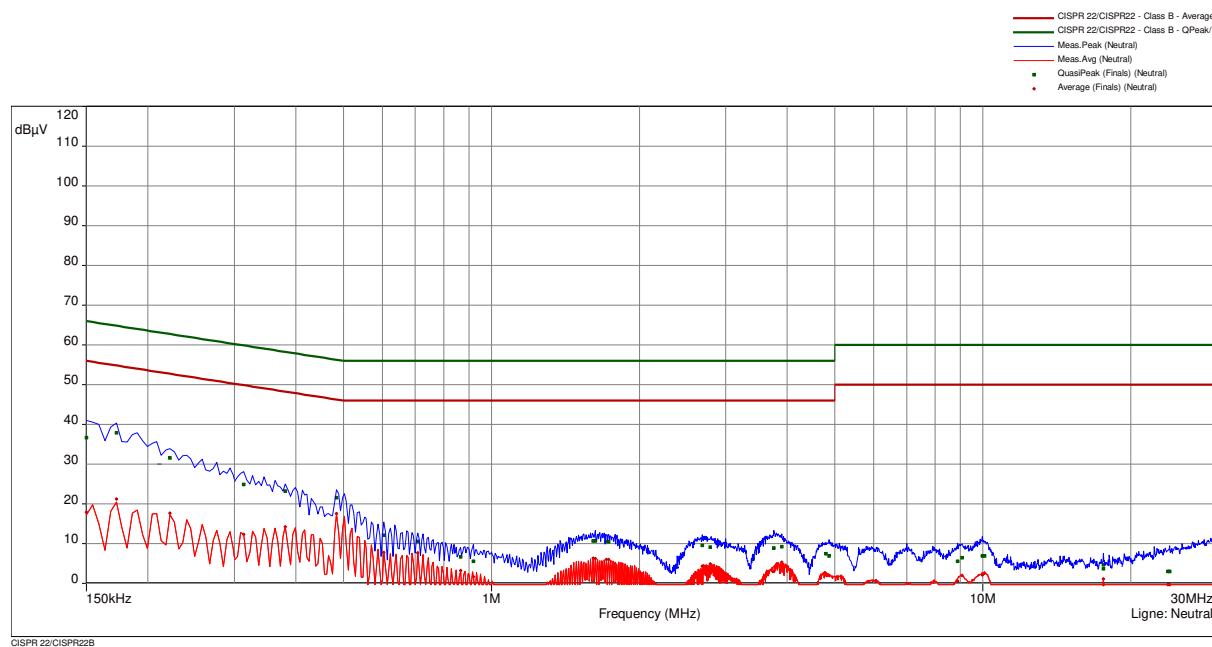

CISPR 22/CISPR22B

freq (MHz)	SR	QP dB(μ V)	margin dB	limit dB	AV dB(μ V)	margin dB	limit dB	line
0.150	9	36.7	29.3	66.0	17.9	38.1	56.0	Neutral
0.173	9	37.9	27.0	64.8	21.2	33.6	54.8	Neutral
0.222	9	31.5	31.2	62.7	17.7	35.1	52.7	Neutral
0.314	10	24.9	35.0	59.9	12.3	37.6	49.9	Neutral
0.381	10	23.2	35.0	58.3	14.3	34.0	48.3	Neutral
0.485	10	21.5	34.7	56.3	17.5	28.7	46.3	Neutral
0.605	11	12.1	43.9	56.0	7.8	38.2	46.0	Neutral
0.708	11	10.5	45.5	56.0	7.7	38.3	46.0	Neutral
0.866	11	6.7	49.3	56.0	3.2	42.8	46.0	Neutral
0.920	11	5.6	50.4	56.0	1.7	44.3	46.0	Neutral
1.610	12	10.7	45.3	56.0	6.3	39.7	46.0	Neutral
1.628	12	10.7	45.3	56.0	6.2	39.8	46.0	Neutral
1.713	12	10.6	45.5	56.0	6.0	40.0	46.0	Neutral
1.731	12	10.5	45.6	56.0	6.0	40.0	46.0	Neutral
2.684	13	9.6	46.4	56.0	4.3	41.7	46.0	Neutral
2.787	13	9.1	46.9	56.0	4.9	41.1	46.0	Neutral
3.755	13	9.0	47.1	56.0	3.0	43.0	46.0	Neutral
3.899	13	9.2	46.8	56.0	5.3	40.7	46.0	Neutral
4.800	14	7.4	48.6	56.0	2.5	43.5	46.0	Neutral
4.863	14	6.9	49.1	56.0	2.0	44.0	46.0	Neutral
8.891	14	5.6	54.4	60.0	0.6	49.4	50.0	Neutral
9.066	14	6.4	53.6	60.0	2.0	48.0	50.0	Neutral
9.969	15	6.9	53.1	60.0	2.2	47.8	50.0	Neutral
10.077	15	6.9	53.1	60.0	2.6	47.4	50.0	Neutral
17.574	15	4.7	55.3	60.0	1.1	48.9	50.0	Neutral
17.579	15	3.7	56.3	60.0	-0.2	50.2	50.0	Neutral
23.772	16	3.0	57.0	60.0	-2.7	52.7	50.0	Neutral
23.975	16	3.0	57.0	60.0	-3.2	53.2	50.0	Neutral
29.627	16	5.3	54.7	60.0	-0.7	50.7	50.0	Neutral
29.987	16	5.8	54.2	60.0	-0.4	50.4	50.0	Neutral

5.2 Field strength of fundamental

For test instruments and accessories used see section 6 Part **CPR 3**.

5.2.1 Description of the test location



Test location: Anechoic chamber 1
Test distance: 3 m

5.2.1 Applicable standard

According to FCC Part 15C, Section 15.245(b):

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the appropriate limits.

5.2.2 Photo documentation of the test set-up

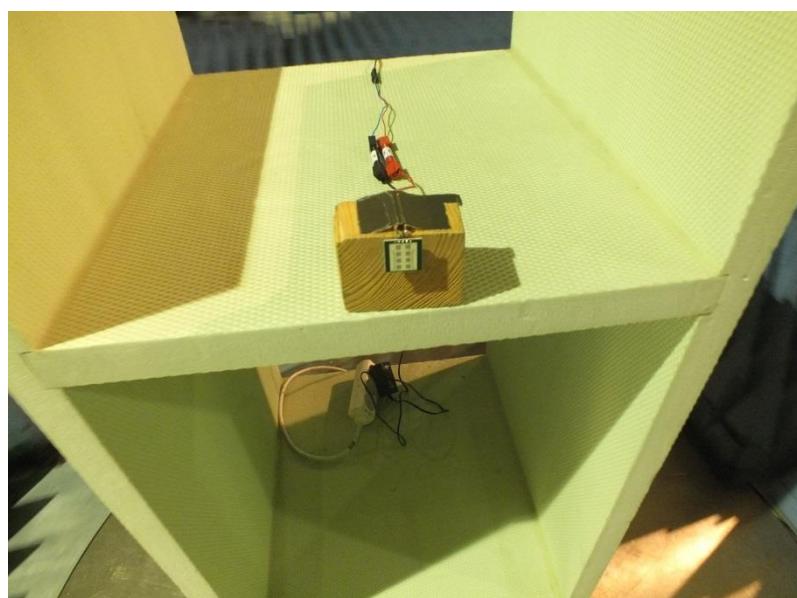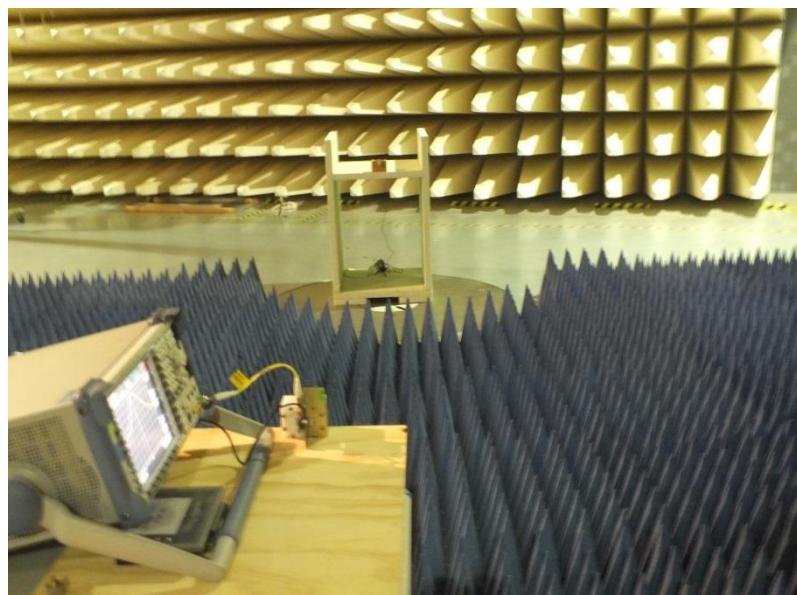

5.2.3 Description of Measurement

The radiated emission of the fundamental wave from the EUT is measured using a spectrum analyser and appropriate linear polarized antenna. The setup of the EUT and the measurement procedure is in accordance to ANSI C63.4, Item 8.3. The EUT is measured in TX continuous unmodulated under normal conditions.

Analyser settings:

Peak measurement:	RBW: 1 MHz	VBW: 3 MHz	Detector: Max peak
AV measurement:	RBW: 1 MHz	VBW: 3 MHz	Detector: RMS

5.2.4 Test result

Frequency (MHz)	Level PK dB(µV/m)	Limit PK dB(µV/m)	Margin PK (dB)	Polarisation	Level AV dB(µV/m)	Limit AV dB(µV/m)	Margin AV (dB)
24122.5	114.7	148.0	-33.3	V	114.7	128.0	-13.3
24122.5	99.1	148.0	-48.9	H	98.4	128.0	-29.6

Average-Limit according to FCC Part 15C, Section 15.245(b):

Fundamental frequency (MHz)	Field strength of fundamental	
	mV/m	dB(µV/m)
24075 - 24175	2500	128.0

Peak-Limit according to FCC Part 15C, Section 15.245(b4):

As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

The requirements are **FULFILLED**.

Remarks:

5.3 Out-of-band emission, radiated

For test instruments and accessories used see section 6 Part **SER 2, SER 3**.

5.3.1 Description of the test location

Test location: OATS 1
Test location: Anechoic chamber 1


Test distance: 3 m

5.3.1 Photo documentation of the test set-up


Test set-up 30 MHz to 1000 MHz:



Test set-up 1 GHz to 18 GHz:

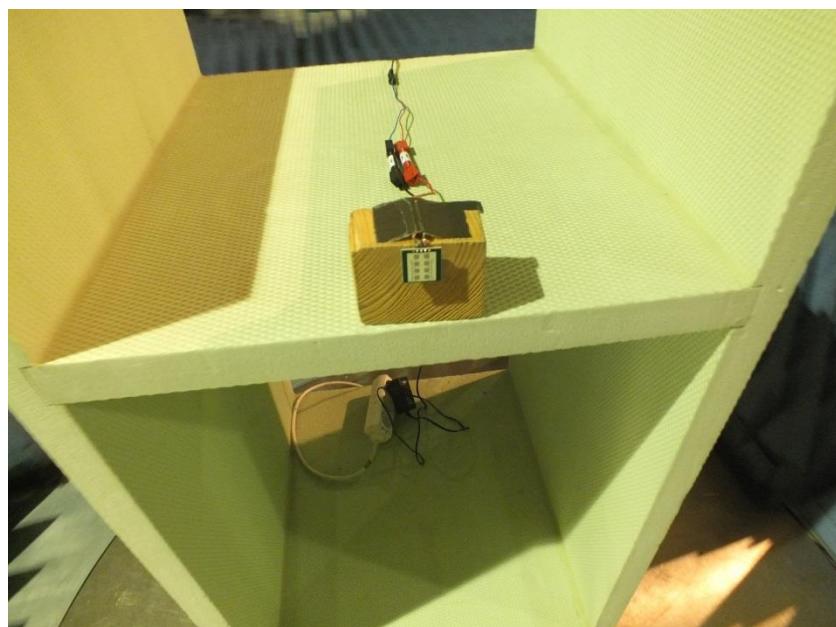

Test set-up 18 GHz to 40 GHz:

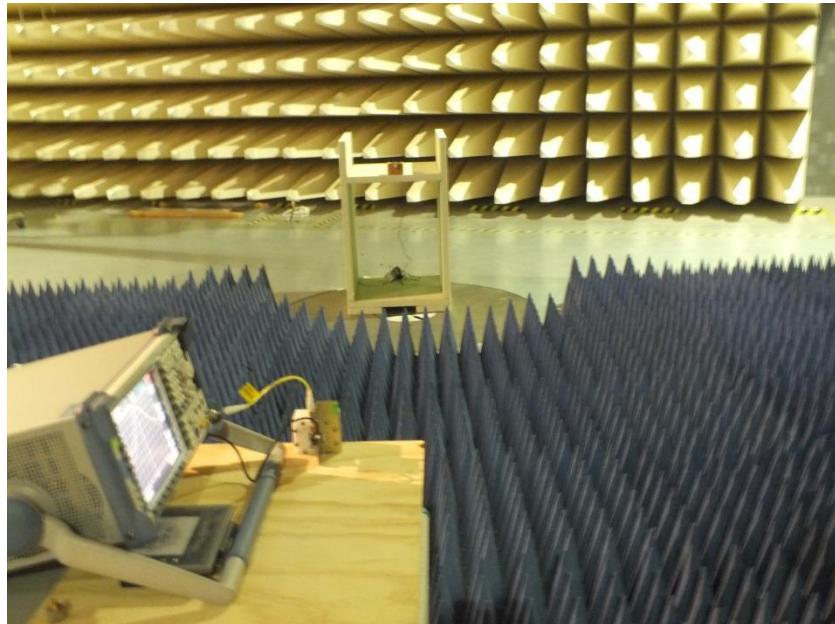

Test set-up 40 GHz to 100 GHz:



5.3.2 Applicable standard

According to FCC Part 15C, Section 15.245 (b):

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation..

5.3.3 Description of Measurement

The radiated emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. The setup of the EUT and the measurement

procedure is in accordance to ANSI C63.4, Item 6 and Item 8.3. In the frequency range above 1 GHz a spectrum analyser is used with appropriate linear polarized antennas. If the emission level in peak mode complies with the average limit testing is stopped and peak values will be reported, otherwise, the emission is measured in average mode again and reported. The EUT is measured in TX continuous mode unmodulated under normal conditions.

Instrument settings:

30 MHz – 1000 MHz: RBW: 120 kHz;
1000 MHz – 100 GHz RBW: 1 MHz, VBW: 3 MHz;

5.3.4 Test result $f < 1$ GHz

Frequency (MHz)	Level QP dB(μ V/m)	Limit QP dB(μ V/m)	Delta (dB)
76	31.9	40.0	-8.1
134	20.9	43.5	-22.6
242	23.5	46.0	-22.5
980	41.0	54.0	-13.0

Note: The frequencies 30 MHz to 990 MHz means the noise level.

Note: For frequencies < 1 GHz the general radiated limits has been applied.

5.3.5 Test result $f > 1$ GHz

Frequency (MHz)	Level PK ver dB(μ V/m)	Level PK hor dB(μ V/m)	Limit PK dB(μ V/m)	Margin PK (dB)	Level AV ver dB(μ V/m)	Level AV hor dB(μ V/m)	Limit AV dB(μ V/m)	Margin AV (dB)
1048	40.4	-	98.0	-57.6	-	-	78.0	-
1657	41.6	-	98.0	-56.4	-	-	78.0	-
1699	43.7	-	98.0	-54.3	-	-	78.0	-
1837	42.0	-	98.0	-56.0	-	-	78.0	-
1101	-	41.1	98.0	-56.9	-	-	78.0	-
1916	-	45.0	98.0	-53.0	-	-	78.0	-
1951	-	42.4	98.0	-55.6	-	-	78.0	-
3842	-	41.5	98.0	-56.5	-	-	78.0	-
57812	35.9	44.7	98.0	-53.3	-	-	78.0	-

Note: For frequencies > 3842 MHz the noise level could be measured only.

Average limit according to FCC Part 15C, Section 15.245(b):

Determination of the limit: Emissions shall be attenuated by at least 50 dB below the level of the fundamental.

Fundamental field strength: 2500 mV/m = 128 dB μ V/m;

Emission limit: Fundamental field strength – 50 dB = 128 dB μ V/m – 50 dB = 78 dB μ V/m;

General radiated limit according to FCC Part 15C, Section 15.209:

Frequency (MHz)	15.209 Limits (μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/f(kHz)	300
0.49 – 1.705	24000/f(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

The limit according FCC Part 15C, Section 15.245(b) applies as lesser attenuation.

5.3.6 Test result harmonics

The measurement of the harmonics is done in 3 m distance.

Harmonics at 48 GHz:

Frequency (MHz)	Level PK dB(µV/m)	Level AV dB(µV/m)	Polarisation	Limit PK dB(µV/m)	Margin PK (dB)	Limit AV dB(µV/m)	Margin (dB)
48244	41.5	-	V	108.0	-66.5	88.0	-
48244	51.6	-	H	108.0	-56.4	88.0	-

Harmonics at 72 GHz:

Frequency (MHz)	Level PK dB(µV/m)	Level AV dB(µV/m)	Polarisation	Limit PK dB(µV/m)	Margin PK (dB)	Limit AV dB(µV/m)	Margin (dB)
72366	-	-	V	108.0	-	88.0	-
72368	42.5	-	H	108.0	-65.5	88.0	-

Harmonics at 96 GHz:

No harmonics could be detected.

Average limit according to FCC Part 15C, Section 15.245(b):

Determination of the limit in a distance of 3 m:

Harmonic field strength 25 mV/m = **88 dBµV/m**;

Fundamental frequency		Field strength of harmonics	
(MHz)	mV/m	dB(µV/m)	
24075 - 24175	25	88.0	

The requirements are **FULFILLED**.


Remarks: The measurement was performed up to 100 GHz. For detailed test result please refer to following test protocols.

5.3.7 Test protocols


Note: The upper limit displayed in the plots apply under FCC 15.245.

5.3.7.1 CH1


Spurious emissions from 1 to 4 GHz

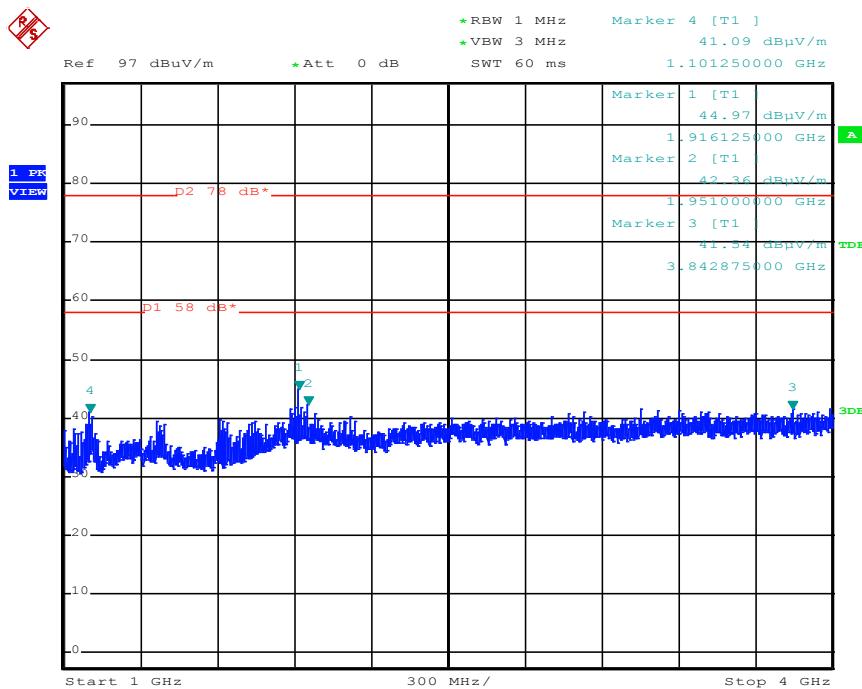


Spurious emissions from 4 to 12 GHz

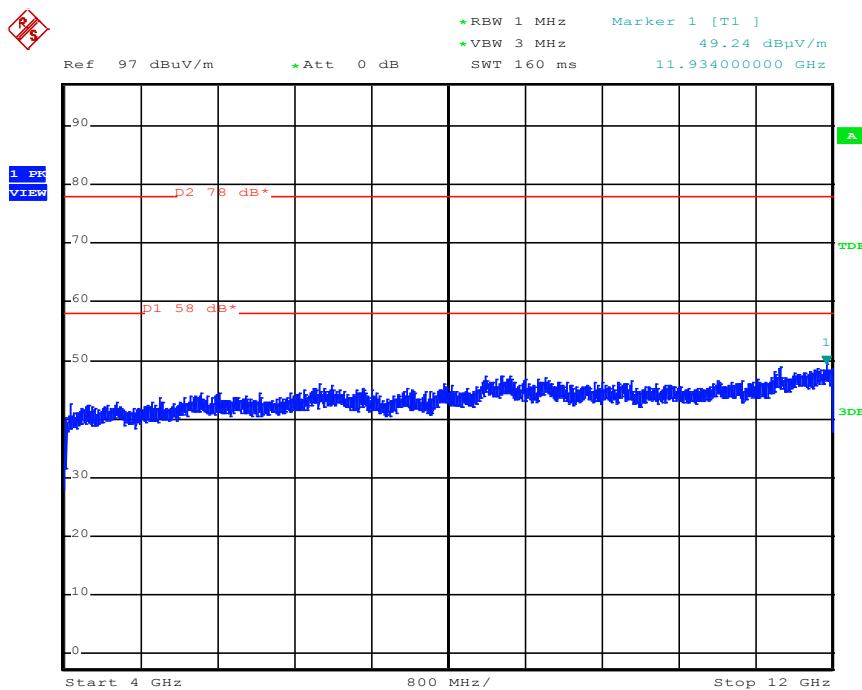


Spurious emissions from 12 to 18 GHz

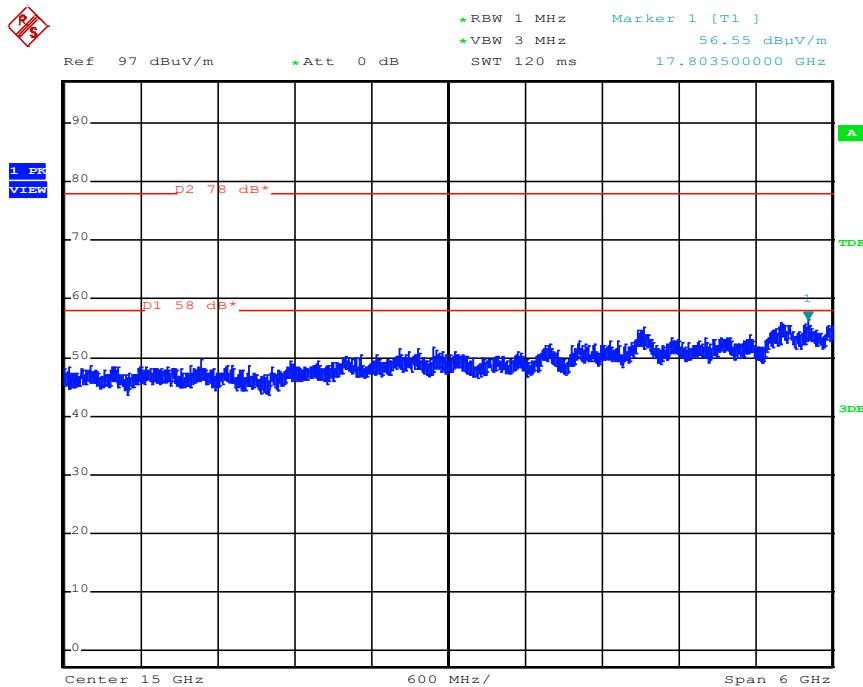


Spurious emissions from 18 to 24 GHz

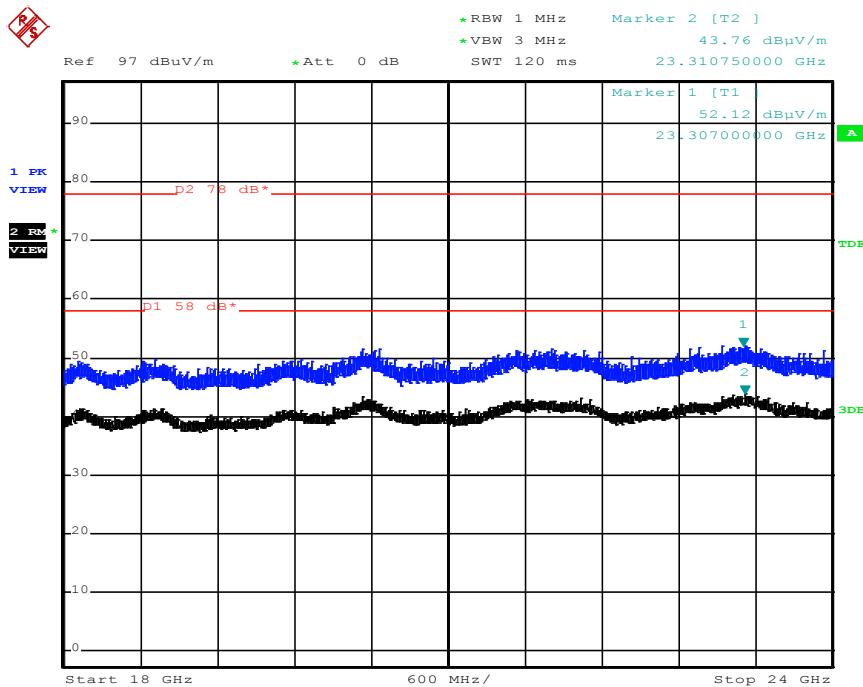


Spurious emissions from 24 to 24.075 GHz

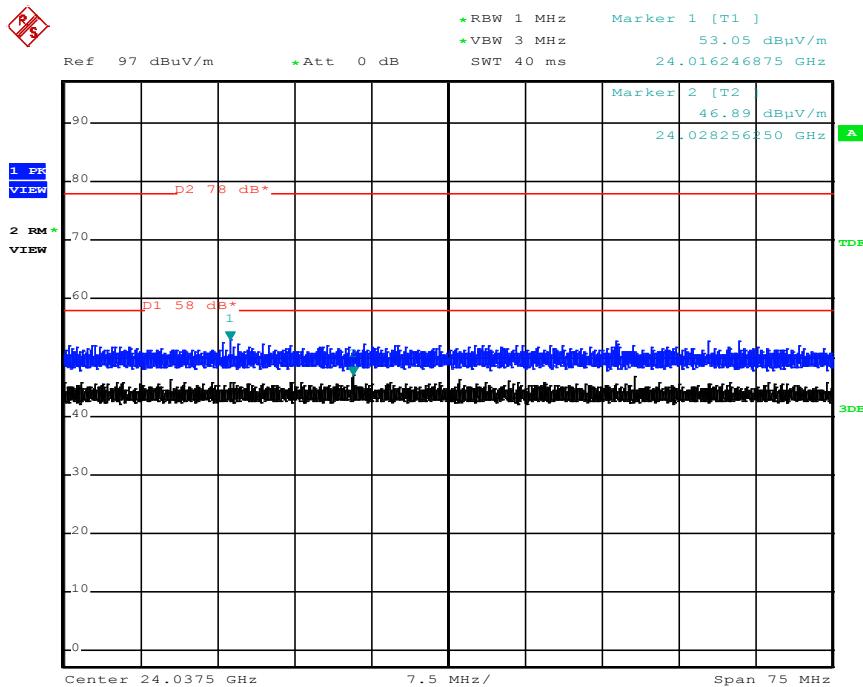


Spurious emissions from 24.175 to 24.25 GHz

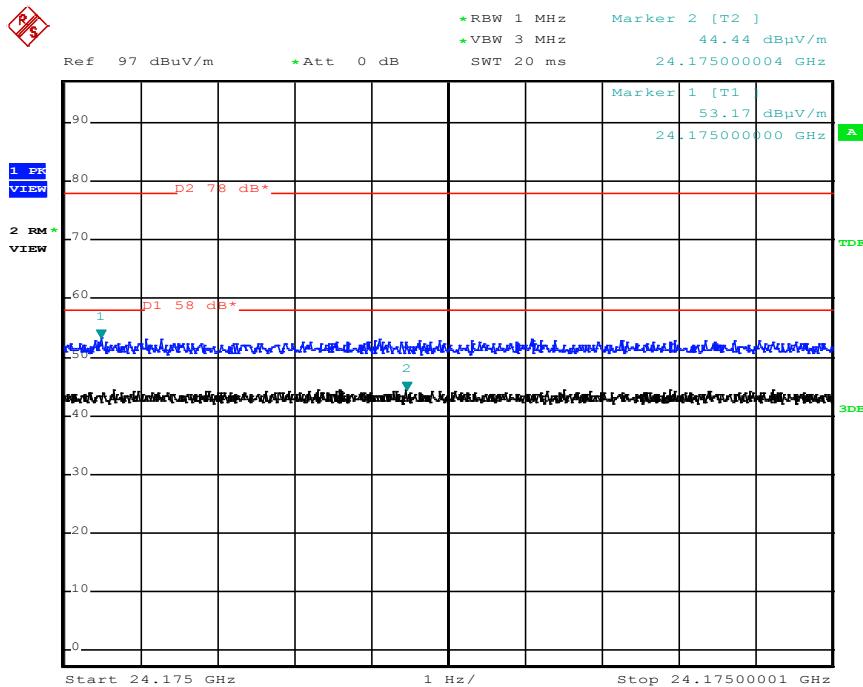


Spurious emissions from 24.25 to 32 GHz

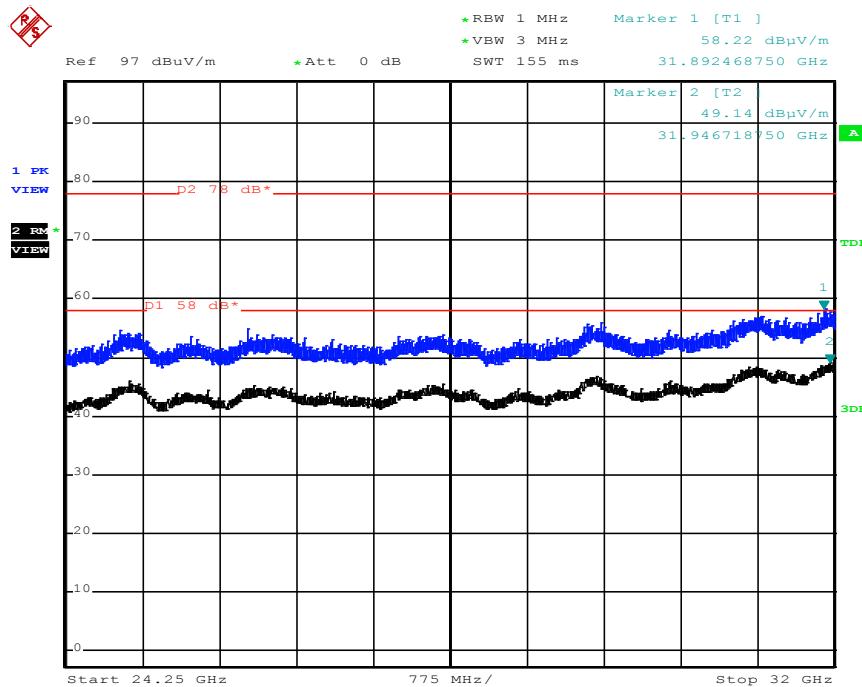


Spurious emissions from 32 to 40 GHz

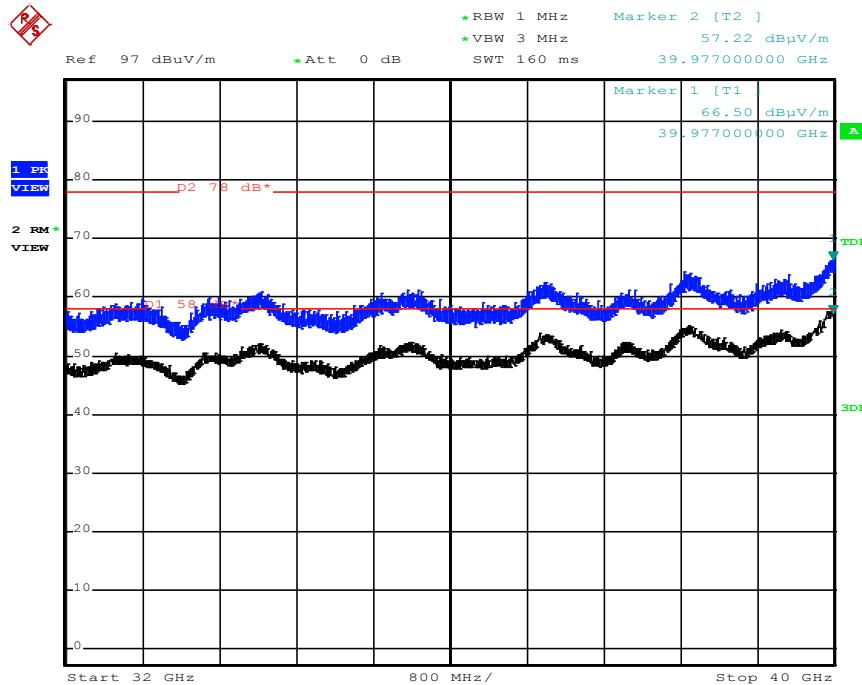


Spurious emissions from 40 to 60 GHz

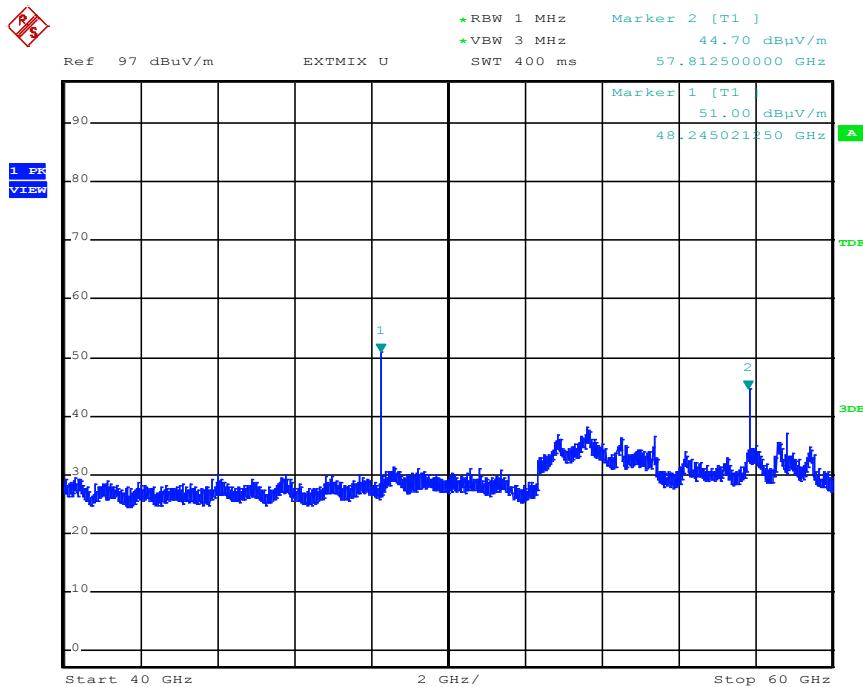

Spurious emissions from 60 to 90 GHz

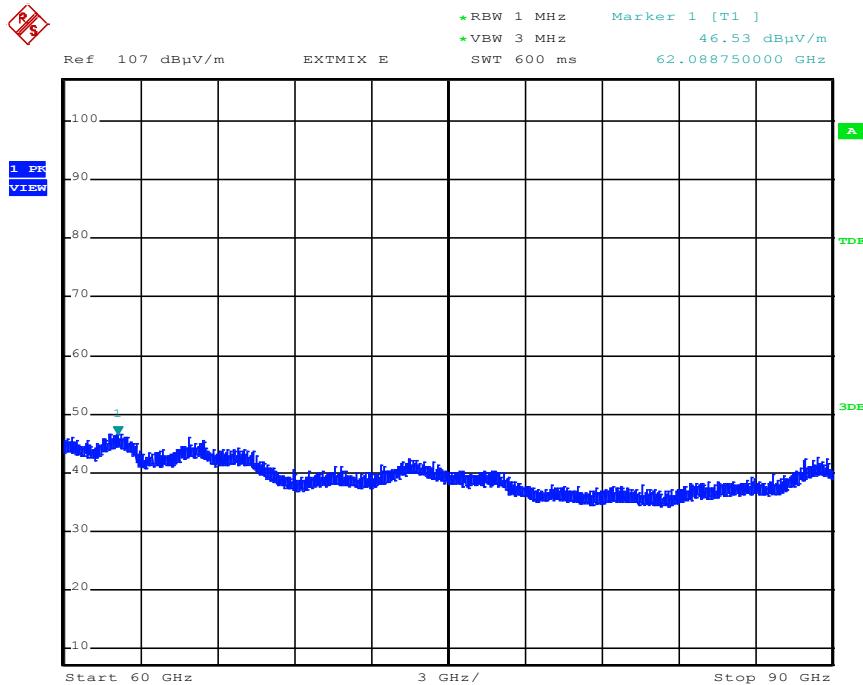


Spurious emissions from 75 to 100 GHz

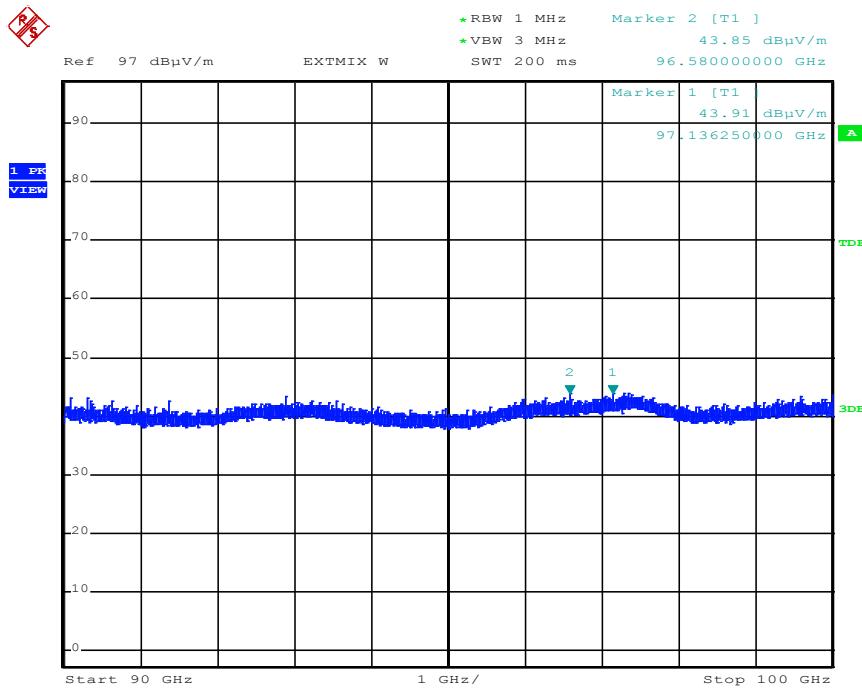


5.3.8 Test protocols harmonics

Harmonics 48 GHz:

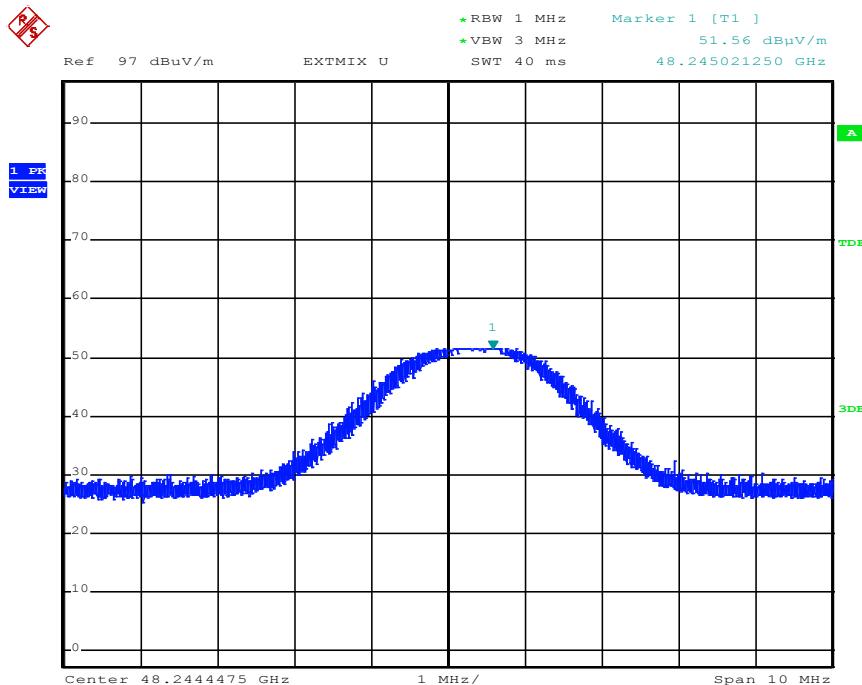

Harmonics 72 GHz:

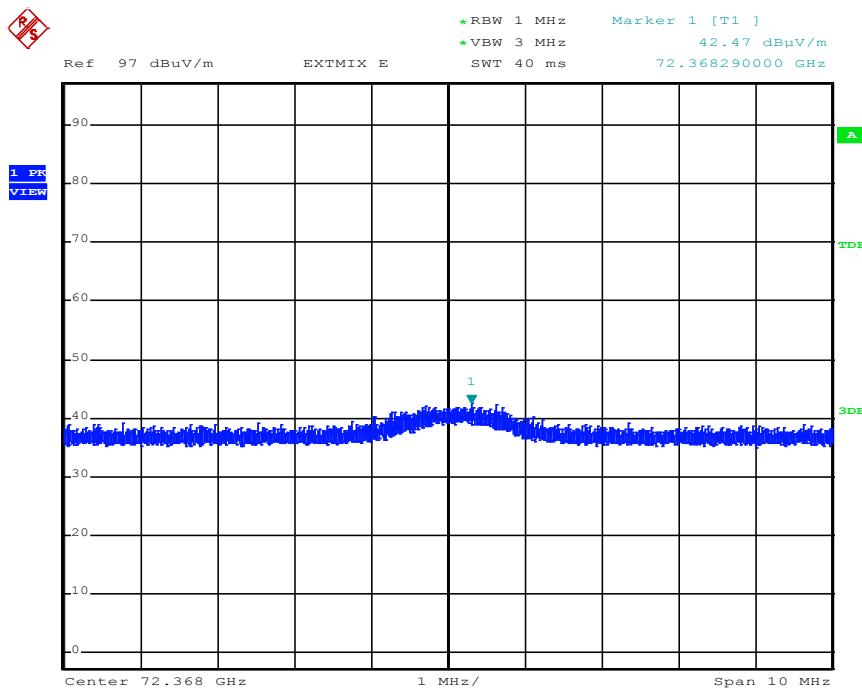

5.4 EBW

For test instruments and accessories used see section 6 Part **MB**.

5.4.1 Description of the test location

Test location: NONE

Remarks: _____

5.5 Antenna application

5.5.1 Applicable standard

According to FCC Part 15C, Section 15.203(a):

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

5.5.2 Result

The EUT use an integrated PCB antenna. No other antenna than that furnished by the responsible party or external power amplifier can be applied by a customer.

The antenna of the EUT meets the requirement of FCC Part 15C, Section 15.203 and 15.204.

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	ESHS 30	02-02/03-05-002	17/07/2015	17/07/2014		
	ESH 2 - Z 5	02-02/20-05-004	18/10/2015	18/10/2013	02/03/2015	02/09/2014
	EMV D 30000/PAS	02-02/30-05-006				
	N-4000-BNC	02-02/50-05-138				
	N-1500-N	02-02/50-05-140				
	ESH 3 - Z 2	02-02/50-05-155	10/10/2014	10/04/2014		
CPR 3	FSP 40	02-02/11-11-001	30/09/2014	30/09/2013		
	R1 _ 18 - 40 GHz	02-02/30-09-002	08/01/2015	08/01/2014		
SER 2	ESVS 30	02-02/03-05-006	03/07/2015	03/07/2014		
	VULB 9168	02-02/24-05-005	08/04/2015	08/04/2014	08/10/2014	08/04/2014
	S10162-B	02-02/50-05-031				
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
SER 3	FSP 40	02-02/11-11-001	30/09/2014	30/09/2013		
	FS-Z60	02-02/11-14-001	26/03/2015	26/03/2014	26/09/2014	26/03/2014
	FZ-Z110	02-02/11-14-002	12/05/2015	12/05/2014	12/11/2014	12/05/2014
	FS-Z90	02-02/11-14-003	22/05/2015	22/05/2014	22/11/2014	22/05/2014
	JS4-18004000-30-5A	02-02/17-05-017				
	BBHA 9170	02-02/24-05-014				
	QWH-UPRR00/WR-19/40-60	02-02/24-14-001				
	QWH-EPRR00/WR-12/60-90	02-02/24-14-004				
	QWH-WPRR00/WR-10/75-11	02-02/24-14-006				
	R1 _ 18 - 40 GHz	02-02/30-09-002	08/01/2015	08/01/2014		
	KMS102-0.2 m	02-02/50-11-020				