


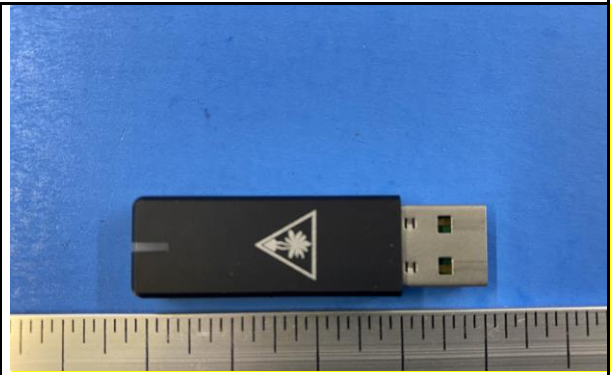

Test report no.: US2236AF.001 Rev.:01
 Prüfbericht-Nr.:

Page 1 of 62
 Seite 1 von 62

Test Report No.: Prüfbericht-Nr.:	US2236AF.001 Rev.: 01	Order No.: Auftrags-Nr.:	P00558776 234044807
Client Reference No.: Kunden-Referenz-Nr.:	2004399	Order date: Auftragsdatum:	12/22/2021
Client: Auftraggeber:	Voyetra Turtle Beach, Inc. 44 South Broadway, 4th Floor White Plains NY 10601 USA		
Test item: Bezeichnung / Typ-Nr.	Stealth600X-USB-TX		
Identification/ Type No.: Auftrags-Inhalt:	N/A		
Order content:	Electromagnetic Compatibility (EMC) Test Report		
Test specification: Prüfgrundlage:	CFR 47 Part 15.247: 2021 and RSS 247: 2017		
Date of sample receipt: Wareneingangsdatum:	12/22/2021		
Test sample No.: Prüfmuster-Nr.:	A003204104-001, A003204104-002		
Testing period: Prüfzeitraum:	December 27 to 30, 2021. January 24 to 27, 2022		
Testing laboratory: Prüflaboratorium:	TUV Rheinland of North America 1279 Quarry Lane, Ste. A Pleasanton, CA 94566		
Test result*: Prüfergebnis*:	Pass		

Date: 01/31/2022 Datum:		Date: 01/31/2022 Datum:	
compiled by: geprüft von:	Jeremy Luong	authorized by: genehmigt von:	Richard Decker

Others/
Sonstiges:

Condition of the test item at delivery:
 Zustand des Prüfgegenstandes bei Anlieferung: Test sample complete and undamaged

* Legend: * Legende:	P(ass) = passed a.m. test specification(s) P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = not applicable N/A = nicht anwendbar	N/T = not tested N/T = nicht getestet
-------------------------	---	--	---	--

This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.
 Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.

Test report no.: US2236AF.001 Rev.:01
Prüfbericht-Nr.:

Page 2 of 62
Seite 2 von 62

Remarks

- | | |
|---|---|
| 1 | The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request. |
| 2 | As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. |
| 3 | Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.
Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report. |
| 4 | The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA. |
| 5 | TÜV Rheinland testing laboratories apply the Zero Guard Band rule unless otherwise required by the accreditation, standard, or requested by the customer as part of the quotation.
For the Zero Guard Band rule, the measurement uncertainty is not considered and will also not be declared in the test report. Should the measurement uncertainty be used to provide guard band, these values will be declared in the test report. |
| 6 | Electromagnetic Compatibility Test Report.
Electromagnetic Compatibility Emissions Test Report.
Electromagnetic Compatibility Engineering Test Results.
The above product was found to be Compliant to the above test standard(s). |

Test report no.: US2236AF.001 Rev.:01
Prüfbericht-Nr.:

Page 3 of 62
Seite 3 von 62

1	Product details: <i>Produktdetails:</i>	USB Wireless Audio Transmitter
2	Dimensions / Weight: <i>Maße / Gewicht:</i>	51.2 mm x 15.3 mm x 7.9 mm / 5.0 g
3	Operating elements: <i>Bedienelemente:</i>	5.0 Vdc (Host USB)
4	Equipment / Accessories:	See Section 6.10
5	Used materials: <i>Verwendete Materialien:</i>	NA
6	Other: <i>Sonstiges:</i>	Test sample(s), as well sample information, description, product details and intended usage was provided by customer.
7	Test sample obtaining: <i>Prüfmusterbereitstellung:</i>	<input checked="" type="checkbox"/> Sending by customer <input type="checkbox"/> Sampling by TÜV Rheinland Group <input type="checkbox"/> others:

TABLE of CONTENTS

1 EXECUTIVE SUMMARY	8
1.1 SCOPE	8
1.2 PURPOSE	8
1.3 SUMMARY OF TEST RESULTS	8
1.4 SPECIAL ACCESSORIES	8
1.5 EQUIPMENT MODIFICATIONS	8
2 LABORATORY INFORMATION	9
2.1 ACCREDITATIONS & ENDORSEMENTS	9
2.1.1 <i>US Federal Communications Commission</i>	9
2.1.2 <i>NIST / A2LA</i>	9
2.1.3 <i>Canada</i>	9
2.1.4 <i>Japan – VCCI</i>	9
2.1.5 <i>Acceptance by Mutual Recognition Arrangement</i>	9
2.2 TEST FACILITIES	10
2.2.1 <i>Emission Test Facility</i>	10
2.2.2 <i>Immunity Test Facility</i>	10
2.3 MEASUREMENT UNCERTAINTY	10
2.3.1 <i>Sample Calculation – radiated & conducted emissions</i>	11
2.3.2 <i>Measurement Uncertainty</i>	11
2.4 CALIBRATION TRACEABILITY	12
3 PRODUCT INFORMATION	13
3.1 PRODUCT DESCRIPTION	13
3.2 EQUIPMENT CONFIGURATION	13
3.3 OPERATING MODE	13
3.4 UNIQUE ANTENNA CONNECTOR	14
3.5 DUTY CYCLE	15
4 EMISSIONS	17
4.1 OUTPUT POWER REQUIREMENTS	17
4.1.1 <i>Test Method</i>	17
4.1.2 <i>Results</i>	18
4.2 OCCUPIED BANDWIDTH	19
4.2.1 <i>Test Method</i>	22
4.2.2 <i>Results</i>	22
4.3 PEAK POWER SPECTRAL DENSITY	30
4.3.1 <i>Test Method</i>	30
4.3.2 <i>Results</i>	30
4.4 OUT OF BAND EMISSIONS	32
4.4.1 <i>Test Method</i>	35
4.4.2 <i>Results</i>	36
4.5 TRANSMIT SPURIOUS EMISSIONS	37
4.5.1 <i>Test Methodology</i>	43
4.5.2 <i>Transmitter Spurious Emission Limit</i>	44
4.5.3 <i>Test Results</i>	44

4.5.4	Sample Calculation	53
4.6	AC CONDUCTED EMISSIONS	54
4.6.1	Test Methodology	54
4.6.2	Test Results	54
5	TEST EQUIPMENT LIST	57
5.1	EQUIPMENT LIST	57
6	EMC TEST PLAN	58
6.1	INTRODUCTION	58
6.2	CUSTOMER	58
6.3	EQUIPMENT UNDER TEST (EUT)	59
6.4	TEST SPECIFICATIONS	62

Index of Tables

Table 1: Summary of Test Results.....	8
Table 2: RF Output Power at the Antenna Port – Test Results.....	18
Table 3: Occupied Bandwidth – Test Results.....	23
Table 4: Peak Power Spectral Density – Test Results.....	31
Table 5: Out of Band Emissions – Test Results	36
Table 6: Transmit Spurious Emission at Band-Edge Requirements.....	44
Table 7: AC Conducted Emissions – Test Results	54
Table 8: Customer Information	58
Table 9: Technical Contact Information.....	58
Table 10: EUT Specifications	59
Table 11: Interface Specifications.....	60
Table 12: Supported Equipment.....	60
Table 13: Description of Sample used for Testing	60
Table 14: Description of Test Configuration used for Radiated Measurement.	60
Table 15: Final Test Mode for 2402 to 2480 MHz Band.....	61
Table 16: Test Specifications	62

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247: 2021 and RSS 247 Issue 2, 2017 based on the results of testing performed on December 27 to 30, 2021 and January 24 to 27, 2022 on the USB Wireless Audio Transmitter Model Stealth600X-USB-TX manufactured by Voyetra Turtle Beach, Inc. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report. The 2402 MHz to 2480 MHz frequency band is covered in this document for the Airoha radio (AB1565D).

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C63.10:2013	Test Parameters	Measured Value	Result
Spurious Emission in Transmitted Mode	CFR47 15.209, CFR47 15.247 (d), RSS GEN Sect.8.9	Class B	-15.15 dB (Margin)	Complied
Restricted Bands of Operation	CFR47 15.205, RSS GEN Sect.8.10	Class B		Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.8.8	Class B	-16.04 dB (Margin)	Complied
Occupied Bandwidth	CFR47 15.247 (a2), RSS GEN Sect.6.7, RSS 247 Sect. 5.2 (a)	≥ 500 kHz	0.702 MHz (DTS) 1.032 MHz (99%)	Complied
Maximum Output Power	CFR47 15.247 (b), RSS 247 Sect. 5.4 (d)	30 dBm w/ 6 dBi antenna	+3.97 dBm	Complied
Peak Power Spectral Density	CFR47 15.247 (e), RSS 247 Sect. 5.2 (b)	8 dBm/ 3 kHz	-16.72 dBm	Complied
Out of Band Emission	CFR47 15.247 (d), RSS 247 Sect.5.5	-30 dBr	-20.68 dB (Margin)	Complied

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

None.

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US1131). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2017 and ISO 9002 (Lab Code Testing Cert #3331.02).

The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Canada



TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0326

2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA.

2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Lab Code Testing Cert #3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of 10^9 Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-k Ω resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-k Ω resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V} / \text{m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	U _{lab}	U _{cispr}
Radiated Disturbance @ 10 meters		
30 – 1,000 MHz	2.25 dB	4.51 dB
Radiated Disturbance @ 3 meters		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 40 GHz	2.47 dB	4.93 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	1.09 dB	2.18 dB
Disturbance Power		
30 MHz – 300 MHz	3.92 dB	4.3 dB

Voltech PM6000A

The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 5.0\%$.	Per CISPR 16-4-2 Methods
--	--------------------------

Measurement Uncertainty - EMC Immunity

The estimated combined standard uncertainty for ESD immunity measurements is $\pm 8.2\%$.	Per IEC 61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is ± 4.10 dB.	Per IEC 61000-4-3
The estimated combined standard uncertainty for conducted immunity measurements with CDN is ± 3.66 dB	Per IEC 61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity is $\pm 2.9\%$.	Per IEC 61000-4-8
The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 2.6\%$.	Per IEC 61000-4-4
The estimated combined standard uncertainty for surge immunity measurements is $\pm 2.6\%$.	Per IEC 61000-4-5
The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 1.74\%$.	Per IEC 61000-4-11

Measurement Uncertainty – Radio Testing

The estimated combined standard uncertainty for frequency error measurements is ± 3.88 Hz
The estimated combined standard uncertainty for carrier power measurements is ± 0.70 dB.
The estimated combined standard uncertainty for adjacent channel power measurements is ± 1.47 dB.
The estimated combined standard uncertainty for modulation frequency response measurements is ± 0.46 dB.
The estimated combined standard uncertainty for transmitter conducted emission measurements is ± 2.06 dB

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2017. Equipment calibration records are kept on file at the test facility.

3 Product Information

3.1 Product Description

The Stealth 600X Gen 2 USB Wireless Gaming System consists of two main communication modules, the Stealth600X-USB-RX (“Headset”) and the Stealth600X-USB-TX (“Transmitter”). These two modules comprise a closed-loop wireless audio gaming system that utilize a proprietary 2.4 GHz communication technology to offer wireless streaming audio and chat/talkback capabilities. The devices are designed to operate with an Xbox gaming console.

The Stealth 600X Gen 2 USB has two versions that are 100% identical electrically and mechanically except for the color of their exterior plastics. The two model color variations are standard Black and White.

3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.


The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.4 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.4.1 Results

The Stealth600X-USB-TX uses a chip antenna inside the device for radio connectivity. See EUT Photo for details.

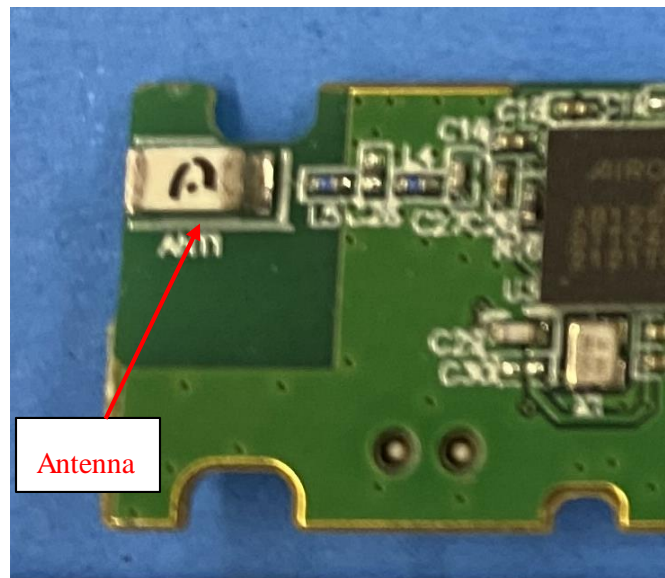

3.5 Duty Cycle

The Stealth600X-USB-TX, SN: PP1 was measured.

3.5.1 Results

Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Factor (dB)
1 Mbps	0.372	0.627	59.33	2.27
2 Mbps	0.187	0.625	29.92	5.24

Notes: EUT was configured and measured for the duty cycle.

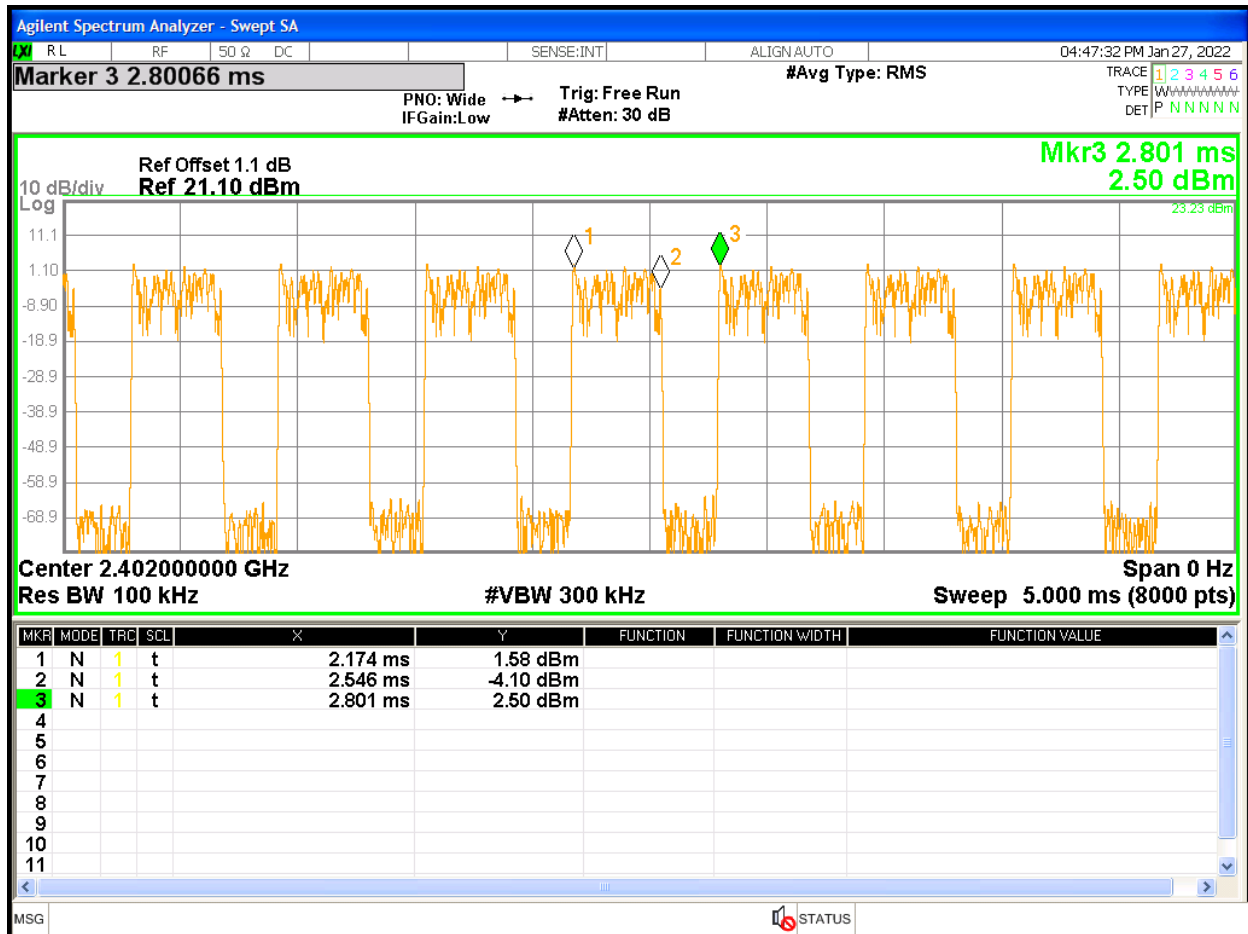


Figure 1: Duty Cycle at 1 Mbps

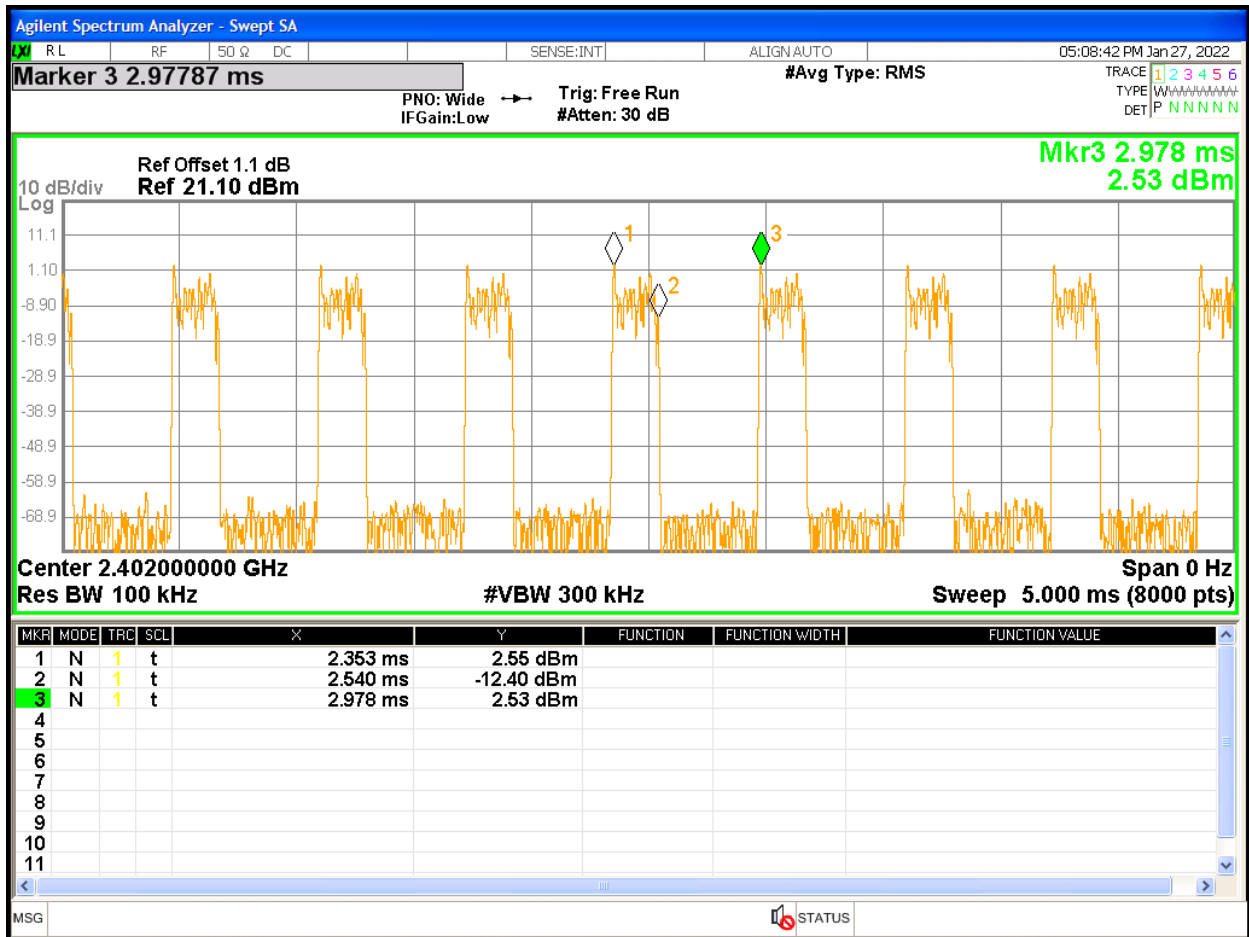


Figure 2: Duty Cycle at 2 Mbps

4 Emissions

Testing was performed in accordance with CFR 47 Part 15.247:2021 and RSS 247:2017. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

4.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.

The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b):2021 and RSS 247: 2017 Sect. 5.4 (d).


The maximum transmitted powers are

Band 2400-2483.5 MHz: 1 W

4.1.1 Test Method

The ANSI C63.10-2013 Section 11.9.2.2.2 conducted method was used to measure the channel power output. The preliminary investigation was performed at different data rate/ chain to determine the highest power output for each mode. The worst findings were conducted on 3 channels in each operating range per CFR47 Part 15.247(b): 2021 and RSS 247 Sect. 5.4 (d). This test was conducted on 3 channels of Sample, S/N PP #1. The worst mode result indicated below.

Test Setup:

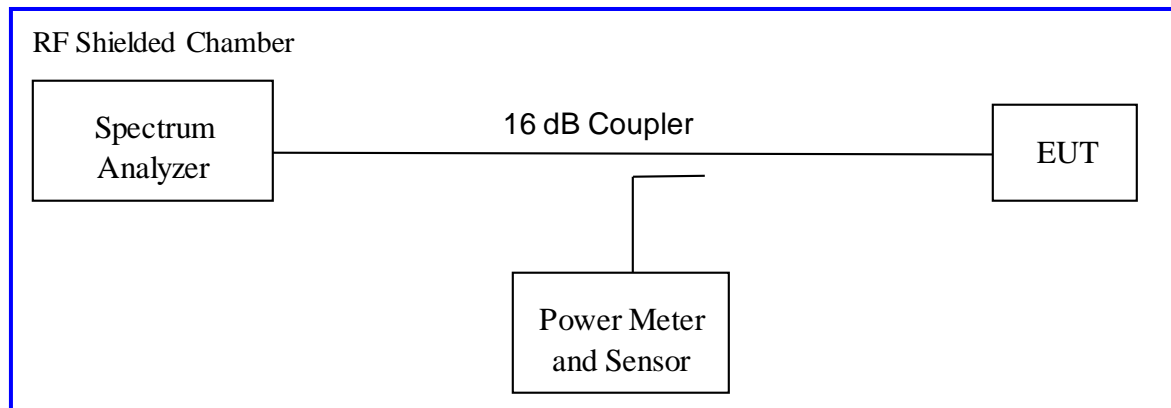

Method AVGSA-1 of "KDB 558074 – DTS Measurement Guidance v05r02" applies since the EUT continuously transmits with duty cycle greater than 98%. Sample detector was used.

4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 2: RF Output Power at the Antenna Port – Test Results

Test Date: January 27, 2022			Test By: Jeremy Luong		
Test Method: Conducted Measurements			Power Setting: 46		
Antenna Type: Ceramic Chip			Max. Antenna Gain: -1.3 dBi		
Operating Mode: Uncorrelated			Signal State: Modulated		
Ambient Temp.: 23 °C			Relative Humidity: 35%		
USB Wireless Audio Transmitter @ 1 Mbps					
Frequency (MHz)	Limit [dBm]	Output [dBm]	Duty Cycle [dB]	Σ Power [dBm]	Margin [dB]
2402	+30.00	1.55	2.27	3.82	-26.18
2442	+30.00	1.57	2.27	3.84	-26.16
2480	+30.00	1.70	2.27	3.97	-26.03
Note: The USB wireless audio transmitter transmitted at 59.33% duty cycle.					
USB Wireless Audio Transmitter @ 2 Mbps					
Frequency (MHz)	Limit [dBm]	Output [dBm]	Duty Cycle [dB]	Σ Power [dBm]	Margin [dB]
2402	+30.00	-1.42	5.14	3.72	-26.28
2442	+30.00	-1.38	5.14	3.76	-26.24
2480	+30.00	-1.20	5.14	3.94	-26.06
Note: The USB wireless audio transmitter transmitted at 29.92% duty cycle.					

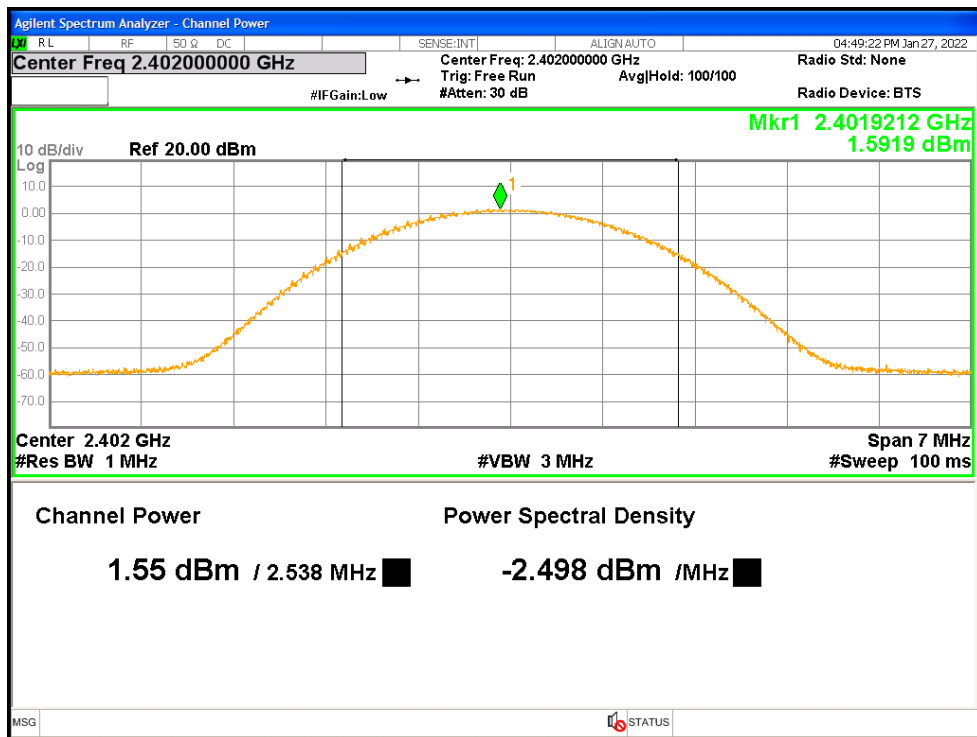


Figure 3: Maximum Transmitted Power at 1 Mbps, 2402 MHz - Transmitter

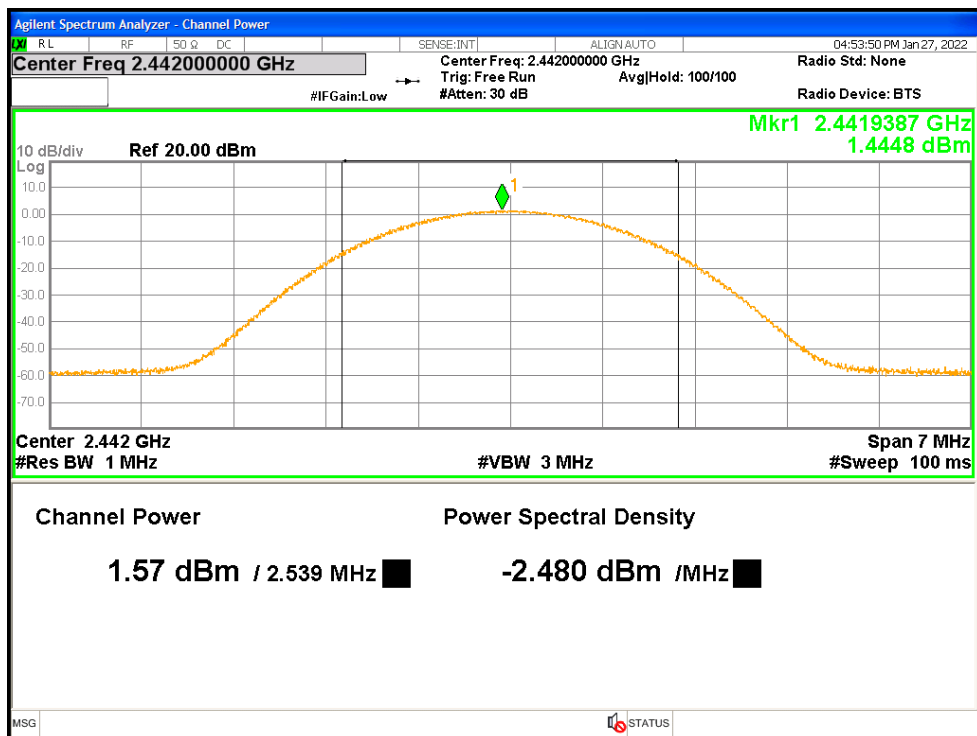


Figure 4: Maximum Conducted Output Power at 1 Mbps, 2442 MHz - Transmitter

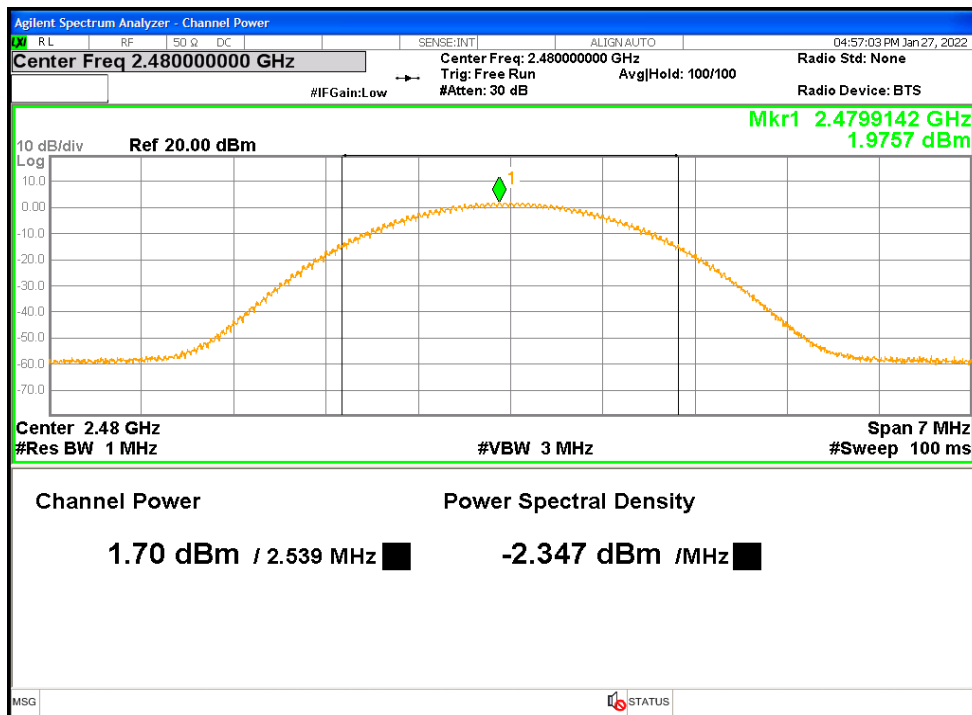


Figure 5: Maximum Conducted Output Power at 1 Mbps, 2480 MHz - Transmitter

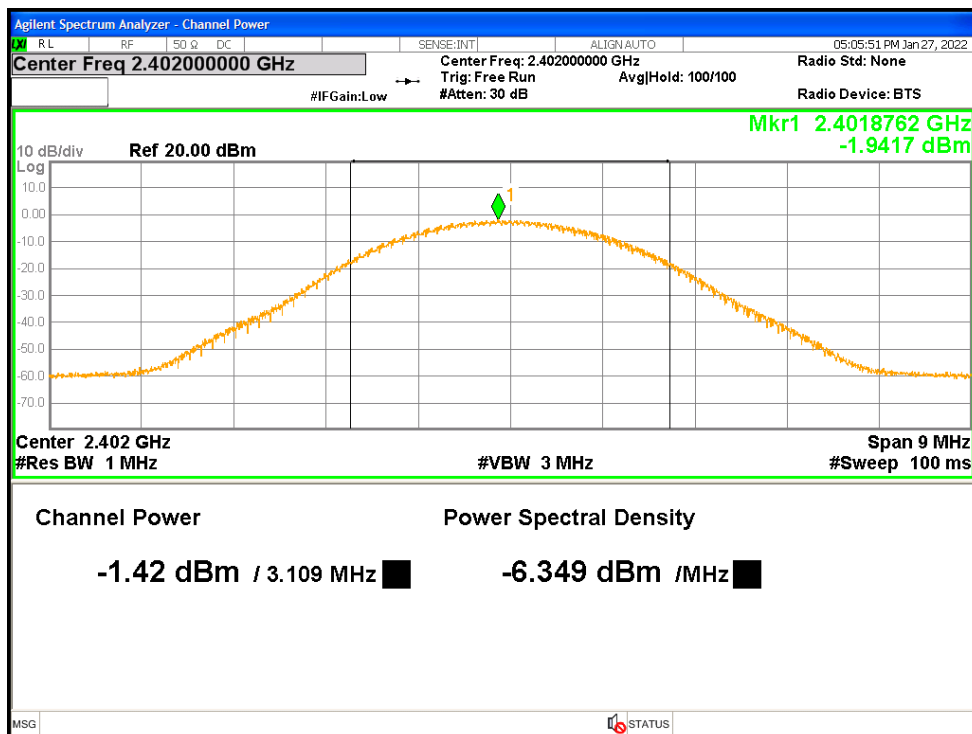


Figure 6: Maximum Transmitted Power at 2 Mbps, 2402 MHz- Transmitter

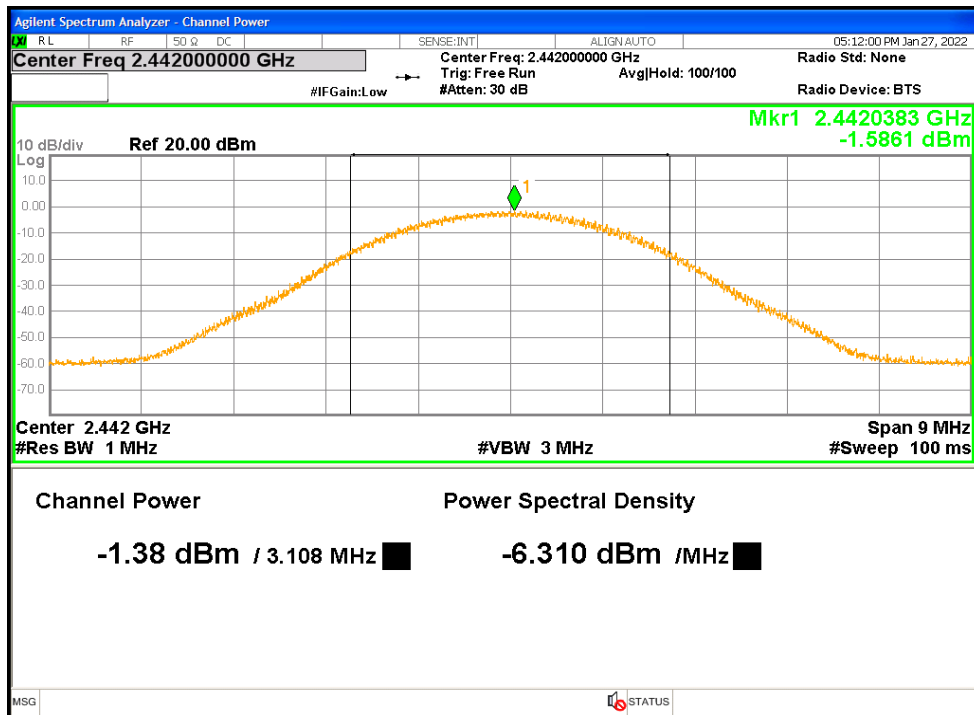


Figure 7: Maximum Conducted Output Power at 2 Mbps, 2442 MHz - Transmitter

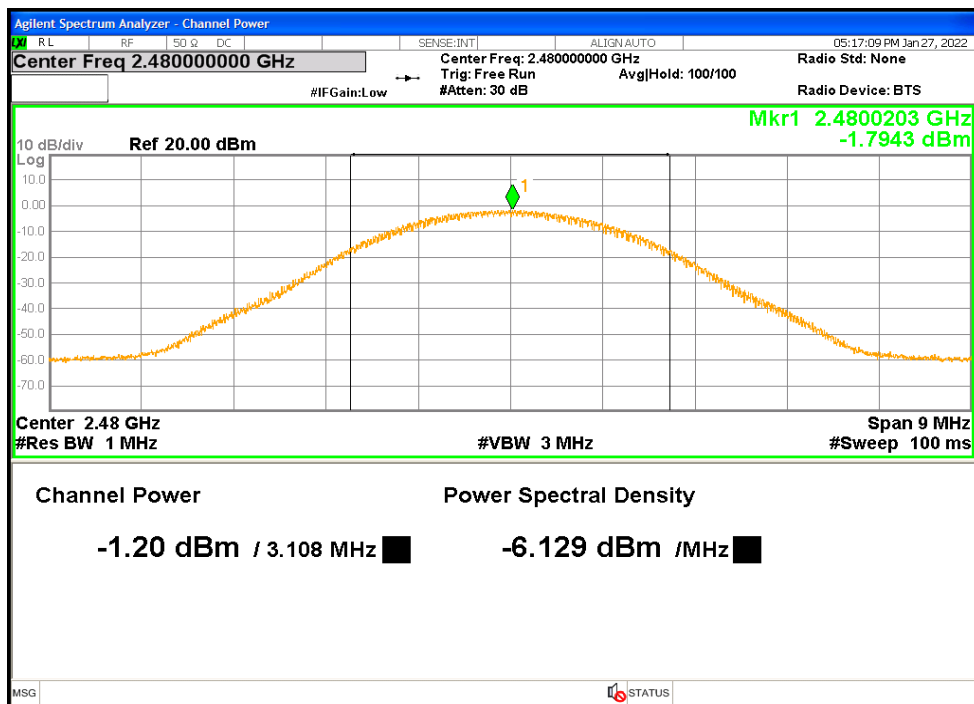


Figure 8: Maximum Transmitted Power at 2 Mbps, 2480 MHz- Transmitter

4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.


The minimum 6 dB bandwidth shall be at least 500 kHz.

The bandwidth shall be at least 500 kHz per Section CFR47 15.247(a) 2021 and RSS 247 Sect.5.2 (a) 2017

4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth according to ANSI C63.10:2013 Section 11.8.1. The measurement was performed with modulation per CFR47 15.247(a) (2) 2021 and RSS 247 Sect. 5.2 (a) 2017. The preliminary investigation was performed to find the narrowest 6 dB bandwidth for each operational mode at different data rates. This worst finding was performed on 3 channels in each operating frequency range; 2400 MHz to 2483.5 MHz. This test was conducted on 3 channels in each mode of Sample S/N PP #1. The worst sample result indicated below.

Test Setup:

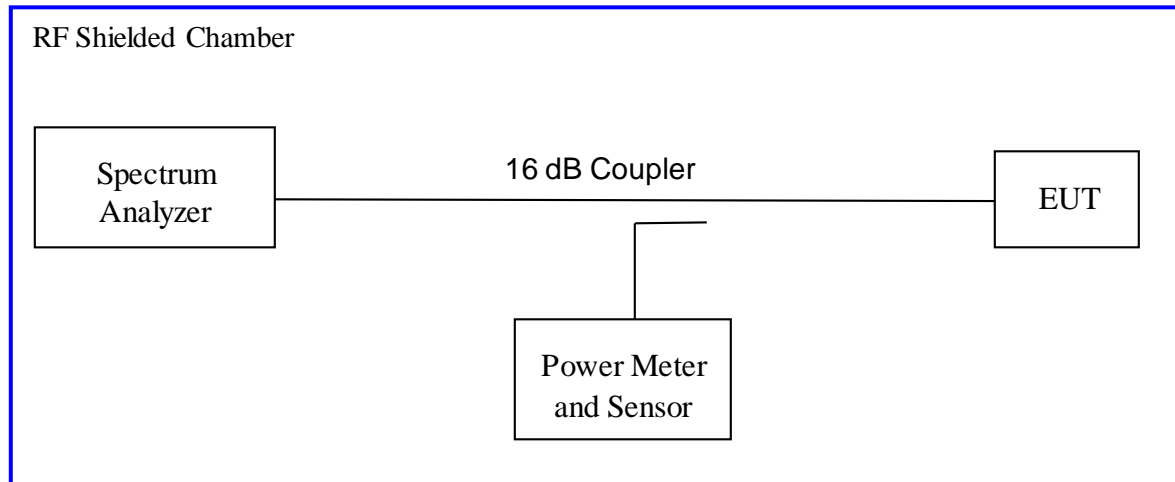

4.2.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 3: Occupied Bandwidth – Test Results

Test Date: January 27, 2022		Test By: Jeremy Luong		
Test Method: Conducted Measurements		Power Setting: 46		
Antenna Type: Ceramic Chip		Max. Antenna Gain: -1.3 dBi		
Operating Mode: Uncorrelated		Signal State: Modulated		
Ambient Temp.: 23 °C		Relative Humidity: 35%		
Bandwidth (MHz) for USB Wireless Audio Transmitter at 1 Mbps				
Frequency (MHz)	Limit (kHz)	99% Bandwidth	6 dB Bandwidth	Results
2402	500	1.032	0.705	Pass
2442	500	1.032	0.702	Pass
2480	500	1.032	0.707	Pass
Note: The bandwidth was measured at 59.33% duty cycle				
Bandwidth (MHz) for USB Wireless Audio Transmitter at 2 Mbps				
Frequency (MHz)	Limit (kHz)	99% Bandwidth	6 dB Bandwidth	Results
2402	500	2.053	1.234	Pass
2442	500	2.054	1.243	Pass
2480	500	2.054	1.182	Pass
Note: The bandwidth was measured at 29.92% duty cycle				

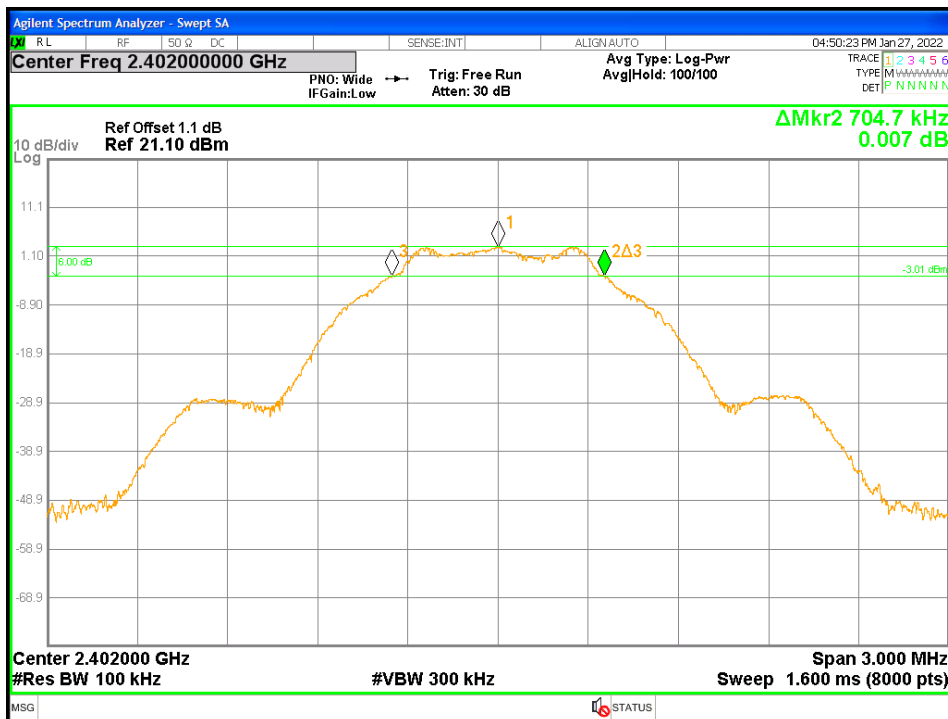


Figure 9: DTS Bandwidth - Transmitter at 1 Mbps - 2402 MHz

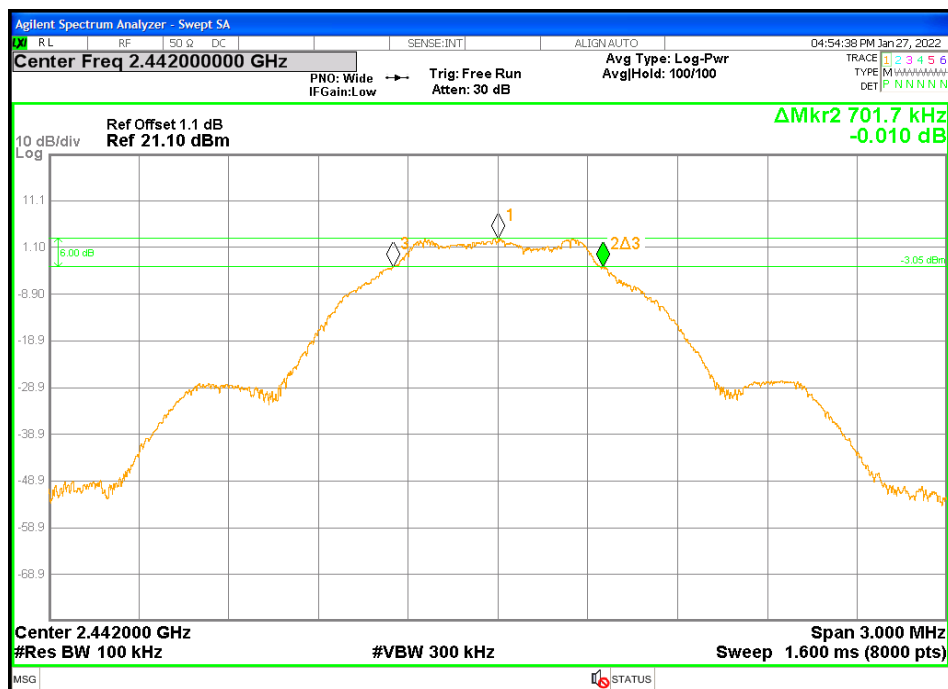


Figure 10: DTS Bandwidth - Transmitter at 1 Mbps - 2442 MHz



Figure 11: DTS Bandwidth - Transmitter at 1 Mbps - 2480 MHz

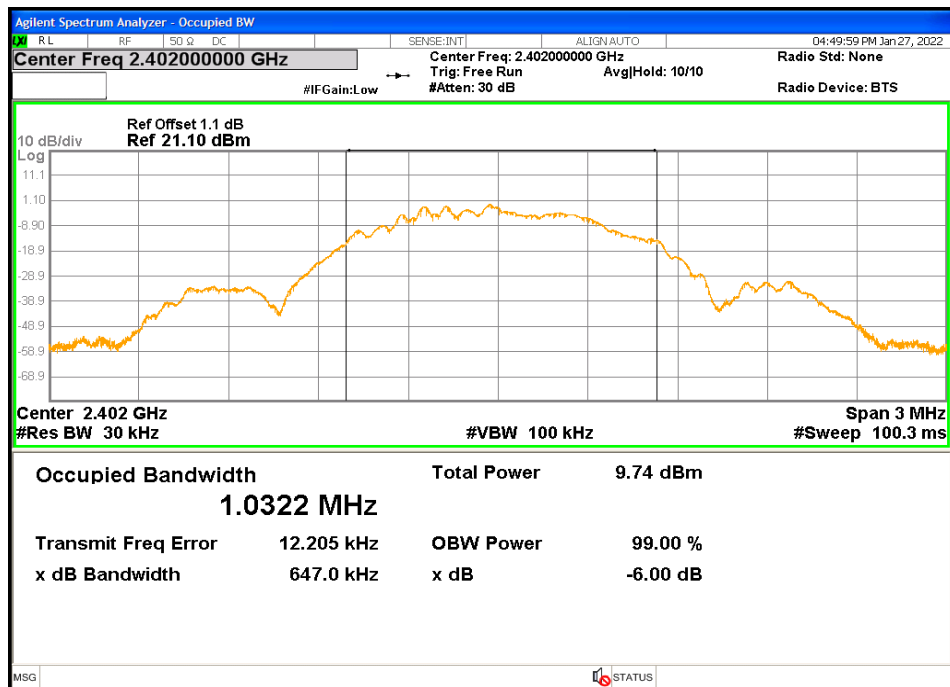


Figure 12: 99% Bandwidth - Transmitter at 1 Mbps - 2402 MHz

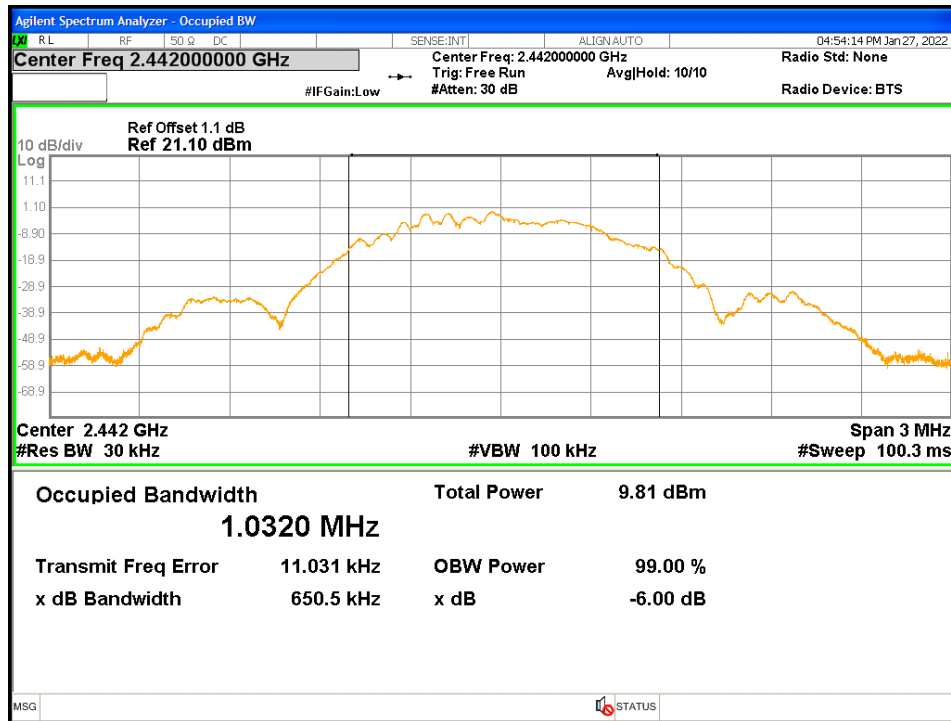


Figure 13: 99% Bandwidth - Transmitter at 1 Mbps - 2442 MHz

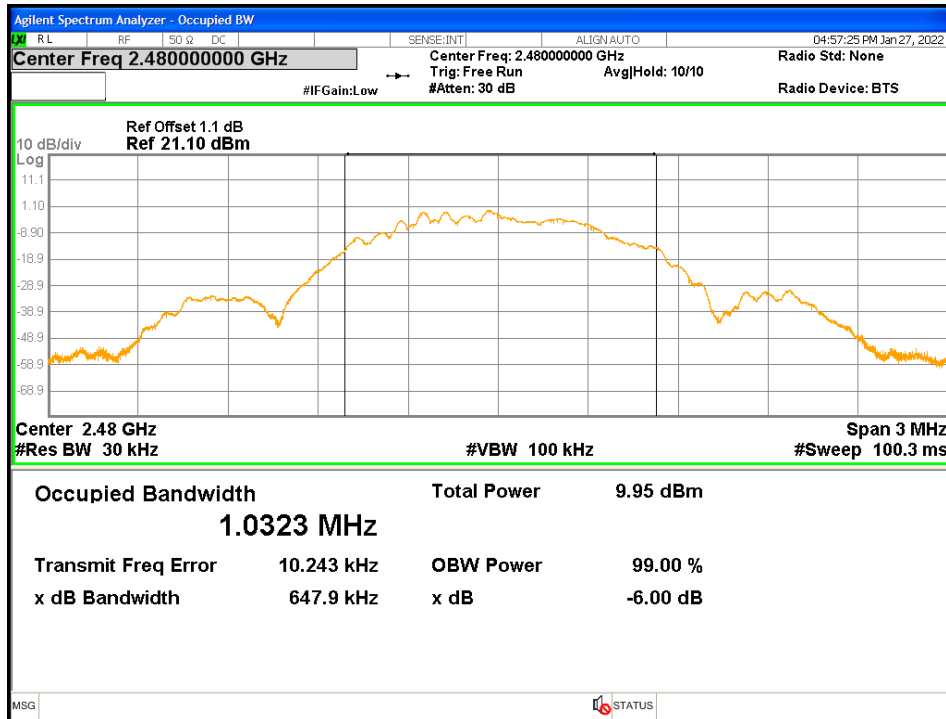


Figure 14: 99% Bandwidth - Transmitter at 1 Mbps - 2480 MHz

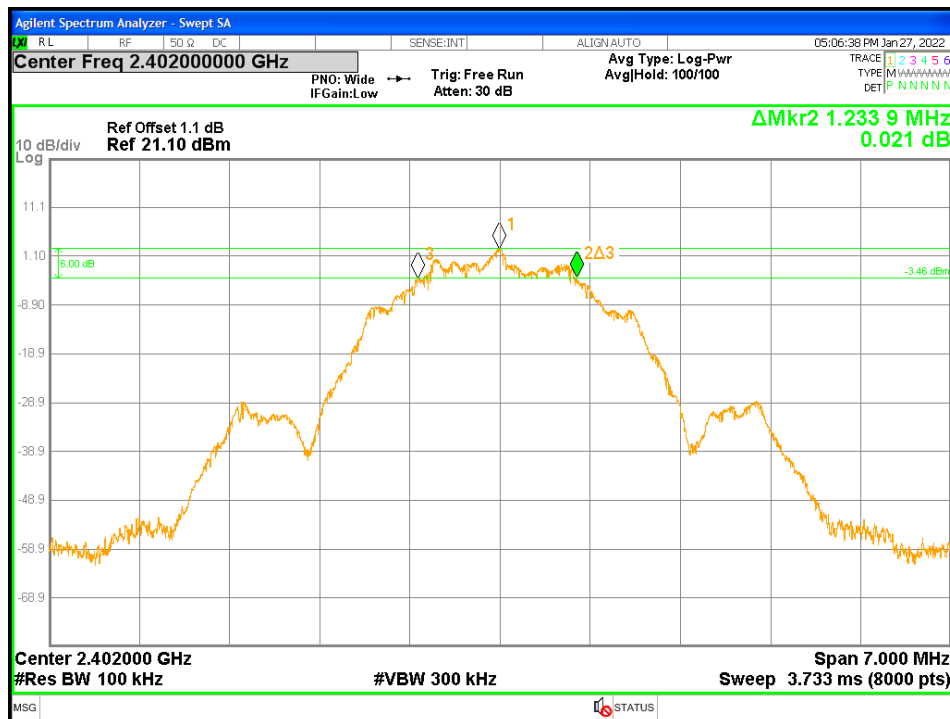


Figure 15: DTS Bandwidth - Transmitter at 2 Mbps - 2402 MHz



Figure 16: DTS Bandwidth - Transmitter at 2 Mbps - 2442 MHz



Figure 17: DTS Bandwidth - Transmitter at 2 Mbps - 2480 MHz

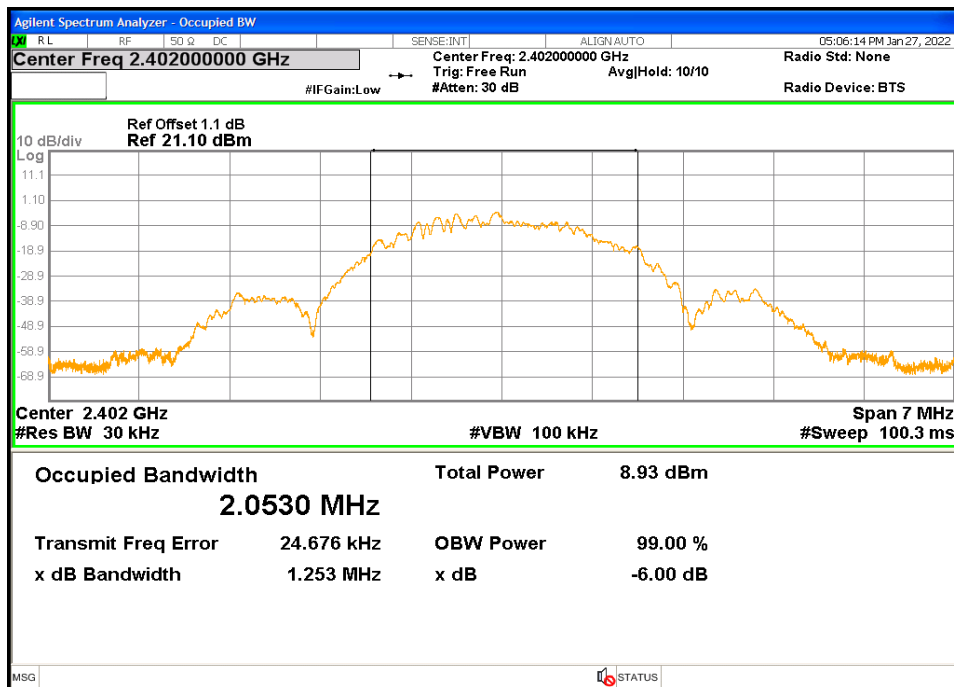


Figure 18: 99% Bandwidth - Transmitter at 2 Mbps - 2402 MHz

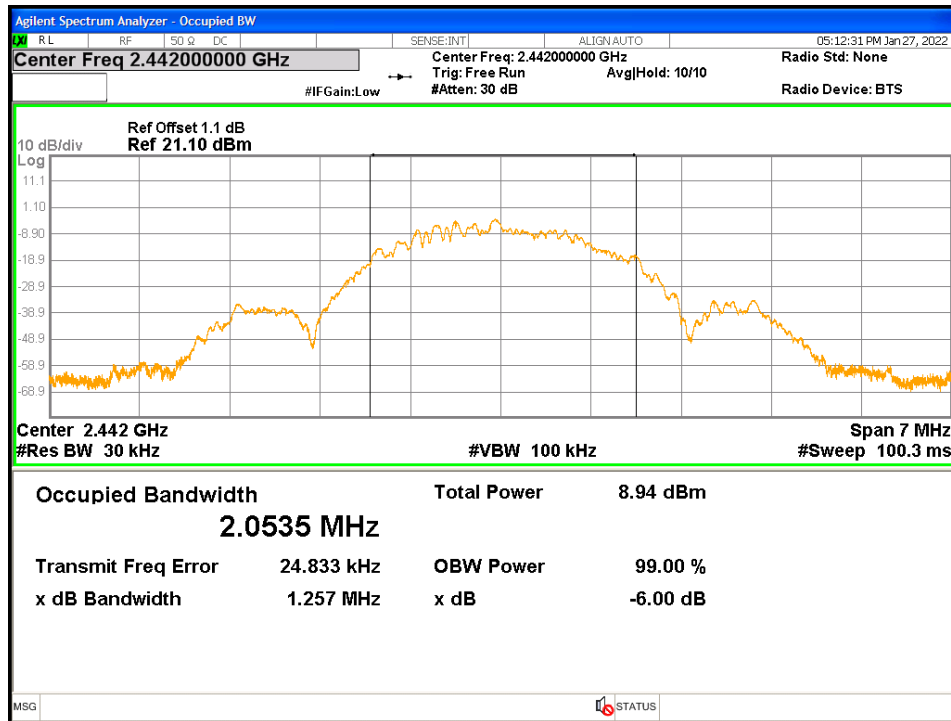


Figure 19: 99% Bandwidth - Transmitter at 2 Mbps - 2442 MHz

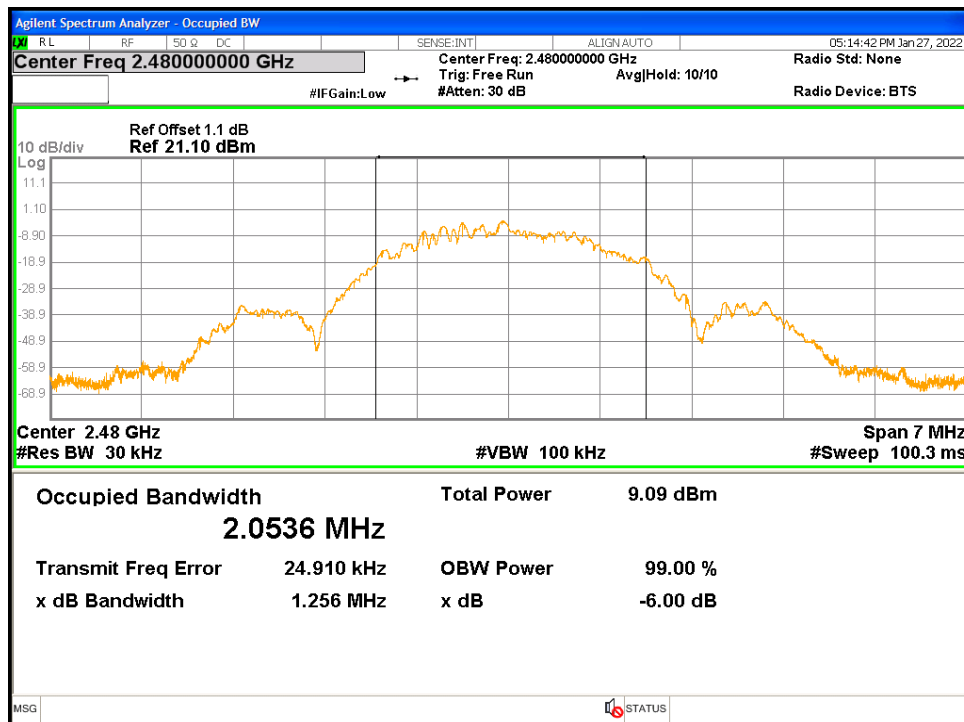


Figure 20: 99% Bandwidth - Transmitter at 2 Mbps - 2480 MHz


4.3 Peak Power Spectral Density

According to the CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b), the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10-2013 Section 11.10.3. The measurement was performed with modulation per CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b). The pre-evaluation was performed to find the worst modes. The worst findings were conducted on 3 channels in each operating frequency range of 2400 MHz to 2483.5 MHz. This test was conducted on 3 channels of Sample SN PP #1. The worst sample result indicated below.

Test Setup:

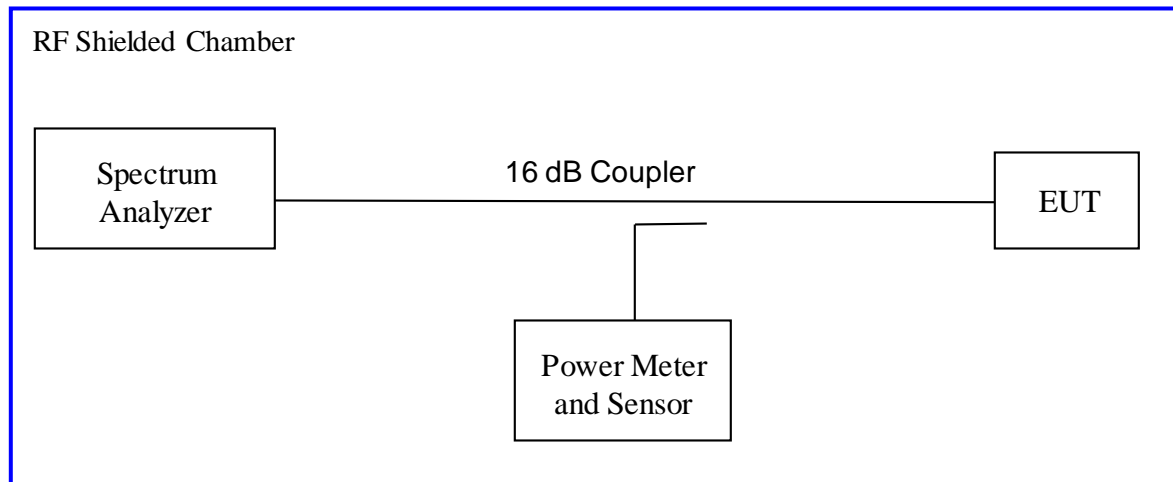

4.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 4: Peak Power Spectral Density – Test Results

Test Date: January 27, 2022				Test By: Jeremy Luong		
Test Method: Conducted Measurements				Power Setting: 46		
Antenna Type: Ceramic Chip				Max. Antenna Gain: -1.3 dBi		
Operating Mode: Uncorrelated				Signal State: Modulated		
Ambient Temp.: 23 °C				Relative Humidity: 35%		
Peak Power Spectral Density 1 Mbps						
Freq. (MHz)	Config.	Output [dBm]	CF [dB]	Max. PPSD [dBm]	Limit [dBm]	Margin [dB]
2402	Transmitter	-3.95	-12.96	-16.91	8.00	-24.91
2442	Transmitter	-3.76	-12.96	-16.72	8.00	-24.72
2480	Transmitter	-3.94	-12.96	-16.90	8.00	-24.90
<p>Note: The bandwidth ratio is $10 \cdot \log(3\text{kHz}/100\text{kHz})$ or -15.23 dB. The USB wireless audio transmitter transmitted at 59.33% duty cycle; 2.27 dB CF accounted for the measured RBW and duty cycle; -12.98 dB</p>						
Peak Power Spectral Density 2 Mbps						
Freq. (MHz)	Config.	Output [dBm]	CF [dB]	Max. PPSD [dBm]	Limit [dBm]	Margin [dB]
2402	Transmitter	-7.61	-10.09	-17.70	8.00	-25.70
2442	Transmitter	-8.18	-10.09	-18.27	8.00	-26.27
2480	Transmitter	-8.14	-10.09	-18.23	8.00	-26.23
<p>Note: The bandwidth ratio is $10 \cdot \log(3\text{kHz}/100\text{kHz})$ or -15.23 dB. The USB wireless audio transmitter transmitted at 29.92% duty cycle; 5.14 dB CF accounted for the measured RBW and duty cycle; -10.08 dB</p>						

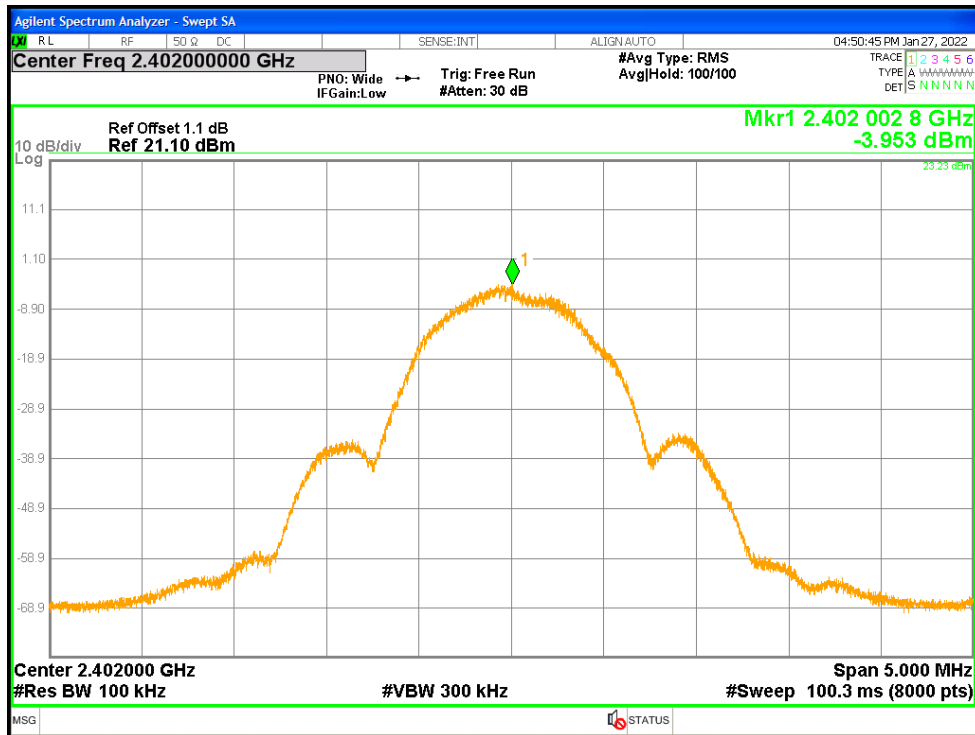


Figure 21: Maximum Power Spectral Density at 1 Mbps - 2402 MHz - Transmitter

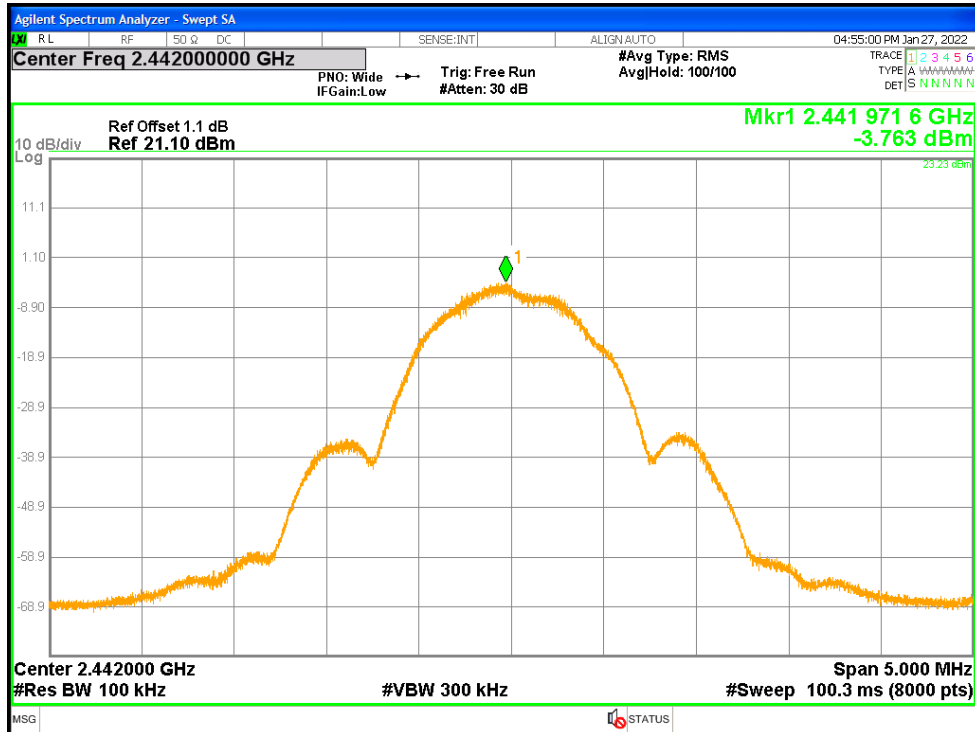


Figure 22: Maximum Power Spectral Density at 1 Mbps - 2442 MHz - Transmitter

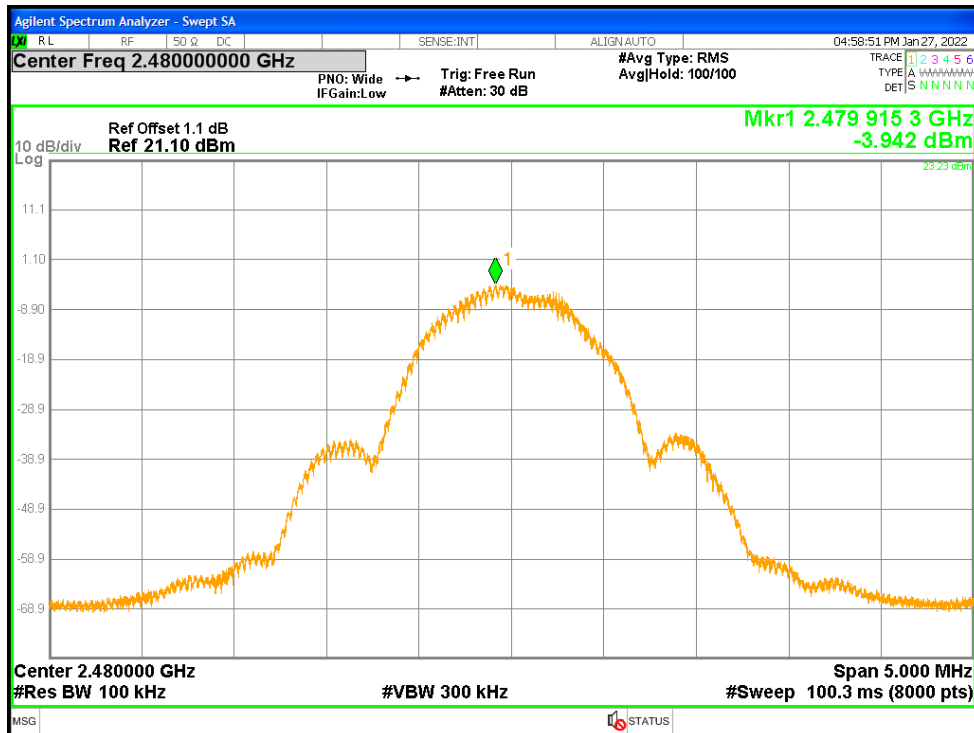


Figure 23: Maximum Power Spectral Density at 1 Mbps - 2480 MHz - Transmitter

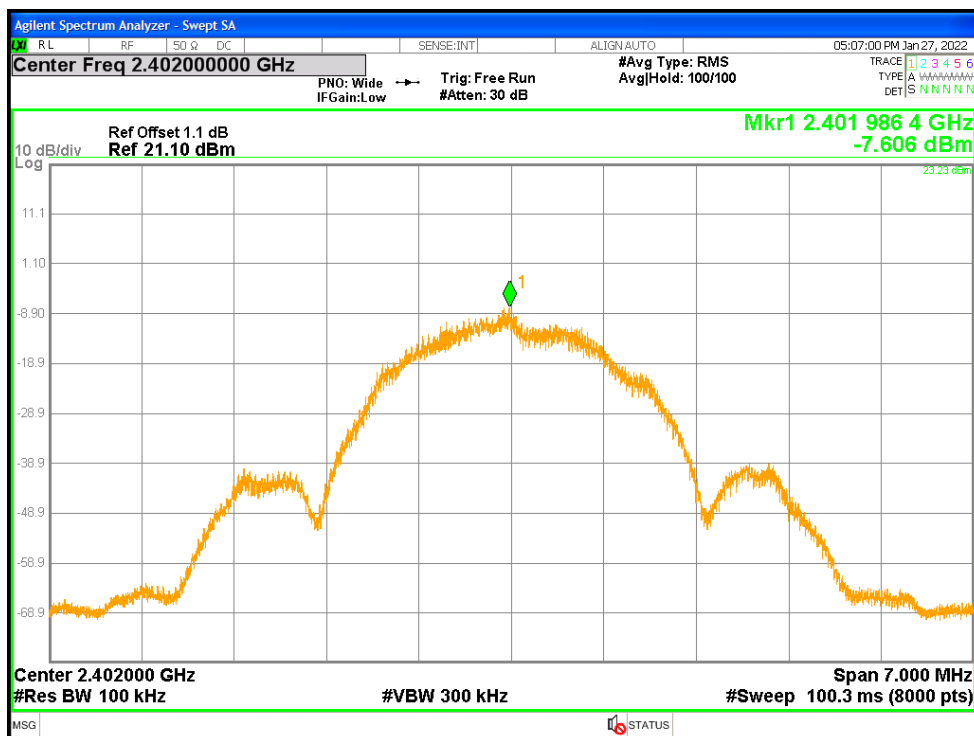


Figure 24: Maximum Power Spectral Density at 2 Mbps - 2402 MHz - Transmitter

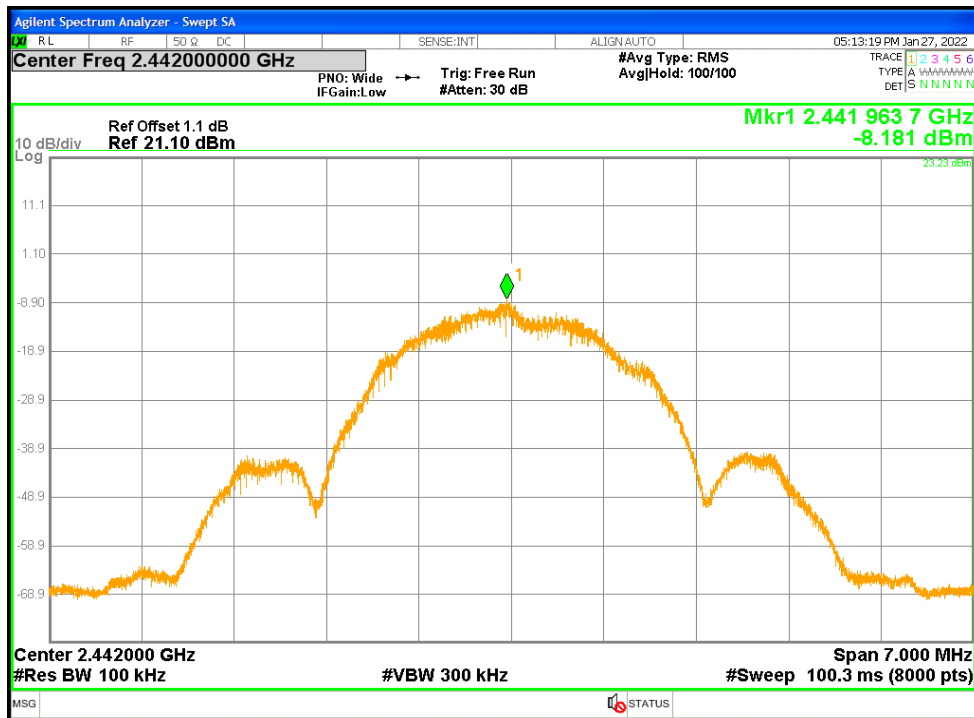


Figure 25: Maximum Power Spectral Density at 2 Mbps - 2442 MHz - Transmitter

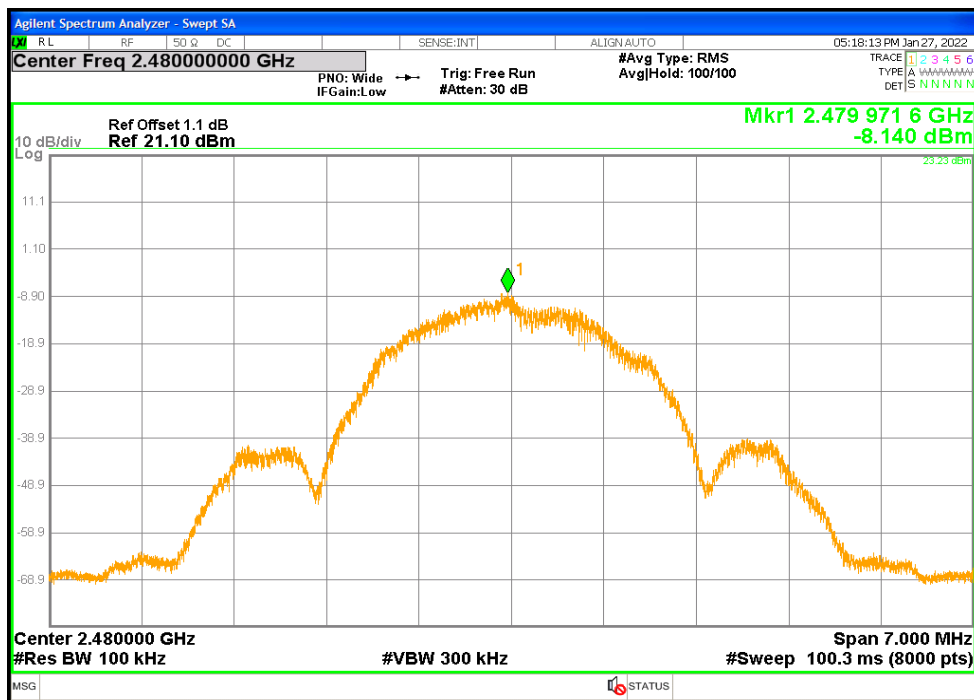


Figure 26: Maximum Power Spectral Density at 2 Mbps - 2480 MHz - Transmitter

4.4 Out of Band Emissions


The setup was identical to RF output power measurement. Intentional radiators operating under the alternative provisions to the general emission limits, must be designed to ensure that the 20 dB or 30 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If the frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Since the transmitter complies with the conducted power limits base on the use of RMS averaging per CFR47 Part 15.247(b)(3), any frequency outside the band of 2400MHz to 2483.5MHz, the power output level must be below 30db from the in-band transmitting signal; CFR 47 Part 15.215, 15.247(d) and RSS-247 Sect.5.5..

4.4.1 Test Method

The conducted method was used to measure the out-of-band emission requirement. The measurement was performed with modulation per CFR47 15.247(4) (d) 2021 and RSS-247 Sect.5.5: 2017. This test was conducted on 3 channels of Sample S/N PP #1. The worst sample result indicated below.

Test Setup:

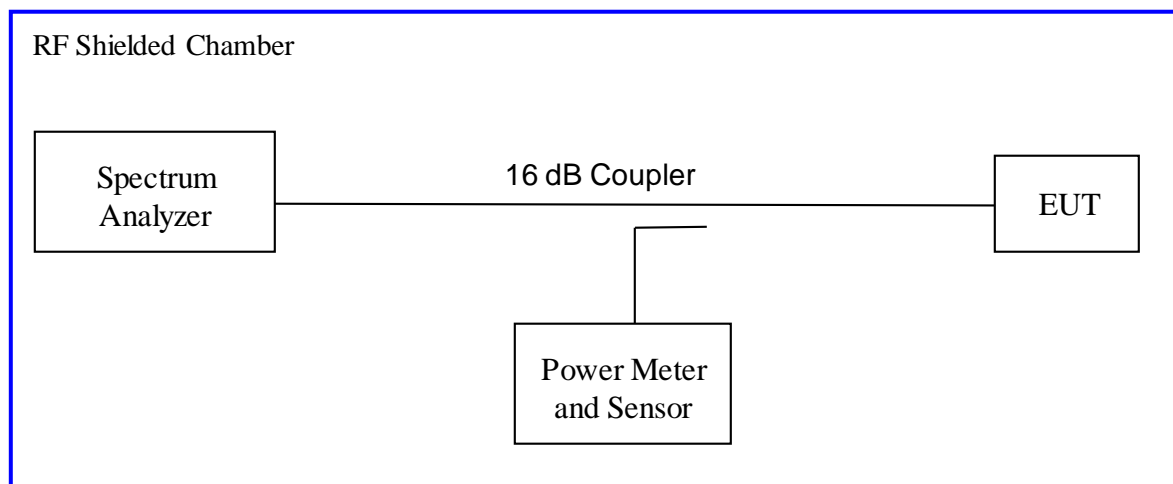

4.4.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 5: Out of Band Emissions – Test Results

Test Date: January 27, 2022		Test By: Jeremy Luong	
Test Method: Conducted Measurements		Power Setting: 46	
Antenna Type: Ceramic Chip		Max. Antenna Gain: -1.3 dBi	
Operating Mode: Uncorrelated		Signal State: Modulated	
Ambient Temp.: 23 °C		Relative Humidity: 35%	
Out of Band Results for USB Wireless Audio Transmitter 1 Mbps			
Operating Channel	Out of Band Level (dBm)	30 dBc Level (dBm)	Margin (dB)
2402 MHz	-47.86	-26.84	-21.02
2442 MHz	-48.55	-26.81	-21.74
2480 MHz	-48.48	-26.67	-21.81
<p>Note: dBc is defined as the level below the main carrier. The band-edge level must be lower than the 30 dBc level. The maximum out of band emissions on each individual output is at least 30 dB below the maximum in-band PSD on that output. (*) The band-edge is compared to the highest -30 dBc level of the test mode.</p>			
Out of Band Results for USB Wireless Audio Transmitter 2 Mbps			
Operating Channel	Out of Band Level (dBm)	30 dBc Level (dBm)	Margin (dB)
2402 MHz	-48.05	-27.37	-20.68
2442 MHz	-48.81	-27.29	-21.52
2480 MHz	-48.89	-27.14	-21.75
<p>Note: dBc is defined as the level below the main carrier. The band-edge level must be lower than the 30 dBc level. The maximum out of band emissions on each individual output is at least 30 dB below the maximum in-band PSD on that output. (*) The band-edge is compared to the highest -30 dBc level of the test mode.</p>			

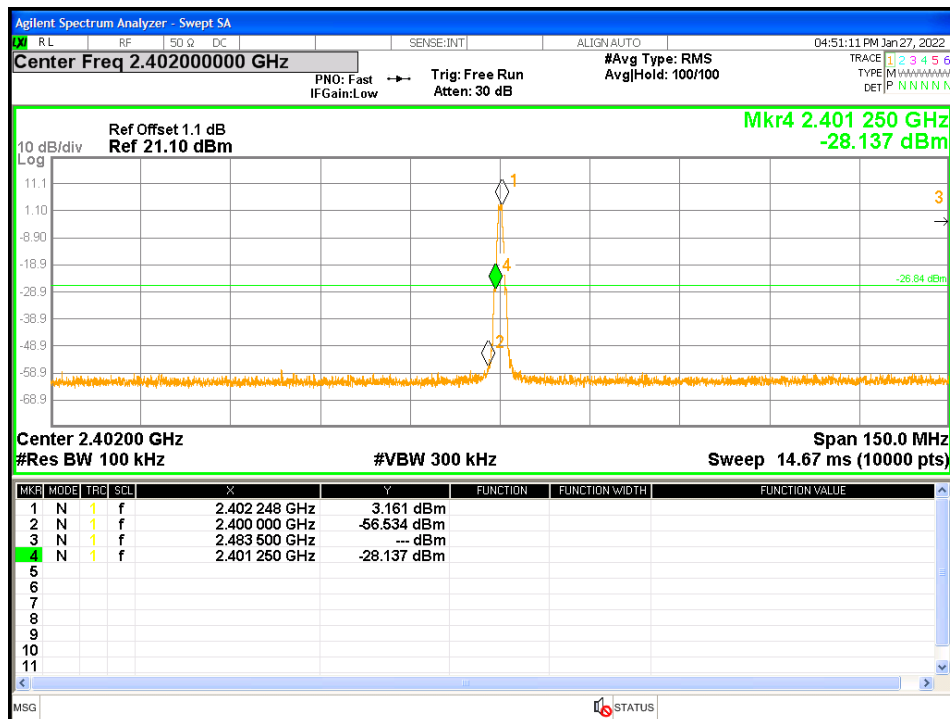


Figure 27: Conducted Band Edge at 1 Mbps, 2402 MHz-Transmitter

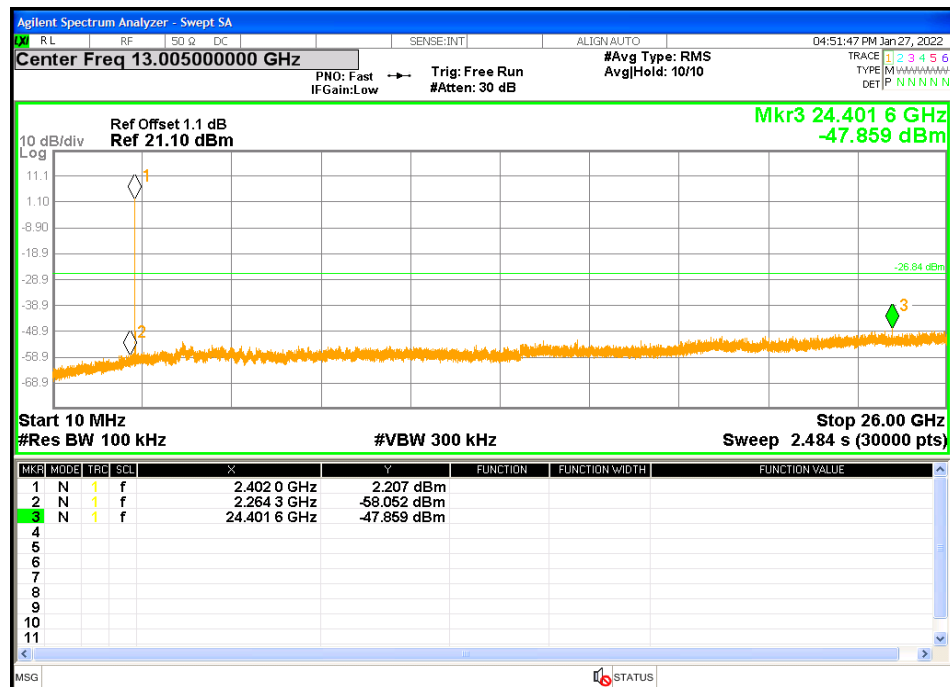


Figure 28: Out of band Emissions at 1 Mbps, 2402 MHz- Transmitter

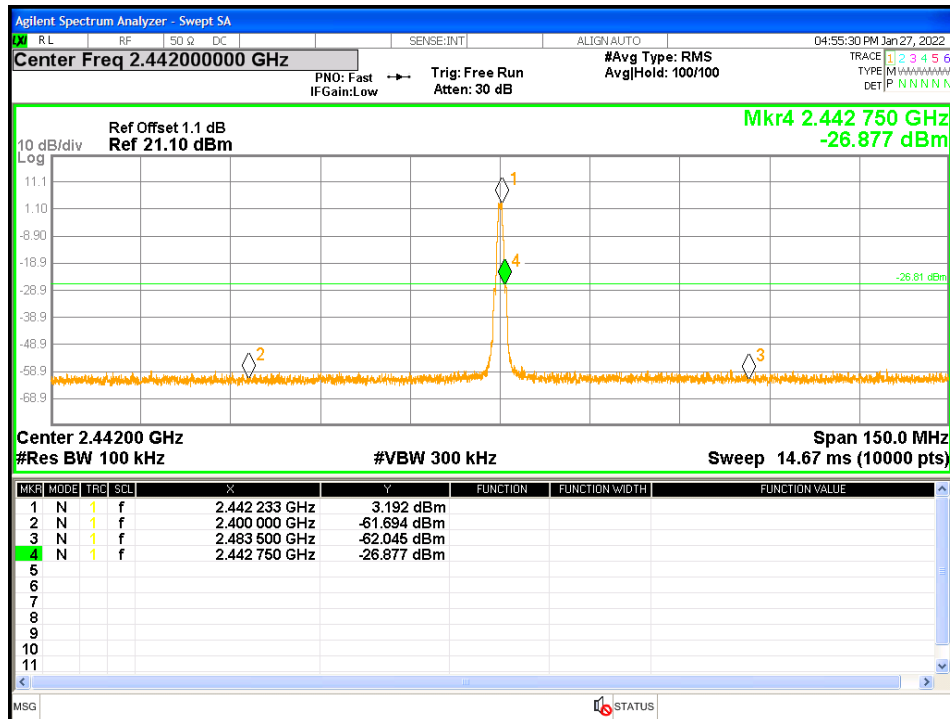


Figure 29: Conducted Band Edge at 1 Mbps, 2442 MHz- Transmitter

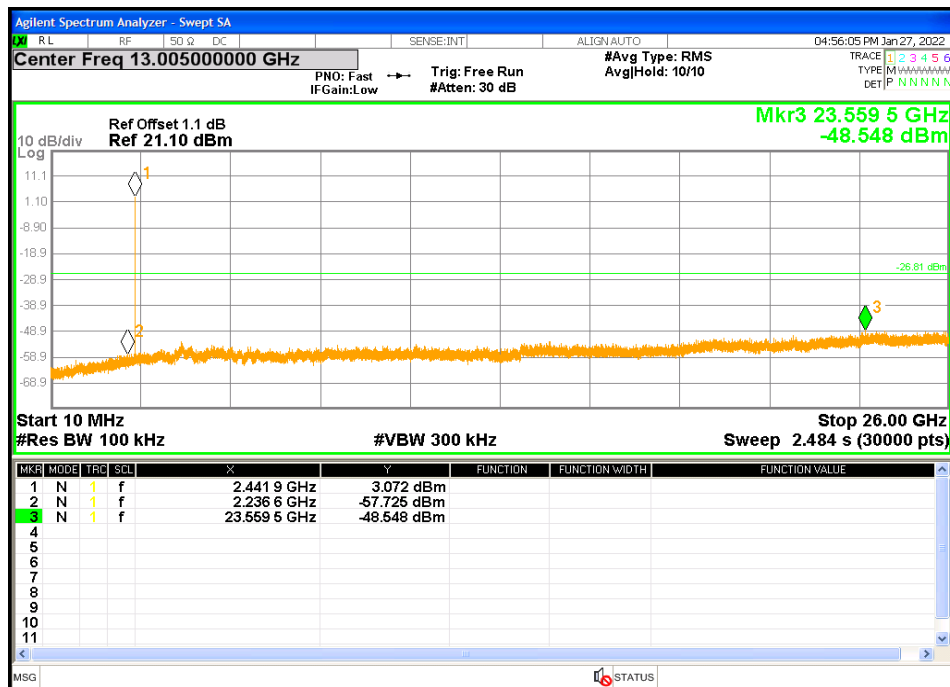


Figure 30: Out of band Emissions at 1 Mbps, 2442 MHz- Transmitter

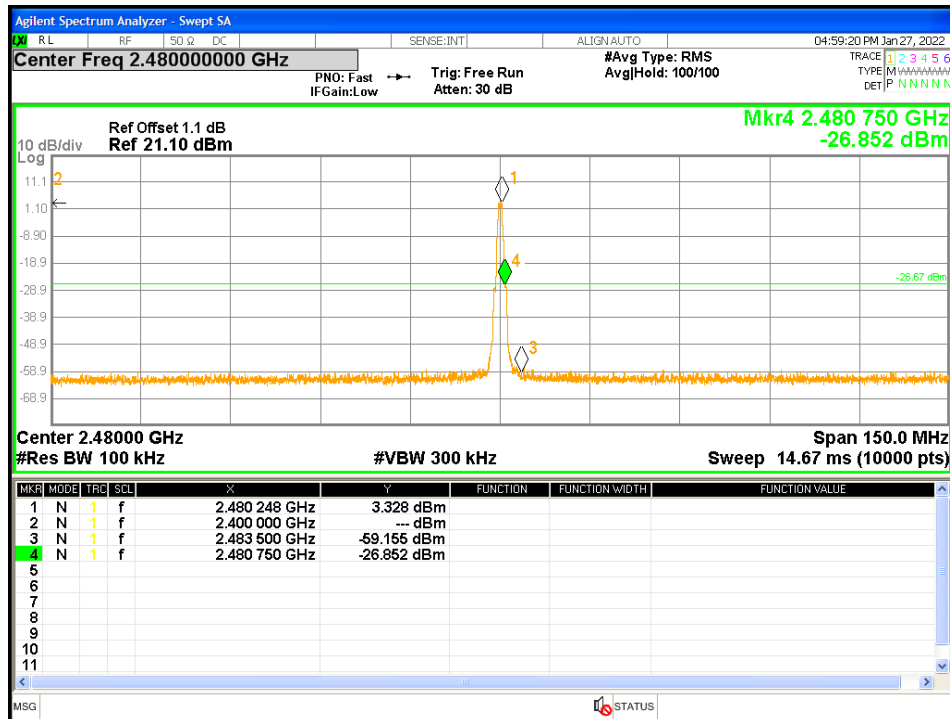


Figure 31: Conducted Band Edge at 1 Mbps, 2480 MHz- Transmitter

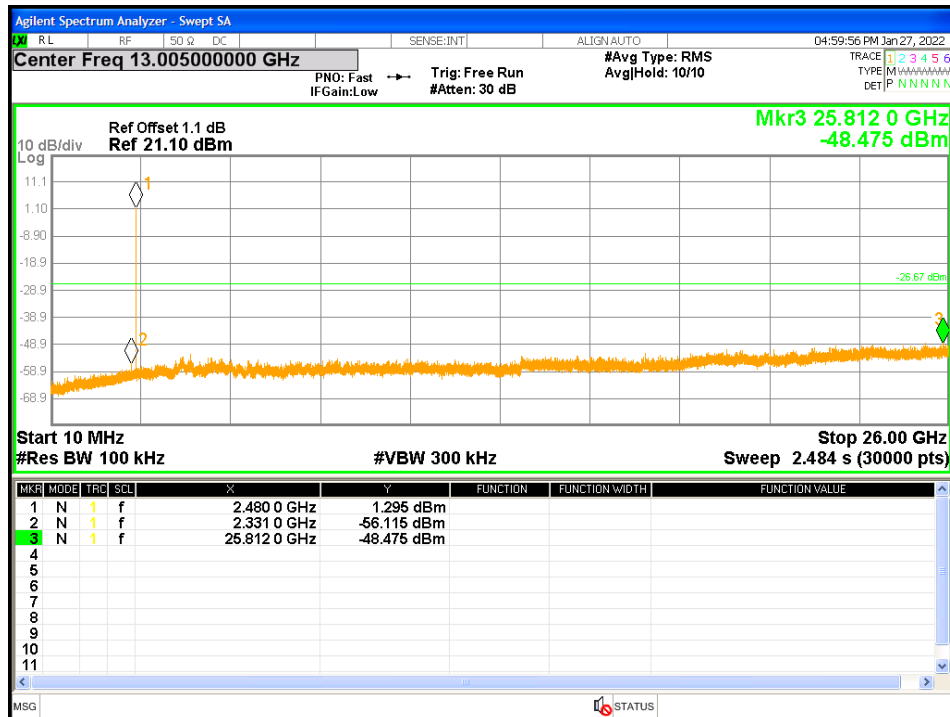


Figure 32: Out of band Emissions at 1 Mbps, 2480 MHz- Transmitter

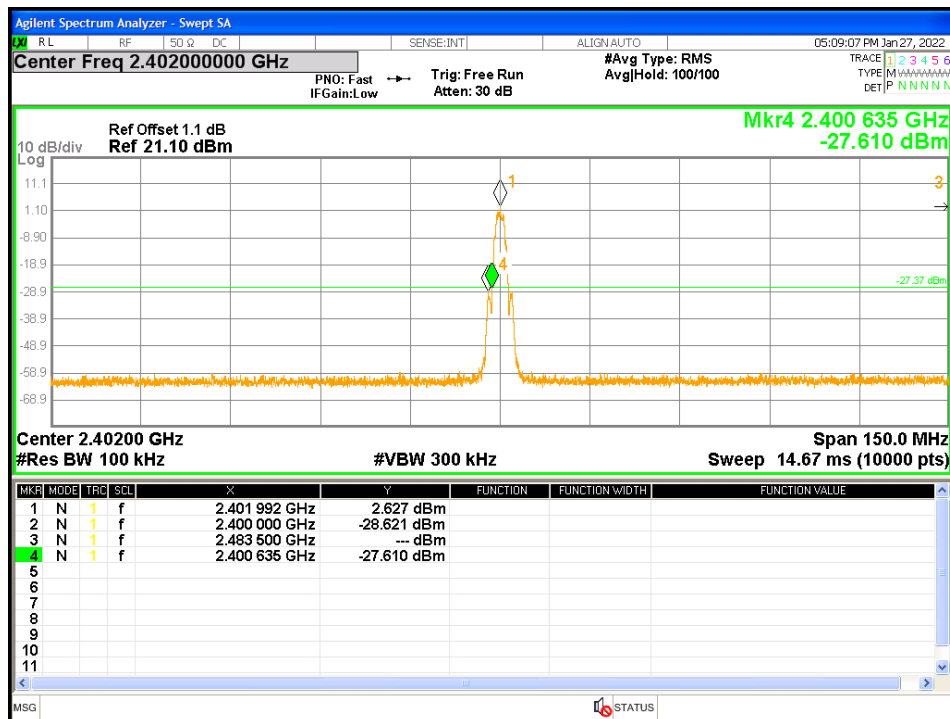


Figure 33: Conducted Band Edge at 2 Mbps, 2402 MHz- Transmitter

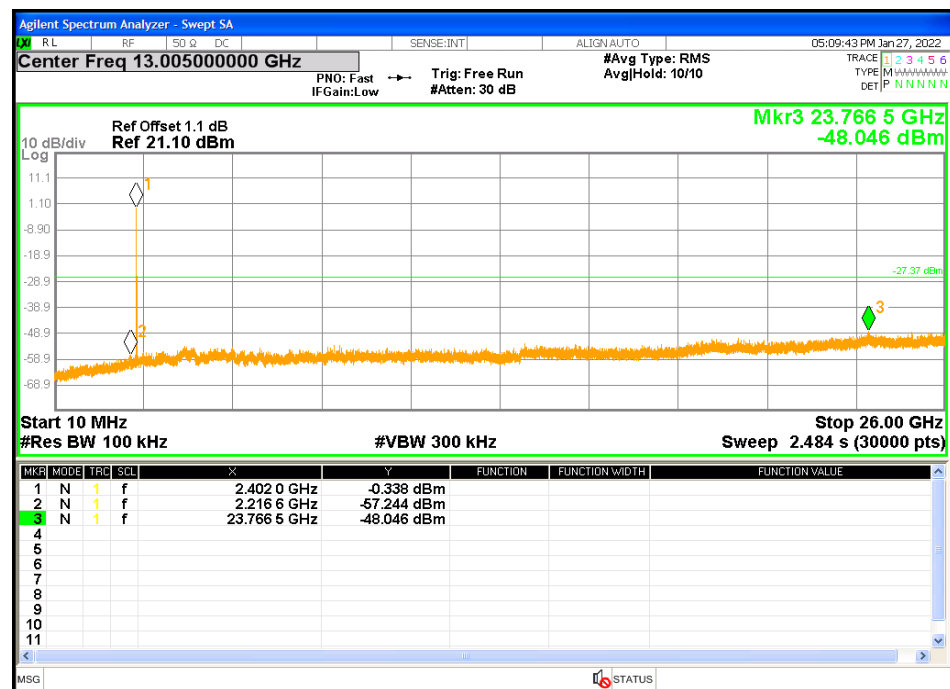


Figure 34: Out of band Emissions at 2 Mbps, 2402 MHz- Transmitter

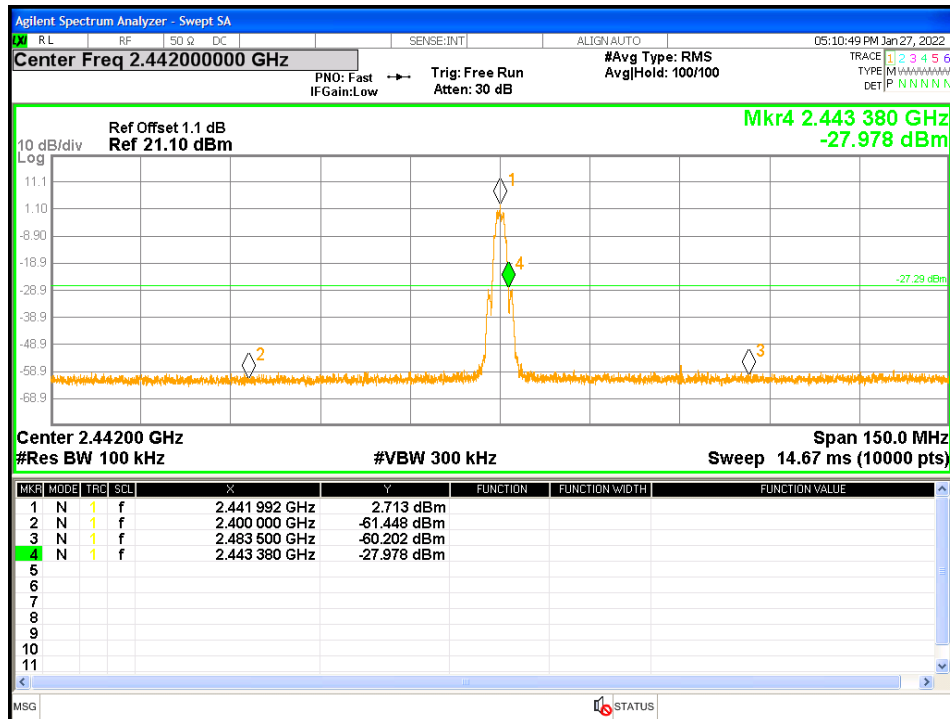


Figure 35: Conducted Band Edge at 2 Mbps, 2442 MHz- Transmitter

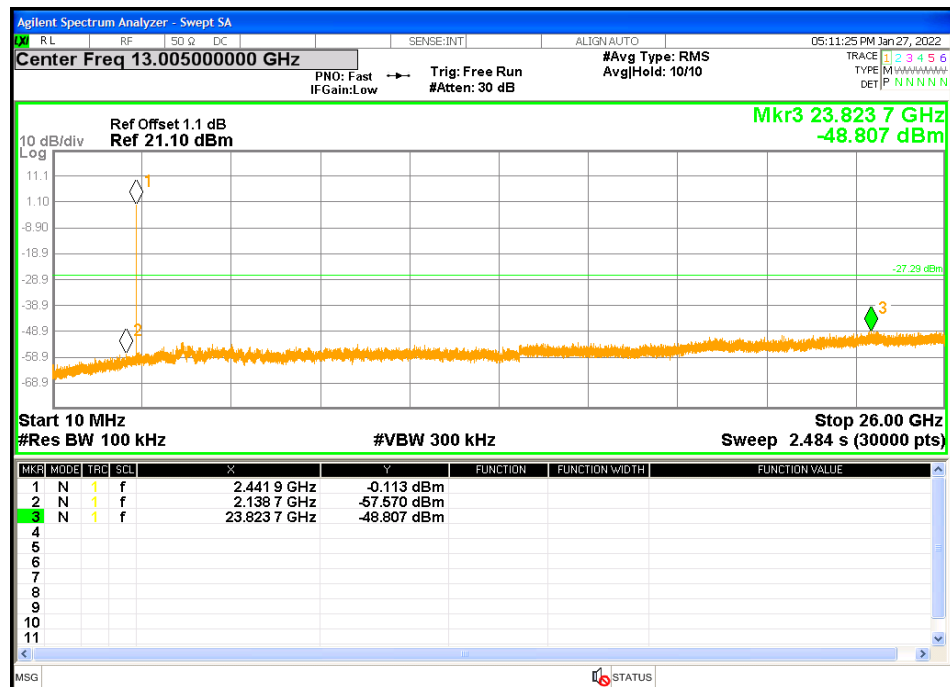


Figure 36: Out of band Emissions at 2 Mbps, 2442 MHz- Transmitter

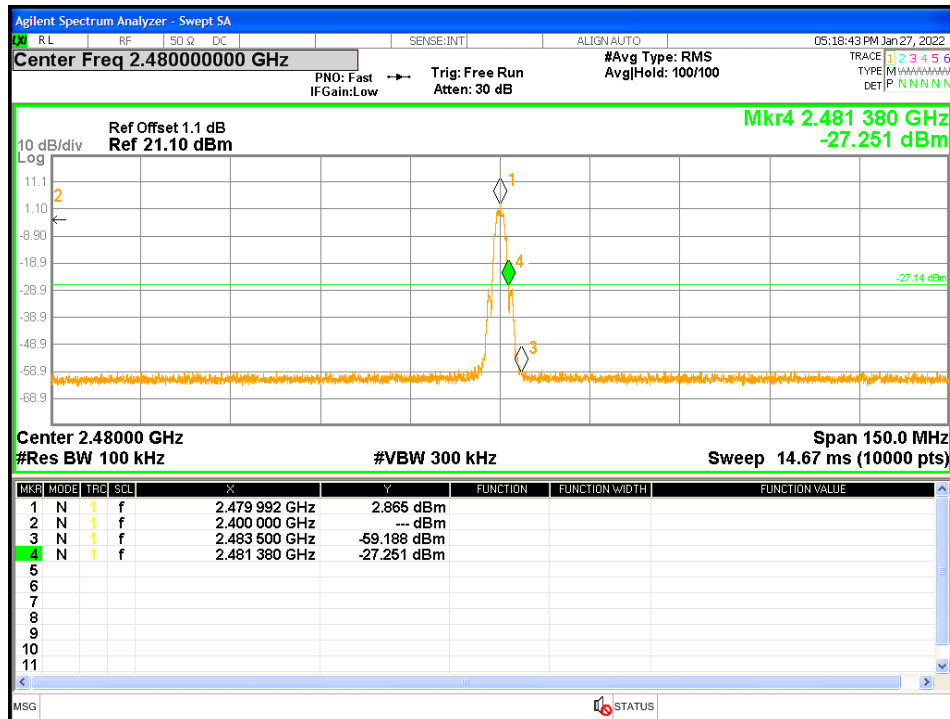


Figure 37: Conducted Band Edge at 2 Mbps, 2480 MHz- Transmitter

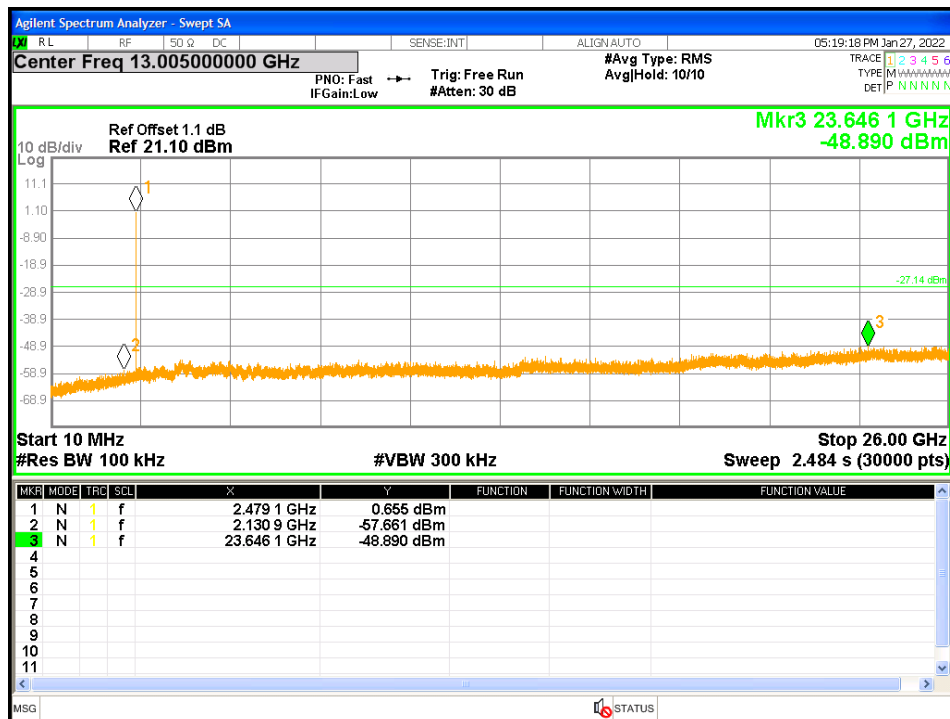


Figure 38: Out of band Emissions at 2 Mbps, 2480 MHz- Transmitter

4.5 Transmit Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-Gen Sect. 8.9.

4.5.1 Test Methodology

4.5.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Pres-scans were performed to determine the worst case configuration for data rate.

4.5.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.


The final scans performed on the worst axis, Y-Axis up, for three operating channels in each operating mode;

2402 MHz, 2442 MHz, and 2480 MHz

4.5.1.3 Deviations

None.

Test Setup:

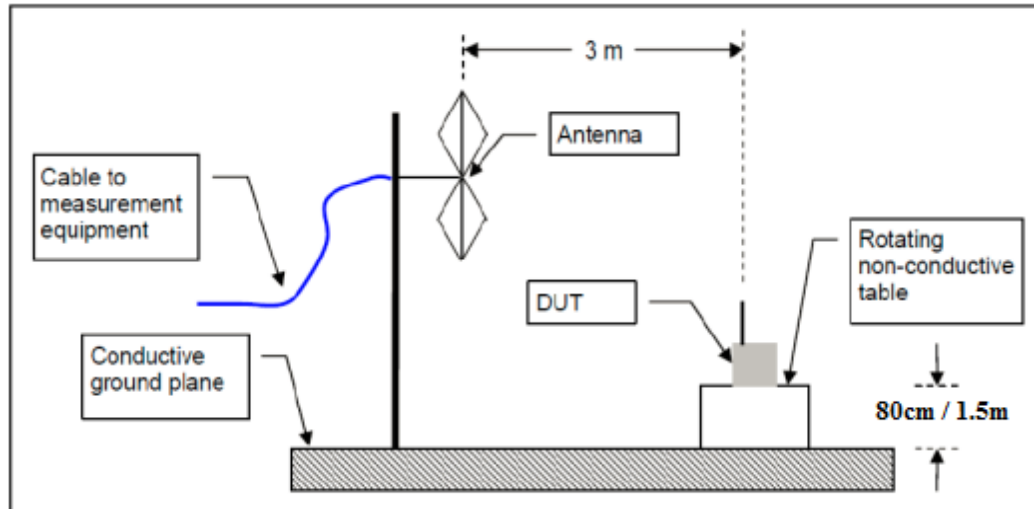

4.5.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2021 and RSS Gen Sect. 8.10: 2019.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F(kHz)	300
0.490-1.705.....	24000/F(kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

All harmonics and spurious emission which are outside of the restricted band shall be 20dB below the in-band emission.

4.5.3 Test Results


The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).


Table 6: Transmit Spurious Emission at Band-Edge Requirements

Test Date: January 24, 2022					Test By: Jeremy Luong					
Test Method: Radiated Measurements					Power Setting: 46					
Antenna Type: Ceramic Chip					Max. Antenna Gain: -1.3 dBi					
Operating Mode: Uncorrelated					Signal State: Modulated					
Ambient Temp.: 23 °C					Relative Humidity: 38%					
Band-Edge Results										
Freq.	Edge Freq.	Raw	CF	Level	Det.	Pol	Ant.	Tbl.	Limit	Margin
MHz	MHz	dBuV/m	dB	dBuV/m	Pk/Avg	V/H	cm	Deg	dBuV/m	dB
2402	2390.00	15.60	30.01	45.61	Pk	V	101	35	74.00	-28.39
2402	2390.00	-1.06	30.01	28.95	Ave	V	101	35	54.00	-25.05
2402	2402.57*	70.55	30.09	100.64	Pk	V	101	0		
2402	2402.57*	53.51	30.09	83.60	Ave	V	101	0		
2402	2390.00	15.08	30.01	45.09	Pk	H	240	360	74.00	-28.91
2402	2390.00	-1.22	30.01	28.79	Ave	H	240	360	54.00	-25.21
2402	2401.82*	68.88	30.09	98.97	Pk	H	120	360		
2402	2401.82*	56.65	30.09	86.74	Ave	H	120	360		
2480	2480.14*	69.52	30.15	99.67	Pk	V	201	5		
2480	2480.14*	56.85	30.15	87.00	Ave	V	201	5		
2480	2483.50	24.50	30.16	54.66	Pk	V	127	43	74.00	-19.34
2480	2483.50	1.89	30.16	32.05	Ave	V	127	43	54.00	-21.95
2480	2480.19*	68.40	30.15	98.55	Pk	H	190	318		
2480	2480.19*	55.64	30.15	85.79	Ave	H	190	318		
2480	2483.50	23.79	30.16	53.95	Pk	H	212	360	74.00	-20.05
2480	2483.50	1.29	30.16	31.45	Ave	H	212	360	54.00	-22.55
<p>Note: The emissions were measured at the adjacent restricted band of the fundamental signal. All of the band-edge measurements met the restricted band requirements of CFR47 15.205 Band-edge measurement plots use a wider span than 2 MHz to evaluate additional spectrum bands for in-band leakage and spurious emissions. (*) Fundamental/ Inband emission.</p>										

- FCC/47 CFR Part 15 section 15.109 B - Average/3.0m/
- FCC/47 CFR Part 15 section 15.109 B - Peak/3.0m/
- Peak (Horizontal)
- Peak (Vertical)
- × Meas.Peak (Meas. peak) (Horizontal)
- × Meas.Peak (Meas. peak) (Vertical)
- ↓ Meas.Avg (Meas. Avg) (Horizontal)
- ↓ Meas.Avg (Meas. Avg) (Vertical)

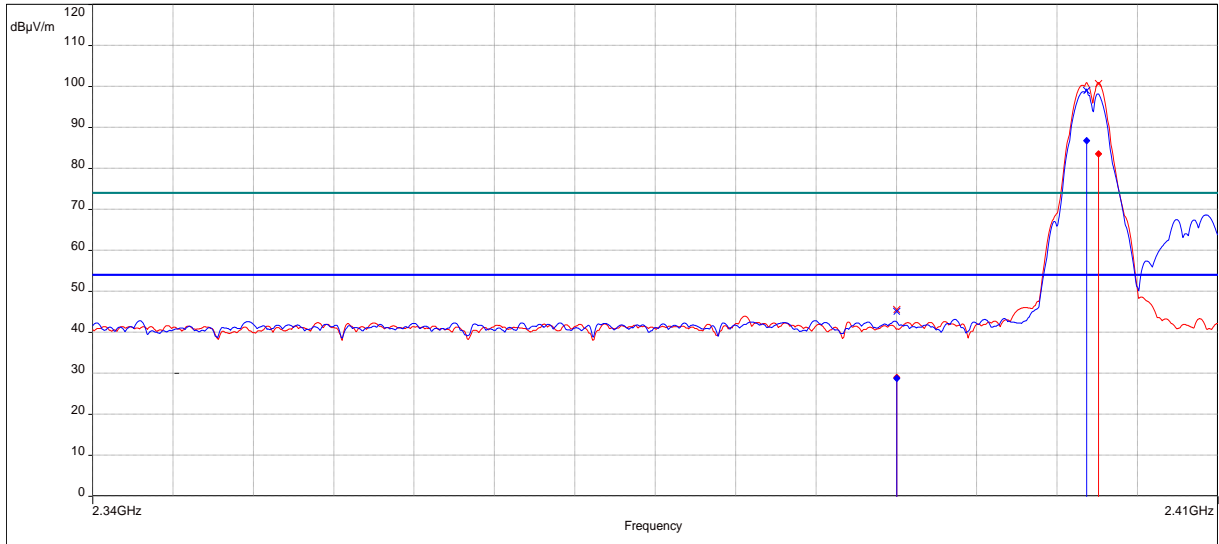
Figure 39: Band-edge-2402 MHz

- FCC/47 CFR Part 15 section 15.109 B - Average/3.0m/
- FCC/47 CFR Part 15 section 15.109 B - Peak/3.0m/
- Peak (Horizontal)
- Peak (Vertical)
- × Meas.Peak (Meas. peak) (Horizontal)
- × Meas.Peak (Meas. peak) (Vertical)
- ↓ Meas.Avg (Meas. Avg) (Horizontal)
- ↓ Meas.Avg (Meas. Avg) (Vertical)

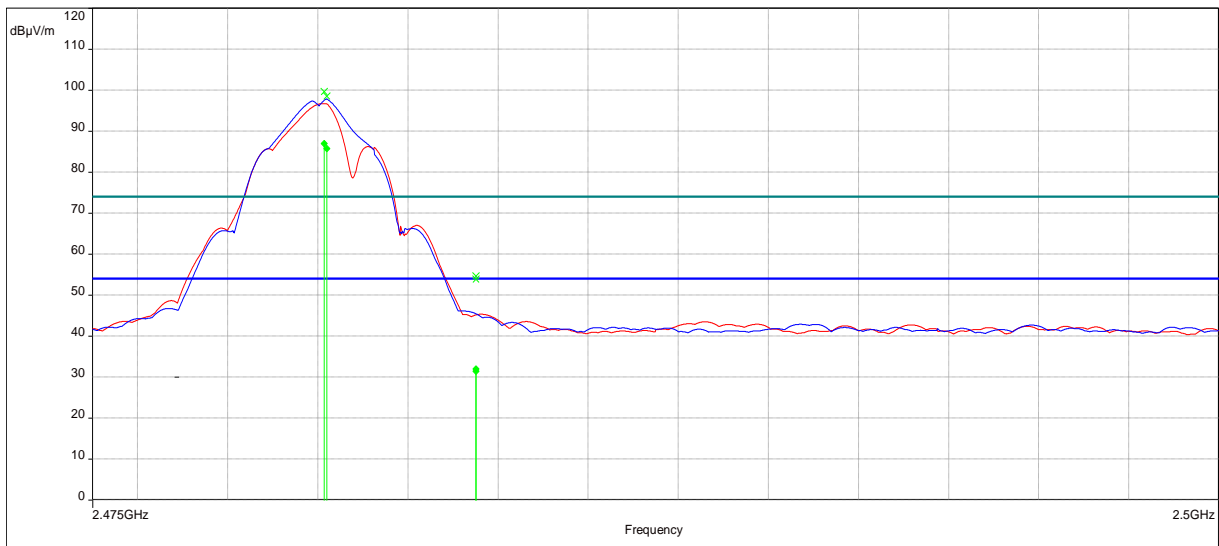
Figure 40: Band-edge-2480 MHz

SOP 1 Radiated Emissions						Tracking # US2236AF.001 Page 1 of 6					
EUT Name	USB Wireless Audio Transmitter					Date	January 24, 2022				
EUT Model	Stealth600X-MAX-TX					Temp / Hum in	23°C / 38% rh				
EUT Serial	PP #2					Temp / Hum out	N/A				
EUT Config.	Transmitter on Vertical Position					Line AC / Freq	5.0 VDC				
Standard	CFR47 Part 15 Subpart C					RBW / VBW	120 kHz/ 300 kHz				
Dist/Ant Used	3m / JB3 & 6502					Performed by	Jeremy Luong				
Freq.	Raw	Corrd'	Level	Det.	Pol.	Hght.	Azt	Limit	Margin	Result	
MHz	dBuV/m	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB		
9 kHz to 1 GHz, Transmitted Data at 2480 MHz											
0.929	40.59	12.50	53.09	Pk	Y-Axis	100	74	68.24	-15.15	Pass	
33.51	21.20	-6.42	14.78	QP	H	306	243	40.00	-25.22	Pass	
37.36	33.09	-9.47	23.62	QP	V	100	259	40.00	-16.38	Pass	
81.12	20.80	-17.78	3.02	QP	H	252	225	40.00	-36.98	Pass	
87.28	36.88	-17.89	18.99	QP	V	123	69	40.00	-21.01	Pass	
165.99	30.55	-12.68	17.87	QP	H	151	129	43.52	-25.65	Pass	
Spec Margin = Level - Limit, Level = Raw + Cb+ CF ± Uncertainty											
CF= Amp Gain + ANT Factor											
Combined Standard Uncertainty $U_c(y) = \pm 3.2$ dB Expanded Uncertainty $U = kU_c(y)$ $k = 2$ for 95% confidence											
Note: The worst case emission was observed on Channel 2480 MHz.											



SOP 1 Radiated Emissions					Tracking # US2236AF.001 Page 2 of 6					
EUT Name	USB Wireless Audio Transmitter				Date	December 27, 2021				
EUT Model	Stealth600X-MAX-TX				Temp / Hum in	23°C / 44% rh				
EUT Serial	PP #2				Temp / Hum out	N/A				
EUT Config.	Transmitter on Vertical Position				Line AC / Freq	5.0 VDC				
Standard	CFR47 Part 15 Subpart C				RBW / VBW	1 MHz / 3 MHz				
Dist/Ant Used	3m / EMCO-3115, 1m / ComPower-AHA840				Performed by	Jeremy Luong				
Freq	Raw	Corrd'	Level	Det	Pol	Hght	Azt	Limit	Margin	Comment
MHz	dBuV/m	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
Transmitted Data at 2402 MHz										
1197.81	48.81	-33.08	15.73	Ave	V	157	358	54.00	-38.27	Spurious
1197.81	75.47	-33.08	42.39	Pk	V	157	358	74.00	-31.61	Spurious
1184.19	48.26	-33.30	14.96	Ave	H	148	274	54.00	-39.04	Spurious
1184.19	68.20	-33.30	34.90	Pk	H	148	274	74.00	-39.10	Spurious
4804.00	54.01	-22.75	31.26	Ave	H	294	14	54.00	-22.74	Harmonics
4804.00	65.55	-22.75	42.80	Pk	H	294	14	74.00	-31.20	Harmonics
21855.42	39.20	-1.15	38.05	Pk	H	131	16	74.00	-35.95	Spurious
21855.42	25.90	-1.15	24.75	Ave	H	131	16	54.00	-29.25	Spurious
Transmitted Data at 2442 MHz										
1213.66	76.51	-33.06	43.45	Pk	V	233	2	73.98	-30.53	Spurious
1213.66	49.31	-33.06	16.25	Ave	V	233	2	53.98	-37.73	Spurious
1713.82	62.29	-31.75	30.54	Pk	V	184	269	73.98	-43.44	Spurious
1713.82	48.27	-31.75	16.52	Ave	V	184	269	53.98	-37.46	Spurious
1200.00	71.91	-33.05	38.86	Pk	H	239	251	73.98	-35.12	Spurious
1200.00	53.90	-33.05	20.85	Ave	H	239	251	53.98	-33.13	Spurious
Transmitted Data at 2480 MHz										
1215.05	77.20	-33.07	44.13	Pk	V	147	194	73.98	-29.85	Spurious
1215.05	48.95	-33.07	15.88	Ave	V	147	194	53.98	-38.10	Spurious
Spec Margin = Level - Limit, Level = Raw + Cbl+ CF ± Uncertainty										
CF= Amp Gain + ANT Factor										
Combined Standard Uncertainty $u_c(y) = \pm 3.2\text{dB}$ Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence										
Notes: All emissions passed the spurious emission limit.										
(*) Non-restricted band emission										

SOP 1 Radiated Emissions

Tracking # US2236AF.001 Page 3 of 6

EUT Name	USB Wireless Audio Transmitter	Date	January 24, 2022
EUT Model	Stealth600X-MAX-TX	Temp / Hum in	23°C / 38% rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Transmitter on Vertical Position	Line AC / Freq	5.0 VDC
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz / 3 MHz
Dist/Ant Used	3m / JB3 & 6502	Date	Jeremy Luong

9 kHz to 1000 MHz Plot for Transmit Mode at 2480 MHz

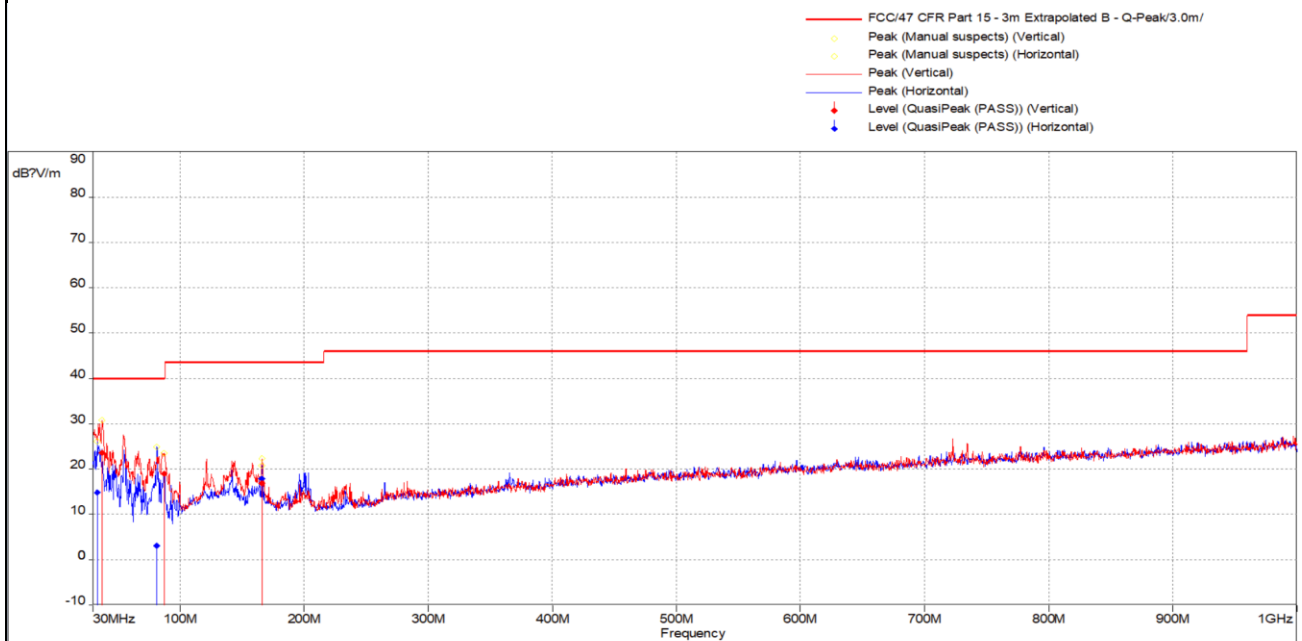
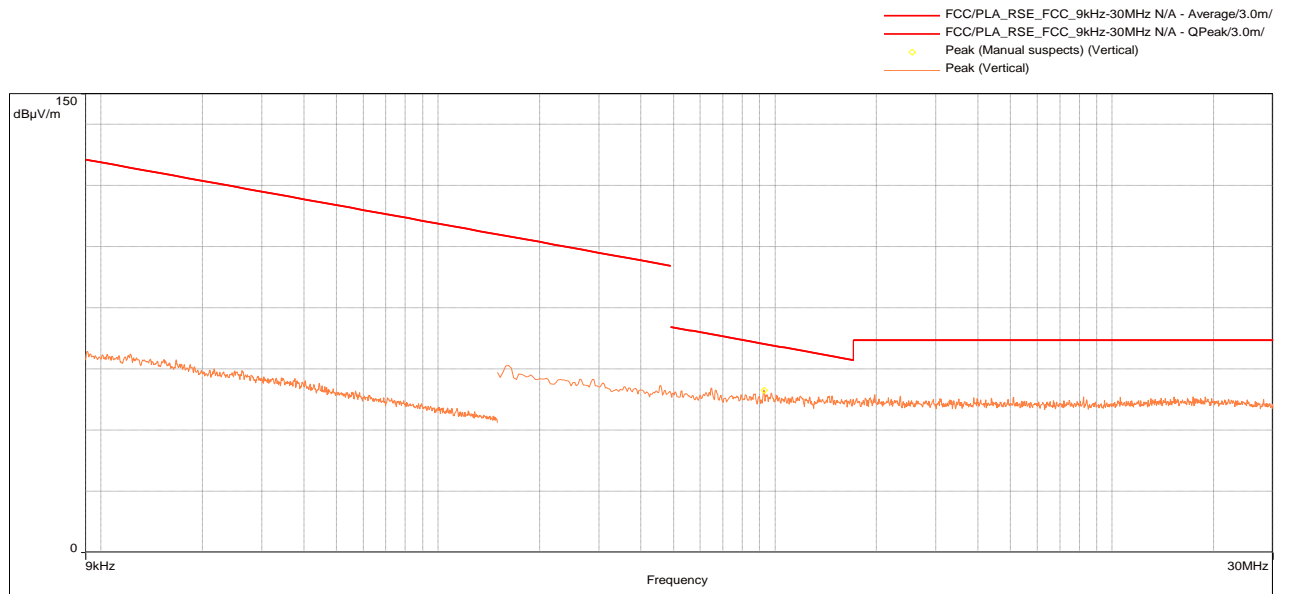


Notes: None.

SOP 1 Radiated Emissions

Tracking # US2236AF.001 Page 4 of 6

EUT Name	USB Wireless Audio Transmitter	Date	December 27, 2021
EUT Model	Stealth600X-MAX-TX	Temp / Hum in	23°C / 44% rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Transmitter on Vertical Position	Line AC / Freq	5.0 VDC
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz / 3 MHz
Dist/Ant Used	3m / EMCO-3115, 1m / ComPower-AHA840	Performed by	Jeremy Luong

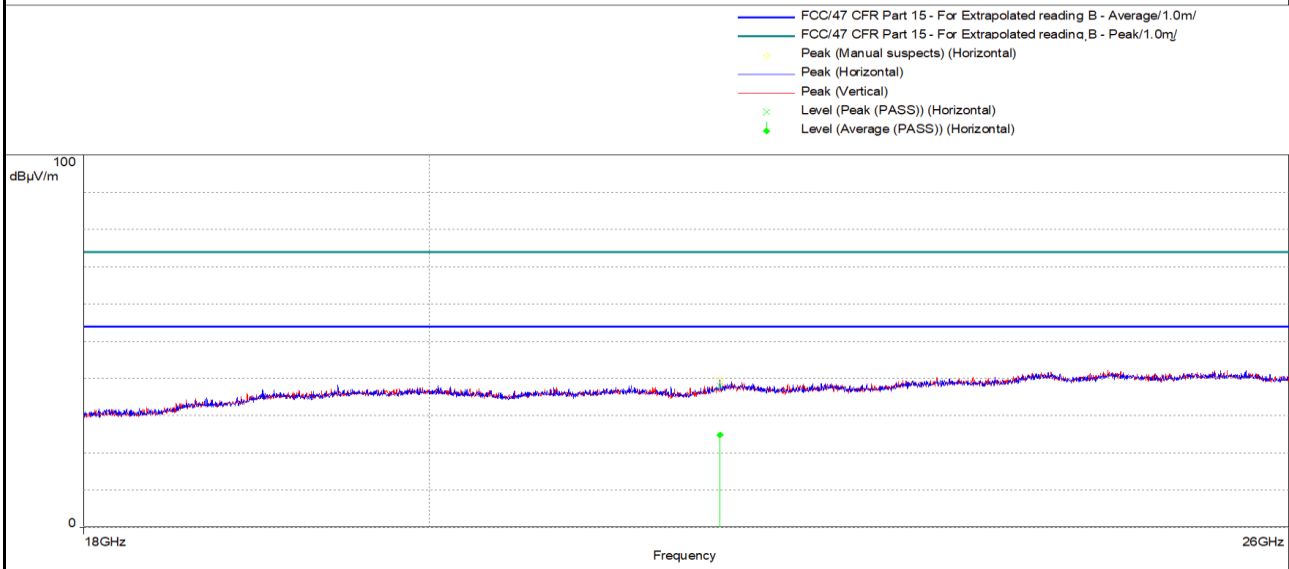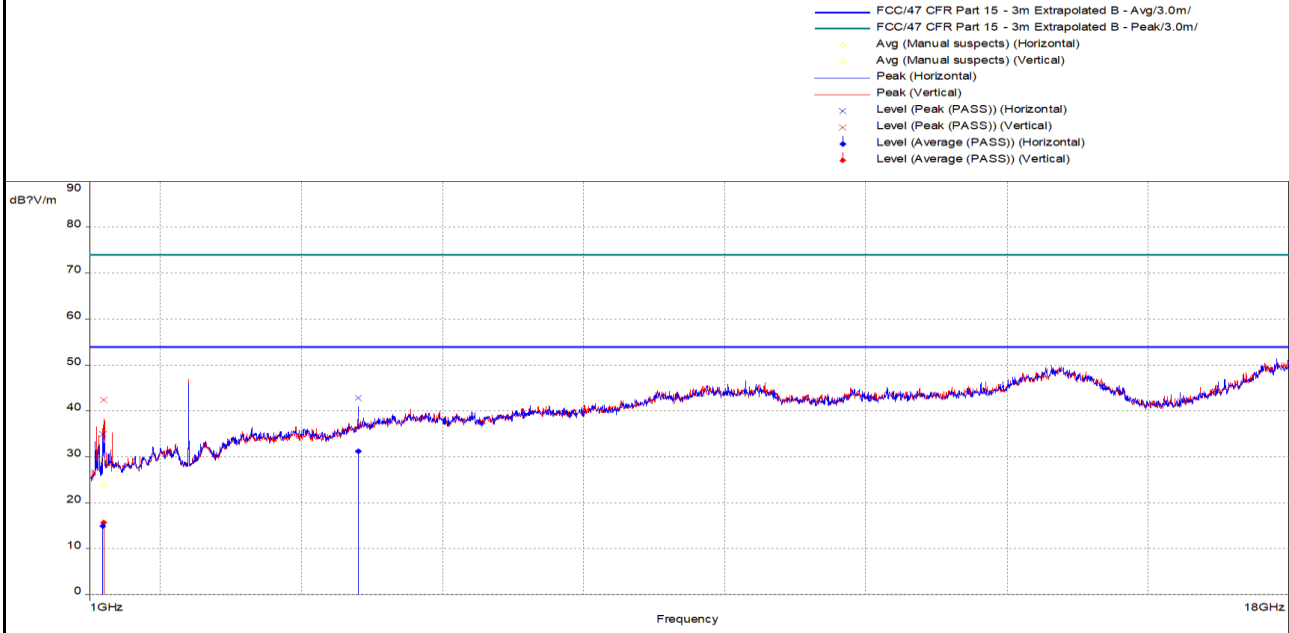Above 1 GHz Plots for Transmit Mode at 2402 MHz


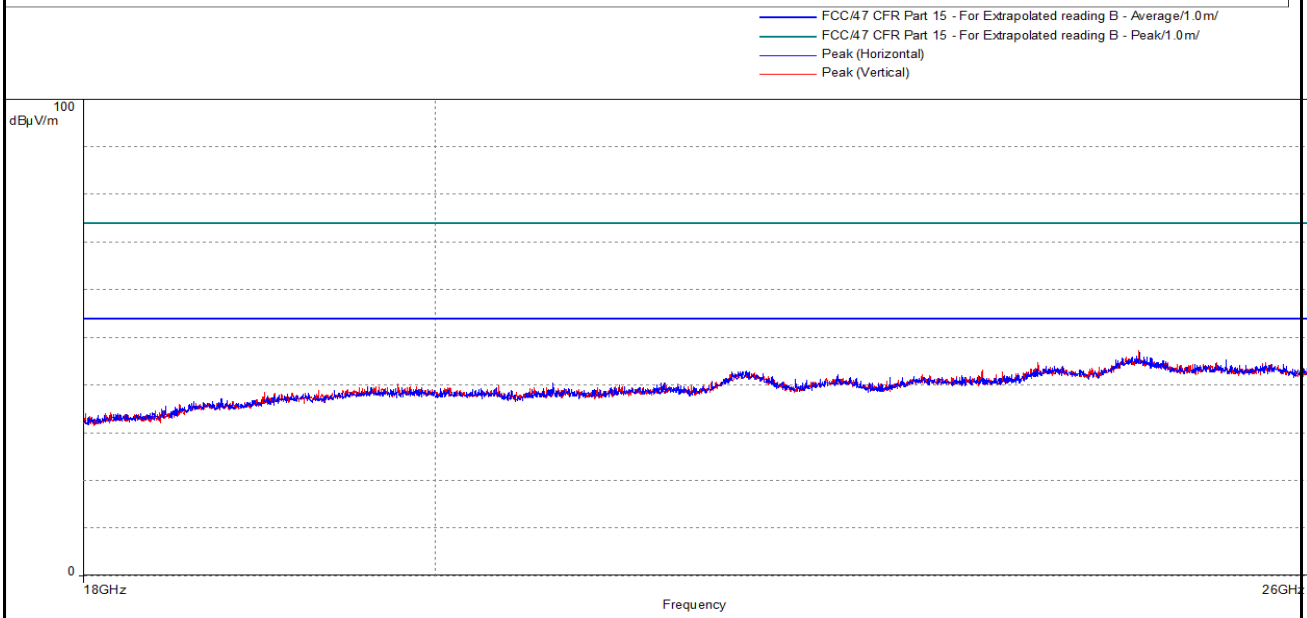
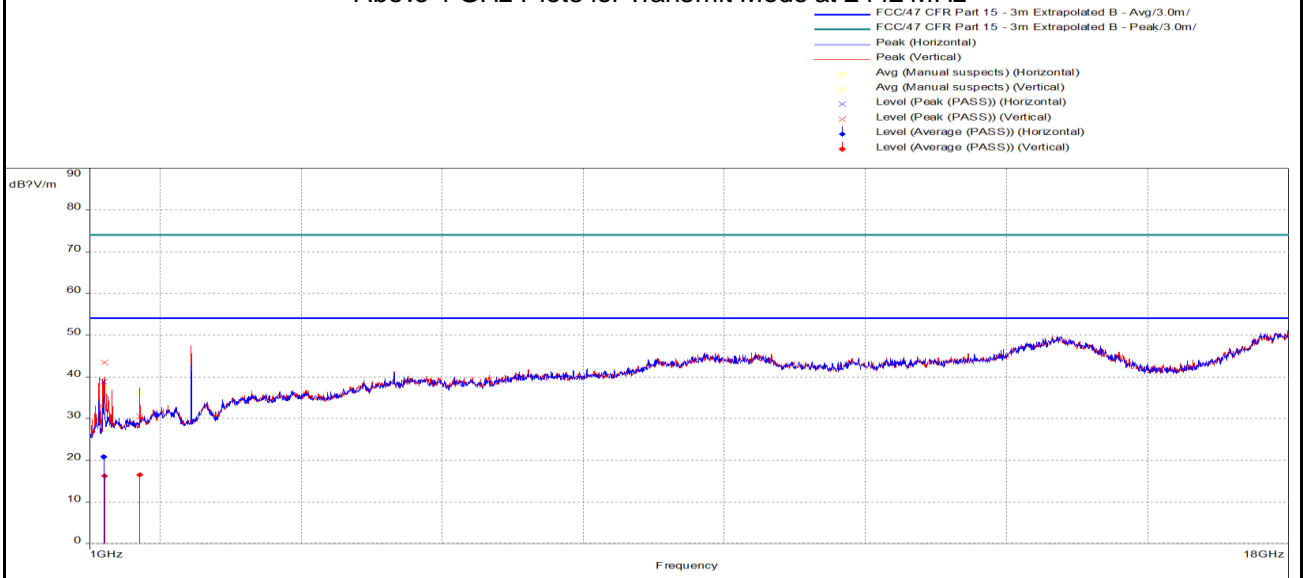
Notes: None

SOP 1 Radiated Emissions

Tracking # US2236AF.001 Page 5 of 6

EUT Name	USB Wireless Audio Transmitter	Date	December 27, 2021
EUT Model	Stealth600X-MAX-TX	Temp / Hum in	23°C / 44% rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Transmitter on Vertical Position	Line AC / Freq	5.0 VDC
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz / 3 MHz
Dist/Ant Used	3m / EMCO-3115, 1m / ComPower-AHA840	Performed by	Jeremy Luong

Above 1 GHz Plots for Transmit Mode at 2442 MHz





Notes: None.

SOP 1 Radiated Emissions

Tracking # US2236AF.001 Page 6 of 6

EUT Name	USB Wireless Audio Transmitter	Date	December 27, 2021
EUT Model	Stealth600X-MAX-TX	Temp / Hum in	23°C / 44% rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Transmitter on Vertical Position	Line AC / Freq	5.0 VDC
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz / 3 MHz
Dist/Ant Used	3m / EMCO-3115, 1m / ComPower-AHA840	Performed by	Jeremy Luong

Above 1 GHz Plots for Transmit Mode at 2480 MHz

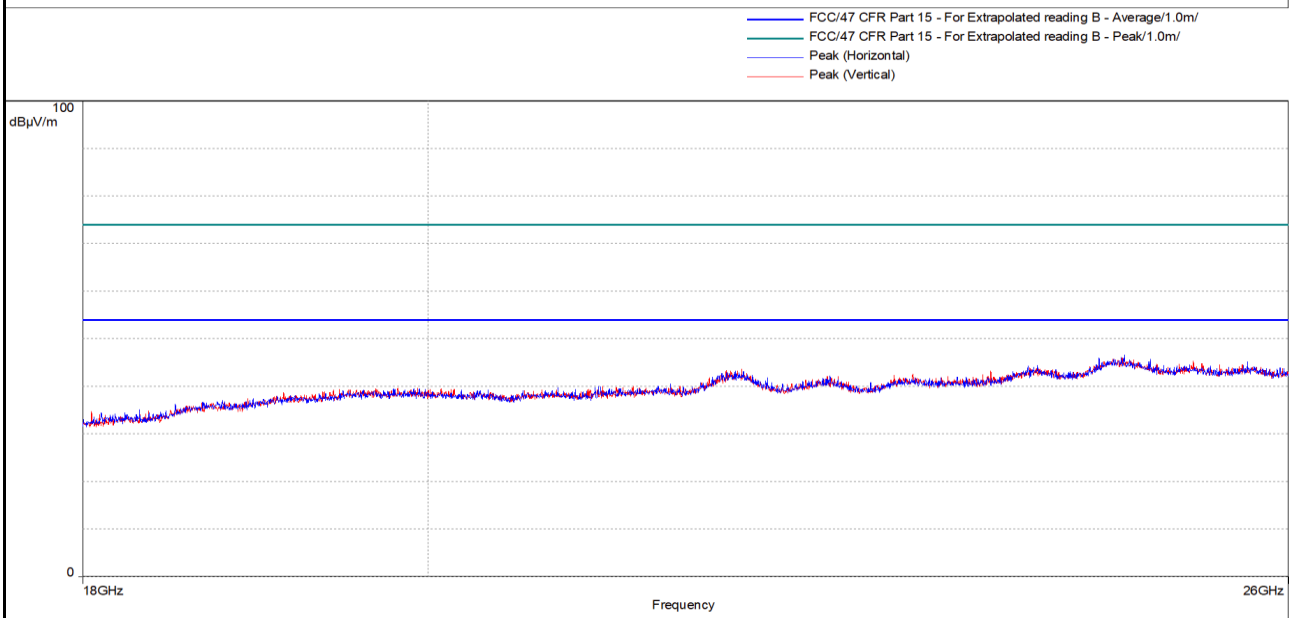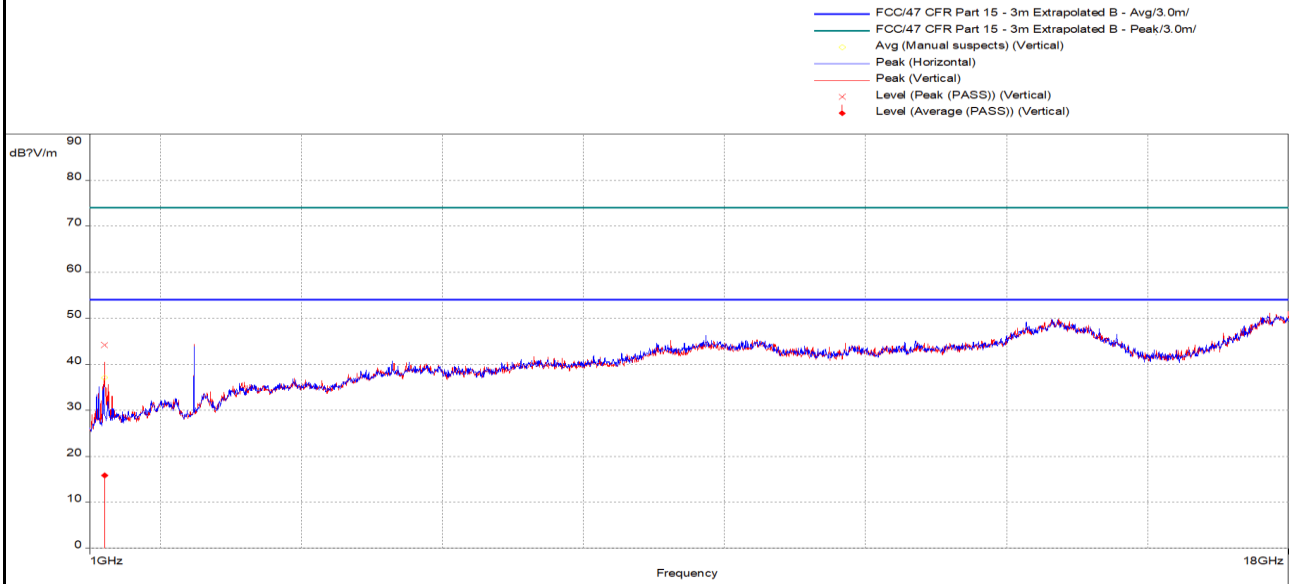

Notes: None.

4.5.4 Sample Calculation

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: FIM = Field Intensity Meter (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V} / \text{m}}{20}}$$

4.6 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.10: 2013. These test methods are listed under the laboratory’s A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT’s AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207: 2021 and RSS Gen: 2019 Sect. 8.8.

4.6.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50 μH / 50Ω LISNs.

Testing is performed in Lab 5. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

4.6.1.1 Deviations

There were no deviations from this test methodology.

4.6.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 7: AC Conducted Emissions – Test Results

Test Conditions: Conducted Measurement		Test Date: December 30, 2021
Antenna Type: Ceramic Chip		Power Level: See Test Plan
AC Power: Host DC Power Supply		Configuration: Tabletop
Ambient Temperature: 23° C		Relative Humidity: 41% RH
Configuration	Frequency Range	Test Result
Line 1 (Hot)	0.15 to 30 MHz	Pass
Line 2 (Neutral)	0.15 to 30 MHz	Pass

SOP 2 Conducted Emissions

Tracking # US2236AF.001 Page 1 of 2

EUT Name	USB Wireless Audio Transmitter	Date	December 30, 2021
EUT Model	Stealth600X-MAX-TX	Temp / Hum in	23° C / 41% rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Ceramic Chip	Line AC / Freq	110 Vac/60 Hz @ Host
Standard	CFR47 Part 15.207	RBW / VBW	9 kHz / 30 kHz
Lab/LISN	Lab #2 /Com-Power, Line 1	Performed by	Jeremy Luong

Frequency MHz	Raw dBuV	Corr'd dB	Level dBuV	Detector	Line Line	Limit dBuV	Margin dB	Result
0.155	39.85	9.89	49.74	QP	Live	65.78	-16.04	Pass
0.155	17.72	9.89	27.61	Ave	Live	55.78	-28.17	Pass
0.180	34.81	9.90	44.71	QP	Live	64.39	-19.68	Pass
0.180	14.95	9.90	24.85	Ave	Live	54.39	-29.55	Pass
0.187	35.90	9.91	45.81	QP	Live	64.21	-18.40	Pass
0.187	13.38	9.91	23.29	Ave	Live	54.21	-30.93	Pass
0.228	28.10	9.92	38.02	QP	Live	62.60	-24.57	Pass
0.228	9.46	9.92	19.38	Ave	Live	52.60	-33.21	Pass
0.259	24.70	9.93	34.63	QP	Live	61.50	-26.87	Pass
0.259	8.54	9.93	18.47	Ave	Live	51.50	-33.02	Pass
0.276	22.99	9.94	32.93	QP	Live	61.00	-28.06	Pass
0.276	6.76	9.94	16.70	Ave	Live	51.00	-34.29	Pass
0.365	16.79	9.95	26.74	QP	Live	58.59	-31.86	Pass
0.365	5.93	9.95	15.88	Ave	Live	48.59	-32.71	Pass
0.157	39.44	9.89	49.33	QP	Neutral	65.57	-16.24	Pass
0.157	17.44	9.89	27.33	Ave	Neutral	55.57	-28.24	Pass
0.171	38.03	9.90	47.93	QP	Neutral	64.96	-17.03	Pass
0.171	16.51	9.90	26.41	Ave	Neutral	54.96	-28.55	Pass
0.200	32.30	9.92	42.22	QP	Neutral	63.53	-21.31	Pass
0.200	13.06	9.92	22.98	Ave	Neutral	53.53	-30.55	Pass
0.254	25.24	9.93	35.17	QP	Neutral	61.63	-26.45	Pass
0.254	6.88	9.93	16.81	Ave	Neutral	51.63	-34.82	Pass
0.292	21.75	9.94	31.69	QP	Neutral	60.41	-28.72	Pass
0.292	4.48	9.94	14.42	Ave	Neutral	50.41	-35.99	Pass
1.596	15.50	9.99	25.49	QP	Neutral	56.00	-30.51	Pass
1.596	8.28	9.99	18.27	Ave	Neutral	46.00	-27.73	Pass

Spec Margin = QP/Ave. - Limit, ± Uncertainty

 Combined Standard Uncertainty $u_c(y) = \pm 2.18$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence


Notes: EUT was setup as table top equipment and transmitted at 2480 MHz

SOP 2 Conducted Emissions

Tracking # US2236AF.001 Page 2 of 2

EUT Name	USB Wireless Audio Transmitter	Date	December 30, 2021
EUT Model	Stealth600X-MAX-TX	Temp / Hum in	23° C / 41% rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Chip Antenna	Line AC	110 Vac/60 Hz @ Host
Standard	CFR47 Part 15.207	RBW / VBW	9 kHz / 30 kHz
Lab/LISN	Lab #2 /Com-Power, Line 1	Performed by	Jeremy Luong

150 kHz to 30 MHz Plot for Live and Neutral

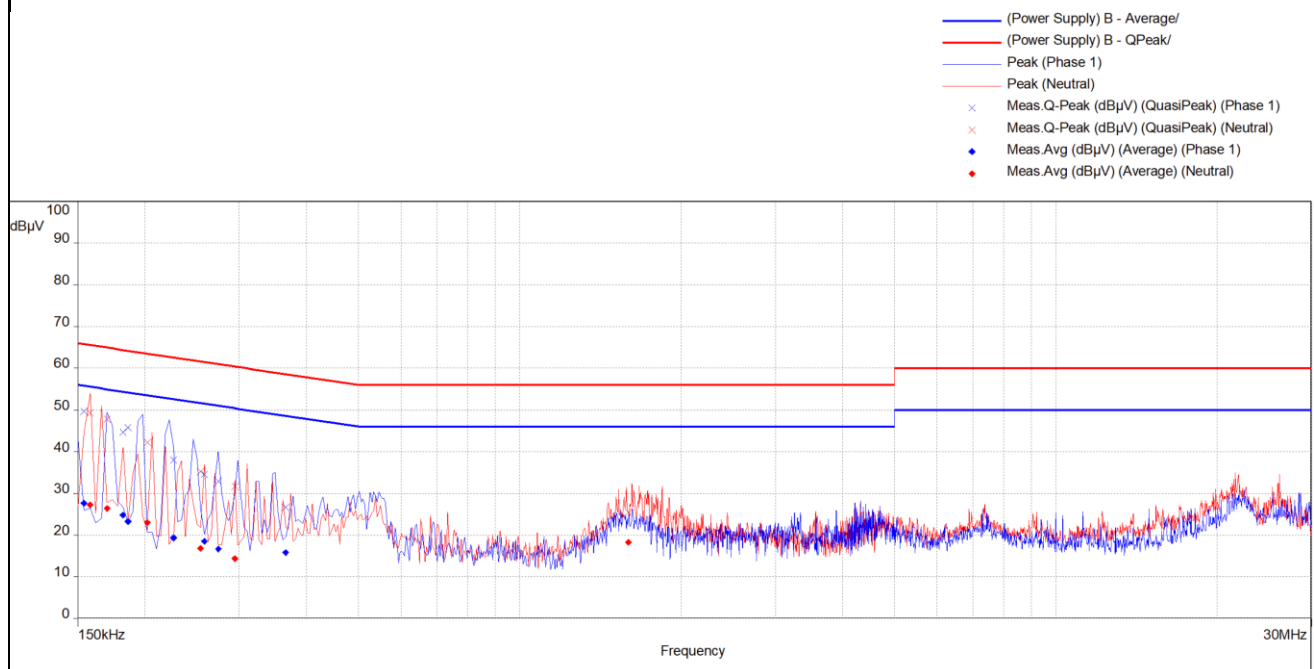

Notes: Meets FCC Class B limit.

5 Test Equipment List

5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yyyy	Next Cal mm/dd/yyyy
Loop Antenna	EMCO	6502	62531	08/31/2021	08/31/2022
Bilog Antenna	Sunol Sciences	JB3	A061907	03/09/2021	03/09/2022
Horn Ant. (1-18GHz)	Sunol Sciences	3115	9602-4676	03/04/2021	03/04/2023
Horn Ant. (18-40GHz)	Com-Power	AHA-840	105005	09/01/2021	09/01/2023
EMI Receiver	Rohde & Schwarz	ESW44	1328.4100K44- 101853-VQ	02/24/2021	02/24/2022
EMI Receiver	Agilent	N9038A	MY52260210	02/10/2021	02/10/2022
Spectrum Analyzer	Agilent	N9030A	MY52350885	02/10/2021	02/10/2022
EMI Receiver	Rohde & Schwarz	ESIB40	100180	02/26/2021	02/26/2022
Preamplifier	Sonoma Inst.	310	185516	02/11/2021	02/21/2022
Preamplifier	Miteq	TTA1800-30-HG	184252	02/12/2021	02/12/2022
RF Power Meter	Agilent	E4418B	MY45103895	02/09/2021	02/09/2022
Power Sensor	HP	8482A	1925A04647	02/09/2021	02/09/2022
Thermometer	Extech Instruments	SD700	A095319	07/26/2021	07/26/2022
Thermo Chamber	Espec	BTZ-133	0613436	VBU	VBU
DC Power Supply	Agilent	E3634A	MY400004331	VBU	VBU
Digital Multimeter	Fluke	177	92780314	02/13/2021	02/13/2022
Signal Generator	Anritsu	MG3694A	042803	06/10/2021	06/10/2022
Notch Filter	Micro-Tronics	BRM50702	37	VBU	VBU
Transient Limiter	HP	11947A	3107A038612	02/09/2021	02/09/2022
LISN	Com-Power	LI-220C	2007001	07/29/2021	07/29/2022

* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.

6 EMC Test Plan

6.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

6.2 Customer

Table 8: Customer Information

Company Name	Voyetra Turtle Beach, Inc.
Address	44 South Broadway, 4th Floor
City, State, Zip	White Plains NY 10601 USA
Country	USA

Table 9: Technical Contact Information

Name	Tim Blaney
E-mail	tim@commcepts.net
Phone	(530) 277-3482

6.3 Equipment Under Test (EUT)

Table 10: EUT Specifications

EUT Specification	
Package Dimensions	51.2 mm (2.0") x 15.3 mm (0.6") x 7.9 mm (0.3")
Power Input	USB Transmitter Input Voltage: 5.0 Vdc (Host Computer)
Environment	Indoor
Operating Temperature Range:	0 to 50 degrees C
Multiple Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Product Marketing Name (PMN)	Stealth600X-USB-TX
Hardware Version Identification Number (HVIN)	600X-USB-TX
Firmware Version Identification Number (FVIN)	1.0.0.2
Operating Mode	Airoha Tool Kit – V2.9.0 (AB1565/68 Lab Test Tool)
FCC ID	XGB-2372-TX
IC	3879A-2372TX
Transmitter Frequency Band	2402 MHz to 2480 MHz
Max. Measured Power Output	+3.97 dBm
Power Setting @ Operating Channel	GC = 46
Antenna Type	Ceramic Chip.
Antenna Gain	-1.3 dBi
Modulation Type	<input type="checkbox"/> AM <input type="checkbox"/> FM <input type="checkbox"/> DSSS <input type="checkbox"/> OFDM <input checked="" type="checkbox"/> Other describe: GFSK, Pi/4-DQPSK, 8PSK
Date Rates	1 Mbps and 2 Mbps
TX/RX Chain (s)	1
Directional Gain Type	<input checked="" type="checkbox"/> Uncorrelated <input checked="" type="checkbox"/> No Beam-Forming <input type="checkbox"/> Other describe:
Type of Equipment	<input type="checkbox"/> Table Top <input type="checkbox"/> Wall-mount <input type="checkbox"/> Floor standing cabinet <input checked="" type="checkbox"/> Other describe: Table Top Device's accessory.
<p>*All EUT specifications are provided by the manufacturer or the TUV direct customer.</p> <p><i>Note: Information supplied by the customer and can affect the validity of results.</i></p>	

Table 11: Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
USB	Terminated	<input checked="" type="checkbox"/> Yes	<input checked="" type="checkbox"/> Metric:0.6 m	<input checked="" type="checkbox"/> M

Table 12: Supported Equipment

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Lenovo	T430	PB-8HBRR	Set test mode

Table 13: Description of Sample used for Testing

Device	Serial Number	Configuration	Used For
Stealth600X-USB-TX	PP #2	Radiated Sample	Radiated Emissions.
Stealth600X-USB-TX	PP #1	Conducted Sample	Output Power, Occupied Bandwidth, Conducted Spurious Emissions, Peak Power Spectral Density
Note: None			

Table 14: Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Description
Stealth600X-USB-TX	Ceramic Chip	Transmit & Receive	Stealth600X-USB-TX positioned vertically, worst case.
Note: This is the final setup configuration used for testing.			

Table 15: Final Test Mode for 2402 to 2480 MHz Band

Test	Stealth600X-USB-TX
Occupied Bandwidth	2402, 2442, 2480 MHz @ 1 and 2 Mbps
Output Power	2402, 2442, 2480 MHz @ 1 and 2 Mbps
Peak Power Spectral Density	2402, 2442, 2480 MHz @ 1 and 2 Mbps
Out-of-Band (-30 dB _r)	2402, 2442, 2480 MHz @ 1 and 2 Mbps
Band-Edge (Radiated)	2402, 2480 MHz @ 2 Mbps
Transmitted Spurious Emission	2402, 2442, 2480 MHz @ 1Mbps
AC Conducted Emission	2402 MHz @ 1Mbps
<p>Note: 1. EUT transmits 59.33% duty cycle at 1Mbps as the highest operating duty cycle. 2. AC Conducted emissions and spurious emissions were performed on the Stealth600X-MAX-TX sample. The RF circuitry is 100% identical between the Stealth600X-MAX-TX and the Stealth600X-USB-TX models. The only difference is in the digital circuitry and FW that allows connection to a host platform and the external color of the plastics. The Stealth600X-USB-TX has only one connection mode, USB, while the Stealth600X-MAX-TX offers two switch selectable modes, USB or Xbox, with a mechanical switch located on the side of the device.</p>	

6.4 Test Specifications

Table 16: Test Specifications

Emissions and Immunity	
Rules & Regulations / Standards	Requirement
CFR 47 Part 15.247: 2021	All
RSS 247 Issue 2, 2017	All

END OF REPORT