

FRONT

QUICK START GUIDE
GUIDE DE DÉMARRAGE RAPIDE



STEALTH 600 GEN 2 USB

IMPORTANT READ BEFORE USING
IMPORTANT LIRE AVANT UTILISATION

Any questions? Des questions?
turtlebeach.com/support

IMPORTANT PLEASE MAKE SURE YOUR HEADSET IS UPDATED WITH THE LATEST FIRMWARE.


IMPORTANT VEUILLEZ VOUS ASSURER QUE VOTRE CASQUE DISPOSE DE LA DERNIÈRE VERSION DU MICROLOGICIEL.

Connect to the Turtle Beach Audio Hub for Windows or Mac® to update firmware.

Connectez-vous au Turtle Beach Audio Hub pour Windows ou Mac® afin de mettre à jour le micrologiciel.

turtlebeach.com/audiuhub


CONTENTS
CONTENU DE LA BOÎTE

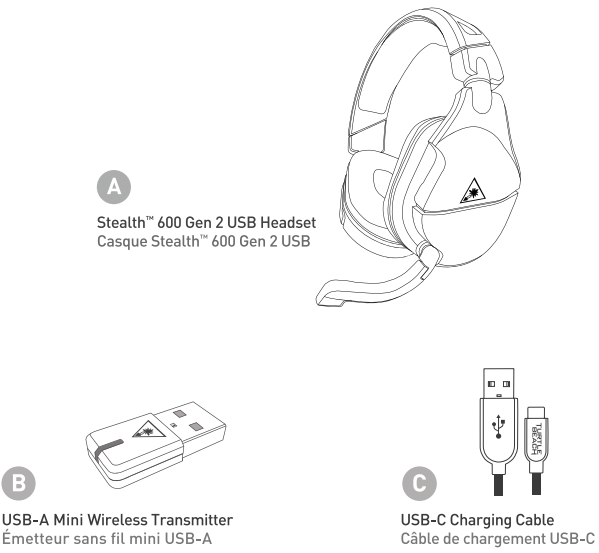

CHARGING
CHARGEMENT

The Stealth™ 600 Gen 2 USB gives you 24+ hours of rechargeable battery life.


Le Stealth™ 600 Gen 2 USB vous offre 24+ heures d'autonomie de batterie rechargeable.

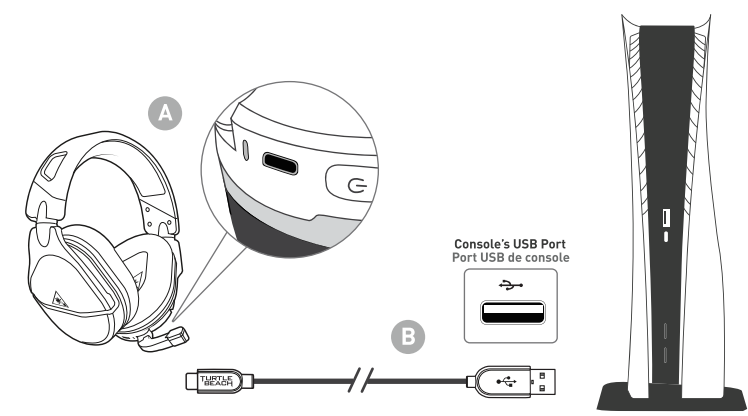

Headset Storage: Always charge your headset before storing it for any extended period of time (longer than 3 months).


Rangement du casque: Chargez toujours votre casque avant de ranger pour une durée prolongée (plus de 3 mois).

SETUP
CONFIGURATION

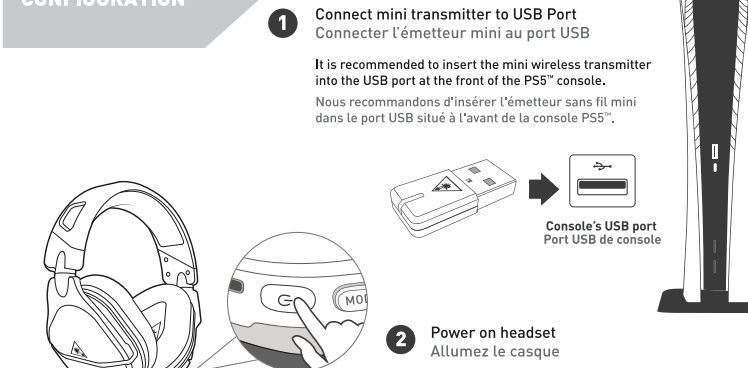


1 Connect mini transmitter to USB Port Connector (l'émetteur mini au port USB)

It is recommended to insert the mini wireless transmitter into the USB port at the front of the PC's console.

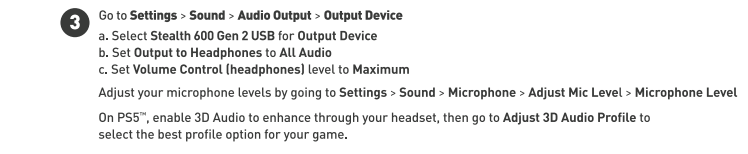

2 Power on headset Allumez le casque




3 On Settings - Sound - Audio Output - Output Device

FR Aller dans Options > Son > Périphériques audio > Périphériques de sortie


SETUP FOR PC & SWITCH™
CONFIGURATION POUR PC ET SWITCH™



1 Put the transmitter into your platform's USB-A port.

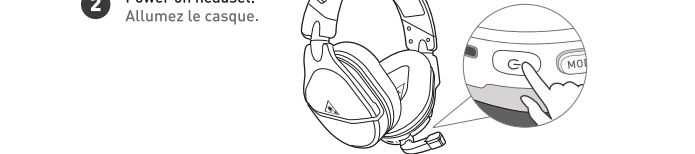

2 Power on headset. Allumez le casque.

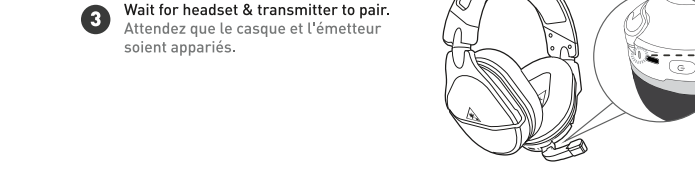

3 Wait for headset & transmitter to pair.

ES 1. Pon el transmisor en el puerto USB-A de tu plataforma.

2. Enciende los auriculares.

3. Espera a que se emparejen los auriculares y el transmisor.

PT 1. Coloque o transmissor na porta USB-A de sua plataforma.

2. Ligue os auscultadores.

3. Aguarde pelo emparelhamento dos auscultadores e do transmissor.

IT 1. Collega il trasmettitore alla tua porta "USB-A".

2. Accendi le cuffie.

3. Attendi che le cuffie e il trasmettitore si associno.

NL 1. Sluit de zender aan op de USB-A-poort van je platform.

2. Zet de headset aan.

3. Wacht tot dat de headset en zender zijn gekoppeld.

DE 1. Verbinde den Sender mit dem USB-A Anschluss deiner Plattform.

2. Schalte das Headset ein.

3. Warte, bis Headset und Sender gekoppelt sind.

DK 1. Indst senderen i din platform's USB-A-port.

2. Tænd for headsettet.


3. Vent, til der er oprettet forbindelse mellem headset og sender.

SE 1. Anslut sändaren i din platform's USB-A-port.

2. Sätt på headsetet.

3. Vänta på att headsetet och sändaren parkopplas.

HEADSET CONTROLS
COMMANDES SUR CASQUE

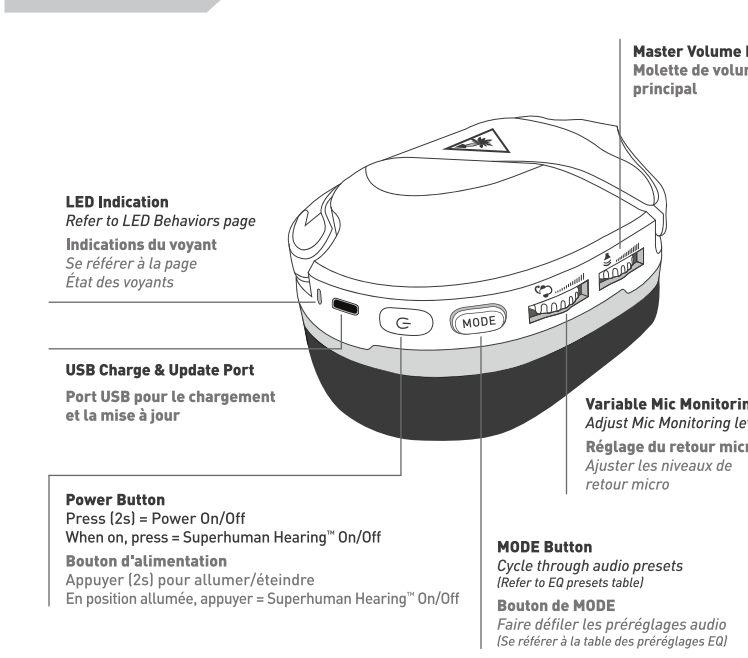

LED Indication: Refer to LED Behaviors page

Variable Mic Monitoring: Adjusts the return micro

SUPERHUMAN HEARING™


Use Superhuman Hearing™ Mode to pinpoint quiet audio cues like enemy footsteps and weapon reloads.



Microphone Mute: Flip up mic to mute.


EQ PRESETS | PRÉSETS D'ÉGALISATION table with Signature Sound, Bass Boost, Bass + Treble Boost, Vocal Boost

RE-PAIRING
NOUVEL APPARIAGE

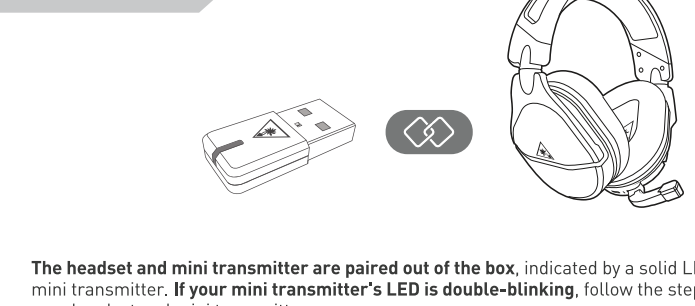

The headset and mini transmitter are paired out of the box...

1 Connect your mini transmitter into an available USB port on your console.

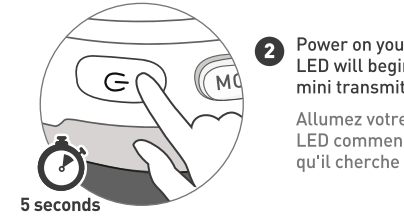

2 Power on your Stealth™ 600 Gen 2 USB headset and the LED will begin to double-blink blue...

3 Within 10 seconds, the LED indication on the headset and the mini transmitter should turn solid blue...

If your mini transmitter cannot pair after 30 seconds...

LED BEHAVIORS
ÉTATS DES VOYANTS

LED Behaviors table with Solid Blue, Breathing Blue, Double-Blink Blue, Solid Red, Breathing Red, Mini Transmitter LED Indication

Regulatory Compliance Statements for Stealth 600P Gen 2 USB

Legal restrictions on Radio Usage: Caution due to the fact that the frequencies used by wireless devices may not yet be harmonized in all countries...

CE Marking

Ca dispositif est conforme aux normes NMB003 et CNR-247 de l'industrie Canadienne. 2. Le fabricant ne se soumet pas à l'obligation de marquage CE...

Warning

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case, the user may be required to take appropriate measures.

426-236-005-005 RB

426-236-005-005 RB

426-236-005-005 RB

426-236-005-005 RB

PKG DESIGN DEPT

Designer: Brent Oliver
Product: Stealth 600P Gen 2 USB
Project: QSG
Date: 12 / 03 / 21
Scale: 100%

COMMENTS

Please do not print this layer!!!
100% actual size
Refer to video on how to fold

SPECIFICATIONS

Printing information

BLK + WHIT
QSG Paper Weight (80g) Foldout

Folding Line

CHANGES

- Orig Arena #: 426-236-005-005
New Arena #: 426-236-005-005 R01
Date / Initiator: 12/03/21 / CREATIVE
1. DVT.
12-08-21 - Implemented Ziflow changes.
New Arena #: 426-236-005-005 RA
Date / Initiator: 01/05/21 / CREATIVE
1. PVT.
New Arena #: DOES NOT CHANGE
Date / Initiator: 01/25/21 / CREATIVE
1. MP.
New Arena #: DOES NOT CHANGE
Date / Initiator: 02/18/22 / CREATIVE
1. Made changes via Ziflow.
New Arena #: 426-236-005-005 RB
Date / Initiator: 03/04/22 / CREATIVE
1. Header triangles changed to trapezoids.
2. Added PC+Switch instructions.
3. Prepared for release.

BACK