

Prüfbericht-Nr.: <i>Test report no.:</i>	CN21OHEL(P15C-BLE) 001	Auftrags-Nr.: <i>Order no.:</i>	238518324	Seite 1 von 27 Page 1 of 27	
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2021-08-05		
Auftraggeber: <i>Client:</i>	Voyetra Turtle Beach, Inc. 44 South Broadway, 4th Floor, White Plains, New York 10601, U.S.A.				
Prüfgegenstand: <i>Test item:</i>	Wireless Ear Buds				
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	Scout Air, SYN Buds Air				
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C Test report (BLE)				
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247				
Wareneingangsdatum: <i>Date of sample receipt:</i>	2021-08-02				
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003102500-003 A003102500-001				
Prüfzeitraum: <i>Testing period:</i>	2021-08-26 - 2021-09-06				
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Taipei Testing Site				
Prüflaboratorium: <i>Testing laboratory:</i>	Taipei Testing Laboratories				
Prüfergebnis*: <i>Test result*:</i>	Pass				
überprüft von: <i>compiled by:</i>	genehmigt von: <i>authorized by:</i>				
Datum: <i>Date:</i> 2021-11-05	Ethan Hsiao	Ausstellungsdatum: <i>Issue date:</i> 2021-11-05	Brenda Chen		
Stellung / Position:	Assistant Project Engineer	Stellung / Position:	Senior Project Manager		
Sonstiges / Other:					
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar	5 = mangelhaft N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable	5 = poor N/T = not tested
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>					

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(3)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 TEST SETUP DIAGRAM	14
5. TEST RESULTS	15
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1 <i>Antenna Requirement</i>	<i>15</i>
5.1.2 <i>Peak Output Power</i>	<i>16</i>
5.1.3 <i>6 dB Bandwidth and 99% Occupied Bandwidth.....</i>	<i>18</i>
5.1.4 <i>Power Spectral Density.....</i>	<i>19</i>
5.1.5 <i>Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth.....</i>	<i>20</i>
5.1.6 <i>Radiated Spurious Emissions and Band Edges</i>	<i>21</i>
5.2 MAINS EMISSION	26
5.2.1 <i>Mains Conducted Emission.....</i>	<i>26</i>

Prüfbericht - Nr.: CN21OHEL(P15C-BLE) 001
Test Report No.

Seite 4 von 27
Page 4 of 27

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN21OHEL(P15C-BLE) 001
Test Report No.

Seite 5 von 27
Page 5 of 27

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN21OHEL(P15C-BLE) 001	Original Release	2021-11-05

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Wireless Ear Buds. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Wireless Ear Buds
Type Identification	Scout Air, SYN Buds Air
FCC ID	XGB-5012L

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	2 MHz
Channel Number	40
Data Rate	1Mbps, 2Mbps
Operation Voltage	3.7Vdc (Battery) 5Vdc (USB)
Modulation	GFSK
Maximum Output Power (mW)	8.39
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

Note:

- All models are listed as below.

Model Type	Type Identification	Difference
Main	Scout Air	All models are electrically identical, different model names are for marketing purpose.
Series	SYN Buds Air	

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	0x00
2440	0x00
2480	0x00

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	AWRDLABV2.exe
---------------	---------------

The samples were used as follows:

A003102500-003 for radiation

A003102500-001 for conduction

Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To			Mains Conducted Emission	Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz		
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on Z-plane.
2. "-" means no effect.

Antenna Port Conducted Measurement

Pre-Scan full test was applied on all test modes, but only worst case was shown.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1
-	2402 to 2480	2402, 2440, 2480	2

Radiated Spurious Emissions (Above 1 GHz)

Pre-Scan full test was applied on all test modes, but only worst case was shown.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1
-	2402 to 2480	2402, 2440, 2480	2

Radiated Spurious Emissions (Below 1 GHz)

Pre-Scan full test was applied on all test modes, but only worst case was shown.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2440	2

Mains Conducted Emission

Pre-Scan full test was applied on all test modes, but only worst case was shown.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2440	2

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	23.1-24.7 °C	55-60 %	Stanislas Charles
Radiated Spurious Emissions above 1 GHz	20.2-22.3 °C	55-60 %	Hunter Wang
Radiated Spurious Emissions below 1 GHz	20.2-22.3 °C	55-60 %	Hunter Wang
Mains Conducted Emission	21.9 °C	59 %	Simon Tsai

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


No.	Product	Brand	Model	Description
-	USB C to USB A Adaptor	ROCCAT	SYN Buds Air	-
-	Charging Stand	ROCCAT	SYN Buds Air	-

Support Unit


No.	Description	Brand	Model	S/N	Remark
Radiated Test					
A	Uart	Turtle Beach	Turtle Beach-001	-	-
1	Notebook	Lenovo	TP00094A	PF-1GT015	-
2	Sibnal Cable	TUV	TUV-030	-	300 cm shielded cable w/o core
Conducted Test					
-	Notebook	HP	TPN-C139	CND93662WT	-
Mains Conducted Test					
A	Charger	ROCCAT	Turtle Beach-003	-	-
B	Type C to Type A Cable	Turtle Beach	Turtle Beach-002	-	36 cm shielded cable w/o core
1	Adapter	Sony	EP800	CAA-0002016-TW B	-

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

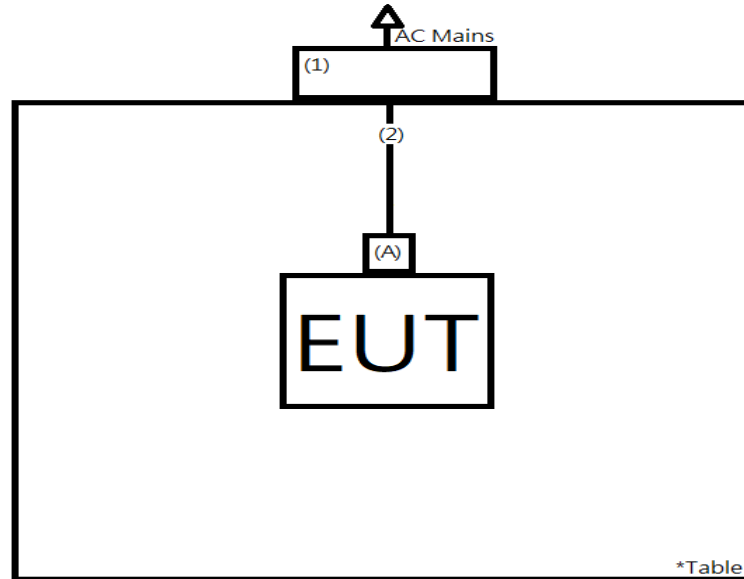

<Mains Conducted Emission mode>

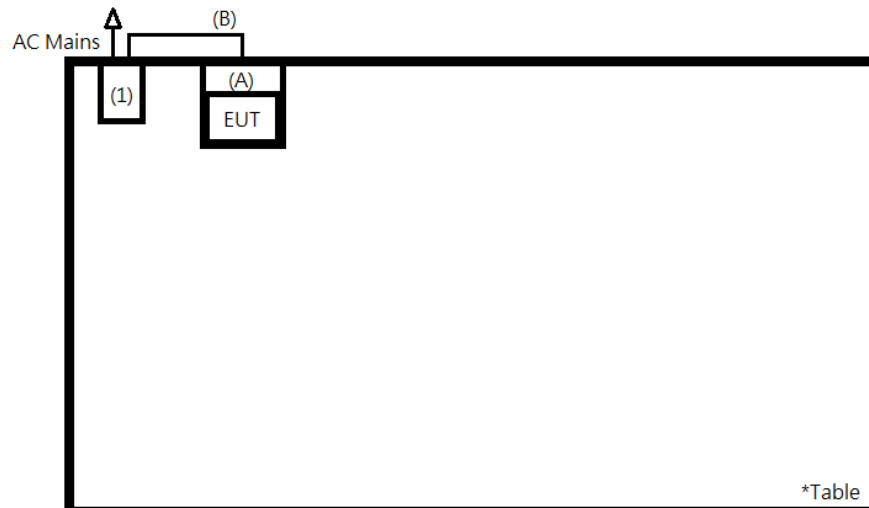

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the EUT has an antenna with a directional gain of -1 dBi. The antenna is a FPC antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision. Refer to EUT photo for details.

5.1.2 Peak Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2021/3/24	2022/3/23	2021/10/15	2021/10/15
Power Sensor	Anritsu	MA2411B	1725269	2021/3/24	2022/3/23	2021/10/15	2021/10/15

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result
Peak Output Power
<1Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	9.22	8.36	30
Middle Channel	2440	8.93	7.82	30
High Channel	2480	8.51	7.10	30

<2Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	9.24	8.39	30
Middle Channel	2440	8.96	7.87	30
High Channel	2480	8.54	7.14	30

Average Power
<1Mbps>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	9.20	8.32
Middle Channel	2440	8.91	7.78
High Channel	2480	8.48	7.05

<2Mbps>


Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	9.22	8.36
Middle Channel	2440	8.93	7.82
High Channel	2480	8.52	7.11

5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6 dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/10/18	2021/10/18

Test Procedure

- a. Set resolution bandwidth (RBW) = 100 kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- f. For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results


Please refer to Appendix A.

5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/10/18	2021/10/18

Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.


5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/10/18	2021/10/18

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

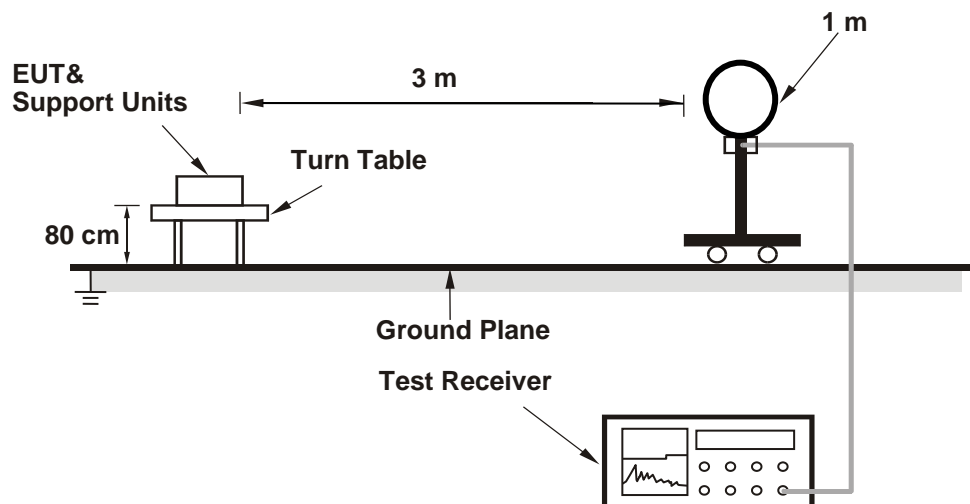

<Radiated Emissions 30 MHz to 1 GHz>

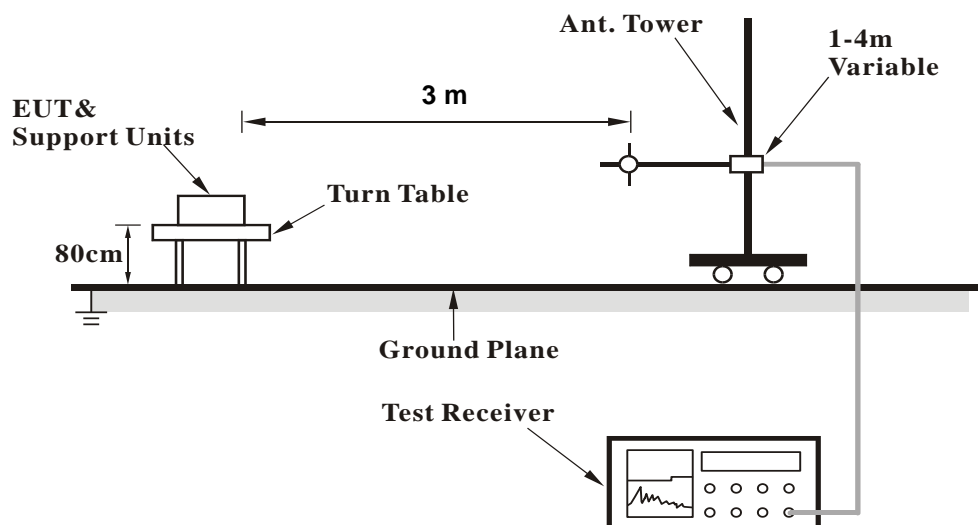

<Radiated Emissions above 1 GHz>

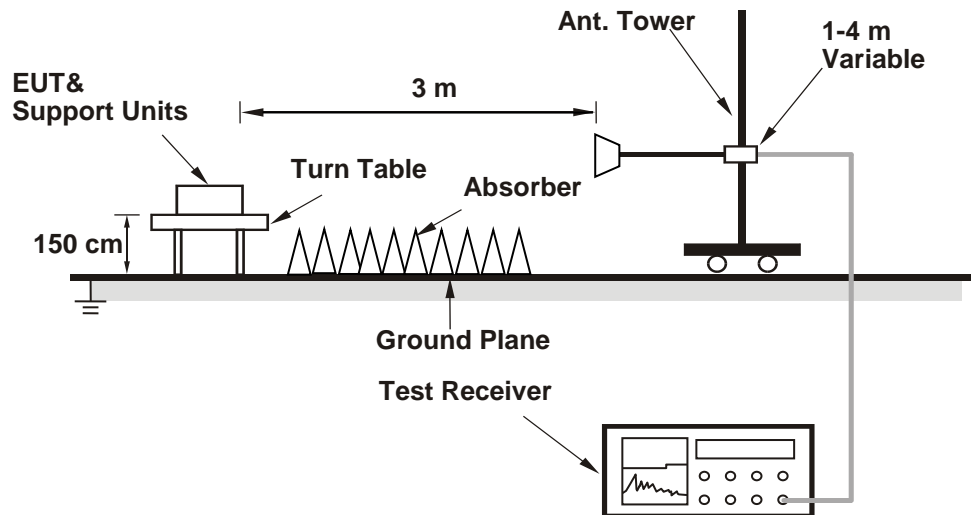

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101509	2021/3/24	2022/3/23
Receiver	R&S	ESR7	102108	2021/3/17	2022/3/16
Bilog Antenna	SCHWARZBECK	VULB-9168	00950	2021/1/25	2022/1/24
Horn Antenna	ETS-Lindgren	3117	00218929	2020/11/6	2021/11/5
LF-AMP	Agilent	8447D	2727A05146	2021/2/1	2022/1/31
HF-AMP + AC source	EMCI	EMC051845SE	980635	2021/2/1	2022/1/31
HF-AMP + AC source	EMCI	EMC184045SE	980656	2021/2/9	2022/2/8
Horn Antenna	SCHWARZBECK	BBHA 9170	00890	2021/4/14	2022/4/13
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800057/4EA	2021/4/14	2022/4/13
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	802244/4	2021/4/14	2022/4/13
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37203/4	2021/4/14	2022/4/13
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800897/2EA	2021/3/11	2022/3/10
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800902/2EA	2021/3/11	2022/3/10
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801026/2EA	2021/3/11	2022/3/10
Loop Antenna	SCHWARZBECK	FMZB1519B	00215	2020/9/17	2021/9/15

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: **CN21OHEL(P15C-BLE) 001**
Test Report No.

Seite 25 von 27
Page 25 of 27

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.


5.2 Mains Emission

5.2.1 Mains Conducted Emission

Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

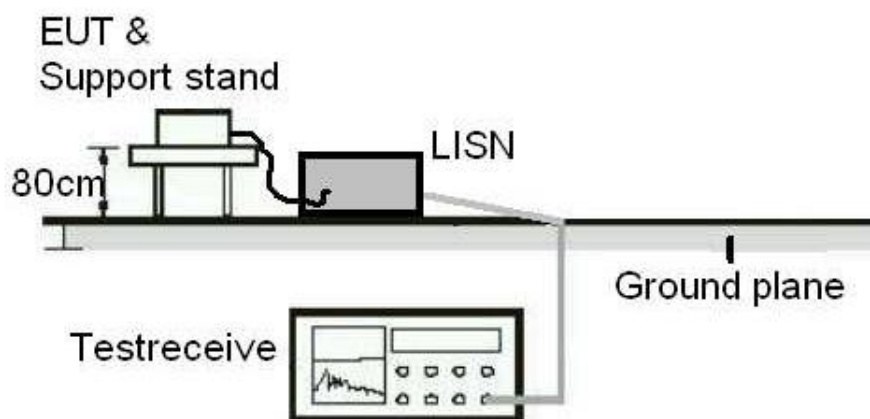Test Setup

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
TWO-LINE V-NETWORK	R&S	ENV216	1816064	2020/9/10	2021/9/9
EMI Test Receiver	R&S	ESCI	1816063	2020/11/17	2021/11/16
RF Cable	N/A	N/A	EMC-003	2020/11/15	2021/11/14

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results


Please refer to Appendix B.

Appendix A: Test Results of Conducted Test

Test Result of 6 dB Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	662.34	> 500	Pass
Middle Channel	2440	665.33	> 500	Pass
High Channel	2480	662.34	> 500	Pass

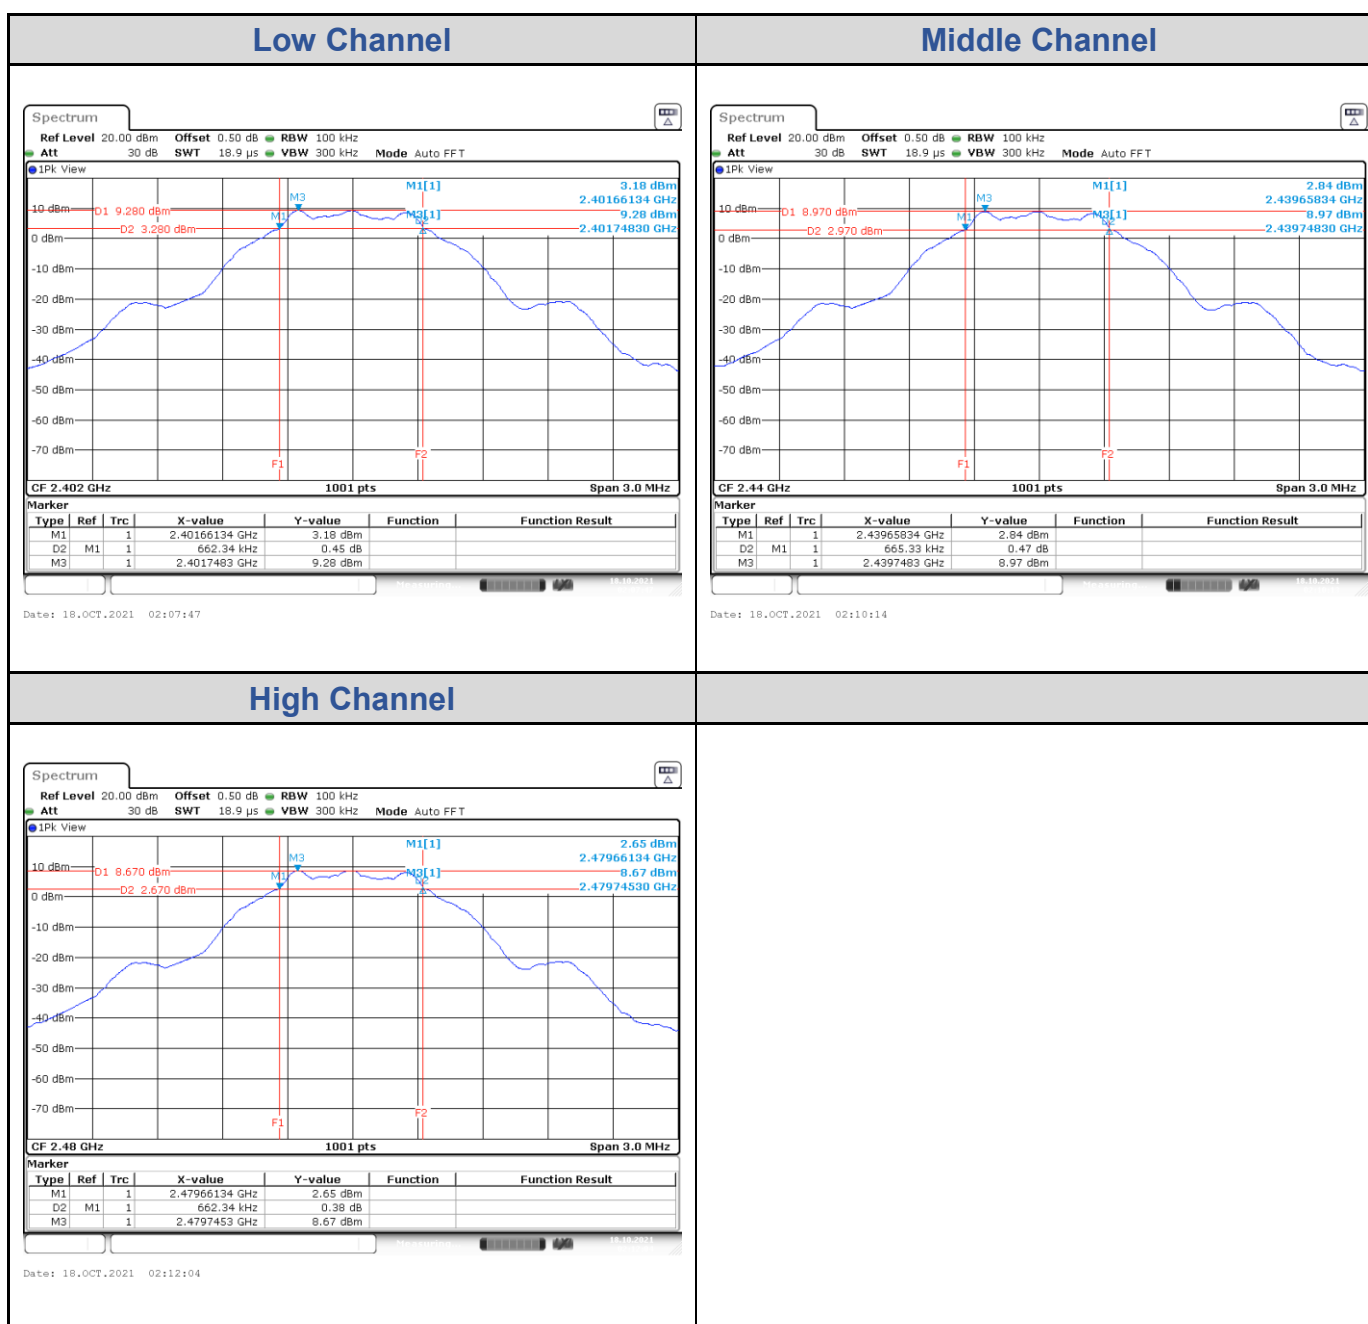

BLE_2M


Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	1193.81	> 500	Pass
Middle Channel	2440	1188.81	> 500	Pass
High Channel	2480	1188.81	> 500	Pass

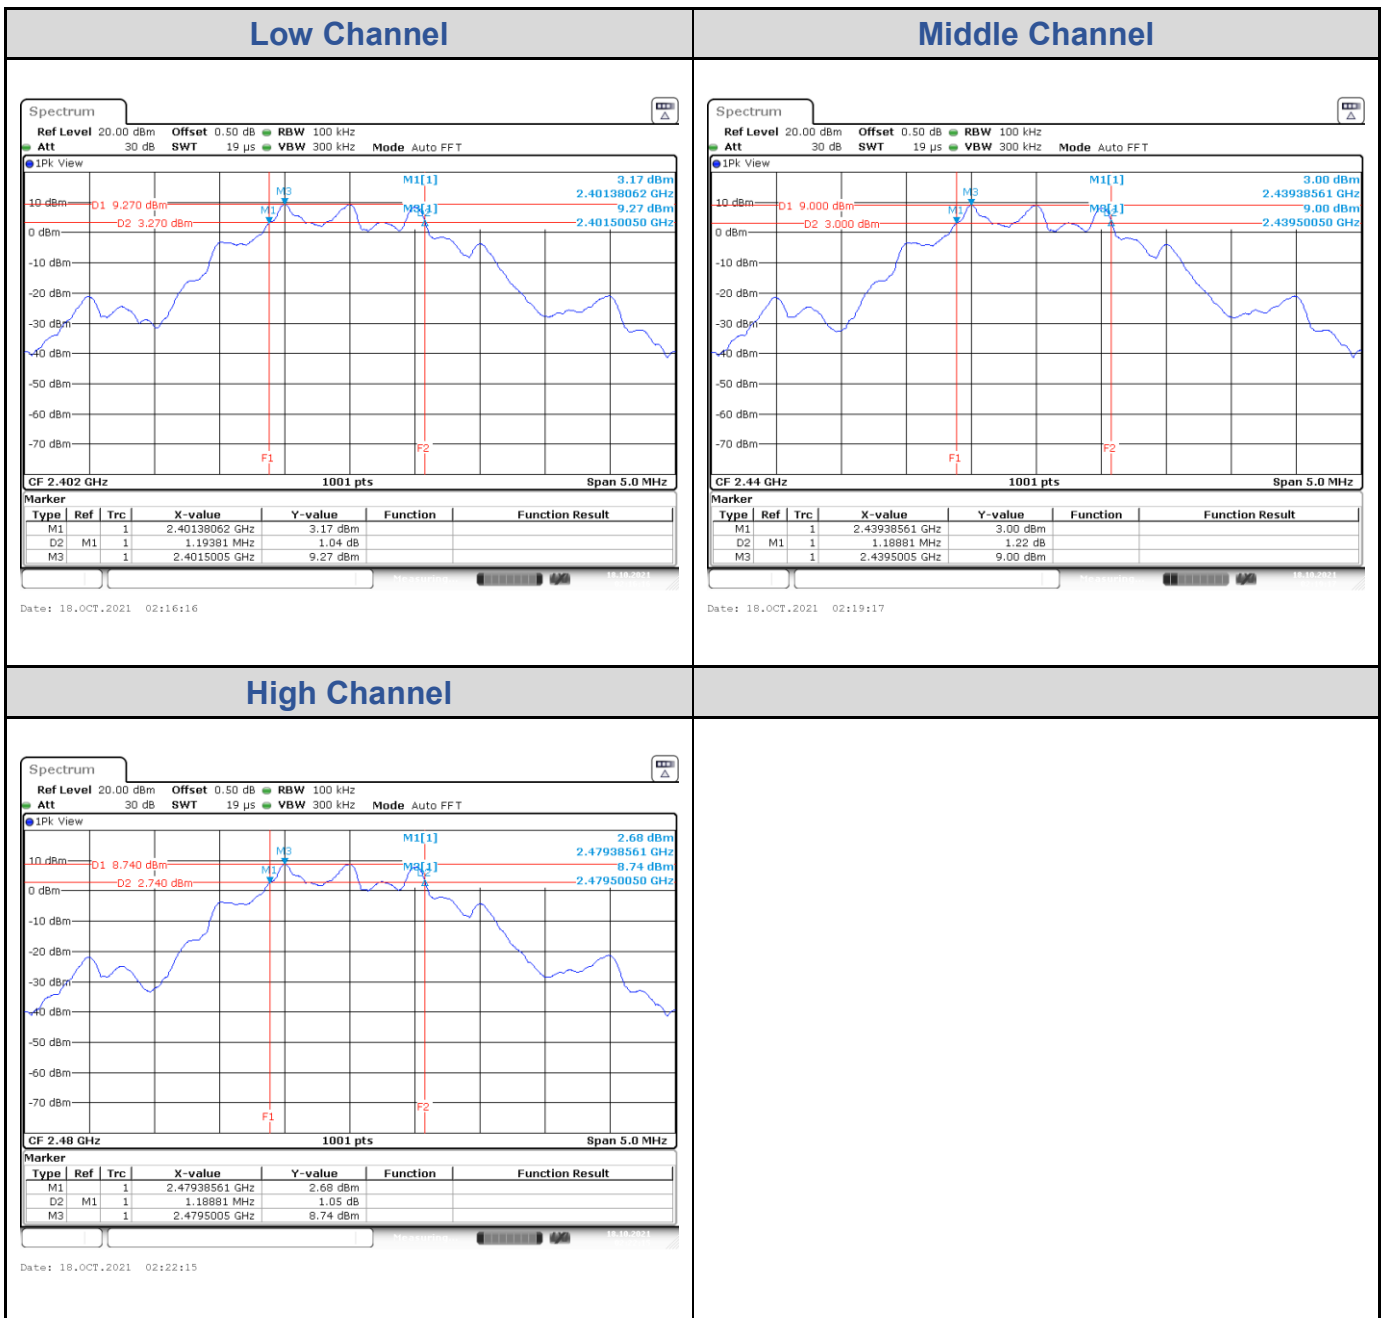

Test Result of 99% Occupied Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.02
Middle Channel	2440	1.03
High Channel	2480	1.02

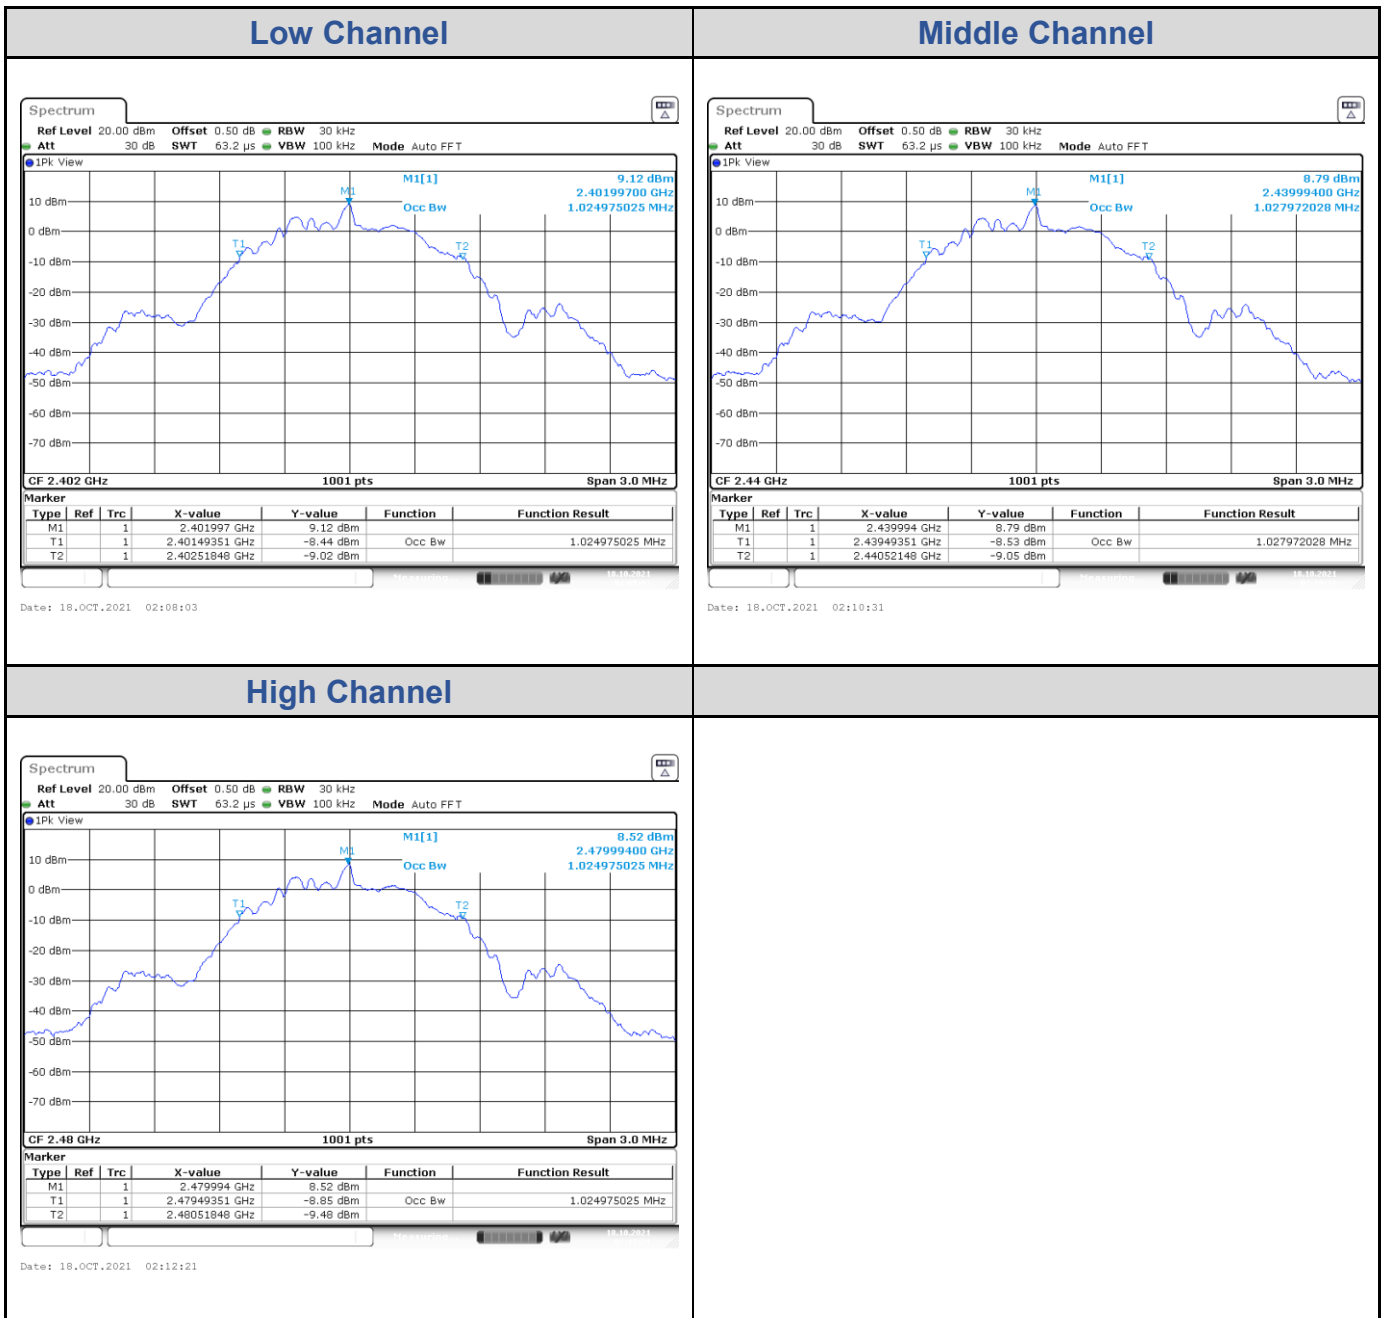

BLE_2M


Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	2.00
Middle Channel	2440	2.01
High Channel	2480	2.01

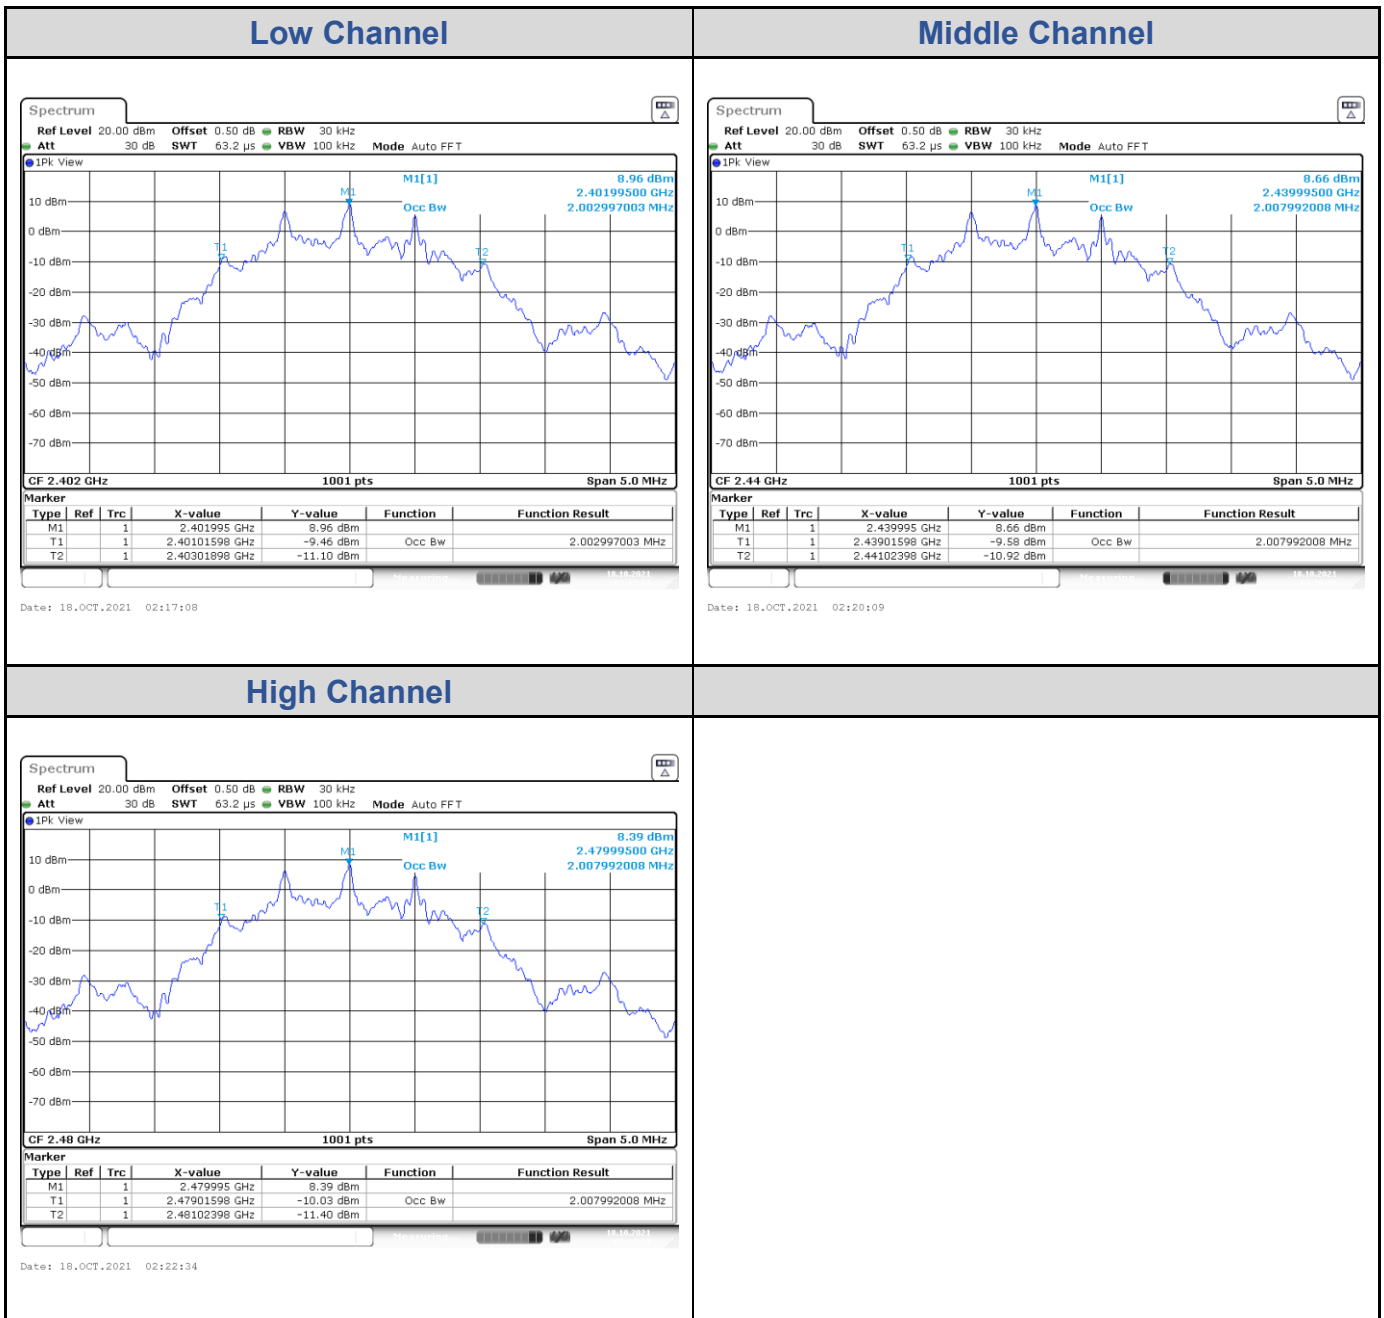

Test Result of Power Spectral Density


BLE_1M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-4.18	8	Pass
Middle Channel	2440	-4.35	8	Pass
High Channel	2480	-4.59	8	Pass

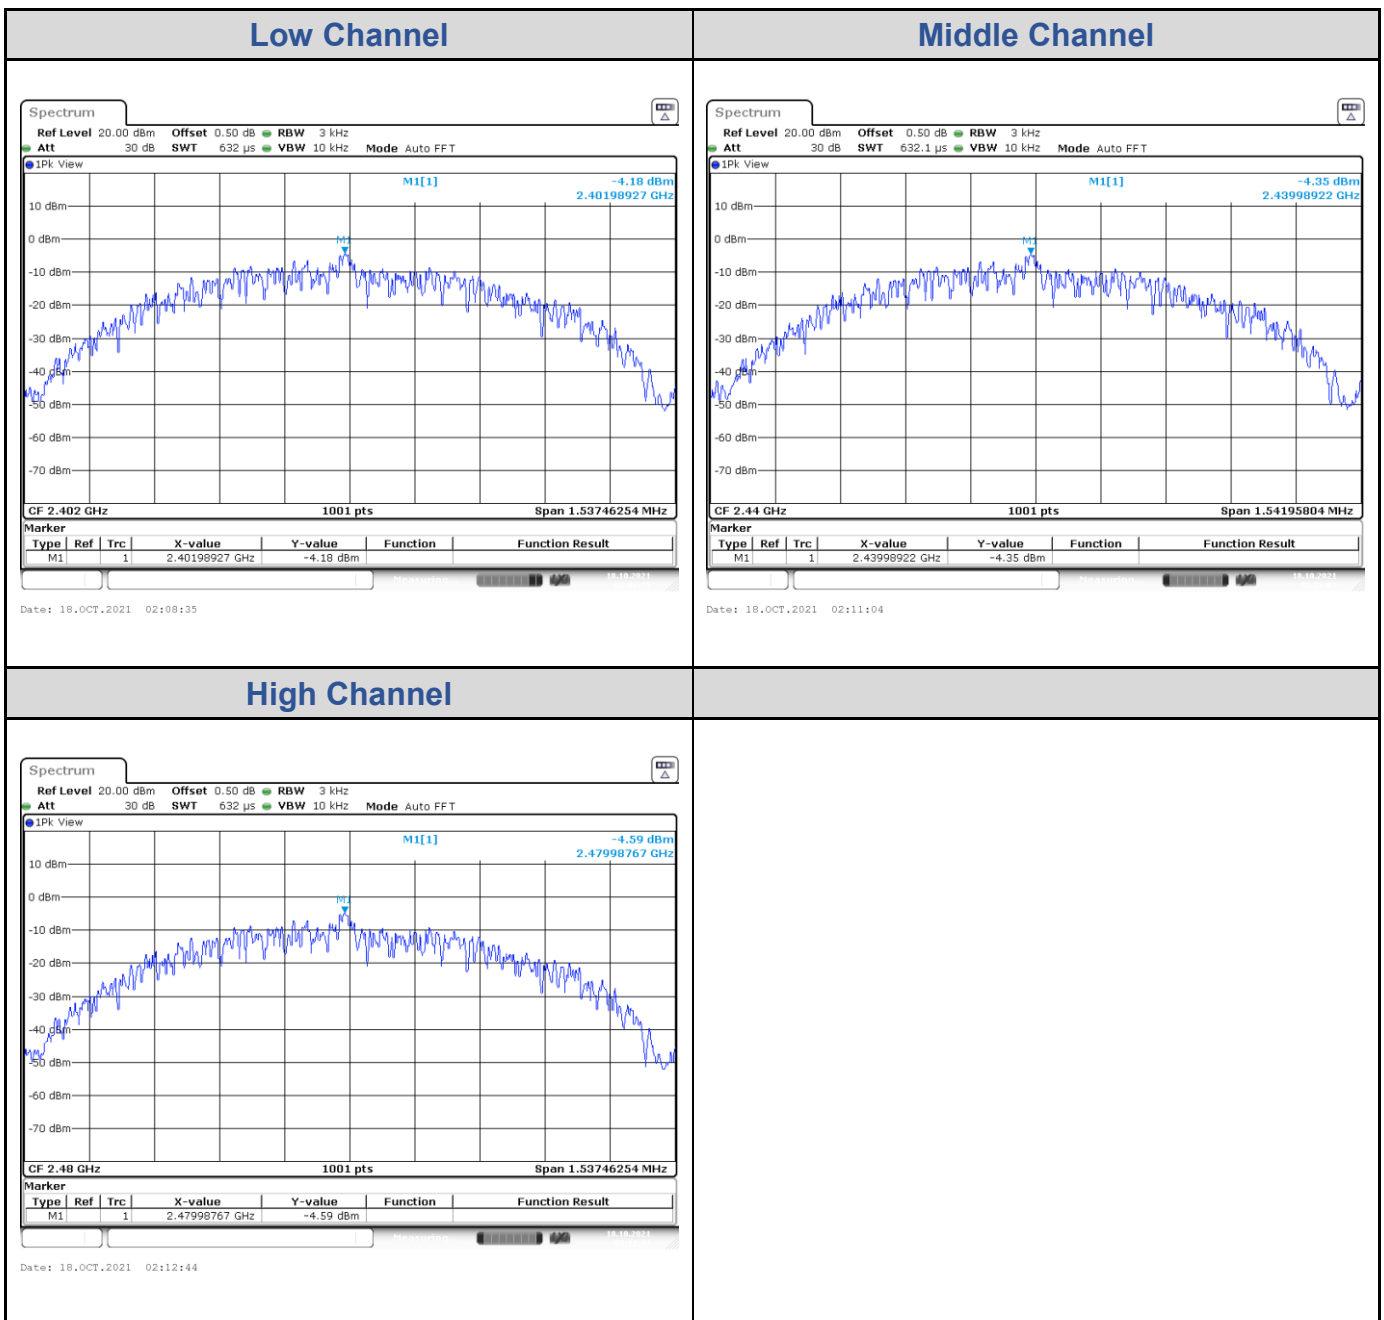


BLE_2M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	0.23	8	Pass
Middle Channel	2440	0.01	8	Pass
High Channel	2480	-0.30	8	Pass

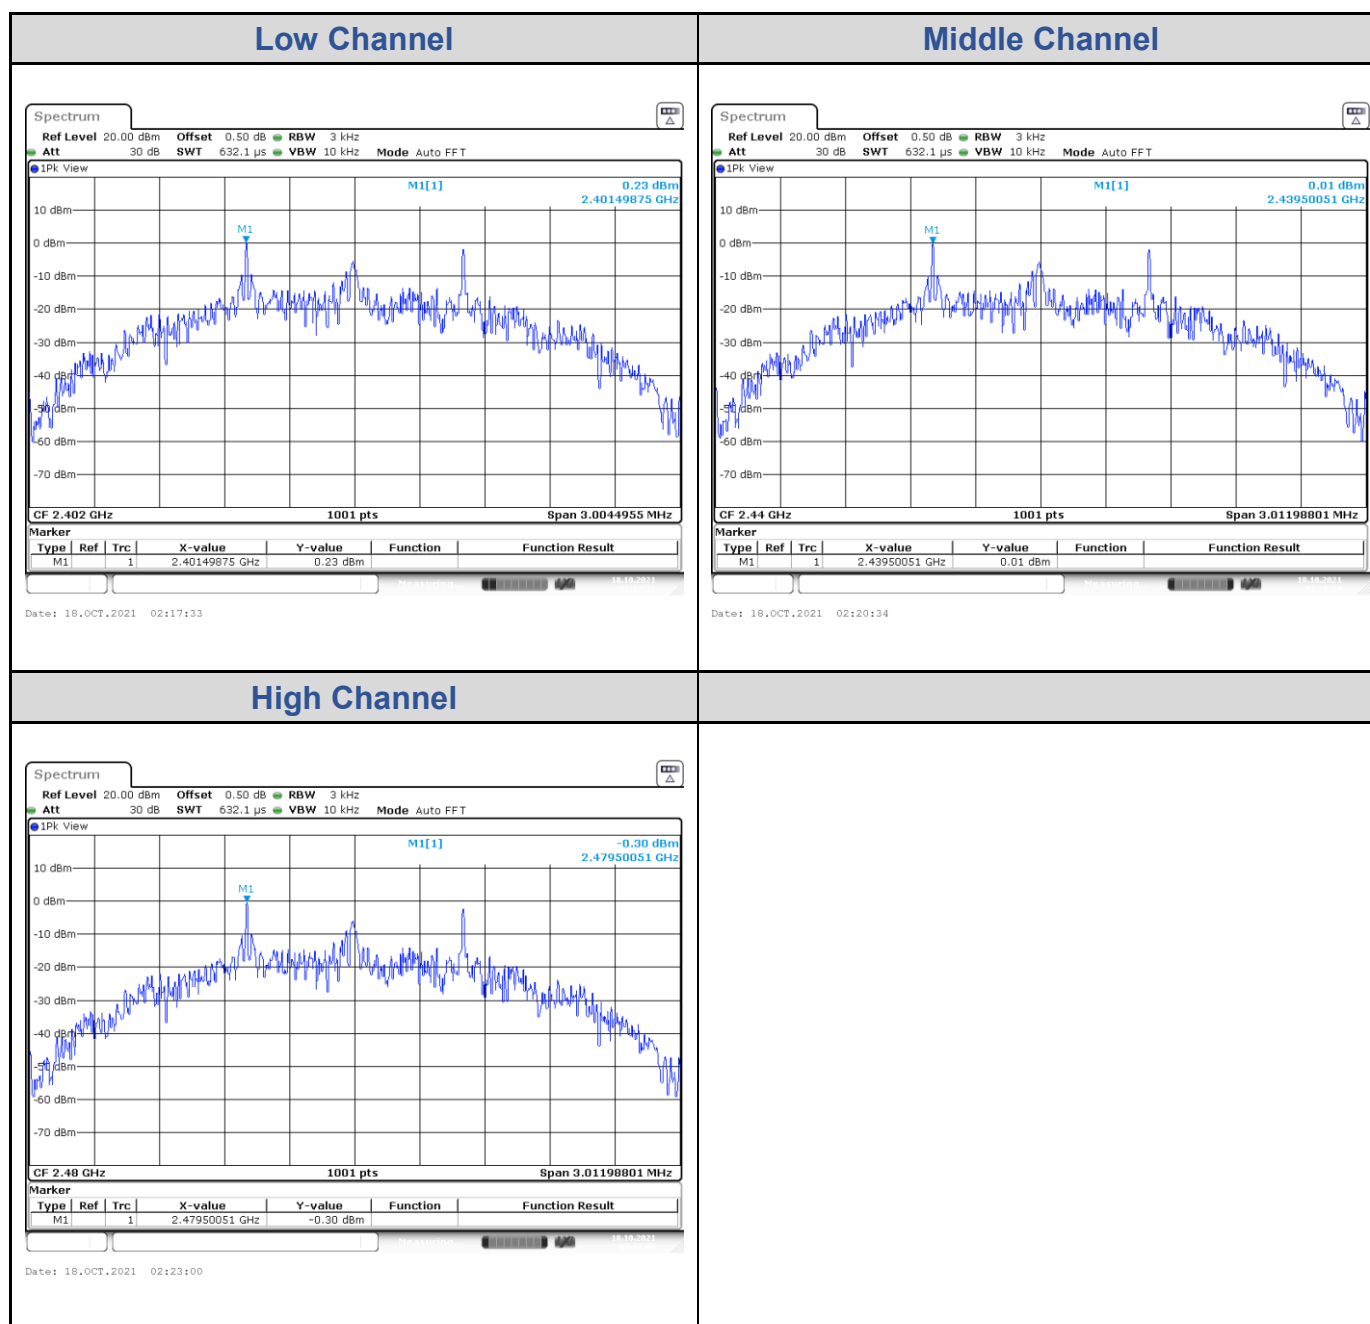




Test Result of Conducted Spurious Emissions, Tx Mode

BLE_1M

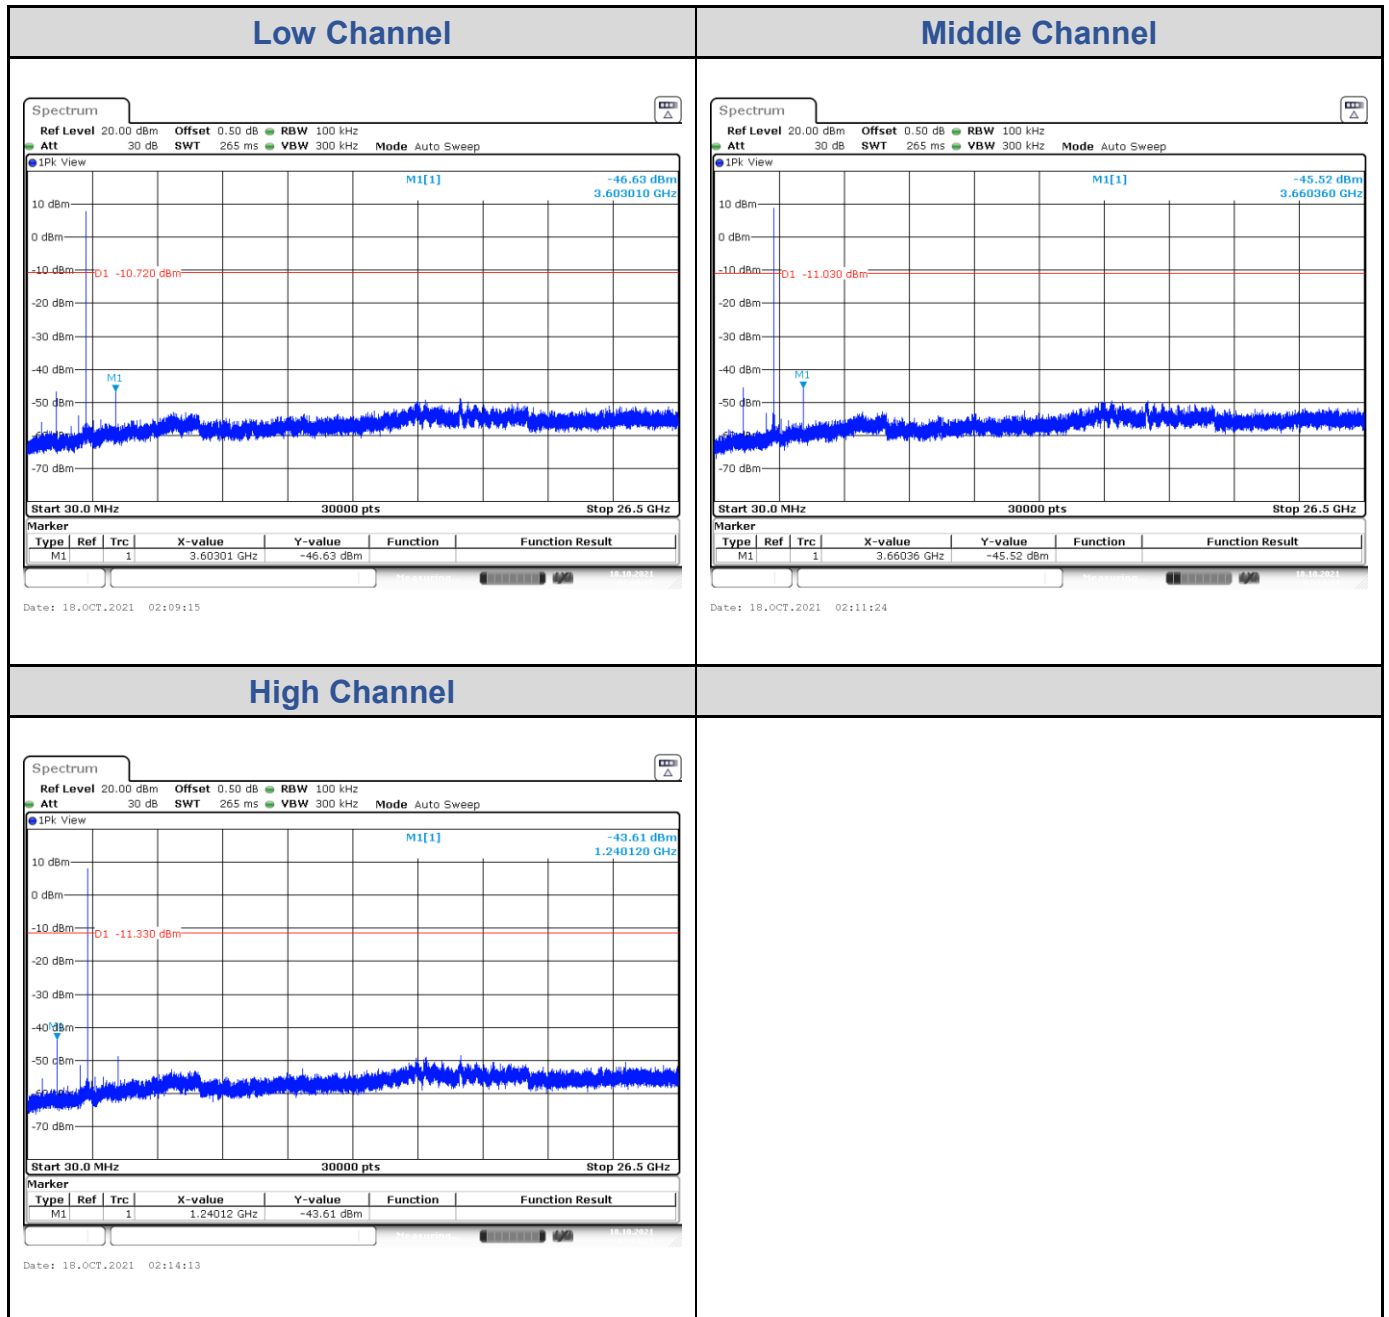


BLE_2M

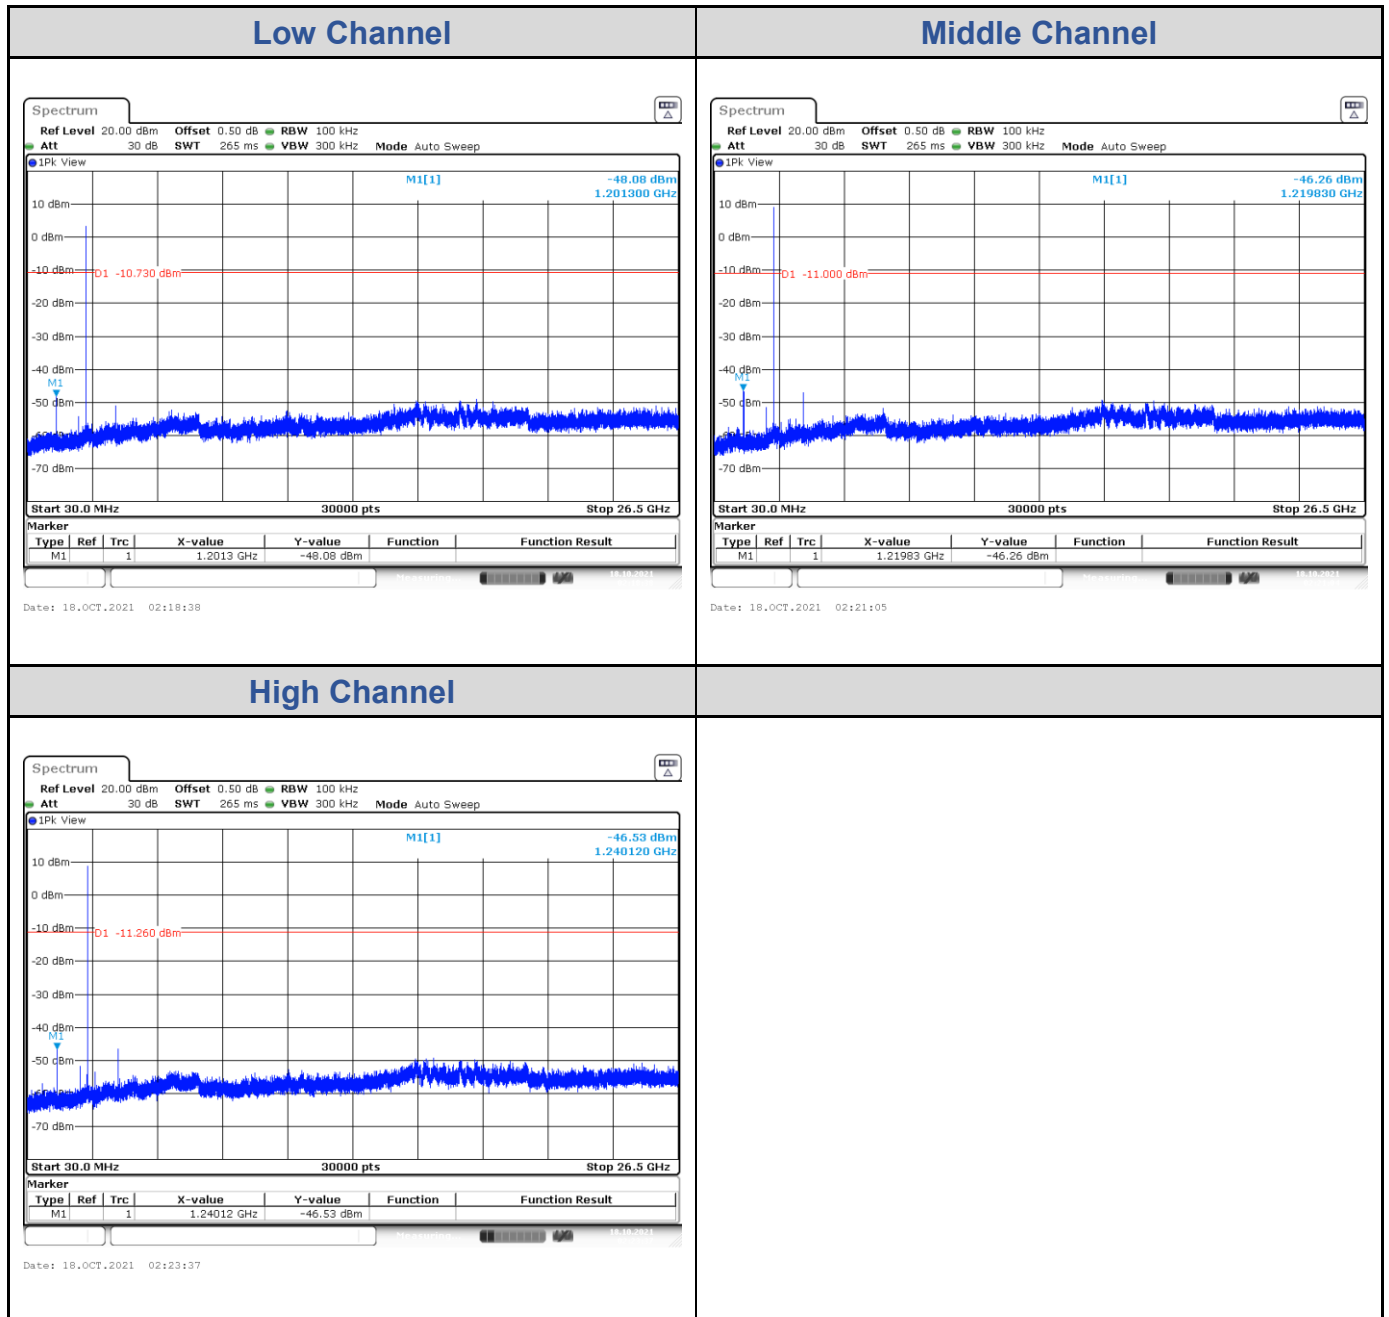

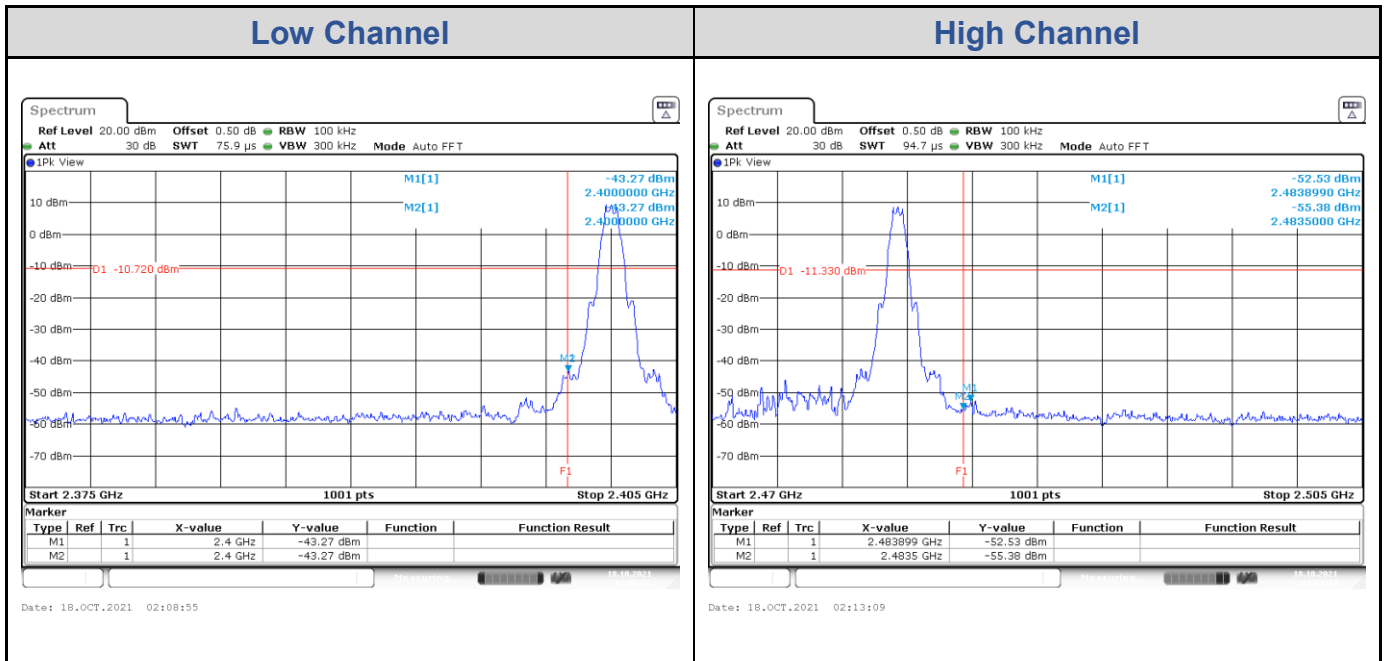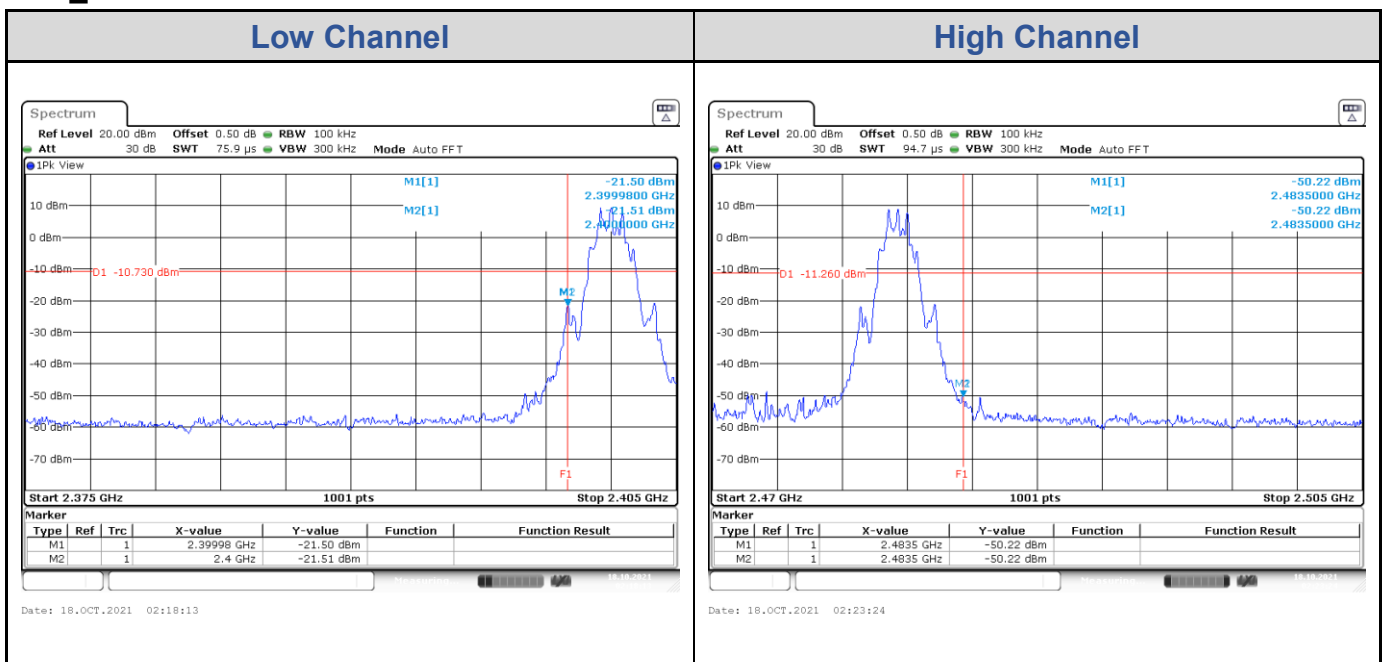Test Result of Conducted Band Edge, Tx Mode
BLE_1M

BLE_2M


Appendix B: Test Results of Radiated Spurious Emissions & Mains Conducted Emission Test


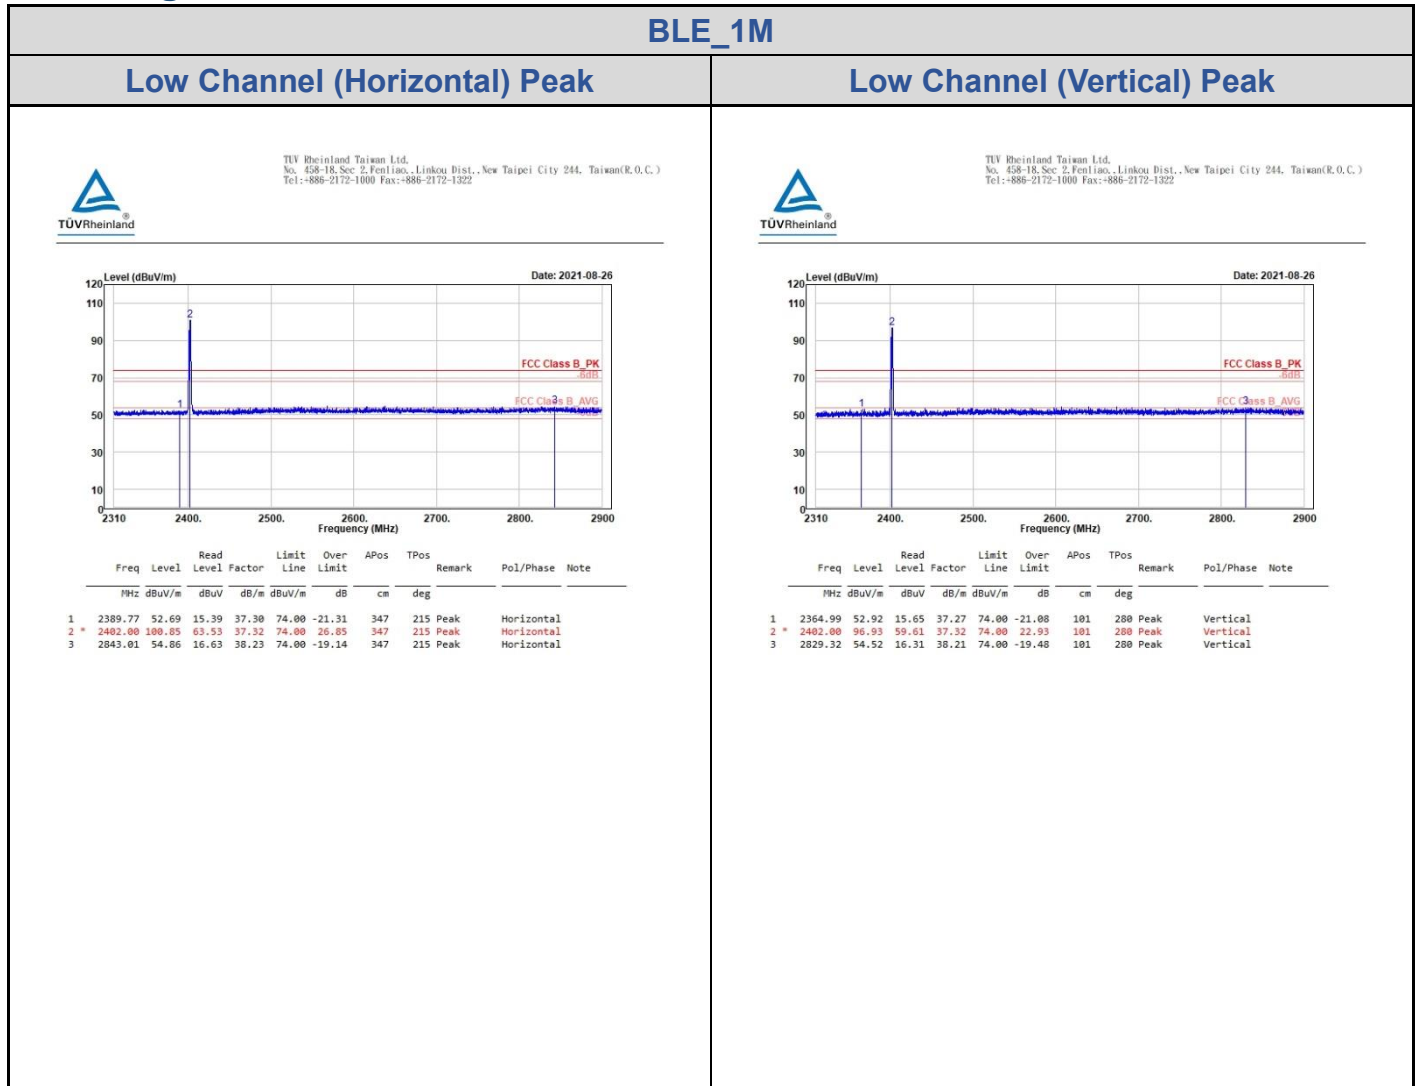
Band Edges, 2.31GHz ~ 2.9GHz



BLE_1M



Low Channel (Horizontal) Average

Low Channel (Vertical) Average

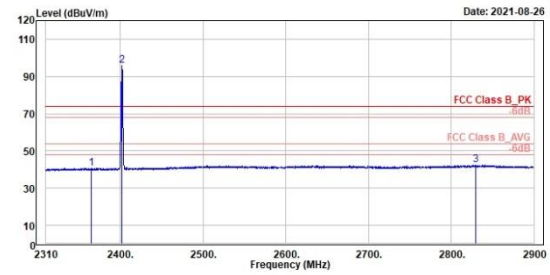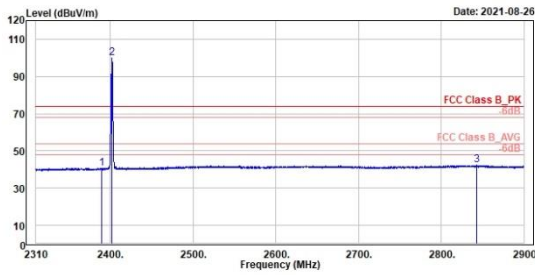

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2389.77	40.04	3.54	37.30	54.00	-13.16	347	215 Average	Horizontal	
2 *	2482.00	99.89	62.57	37.32	54.00	45.89	347	215 Average	Horizontal	
3	2843.01	42.24	4.01	38.23	54.00	-11.76	347	215 Average	Horizontal	

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2364.99	40.79	3.52	37.27	54.00	-13.21	101	200 Average	Vertical	
2 *	2402.00	95.95	58.63	37.32	54.00	41.95	101	200 Average	Vertical	
3	2829.32	42.50	4.29	38.21	54.00	-11.50	101	200 Average	Vertical	

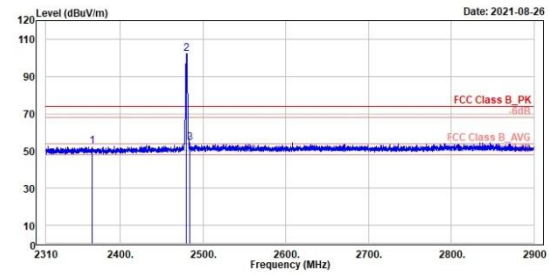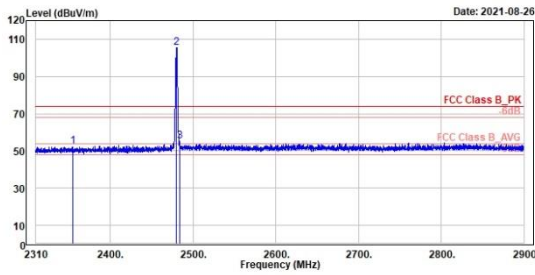BLE_1M
High Channel (Horizontal) Peak
High Channel (Vertical) Peak


Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2354.68	52.41	15.15	37.26	74.00	-21.59	363	213	Peak	Horizontal	
2 *	2480.00	105.25	67.56	37.69	74.00	31.25	363	213	Peak	Horizontal	
3	2494.05	55.28	17.57	37.71	74.00	-18.72	363	213	Peak	Horizontal	

Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2365.58	52.54	15.27	37.27	74.00	-21.46	100	273	Peak	Vertical	
2 *	2480.00	102.21	64.52	37.69	74.00	28.21	100	273	Peak	Vertical	
3	2483.81	54.47	16.76	37.71	74.00	-19.53	100	273	Peak	Vertical	


BLE_1M

High Channel (Horizontal) Average

High Channel (Vertical) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

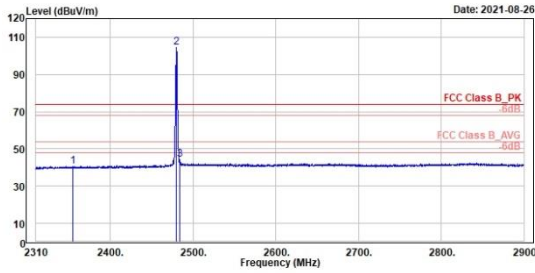

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2354.68	48.67	3.41	37.26	54.00	-13.33	363	213 Average	Horizontal	
2 *	2488.00	104.27	66.58	37.69	54.00	50.27	363	213 average	Horizontal	
3	2494.85	44.19	6.48	37.71	54.00	-9.81	363	213 Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322


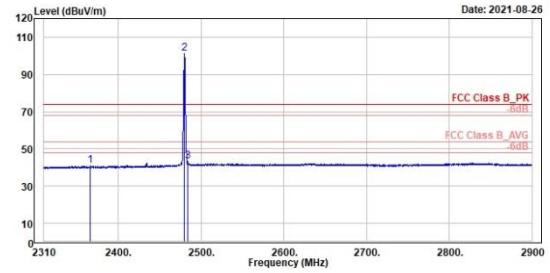


Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2365.58	48.84	3.57	37.27	54.00	-13.16	180	273 Average	Vertical	
2 *	2488.00	101.24	63.55	37.69	54.00	47.24	180	273 Average	Vertical	
3	2483.81	43.38	5.67	37.71	54.00	-10.62	180	273 Average	Vertical	

BLE_2M

Low Channel (Horizontal) Peak

Low Channel (Vertical) Peak

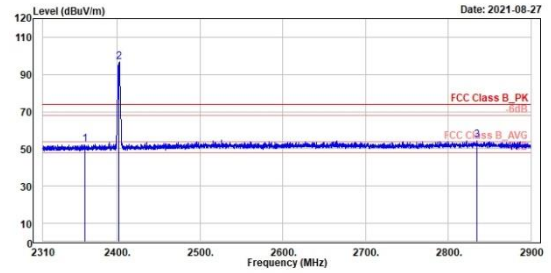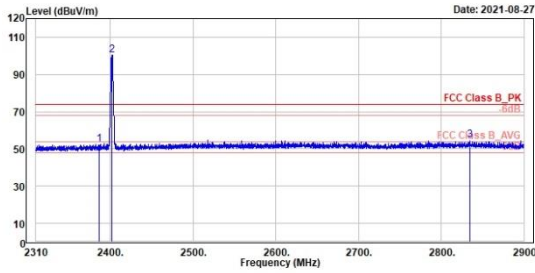

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2386.82	52.66	15.36	37.30	74.00	-21.34	345	216	Peak	Horizontal	
2 *	2402.00	100.18	62.86	37.32	74.00	26.18	345	216	Peak	Horizontal	
3	2835.34	54.60	16.38	38.22	74.00	-19.40	345	216	Peak	Horizontal	

Freq	Level	Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg				
1	2368.62	52.44	15.17	37.27	74.00	-21.56	101	279	Peak	Vertical	
2 *	2402.00	96.52	59.20	37.32	74.00	22.52	101	279	Peak	Vertical	
3	2834.51	54.58	16.36	38.22	74.00	-19.42	101	279	Peak	Vertical	


BLE_2M

Low Channel (Horizontal) Average

Low Channel (Vertical) Average




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

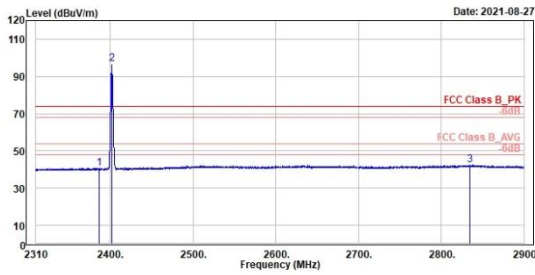

Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
Level	Level	Factor	Line	Limit	cm	deg			
dBuV	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2386.82	40.78	3.40	37.30	54.00	-13.22	345	216 Average	Horizontal
2 *	2482.80	96.69	59.37	37.32	54.00	42.69	345	216 average	Horizontal
3	2835.34	42.37	4.15	38.22	54.00	-11.63	345	216 Average	Horizontal



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322


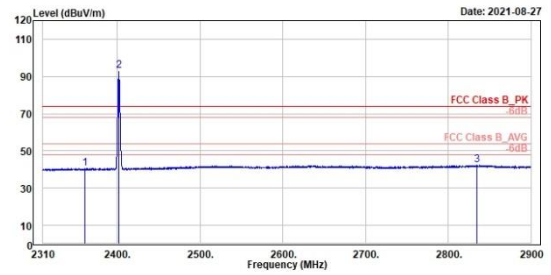


Read	Level	Factor	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
Level	Level	Factor	Line	Limit	cm	deg			
dBuV	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2368.62	40.73	3.46	37.27	54.00	-13.27	181	279 Average	Vertical
2 *	2482.80	93.23	55.91	37.32	54.00	39.23	181	279 Average	Vertical
3	2834.51	42.24	4.02	38.22	54.00	-11.76	181	279 Average	Vertical

BLE_2M

High Channel (Horizontal) Peak

High Channel (Vertical) Peak

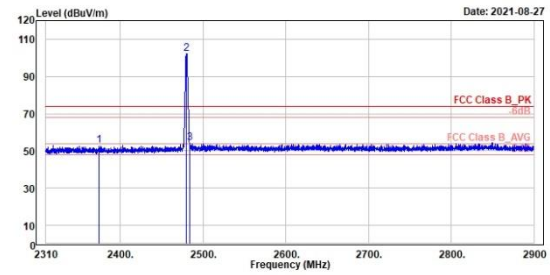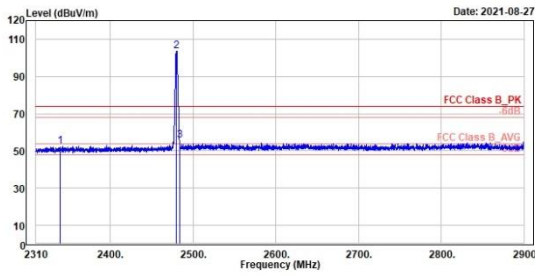

Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2338.91	52.67	15.50	37.17	74.00	-21.33	362	198	Peak	Horizontal	
2 *	2488.00	103.48	65.79	37.69	74.00	29.48	362	198	Peak	Horizontal	
3	2483.50	55.75	18.04	37.71	74.00	-18.25	362	198	Peak	Horizontal	

Peak	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2374.43	53.13	15.85	37.28	74.00	-20.87	100	276	Peak	Vertical	
2 *	2480.00	102.19	64.58	37.69	74.00	28.19	100	276	Peak	Vertical	
3	2483.50	54.51	16.00	37.71	74.00	-19.49	100	276	Peak	Vertical	


BLE_2M

High Channel (Horizontal) Average

High Channel (Vertical) Average




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

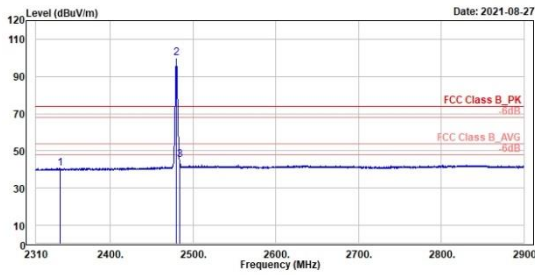

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2338.91	48.63	3.46	37.17	54.00	-13.37	362	198 Average	Horizontal	
2 *	2488.00	99.83	62.14	37.69	54.00	45.83	362	198 Average	Horizontal	
3	2483.50	45.30	7.59	37.71	54.00	-8.70	362	198 Average	Horizontal	




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

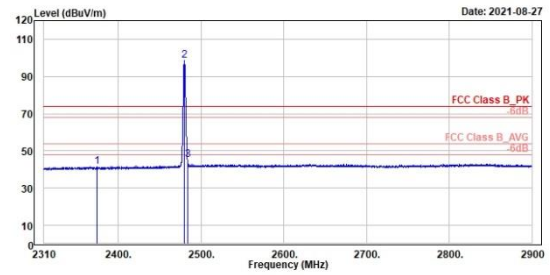

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	2374.43	41.49	4.21	37.28	54.00	-12.51	100	276 Average	Vertical	
2 *	2480.00	98.68	60.91	37.69	54.00	44.68	100	276 Average	Vertical	
3	2483.50	45.13	7.42	37.71	54.00	-8.87	100	276 Average	Vertical	

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz
BLE_2M
Middle Channel (Open) 9kHz~150kHz
Middle Channel (Open) 150kHz~30MHz



TUV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

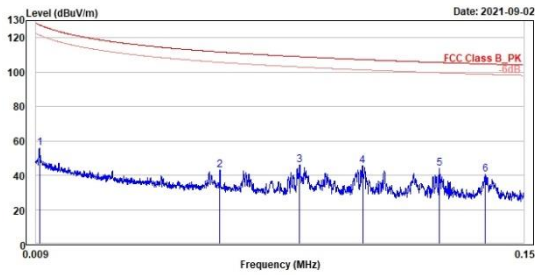

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.01	55.77	35.83	19.94	127.57	-71.88	100	170 QP	Open
2	0.06	43.10	22.85	20.25	111.72	-68.62	100	162 QP	Open
3	0.09	46.11	25.90	20.21	108.98	-62.87	100	176 QP	Open
4	0.10	45.43	25.23	20.20	107.30	-61.87	100	175 QP	Open
5	0.13	44.04	23.87	20.17	105.62	-61.58	100	163 QP	Open
6	0.14	40.62	20.46	20.16	104.74	-64.12	100	180 QP	Open



TUV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

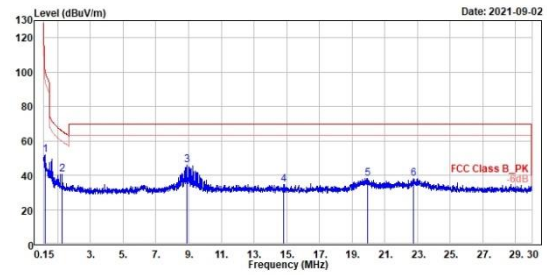

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.22	52.08	31.97	20.11	100.69	-48.61	100	159 QP	Open
2	1.26	40.74	20.56	20.18	65.59	-24.85	100	352 QP	Open
3	8.91	45.74	25.37	20.37	69.50	-23.76	100	336 QP	Open
4	14.84	34.78	14.21	20.57	69.50	-34.72	100	32 QP	Open
5	19.93	37.99	17.35	20.64	69.50	-31.51	100	332 QP	Open
6	22.70	38.05	17.36	20.69	69.50	-31.45	100	360 QP	Open


BLE_2M

Middle Channel (Close) 9kHz~150kHz

Middle Channel (Close) 150kHz~30MHz




TUV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

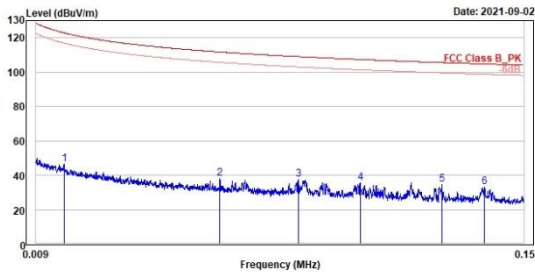

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.02	46.25	26.17	20.08	122.92	-76.67	100	315 QP	Close
2	0.06	38.00	17.75	20.25	111.72	-73.72	100	226 QP	Close
3	0.08	37.80	17.59	20.21	109.02	-71.22	100	240 QP	Close
4	0.10	35.53	15.33	20.20	107.36	-71.83	100	236 QP	Close
5	0.13	34.66	14.49	20.17	105.57	-70.91	100	232 QP	Close
6	0.14	32.90	12.74	20.16	104.76	-71.86	100	226 QP	Close




TUV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

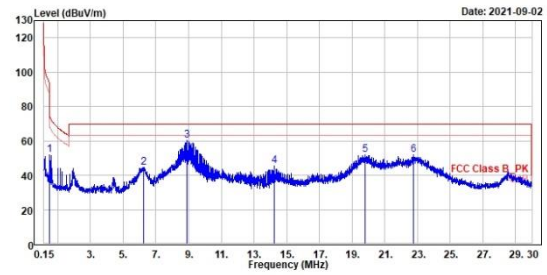

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	0.50	52.11	32.03	20.08	73.59	-21.48	100	141 QP	Close
2	6.27	44.64	24.36	20.28	69.50	-24.86	100	76 QP	Close
3	8.91	60.31	39.94	20.37	69.50	-9.19	100	21 QP	Close
4	14.25	45.25	24.70	20.55	69.50	-24.25	100	340 QP	Close
5	19.80	51.74	31.10	20.64	69.50	-17.76	100	319 QP	Close
6	22.76	51.70	31.01	20.69	69.50	-17.80	100	93 QP	Close

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz
BLE_2M
Middle Channel (Horizontal)
Middle Channel (Vertical)



TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

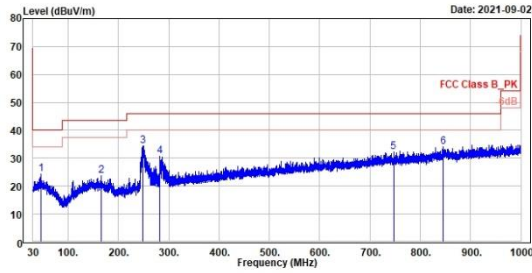

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	46.28	24.38	38.11	-5.81	48.00	-15.78	280	360 QP	Horizontal
2	165.88	23.62	29.33	-5.71	43.58	-19.88	180	281 QP	Horizontal
3	248.83	34.38	48.74	-6.44	46.00	-11.78	300	236 QP	Horizontal
4	282.88	38.78	35.82	-5.04	46.00	-15.22	200	95 QP	Horizontal
5	747.82	32.18	29.54	2.64	46.00	-13.82	300	291 QP	Horizontal
6	844.99	34.12	38.82	4.18	46.00	-11.88	180	295 QP	Horizontal



TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

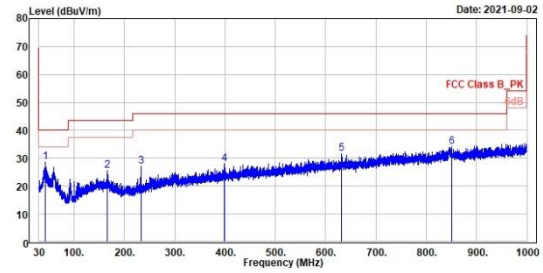



Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	42.61	28.52	34.26	-5.74	48.00	-11.48	180	25 QP	Vertical
2	166.58	25.55	31.33	-5.78	43.58	-17.95	280	343 QP	Vertical
3	232.54	27.13	34.82	-6.89	46.00	-18.87	180	149 QP	Vertical
4	399.28	27.93	38.77	-2.84	46.00	-18.07	300	47 QP	Vertical
5	638.72	31.52	38.75	0.77	46.00	-14.48	180	261 QP	Vertical
6	858.14	33.93	29.88	4.13	46.00	-12.87	480	383 QP	Vertical

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz

BLE_1M

Low Channel (Horizontal)

Low Channel (Vertical)

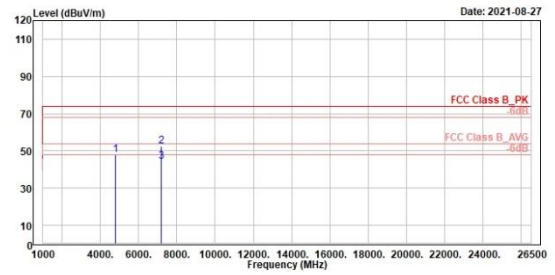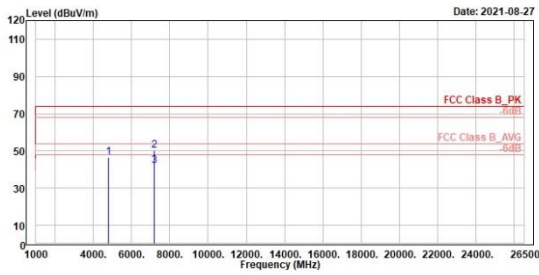

Line	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4884.00	46.72	56.13	-9.41	74.00	-27.28	180	212	Peak	Horizontal	
2	7286.00	49.96	56.60	-6.64	88.25	-30.89	384	251	Peak	Horizontal	
3	7286.00	42.05	48.69	-6.64	79.89	-37.84	384	251	Average	Horizontal	

Line	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4884.00	47.74	57.15	-9.41	74.00	-26.26	180	242	Peak	Vertical	
2	7286.00	52.54	59.18	-6.64	76.93	-24.39	180	300	Peak	Vertical	
3	7286.00	44.15	50.79	-6.64	75.95	-31.80	180	300	Average	Vertical	


BLE_1M

Middle Channel (Horizontal)

Middle Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

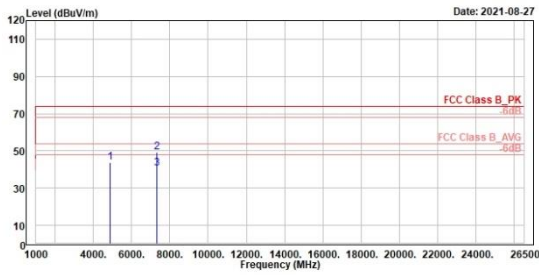

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4880.00	43.98	53.34	-9.36	74.00	-30.02	100	129 Peak	Horizontal	
2	7320.00	49.48	56.11	-6.63	74.00	-24.52	380	252 Peak	Horizontal	
3	7320.00	40.66	47.29	-6.63	54.00	-13.34	380	252 Average	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

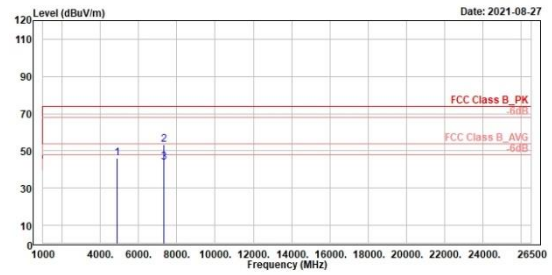

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4880.00	45.95	55.31	-9.36	74.00	-28.05	100	245 Peak	Vertical	
2	7320.00	53.23	59.86	-6.63	74.00	-20.77	100	299 Peak	Vertical	
3	7320.00	43.69	50.32	-6.63	54.00	-10.31	100	299 Average	Vertical	


BLE_1M

High Channel (Horizontal)

High Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

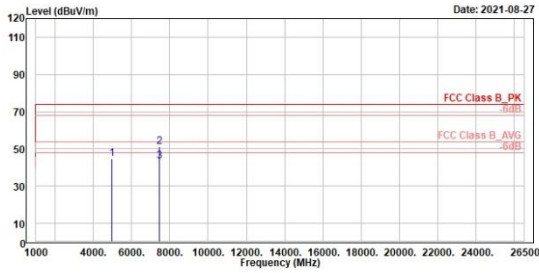

Line	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4968.00	44.93	54.20	-9.27	74.00	-29.07	100	12	Peak	Horizontal	
2	7440.00	51.15	57.74	-6.59	74.00	-22.85	389	252	Peak	Horizontal	
3	7440.00	43.34	49.93	-6.59	54.00	-10.66	389	252	Average	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

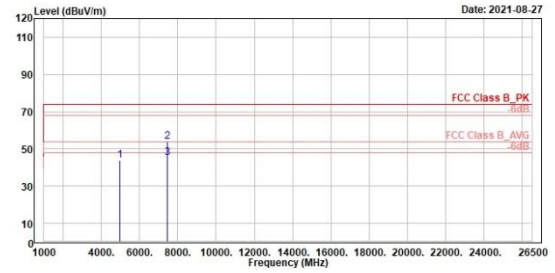

Line	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4968.00	43.81	53.08	-9.27	74.00	-30.19	100	238	Peak	Vertical	
2	7440.00	53.65	60.24	-6.59	74.00	-20.35	100	294	Peak	Vertical	
3	7440.00	45.13	51.72	-6.59	54.00	-8.87	100	294	Average	Vertical	


BLE_2M

Low Channel (Horizontal)

Low Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

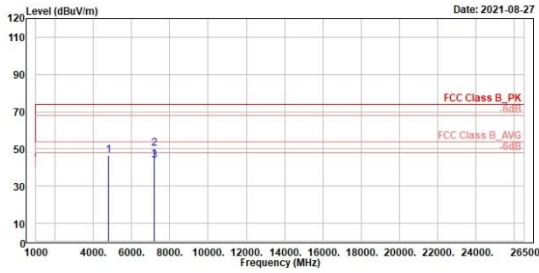

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4894.00	46.36	55.77	-9.41	74.00	-27.64	490	213 Peak	Horizontal	
2	7286.00	50.11	56.75	-6.64	80.18	-30.07	387	258 Peak	Horizontal	
3	7286.00	43.59	50.23	-6.64	76.69	-33.10	387	258 Average	Horizontal	



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

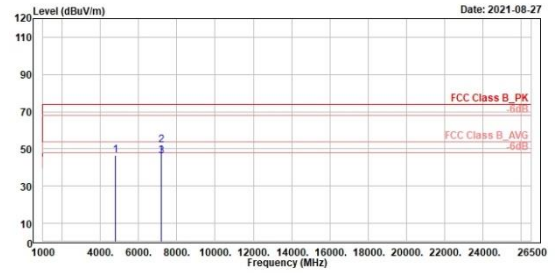

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
1	4894.00	46.34	55.75	-9.41	74.00	-27.66	100	275 Peak	Vertical	
2	7286.00	51.99	58.63	-6.64	76.52	-24.53	100	293 Peak	Vertical	
3	7286.00	46.25	52.89	-6.64	73.23	-26.98	100	293 Average	Vertical	


BLE_2M

Middle Channel (Horizontal)

Middle Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

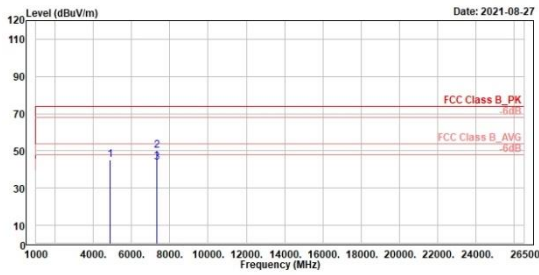

1	2	3								
Level	Level	Level								
Factor	Factor	Factor								
Limit	Limit	Limit								
Line	Line	Line								
Over	Over	Over								
Limit	Limit	Limit								
Apos	Apos	Apos								
TPos	TPos	TPos								
Remark	Remark	Remark								
Pol/Phase	Pol/Phase	Pol/Phase								
Note	Note	Note								
Freq	Level	Read								
MHz	dBuV/m	Level								
		Factor								
		dB/m								
		dB								
		cm								
		deg								
4880.00	45.00	54.36	-9.36	74.00	-29.00	100	205	Peak	Horizontal	
7320.00	50.06	56.69	-6.63	74.00	-23.94	382	255	Peak	Horizontal	
7320.00	43.96	50.59	-6.63	54.00	-10.04	382	255	Average	Horizontal	




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

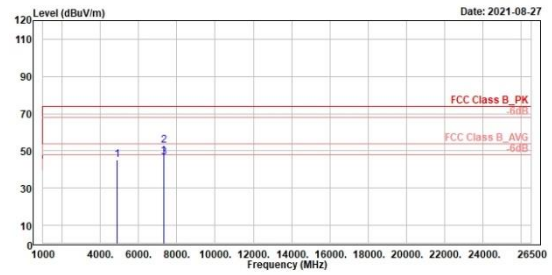

1	2	3								
Level	Level	Level								
Factor	Factor	Factor								
Limit	Limit	Limit								
Line	Line	Line								
Over	Over	Over								
Limit	Limit	Limit								
Apos	Apos	Apos								
TPos	TPos	TPos								
Remark	Remark	Remark								
Pol/Phase	Pol/Phase	Pol/Phase								
Note	Note	Note								
Freq	Level	Read								
MHz	dBuV/m	Level								
		Factor								
		dB/m								
		dB								
		cm								
		deg								
4880.00	45.05	54.41	-9.36	74.00	-28.95	100	247	Peak	Vertical	
7320.00	52.93	59.56	-6.63	74.00	-21.07	100	301	Peak	Vertical	
7320.00	46.36	52.99	-6.63	54.00	-7.64	100	301	Average	Vertical	

BLE_2M
High Channel (Horizontal)
High Channel (Vertical)


TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

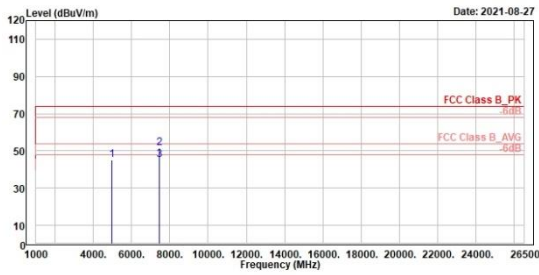


1	2	3
Level	Read Level	Factor
dBuV/m	dBuV	dB/m
4968.00	45.03	54.30
7440.00	51.55	58.14
7440.00	45.09	51.68

Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
dB	dB	cm	deg			
74.00	-28.97	490	213	Peak	Horizontal	
74.00	-22.45	385	257	Peak	Horizontal	
54.00	-8.91	385	257	Average	Horizontal	



TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322

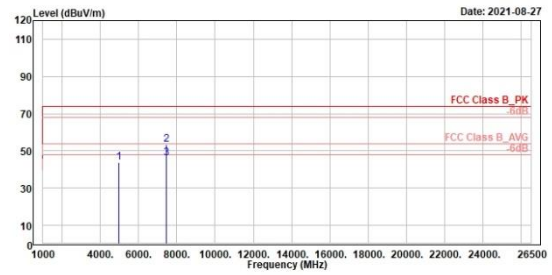

1	2	3
Level	Read Level	Factor
dBuV/m	dBuV	dB/m
4968.00	43.89	53.16
7440.00	53.46	68.05
7440.00	45.87	52.46

Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase	Note
dB	dB	cm	deg			
74.00	-30.11	289	334	Peak	Vertical	
74.00	-20.54	180	325	Peak	Vertical	
54.00	-8.13	180	325	Average	Vertical	

Mains Conducted Emission, 150kHz ~ 30MHz

Worst Band

(Line)


(Neutral)



TUV Rheinland Taiwan Ltd. (New Taipei Branch)
No. 458-18 & 458-19, Sec. 2, Fenliiao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322




TUV Rheinland Taiwan Ltd. (New Taipei Branch)
No. 458-18 & 458-19, Sec. 2, Fenliiao Rd., Linkou Dist., New Taipei City 244
Tel:+886-2172-1000 Fax:+886-2172-1322

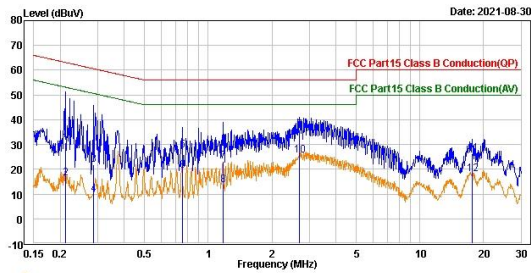

Trace: 1

Read Freq	Level	Factor	Limit Line	Over Limit	Remark	Pol/Phase	Note
MHz	dBuV	dB	dBuV	dB			
1	0.212	21.20	9.65	63.14	-32.29	QP	line1
2	0.212	6.66	9.65	53.14	-36.83	Average	line1
3	0.288	12.07	9.64	60.58	-38.87	QP	line1
4	0.288	0.09	9.64	50.58	-40.85	Average	line1
5	0.754	18.13	9.66	56.00	-28.21	QP	line1
6	0.754	9.85	9.66	46.00	-26.49	Average	line1
7	1.181	13.45	9.66	56.00	-32.89	QP	line1
8	1.181	4.04	9.66	46.00	-32.30	Average	line1
9	2.701	26.28	9.68	56.00	-20.04	QP	line1
10	2.701	15.90	9.68	46.00	-20.42	Average	line1
11	17.688	16.50	9.74	60.00	-33.76	QP	line1
12	17.688	8.45	9.74	50.00	-31.81	Average	line1

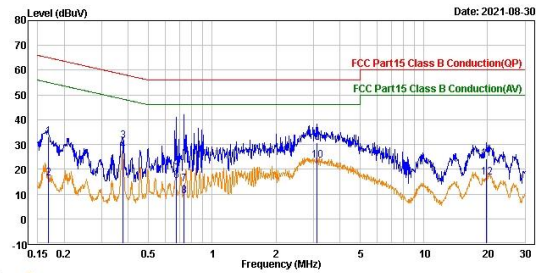

Trace: 1

Read Freq	Level	Factor	Limit Line	Over Limit	Remark	Pol/Phase	Note
MHz	dBuV	dB	dBuV	dB			
1	0.168	23.41	9.68	65.05	-31.96	QP	neutral
2	0.168	6.71	9.68	55.05	-38.66	Average	neutral
3	0.377	21.71	9.66	58.34	-26.97	QP	neutral
4	0.377	18.13	9.66	48.34	-20.55	Average	neutral
5	0.676	11.22	9.67	56.00	-35.11	QP	neutral
6	0.676	5.82	9.67	46.00	-30.51	Average	neutral
7	0.736	4.42	9.67	56.00	-41.91	QP	neutral
8	0.736	-0.48	9.67	46.00	-36.81	Average	neutral
9	3.137	20.91	9.71	56.00	-25.30	QP	neutral
10	3.137	13.81	9.71	46.00	-22.48	Average	neutral
11	19.737	14.27	9.82	60.00	-35.91	QP	neutral
12	19.737	6.94	9.82	50.00	-33.24	Average	neutral