

Shenzhen Ouyada Electronic Co. , Ltd.

Sample Approval Sheet

Product Information:

Customer	Acoustic Innovation (Huizhou) Co., Ltd.
Material Description	Patch ceramic antenna, CW324S, Unictron
Customer's Part number	VA. E. 03314880001ZR
Specifications	Patch ceramic antenna, CW324S, Unictron, 3.2mmx1.6mmx1.3mm, 2400MHz~2500MHz, (RoHS/REACH)
Supplier's Part number	H2U38D1E1B0100
Date	2023-12-19

Supplier:

Prepared By	Checked By	Approved By
Liulimei	Liu lili	Tang zhitao



Customer Approval:

Accepted By	Checked By	Approved By

Results:

- Full Approval
- Conditional Approval
- Unqualified
- Others:

Shenzhen Ouyada Electronic Co. , Ltd.
 Add:1970 science and Technology Park, Longhua District, Shenzhen
 Tel:0755-82793361/0755-83951116

1、 Specification


This report mainly provides the testing status of various electrical and structural performance parameters of BTH1488 TX Antenna

Figure 1 Antenna Placement



Outline Dimensions of Antenna & Evaluation Board (unit: mm)

6-1. Antenna Dimensions

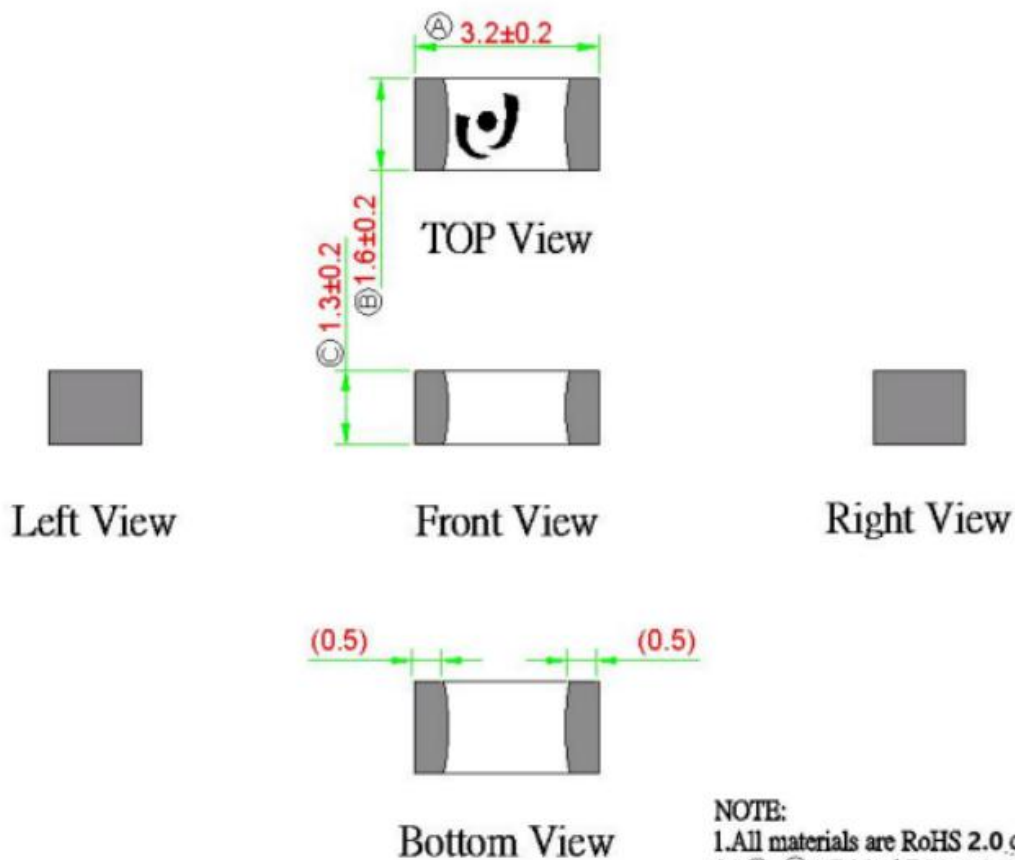

NOTE:
1.All materials are RoHS 2.0 compliant.
2."(A~C)" Critical Dimensions.
3."()" Reference Dimensions.


1.1 Electrical specification standard

1.1.1 Electrical Specifications

The antenna operates in the 2400-2480 MHz. The following table is the electrical performance index of the antenna designed by our company.

Antenna	BTH1483 TX Antenna
Frequency Range	2400-2500MHz
VSWR	< 2.0
Efficiency	> 35%
Impedance	50 ohm
Polarization	Linear polarization

1.1.2 Antenna Matching Network



Element	Value
1(0201)	0.6PF
2(0201)	0Ω
3(0201)	NC
4(0201)	7.5NH

2、 Test

The antenna was debugged and tested with the prototype provided by the customer.

2.1 Test of passive S11


2.1.1 Test connection

The passive S11 test device is connected as follows: Network Analyzer → Test Line → Test Fixture.

2.1.2 Passive S11

The following table shows the standing wave ratio values of the edge frequency points of the antenna operating frequency band. The waveform of Return Loss and VSWR obtained by the test is shown as follows.

Frequency (MHz)	2400	2450	2500
VSWR	1.71	1.12	1.48
Return Loss	-11.631	-25.37	-14.141

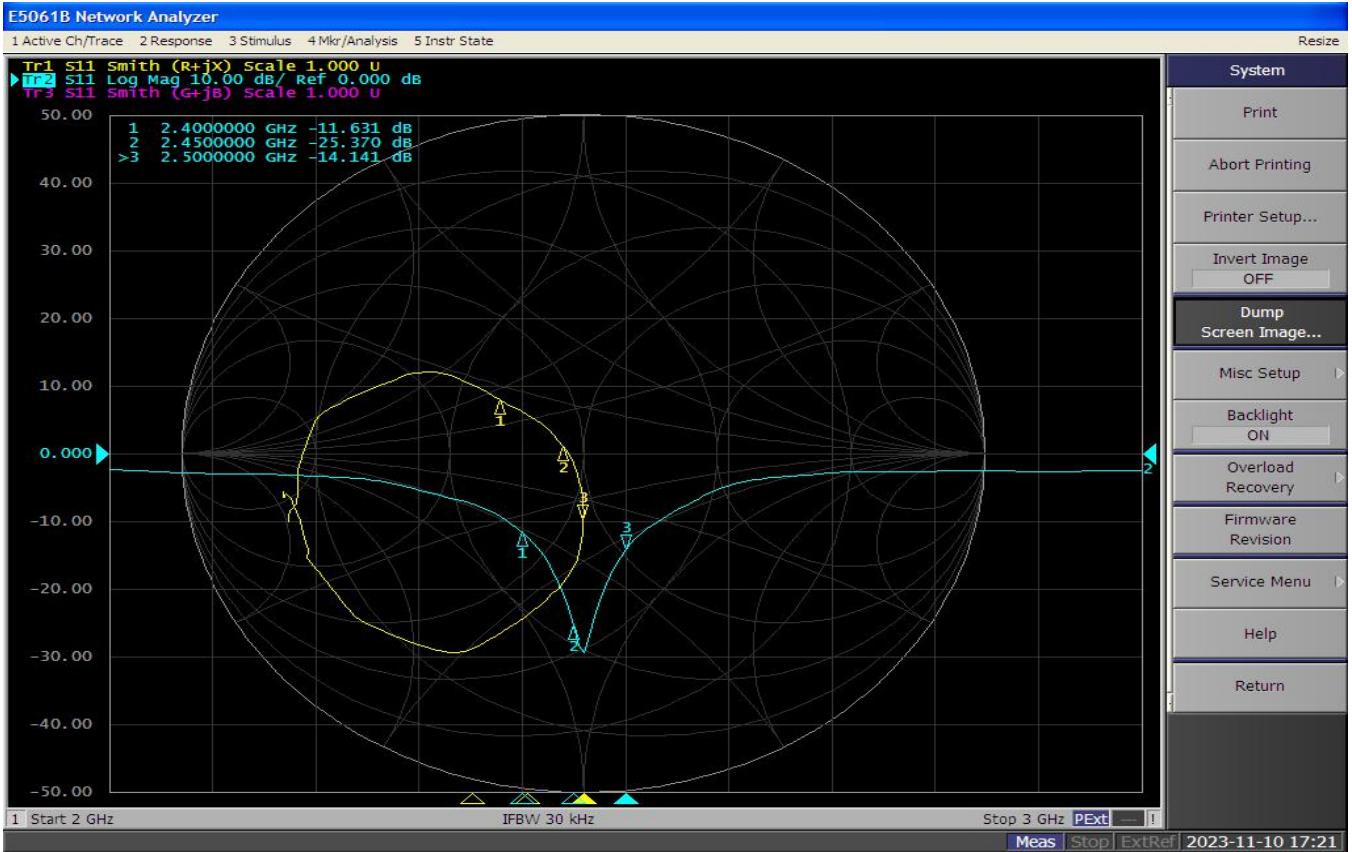

2.2 Gain and efficiency test

2.2.1 Test Position

Yuande microwave anechoic chamber, the test frequency range is 400MHz-6GHz.

2.2.2 Test equipment

Network analyzer, standard horn antenna, multi-probe near field antenna test system, test computer, etc


2.2.3 Results Summary



In the microwave anechoic chamber, the measured values related to efficiency and gain are shown in the table below.

Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	1.38	37
2410	1.43	38
2420	1.44	38
2430	1.47	38
2440	1.52	39
2450	1.54	39
2460	1.61	41

2470	1.64	40
2480	1.63	39
2490	1.65	39
2500	1.64	38

2.2.4 Radiation Pattern Results

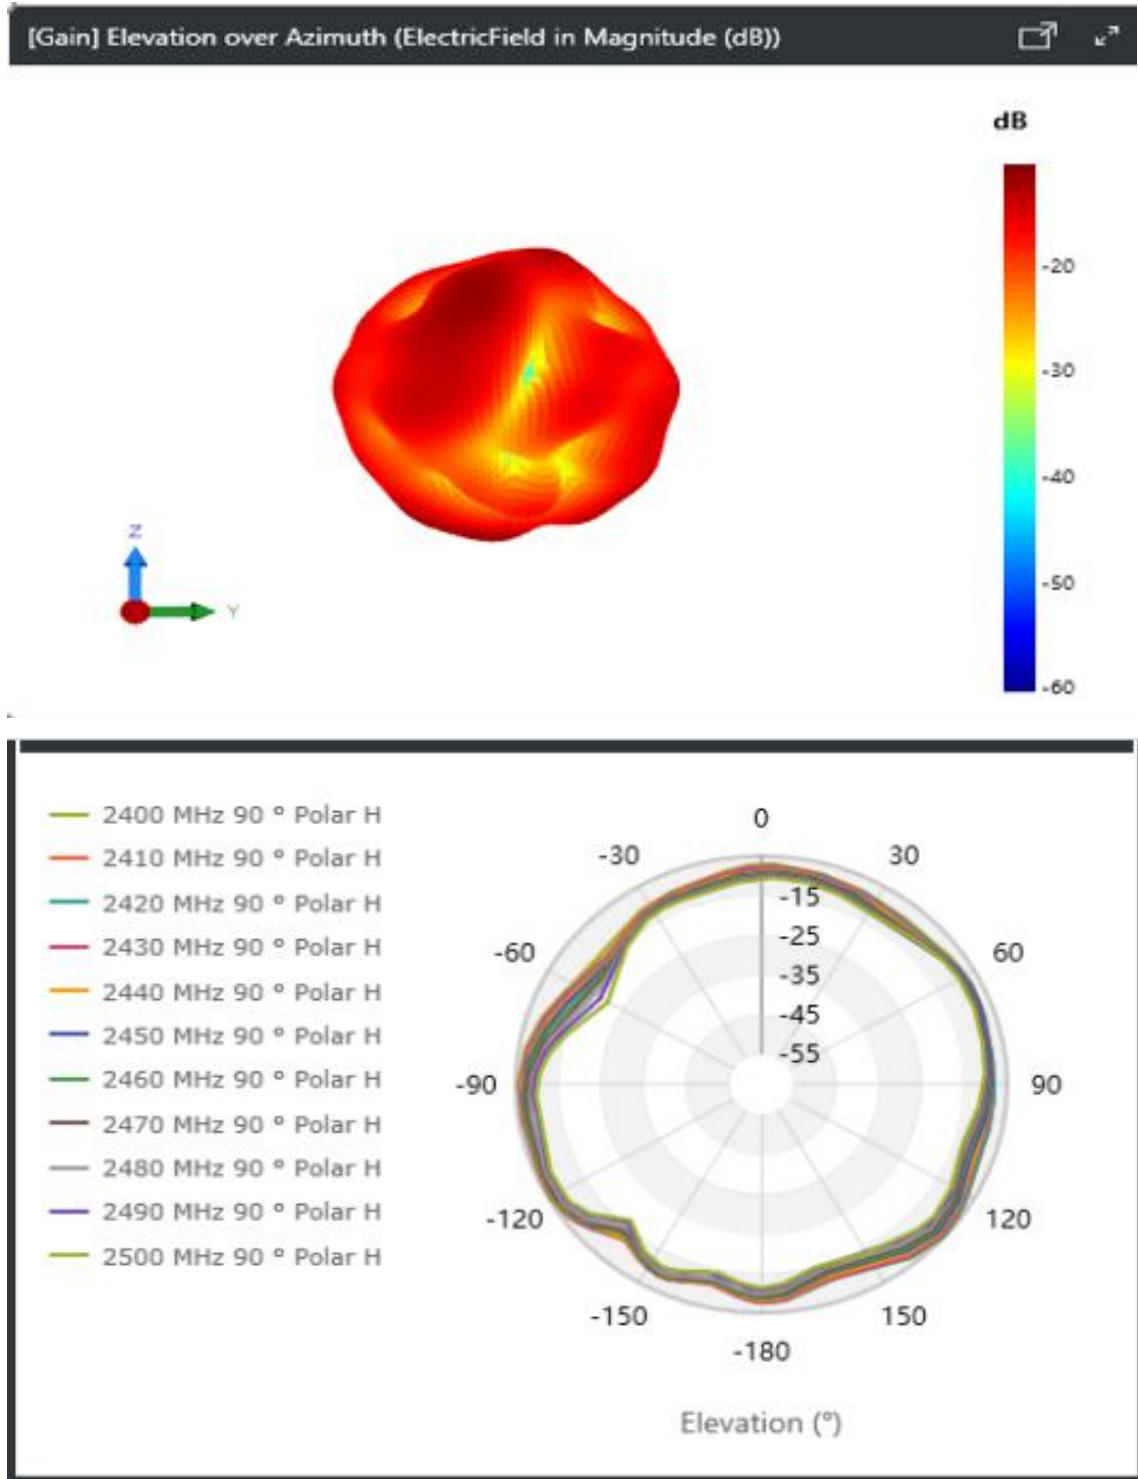

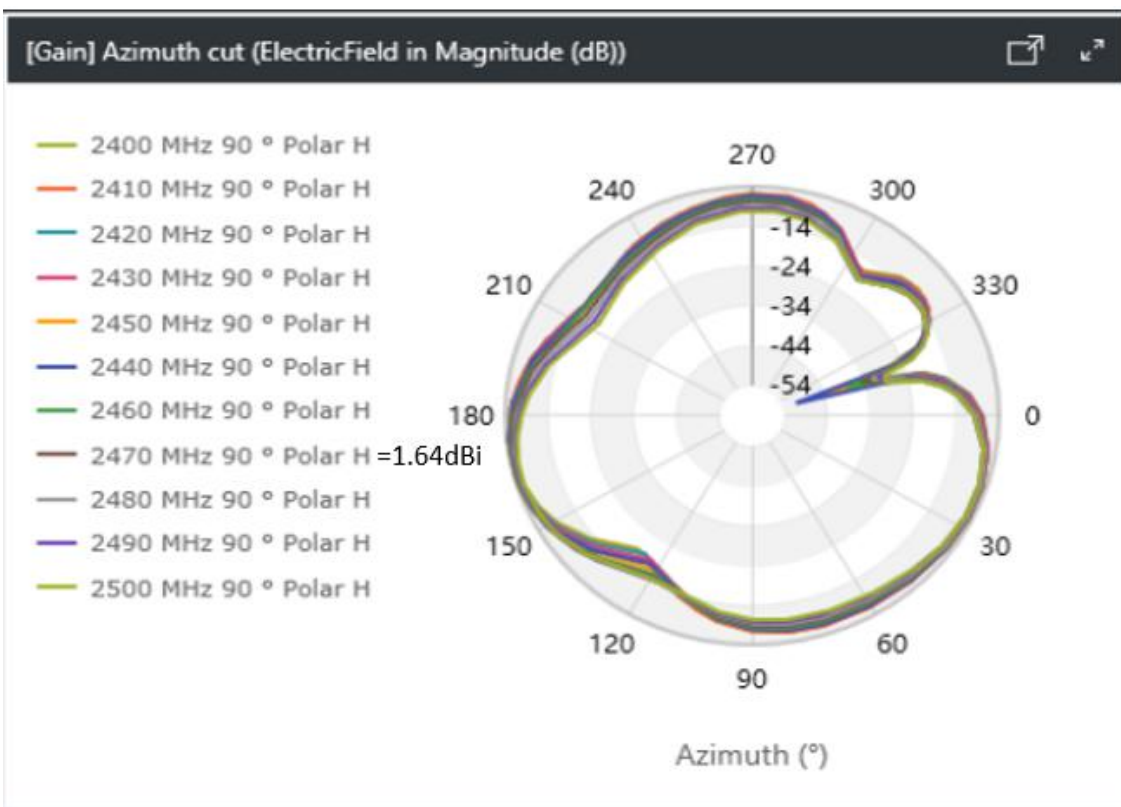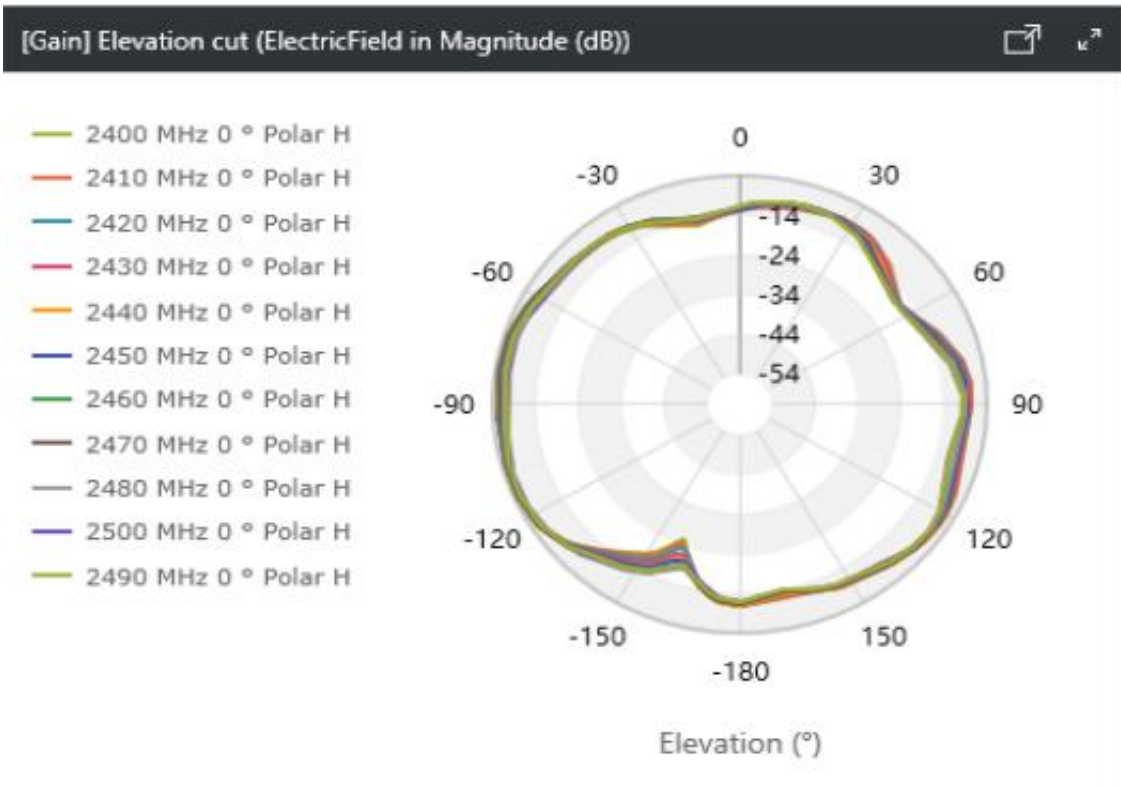

3、 Conclusion

This antenna is designed on the basis of the prototype provided by the customer. The above electrical performance parameters are tested under the environmental treatment conditions of the test prototype. The electrical parameters and structural performance have met the technical requirements. Please confirm!