

Emissions Test Report

EUT Name: Wireless Audio Headset

Model No.: Ear Force Stealth 700X

CFR 47 Part 15.247:2017 and RSS-247:2017

Prepared for:

Voyetra Turtle Beach, Inc.
100 Summit Lake Drive, Suite 100
Valhalla, New York, 10595 USA

Prepared by:

TUV Rheinland of North America, Inc.
1279 Quarry Lane, Ste. A
Pleasanton, CA 94566 U.S.A.
Tel: (925) 249-9123
Fax: (925) 249-9124
<http://www.tuv.com/>

Report/Issue Date: October 12, 2017
Report Number: 31763009.001
Project Number: 0000150094
Revision Number 1

Revisions

Revision No.	Date MM/DD/YYYY	Reason for Change	Author
0	09/18/2017	Original Document	N/A
1	10/12/2017	Remove Frequency Hopping Information	J. Luong

Note: Latest revision report will replace all previous reports.

Statement of Compliance

Manufacturer: Voyetra Turtle Beach, Inc.
100 Summit Lake Drive, Suite 100
Valhalla, New York, 10595 USA
Requester / Applicant: Tim Blaney
Name of Equipment: Wireless Audio Headset
Model No. Ear Force Stealth 700X (TB300-2770-01)
Type of Equipment: Intentional Radiator
Application of Regulations: CFR 47 Part 15.247:2017 and RSS-247:2017
Test Dates: June 28, 2017 to August 12, 2017

Guidance Documents:
Emissions: ANSI C63.10-2013

Test Methods:
Emissions: ANSI C63.10-2013

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report contains data that are not covered by A2LA accreditation. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

Jeremy Luong October 12, 2017
Test Engineer Date

David Spencer October 12, 2017
Laboratory Signature Date



Testing Cert #3331.02



US1131

**INDUSTRY
CANADA**

2932M-1

Table of Contents

1	Executive Summary	7
1.1	Scope	7
1.2	Purpose	7
1.3	Summary of Test Results	8
1.4	Special Accessories	8
1.5	Equipment Modifications	8
2	Laboratory Information	9
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	NIST / A2LA	9
2.1.3	Canada – Industry Canada	9
2.1.4	Japan – VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	9
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.2.2	Immunity Test Facility	10
2.3	Measurement Uncertainty	11
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty Emissions	11
2.3.3	Measurement Uncertainty Immunity	12
2.4	Calibration Traceability	12
3	Product Information	13
3.1	Product Description	13
3.2	Equipment Configuration	13
3.3	Operating Mode	13
3.4	Unique Antenna Connector	14
3.5	Duty Cycle	15
4	Emission Requirements – 2400 MHz to 2483.5 MHz Band	16
4.1	Output Power Requirements	16
4.1.1	Test Method	16
4.1.2	Results	17
4.2	Occupied Bandwidth	25
4.2.1	Test Method	25
4.2.2	Results	26
		28
4.3	Peak Power Spectral Density	33
4.3.1	Test Method	33
4.3.2	Results	33
4.4	Out of Band Emission requirements	37
4.4.1	Results	37

Table of Contents

4.5	Transmitter Spurious Emissions	51
4.5.1	Test Methodology	51
4.5.2	Transmitter Spurious Emission Limit	52
4.5.3	Test Results	52
4.5.4	Sample Calculation	66
4.6	AC Conducted Emissions	67
4.6.1	Test Methodology	67
4.6.2	Test Results	67
5	<i>Test Equipment Use List</i>	72
5.1	Equipment List	72
6	<i>EMC Test Plan</i>	73
6.1	Introduction	73
6.2	Customer	73
6.3	Equipment Under Test (EUT)	74
6.4	Test Specifications	77

Index of Tables

Table 1: Summary of Test Results	8
Table 2: RF Output Power at the Antenna Port – Test Results	17
Table 3: Occupied Bandwidth – Test Results	26
Table 4: DTS Occupied Bandwidth – Test Results	27
Table 5: Peak Power Spectral Density – Test Results	34
Table 6: Band Edge Requirements – Test Results	37
Table 7: Transmit Spurious Emission at Restricted Band Edge Requirements	53
Table 8: AC Conducted Emissions – Test Results	67
Table 9: Customer Information	73
Table 10: Technical Contact Information	73
Table 11: EUT Specifications	74
Table 12: Antenna Information	74
Table 13: Interface Specifications	75
Table 14: Supported Equipment	75
Table 15: Description of Sample used for Testing	75
Table 16: Description of Test Configuration used for Radiated Measurement	75
Table 17: Final Test Mode for 2402 MHz to 2480MHz Channels	76
Table 18: Test Specifications	77

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247:2017 and RSS-247:2017 based on the results of testing performed on June 28, 2017 to August 12, 2017 on the Wireless Audio Headset Model Ear Force Stealth 700X manufactured by Voyetra Turtle Beach, Inc. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

The report documents the 2.4 GHz Bluetooth radio characteristics for the Ear Force Stealth 700X.

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C63.4:2014/ ANSI C63.10:2013	Test Parameters	Measured Value	Result
2402 MHz to 2480 MHz Band				
Spurious Emission in Transmitted Mode	CFR47 15.209, CFR47 15.247 (d) RSS-GEN Sect.8.9, RSS 247 Sect. 6.2.1.2	Class B	-7.86 dB (Margin)	Complied
Restricted Bands of Operation	CFR47 15.205, RSS-Gen Sect.8.10	Class B		Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GenSect.8.8	Class B	-15.64 dB (Margin)	N/A
Occupied Bandwidth	CFR47 15.247 (a1), RSS GEN Sect.6.6	≥ 500 kHz	20dB BW = 859 kHz 99% BW = 797 kHz DTS BW = 629 kHz	Complied
Maximum Transmitted Power	CFR47 15.247 (b), RSS 247 Sect. 5.4.4, 6.2.4.1	30 dBm w/ 6 dBi antenna	1.65 mW (2.19 dBm)	Complied
Peak Power Spectral Density	CFR47 15.247 (e), RSS 247 Sect. 5.2.2	8 dBm/ 3 kHz	-14.31 dBm	Complied
Out of Band Emission	CFR47 15.247 (d), RSS 247 Sect. 5.5	< -20 dBr	- 22.55 dBr (-47.96 dBm at 4959.5 MHz)	Complied

Note: 1. Note: Since Ear Force Stealth 700X supports both BLE and FHSS Bluetooth, Ear Force Stealth 700X will demonstrate compliance to the rules required for DTS per KDB 453039.
2. This report is only documented for 2402 – 2480 MHz Bluetooth radio.

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

None

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission



TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 is recognized by the commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (US1131). The laboratory scope of accreditation includes: Title 47 CFR Parts 15, 18, and 90. The accreditation is updated every 3 years.

2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2005 and ISO 9002 (Lab Code 3331.02). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Canada – Industry Canada



TUV Rheinland of North America at the 1279 Quarry Ln, Pleasanton, CA 94566 address is accredited by Industry Canada for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by Industry Canada (File Number 2932M). This reference number is the indication to the Industry Canada Certification Officers that the site meets the requirements of RSS 212, Issue 1 (Provisional). The accreditation is updated every 3 years.

2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at 1279 Quarry Ln, Pleasanton, CA 94566 has been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0268

2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member country.

2.2 Test Facilities

All of the test facilities are located at 1279 Quarry Lane, Pleasanton, California 94566, USA.

2.2.1 Emission Test Facility

The Semi-Anechoic chamber and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 and 5 meters. The site is listed with the FCC and accredited by A2LA (Lab Code 3331.02). The 3/5-meter semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4-2014, at a test distance of 3 meter and 5 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7 m x 4.8 m x 3.175 mm thick aluminum floor connected to PE ground.

For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of 10^9 Ohms/square on a 1.6 m x 0.8 m x 0.8 m high non-conductive table with a 3.175 mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470-k Ω resistors. The Vertical Coupling Plane consists of an aluminum plate 50 cm x 50 cm x 3.175 mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470-k Ω resistors.

For EFT, Surge, PQF, the HCP and VCP are removed.

RF Field Immunity testing is performed in a 7.3m x 4.3m x 4.1m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.8m x 3.7m x 3.175mm thick aluminum ground plane.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dB μ V/m)

$$25 \text{ dB}\mu\text{V/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dB}\mu\text{V/m}$$

2.3.2 Measurement Uncertainty Emissions

Per CISPR 16-4-2	U _{lab}	U _{cispr}
Radiated Disturbance @ 10 meters		
30 – 1,000 MHz	2.25 dB	4.51 dB
Radiated Disturbance @ 3 meters		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 18 GHz	2.47 dB	4.93 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	1.09 dB	2.18 dB
Disturbance Power		
30 MHz – 300 MHz	3.92 dB	4.3 dB

Voltech PM6000A

The estimated combined standard uncertainty for harmonic current and flicker measurements is $\pm 5.0\%$.	Per CISPR 16-4-2 Methods
--	--------------------------

2.3.3 Measurement Uncertainty Immunity

The estimated combined standard uncertainty for ESD immunity measurements is $\pm 8.2\%$.	Per IEC 61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is ± 4.10 dB.	Per IEC 61000-4-3
The estimated combined standard uncertainty for conducted immunity measurements with CDN is ± 3.66 dB	Per IEC 61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity is $\pm 11.6\%$.	Per IEC 61000-4-8

Thermo KeyTek EMC Pro

The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 5.84\%$.
The estimated combined standard uncertainty for surge immunity measurements is $\pm 5.84\%$.
The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 3.48\%$.

Measurement Uncertainty – Radio Testing

The estimated combined standard uncertainty for frequency error measurements is ± 3.88 Hz
The estimated combined standard uncertainty for carrier power measurements is ± 0.7 dB.
The estimated combined standard uncertainty for adjacent channel power measurements is ± 1.47 dB.
The estimated combined standard uncertainty for modulation frequency response measurements is ± 0.46 dB.
The estimated combined standard uncertainty for transmitter conducted emission measurements is ± 2.06 dB

The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005.

3 Product Information

3.1 Product Description

The Stealth 700X is a completely wireless Xbox One audio gaming headset. It wirelessly connects directly to the Xbox One console over either a 2.4 GHz or 5.0 GHz Wi-Fi link. The functionality in the headset consists of 50mm speaker drivers, a flip up non-removable microphone, microphone monitoring (adjustable via EFAH) and game/chat mix controls on the headset. Additional wireless functionality includes a Bluetooth radio that provides simultaneous connection to a Turtle Beach mobile application and device audio profile for communication with a mobile phone. Additionally, it has a ProSpecs alternative glasses relief ear pad design. With the Microsoft integrated radio module, this headset is also capable of working with compatible Windows PCs in the future.

3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of a EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of a EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.


The final operating mode was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.4 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.4.1 Results

The Ear Force Stealth 700X uses the permanently attached PCB trace antenna inside the device for operation at 2.4 GHz. See EUT Photo for details. There is no external antenna connection available.

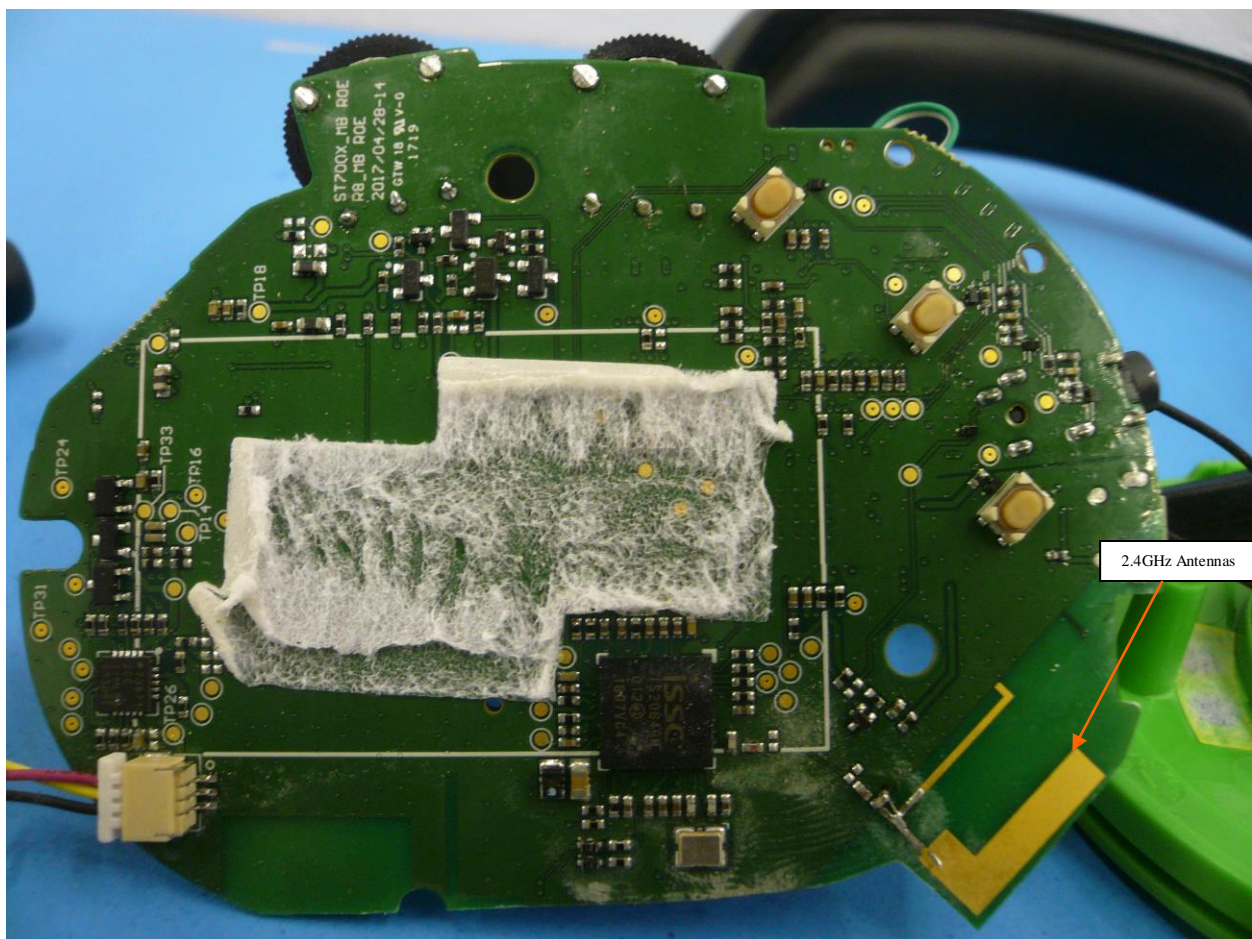

3.5 Duty Cycle

The Ear Force Stealth 700X, SN: PP #1 was measured.

3.5.1 Results

Mode	Duty Cycle (%)	Duty Factor (dB)
DH1	30.4	5.17
DH3	65.4	1.84
DH5	76.9	1.14
2DH1	30.9	5.10
2DH3	65.6	1.83
2DH5	77.0	1.14
3DH1	31.0	5.09
3DH3	65.5	1.84
3DH5	77.0	1.14
BLE	15.1	8.21
Notes: These modes represent the maximum duty cycle; in which the Bluetooth module will operate.		

4 Emission Requirements – 2400 MHz to 2483.5 MHz Band

Testing was performed in accordance with CFR 47 Part 15.247: 2017 and RSS 247 2017. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in Section 8 of the standard were used.

4.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.

The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b):2017 and RSS 247: 2017 Sect. 5.4.4.


The maximum transmitted power in the band 2400-2483.5 MHz: 1 W

4.1.1 Test Method

The ANSI C63.10-2013 Section 11.9.2.2.2. Conducted method was used to measure the channel power output. The preliminary investigation was performed at different data rate to determine the highest power output for each mode. This test was conducted on 3 channels on Ear Force Stealth 700X, SN: PP #1. The worst mode result indicated below.

Note: Since Ear Force Stealth 700X supports both BLE and FHSS Bluetooth, Ear Force Stealth 700X will demonstrate compliance to the rules required for DTS per KDB 453039.

Test Setup:

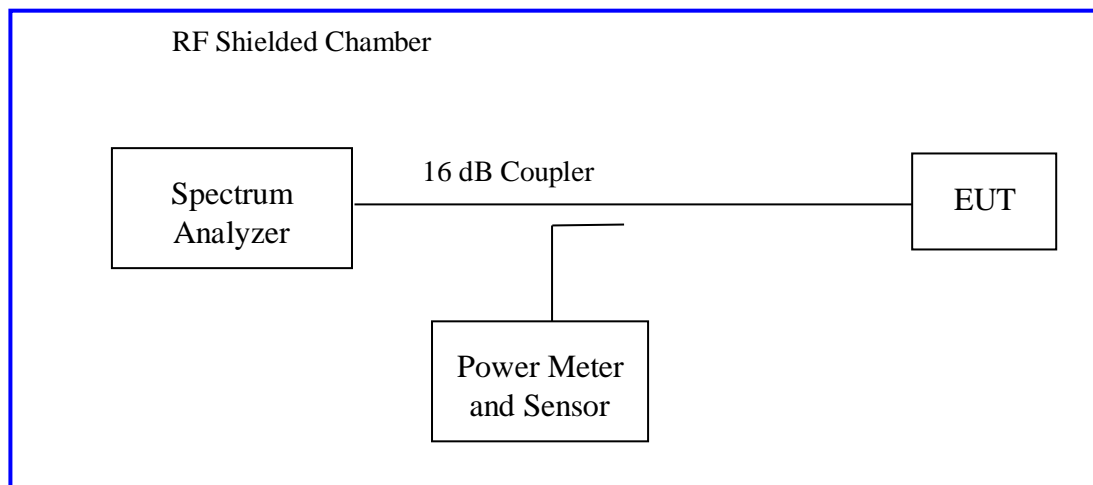

4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 2: RF Output Power at the Antenna Port – Test Results

Test Conditions: Conducted Measurement, Normal Temperature			Date: July 10, 2017	
Antenna Type: Integrated Antenna			Power Setting: Fixed	
Max. Antenna Gain: 2.8 dBi			Signal State: Modulated	
Duty Cycle: See Sect. 3.5			Data Rate: BDR,EDR and BLE	
Ambient Temp.: 23° C			Relative Humidity: 38 %RH	
Results				
Mode	Operating Channel	Limit [dBm]	Power [dBm]	Margin [dB]
DH1	2402 MHz	+30.00	-0.23	-30.23
	2442 MHz	+30.00	-0.99	-30.99
	2480 MHz	+30.00	-1.60	-31.6
DH3	2402 MHz	+30.00	-0.38	-30.38
	2442 MHz	+30.00	-1.28	-31.28
	2480 MHz	+30.00	-1.84	-31.84
DH5	2402 MHz	+30.00	-0.41	-30.41
	2442 MHz	+30.00	-1.26	-31.26
	2480 MHz	+30.00	-1.95	-31.95
2-DH1	2402 MHz	+30.00	0.81	-29.19
	2442 MHz	+30.00	-0.11	-30.11
	2480 MHz	+30.00	-0.63	-30.63
2-DH3	2402 MHz	+30.00	0.76	-29.24
	2442 MHz	+30.00	-0.09	-30.09
	2480 MHz	+30.00	-0.79	-30.79
2-DH5	2402 MHz	+30.00	0.62	-29.38
	2442 MHz	+30.00	-0.12	-30.12
	2480 MHz	+30.00	0.78	-29.22

3-DH1	2402 MHz	+30.00	2.19	-27.81
	2442 MHz	+30.00	1.54	-28.46
	2480 MHz	+30.00	0.95	-29.05
3-DH3	2402 MHz	+30.00	0.58	-29.42
	2442 MHz	+30.00	-0.31	-30.31
	2480 MHz	+30.00	-0.86	-30.86
3-DH5	2402 MHz	+30.00	0.52	-29.48
	2442 MHz	+30.00	-0.29	-30.29
	2480 MHz	+30.00	-0.99	-30.99
BLE	2402 MHz	+30.00	0.53	-29.47
	2442 MHz	+30.00	-0.03	-30.03
	2480 MHz	+30.00	-0.76	-30.76

Note: The headset is capable to transmit at BDR, EDR and BLE. The worst case condition at low, middle and high frequencies is shown below using a peak detector.



Figure 1: Maximum Transmitted Power at 2402 MHz, DH1

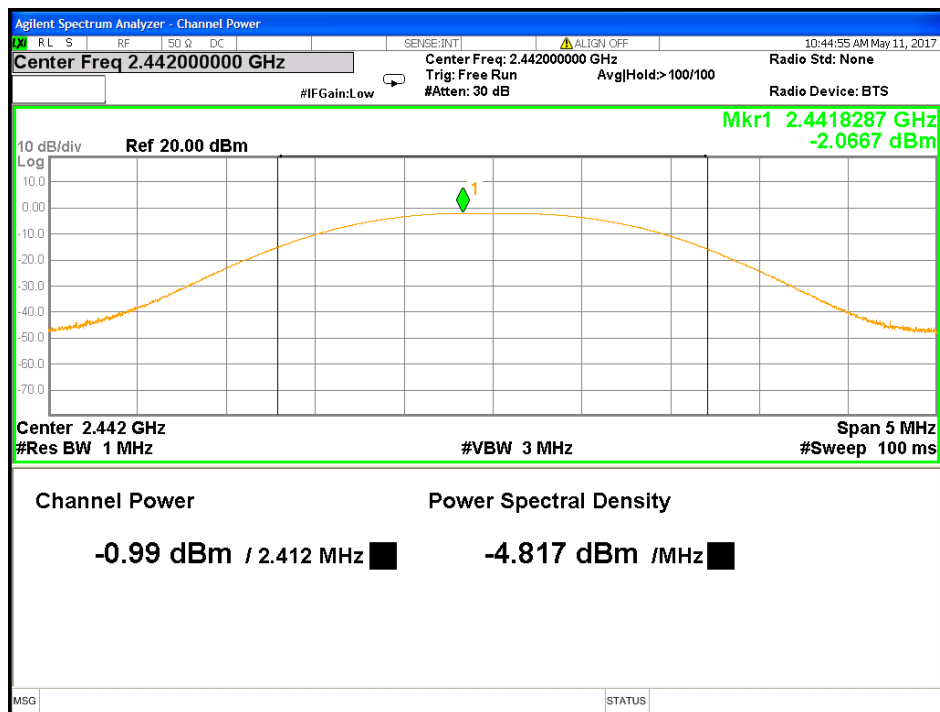


Figure 2: Maximum Transmitted Power at 2442 MHz, DH1

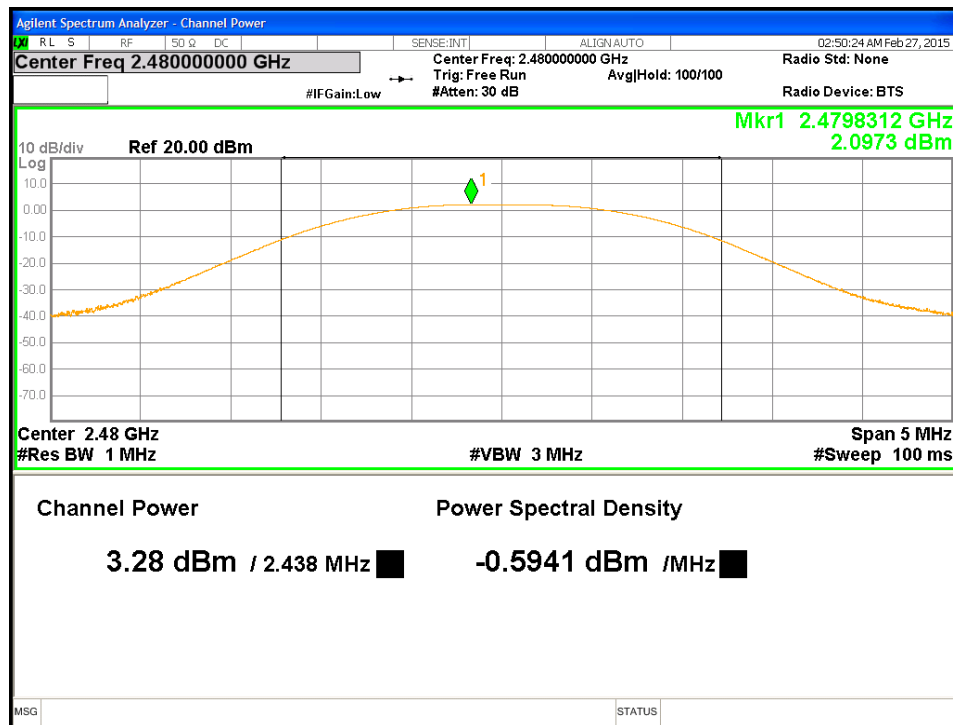


Figure 3: Maximum Transmitted Power at 2480 MHz, DH1

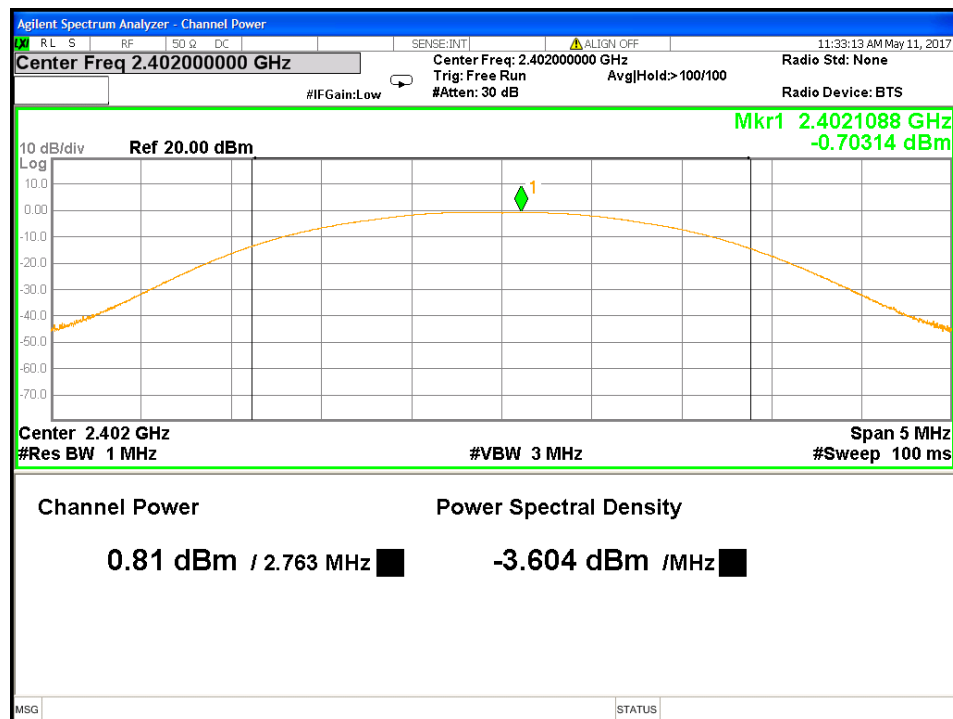


Figure 4: Maximum Transmitted Power at 2402 MHz, 2DH1

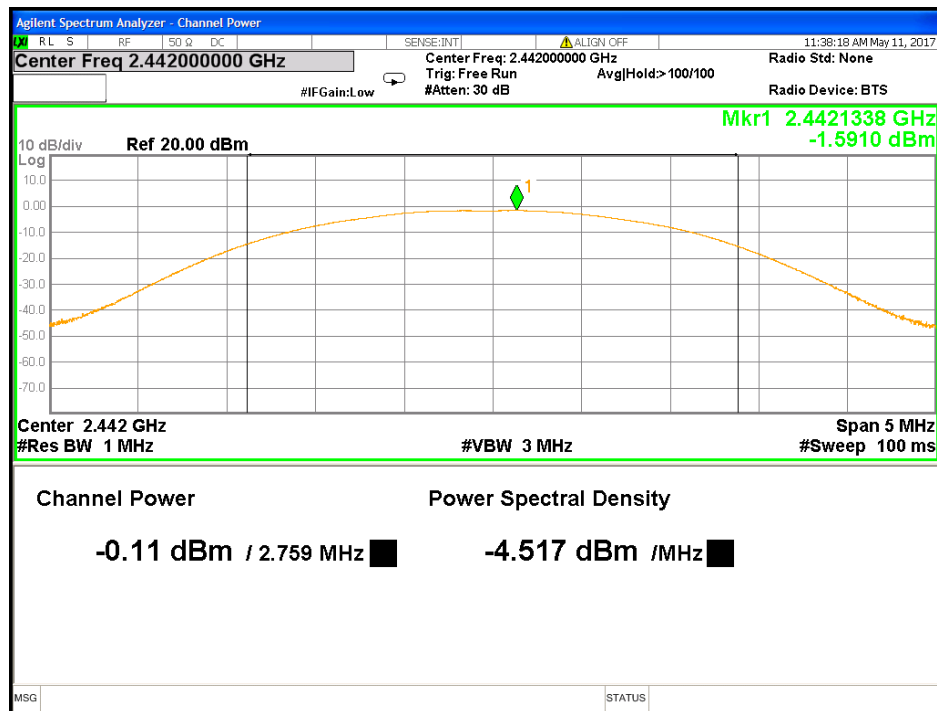


Figure 5: Maximum Transmitted Power at 2442 MHz, 2DH1

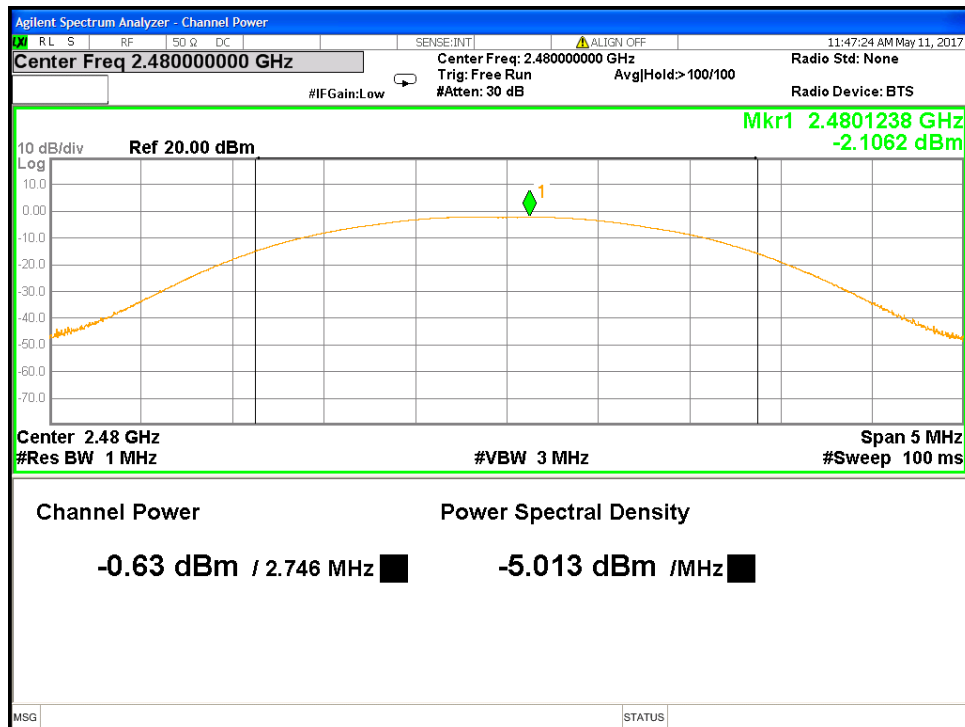


Figure 6: Maximum Transmitted Power at 2480 MHz, 2DH1

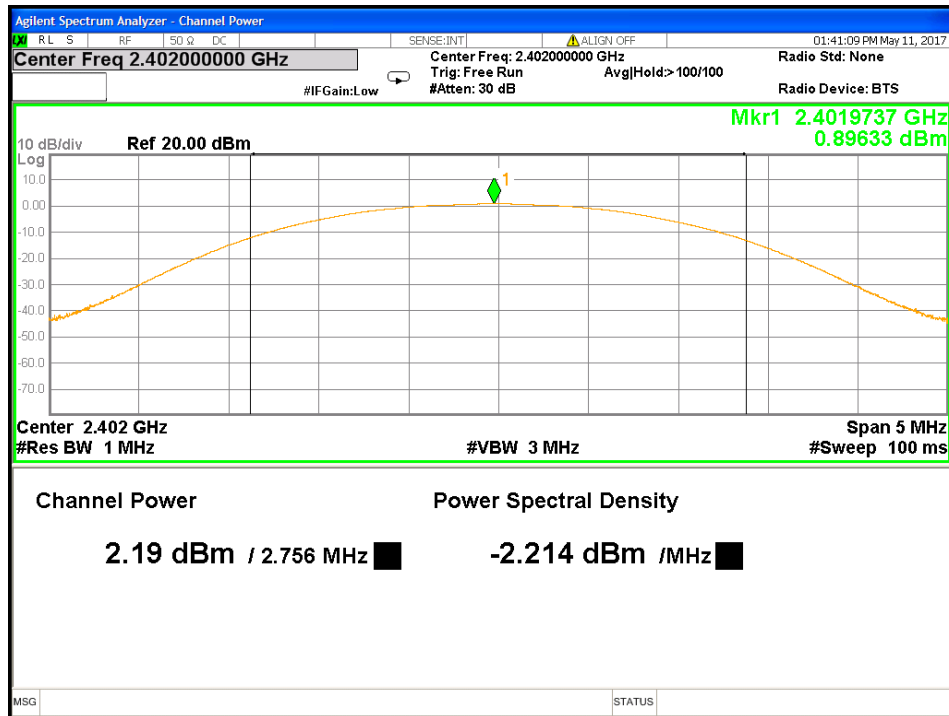


Figure 7: Maximum Transmitted Power at 2402 MHz, 3DH1

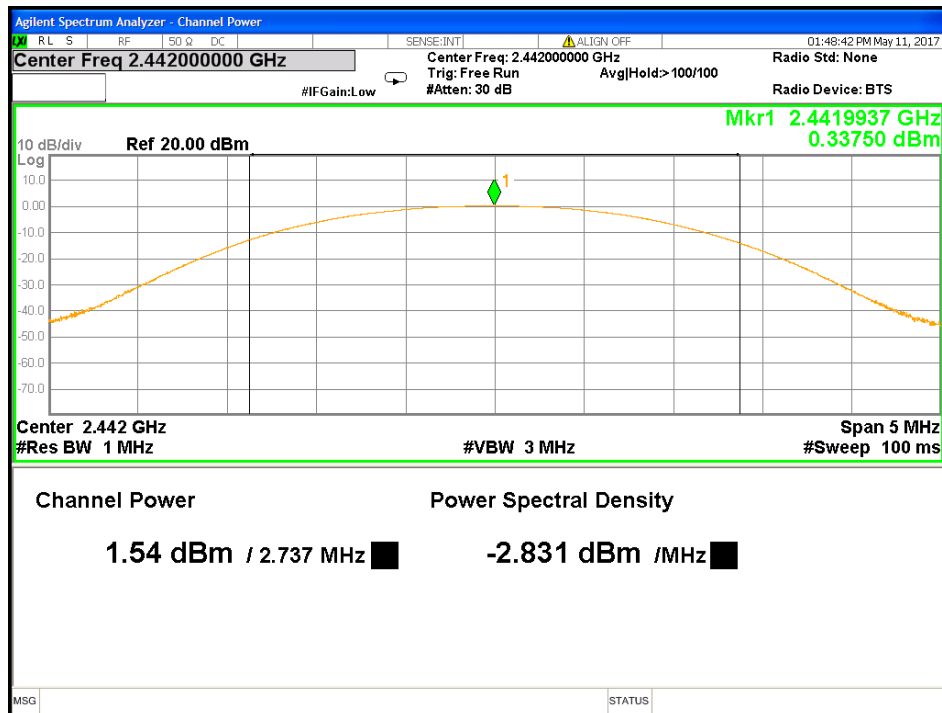


Figure 8: Maximum Transmitted Power at 2442 MHz, 3DH1

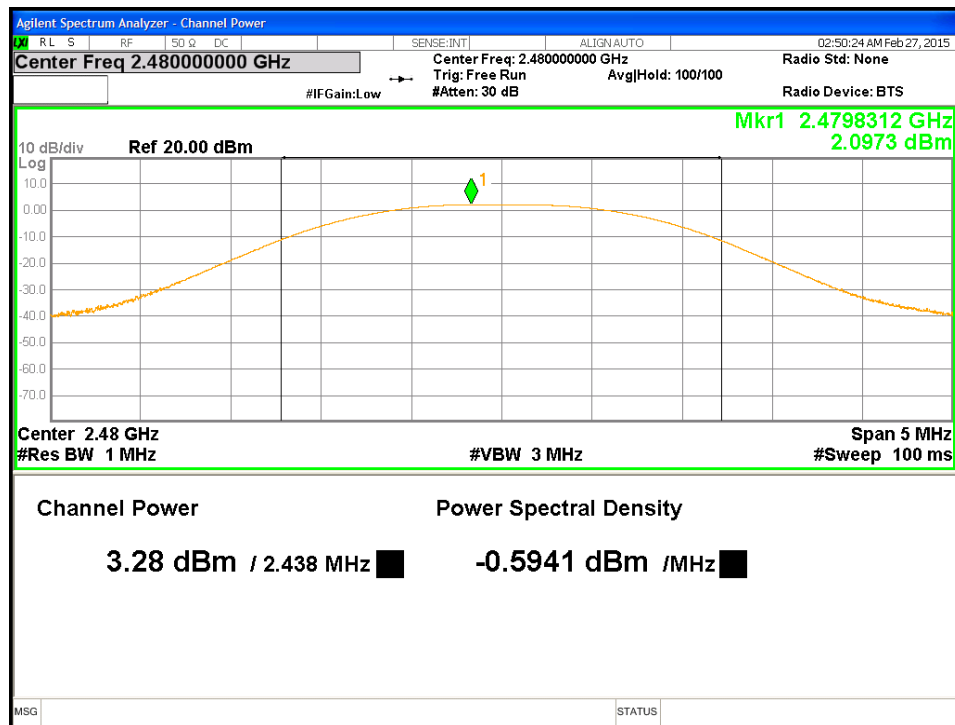


Figure 9: Maximum Transmitted Power at 2480 MHz, 3DH1

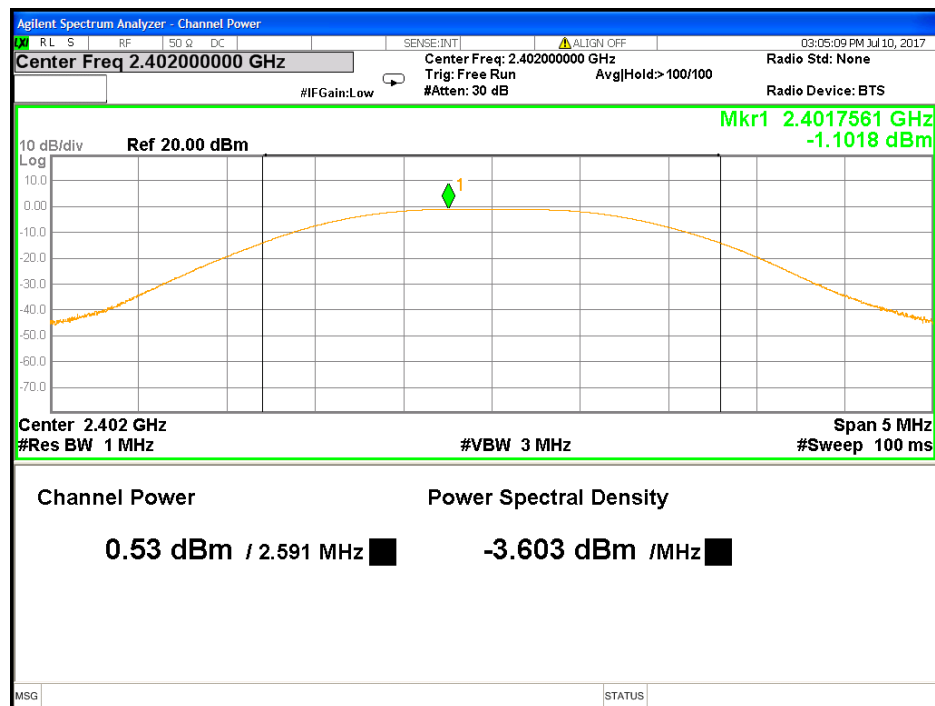


Figure 10: Maximum Transmitted Power at 2402 MHz, BLE

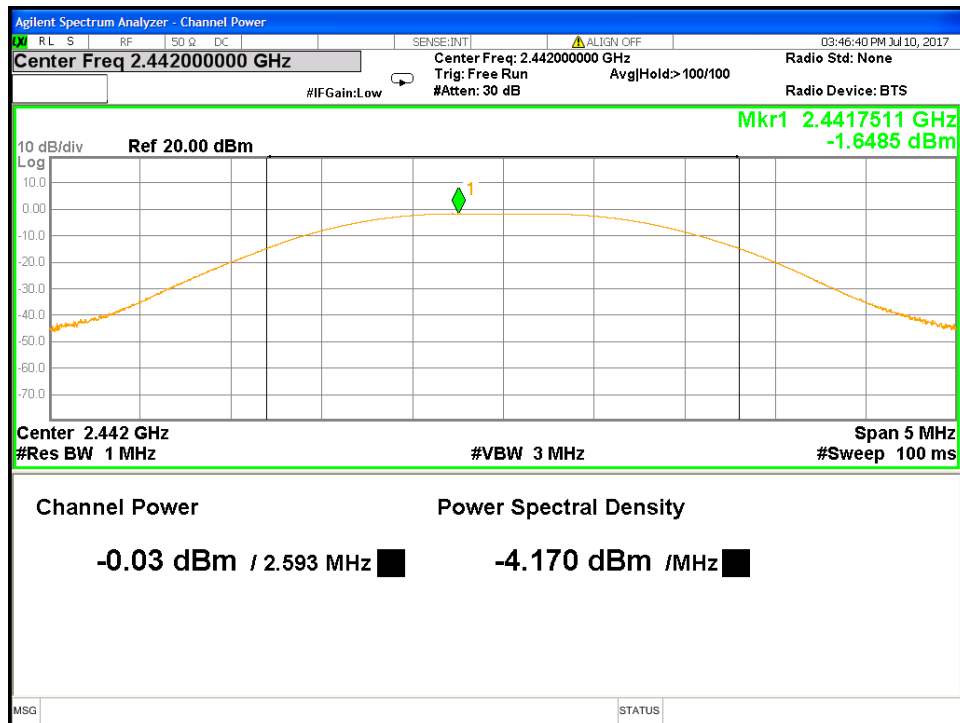


Figure 11: Maximum Transmitted Power at 2442 MHz, BLE



Figure 12: Maximum Transmitted Power at 2480 MHz, BLE

4.2 Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.

The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.

20 dB bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

The 6dB bandwidth is defined the bandwidth of 6dBr from highest transmitted level of the fundamental frequency.


The minimum 6 dB bandwidth shall be at least 500 kHz per Section CFR47 15.247(a2) 2017 and RSS-247 Sect. 5.3(a) Issue 2, 2017.

4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth according to ANSI C63.10:2013 Section 11.8. The measurement was performed with modulation per CFR47 15.247 (a) (2) 2016 and RSS Gen Sect. 6.6 2014. This test was conducted on 3 channels on Ear Force Stealth 700X, SN: PP #1. The worst sample result indicated below.

Note: Since Ear Force Stealth 700X supports both BLE and FHSS Bluetooth, Ear Force Stealth 700X will demonstrate compliance to the rules required for DTS per KDB 453039.

Test Setup:

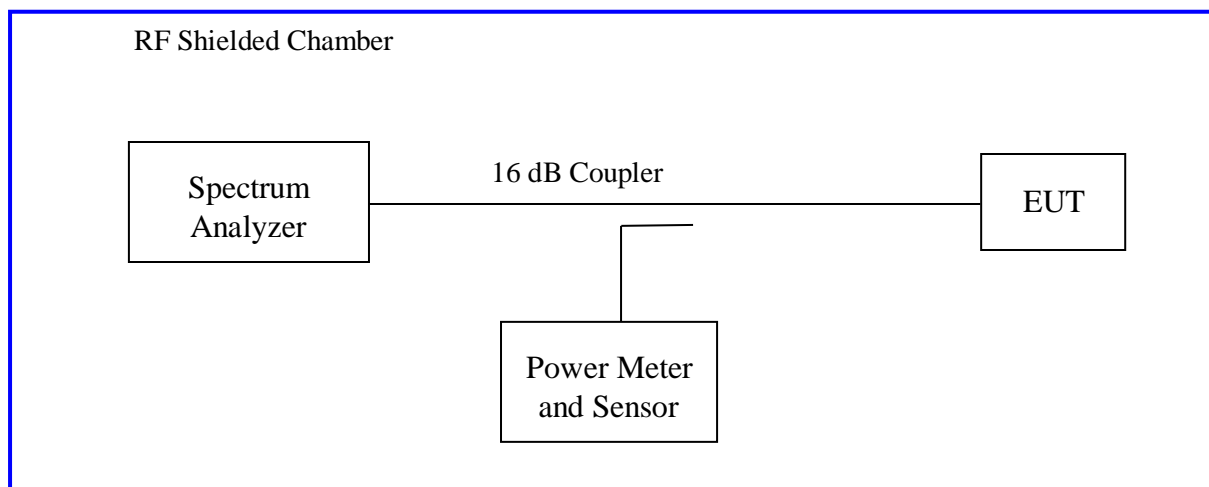

4.2.2 Results

These measurements were used for information only

Table 3: Occupied Bandwidth – Test Results

Test Conditions: Conducted Measurement, Normal Temperature and Voltage only		Date: July 10, 2017	
Antenna Type: Integrated Antenna		Power Setting: Fixed.	
Max. Antenna Gain: +2.8 dBi		Signal State: Modulated	
Duty Cycle: See Sect. 3.5		Data Rate: see below	
Ambient Temp.: 23° C		Relative Humidity: 38 %RH	
Bandwidth for BDR and EDR			
Package	Freq. (MHz)	20dB Bandwidth MHz	99% Bandwidth MHz
DH1	2402	0.859	0.797
	2442	0.859	0.798
	2480	0.864	0.800
DH3	2402	0.923	0.849
	2442	0.922	0.849
	2480	0.923	0.846
DH5	2402	0.927	0.849
	2442	0.925	0.849
	2480	0.920	0.848
2-DH1	2402	1.233	1.156
	2442	1.230	1.154
	2480	1.232	1.154
2-DH3	2402	1.259	1.169
	2442	1.260	1.168
	2480	1.257	1.168
2-DH5	2402	1.248	1.174

	2442	1.250	1.172
	2480	1.249	1.173
3-DH1	2402	1.200	1.143
	2442	1.199	1.143
	2480	1.200	1.142
3-DH3	2402	1.250	1.171
	2442	1.249	1.172
	2480	1.250	1.172
3-DH5	2402	1.253	1.179
	2442	1.249	1.1798
	2480	1.248	1.177
Note: 99% bandwidth and 20dB bandwidth measurements are for information only.			

Table 4: DTS Occupied Bandwidth – Test Results

Test Conditions: Conducted Measurement		Date: July 10, 2017		
Antenna Type: Integrated Antenna		Power Setting: Fixed.		
Max. Antenna Gain: +2.8 dBi		Signal State: Modulated		
Duty Cycle: See Sect. 3.5		Data Rate: see below		
Ambient Temp.: 23° C		Relative Humidity: 38 %RH		
Bandwidth (MHz) for BLE				
Frequency (MHz)	Limit (kHz)	99% BW	6 dB BW	Results
2402	500	1.038	0.643	Pass
2442	500	1.039	0.634	Pass
2480	500	1.039	0.629	Pass
Note: The DTS bandwidths were observed at BLE mode.				

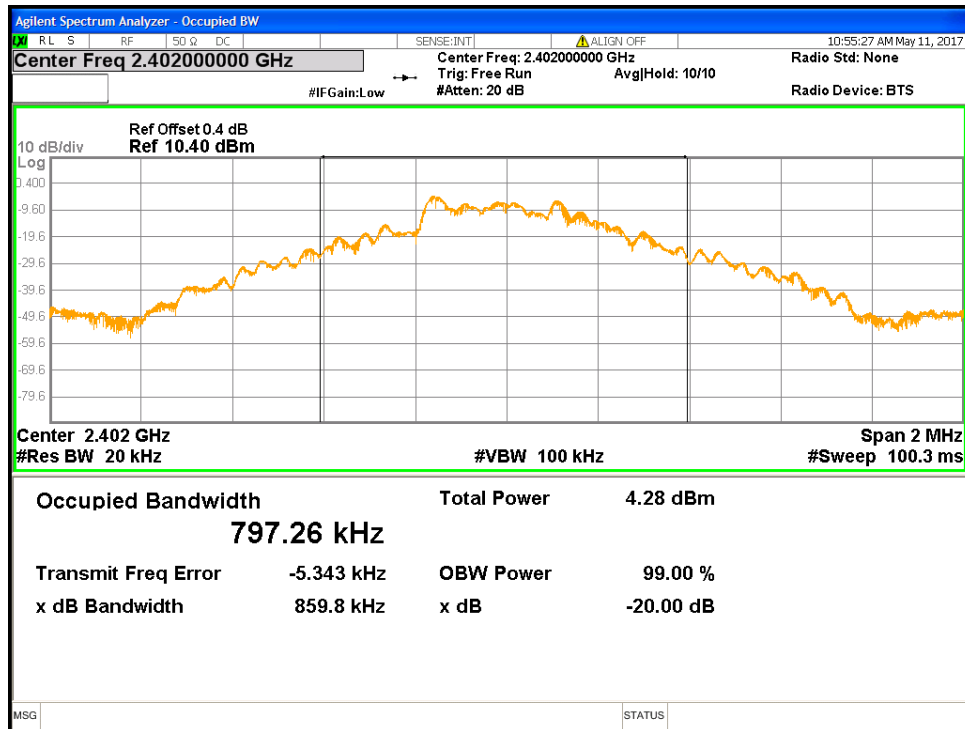


Figure 13: Occupied Bandwidth at 2402 MHz, DH1

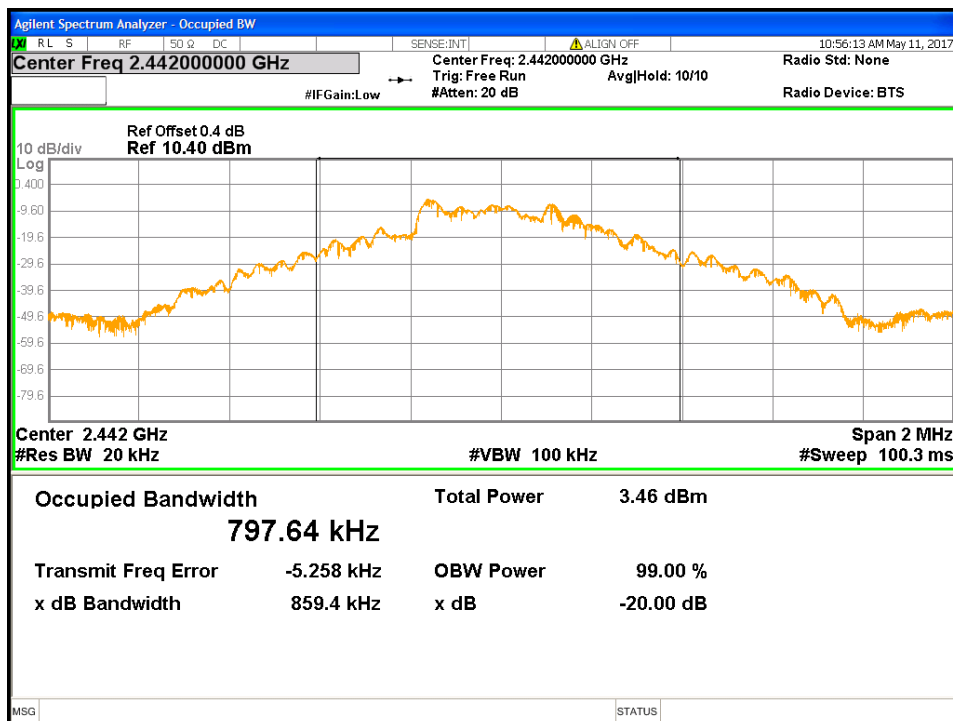


Figure 14: Occupied Bandwidth at 2442 MHz, DH1

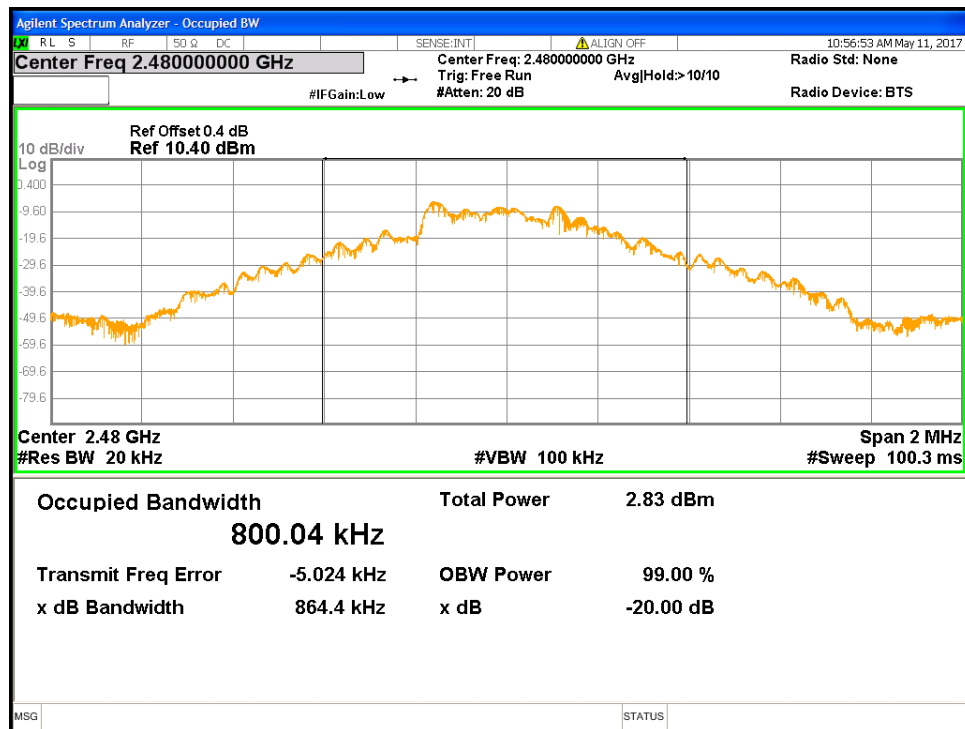


Figure 15: Occupied Bandwidth at 2480 MHz, DH1

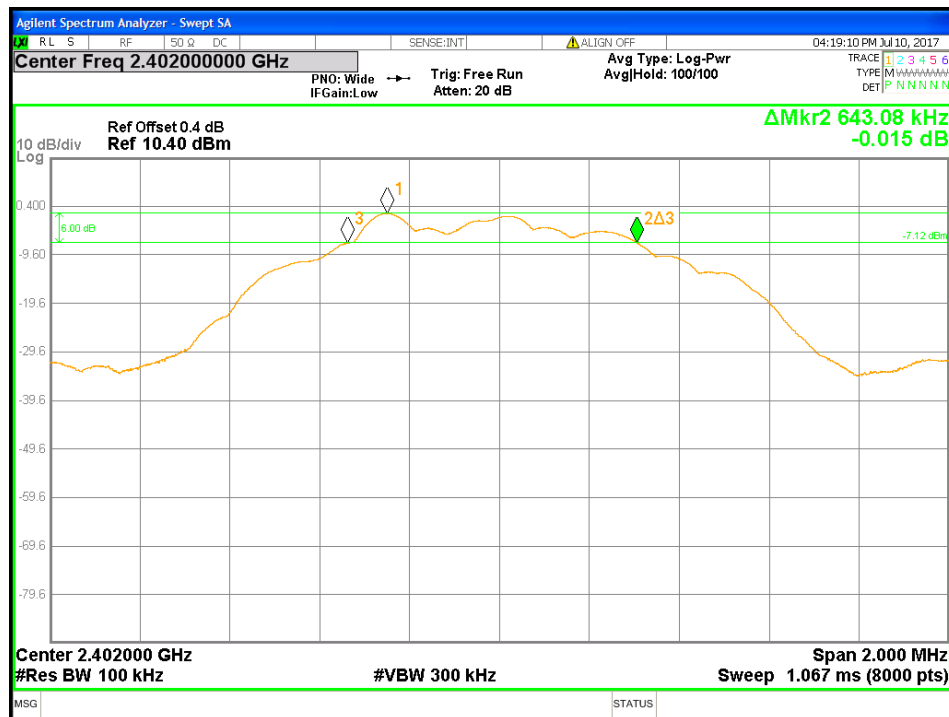


Figure 16: DTS Bandwidth-BLE-2402 MHz

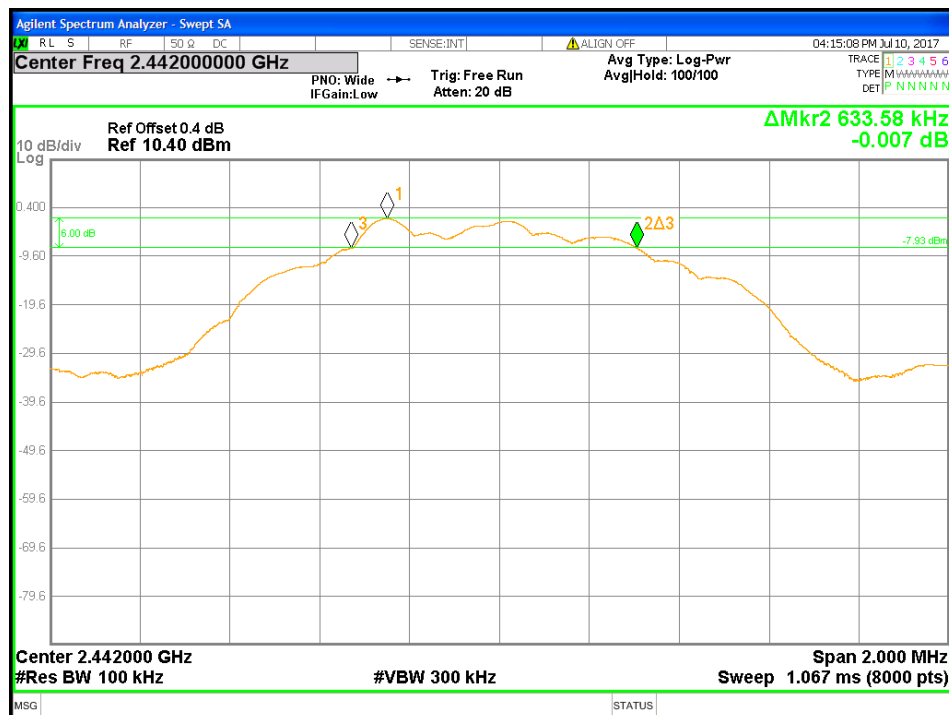


Figure 17: DTS Bandwidth-BLE-2442 MHz

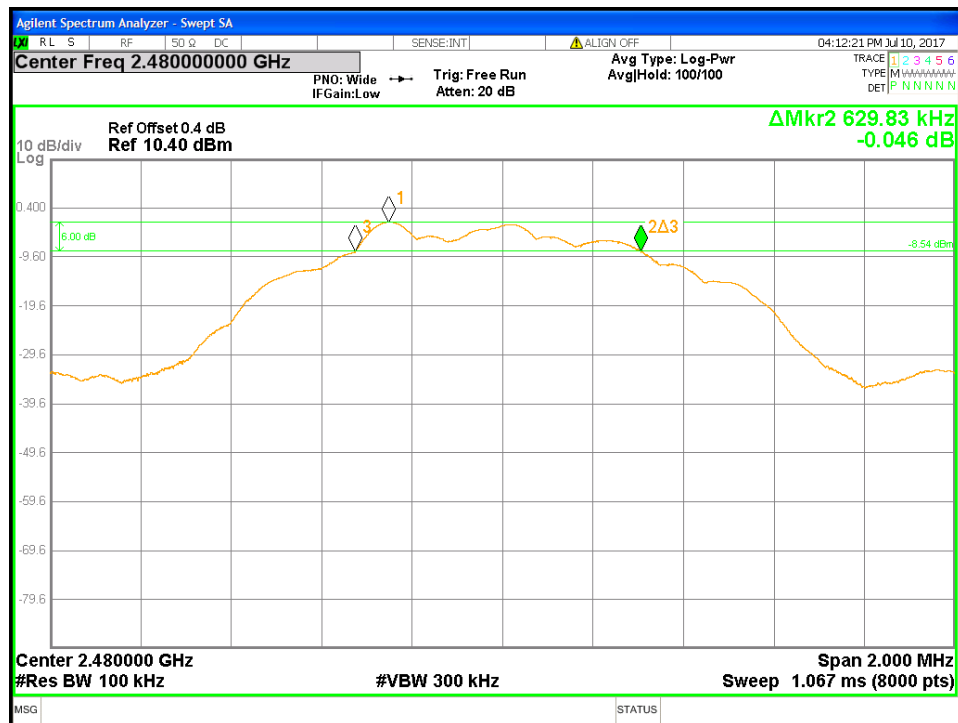


Figure 18: DTS Bandwidth-BLE-2480 MHz

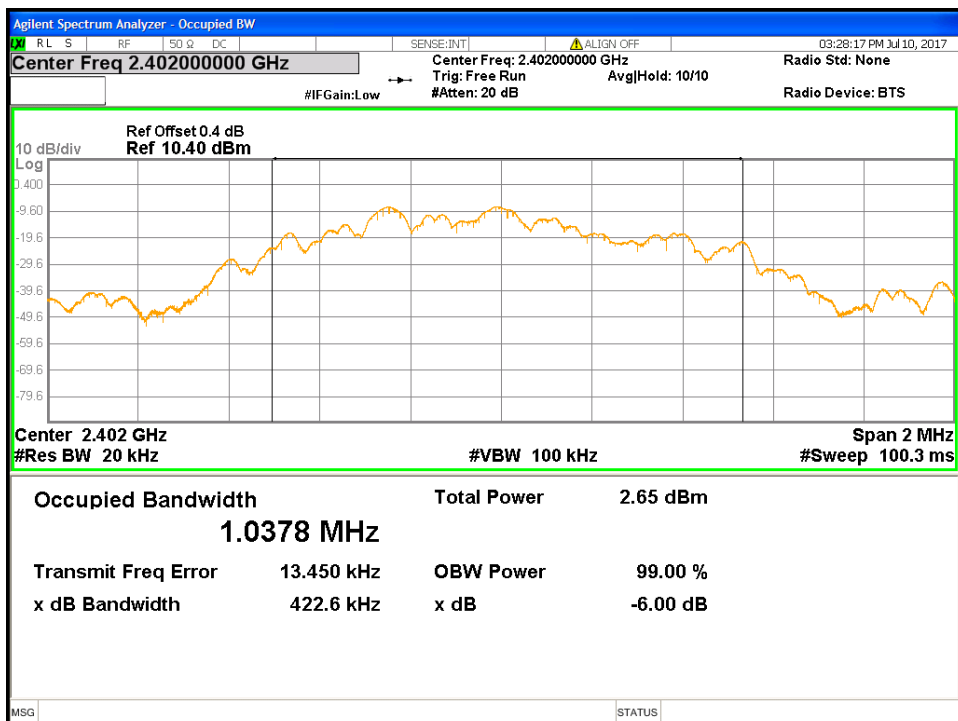


Figure 19: 99% Bandwidth-BLE-2402 MHz

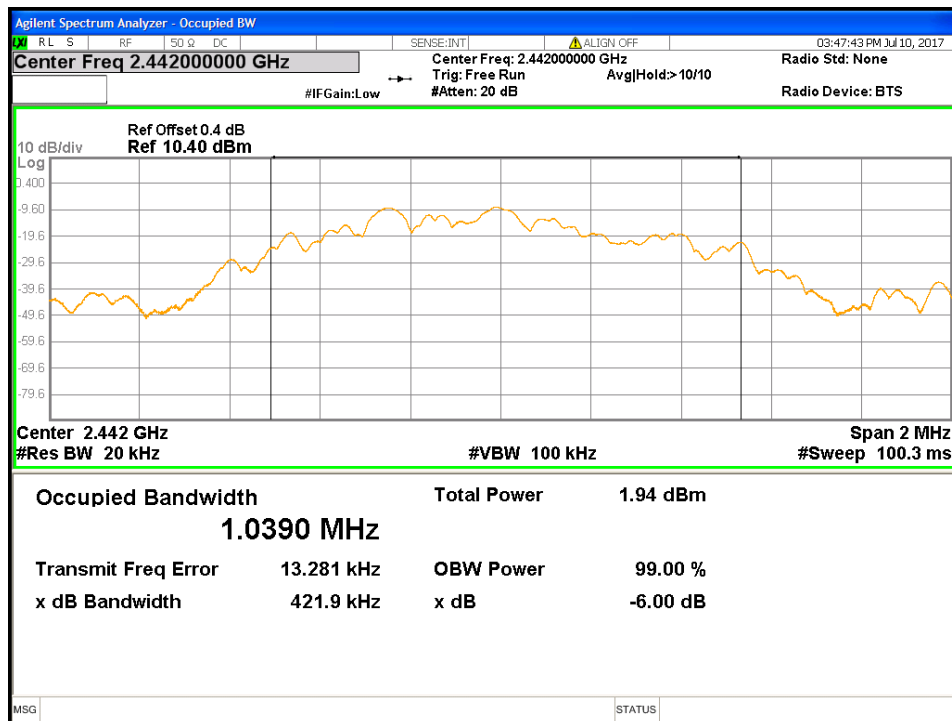


Figure 20: 99% Bandwidth-BLE-2442 MHz

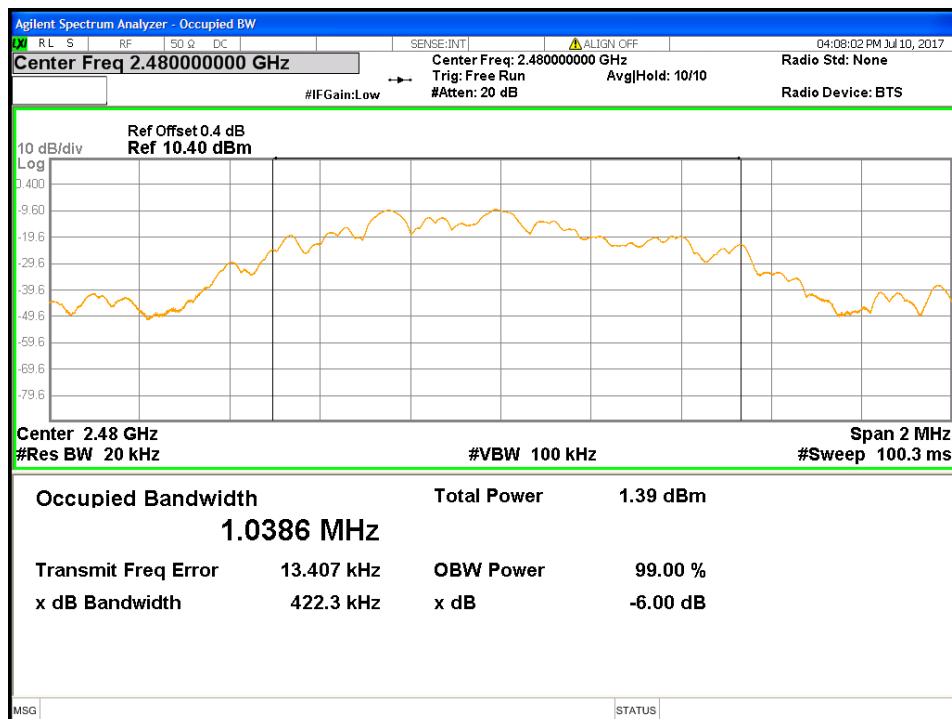


Figure 21: 99% Bandwidth-BLE-2480 MHz

4.3 Peak Power Spectral Density


According to the CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b), the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10-2013 Section 11.10.3. The measurement was performed with modulation per CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b). The pre-evaluation was performed to find the worst modes. The worst findings were conducted on 3 channels in each operating frequency range of 2400 MHz to 2483.5 MHz. The worst sample result indicated below.

Note: Since Ear Force Stealth 700X supports both BLE and FHSS Bluetooth, Ear Force Stealth 700X will demonstrate compliance to the rules required for DTS per KDB 453039

Test Setup:

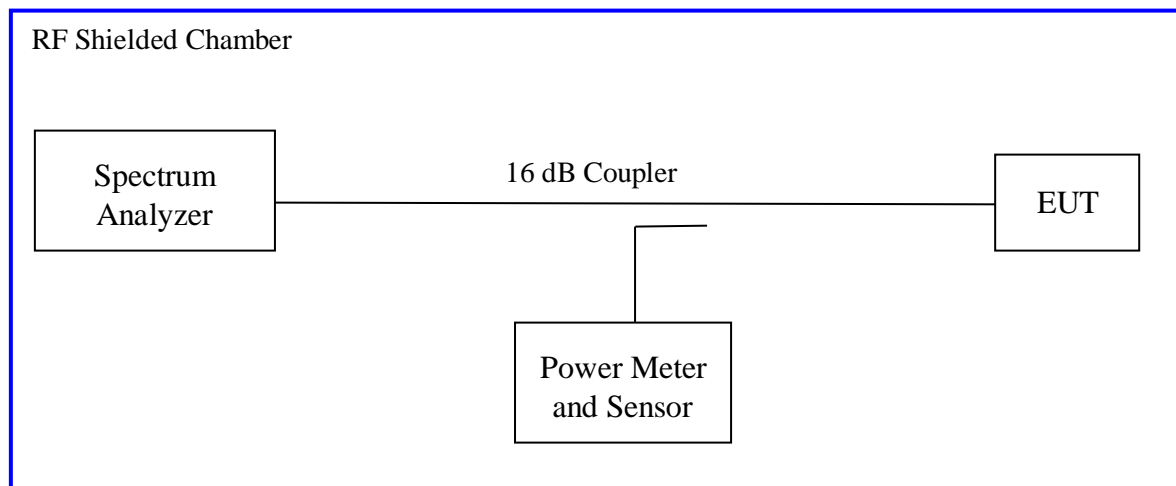

Method AVGSA-1 of “KDB 558074 – DTS Measurement Guidance v04” applies since the EUT continuously transmits with duty cycle greater than 98%. Sample detector was used.

4.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 5: Peak Power Spectral Density – Test Results

Test Conditions: Conducted Measurement, Normal Temperature and Voltage only				Date: July 10, 2017		
Antenna Type: Integrated Antenna				Power Setting: Fixed		
Max. Antenna Gain: +2.8 dBi				Signal State: Modulated		
Duty Cycle: See Sect. 3.5				Data Rate: BDR, EDR, BLE		
Ambient Temp.: 23° C				Relative Humidity: 38 %RH		
Peak Power Spectral Density						
Mode	Freq. (MHz)	Output [dBm]	CF [dB]	Max. PPSD [dBm]	Limit [dBm]	Margin [dB]
DH1	2402	-1.48	-15.23	-16.71	8.00	-24.71
	2442	-2.22	-15.23	-17.45	8.00	-25.45
	2480	-2.90	-15.23	-18.13	8.00	-26.13
DH3	2402	-1.60	-15.23	-16.83	8.00	-24.83
	2442	-2.57	-15.23	-17.80	8.00	-25.80
	2480	-3.07	-15.23	-18.30	8.00	-26.30
DH5	2402	-1.67	-15.23	-16.90	8.00	-24.90
	2442	-2.50	-15.23	-17.73	8.00	-25.73
	2480	-2.84	-15.23	-18.07	8.00	-26.07
2DH1	2402	-1.30	-15.23	-16.53	8.00	-24.53
	2442	-2.23	-15.23	-17.46	8.00	-25.46
	2480	-2.73	-15.23	-17.96	8.00	-25.96
2DH3	2402	-1.37	-15.23	-16.60	8.00	-24.60
	2442	-2.23	-15.23	-17.46	8.00	-25.46
	2480	-2.94	-15.23	-18.17	8.00	-26.17
2DH5	2402	-1.52	-15.23	-16.75	8.00	-24.75
	2442	-2.26	-15.23	-17.49	8.00	-25.49
	2480	-1.37	-15.23	-16.60	8.00	-24.60
3DH1	2402	0.09	-15.23	-15.14	8.00	-23.14
	2442	-0.65	-15.23	-15.88	8.00	-23.88
	2480	-3.00	-15.23	-18.23	8.00	-26.23
3DH3	2402	-1.66	-15.23	-16.89	8.00	-24.89
	2442	-2.62	-15.23	-17.85	8.00	-25.85
	2480	-3.11	-15.23	-18.34	8.00	-26.34
3DH5	2402	-1.73	-15.23	-16.96	8.00	-24.96
	2442	-2.51	-15.23	-17.74	8.00	-25.74
	2480	-3.25	-15.23	-18.48	8.00	-26.48
BLE	2402	0.92	-15.23	-14.31	8.00	-22.31
	2442	-1.89	-15.23	-17.12	8.00	-25.12
	2480	-1.83	-15.23	-17.06	8.00	-25.06
Note: CF accounted for the measured RBW. The bandwidth ratio is 10*log (3kHz/100kHz) or -15.23 dB. Peak detector was used. The worst case plots are shown below.						

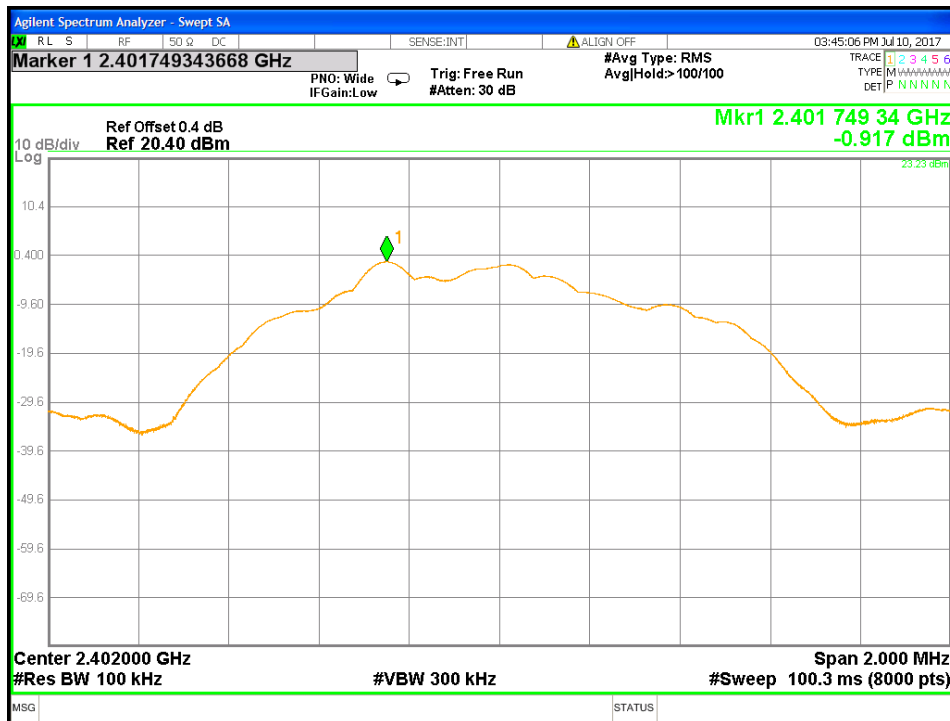


Figure 22: Maximum Power Spectral Density-2402 MHz-BLE

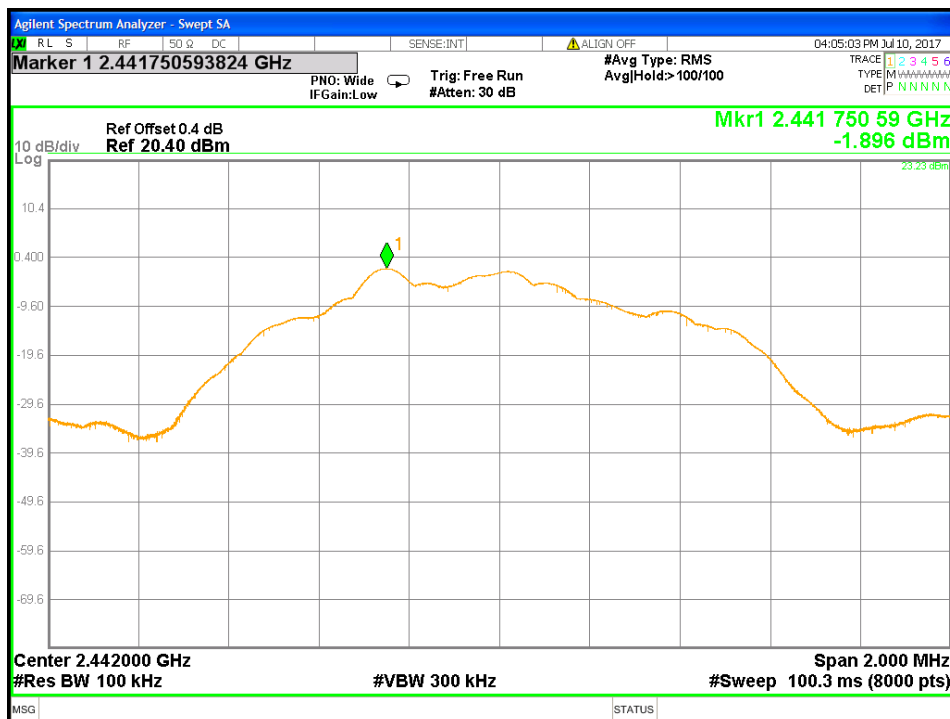


Figure 23: Maximum Power Spectral Density-2442 MHz-BLE

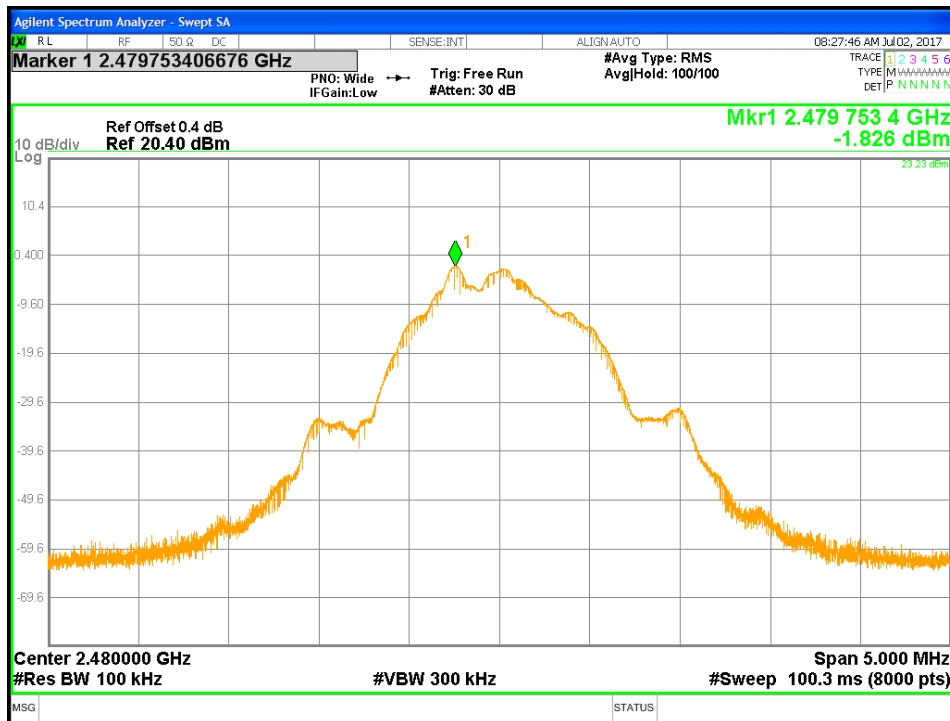


Figure 24: Maximum Power Spectral Density-2480 MHz-BLE

4.4 Out of Band Emission requirements

The setup was identical to RF output power measurement. Intentional radiators operating under the alternative provisions to the general emission limits, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If the frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

Any frequency outside the band of 2400 MHz to 2483.5 MHz, the power output level must be below 20 dB from the in-band transmitting signal; CFR 47 Part 15.215, 15.247(d) and RSS 247 Sect.5.5.

Note: Since Ear Force Stealth 700X supports both BLE and FHSS Bluetooth, Ear Force Stealth 700X will demonstrate compliance to the rules required for DTS per KDB 453039

The setup was identical to RF output power measurement.

This test was conducted on 3 channels on Ear Force Stealth 700X, SN: PP #1.

4.4.1 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 6: Band Edge Requirements – Test Results

Test Conditions: Conducted Measurement, Normal Temperature and Voltage only		Date: July 10, 2017		
Antenna Type: Integrated Antenna		Power Setting: Fixed		
Max. Antenna Gain: +2.8 dBi		Signal State: Modulated		
Duty Cycle: See Sect. 3.5		Data Rate: see below		
Ambient Temp.: 23° C		Relative Humidity: 38 %RH		
-20 dBr Band Edge Results				
Mode	Operating Freq.	Limit (dBm)	Measured Value (dBm)	Result
DH1	2402 MHz	-21.46	-59.83	Pass
	2442 MHz	-22.16	-62.26	Pass
	2480 MHz	-22.80	-61.99	Pass
2-DH1	2402 MHz	-21.31	-58.70	Pass

	2442 MHz	-22.25	-61.55	Pass
	2480 MHz	-22.72	-60.74	Pass
3-DH1	2402 MHz	-19.81	-54.58	Pass
	2442 MHz	-20.61	-60.10	Pass
	2480 MHz	-21.24	-61.84	Pass
BLE	2402 MHz	-20.91	-58.04	Pass
	2442 MHz	-21.90	-62.11	Pass
	2480 MHz	-22.55	-62.62	Pass

Note: The stated limits for 20 dBr are relative to each individual output per KDB 662911 Method.
The worst case for each data rate is plotted below.

Out of Band Emission				
Mode	Operating Freq.	Limit (dBm)	Measured Value (dBm)	Result
DH1	2402 MHz	-21.46	-49.18 dBm (23.924 GHz)	Pass
	2442 MHz	-22.16	-48.83 dBm (25.816 GHz)	Pass
	2480 MHz	-22.80	-49.80 dBm (25.350 GHz)	Pass
2-DH1	2402 MHz	-21.31	-48.99 dBm (25.446 GHz)	Pass
	2442 MHz	-22.25	-48.67 dBm (23.774 GHz)	Pass
	2480 MHz	-22.72	-48.86 dBm (23.740 GHz)	Pass
3-DH1	2402 MHz	-19.81	-46.87 dBm (23.908 GHz)	Pass
	2442 MHz	-20.61	-47.84 dBm (23.955 GHz)	Pass
	2480 MHz	-21.24	-47.58 dBm (23.660 GHz)	Pass
BLE	2402 MHz	-20.91	-49.05 dBm (25.333 GHz)	Pass
	2442 MHz	-21.90	-49.39 dBm (23.752 GHz)	Pass
	2480 MHz	-22.55	-47.96 dBm (4959.50 MHz)	Pass

Note: The stated limits are relative to each individual output per KDB 662911 Method.

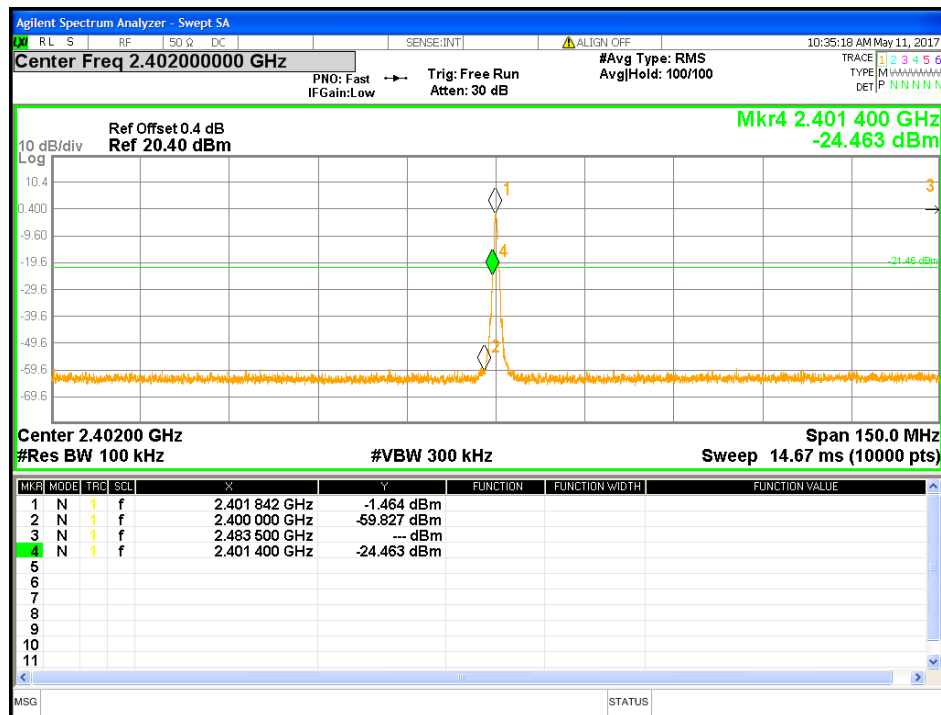


Figure 25: Band Edge Requirements at 2402 MHz – DH1

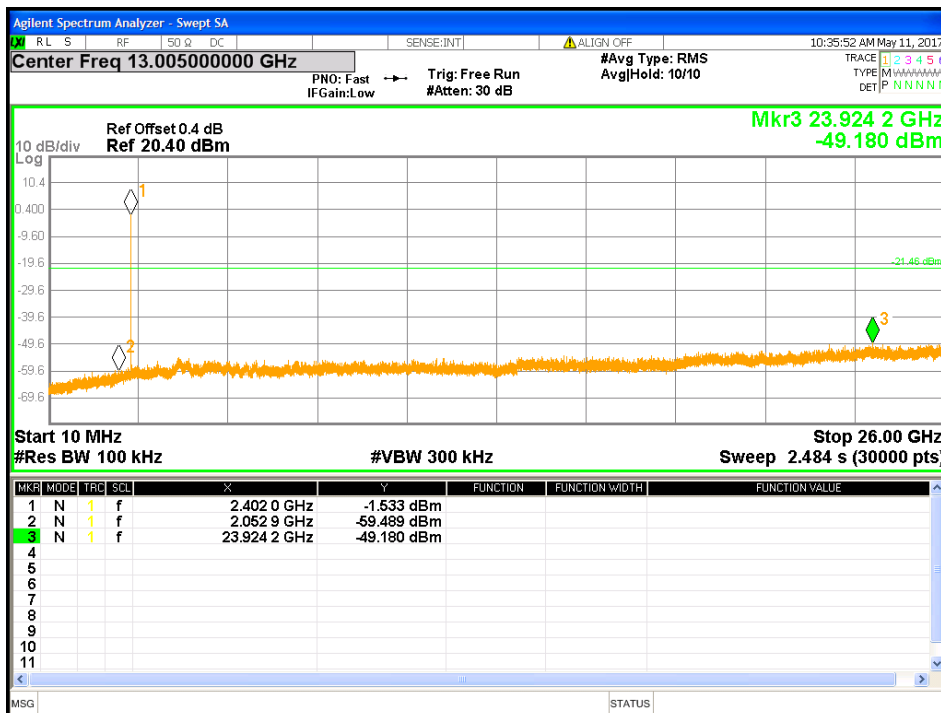


Figure 26: Out of Band Emission Requirements at 2402 MHz – DH1

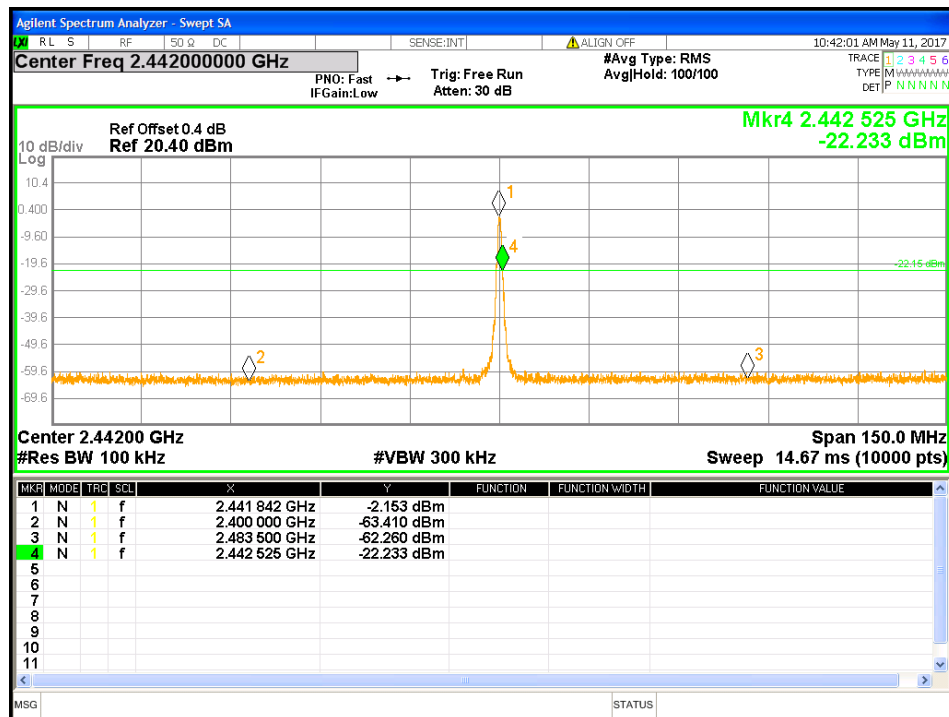


Figure 27: Band Edge Requirements at 2442 MHz – DH1

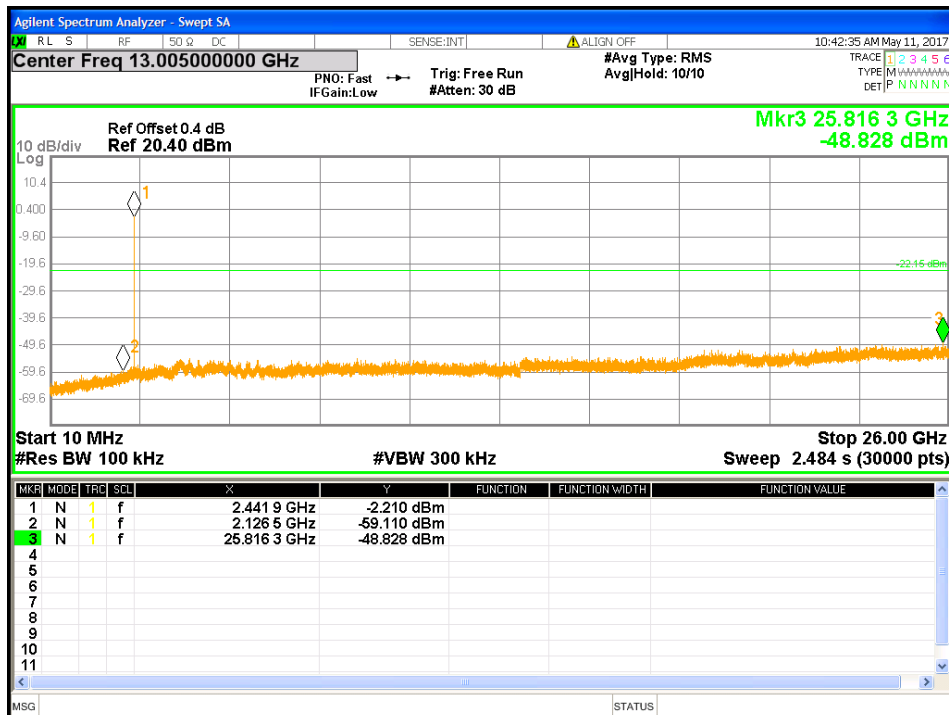


Figure 28: Out of Band Emission Requirements at 2442 MHz – DH1

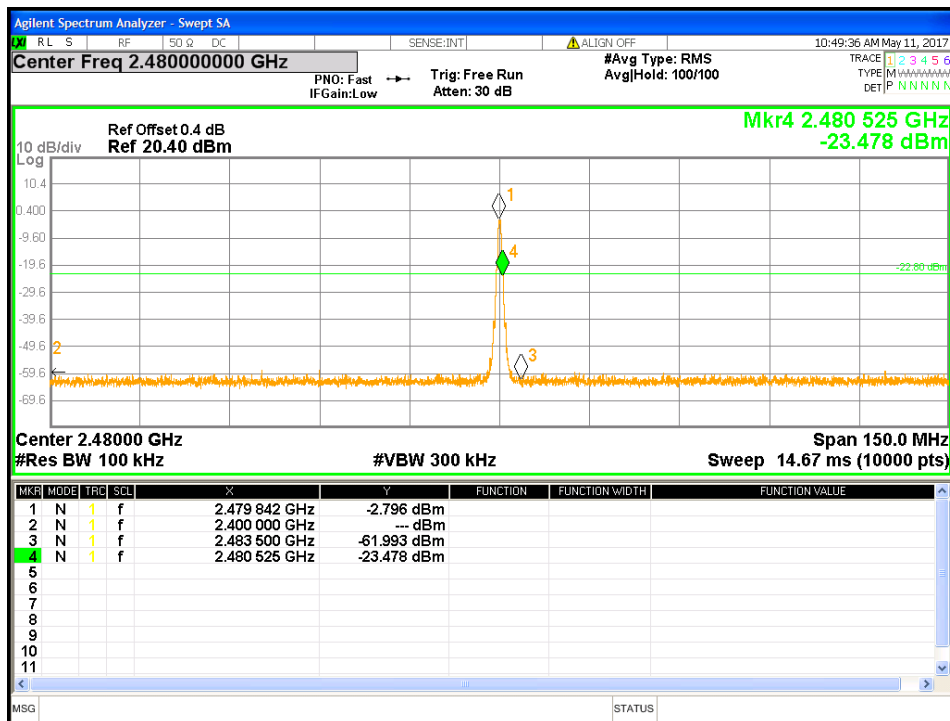


Figure 29: Band Edge Requirements at 2480 MHz – DH1

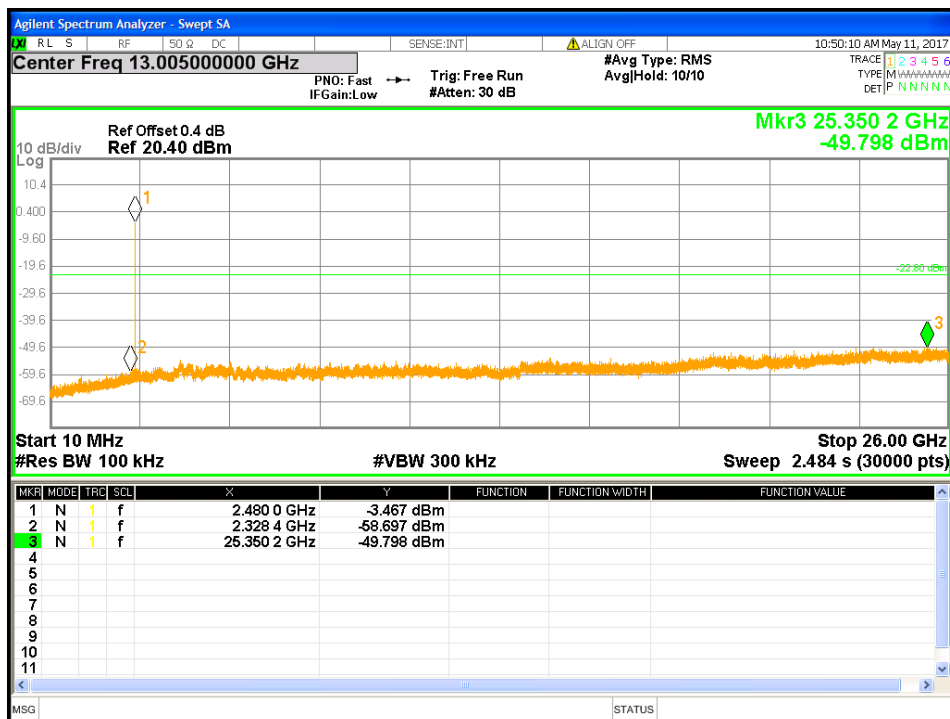


Figure 30: Out of Band Emission Requirements at 2480 MHz – DH1

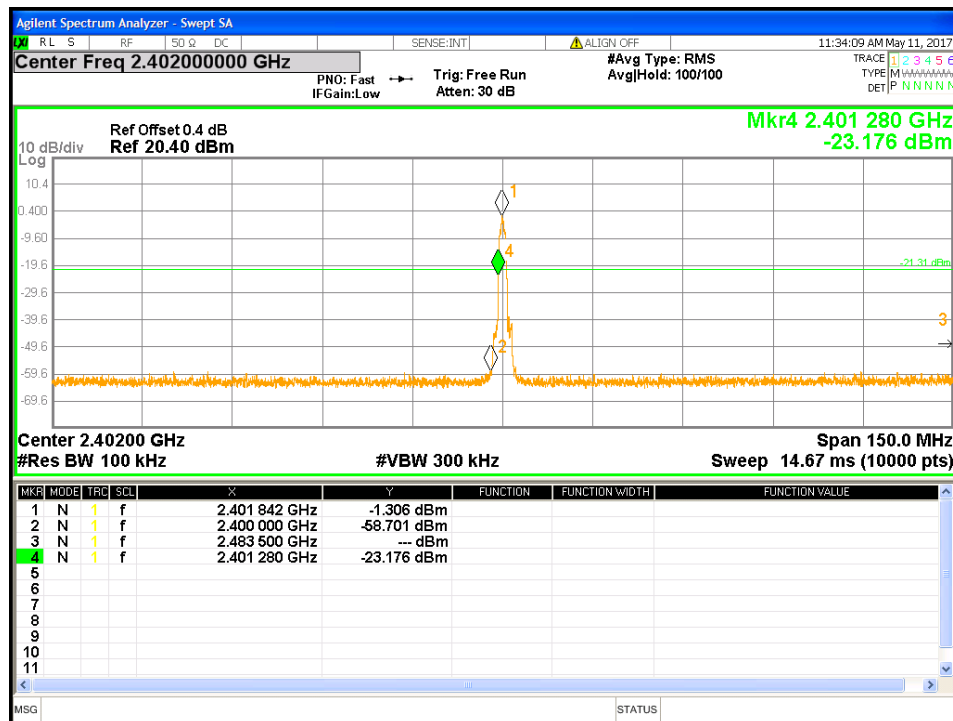


Figure 31: Band Edge Requirements at 2402 MHz – 2DH1

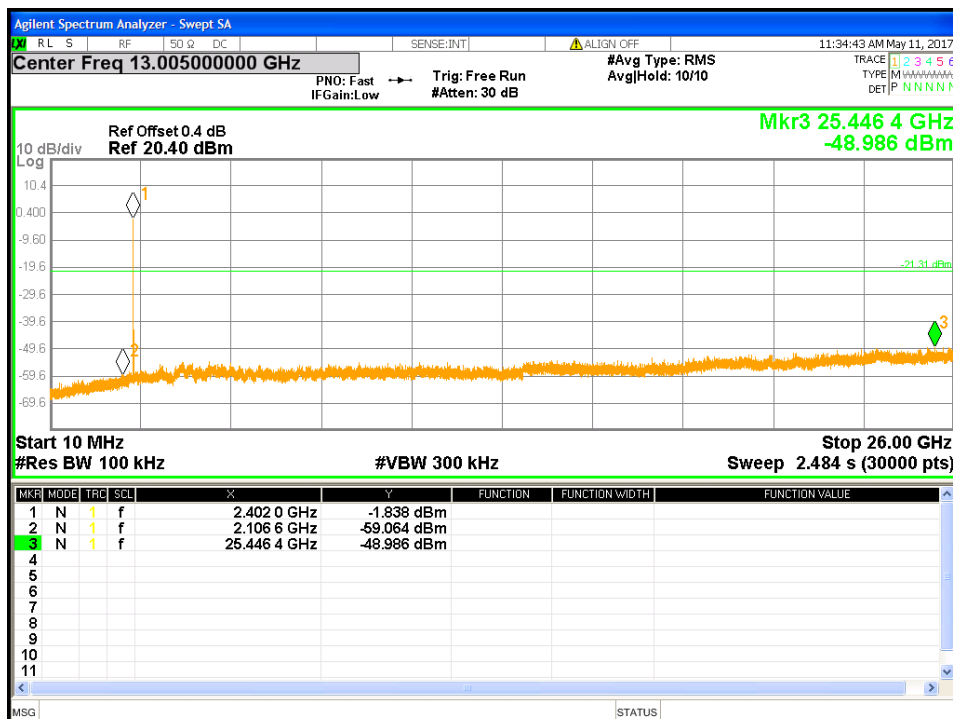


Figure 32: Out of Band Emission Requirements at 2402 MHz – 2DH1

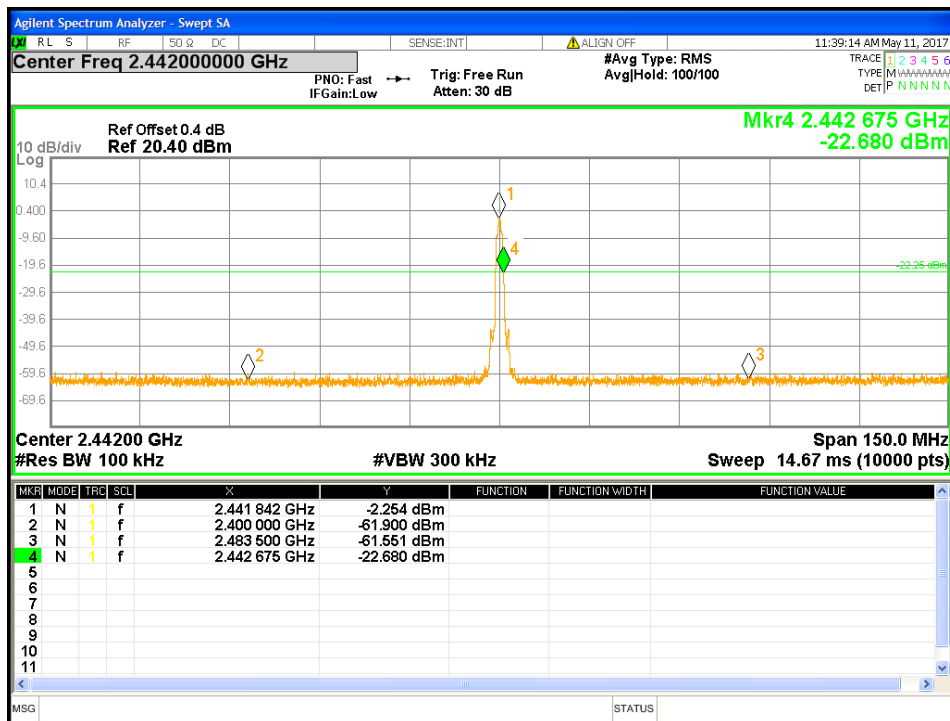


Figure 33: Band Edge Requirements at 2442 MHz – 2DH1

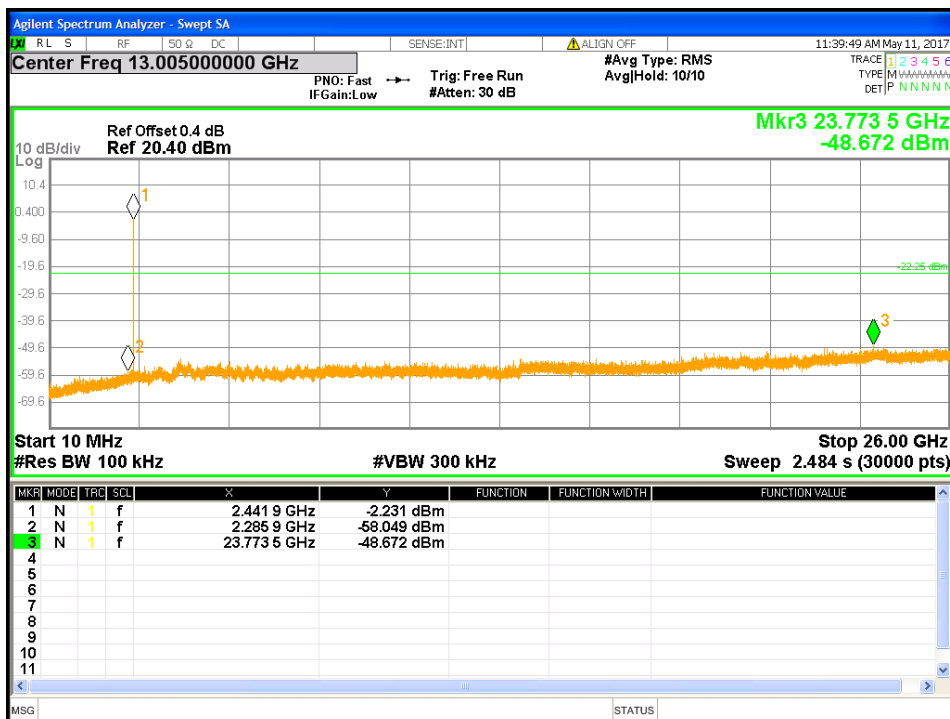


Figure 34: Out of Band Emission Requirements at 2442 MHz – 2DH1

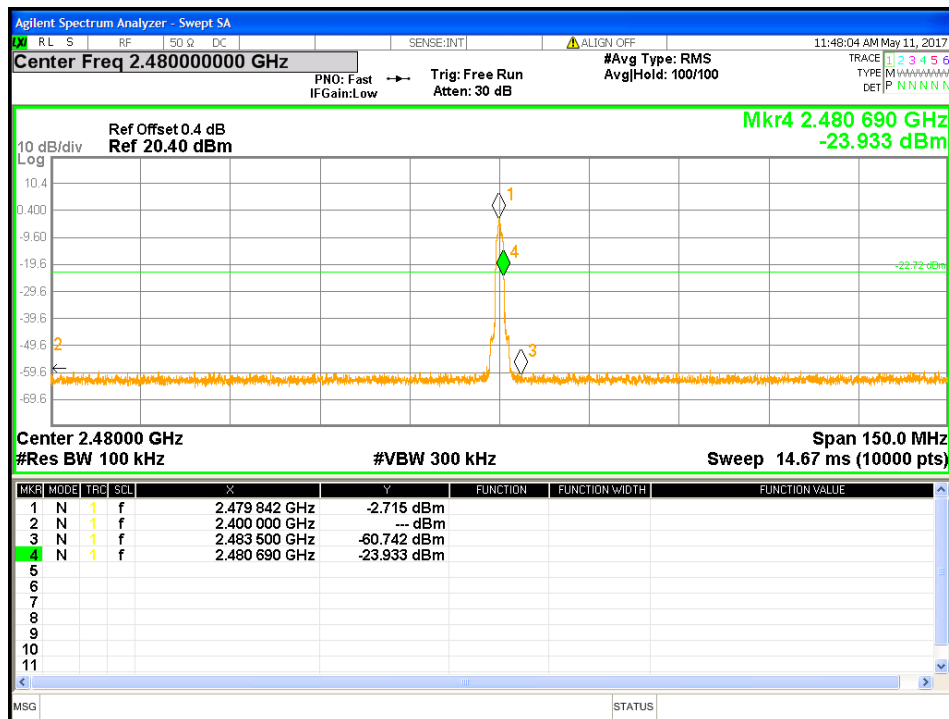


Figure 35: Band Edge Requirements at 2480 MHz – 2DH1

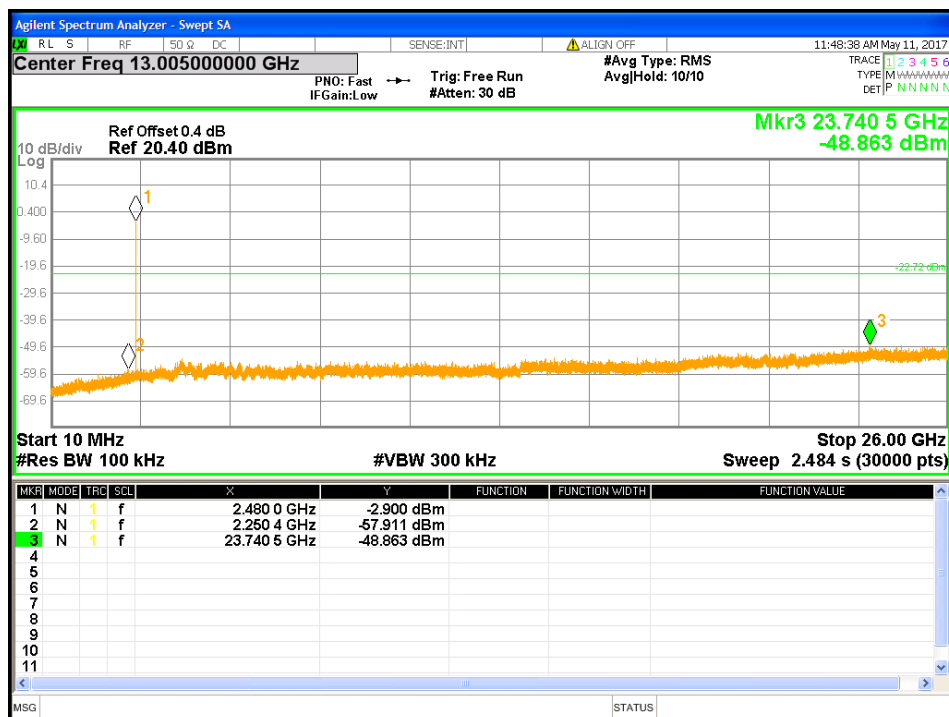


Figure 36: Out of Band Emission Requirements at 2480 MHz – 2DH1

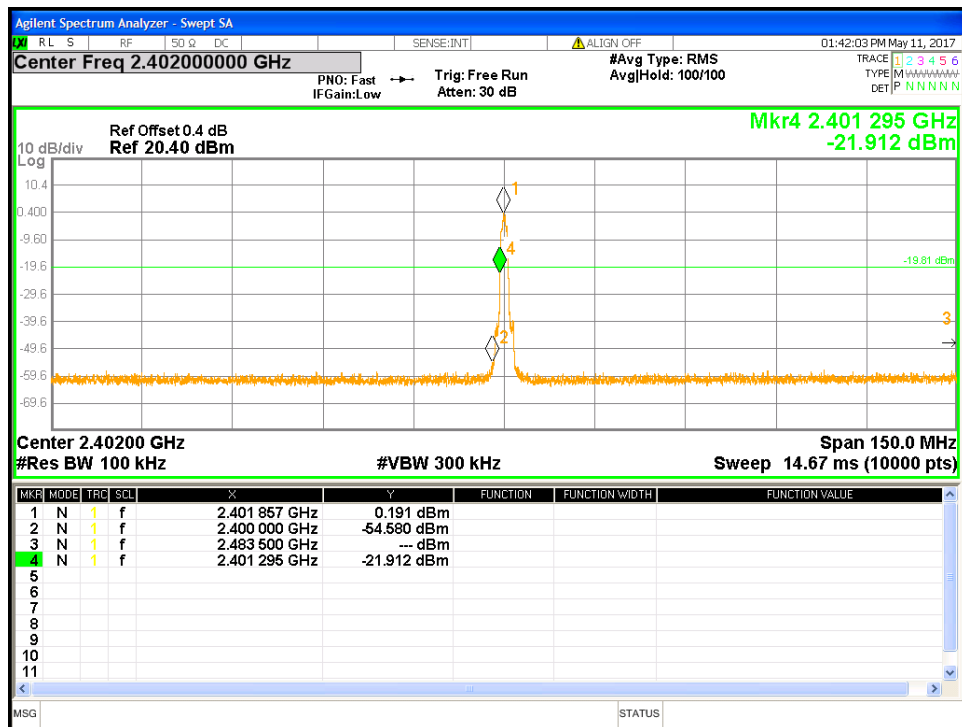


Figure 37: Band Edge Requirements at 2402 MHz – 3DH1

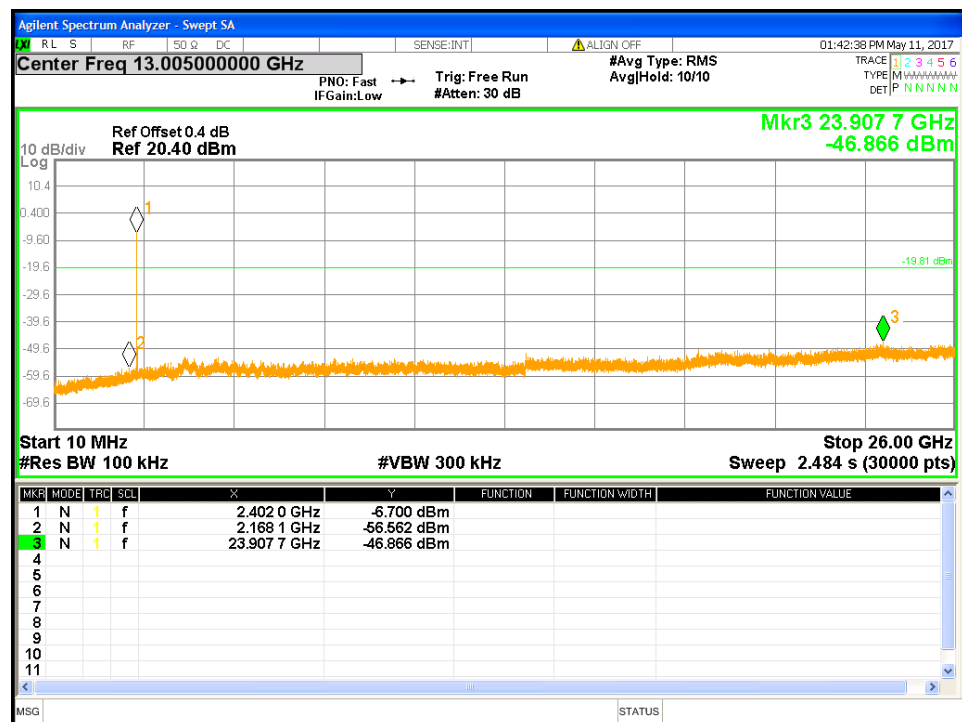


Figure 38: Out of Band Emission Requirements at 2402 MHz – 3DH1

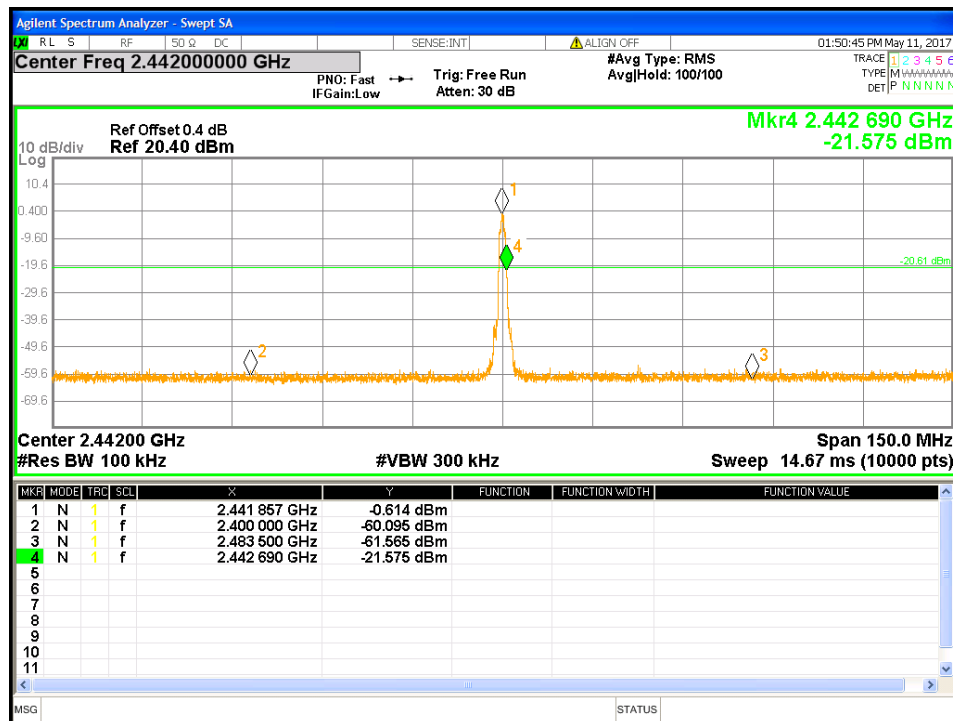


Figure 39: Band Edge Requirements at 2442 MHz – 3DH1

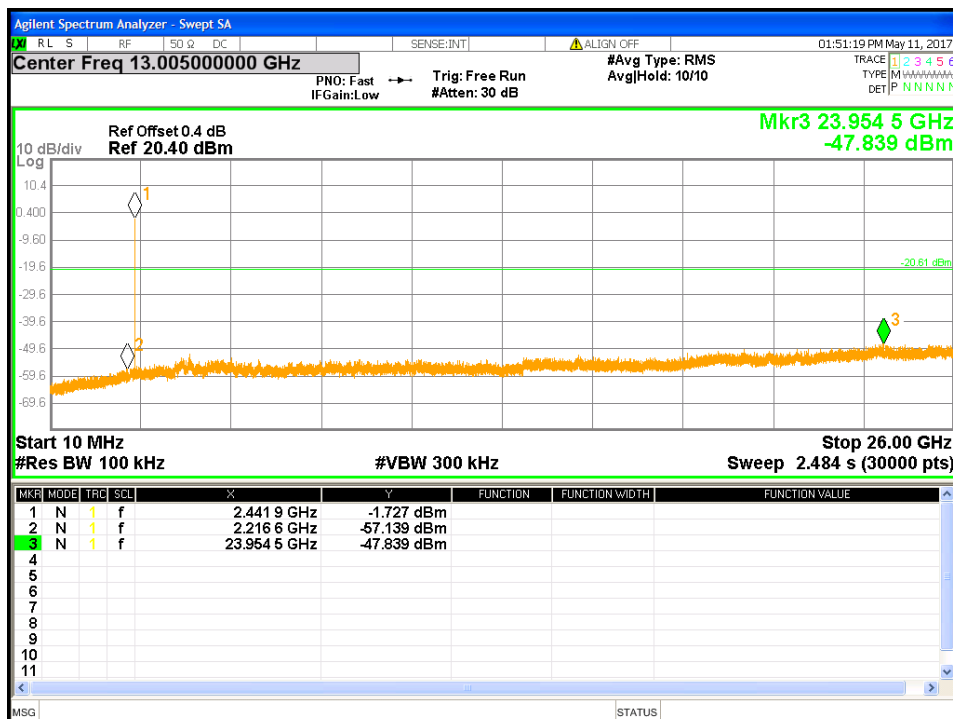


Figure 40: Out of Band Emission Requirements at 2442 MHz – 3DH1

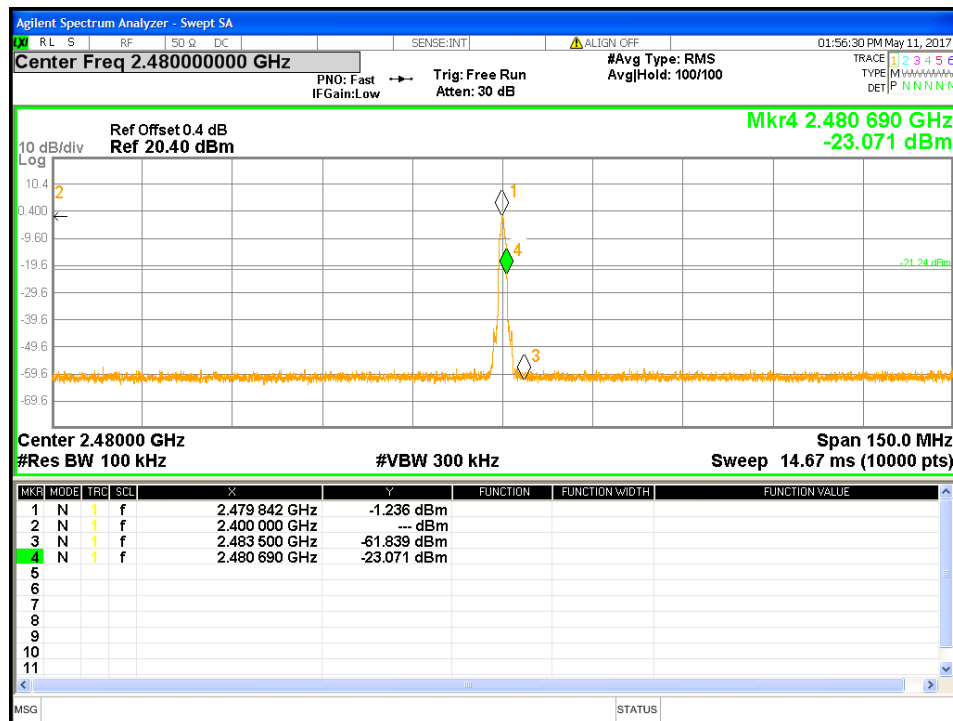


Figure 41: Band Edge Requirements at 2480 MHz – 3DH1

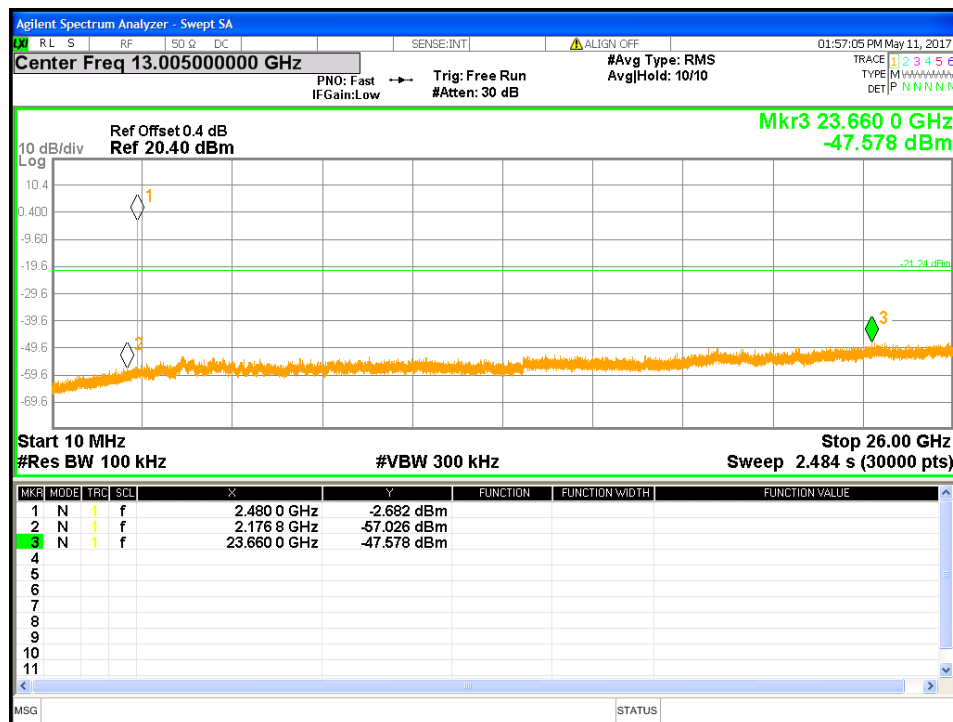


Figure 42: Out of Band Emission Requirements at 2480 MHz – 3DH1

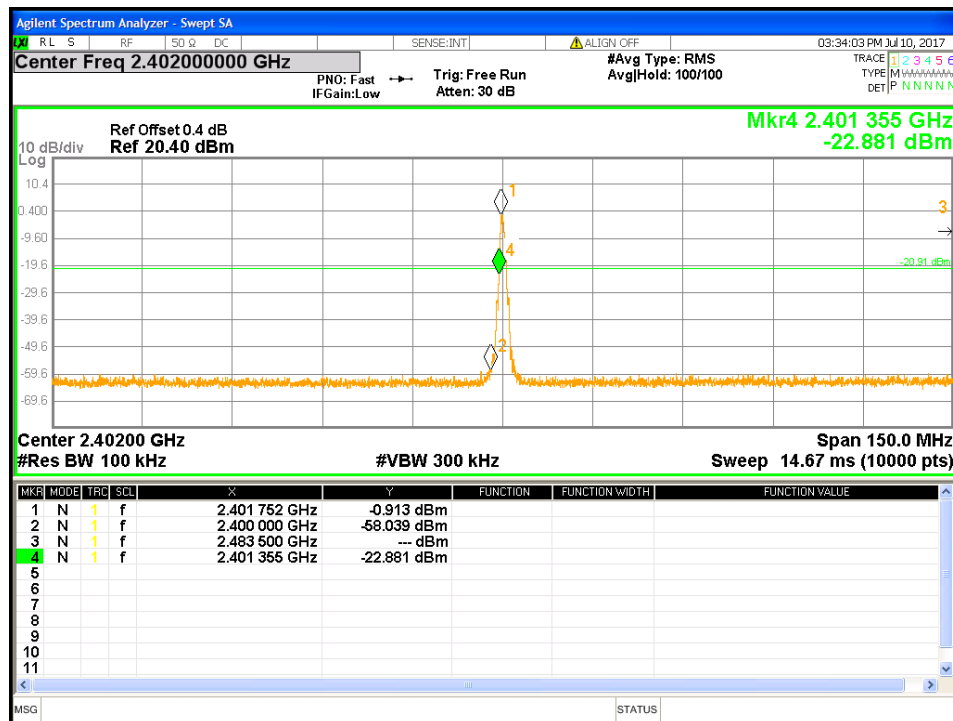


Figure 43: Band Edge Requirements at 2402 MHz – BLE

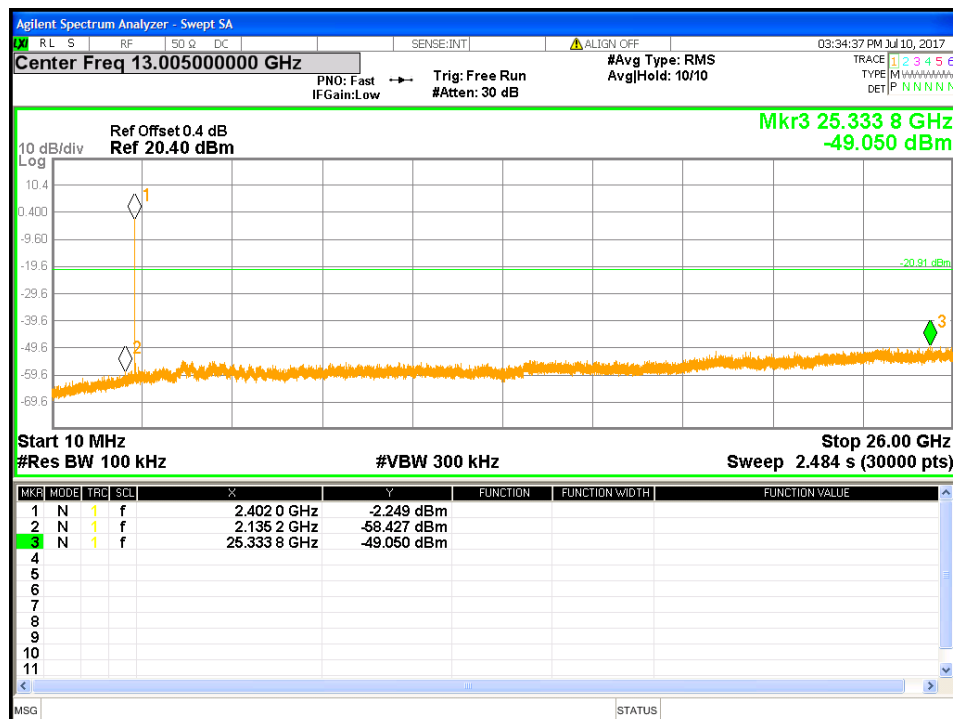


Figure 44: Out of Band Emission Requirements at 2402 MHz – BLE

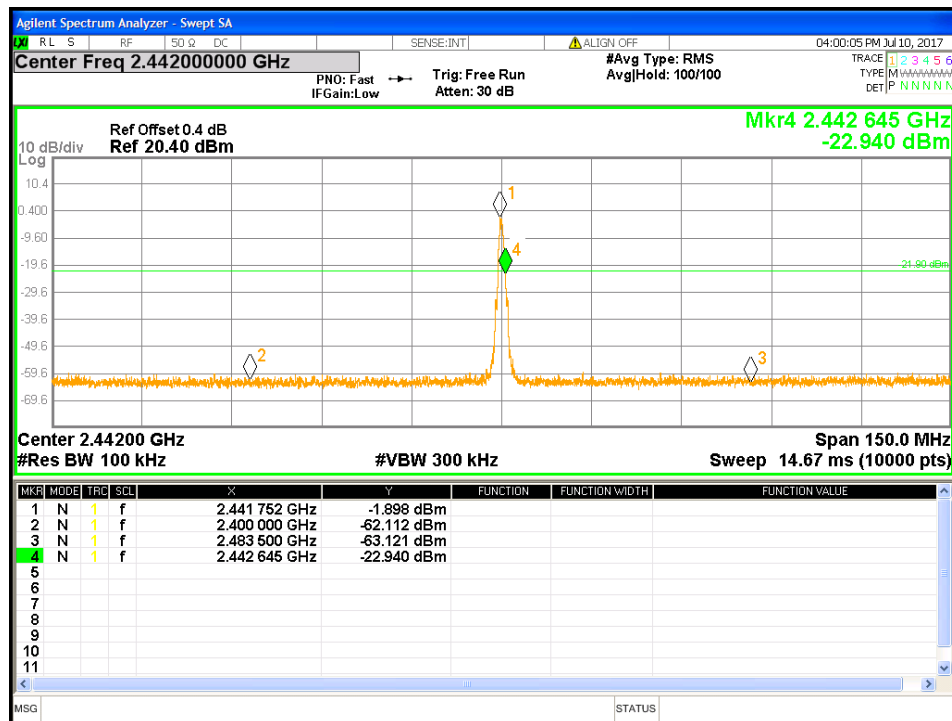


Figure 45: Band Edge Requirements at 2442 MHz – BLE

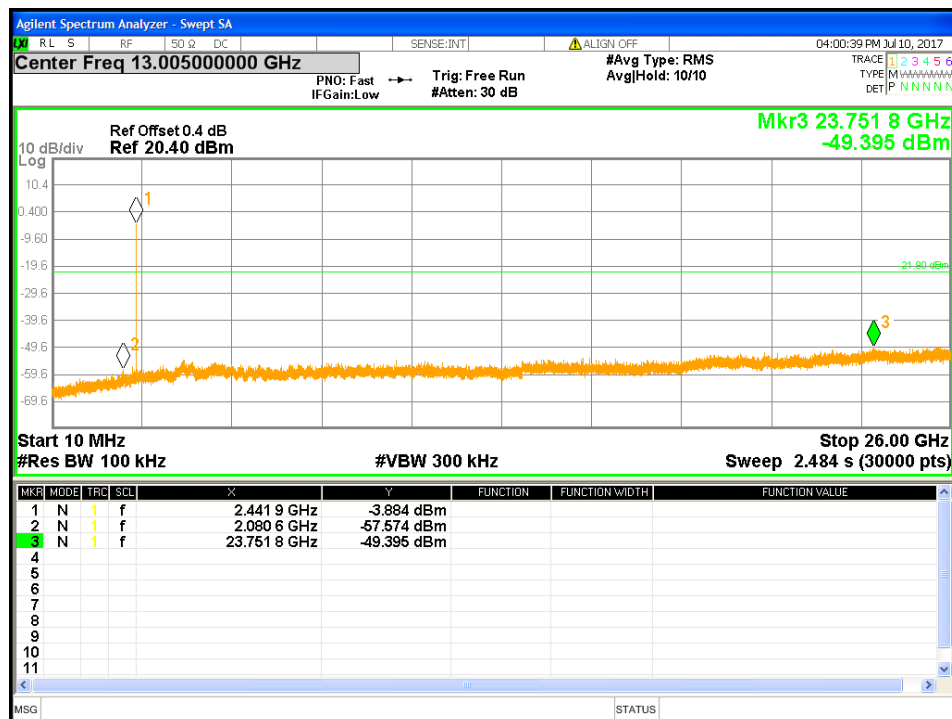


Figure 46: Out of Band Emission Requirements at 2442 MHz – BLE

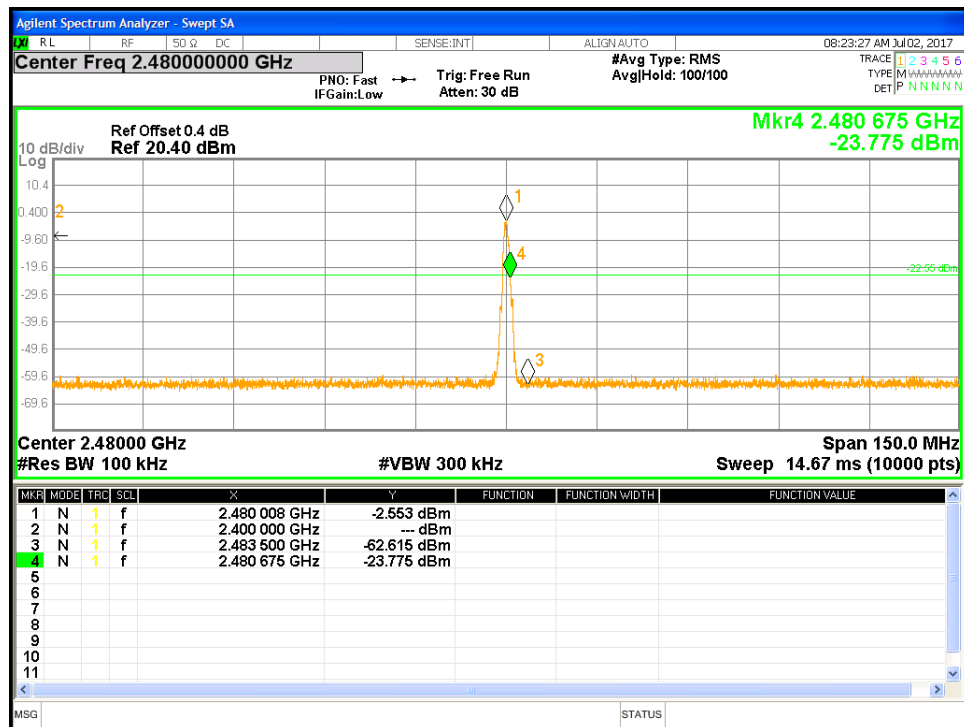


Figure 47: Band Edge Requirements at 2480 MHz – BLE

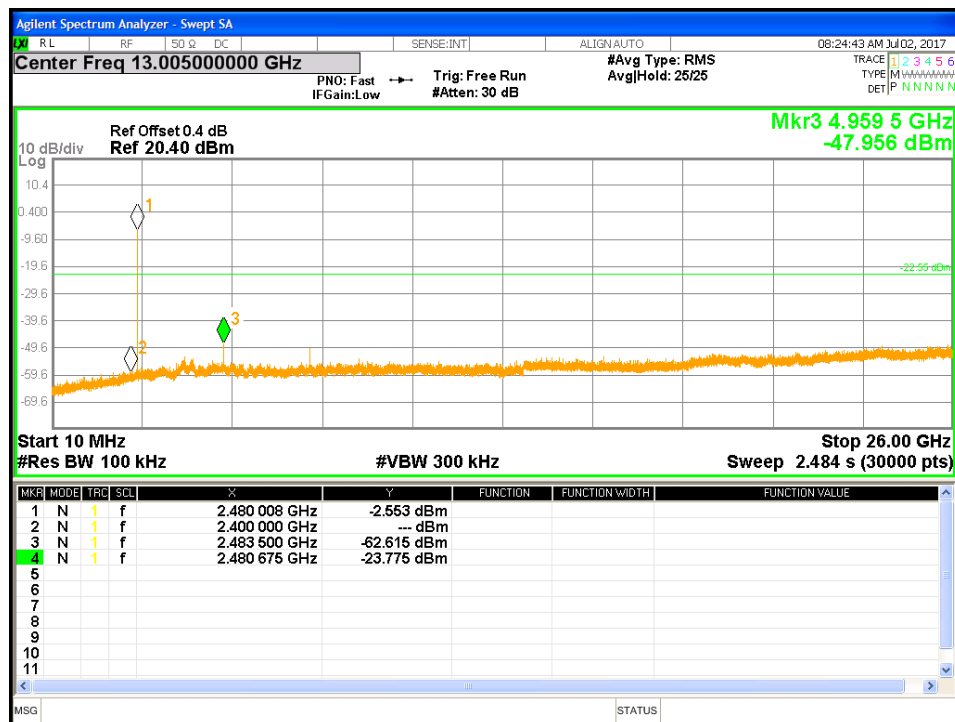


Figure 48: Out of Band Emission Requirements at 2480 MHz – BLE

4.5 Transmitter Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-Gen Sect. 6.13

4.5.1 Test Methodology

4.5.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table, 80cm above the floor for 30 MHz to 1 GHz and 150cm above the floor for 1 GHz to 26 GHz. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.


4.5.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, then the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table, 80cm above the floor for 30 MHz to 1 GHz and 150cm above the floor for 1 GHz to 26 GHz. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

The final scans performed on the worst axis, Y-Axis, for three operating channels: 2402 MHz, 2442 MHz and 2480 MHz at 3DH1.

4.5.1.3 Test Setup

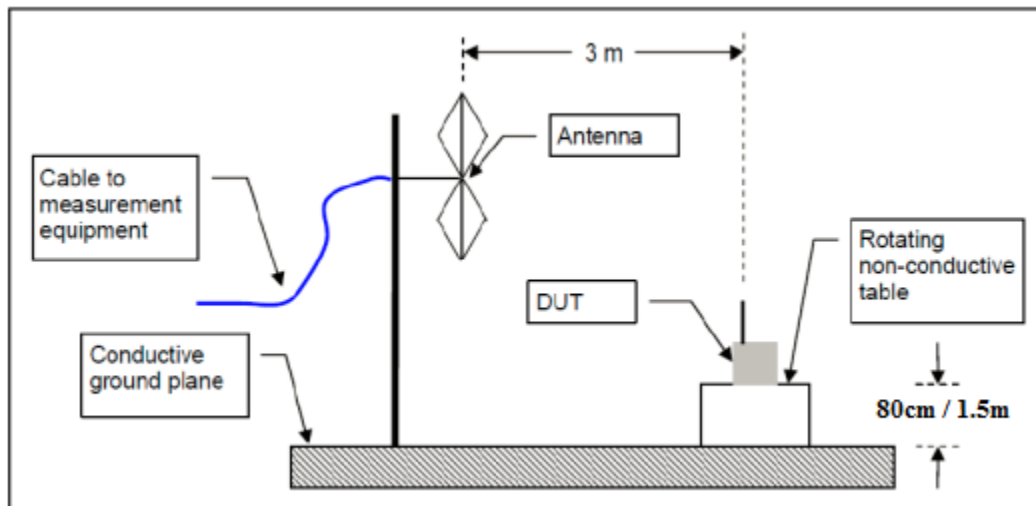

4.5.1.4 Deviations

None.

4.5.2 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2017 and RSS –Gen Sect.6.13: 2014.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F (kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

All harmonics and spurious emission which are outside of the restricted band shall be 20 dB below the in-band emission.

4.5.3 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and Test Plan.

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 7: Transmit Spurious Emission at Restricted Band Edge Requirements

Test Conditions: Radiated Measurement at 3 meters					Date: June 28, 2017			
Antenna Type: Integrated Antenna					Power Setting: Fixed.			
Max. Antenna Gain: +2.8 dBi					Signal State: Modulated			
Duty Cycle: See Section 3.5					Data Rate: see below			
Ambient Temp.: 23° C					Relative Humidity: 35 %RH			
Band Edge Results								
Freq. MHz	Level dBuV/m	Pol. V/H	15.209/15.247 Limit	Margin	Detector Pk/QP/Avg	Azimuth degrees	Height meters	Comments
2390	53.72	H	74.00	−20.28	Pk	167	140	BT-3DH1-Hopping
2390	46.14	H	54.00	−7.86	Ave	167	140	BT-3DH1-Hopping
2390	54.64	V	74.00	−19.36	Pk	258	147	BT-3DH1-Hopping
2390	45.64	V	54.00	−8.36	Ave	258	147	BT-3DH1-Hopping
2390.0	52.84	H	74.00	−21.16	Pk	115	213	BLE-2402MHz-Continuous
2390.0	39.97	H	54.00	−14.03	Ave	115	213	BLE-2402MHz-Continuous
2390.0	53.06	V	74.00	−20.94	Pk	286	234	BLE-2402MHz-Continuous
2390.0	39.91	V	54.00	−14.09	Ave	286	234	BLE-2402MHz-Continuous
2483.5	52.87	V	74.00	−21.13	Pk	23	259	BLE-2480MHz-Continuous
2483.5	41.37	V	54.00	−12.63	Ave	23	259	BLE-2480MHz-Continuous
2483.5	53.77	H	74.00	−20.23	Pk	114	231	BLE-2480MHz-Continuous
2483.5	41.54	H	54.00	−12.46	Ave	114	231	BLE-2480MHz-Continuous
Note: 1. FHSS, worst Case 3DH1 and BLE are evaluated. 2. Since the band-edge measurements have good margins in the presence of in-band leakage, the band-edge plots were captured with the spectrum analyzer’s span wider than 2 MHz; showing additional sideband spurious emissions. 3. All the band-edge measurements met the restricted band requirements of CFR47 15.205.								

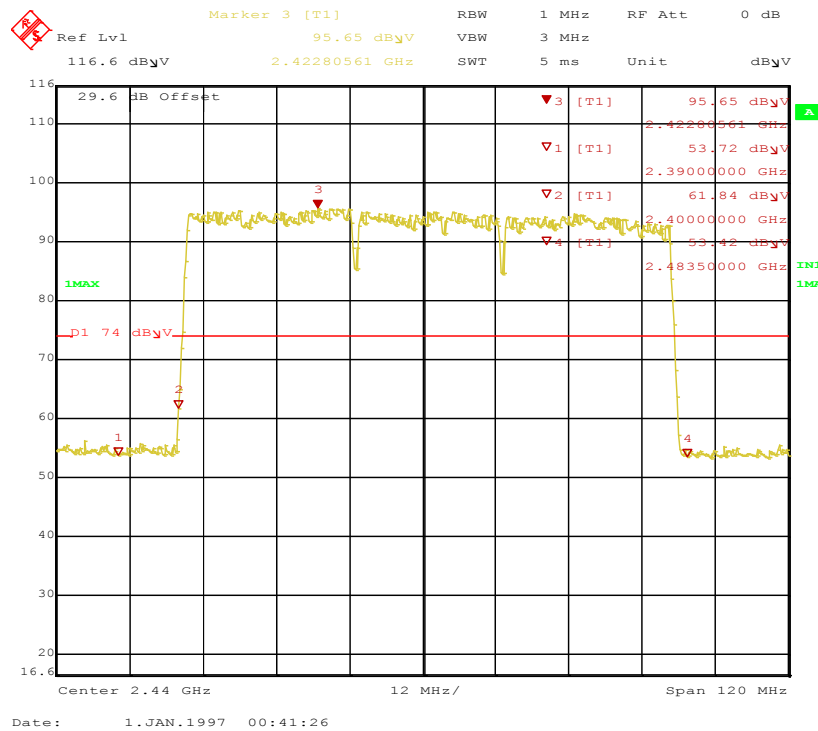


Figure 49: Radiated Emission at the Edge at 3DH1 Hopping – Horizontal (Peak)

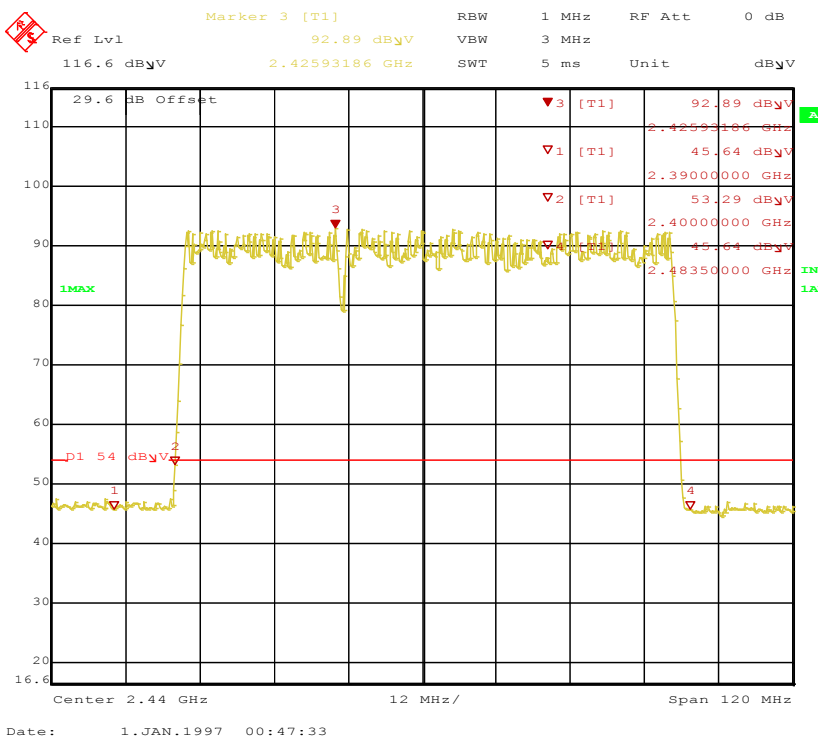


Figure 50: Radiated Emission at the Edge at 3DH1 Hopping – Horizontal (Avg)

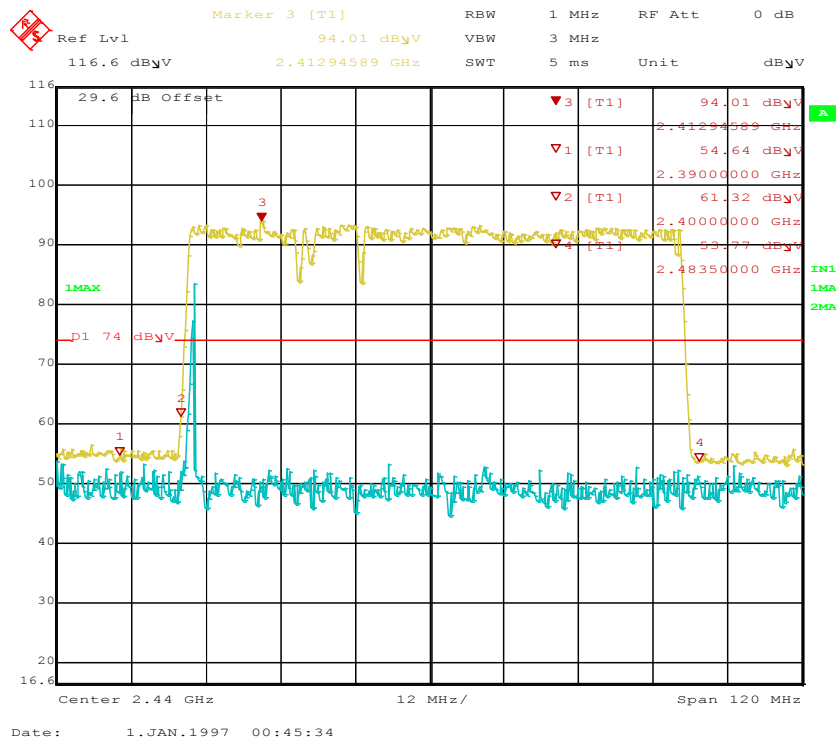


Figure 51: Radiated Emission at the Edge at 3DH1 Hopping – Vertical (Pk)

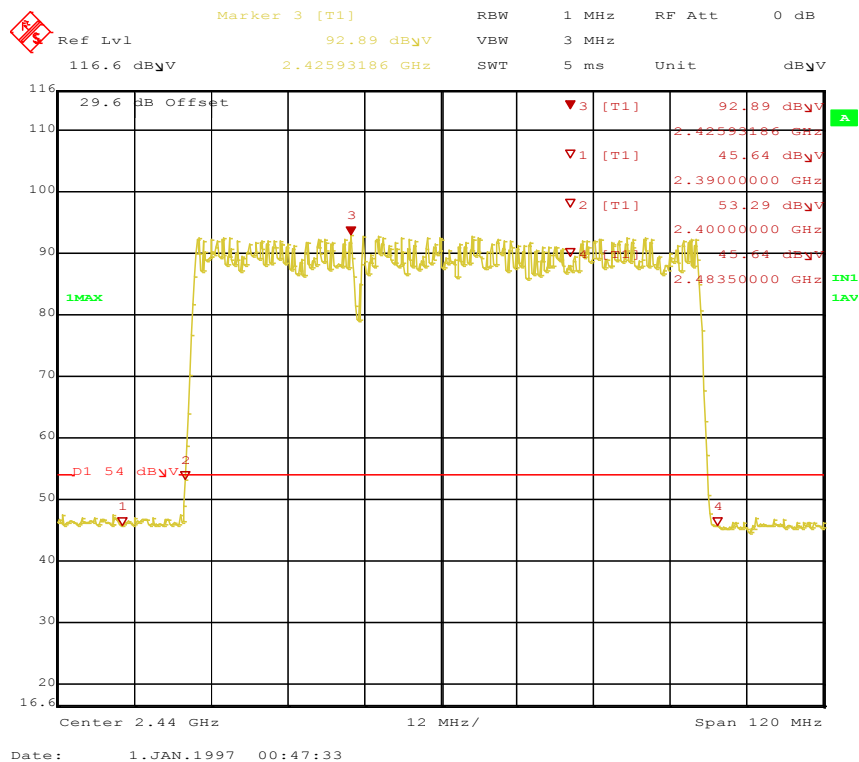


Figure 52: Radiated Emission at the Edge at 3DH1 Hopping – Vertical (avg)

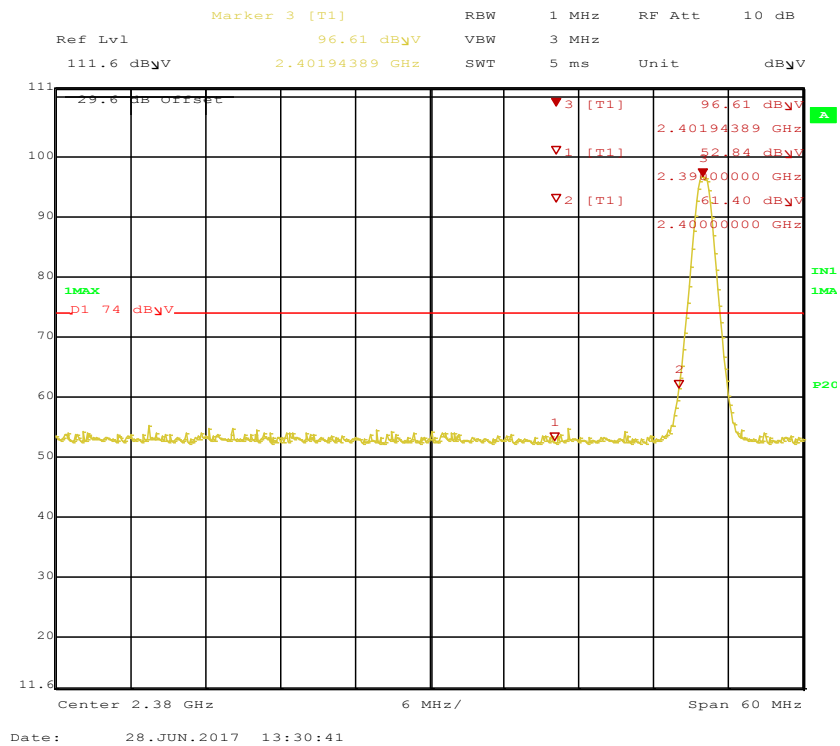


Figure 53: Radiated Emission at the Edge for BLE, 2402 MHz – Horizontal (Pk)

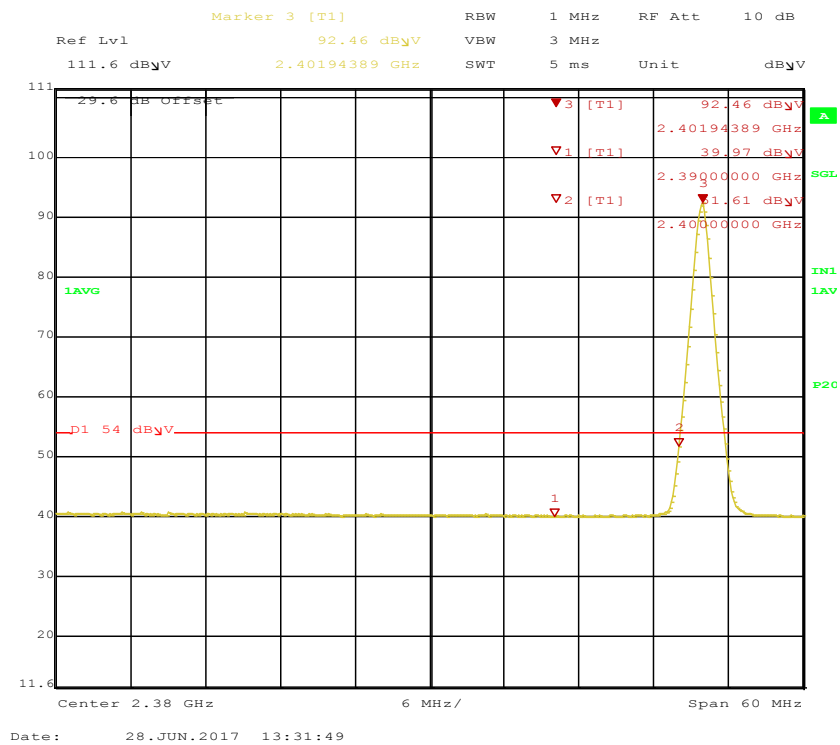


Figure 54: Radiated Emission at the Edge for BLE, 2402 MHz – Horizontal (Avg)

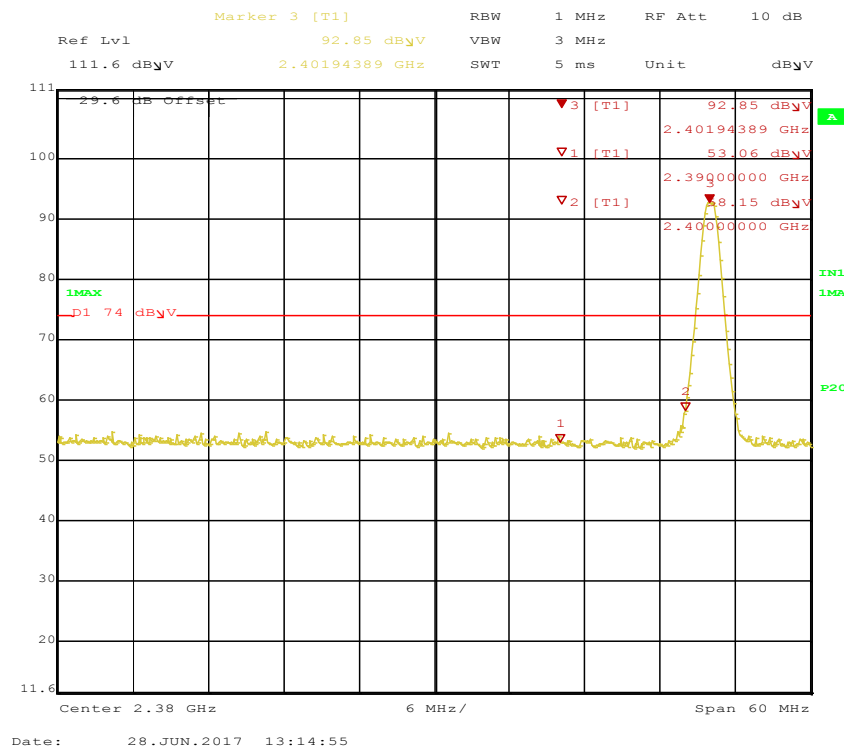


Figure 55: Radiated Emission at the Edge for BLE, 2402 MHz – Vertical (Pk)

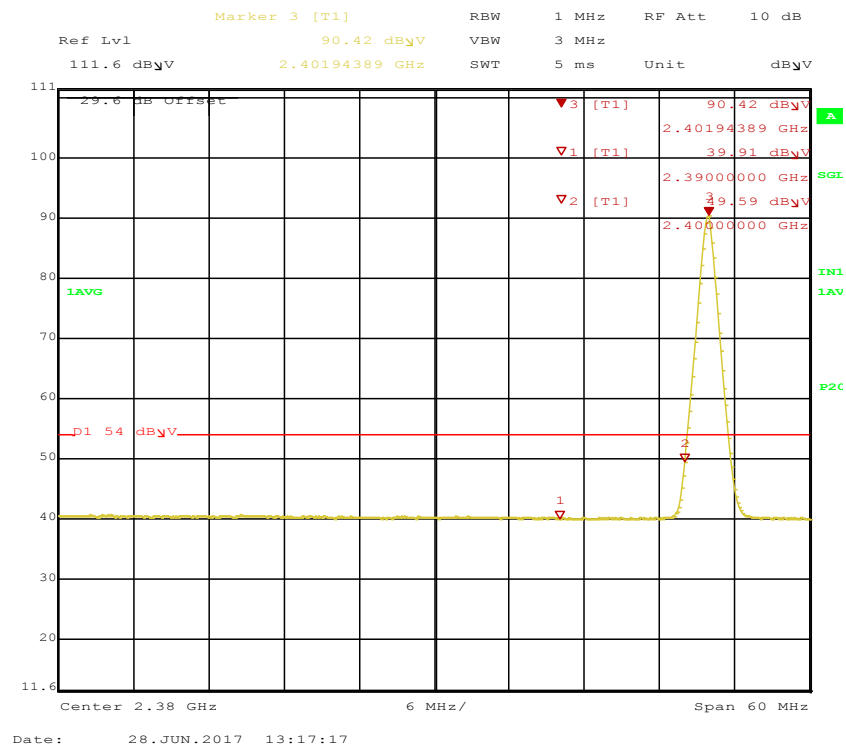


Figure 56: Radiated Emission at the Edge for BLE, 2402 MHz – Vertical (Avg)

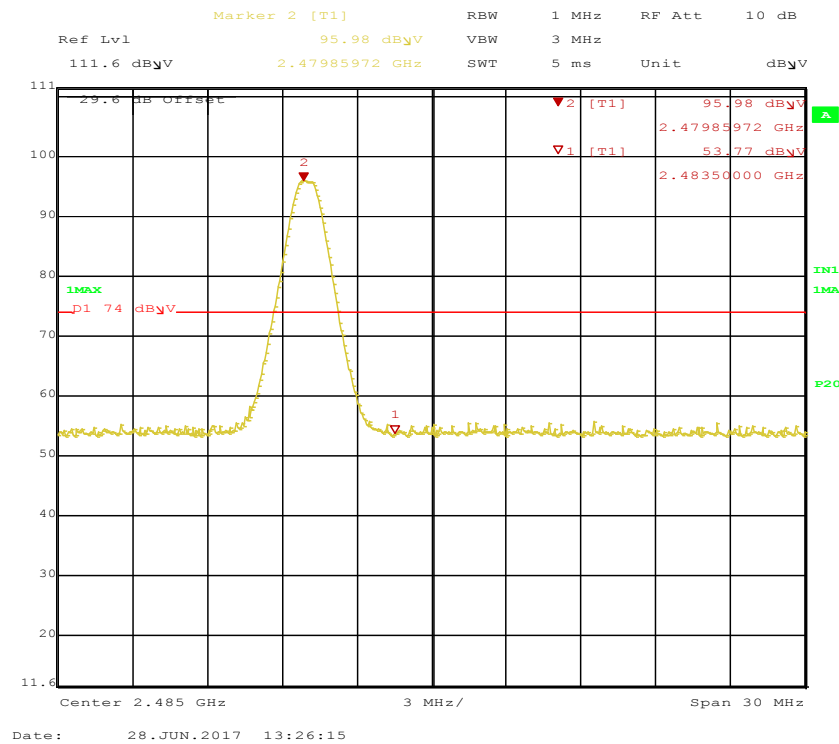


Figure 57: Radiated Emission at the Edge for BLE, 2480 MHz – Horizontal (Pk)

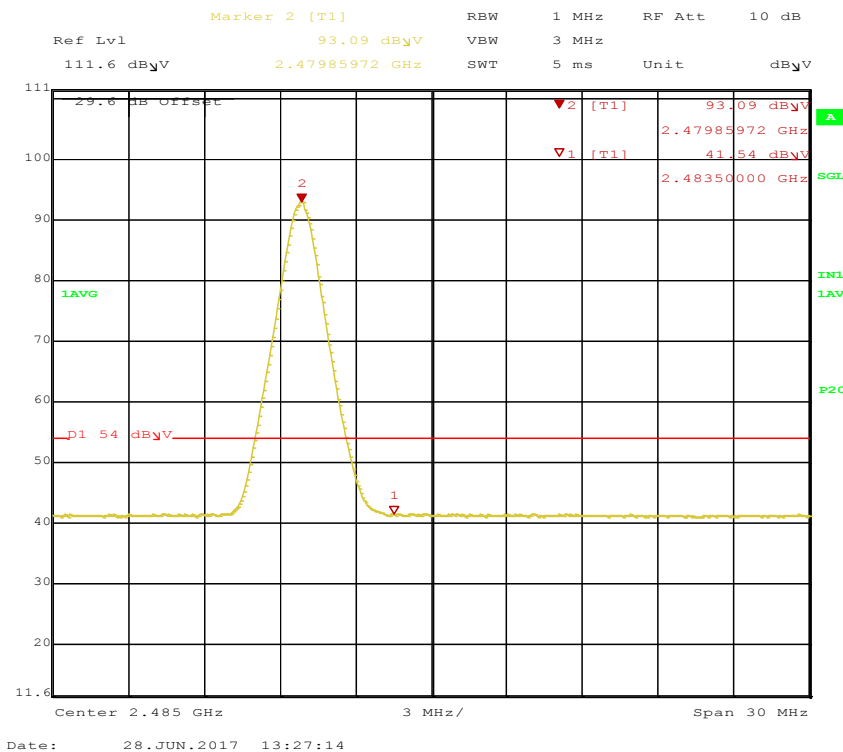


Figure 58: Radiated Emission at the Edge for BLE, 2480 MHz – Horizontal (Avg)

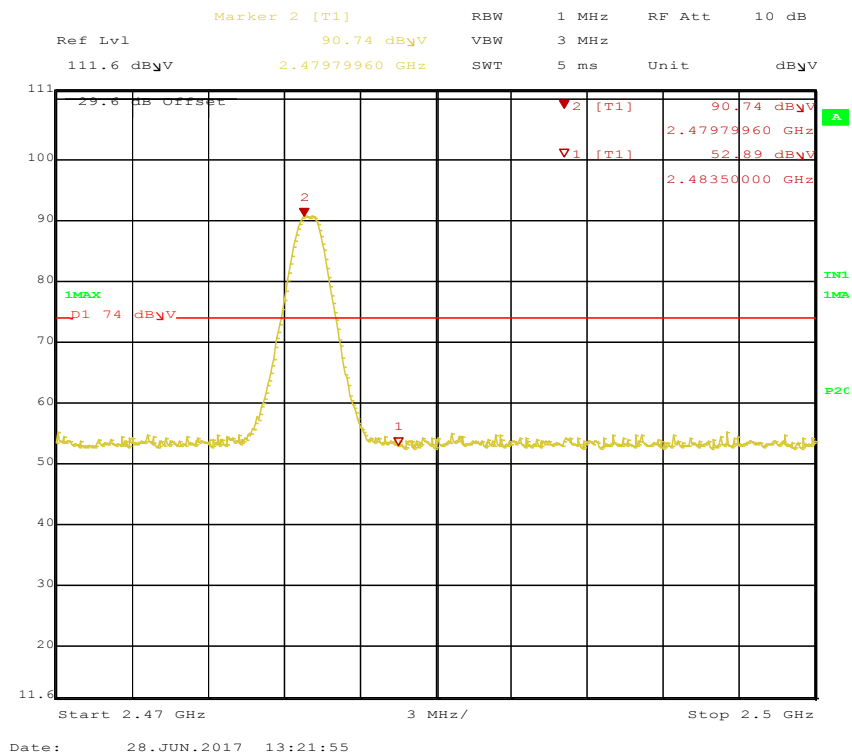


Figure 59: Radiated Emission at the Edge for BLE, 2480 MHz – Vertical (Pk)

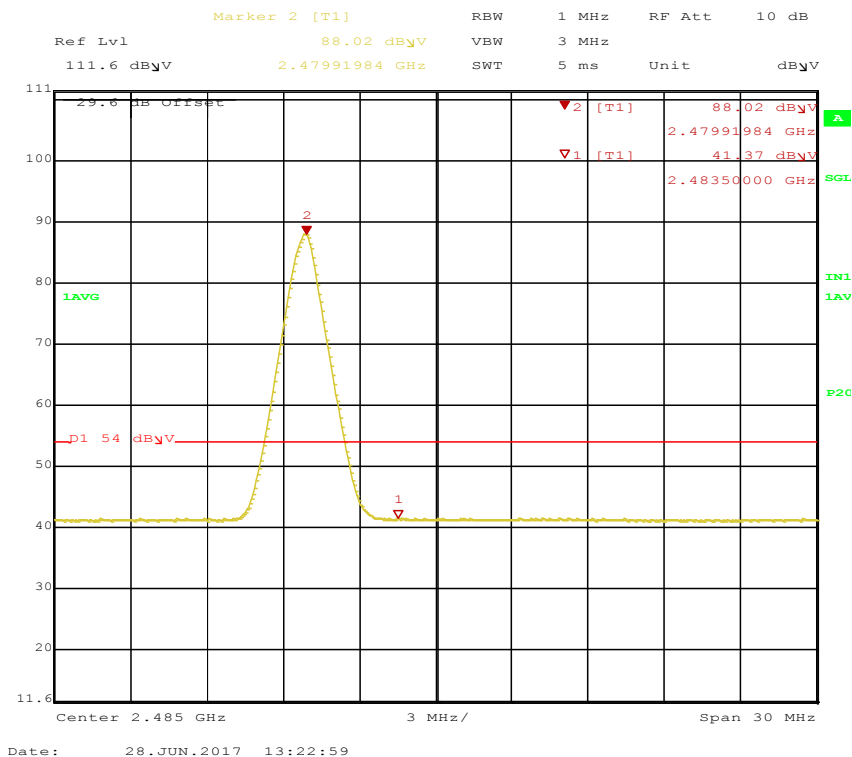


Figure 60: Radiated Emission at the Edge for BLE, 2480 MHz – Vertical (Avg)



SOP 1 Radiated Emissions						Tracking # 31763009.001 Page 1 of 6					
EUT Name	Wireless Audio Headset					Date	July 14, 2017				
EUT Model	Ear Force Stealth 700X					Temp / Hum in	23°C / 35%rh				
EUT Serial	PP #2					Temp / Hum out	N/A				
EUT Comfit.	Integrated Antenna on Y-Axis					Line AC / Freq	3.7 V				
Standard	CFR47 Part 15 Subpart C					RBW / VBW	120 kHz/300 kHz				
Dist/Ant Used	3m /JB3					Performed by	Jeremy Luong				
30 -1000 MHz radiated emission at 2442 MHz											
Freq	Raw	Cable	AF	Level	Detector	Pol	Hgt	Azt	Limit	Margin	Result
MHz	dBuV/m	dB	dB	dBuV/m	Peak	-	cm	Deg	dBuV	dB	
147.98	36.20	3.31	-15.55	23.96	QP	H	117	118	43.50	-19.54	Pass
155.69	42.87	3.34	-15.65	30.56	QP	H	173	154	43.50	-12.94	Pass
157.33	39.73	3.36	-15.64	27.45	QP	H	184	162	43.50	-16.05	Pass
160.01	40.44	3.36	-15.75	28.06	QP	H	151	326	43.50	-15.45	Pass
34.27	24.18	2.60	-10.21	16.57	QP	V	104	120	40.00	-23.43	Pass
143.99	44.18	3.29	-15.36	32.11	QP	V	110	82	43.50	-11.39	Pass
Spec Margin = Level – Limit, Level = Raw + Cable + AF ± Uncertainty AF= Amp Gain + ANT Factor											
Combined Standard Uncertainty $u_c(y) = \pm 4.52$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence											
Note: 1. Worst case was observed on Mid channel of the Bluetooth radio. 2. No significant emission was observed below 30 MHz.											

SOP 1 Radiated Emissions

Tracking # 31763009.001 Page 2 of 6

EUT Name	Wireless Audio Headset	Date	June 28, 2017
EUT Model	Ear Force Stealth 700X	Temp / Hum in	23°C / 38%rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Comfit.	Integrated Antenna on Y-Axis	Line AC / Freq	3.7 V
Standard	CFR47 Part 15 Subpart C	RBW / VBW	120 kHz/300 kHz
Dist/Ant Used	3m / 6505 and JB3	Performed by	Jeremy Luong

9 kHz to 1000 MHz Plot for Transmit at 2442 MHz

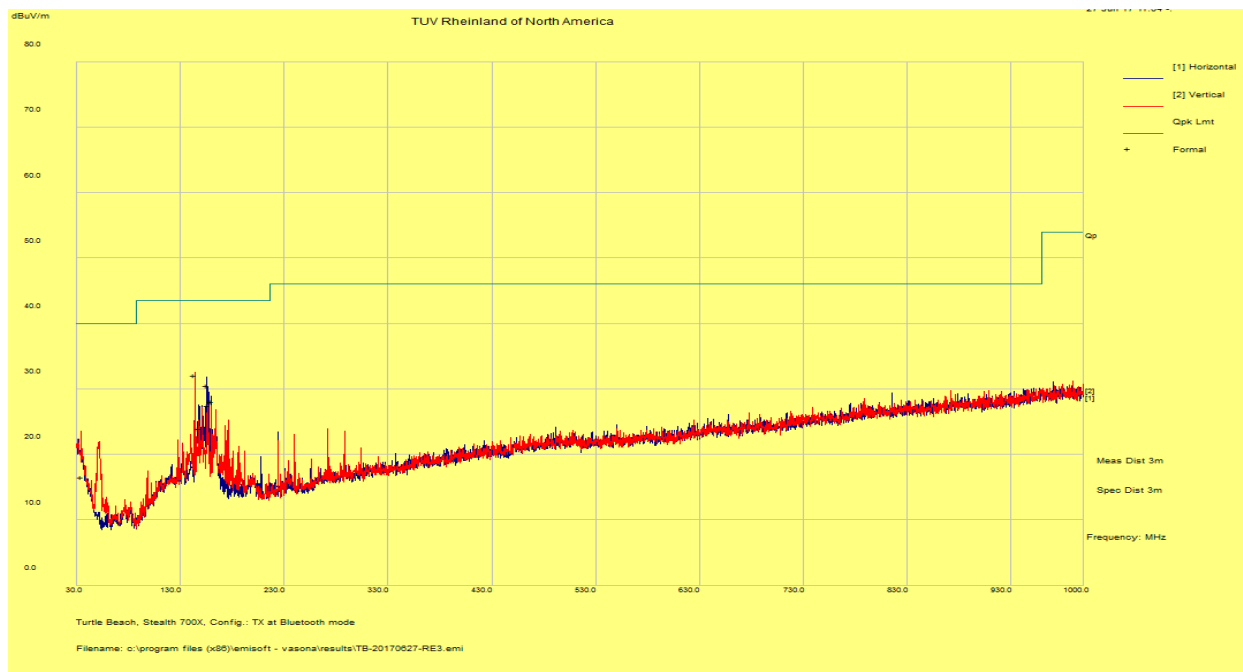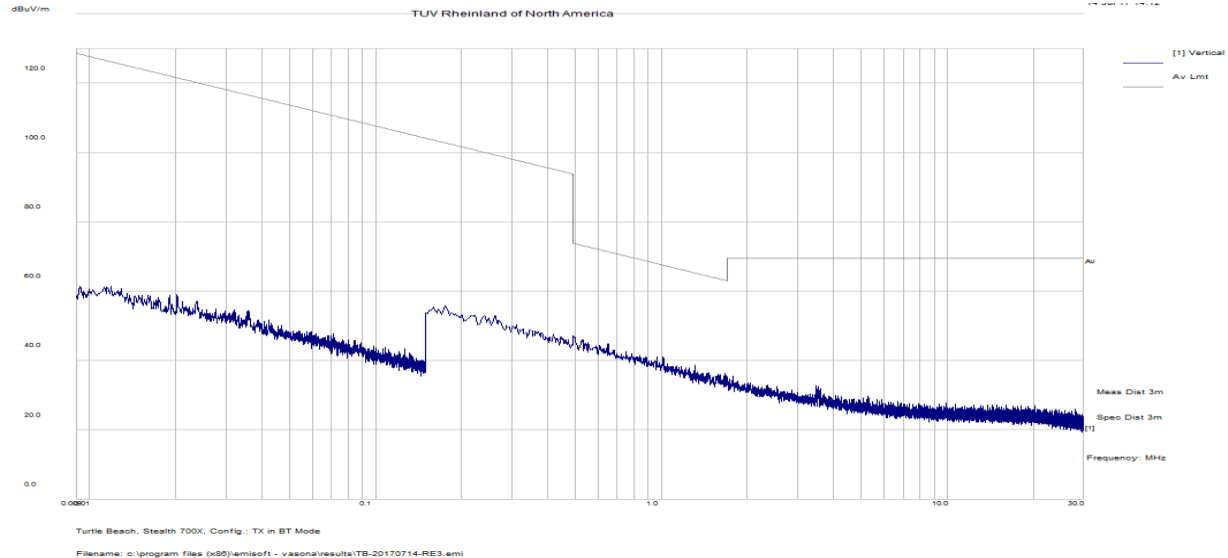

Note: Plot was scanned in the peak mode.



SOP 1 Radiated Emissions							Tracking # 31763009.001 Page 3 of 6				
EUT Name	Wireless Audio Headset						Date	June 28, 2017			
EUT Model	Ear Force Stealth 700X						Temp / Hum in	23°C / 38%rh			
EUT Serial	PP #2						Temp / Hum out	N/A			
EUT Comfit.	Integrated Antenna on Y-Axis						Line AC / Freq	3.7 V			
Standard	CFR47 Part 15 Subpart C						RBW / VBW	1 MHz / 3 MHz			
Dist/Ant Used	3m – DRH-118 / 1m - RA42-K-F-4B-C						Performed by	Jeremy Luong			
Freq.	Raw	Cbl	AF	Level	Det.	Pol.	Hght.	Azt	Limit	Margin	Result
MHz	dBuV/m	dB	dB	dBuV/m		H/V	cm	deg	dBuV/m	dB	
Above 1 GHz Radiated Emission at 2402 MHz, 3DH1											
4804.11	44.69	1.75	-20.11	26.33	Ave	H	115	152	54.00	-27.67	Pass
14331.05	40.58	3.20	-8.28	35.50	Ave	H	219	42	54.00	-18.50	Pass
17919.92	40.34	3.72	-3.26	40.80	Ave	H	142	360	54.00	-13.20	Pass
7209.47	43.05	2.20	-16.48	28.76	Ave	V	194	266	54.00	-25.24	Pass
21643.75	21.30	7.60	-9.70	19.20	Ave	H	168	193	54.00	-34.80	Pass
Above 1 GHz Radiated Emission at 2442 MHz, 3DH1											
4880.89	43.83	1.77	-20.14	25.46	Ave	H	207	180	54.00	-28.54	Pass
14337.37	40.64	3.20	-8.28	35.56	Ave	H	134	220	54.00	-18.44	Pass
17904.71	40.69	3.72	-3.34	41.06	Ave	H	106	322	54.00	-12.94	Pass
25251.25	24.70	8.10	-12.90	19.90	Ave	H	168	272	54.00	-34.10	Pass
20901.25	23.70	7.50	-9.10	22.00	Ave	V	168	49	54.00	-32.00	Pass
Above 1 GHz Radiated Emission at 2480 MHz, 3DH1											
4961.69	43.70	1.80	-20.20	25.29	Ave	H	213	232	54.00	-28.70	Pass
17892.03	40.79	3.72	-3.41	41.10	Ave	H	185	358	54.00	-12.91	Pass
9922.72	41.50	2.60	-12.80	31.28	Ave	V	187	290	54.00	-22.70	Pass
14567.61	40.19	3.32	-8.70	34.81	Ave	V	220	324	54.00	-19.19	Pass
20418.75	24.40	7.30	-8.90	22.90	Ave	H	168	117	54.00	-31.10	Pass
Spec Margin = Level – Limit, Level = Raw + Cable + AF ± Uncertainty											
AF= Amp Gain + ANT Factor											
Combined Standard Uncertainty $U_c(y) = \pm 4.52$ dB Expanded Uncertainty $U = kU_c(y)$ $k = 2$ for 95% confidence											
Note Worst case was observed at 3DH1.											
All emissions met restricted band limits.											

SOP 1 Radiated Emissions

Tracking # 31763009.001 Page 4 of 6

EUT Name	Wireless Audio Headset	Date	June 28, 2017
EUT Model	Ear Force Stealth 700X	Temp / Hum in	23°C / 38%rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Integrated Antenna on Y-Axis	Line AC	3.7 V
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz/ 3 MHz
Dist/Ant Used	3m – DRH-118 / 1m - RA42-K-F-4B-C	Performed by	Jeremy Luong

Above 1 GHz Radiated Emission Plot for Transmit Mode at 2402 MHz, 3DH1

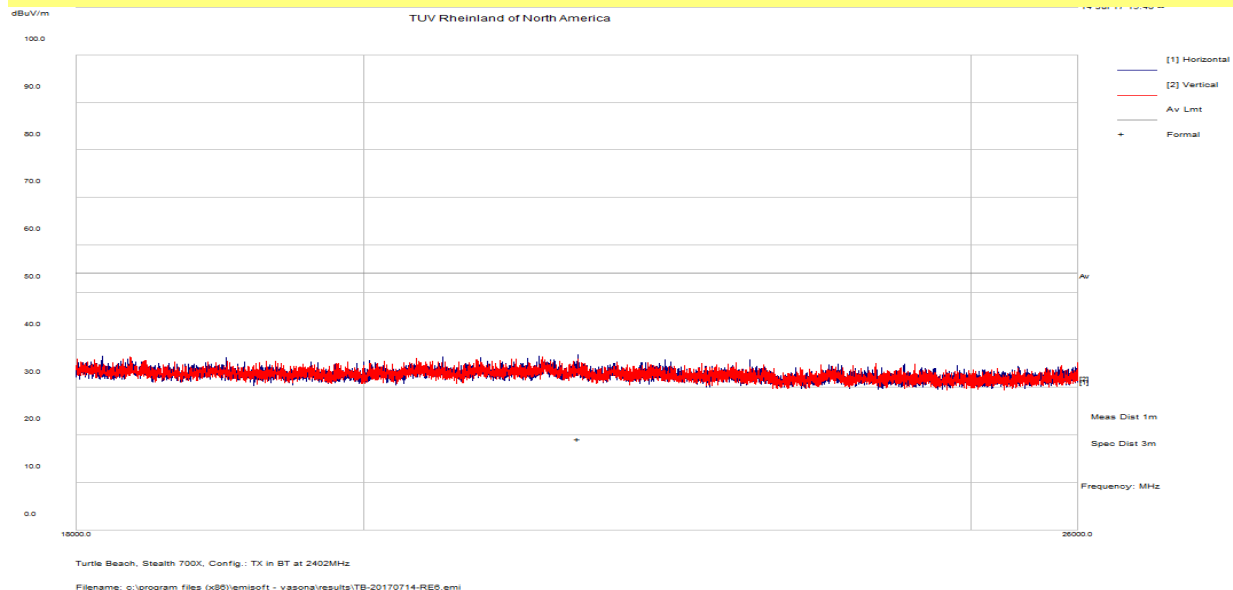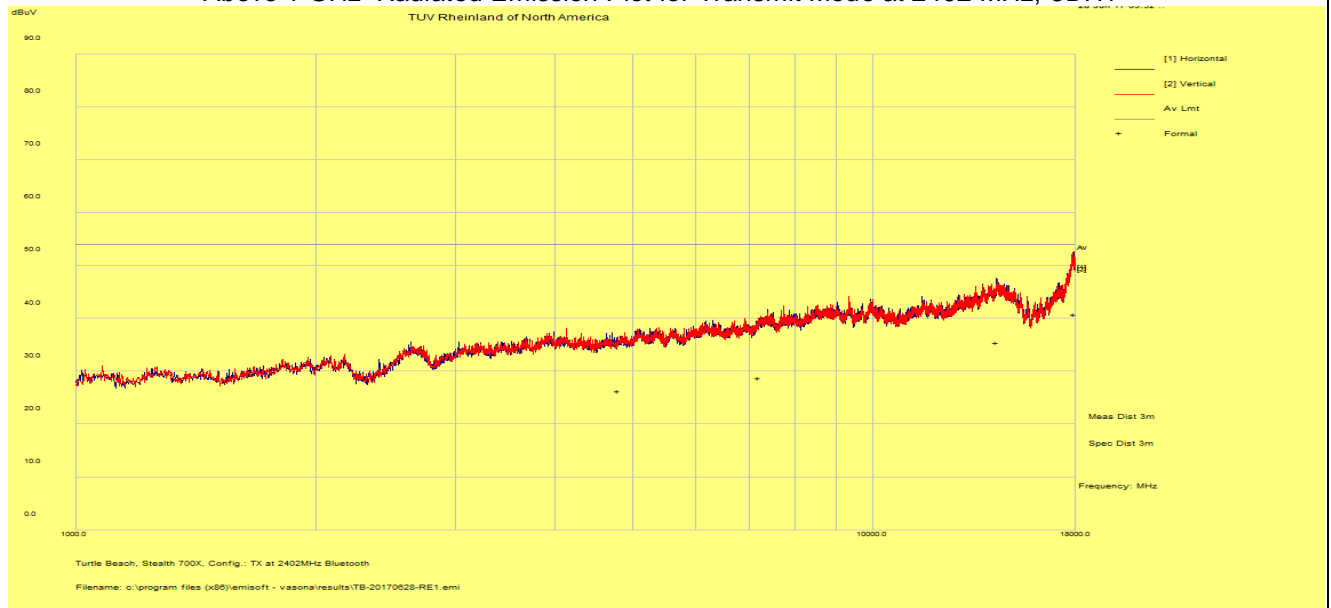



Notes: 1 GHz – 26 GHz was scanned at 1m distance.

SOP 1 Radiated Emissions

Tracking # 31763009.001 Page 5 of 6

EUT Name	Wireless Audio Headset	Date	June 28, 2017
EUT Model	Ear Force Stealth 700X	Temp / Hum in	23°C / 38%rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Integrated Antenna on Y-Axis	Line AC	3.7 V
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz/ 3 MHz
Dist/Ant Used	3m – DRH-118 / 1m - RA42-K-F-4B-C	Performed by	Jeremy Luong

Above 1 GHz Radiated Emission Plot for Transmit Mode at 2442 MHz, 3DH1

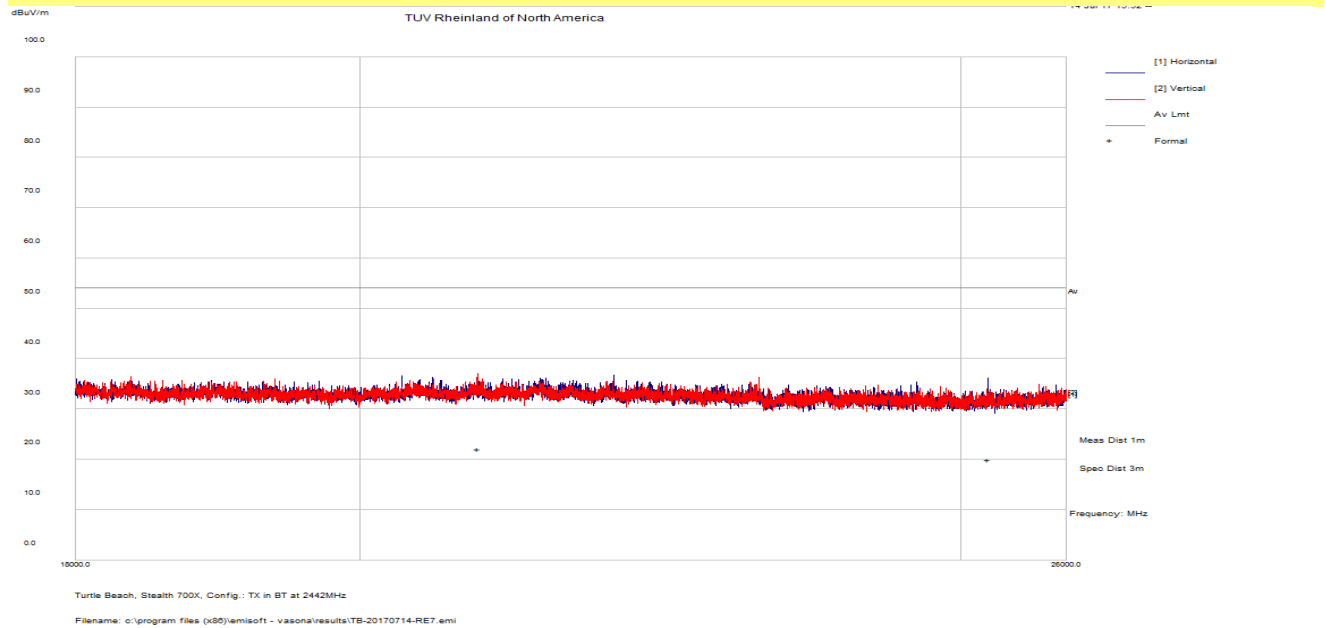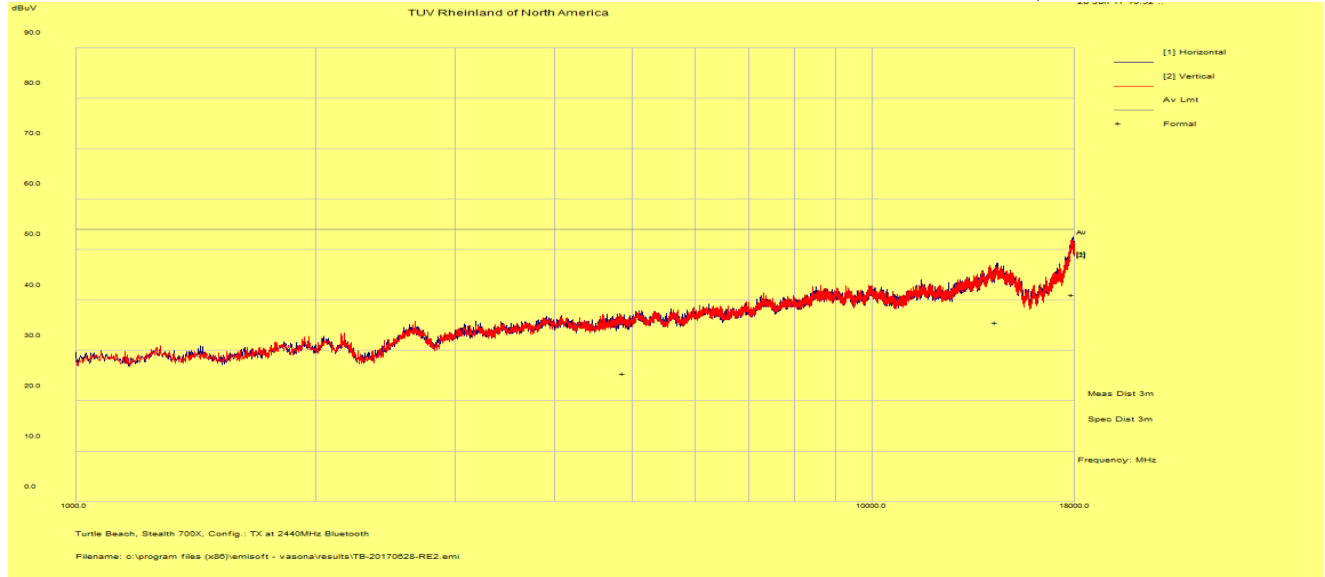



Notes: 1 GHz – 26 GHz was scanned at 1m distance.

SOP 1 Radiated Emissions

Tracking # 31763009.001 Page 6 of 6

EUT Name	Wireless Audio Headset	Date	June 28, 2017
EUT Model	Ear Force Stealth 700X	Temp / Hum in	23°C / 38%rh
EUT Serial	PP #2	Temp / Hum out	N/A
EUT Config.	Integrated Antenna on Y-Axis	Line AC	3.7 V
Standard	CFR47 Part 15 Subpart C	RBW / VBW	1 MHz/ 3 MHz
Dist/Ant Used	3m – DRH-118 / 1m - RA42-K-F-4B-C	Performed by	Jeremy Luong

Above 1 GHz Plots for Transmit Mode at 2480 MHz 3DH1

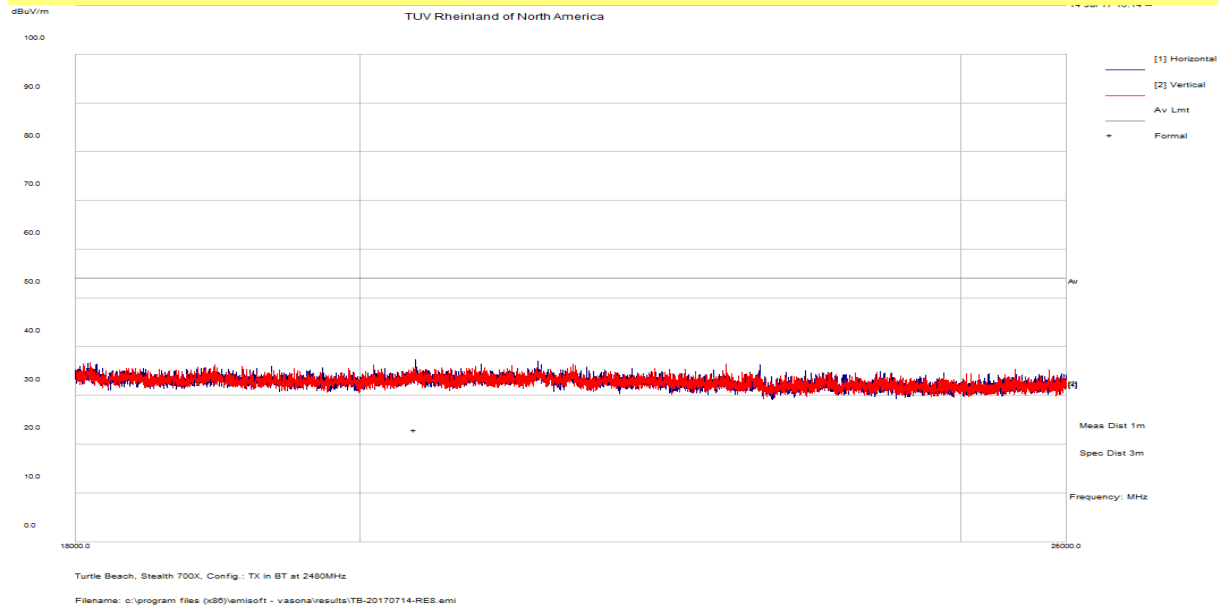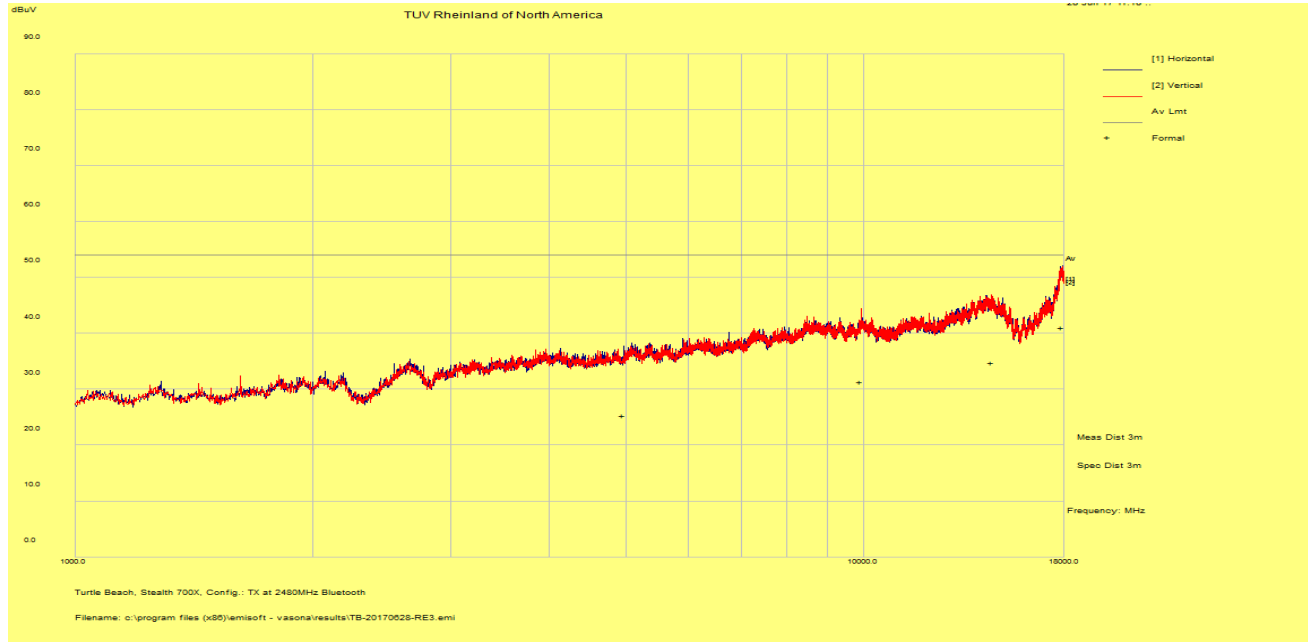

Notes: 1 GHz – 26 GHz was scanned at 1m distance.

4.5.4 Sample Calculation

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{FIM} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where:

FIM = Field Intensity Meter (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V} / \text{m}}{20}}$$

4.6 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.10: 2013. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207 and RSS-GEN. Sect. 8.8.

4.6.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50 μ H / 50 Ω LISNs.

Testing is performed in Lab 5. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

Preliminary test performed on all modes in the Ear Force Stealth 700X. The worst case observed at 3DH1.

4.6.1.1 Deviations

There were no deviations from this test methodology.

4.6.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 8: AC Conducted Emissions – Test Results


Test Conditions: Conducted Measurement at Normal Conditions only		August 12, 2017
Antenna Type: Integrated		Power Level: See Test Plan
AC Power: 110 Vac/60 Hz at host device		Configuration: Tabletop
Ambient Temperature: 22° C		Relative Humidity: 42% RH
Configuration	Frequency Range	Test Result
Line 1 (Hot)	0.15 to 30 MHz	Pass
Line 2 (Neutral)	0.15 to 30 MHz	Pass

SOP 2 Conducted Emissions						Tracking # 31763009.001 Page 1 of 4			
EUT Name	Wireless Audio Headset					Date	August 12, 2017		
EUT Model	Ear Force Stealth 700X					Temp / Hum in	22° C / 42% rh		
EUT Serial	PP#2					Temp / Hum out	N/A		
EUT Config.	TX mode					Line AC / Freq	110Vac / 60Hz (host)		
Standard	CFR47 Part 15.207 and RSS Gen					RBW / VBW	9 kHz / 30 kHz		
Lab/LISN	Lab #5 /Com-Power, Line 1					Performed by	Jeremy Luong		
Frequency	Raw	Limiter	Ins. Loss	Level	Detector	Line	Limit	Margin	Result
MHz	dBuV	dB	dB	dBuV			dBuV	dB	
0.154	39.88	9.82	0.06	49.75	QP	Live	65.80	-16.04	Pass
0.154	30.28	9.82	0.06	40.15	Ave	Live	55.80	-15.64	Pass
0.236	33.42	9.83	0.04	43.29	QP	Live	62.24	-18.94	Pass
0.236	18.38	9.83	0.04	28.25	Ave	Live	52.24	-23.98	Pass
0.307	31.63	9.83	0.03	41.49	QP	Live	60.05	-18.56	Pass
0.307	19.82	9.83	0.03	29.68	Ave	Live	50.05	-20.37	Pass
0.464	24.76	9.84	0.03	34.63	QP	Live	56.62	-21.99	Pass
0.464	16.74	9.84	0.03	26.61	Ave	Live	46.62	-20.01	Pass
0.569	27.46	9.85	0.03	37.34	QP	Live	56.00	-18.66	Pass
0.569	16.60	9.85	0.03	26.48	Ave	Live	46.00	-19.52	Pass
7.979	29.98	9.96	0.03	39.97	QP	Live	60.00	-20.03	Pass
7.979	11.71	9.96	0.03	21.70	Ave	Live	50.00	-28.30	Pass
8.450	30.14	9.96	0.02	40.13	QP	Live	60.00	-19.87	Pass
8.450	12.83	9.96	0.02	22.82	Ave	Live	50.00	-27.18	Pass
Spec Margin = QP./Ave. - Limit, ± Uncertainty									
Combined Standard Uncertainty $u_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence									
Notes: EUT was setup as table top equipment (worse case configuration).									

SOP 2 Conducted Emissions

Tracking # 31763009.001 Page 2 of 4

EUT Name	Wireless Audio Headset	Date	August 12, 2017
EUT Model	Ear Force Stealth 700X	Temp / Hum in	22° C / 42% rh
EUT Serial	PP#2	Temp / Hum out	N/A
EUT Config.	TX mode	Line AC	110Vac / 60Hz (host)
Standard	CFR47 Part 15.207 and RSS Gen	RBW / VBW	9 kHz / 30 kHz
Lab/LISN	Lab #5 /Com-Power, Line 1	Performed by	Jeremy Luong

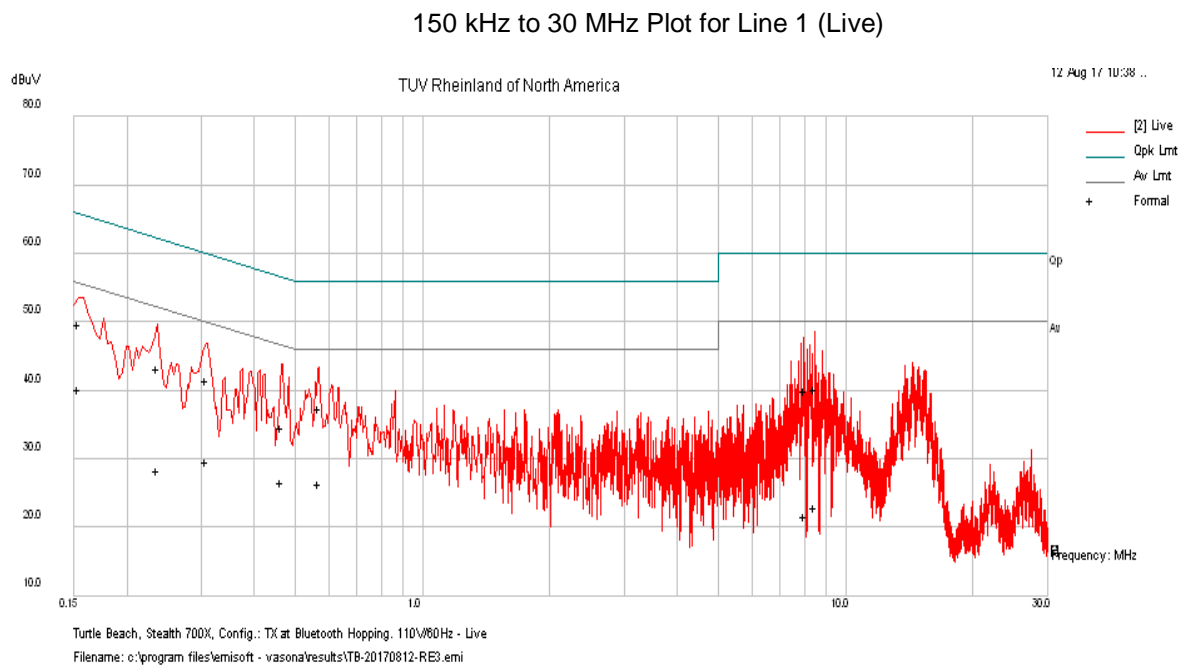


Note: Met FCC Class B limit.

SOP 2 Conducted Emissions						Tracking # 31763009.001 Page 3 of 4			
EUT Name	Wireless Audio Headset					Date	August 12, 2017		
EUT Model	Ear Force Stealth 700X					Temp / Hum in	22° C / 42% rh		
EUT Serial	PP#2					Temp / Hum out	N/A		
EUT Config.	TX mode					Line AC / Freq	110Vac / 60Hz (host)		
Standard	CFR47 Part 15.207 and RSS Gen					RBW / VBW	9 kHz / 30 kHz		
Lab/LISN	Lab #5 /Com-Power, Line 2					Performed by	Jeremy Luong		
Frequency	Raw	Limiter	Ins. Loss	Level	Detector	Line	Limit	Margin	Result
MHz	dBuV	dB	dB	dBuV			dBuV	dB	
0.154	35.39	9.82	0.06	45.26	QP	Neutral	65.80	-20.53	Pass
0.154	24.88	9.82	0.06	34.76	Ave	Neutral	55.80	-21.04	Pass
0.262	27.32	9.83	0.04	37.18	QP	Neutral	61.36	-24.18	Pass
0.262	17.69	9.83	0.04	27.56	Ave	Neutral	51.36	-23.80	Pass
0.427	23.19	9.84	0.03	33.06	QP	Neutral	57.32	-24.26	Pass
0.427	10.59	9.84	0.03	20.46	Ave	Neutral	47.32	-26.86	Pass
0.632	21.76	9.85	0.03	31.64	QP	Neutral	56.00	-24.36	Pass
0.632	9.42	9.85	0.03	19.30	Ave	Neutral	46.00	-26.70	Pass
7.740	26.16	9.96	0.03	36.14	QP	Neutral	60.00	-23.86	Pass
7.740	6.91	9.96	0.03	16.90	Ave	Neutral	50.00	-33.10	Pass
8.211	26.64	9.96	0.03	36.63	QP	Neutral	60.00	-23.37	Pass
8.211	8.60	9.96	0.03	18.59	Ave	Neutral	50.00	-31.41	Pass
8.495	21.26	9.97	0.02	31.24	QP	Neutral	60.00	-28.76	Pass
8.495	5.58	9.97	0.02	15.56	Ave	Neutral	50.00	-34.44	Pass
Spec Margin = QP./Ave. - Limit, ± Uncertainty									
Combined Standard Uncertainty $u_c(y) = \pm 1.2$ dB Expanded Uncertainty $U = k u_c(y)$ $k = 2$ for 95% confidence									
Notes: EUT was setup as table top equipment (worse case configuration).									

SOP 2 Conducted Emissions

Tracking # 31763009.001 Page 4 of 4

EUT Name	Wireless Audio Headset	Date	August 12, 2017
EUT Model	Ear Force Stealth 700X	Temp / Hum in	22° C / 42% rh
EUT Serial	PP#2	Temp / Hum out	N/A
EUT Config.	TX mode	Line AC	110Vac / 60Hz (host)
Standard	CFR47 Part 15.207 and RSS Gen	RBW / VBW	9 kHz / 30 kHz
Lab/LISN	Lab #5 /Com-Power, Line 2	Performed by	Jeremy Luong

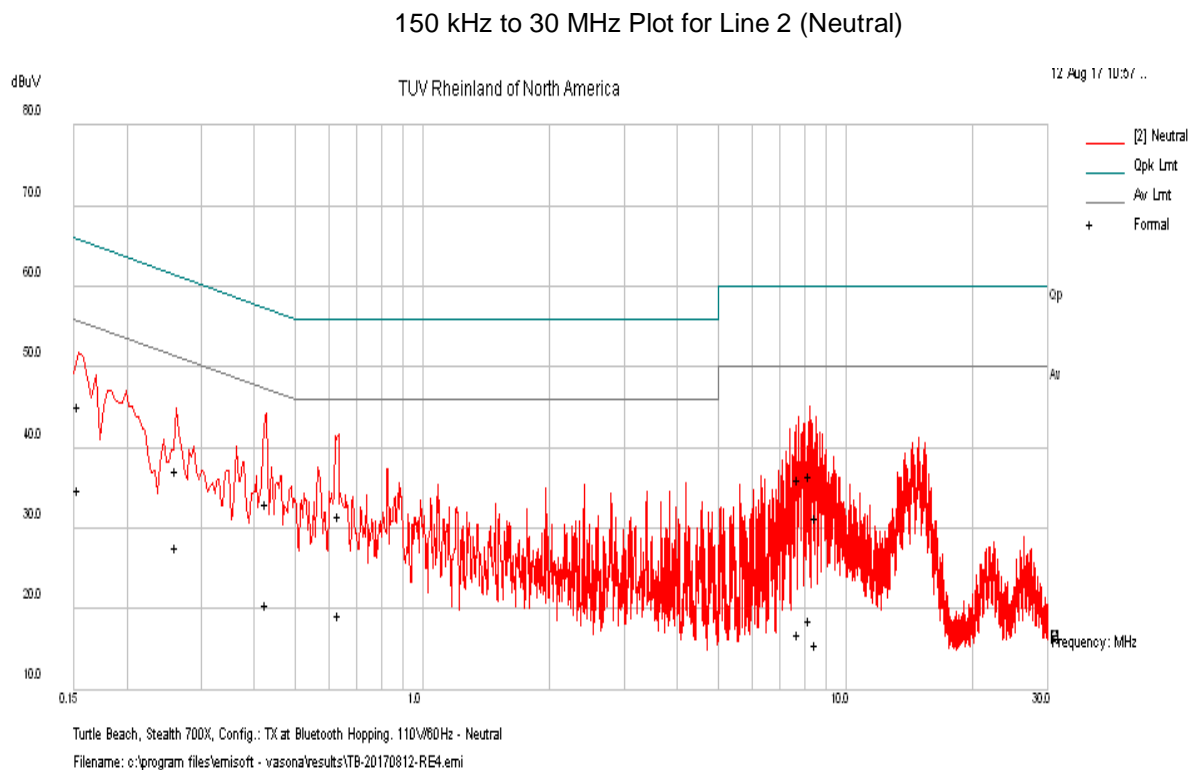

Note: Met FCC Class B Limit.

5 Test Equipment Use List

5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yyyy	Next Cal mm/dd/yyyy
Bilog Antenna	Sunol Sciences	JB3	A102606	06/15/2016	06/15/2018
Horn Antenna	Sunol Science	DRH118	A040806	11/11/2016	11/11/2018
Horn Antenna	Com-Power	AHA-840	105005	05/26/2017	05/26/2019
Loop Antenna	EMCO	6502	9110-2683	07/20/2017	07/20/2019
Spectrum Analyzer	Rohde & Schwarz	FSL6	100169	01/13/2017	01/13/2018
Spectrum Analyzer	Agilent	N9038A	MY552260210	01/16/2017	01/16/2018
Spectrum Analyzer	Rohde Schwarz	ESIB40	832427/002	01/16/2017	01/16/2018
Spectrum Analyzer	Rohde Schwarz	FSV40	1321.3008K40	09/19/2017	09/19/2018
Amplifier	Sonoma Instruments	310	165516	01/19/2017	01/19/2018
Amplifier	Miteq	TTA1800-30-HG	2020728	11/12/2016	11/12/2017
Amplifier	Rohde & Schwarz	TS-PR26	100011	11/04/2017	11/04/2018
Amplifier	Rohde & Schwarz	TS-PR40	100012	08/02/2017	08/02/2018
Power Meter	Agilent	E4418B	MY45103902	01/11/2017	01/11/2018
Power Sensor	Hewlett Packard	8482A	1925A04647	01/01/2017	01/01/2018
Thermometer	Fluke	52II	88650033	11/04/2016	11/04/2017
Thermo Chamber	Espec	BTZ-133	0613436	06/01/2017	06/01/2018
Multimeter	Fluke	177	92780312	01/11/2017	01/11/2018
DC Power Supply	Agilent	E3634A	MY400004331	01/12/2017	01/12/2018
Notch Filter	Micro-Tronics	BRM50702	037	01/19/2017	01/19/2018
Signal Generator	Anritsu	MG3694A	42803	01/13/2017	01/13/2018
Signal Generator	Rohde & Schwarz	SMF100A	1167.0000K02	09/19/2017	09/19/2018
Signal Generator	Rohde & Schwarz	SMBV100A	1407.6004K02	09/19/2017	09/19/2018
Power Sensors	Rohde & Schwarz	OSP120	1520.9010.02	09/19/2017	09/19/2018

* Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.

6 EMC Test Plan

6.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

6.2 Customer

Table 9: Customer Information

Company Name	Voyetra Turtle Beach, Inc.
Address	100 Summit Lake Drive, Suite 100
City, State, Zip	Valhalla, New York 10595
Country	U.S.A.

Table 10: Technical Contact Information

Name	Tim Blaney
E-mail	tim@commcepts.net
Phone	(530) 277-3482

6.3 Equipment Under Test (EUT)

Table 11: EUT Specifications

EUT Specifications	
Dimensions	225mm (8.9") x 252mm (9.9") x 115mm (4.5")
DC Input	Headset Input Voltage: 3.7 Vdc (battery)
Environment	Indoor
Operating Temperature Range:	0 to 50 degrees C
Multiple Feeds:	<input type="checkbox"/> Yes and how many <input checked="" type="checkbox"/> No
Product Marketing Name (PMN)	Ear Force Stealth 700X
Hardware Version Identification Number (HVIN)	Stealth 700X
Firmware Version Identification Number (FVIN)	0.1.7
Bluetooth Radio	
Operating Mode	BDR, EDR, and BLE
Transmitter Frequency Band	2402 MHz to 2480 MHz
Operating Bandwidth	1 MHz
Max. Power Output	2.19 dBm
Power Setting @ Operating Channel	Fixed
Antenna Type	1 integrated PCB antenna
Antenna Gain	2.8 dBi
Modulation Type	GFSK, $\pi/4$ -DQPSK and 8DPSK
Data Rate	1 Mbps, 2 Mbps and 3 Mbps
Note: This report only documents the Bluetooth radio characteristics for the 2402 - 2480 MHz band and the RF output power is fixed for this chipset.	

Table 12: Antenna Information

Number	Antenna Type	Description	Max Gain (dBi)
Antenna 1	Integrated PCB	Max. peak gain at 2.4 GHz	+2.8

Table 13: Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
USB	USB	<input checked="" type="checkbox"/> No	<input checked="" type="checkbox"/> Metric: 1 m	<input checked="" type="checkbox"/> M

Table 14: Supported Equipment

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Dell	Latitude	35521341769	Setup EUT operating channel
Interface Board	Turtle Beach	N.A	N.A	Access 2.4 GHz radio chipset
Note: None.				

Table 15: Description of Sample used for Testing

Device	Serial	RF Connection	CFR47 Part 15.247
Ear Force Stealth 700X	PP #2	Integrated Antenna	TX Emissions, Rad. Band-edge.
	PP #1	Direct via SMA Connection	Transmit Power, Occupied Bandwidth, Out of Band Emission, Hopping Requirement

Table 16: Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Photo (X-Axis)	Setup Photo (Y-Axis)	Setup Photo (Z-Axis)
Ear Force Stealth 700X	Integrated	Transmit	N/A	EUT upright	N/A
Note: The Ear Force Stealth 700X is designed and intended to be worn upright. All emission scans performed on the Y-Axis; worst case configuration.					

Table 17: Final Test Mode for 2402 MHz to 2480MHz Channels

Test	802.11a
Occupied Bandwidth CFR 47 15.247(a1), RSS Gen Sect. 4.4.	2402, 2442, 2480 MHz at BDR, EDR, and BLE
Output Power CFR47 15.247 (b1), RSS 210 Sect. A.8.1	2402, 2442, 2480 MHz at BDR, EDR, and BLE
Out of Band Emission CFR47 15.247 (d), RSS 210 Sect. A.8.5	2402, 2442, 2480 MHz at BDR, EDR, and BLE
Hopping Requirements CFR47 15.247 (a1), RSS 210 Sect. A.8.1	2402, 2442, 2480 MHz at BDR and EDR
Band-Edge (Radiated) FCC Part 15.205, 15.209	2402, 2480 MHz at EDR and BLE
Transmitted Spurious Emission (30 MHz – 1GHz) FCC Part 15.205, 15.209	2442 MHz at 3DH1 (Worst Case)
Transmitted Spurious Emission (Above 1GHz) FCC Part 15.205, 15.209	2402, 2442, 2480 MHz at 3DH1 (Worst Case)
AC Conducted Emission FCC Part 15.207	Prescan both hopping mode and BLE. Perform on the worst case.
Note: <ol style="list-style-type: none"> 1. Pretest showed 3DH1 was the worst case configuration. 2. All radiated emission tests were performed on the Y-Axis. 3. All tests were pre-scanned for worst case configuration before final testing. 4. Since Ear Force Stealth 700X supports both BLE and FHSS Bluetooth, Ear Force Stealth 700X will demonstrate compliance to the rules required for DTS per KDB 453039. 	

6.4 Test Specifications

Testing requirements

Table 18: Test Specifications

Emissions and Immunity	
Standard	Requirement
CFR 47 Part 15.247: 2017	All
RSS 247 Issue 2, 2017	All

END OF REPORT